


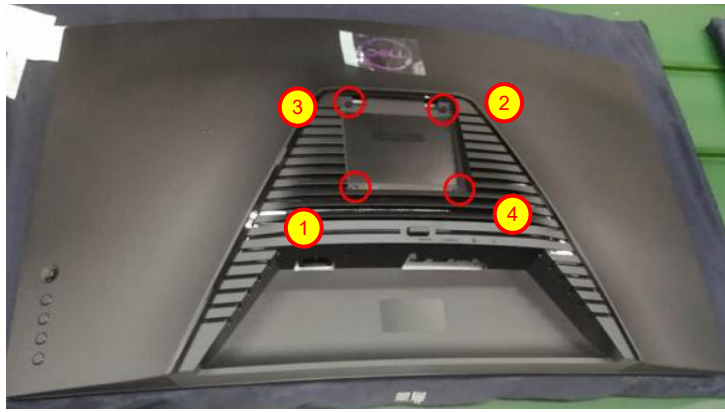


# Mechanical Instruction


## Disassembly Procedures:

Step	Figure	Remark
<b>S1.Before disassemble</b>		Turn off power, Unplug external cables from product
<b>S2.Remove the STAND-BASE ASS'Y</b>	 	Put the MNT the curve cushion.  Push the button to remove the stand-base assy.

**S3.Remove the REAR COVER**




Use a Philips-head screwdriver to remove 4 screws for unlocking mechanisms.  
(No.1~4 screw size=M4x10; Torque: 12±2kgf.cm)

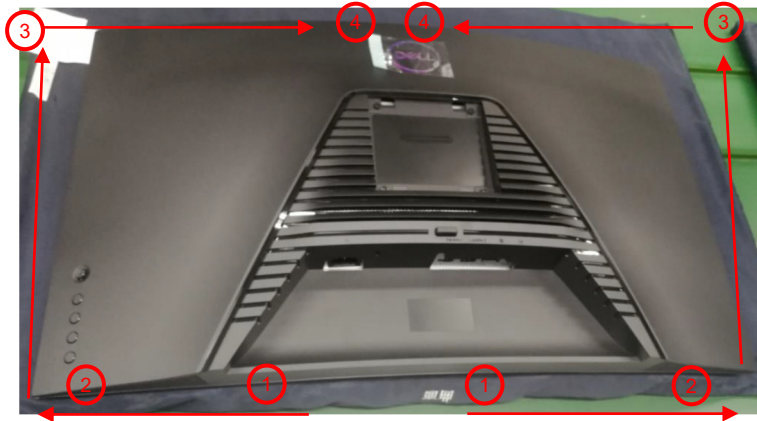


Use Penknife to separate the bezel and rear cover follow the arrows in sequence, then you can take out rear cover.

**S4.Tear off the tapes and disconnect the connectors**

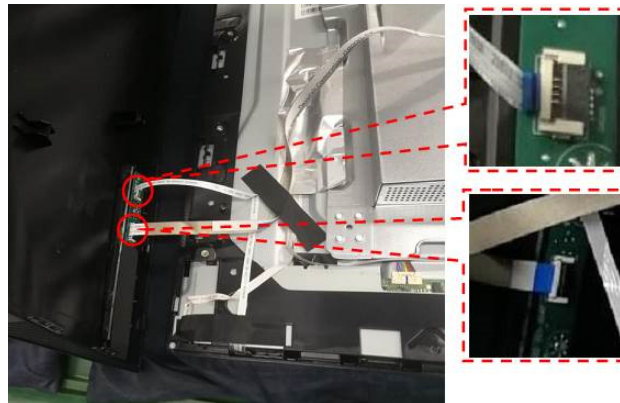

Disconnect the cables from the connectors.

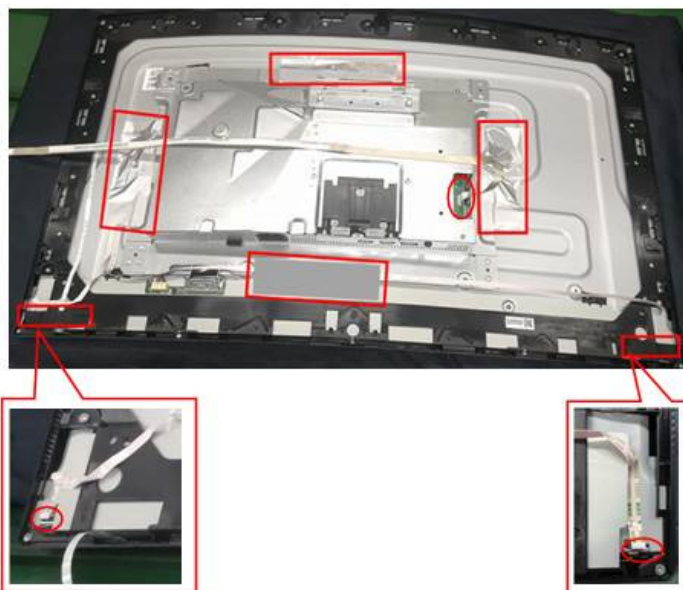


Tear off 4 pieces of aluminum foil and 2 pieces of tapes.

Use a Philips-head screwdriver to remove 4 screws for unlocking the main frame


(No.1~4 screw

size=M3x4, Torque:

3±0.5kgf.cm)

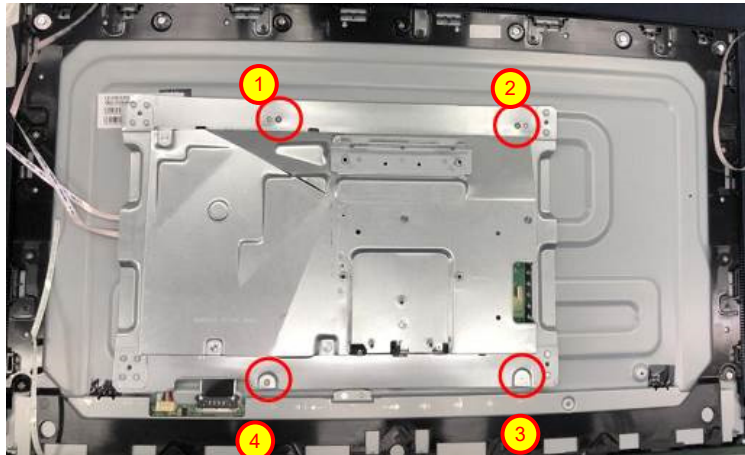


Disconnect the FFC cable

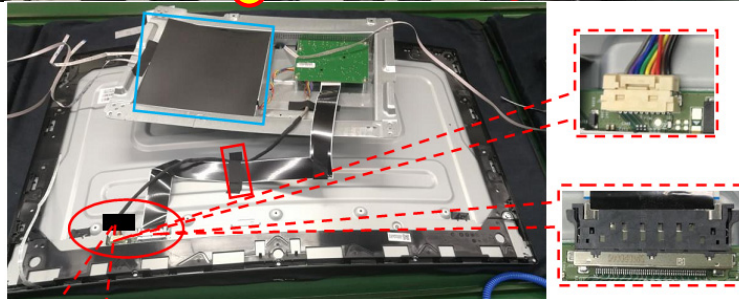


Remove the mylar and connector



Use a Philips-head screwdriver to remove 5 screws for unlocking the Main board, Power board (No.1~4 screw size=D3x6, Torque=6±1kgf.cm



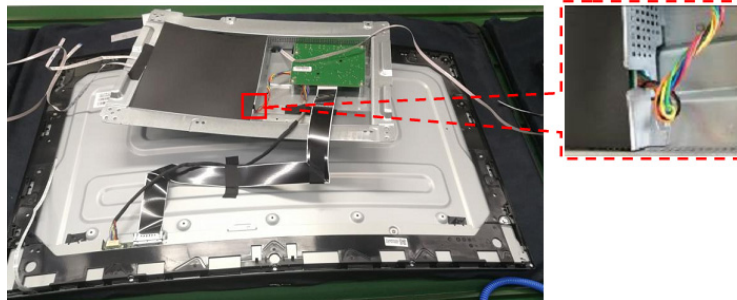


No.5 screw size=M4x6, Torque=6±1kgf.cm

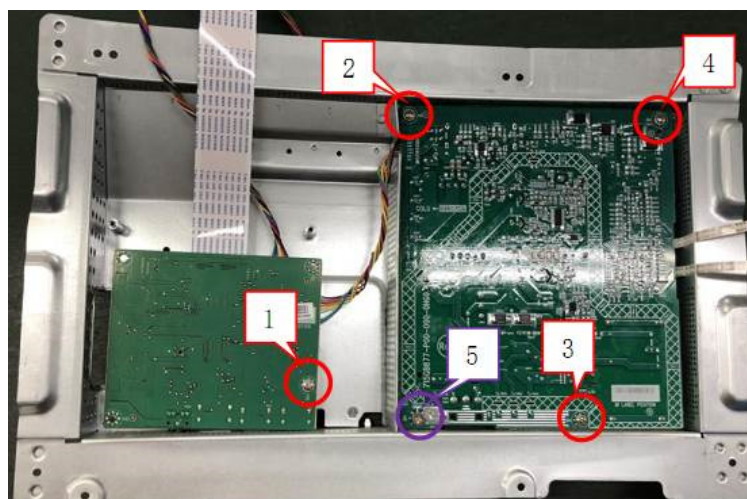


**S5. Remove the main board and power board**



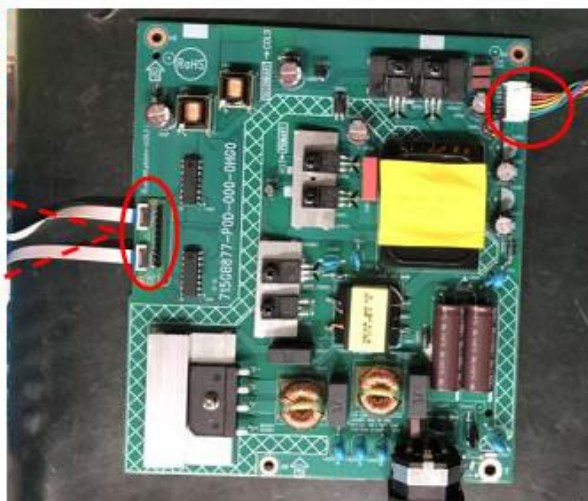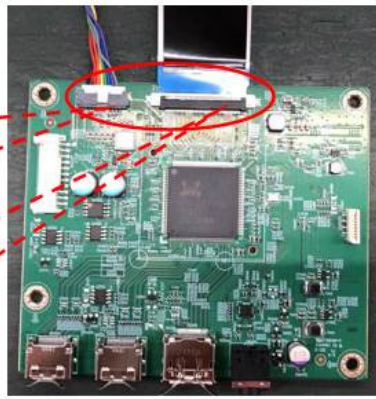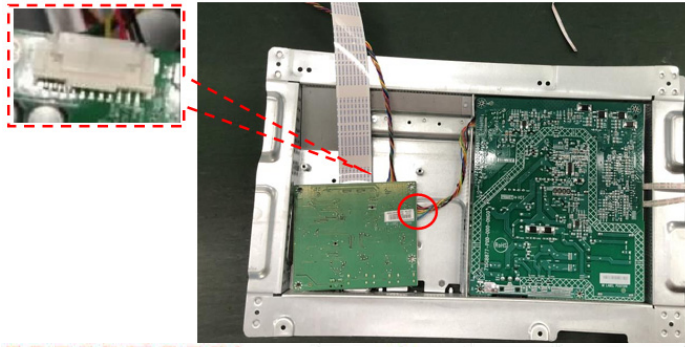


Disconnect the connectors

**S6. Remove the Panel and middle frame**

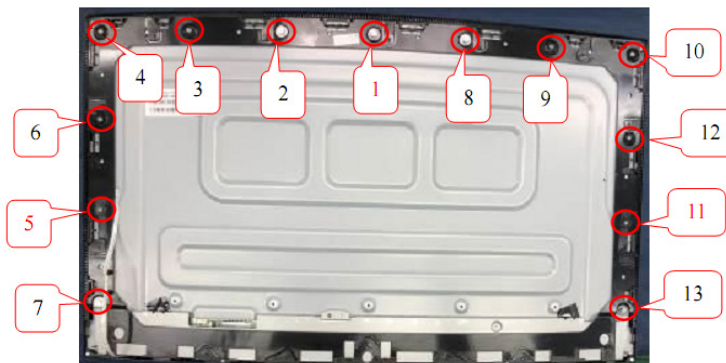


Use a Philips-head screwdriver to remove 13 screws for unlocking the middle frame  
 (No.1~13 screw size=M3x4, Torque=3±0.5kgf.cm)

**S7.Remove the DECO\_BEZEL**

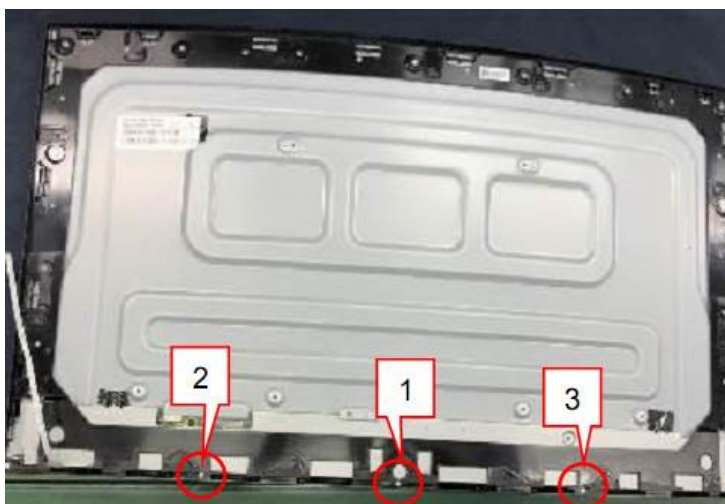

Use a Philips-head screwdriver to remove 3 screws to remove the DECO\_BEZEL.  
(No.1~3 screw size=Q2x2.5, Torque=1±0.2kgf.cm)

**S8.Remove the latch**

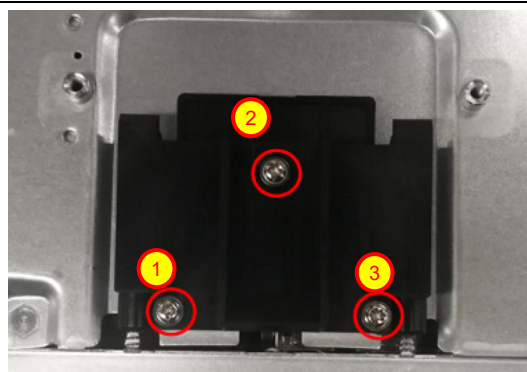


Use a Philips-head screwdriver to remove 3 screws for unlocking the latch.  
(No.1~3 Screw size=D3x6, Torque: 6±1kgf.cm)

**S9. Remove the Key board**




Use a Philips-head screwdriver to remove 3 screws for unlocking the key board  
( No.1~3 screw size=Q2x2.5, Torque=0.9±0.4kgf.cm)

**S10. Remove the deco bezel and the key board**

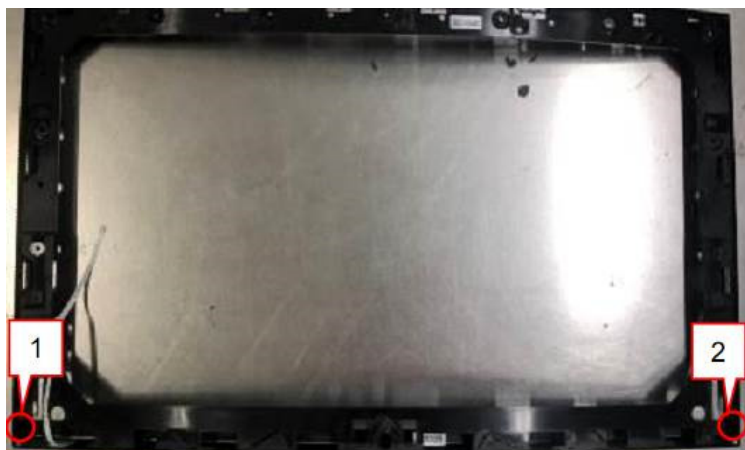

Use a Philips-head screwdriver to remove 2 screws for unlocking the key board  
(No.1~2 screw size=Q2x2.5, Torque=1±0.2kgf.cm)

(No.1~2 screw size=Q2x2.5, Torque=0.9±0.4kgf.cm)


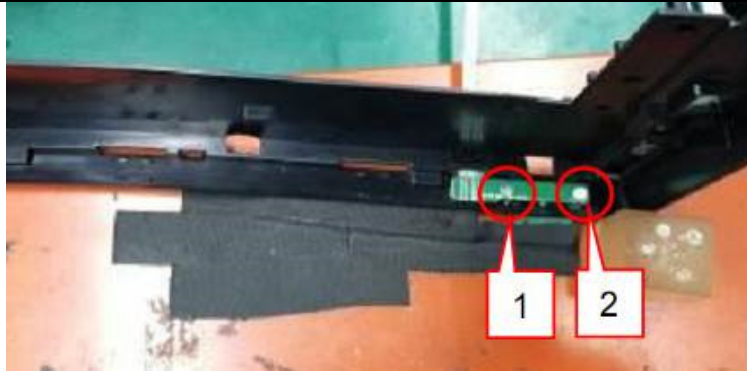



## 8.1 Product material information

The following substances, preparations, or components should be disposed of or recovered separately from other WEEE in compliance with Article 4 of EU Council Directive 75/442/EEC.

Capacitors / condensers (containing PCB/PCT)	No used
Mercury containing components	No used
Batteries	No used
Printed circuit boards (with a surface greater than 10 square cm)	Product has printed circuit boards (with a surface greater than 10 square cm)
Component contain toner, ink and liquids	No used
Plastic containing BFR	No used
Component and waste contain asbestos	No used
CRT	No used
Component contain CFC, HCFC, HFC and HC	No used
Gas discharge lamps	No used
LCD display > 100 cm <sup>2</sup>	Product has an LCD greater than 100 cm <sup>2</sup>
External electric cable	Product has external cables
Component contain refractory ceramic fibers	No used
Component contain radio-active substances	No used
Electrolyte capacitors (height > 25mm, diameter > 25mm)	Product has electrolyte capacitors (height > 25mm, diameter > 25mm)

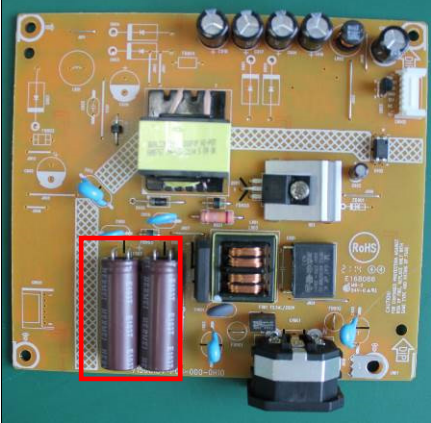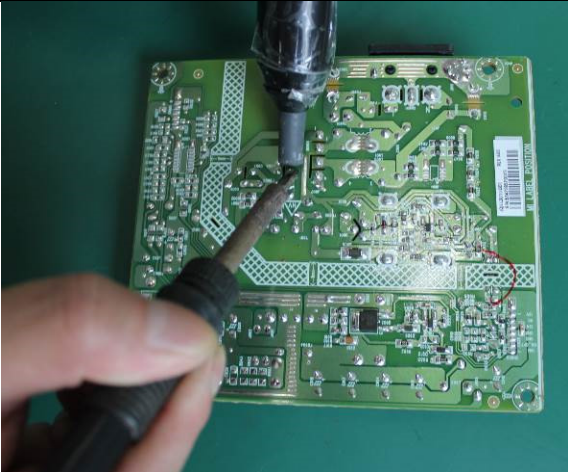

Step	Figure	Remark
		<p>Remove electrolyte capacitors (red mark) from printed circuit boards</p>
<p>Remove the big capacitors</p>		<p>Take out bulk cap. pin solder with soldering iron and absorber</p>
		<p>Lift the bulk cap. up and away from the PCB</p>



## **9.1 Tools Required**

List the type and size of the tools that would typically can be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description:

- Phillip-head Screwdriver
- Hexagonal Screwdriver
- Penknife
- Soldering iron and absorber