


◀◀ [Go to contents page](#)

1. Disassembly Procedures:

S1 Open the carton with a proper tool.

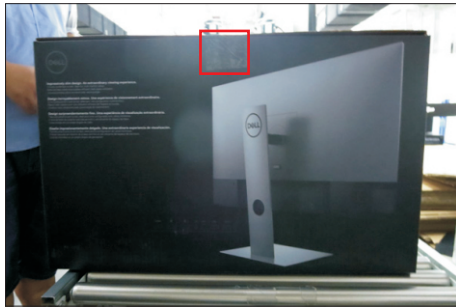


Take out all accessories including QSG, Delta-e paper, user's manual, DP cable, USB cable, power cable and other packing materials from the carton. (Note: It depends on whether users returning the accessories)

S2



Take out the base, Paper-Top and stand from the carton, then take out the monitor from the pizza carton.

S3

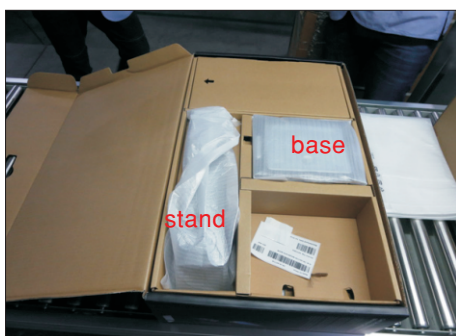


S4

Take out the monitor from EPE-bag and put the LCD monitor on a protective cushion.





S5

Use a Philips-head screwdriver to remove four screws for unlocking mechanisms. (No.1~4 screw size=M4x8; Torque=10~11kgfxcM)

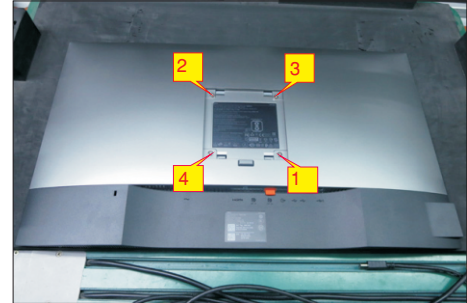


Wedge your fingers between the rear cover and the middle bezel on the corners of the top side of the monitor to release the rear cover, then use one hand to press the middle bezel, the other hand to pull up carefully the rear cover in order of arrow preference for unlocking mechanisms of rear cover.

S6

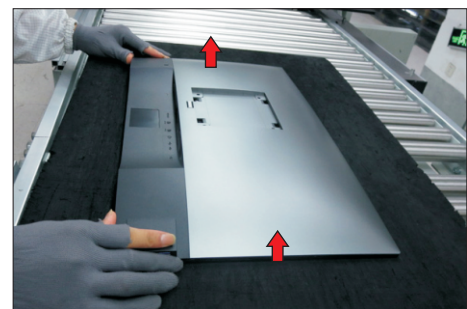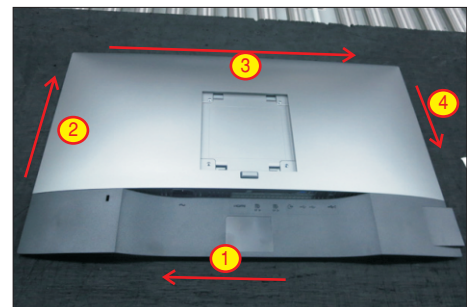

S7

Lift the rear cover up carefully. Disconnect the USB FFC cable from the connector of the interface board, and then remove the rear cover.

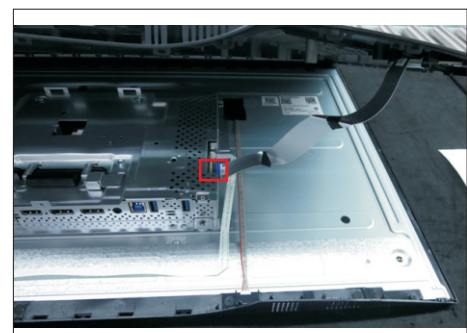


◀◀ Go to contents page

S7


Use a Philips-head screwdriver to remove one screw for unlocking the USB board unit, then release the USB board unit and put it aside.

(No.1 screw size=M3x6, Torque=4±0.5kgfxcn)

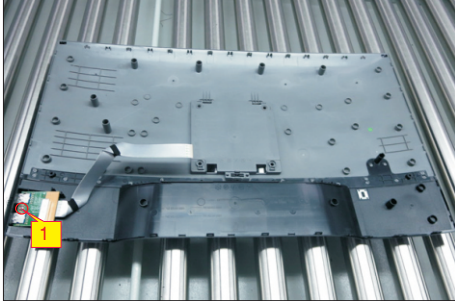


S8

Tear off 2pcs aluminium foils for unfixing the bracket, then tear off 1pcs mylar tape, and then tear off 1pcs acetate tape for unlocking the panel lamp cable.

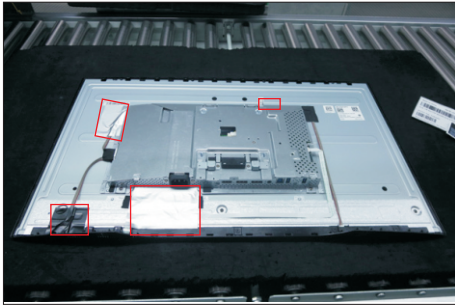

S9


Tear 1pcs PVC tape, then use a proper tool to release the function key cable from the connector, then pull the function key cable high for releasing the function key cable as the picture below shown.

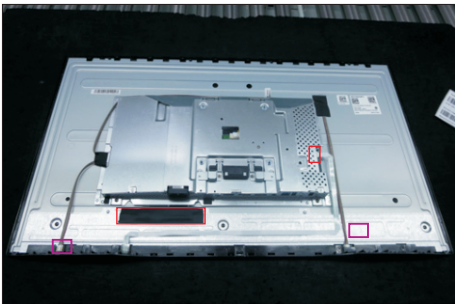

S10

Use a Philips-head screwdriver to remove 5pcs screws for unlocking the front bezel with the assembled unit.


(No.1~5 screw size=M2x2.7, Torque=3±0.5kgfxcn)

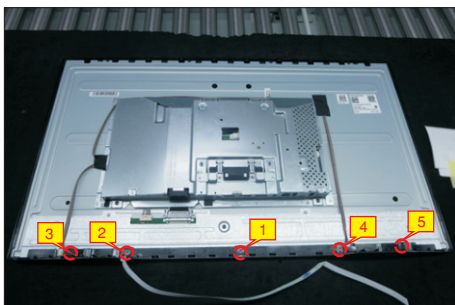

S11

Use a Philips-head screwdriver to remove 2pcs screws(left and right) for unlocking the front bezel with the panel module, then disassemble the front bezel with the unit and put it aside.


(No.1~2 Screw size= M3x0.5x4, Torque=3~4kgfxcn)

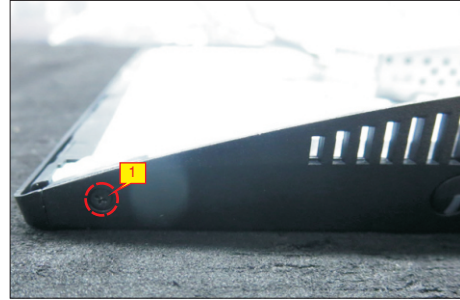


S12

Tear off the mylar tape on the function key board, then use a Philips-head screwdriver to tighten 3pcs screws for locking the function key board with the front bezel.

(No.1~3 Screw size= M2x2.4, Torque=1±0.2kgfxcn)

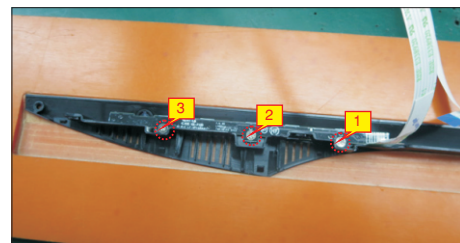


◀◀ [Go to contents page](#)

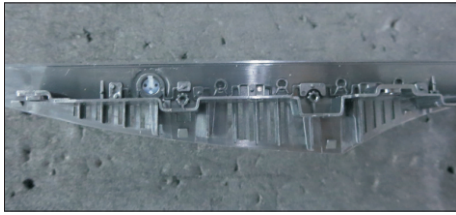

S12


Tear off 1 pcs acetate tape, then disconnect the panel lamp cables from the connectors of the panel module and power board.

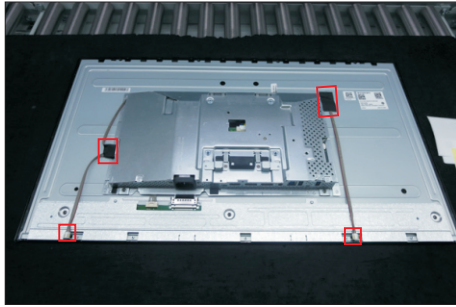

Use a Philips-head screwdriver to remove 4pcs screws for locking the bracket chassis module with the panel.


S13

(No.1~4 Screw size= M3x0.5x3, Torque=5~6kgfxcm)

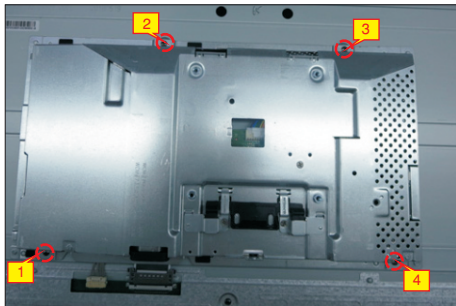

Lift up the bracket chassis, and disconnect the LVDS cable from the connector of the panel module, then put the bracket chassis on a protective cushion.


S14

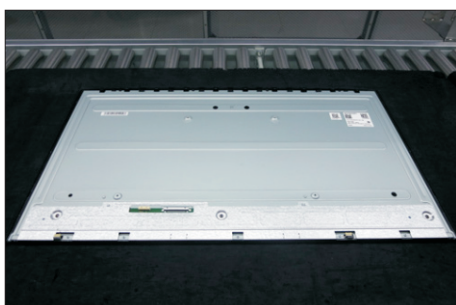

S15

Turn over the bracket chassis module. Remove the Mylar from the hooks of the bracket, and then use a Philips-head screwdriver to remove two screws for unlocking AC power outlet.


(No.1~2 screw size=M3x10, Torque=6±0.5kgfxcm)

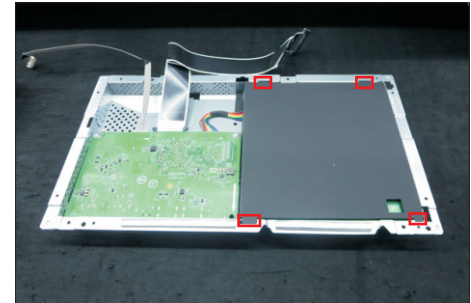

Use a Philips-head screwdriver to remove 6pcs screws for unlocking power board and interface board.


S16

(No.1 screw size=M4x8, Torque=6±0.5kgfxcm;
No.2~6 screw size=M3x7.5, Torque=6±0.5kgfxcm)

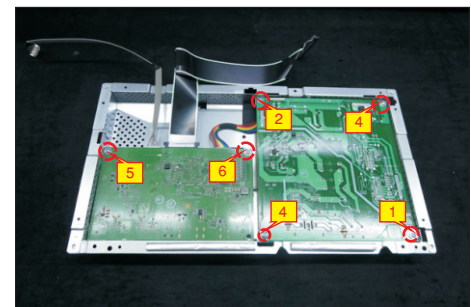


S17

Remove the circuit boards from the bracket chassis module carefully, and then disconnect all of the cables.

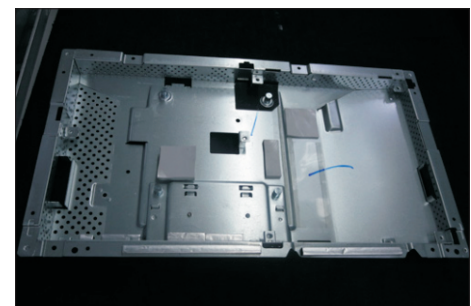


◀◀ [Go to contents page](#)


S18 Remove electrolyte capacitors (red mark) from printed circuit boards

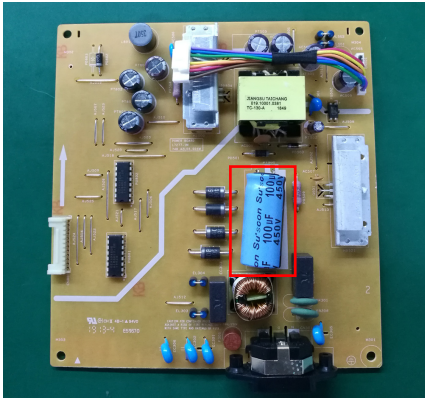


S1 -1 Cut the glue between bulk cap. and PCB with a knife

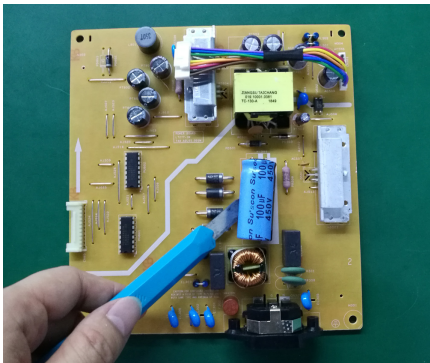


S1 -2 Ensure cutting path within the glue, don't touch bulk cap. or PCB

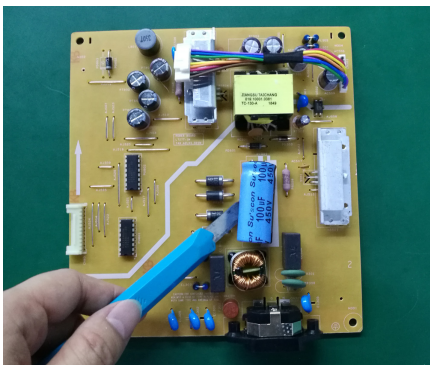


S1 -3 Cut into the bottom of bulk cap. and pull it up carefully

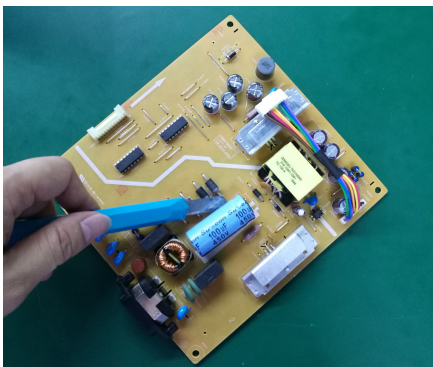

S1 -4 Take out bulk cap. pin solder with soldering iron and absorber

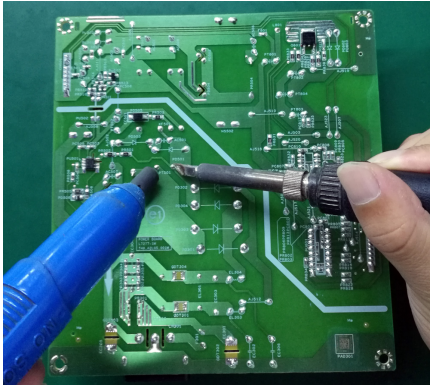

S1 -5 Lift the bulk cap. up and away from the PCB

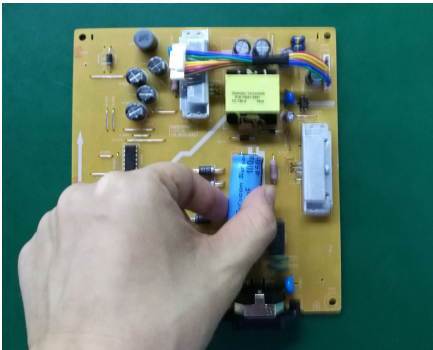

◀◀ [Go to contents page](#)

. Product material information

The following substances, preparations, or components should be disposed of or recovered separately from other WEEE in compliance with Article 4 of EU Council Directive 75/442/EEC.

Capacitors / condensers (containing PCB/PCT)	No used
Mercury containing components	No used
Batteries	No used
Printed circuit boards (with a surface greater than 10 square cm)	Product has printed circuit boards (with a surface greater than 10 square cm)
Component contain toner, ink and liquids	No used
Plastic containing BFR	No used
Component and waste contain asbestos	No used
CRT	No used
Component contain CFC, HCFC, HFC and HC	No used
Gas discharge lamps	No used
LCD display > 100 cm ²	Product has an LCD greater than 100 cm ²
External electric cable	Product has external cables
Component contain refractory ceramic fibers	No used
Component contain radio-active substances	No used
Electrolyte capacitors (height > 25mm, diameter > 25mm)	Product has electrolyte capacitors (height > 25mm, diameter > 25mm)

. Tools Required

List the type and size of the tools that would typically can be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description:

- Screwdriver (Phillip head) #1
- Screwdriver (Phillip head) #2
- Penknife
- Soldering iron and absorber