
Dell[™] Latitude[™] 2110

Setup and Features Information

Front View

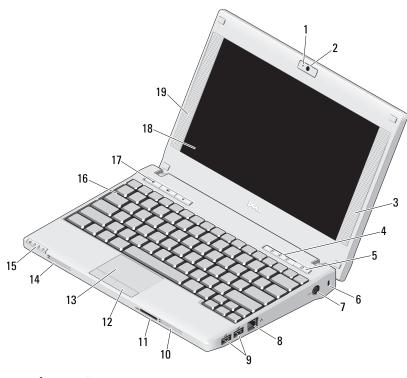

1 camera status light (optional)

- 2 camera (optional)
- 3 right speaker

WARNING: A WARNING indicates a potential for property damage, personal injury, or death.


About Warnings

- 4 keyboard status lights (3)
- 5 power button
- 6 security cable slot
- 7 AC adapter connector
- 8 network connector
- 9 USB 2.0 connectors (2)
- 10 cooling vent
- 11 Secure Digital (SD) memory-card reader
- 12 touchpad buttons (2)
- 13 touchpad
- 14 cooling vent
- 15 device status lights (4)
- 16 keyboard
- 17 media control buttons (3)
- 18 display (touch-screen feature is optional)
- 19 left speaker



Regulatory Model: P02T Regulatory Type: P02T002

Back View

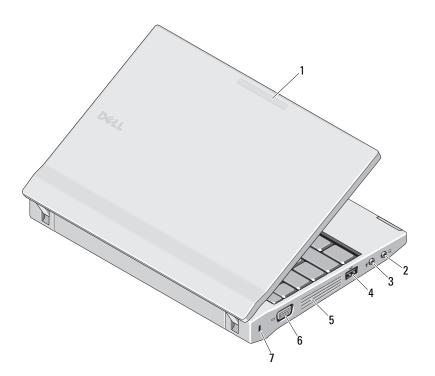

- 1 usage mode indicator (optional)
- 2 line-out connector (headphone connector)
- 3 line-in connector (microphone connector)
- 4 USB 2.0 connector
- 5 cooling vent
- 6 video connector (VGA)
- 7 security cable slot

WARNING: Do not block, push objects into, or allow dust to accumulate in the air vents. Do not store your Dell computer in a low-airflow environment, such as a closed briefcase, while it is running. Restricting the airflow can damage the computer or cause a fire. The computer turns on the fan when the computer gets hot. Fan noise is normal and does not indicate a problem with the fan or the computer.

Quick Setup



WARNING: Before you begin any of

the procedures in this section, read the safety information that shipped with your computer. For additional best practices information, see www.dell.com/regulatory_compliance.



WARNING: The AC adapter works with electrical outlets worldwide. However, power connectors and power strips vary among countries. Using an incompatible cable or improperly connecting the cable to the power strip or electrical outlet may cause fire or equipment damage.

CAUTION: When you disconnect the AC adapter cable from the computer, grasp the connector, not the cable itself, and pull firmly but gently to avoid damaging the cable. When you wrap the AC adapter cable, ensure that you follow the angle of the connector on the AC adapter to avoid damaging the cable.




NOTE: Some devices may not be included if you did not order them.



Connect the AC adapter to the AC adapter connector on the portable computer and to the electrical outlet.




Connect the network cable (optional).



3 Connect USB devices, such as a mouse or a keyboard (optional).





4 Open the computer display and press the power button to turn on the computer.





NOTE: It is recommended that you turn on and shut down your computer at least once before you install any cards or connect the computer to a docking device or other external device, such as a printer.

Specifications

U

NOTE: Offerings may vary by region. For more information regarding the configuration of your computer, click Start \rightarrow Help and Support and select the option to view information about your computer.

System Information

•	
Processor type	Intel [®] Atom [™] N470
Chipset	Intel NM10 Express Chipset
Video	
Video type:	Intel UMA graphics (integrated on the system board)
Data bus	integrated video
Video controller	Intel Graphics Media Accelerator 3150

Memory

Memory type	667 MHz, DDR2
Memory module connector	1 DIMM slot
Memory module capacity	1 GB, 2 GB
Minimum memory	1 GB
Maximum memory	2 GB

Battery	
Туре	6-cell "smart" lithium ion (56 WHr)
	3-cell "smart" lithium ion (28 WHr)
Dimensions	
6-cell	
Depth	48.13 mm (1.89 inches)
Height	42.46 mm (1.67 inches)
Width	204 mm (8.03 inches)
3-cell	
Depth	40.50 mm (1.59 inches)
Height	23.24 mm (0.92 inches)
Width	204 mm (8.03 inches)
Weight	
6-cell	340 g - 350 g (0.74 lb - 0.77 lb)
3-cell	185 g – 190 g (0.40 lb – 0.41 lb)
Voltage	11.1 VDC (6-cell and 3-cell)
Temperature range	
Operating	0 °C to 35 °C (32 °F to 95 °F)
Storage	–40 °C to 60 °C (–40 °F to 140 °F)
Coin-cell battery	3 V CR2032 lithium coin cell

AC Adapter	
Input voltage	100 VAC – 240 VAC
Input current (maximum)	1.5 A
Input frequency	50 Hz – 60 Hz
Output power	65 W
Output current	4.34 A (maximum at 4-second pulse) 3.34 A (continuous)
Rated output voltage	19.50 +/- 1.00 VDC
Dimensions	
Height	16 mm (0.63 inches)
Width	127 mm (4.99 inches)
Depth	66 mm (2.59 inches)
Temperature range	
Operating	0 °C to 35 °C (32 °F to 95 °F)
Storage	–40 °C to 65 °C (–40 °F to 149 °F)

Physical

Height	
without touchscreen	22.50 mm – 39.90 mm (0.89 inch – 1.57 inches)
with touchscreen	24.10 mm – 41.50 mm (0.95 inch – 1.63 inches)
Width	265 mm (10.43 inches)
Depth	187 mm (7.36 inches)

Physical (continued)	
Weight	
(3-cell battery without touchscreen)	1.36 kg (2.99 lb)
(6-cell battery without touchscreen)	1.52 kg (3.35 lb)
Environmental	
Temperature range	
Operating	0 °C to 35 °C (32 °F to 95 °F)
Storage	–40 °C to 65 °C (–40 °F to 149 °F)
Relative humidity (maximum)	
Operating	10 % - 90 % (noncondensing)
Storage	5 % – 95 % (noncondensing)
Altitude (maximum)	
Operating	–15.20 m to 3048 m (–50 ft to 10,000 ft)
Storage	–15.20 m to 10,668 m (–50 ft to 35,000 ft)

Finding More Information and Resources

See the safety and regulatory documents that shipped with your computer and the regulatory compliance website at www.dell.com/regulatory compliance for more information on:

- · Safety best practices
- Warranty
- Terms and Conditions
- Regulatory certification
- Ergonomics
- End User License Agreement

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.

Information in this document is subject to change without notice. © 2010 Dell Inc. All rights reserved.

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: *Dell*, the *DELL* logo, and *Latitude* are trademarks of Dell Inc.; *Intel* is a registered trademark and *Atom* is a trademark of Intel Corporation in the U.S. and other countries.