
MAC Authentication and OnGuard Posture Enforcement using Dell W- Series ClearPass and Dell Networking Switches

Dell Networking W-Series ClearPass Configuration Guide

Colin King

Network Solutions Engineering Team



This document is for informational purposes only and may contain typographical errors and technical inaccuracies. The content is provided as is, without express or implied warranties of any kind.

© 2013 Dell Inc. All rights reserved. Dell and its affiliates cannot be responsible for errors or omissions in typography or photography. Dell™, the Dell logo, PowerConnect™, Force10™, and PowerEdge™ are trademarks of Dell Inc. Intel®, Pentium®, Xeon®, Core® and Celeron® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, Windows Server®, Internet Explorer®, MS-DOS®, Windows Vista® and Active Directory® are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others.

August 2013 | Rev 1.0

Contents

| | |
|--|----|
| Executive Summary | 6 |
| Introduction | 6 |
| Network Topology | 7 |
| Applicable Hardware and Software Versions | 8 |
| Dell W-Series ClearPass | 8 |
| Dell Networking Switches | 8 |
| MAC Authentication with W-ClearPass and Dell Networking 7024P Switch | 8 |
| Dell Networking 7024P Configuration | 9 |
| Add a RADIUS Server | 10 |
| Enable Authentication and configure the port | 11 |
| Dell Networking ClearPass Configuration..... | 13 |
| Adding Network Authenticator | 13 |
| Create a Static Host List..... | 14 |
| Configuring a Network Policy | 15 |
| Testing MAC Authentication | 19 |
| MAC Authentication Conclusion | 20 |
| OnGuard posture enforcement with Dell Networking 7024P Switch | 21 |
| Dell Networking 7024P Configuration | 21 |
| Enable Authentication and configure the port | 22 |
| SNMP Configuration..... | 23 |
| Dell Networking ClearPass Configuration..... | 23 |
| Enter a user into the Local Users database | 24 |
| Configuring an OnGuard Network Policy..... | 25 |
| Configuring a Wired 802.1x Policy | 31 |
| Testing OnGuard Posture Configuration | 35 |
| OnGuard Configuration Conclusion | 36 |
| Appendix A | 37 |
| Dell Networking 55xx Series Switches..... | 37 |
| Dell Networking 55xx Series Firmware | 37 |
| MAC Authentication Configuration for 55xx Series Switch | 37 |
| Dell Networking W-ClearPass MAC Authentication Configuration | 39 |
| OnGuard posture enforcement with Dell Networking 55xx Switch | 39 |
| Dell Networking W-ClearPass MAC Authentication Configuration | 39 |

Figures

| | |
|---|----|
| Figure 1. Basic Topology | 7 |
| Figure 2. MAC Authentication Configuration Flowchart | 9 |
| Figure 3. MAC Authentication 7024P Switch - RADIUS Server Configuration | 11 |
| Figure 4. MAC Authentication 7024P Switch - Authentication Configuration | 12 |
| Figure 5. MAC Authentication ClearPass - Adding Network Authenticator | 13 |
| Figure 6. MAC Authentication ClearPass - Create Static Host List | 14 |
| Figure 7. MAC Authentication ClearPass - Configuring a Network Policy Service | 15 |
| Figure 8. MAC Authentication ClearPass - Configuring Authentication Method and Source | 16 |
| Figure 9. MAC Authentication ClearPass - Configuring Roles | 18 |
| Figure 10. MAC Authentication ClearPass - Configuring Enforcement | 19 |
| Figure 11. OnGuard Configuration Flowchart | 22 |
| Figure 12. OnGuard 7024P Switch - Authentication Configuration | 23 |
| Figure 13. OnGuard ClearPass - Adding Local User | 25 |
| Figure 14. OnGuard ClearPass - Web-Based Authentication Service | 26 |
| Figure 15. OnGuard ClearPass - Authentication Source | 26 |
| Figure 16. OnGuard ClearPass - Roles | 27 |
| Figure 17. OnGuard ClearPass - Adding New Posture Policy | 28 |
| Figure 18. OnGuard ClearPass - Posture Policy Main Tab | 29 |
| Figure 19. OnGuard ClearPass - Enforcement Policy | 31 |
| Figure 20. Wired 802.1x ClearPass - Service Configuration | 32 |
| Figure 21. Wired 802.1x ClearPass - Authentication Types | 33 |
| Figure 22. Wired 802.1x ClearPass - Roles | 34 |
| Figure 23. Wired 802.1x ClearPass - Enforcement | 35 |
| Figure 24. Appendix A, 5524P Dot1x Global Settings | 38 |
| Figure 25. Appendix A, 5524P Dot1x Interface Settings, MAC Only | 38 |
| Figure 26. Appendix A, 5524P Dot1x Interface Settings, 802.1x only | 39 |

Executive Summary

The Dell Networking W-Series ClearPass platform is a powerful access control appliance for use with wired or wireless networking. W-ClearPass is highly optimized for use with wireless access using the W-Series controllers and APs as the network access devices. In addition to wireless network access control, W-ClearPass can service authentication requests from Dell Networking wired switches. The combination of W-ClearPass, W-Series Controllers, and Dell Networking switches provides a complete solution for network access control.

Administrators with devices that do not support 802.1x (printers, cameras, IP phones) will learn the authentication method used with Dell switches for MAC authentication and how to configure the corresponding W-ClearPass services.


Administrators can also learn how to use the OnGuard client within W-ClearPass to ensure all PCs connected directly to Dell switches are screened for health compliance.

Introduction

This configuration guide details the steps required to configure both MAC Authentication and OnGuard posture enforcement using Dell Networking switches. The W-ClearPass Policy Manager will be the centerpiece for all RADIUS credentials and network access authentication decisions for devices accessing the network through the Dell Networking switch.

Network Topology

Figure 1. Basic Topology

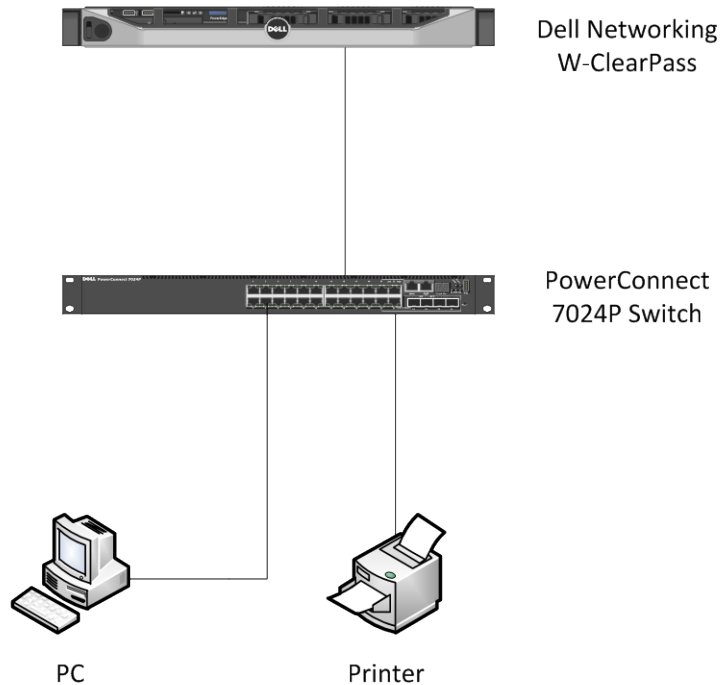

The figure above shows the setup used for this document. The printer is used for the MAC Authentication example configuration, while the PC is used for the OnGuard health posture example configuration.

The Dell Networking 7024P is representative of a typical closet access switch. The Dell Networking W-ClearPass appliance is normally located in the Data Center. The Dell 7024P switch is also capable of supplying PoE+ power to devices connected to its ports. This PoE+ capability can simplify the deployment of devices like Phones, Cameras, and similar corporate devices that will benefit from the MAC Authentication methodology described in this document.

Applicable Hardware and Software Versions

The examples in this document are validated on the following HW and SW versions:

- Dell W-Series ClearPass SW v6.0.2
- Dell Networking 7024P firmware v5.1.0.1

Dell W-Series ClearPass

Dell W-Series ClearPass SW v6.0.2

Configuration for the ClearPass appliance is the same for the latest version released during the publishing of this document, ClearPass v6.1.2. No changes to the MAC Authentication feature were implemented in this later version. The OnGuard client application was upgraded to include a VPN client in ClearPass v6.1.2. The VPN feature and its configuration will not affect the behavior or configuration of the methodology described in this document.

Dell Networking Switches

Dell Networking 7024P - firmware v5.1.0.1

The following Dell Networking branded switches contain the same firmware base and can be substituted for the 7024P used in this example.

Dell Networking switches:

8132, 8164, 8132F, 8164F, 7024, 7048, 7024P, 7048P, 7024F, 7048R, 7048R-RA, 8024, 8024F, M6220, M6348, M8024, M8024-k


NOTE: Dell Networking Switches not included in the list above could have behaviors that would require some modification to the methods used in the example configurations below, however the methodology and mechanisms are similar and can therefore be applied with minor changes. See Appendix A for information on how to use Dell 55xx switches.

MAC Authentication with W-ClearPass and Dell Networking 7024P Switch

The use of MAC Authentication is mainly used for devices such as printers, cameras, and IP phones that do not support 802.1x authentication and require the use of MAC Authentication.

The configuration example in this guide will only detail the basic setup of both the W-ClearPass Policy Manager and the Dell Networking 7024P switch. Network administrators may also want to configure specific VLANs to restrict traffic to the type needed for the device being placed on the 7024P switch port. The assignment of VLANs based on successful authentication is not covered in this document.

Figure 2. MAC Authentication Configuration Flowchart

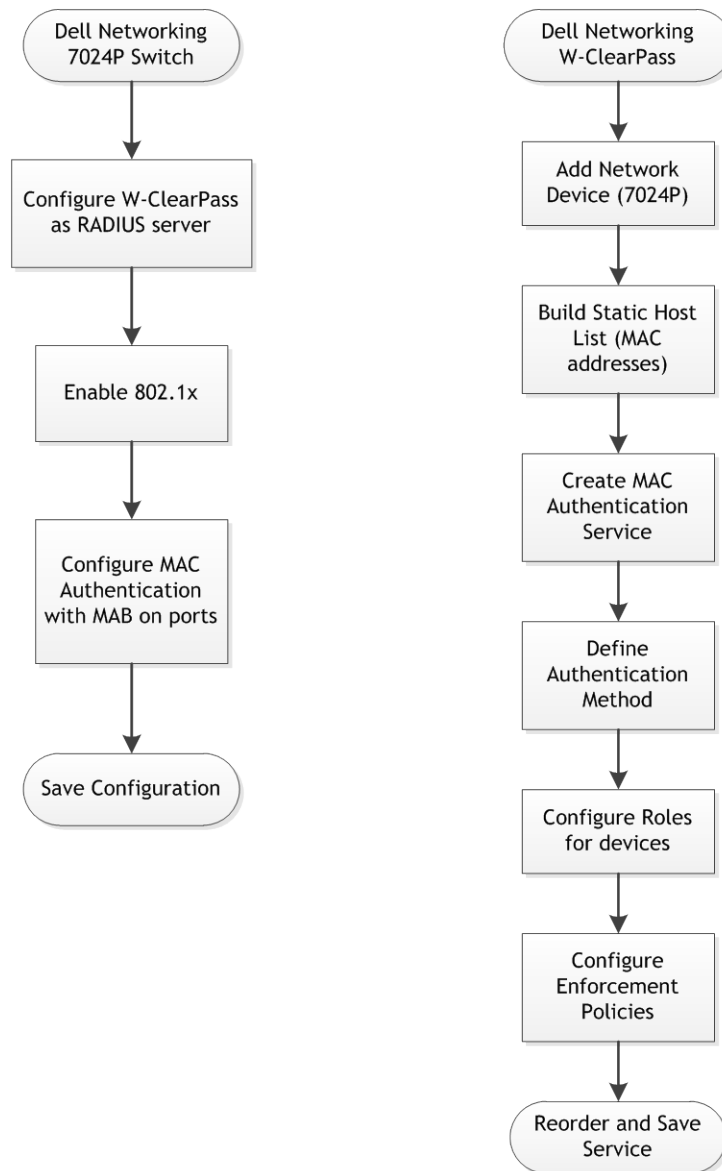

Dell Networking 7024P Configuration

The following configuration steps start from a switch that has been configured to be an access switch with no network security settings in place. Basic settings outlined in the Quick Start Guide have been completed.

Add a RADIUS Server

Navigate to **System > Management Security > RADIUS > RADIUS Server Configuration**

Click on **Add**

Input IP address of the ClearPass appliance into **RADIUS Server Host Address**

Change **RADIUS Server Name** to an appropriate name

Click **Apply**

Click on **Detail**

Choose the IP address from the **RADIUS Server Host Address** drop down list


Click on the checkbox located in the **Secret** field. Enter a secret key to be used with the ClearPass appliance.

Choose **Enable** from the dropdown list in the **Primary Server** field

Click on **Apply**

Save your configuration to the running configuration (disk icon at the upper right of the GUI)

Figure 3. MAC Authentication 7024P Switch - RADIUS Server Configuration

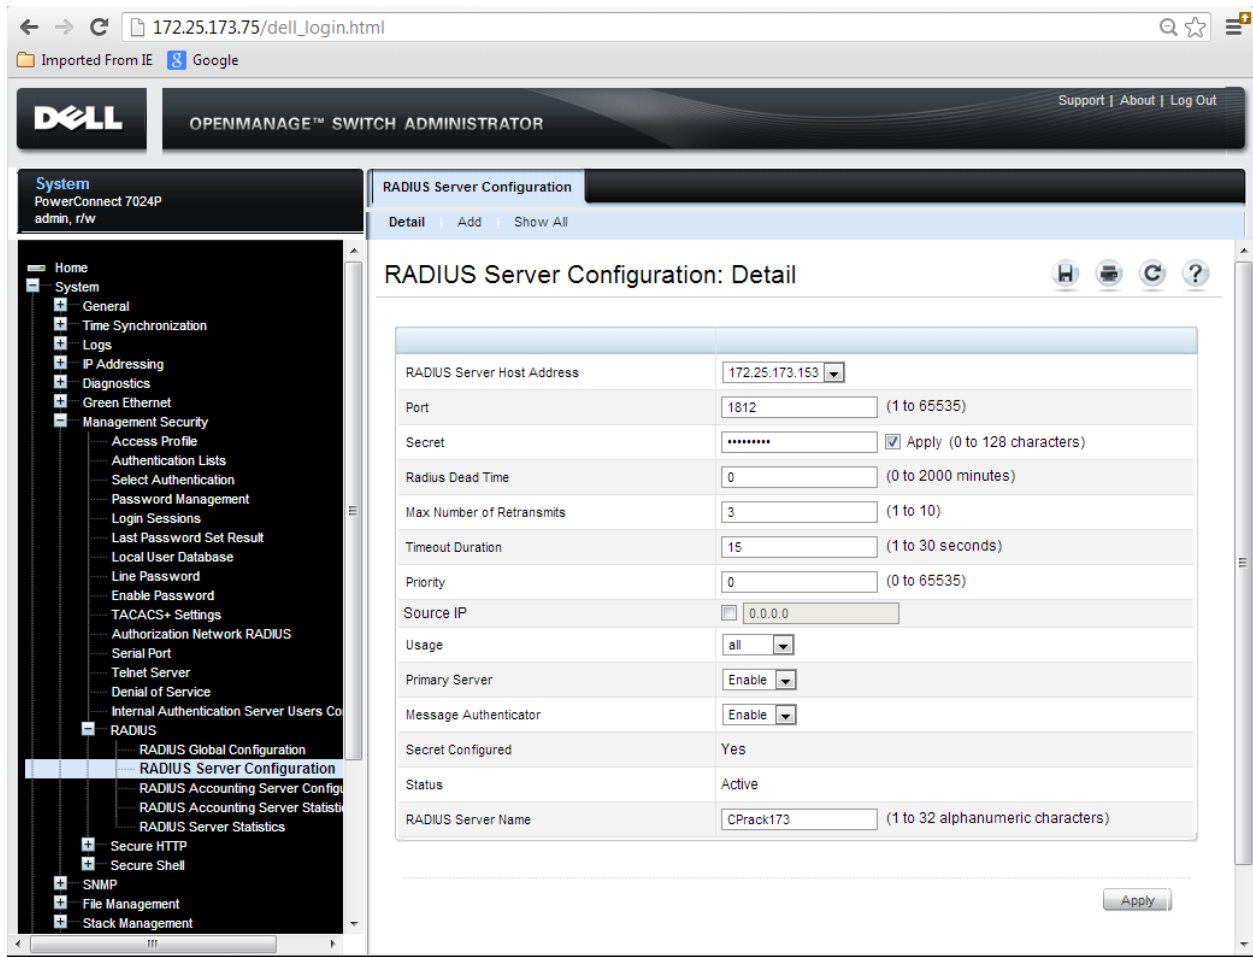

Enable Authentication and configure the port

Navigate to Switching > Network Security > Dot1x Authentication > Authentication

Under Global Parameters, choose Enable from the dropdown list in the Administrative Mode field

Identify the port to be used for MAC Authentication


Under Interface Parameters, choose the port number from the dropdown list in the Interface field

Choose Mac-based from the dropdown list and check the MAB box in the Admin Interface Control field

All other fields can remain default

Repeat the above for any other ports requiring MAC Authentication

Figure 4. MAC Authentication 7024P Switch - Authentication Configuration

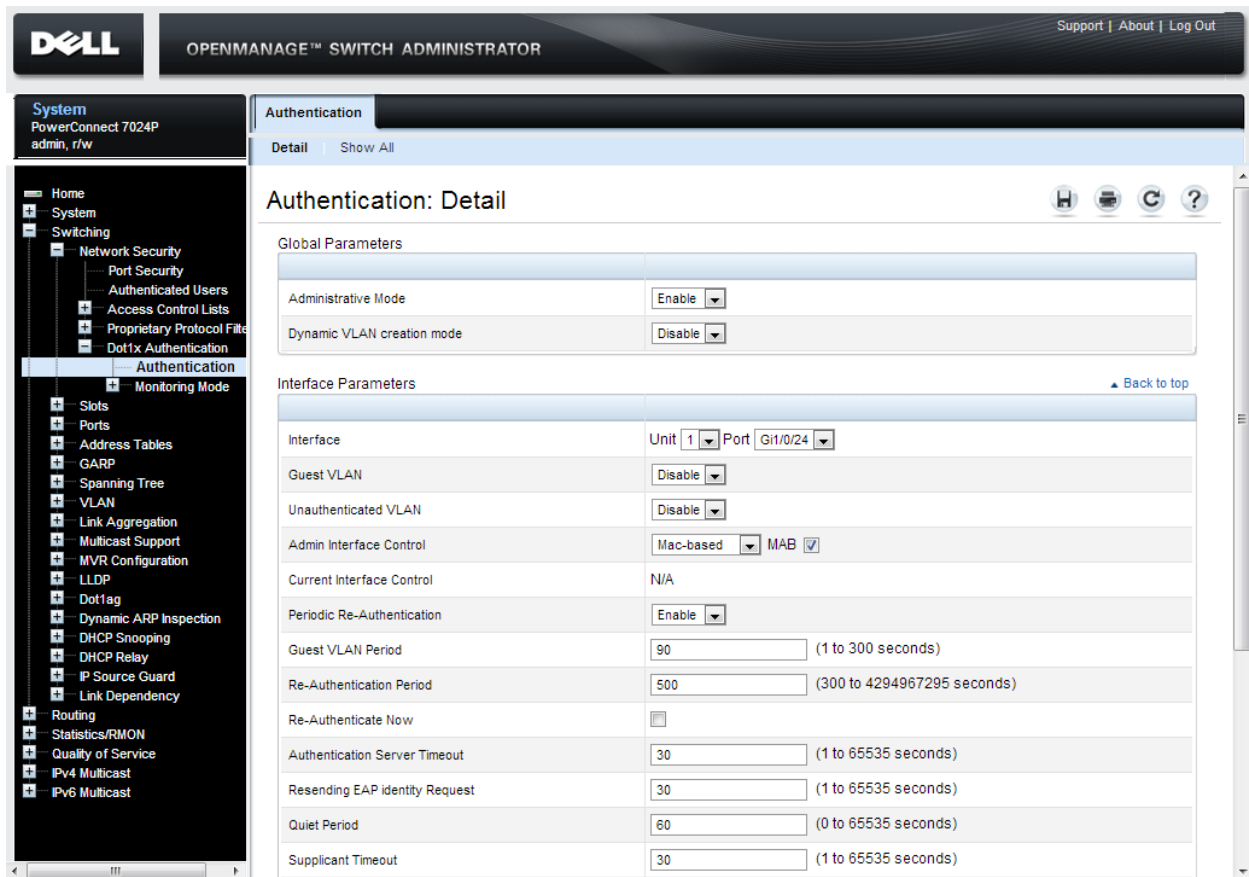

There are likely other ports on the switch that do not require Authentication. For those ports at this time it is recommended to force the port interface into Authorized mode.

Under **Interface Parameters**, choose the port number from the dropdown list in the **Interface** field

Choose **Authorized** from the dropdown list in the **Admin Interface Control** field

All other fields can remain default

Repeat the above for all ports requiring access without Authentication

NOTE: Administrators can edit multiple ports at one time by using the **Show All** configuration page under **Authentication**.

Click **Apply**

Save your configuration to the running configuration

This completes the steps required for Mac Authentication on the Dell Networking 7024P.

For additional information and CLI examples, please refer to the *Dell Networking 7000 Series Switch User's Configuration Guide*.

Dell Networking ClearPass Configuration

The following configuration steps start from a ClearPass appliance that has been setup according to the basic configuration outlined in the *Dell Networking W-ClearPass Policy Manager 6.0 Quick Start Guide*. It's assumed that all Subscription IDs and licensing has been enabled for the product.

Adding Network Authenticator

Navigate to **Configuration > Network > Devices**

Click on **Add Device** in the upper right hand corner

Under the Device tab, input the following:

- Enter a descriptive name in the **Name** field
- Enter the IP address of the 7024P switch in the **IP or Subnet Address** field
- Enter the same secret used previously in the **RADIUS Shared Secret** field
- Enter the same secret again in the **Verify** field
- Choose **IETF** from the dropdown list in the **Vendor Name** field
- Click **Save**

Figure 5. MAC Authentication ClearPass - Adding Network Authenticator

The screenshot shows the 'Edit Device Details' window with the following configuration:

| Device | SNMP Read Settings | SNMP Write Settings | CLI Settings | | | | |
|--|--|---------------------|--------------|-----------|-------|--------------------|--|
| Name: | 7024P rack173 | | | | | | |
| IP or Subnet Address: | 172.25.173.75 (e.g., 192.168.1.10 or 192.168.1.1/24) | | | | | | |
| Description: | | | | | | | |
| RADIUS Shared Secret: | | Verify: | | | | | |
| TACACS+ Shared Secret: | | Verify: | | | | | |
| Vendor Name: | IETF | | | | | | |
| Enable RADIUS CoA: | <input checked="" type="checkbox"/> | RADIUS CoA Port: | 3799 | | | | |
| Attributes | | | | | | | |
| <table border="1"><thead><tr><th>Attribute</th><th>Value</th></tr></thead><tbody><tr><td>1. Click to add...</td><td></td></tr></tbody></table> | | | | Attribute | Value | 1. Click to add... | |
| Attribute | Value | | | | | | |
| 1. Click to add... | | | | | | | |

Buttons: Copy Save Cancel

Create a Static Host List

The Static Host List will be the repository for the MAC Addresses allowed onto the network. All devices using MAC Authentication will need to have their MAC addresses input into this list.

Navigate to **Configuration > Identity > Static Host Lists**

Click on **Add Static Host List** at the upper right of the GUI

Enter a descriptive name in the **Name** field

Enter a description in the **Description** field

Choose **List** in the **Host Format** field

Choose **MAC Address** in the **Host Type** field

Add as many addresses into the list as desired at this time. Addresses can be added at any time

Click on **Save**

In this example “**AllowedMacAddresses**” is used as the Static Host List name.

Figure 6. MAC Authentication ClearPass – Create Static Host List

| | |
|---|--|
| Name: | AllowedMacAddresses |
| Description: | whitelist |
| Host Format: | <input type="radio"/> Subnet <input type="radio"/> Regular Expression <input checked="" type="radio"/> List |
| Host Type: | <input type="radio"/> IP Address <input checked="" type="radio"/> MAC Address |
| List: | <div style="border: 1px solid gray; padding: 5px;">00:13:60:3a:2c:6b 5c:26:0a:85:6f:2f</div> <div style="text-align: right; margin-top: 5px;"><input type="button" value="Remove Host"/> <input type="button" value="Add Host"/></div> |
| <input type="button" value="Save"/> <input type="button" value="Cancel"/> | |

Configuring a Network Policy

Navigate to **Configuration > Start Here**

Choose **MAC Authentication**

Under the **Service** tab, input and change the following:

- Enter a descriptive name in the **Name** field
- Enter a description in the **Description** field
- Under **Service Rules**, remove all default conditions by clicking on the trash icon to the right of each condition
- Add a new condition by clicking on **Click to add...** and choosing the following:
 - **Type** - Radius:IETF
 - **Name** - Calling-Station-Id
 - **Operator** - BELONGS_TO_GROUP
 - **Value** - AllowedMacAddresses (descriptive name from example)
- Click on the disk icon next to the condition to save

Click on **Next** at the bottom right to move to the Authentication tab

Figure 7. MAC Authentication ClearPass - Configuring a Network Policy Service

Configuration >> Services >> Add

Services



| Service | Authentication | Roles | Enforcement | Summary |
|--|--|------------------|---------------------|---------|
| Type: | MAC Authentication | | | |
| Name: | MAC Auth Service Example | | | |
| Description: | MAC-based Authentication Service (example) | | | |
| Monitor Mode: | <input type="checkbox"/> Enable to monitor network access without enforcement | | | |
| More Options: | <input type="checkbox"/> Authorization <input type="checkbox"/> Audit End-hosts <input type="checkbox"/> Profile Endpoints | | | |
| Service Rule | | | | |
| Matches <input type="radio"/> ANY or <input checked="" type="radio"/> ALL of the following conditions: | | | | |
| Type | Name | Operator | Value | |
| 1. Radius:IETF | Calling-Station-Id | BELONGS_TO_GROUP | AllowedMacAddresses | |
| 2. Click to add... | | | | |
| Back to Start Here Next > Save Cancel | | | | |

Under the **Authentication** tab, input and change the following:

- Highlight **[MAC AUTH]** and remove it from the **Authentication Methods** list
- From the dropdown menu, **--Select to Add--**, choose **[EAP MD5]**
- Highlight **[Endpoints Repository]** **[Local SQL DB]** and remove it from the **Authentication Sources** list
- Click on **Add new Authentication Source**
- Enter a descriptive name in the **Name** field (for this example "static list Mac auth" is used)
- Enter a description in the **Description** field
- From the dropdown menu, **Type**, choose **Static Host List**
- Click on **Next** to move to the **Static Hosts Lists** tab
- From the dropdown menu, choose the static host list previously created (for this example **AllowedMacAddresses** was previously created)
- Click **Next** and then **Save** to move back to the **Authentication** tab
- From the dropdown menu in **Authentication Sources**, **--Select to Add--**, choose **static list Mac auth [Static Host List]** (this is the source that was just created)

Click on **Next** at the bottom right to move to the **Roles** tab

Figure 8. MAC Authentication ClearPass - Configuring Authentication Method and Source

Configuration » Services » Add

Services



| Service | Authentication | Roles | Enforcement | Summary |
|------------------------------------|----------------|---|-------------|---|
| Authentication Methods: | | [EAP MD5] | | Add new Authentication Method |
| | | Move Up | | |
| | | Move Down | | |
| | | Remove | | |
| | | View Details | | |
| | | Modify | | |
| | | --Select to Add-- | | |
| Authentication Sources: | | static list Mac auth [Static Host List] | | Add new Authentication Source |
| | | Move Up | | |
| | | Move Down | | |
| | | Remove | | |
| | | View Details | | |
| | | Modify | | |
| | | --Select to Add-- | | |
| Strip Username Rules: | | <input type="checkbox"/> Enable to specify a comma-separated list of rules to strip username prefixes or suffixes | | |
| Back to Start Here | | Next > Save Cancel | | |


Under the **Roles** tab, input and change the following:

- Click on **Add new Role Mapping Policy**
- Enter a descriptive name in the **Policy Name** field
- Enter a description
- Leave the **Default Role** as **[Guest]**
- Click on **Next** to move to the **Mapping Roles** tab
- Click on **Add Rule**
- Click on **Click to add...** within the **Conditions** window
- From the dropdown menu under **Type**, choose **Authentication**
- From the dropdown menu under **Name**, choose **Source**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **static list Mac auth**
- Click on the disk icon to save the condition
- From the dropdown menu within the **Actions** window, choose **[Employee]**

NOTE: the **[Employee]** role is a default value used to simplify this example. Admins should define and use specific roles for their deployment.

Click on **Next** to move to the **Enforcement** tab

Figure 9. MAC Authentication ClearPass - Configuring Roles

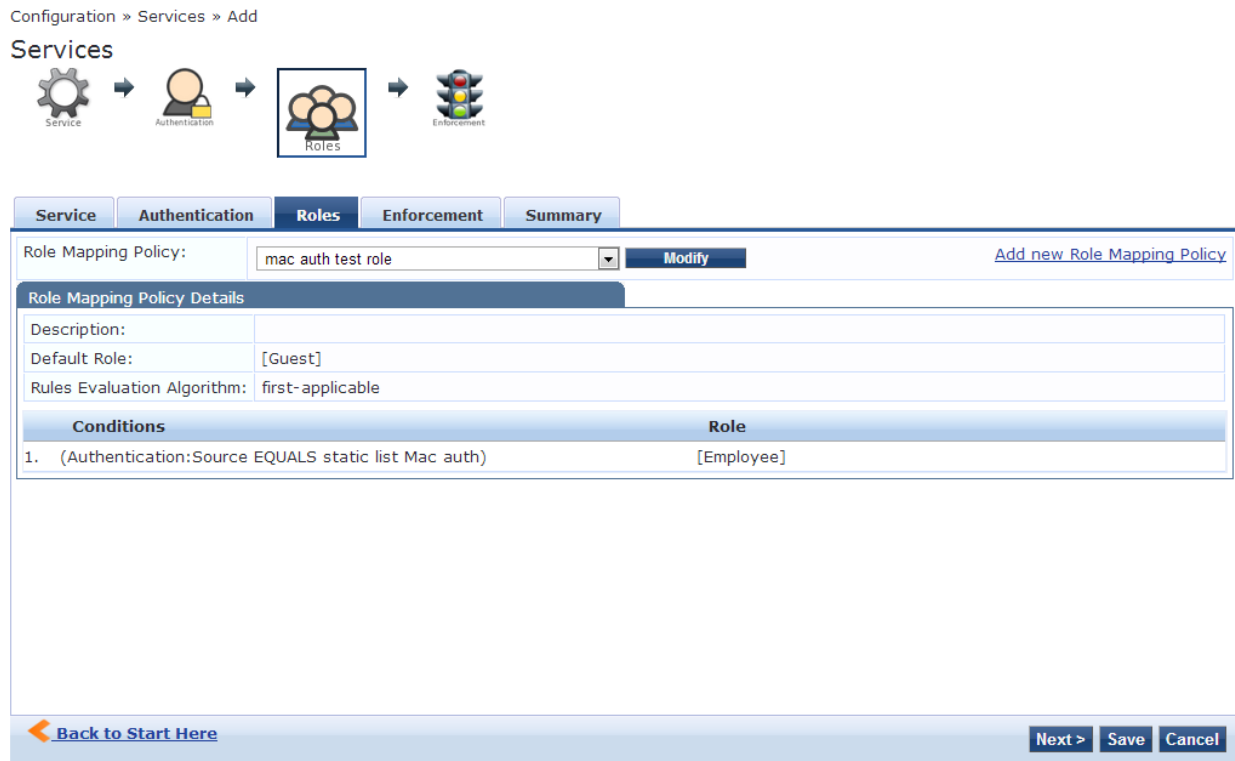

Under the **Enforcement** tab, input and change the following:

- Click on **Add new Enforcement Policy**
- Enter a descriptive name in the **Name** field
- Enter a description in the **Description** field
- Ensure **RADIUS** is selected for the **Enforcement Type**
- From the dropdown menu under **Default Profile**, choose **[Deny Access Profile]**
- Click on **Next** to move to the **Rules** tab
- Ensure **Select first match** is selected for **Rules Evaluation Algorithm**
- Click on **Add Rule** under **Conditions**
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Tips**
- From the dropdown menu under **Name**, choose **Role**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **[Employee]**
- Click the disk icon to save the condition

- From the dropdown menu for **Profile Names**, --Select to Add--, choose **[RADIUS] [Allow Access Profile]**
- Click on **Save**

Click on **Next** to move to the **Summary** tab

Figure 10. MAC Authentication ClearPass - Configuring Enforcement

Configuration » Services » Add

Services



| Service | Authentication | Roles | Enforcement | Summary |
|--|----------------|---|-------------|--|
| Use Cached Results: | | <input type="checkbox"/> Use cached Roles and Posture attributes from previous sessions | | |
| Enforcement Policy: | | MAC auth Enforcement example | | Add new Enforcement Policy |
| Enforcement Policy Details | | | | |
| Description: | | Example enforcement | | |
| Default Profile: | | [Deny Access Profile] | | |
| Rules Evaluation Algorithm: | | first-applicable | | |
| Conditions | | Enforcement Profiles | | |
| 1. (Tips:Role EQUALS [Employee]) | | [Allow Access Profile] | | |
| Back to Start Here <input type="button" value="Next >"/> <input type="button" value="Save"/> <input type="button" value="Cancel"/> | | | | |

Click on **Save** to move to the **Reorder Services** page

ClearPass evaluates the Services created from the top of the list to the bottom. There are many default services that come configured with the base install. These default services will not interfere with this example. The Mac authorization service that was just created can be left at the bottom of the service order list.

Click on **Save** to complete the configuration

Testing MAC Authentication

Connect any device not configured to use 802.1x (example - printer) to the switch port configured for MAC Authentication MAB. Ensure the MAC address of the device is in the static host list that is configured in the above example.

Within the Dell Networking 7024P GUI, administrators can see the status of all authentications and can see if a port is currently authorized. For the Port Access Log, navigate to **Switching > Dot1x Authentication > Monitoring Mode > Port Access Control History Log**.

ClearPass has an extensive Access Tracker which logs all the steps corresponding to Authentication, Authorization and Enforcement. It is very useful in identifying which service it's identifying to categorize the request, and what issues it has during the authentication. The Access Tracker can be located by navigating to **Monitoring > Live Monitoring > Access Tracker**.

MAC Authentication Conclusion

Many of the settings in the above example are simplified for the purpose of providing a basic configuration an administrator can build upon. The settings shown are not intended to fully protect the network in all environments.

The default MAC Authentication method within ClearPass will not successfully recognize the authentication request from the Dell Networking switch. The unique ClearPass setting that is described above is the use of EAP-MD5 as the Authentication method, with a source of a Static Host List. The use of this method, along with strict enforcement policies on the switch, will effectively secure and allow the proper traffic for devices that do not support 802.1x.

OnGuard posture enforcement with Dell Networking 7024P Switch

OnGuard is a SW module within ClearPass used to determine the health of a device. Network administrators may want to enforce devices being connected to the network to have certain health related conditions met before access is granted. Typical conditions include the presence of an anti-virus SW with updated virus definitions. Other conditions could involve a check on the state of the firewall. For the purposes of this document, the posture of the device is directly referencing its health.

The persistent client for OnGuard has the ability to detect changes in the posture of a device and change its access status in the network. Although the Dell Networking switch does not support RADIUS CoA, it can still use OnGuard to check health at the initial authentication request when connecting to the network. Additionally, the persistent OnGuard client can monitor a PC and revoke access to the network after any failed periodic health check.

Dell Networking W-Series products support RADIUS CoA in addition to Radius VSA (Vendor Specific Attributes), which can be used in conjunction with ClearPass for all available features when connected wirelessly.


This example will perform a basic health check to see if the PC has its firewall enabled or turned off. If the firewall is not enabled on the PC, it will remove access to the network. To read more on health related conditions that OnGuard can interrogate on devices, see the latest *Dell Networking W-ClearPass Policy Manager User Guide*.

Dell Networking 7024P Configuration

OnGuard uses HTTPS to send posture information to the ClearPass appliance. For OnGuard to use HTTPS, it must have access to the network. If a customer requires 802.1x authentication on the wired switch, a separate 802.1x authentication must be used prior to the OnGuard posture check. In this example, an 802.1x PEAP-EAP-MSCHAPv2 authentication is completed first. A separate WebAuth service must be setup with posture checks to use the OnGuard agent. To ensure a non-compliant device is not admitted back to the network, it's recommended that 802.1x be enabled on the access port to the Dell Networking 7024P switch. If the port is left in Authorized mode, and the health issue is not corrected, the device will be bounced from the network during each periodic health check.

This example builds upon the previous MAC Authentication example. The configuration of the RADIUS server and their shared secrets are not repeated in this section. The steps to setup the RADIUS server on both the switch and ClearPass are the same. Please reference the steps in the previous example to enable the switch to be an authenticator by adding an external RADIUS server (ClearPass).

Figure 11. OnGuard Configuration Flowchart

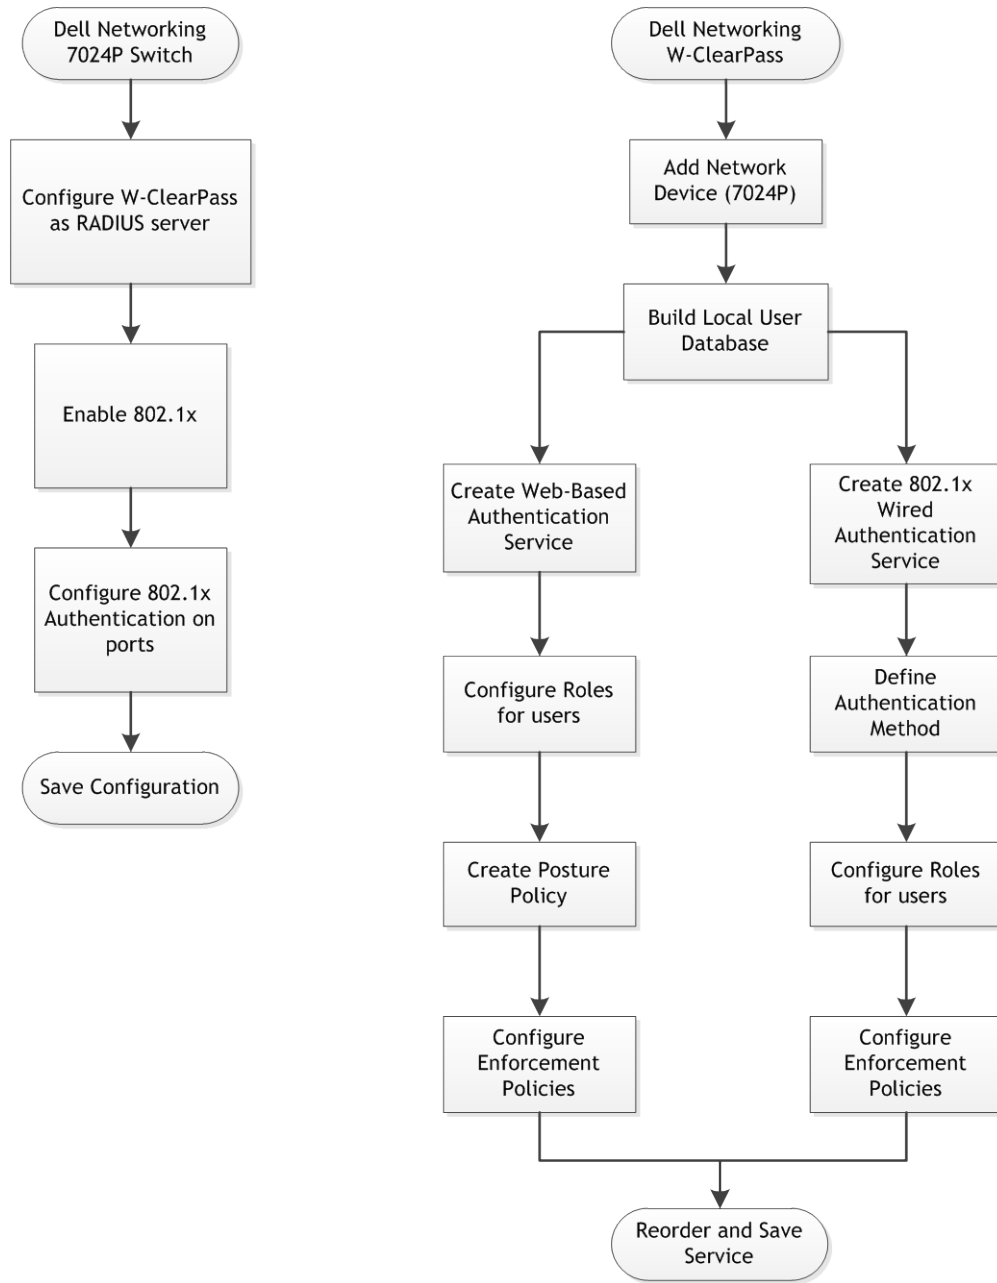

Enable Authentication and configure the port

Navigate to **Switching > Network Security > Dot1x Authentication > Authentication**

Under **Global Parameters**, choose **Enable** from the dropdown list in the **Administrative Mode** field

NOTE: The enable authentication step above was completed in the previous MAC Authentication example.

Identify the port to be used for wired authentication with OnGuard


Under **Interface Parameters**, choose the port number from the dropdown list in the **Interface** field

The default setting when enabling 802.1x on the switch in the **Admin Interface Control** field is **Automode**. Confirm that Automode is set

All other fields can remain default.

Repeat the above for any other ports requiring this setting.

Figure 12. OnGuard 7024P Switch - Authentication Configuration

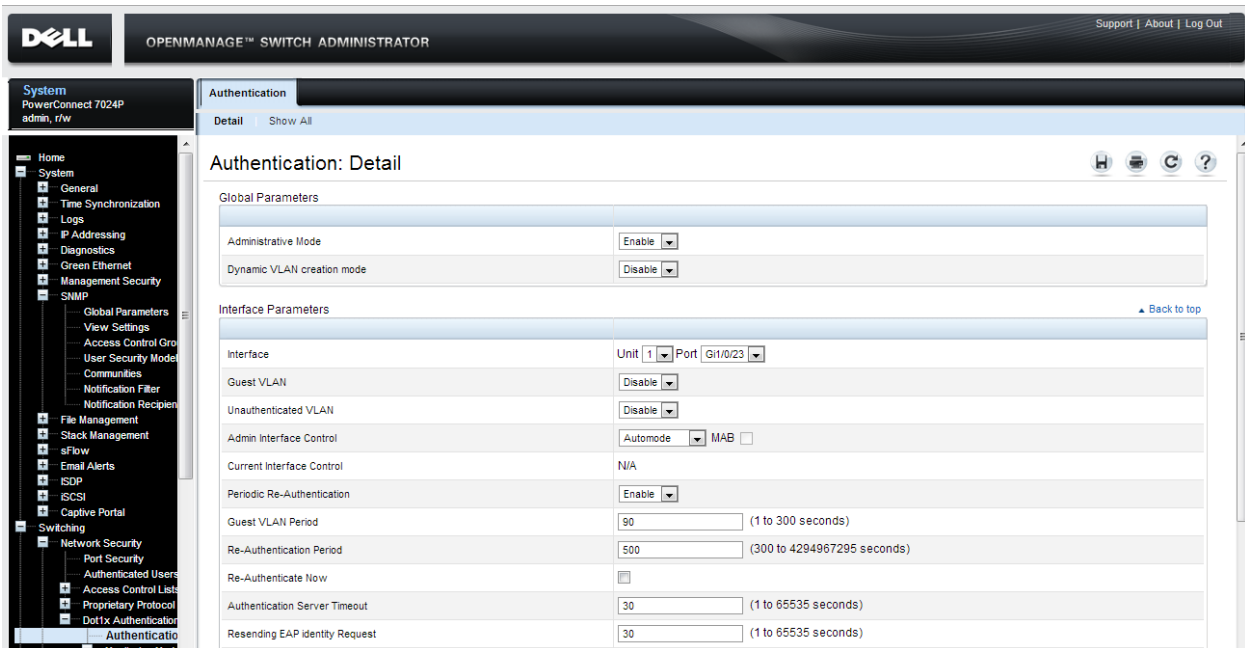

SNMP Configuration

By default, SNMPv2 is enabled on the switch and the ClearPass appliance. No changes to the default settings are required to enable the SNMP bounce of the switch port upon an OnGuard failure action. If the administrator requires SNMP traps for monitoring of the networks, enable SNMP and configure the community strings per the *Dell Networking 7000 Series Switch User's Configuration Guide*.

Dell Networking ClearPass Configuration

The following configuration steps start from a ClearPass appliance that has been setup according to the basic configuration outlined in the *Dell Networking W-ClearPass Policy Manager 6.0 Quick Start Guide*. It's assumed that all Subscription IDs and licensing has been enabled for the product.

This example builds upon the previous MAC Authentication example. The configuration of the RADIUS server and their shared secrets are not repeated in this section. The steps to setup the RADIUS server on both the switch and ClearPass are the same. Please reference the steps in the previous example to enable the switch to be an authenticator by adding an external RADIUS server (ClearPass).

The OnGuard service within ClearPass uses a web authentication, which can support either a username/password or certificate based login. This allows for the OnGuard service to use the same method to sign into the ClearPass appliance as the authentication method used to access the network. In this simplified example, the method used for both authentication and OnGuard is a username and password. Examples of databases supported include Active Directory, LDAP, and generic SQL. For this example the local user database within ClearPass will be used.

[Enter a user into the Local Users database](#)

Navigate to **Configuration > Identity > Local Users**

Click on **Add User**

Enter a **User ID** , **Name**, **Password**, and **Verify Password**

Keep the **Enable User** box checked

From the dropdown menu under **Role**, choose **[Employee]**

Click **Add**

Figure 13. OnGuard ClearPass - Adding Local User

| Add Local User | |
|--------------------|--|
| User ID | <input type="text" value="Test User"/> |
| Name | <input type="text" value="Test User"/> |
| Password | <input type="password" value="....."/> |
| Verify Password | <input type="password" value="....."/> |
| Enable User | <input checked="" type="checkbox"/> (Check to enable local user) |
| Role | <input type="text" value="[Employee]"/> |
| Attributes | |
| Attribute | Value |
| 1. Click to add... | |

Add **Cancel**

Configuring an OnGuard Network Policy

Navigate to **Configuration > Start Here**

Choose **Web-Based Authentication**

Enter a descriptive name in the **Name** field

Enter a description in the **Description** field

Click on the **Posture Compliance** check box under **More Options**

Figure 14. OnGuard ClearPass - Web-Based Authentication Service

Configuration » Services » Edit - OnGuard with 7024P

Services - OnGuard with 7024P

| Summary | Service | Authentication | Roles | Posture | Enforcement |
|--|---|----------------|----------------|---------|-------------|
| Name: | OnGuard with 7024P | | | | |
| Description: | Wired OnGuard Health Check with Dell Switch | | | | |
| Type: | Web-based Authentication | | | | |
| Status: | Enabled | | | | |
| Monitor Mode: | <input type="checkbox"/> Enable to monitor network access without enforcement | | | | |
| More Options: | <input type="checkbox"/> Authorization <input checked="" type="checkbox"/> Posture Compliance | | | | |
| Service Rule | | | | | |
| Matches <input checked="" type="radio"/> ANY or <input type="radio"/> ALL of the following conditions: | | | | | |
| Type | Name | Operator | Value | | |
| 1. Host | CheckType | MATCHES_ANY | Authentication | | |
| 2. Click to add... | | | | | |

Click **Next** to move to the **Authentication** tab

From the dropdown menu under **Authentication Sources**, choose **[Local User Repository]** **[Local SQL DB]**

Figure 15. OnGuard ClearPass - Authentication Source

Configuration » Services » Edit - OnGuard with 7024P

Services - OnGuard with 7024P

| Summary | Service | Authentication | Roles | Posture | Enforcement |
|-------------------------|---|----------------|-------|---------|---|
| Authentication Sources: | <div style="border: 1px solid #ccc; padding: 5px;"> <div style="display: flex; justify-content: space-between; align-items: center;"> [Local User Repository] [Local SQL DB] <div style="border: 1px solid #ccc; padding: 2px;"> Move Up Move Down Remove View Details Modify </div> </div> <div style="margin-top: 5px;"> --Select to Add-- </div> </div> | | | | Add new Authentication Source |
| Strip Username Rules: | <input type="checkbox"/> Enable to specify a comma-separated list of rules to strip username prefixes or suffixes | | | | |

Click **Next** to move to the **Roles** tab

- Click on **Add new Role Mapping Policy**
- Enter a descriptive name in the **Policy Name** field
- Enter a description in the **Description** field
- Leave the **Default Role** as **[Guest]**
- Click **Next** to move to the **Mapping Rules** tab
 - Click on **Add Rule**
 - From the dropdown menu under **Type**, choose **Authorization:[Local User Repository]**
 - From the dropdown menu under **Name**, choose **Role_Name**

- From the dropdown menu under **Operator**, choose **EXISTS**
- Click the disk icon to save the condition
- From the dropdown menu under **Actions**, **Role Name**, choose **[Employee]**
- Click **Next** to move to the Summary tab
- Click **Save** to save the new Role Mapping Policy and to move back to the Service configuration

Figure 16. OnGuard ClearPass - Roles

Configuration » Services » Edit - OnGuard with 7024P

Services - OnGuard with 7024P

| Summary | Service | Authentication | Roles | Posture | Enforcement |
|---|---------|----------------|------------|---------|-------------|
| Role Mapping Policy: <input type="text" value="Wired Auth 7024P"/> Modify Add new Role Mapping Policy | | | | | |
| Role Mapping Policy Details | | | | | |
| Description: | | | | | |
| Default Role: [Guest] | | | | | |
| Rules Evaluation Algorithm: first-applicable | | | | | |
| Conditions | | | Role | | |
| 1. (Authorization:[Local User Repository]:Role_Name EXISTS) | | | [Employee] | | |

Click **Next** to move to the Posture tab

- Click **Add new Posture Policy**
- Enter a descriptive name in the **Policy Name** field
- Enter a description in the **Description** field
- Leave the **Posture Agent** as **OnGuard Agent**
- Choose the appropriate **Host Operating System** (this example uses **Windows**)
- Click **Next** to move to the **Posture Plugins** tab
 - Check the checkbox for **ClearPass Windows Universal System Health Validator**
 - Click on **Configure**
 - Choose the appropriate version of OS (this example uses **Windows 7**)
 - Check the checkbox **Enable checks for Windows 7** (may not be required for other OS brands)
 - Choose the **Firewall** selection from the list under the OS
 - Check the checkbox **"A firewall application is on"**
 - Uncheck both the **Auto Remediation** and **(Uncheck to allow any product)** checkboxes
 - Click **Save**
- Click **Next** to move to the **Rules** tab
 - Click **Add Rule**

- From the dropdown menu under **Select plugin Checks**, choose **Fails one or more SHV checks**
- Check **ClearPass Windows Universal System Health Validator** checkbox
- From the dropdown menu under **Posture Token**, choose **QUARANTINE (20)**
- Click on **Save**
- Click **Add Rule**
- From the dropdown menu under **Select plugin Checks**, choose **Passes all SHV checks**
- Check **ClearPass Windows Universal System Health Validator** checkbox
- From the dropdown menu under **Posture Token**, choose **HEALTHY (0)**
- Click on **Save**

Click on **Next** to move to the **Summary** tab

Click on **Save** to save the Posture policy and move back to the Service configuration

Figure 17. OnGuard ClearPass - Adding New Posture Policy

Configuration » Posture » Posture Policies » Edit - Wired OnGuard with 7024P

Posture Policies - Wired OnGuard with 7024P

| Summary | Policy | Posture Plugins | Rules |
|--|--------------------------|-----------------|-------|
| Policy: | | | |
| Policy Name: | Wired OnGuard with 7024P | | |
| Description: | | | |
| Posture Agent: | Web Agent | | |
| Host Operating System: | WINDOWS | | |
| Posture Plugins: | | | |
| The list of selected plugins: | | | |
| Plugin Name | Plugin Configuration | Status | |
| 1. ClearPass Windows Universal System Health Validator | View | Configured | |
| Rules: | | | |
| Rules Evaluation Algorithm: | First applicable | | |
| Conditions | Posture Token | | |
| 1. Fails one or more SHV checks - ClearPass Windows Universal System Health Validator | QUARANTINE | | |
| 2. Passes all SHV checks - ClearPass Windows Universal System Health Validator | HEALTHY | | |

Figure 18. OnGuard ClearPass - Posture Policy Main Tab

Configuration » Services » Edit - OnGuard with 7024P

Services - OnGuard with 7024P

| Summary | Service | Authentication | Roles | Posture | Enforcement |
|---|---------|----------------|-------|---------|-------------|
| Posture Policies: | | | | | |
| Posture Policies: Only OnGuard agent type posture policies are applicable for this service Add new Posture Policy | | | | | |
| Wired OnGuard with 7024P <input type="button" value="Remove"/> <input type="button" value="View Details"/> <input type="button" value="Modify"/> | | | | | |
| --Select to Add-- <input type="button" value="Add"/> | | | | | |
| Default Posture Token: UNKNOWN (100) <input type="button" value="Add"/> | | | | | |
| Remediate End-Hosts: <input type="checkbox"/> Enable auto-remediation of non-compliant end-hosts | | | | | |
| Remediation URL: <input type="text"/> | | | | | |
| Posture Servers: | | | | | |
| Posture Servers: <input type="button" value="Remove"/> <input type="button" value="View Details"/> <input type="button" value="Modify"/> Add new Posture Server | | | | | |
| --Select to Add-- <input type="button" value="Add"/> | | | | | |

Click **Next** to move to the **Enforcement** tab

- Click on **Add new Enforcement Policy**
- Enter a descriptive name in the **Name** field
- Enter a description in the **Description** field
- Choose **WEBAUTH** as the **Enforcement Type**
- Click on **Add new Enforcement Profile**
- From the dropdown menu under **Template**, choose **Agent Enforcement**
- Enter a descriptive name in the **Name** field (example- Agent Healthy Profile)
- Enter a description in the **Description** field

Click **Next** to move to the **Attributes** tab

- Two attributes are auto populated
- From the dropdown menu under **Attribute Value - Message**, type a welcome message to be displayed
- Click the disk icon to save the attribute

Click **Next** to move to the **Summary** tab

Click on **Save** to move back to the **Enforcement** policy

- Click on **Add new Enforcement Profile**
- From the dropdown menu under **Template**, choose **Agent Enforcement**

- Enter a descriptive name in the **Name** field (example - Agent Unhealthy)
- Enter a description in the **Description** field

Click **Next** to move to the **Attributes** tab

- Delete the two auto populated attributes
- Click on **Click to add...**
- From the dropdown menu under **Attribute Name**, choose **Bounce Client**
- From the dropdown menu under **Attribute Value**, check the checkbox
- Click the disk icon to save the attribute
- Click on **Click to add...**
- From the dropdown menu under **Attribute Name**, choose **Message**
- From the dropdown menu under **Attribute Value**, type a message to indicate client is unhealthy
- Click the disk icon to save the attribute

Click **Next** to move to the **Summary** tab

Click on **Save** to move back to the **Enforcement** policy

- From the dropdown menu under **Default Profile** choose the healthy profile that was just created. (This example uses **[Agent] Agent Healthy Profile**)

Click on **Next** to move to the **Rules** tab

- Click on **Add Rule**
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Tips**
- From the dropdown menu under **Name**, choose **Role**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **[Employee]**
- Click the disk icon to save the condition
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Tips**
- From the dropdown menu under **Name**, choose **Posture**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **QUARANTINE (20)**
- Click the disk icon to save the condition
- From the dropdown menu under **Enforcement Profiles, Profile Names**, choose the unhealthy profile that was just created. (This example uses **[Agent] Agent Unhealthy**)

- Click the disk icon to save the condition
- Click on **Save**

Click on **Next** to move to the **Summary** tab

Click on **Save** to save the Enforcement policy and move back to the Service configuration

Figure 19. OnGuard ClearPass - Enforcement Policy

Configuration » Services » Edit - OnGuard with 7024P

Services - OnGuard with 7024P

| Summary | Service | Authentication | Roles | Posture | Enforcement |
|---|---------|---|-----------------------------|---------|--|
| Use Cached Results: | | <input type="checkbox"/> Use cached Roles and Posture attributes from previous sessions | | | |
| Enforcement Policy: | | Wired enforcement with OnGuard and 7024P Modify | | | Add new Enforcement Policy |
| Enforcement Policy Details | | | | | |
| Description: | | wired enforcement polickey for OnGuard | | | |
| Default Profile: | | Agent Healthy Profile | | | |
| Rules Evaluation Algorithm: | | first-applicable | | | |
| Conditions | | | Enforcement Profiles | | |
| 1. (Tips:Role EQUALS [Employee]) AND (Tips:Posture EQUALS QUARANTINE (20)) | | | Agent Unhealthy | | |

Click on **Next** to move to the **Summary** tab

Click on **Save** to move to the **Reorder Services** page

ClearPass evaluates the Services created from the top of the list to the bottom. There are many default services that come configured with the base install. These default services will not interfere with this example. The Mac authorization service that was just created can be left at the bottom of the service order list.

Click on **Save** to complete the Web-Auth configuration

Configuring a Wired 802.1x Policy

The next service to be configured is the standard 802.1x service. This service will authenticate the device by request from the 7024P switch. Once the device passes authentication with the 7024P switch, it will automatically step to the OnGuard health check service that was just configured above.

Navigate to **Configuration > Start Here**

Click on **802.1x Wired**

Enter a descriptive name in the **Name** field

Enter a description in the **Description** field

Remove the 2nd service rule with the name **Service-Type**

Click on **Click to add...**

From the dropdown menu under **Type**, choose **Radius:IETF**

From the dropdown menu under **Name**, choose **User-Name**

From the dropdown menu under **Operator**, choose **EXISTS**

Click the disk icon to save the rule

Figure 20. Wired 802.1x ClearPass – Service Configuration

Configuration » Services » Edit - Wired Authentication with OnGuard and 7024P

Services - Wired Authentication with OnGuard and 7024P

| Summary | Service | Authentication | Roles | Enforcement |
|--|--|----------------|---------------|-------------|
| Name: | Wired Authentication with OnGuard and 7024P | | | |
| Description: | 802.1X Wired Access Service | | | |
| Type: | 802.1X Wired | | | |
| Status: | Enabled | | | |
| Monitor Mode: | <input type="checkbox"/> Enable to monitor network access without enforcement | | | |
| More Options: | <input type="checkbox"/> Authorization <input type="checkbox"/> Posture Compliance <input type="checkbox"/> Audit End-hosts <input type="checkbox"/> Profile Endpoints | | | |
| Service Rule | | | | |
| Matches <input type="radio"/> ANY or <input checked="" type="radio"/> ALL of the following conditions: | | | | |
| Type | Name | Operator | Value | |
| 1. Radius:IETF | NAS-Port-Type | EQUALS | Ethernet (15) | |
| 2. Radius:IETF | User-Name | EXISTS | | |
| 3. Click to add... | | | | |

Click on **Next** to move to the **Authentication** tab

Under the Authentication Methods, EAP FAST, EAP TLS, and EAP TTLS can be removed.

Under **Authentication Sources**, from the dropdown menu --Select to Add--, choose [Local User Repository] [Local SQL DB]

Figure 21. Wired 802.1x ClearPass - Authentication Types

Configuration » Services » Edit - Wired Authentication with OnGuard and 7024P

Services - Wired Authentication with OnGuard and 7024P

| Summary | Service | Authentication | Roles | Enforcement |
|---|---------|--|--|---|
| Authentication Methods: | | | | |
| | | [EAP PEAP] [EAP MSCHAPv2] | Move Up Move Down Remove View Details Modify | Add new Authentication Method |
| | | --Select to Add-- | | |
| Authentication Sources: | | | | |
| | | [Local User Repository] [Local SQL DB] | Move Up Move Down Remove View Details Modify | Add new Authentication Source |
| | | --Select to Add-- | | |
| Strip Username Rules: <input type="checkbox"/> Enable to specify a comma-separated list of rules to strip username prefixes or suffixes | | | | |

Click on **Next** to move to the **Roles** tab

Click on **Add new Role Mapping Policy**

Enter a descriptive name in the **Name** field

Enter a description in the **Description** field

Click on **Next** to move to the **Mapping Rules** tab

- Click on **Add Rule**
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Authorization:[Local User Repository]**
- From the dropdown menu under **Name**, choose **Role-Name**
- From the dropdown menu under **Operator**, choose **EXISTS**
- Click the disk icon to save the rule
- From the dropdown menu under **Role Name**, choose **[Employee]**
- Click on **Save**

Click on **Next** to move to the **Summary** tab

Click on **Save** to move back to the service configuration

Figure 22. Wired 802.1x ClearPass - Roles

Configuration » Services » Edit - Wired Authentication with OnGuard and 7024P

Services - Wired Authentication with OnGuard and 7024P

| Summary | Service | Authentication | Roles | Enforcement | | | | | | | | | | | | |
|---|------------------|------------------|-------|---|-----------------------------|--|--------------|--|---------------|---------|-----------------------------|------------------|------------|------|--|------------|
| Role Mapping Policy: | | Wired Auth 7024P | | Add new Role Mapping Policy | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th colspan="2">Role Mapping Policy Details</th> </tr> </thead> <tbody> <tr> <td>Description:</td> <td></td> </tr> <tr> <td>Default Role:</td> <td>[Guest]</td> </tr> <tr> <td>Rules Evaluation Algorithm:</td> <td>first-applicable</td> </tr> <tr> <th>Conditions</th> <th>Role</th> </tr> <tr> <td>1. (Authorization:[Local User Repository]:Role_Name EXISTS)</td> <td>[Employee]</td> </tr> </tbody> </table> | | | | | Role Mapping Policy Details | | Description: | | Default Role: | [Guest] | Rules Evaluation Algorithm: | first-applicable | Conditions | Role | 1. (Authorization:[Local User Repository]:Role_Name EXISTS) | [Employee] |
| Role Mapping Policy Details | | | | | | | | | | | | | | | | |
| Description: | | | | | | | | | | | | | | | | |
| Default Role: | [Guest] | | | | | | | | | | | | | | | |
| Rules Evaluation Algorithm: | first-applicable | | | | | | | | | | | | | | | |
| Conditions | Role | | | | | | | | | | | | | | | |
| 1. (Authorization:[Local User Repository]:Role_Name EXISTS) | [Employee] | | | | | | | | | | | | | | | |

Click on **Next** to move to the **Enforcement** tab

- Check the checkbox for **Use Cached Results**
- Click on **Add new Enforcement Policy**
- Enter a descriptive name in the **Name** field
- Enter a description in the **Description** field
- From the dropdown menu under **Default Profile**, choose [Deny Access Profile]

Click on **Next** to move to the **Rules** tab

- Click on **Add Rule**
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Tips**
- From the dropdown menu under **Name**, choose **Posture**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **QUARANTINE (20)**
- Click the disk icon to save the condition
- From the dropdown menu under **Profile Names**, --Select to Add--, choose **[RADIUS] [Deny Access Profile]**
- Click on **Save**
- Click on **Add Rule**
- Click on **Click to add...**
- From the dropdown menu under **Type**, choose **Tips**
- From the dropdown menu under **Name**, choose **Role**
- From the dropdown menu under **Operator**, choose **EQUALS**
- From the dropdown menu under **Value**, choose **[Employee]**
- Click the disk icon to save the condition

- From the dropdown menu under **Profile Names**, --Select to Add--, choose **[RADIUS] [Allow Access Profile]**
- Click on **Save**

Click on **Next** to move to the **Summary** tab

Figure 23. Wired 802.1x ClearPass - Enforcement

Configuration > Services > Edit - Wired Authentication with OnGuard and 7024P

Services - Wired Authentication with OnGuard and 7024P

| Summary | Service | Authentication | Roles | Enforcement |
|-----------------------------------|--|------------------------|-------|--|
| Use Cached Results: | <input checked="" type="checkbox"/> Use cached Roles and Posture attributes from previous sessions | | | |
| Enforcement Policy: | Allow Access Policy for MAC-Auth - OnGuard | | | Add new Enforcement Policy |
| Enforcement Policy Details | | | | |
| Description: | Sample policy to allow network access | | | |
| Default Profile: | [Deny Access Profile] | | | |
| Rules Evaluation Algorithm: | first-applicable | | | |
| Conditions | | Enforcement Profiles | | |
| 1. | (Tips:Posture EQUALS QUARANTINE (20)) | [Deny Access Profile] | | |
| 2. | (Tips:Role EQUALS [Employee]) | [Allow Access Profile] | | |

Click on **Save** to move back to the service configuration

Click on **Next** to move to the **Summary** tab

Click on **Save** to move to the **Reorder Services** page

On the **Reorder Services** page, ensure this wired 802.1x service is placed before the OnGuard Web-Auth service configured in the previous section

Click on **Save** to complete the configuration

Testing OnGuard Posture Configuration

The OnGuard persistent client application is downloaded directly from the ClearPass application. The easiest method to access the .exe or .msi is to locate the download link within the management GUI. ClearPass administrators can navigate to the following location:

Administration > Agents and Software Updates > OnGuard Settings

Ensure the **Wired** checkbox under **Agent Customization, Managed Interfaces** is checked

From the dropdown menu under **Mode**, choose **Authenticate with health checks**

Download the application, transfer it to the test PC, and install prior to trying to access the network.

Once OnGuard is installed, ensure the OnGuard process is started. Also ensure that the test PC can support 802.1x on its LAN interface. (For Windows 7, administrators can start the **Wired Auto Config** service by opening and locating it within **services.msc** on the **Standard** tab). Ensure the Local Area Connection Authentication settings are properly configured. For this example **Microsoft: Protected**

EAP (PEAP) is used, uncheck **Validate server certificate**, use method **Secured password (EAP-MSCHAP v2)** and uncheck **Automatically use my Windows logon name and password**.

When connecting to the network, Windows will ask for a username and password. Enter the credentials that are located in the Local User database created within ClearPass for this example.

Once connected to the network, the OnGuard application will also ask for a username and password. These credentials are the same credentials located in the Local User database.

Within the Dell Networking 7024P GUI, administrators can see the status of all authentications and can see if a port is currently authorized. For the Port Access Log, navigate to **Switching > Dot1x Authentication > Monitoring Mode > Port Access Control History Log**.

ClearPass has an extensive Access Tracker which logs all the steps corresponding to Authentication, Authorization and Enforcement. It is very useful in identifying which service it's identifying to categorize the request, and what issues it has during the authentication. The Access Tracker can be located by navigating to **Monitoring > Live Monitoring > Access Tracker**. There is also an OnGuard Activity list located in **Monitoring > Live Monitoring > OnGuard Activity** to monitor all OnGuard clients.

OnGuard Configuration Conclusion

Many of the settings in the above example are simplified for the purpose of providing a basic configuration an administrator can build upon.

The default Web-based authentication service within ClearPass will successfully prevent unhealthy clients from accessing the network. The example above will result in a client that is restricted from all network access until the health issue is fixed.

Administrators can further design their network access capabilities to include a remediation VLAN or Quarantine network. This will allow the PC to have minimal access to network resources and enable an IT administrator remote access to remediate the system. Further configuration or a new service to detect the quarantined state and place it in the remediation VLAN would be required. The client may also be required to physically reconnect the device after waiting for 2-3 minutes before retrying the authentication to allow any cached failure state to be cleared out.

Additional information on configuring VLANs with Dell switches can be found in their respective User's Configuration Guide. The Dell Networking 7024P used in the above example has the following chapters with useful VLAN information: *Configuring Port and System Security*, and *Configuring VLANs*.

ClearPass provides VLAN attributes to the switch via the Enforcement Policy within the service. Additional information on enforcement can be found in the *Dell Networking W-ClearPass Policy Manager User Guide*. The *Enforcement* chapter in the user guide contains the applicable VLAN information.

Appendix A

Dell Networking 55xx Series Switches

Dell Networking 55xx Series switches have different features and use a different firmware base than the switches detailed above. Due to the feature and behavior differences, the configuration of the Dell Networking 55xx switch will be different.

Dell Networking 55xx Series Firmware

The following firmware version is used in the configuration information below:

System firmware version 4.1.0.10

The Hardware applicable to the firmware above is:

Dell Networking 5524/5548/5524P/5548P

MAC Authentication Configuration for 55xx Series Switch


The 55xx series switch uses the same EAP-MD5 authentication method to facilitate the MAC authentication with MAB. The main difference is a requirement to enable a Guest VLAN for MAC-based authentication methods. Details on the requirements for the types of authentication can be found in the *Dell Networking 5500 Series System User Guide*.

Similar to the examples in the main document, the configuration steps below are limited to a basic setup to show the behavior and methodology of the configuration. Administrators should configure their access policies and user roles as outlined in their own network security policy.

This appendix is not a step by step guide. Screenshots in the figures are summary screens of final configurations used in the validation.


Switching > Network Security > Dot1x Authentications > Port Based Authentication Global

Figure 24. Appendix A, 5524P Dot1x Global Settings

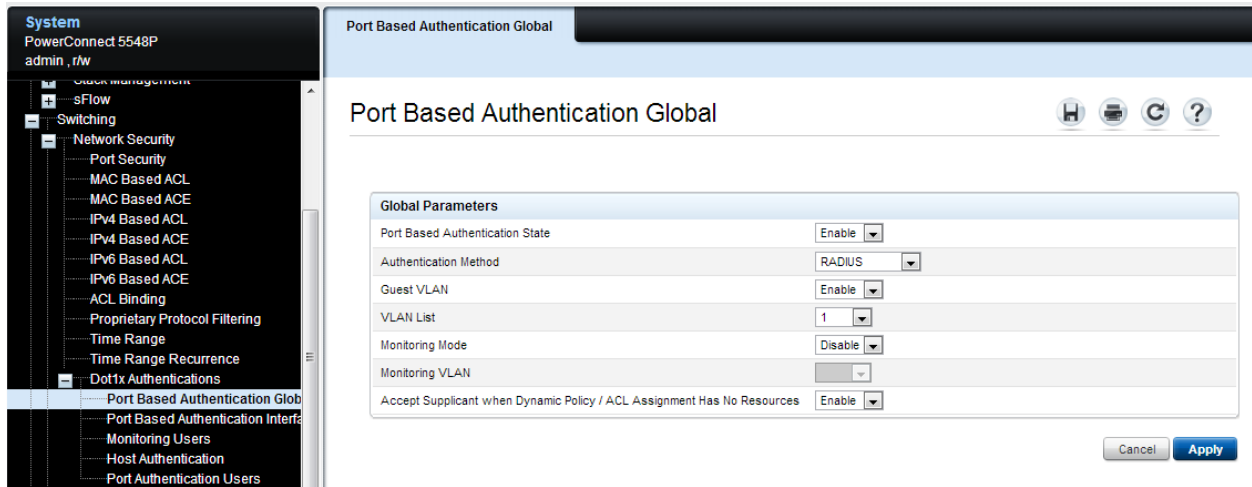

Switching > Network Security > Dot1x Authentications > Port Based Authentication Interface Settings: Edit

Figure 25. Appendix A, 5524P Dot1x Interface Settings, MAC Only

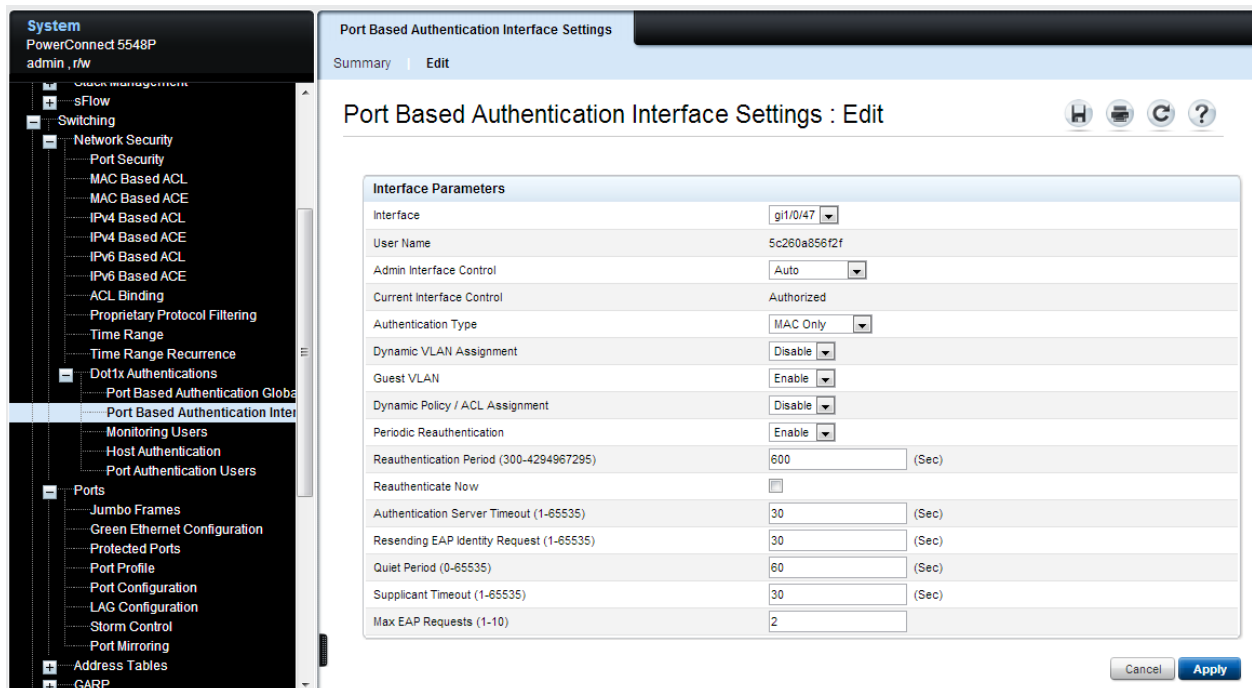

DELL Networking W-ClearPass MAC Authentication Configuration

The configuration for W-ClearPass does not change from the example shown in the main body of this document. The same service and its setup can be used for the MAC Authentication with MAB.

OnGuard posture enforcement with Dell Networking 55xx Switch

The Dell Networking 55xx Series Switch behaves in a very similar manner for 802.1x PEAP-EAP-MSCHAPv2 authentication. The standard settings are shown in the following figure.

Figure 26. Appendix A, 5524P Dot1x Interface Settings, 802.1x only

The screenshot displays the configuration page for 'Port Based Authentication Interface Settings' on a Dell Networking switch. The left sidebar shows a navigation tree with 'Port Based Authentication Interface Settings' selected. The main content area is titled 'Port Based Authentication Interface Settings : Edit' and contains a table of configuration parameters.

| Interface Parameters | |
|--|--------------------------|
| Interface | gi1/0/47 |
| User Name | PCW Eng |
| Admin Interface Control | Auto |
| Current Interface Control | Authorized |
| Authentication Type | 802.1x Only |
| Dynamic VLAN Assignment | Disable |
| Guest VLAN | Disable |
| Dynamic Policy / ACL Assignment | Disable |
| Periodic Reauthentication | Enable |
| Reauthentication Period (300-4294967295) | 600 (Sec) |
| Reauthenticate Now | <input type="checkbox"/> |
| Authentication Server Timeout (1-65535) | 30 (Sec) |
| Resending EAP Identity Request (1-65535) | 30 (Sec) |
| Quiet Period (0-65535) | 60 (Sec) |
| Supplicant Timeout (1-65535) | 30 (Sec) |
| Max EAP Requests (1-10) | 2 |

Buttons for 'Cancel' and 'Apply' are located at the bottom right of the configuration area.

DELL Networking W-ClearPass MAC Authentication Configuration

The configuration for W-ClearPass does not change from the example shown in the main body of this document. The same service and its setup can be used for both the 802.1x Wired and Web-Auth services.