

Expansion Modules for Dell™ PowerConnect™ and Dell Force10 Switches v2.1

A Dell technical white paper

Victor Teeter

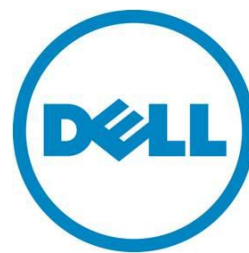

This document is for informational purposes only and may contain typographical errors and technical inaccuracies. The content is provided as is, without express or implied warranties of any kind.

© 2012 Dell Inc. All rights reserved. Dell and its affiliates cannot be responsible for errors or omissions in typography or photography. Dell, the Dell logo, and PowerConnect are trademarks of Dell Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others.

August 2012 | Rev 2.1

Contents

Introduction	4
SFP+ Modules and Optic Requirements	5
Blade Switches and Corresponding Modules	6
Dell PowerConnect M8024-k	7
Dell PowerConnect M8024.....	7
Dell PowerConnect M6220.....	8
Dell Force10 MXL.....	9
Dell PowerConnect M6348.....	9
Rack Switches and Corresponding Modules	10
Dell PowerConnect 8100 Series (8132, 8132F, 8164, and 8164F)	11
Dell PowerConnect 7000 Series (7024, 7024P, 7024F, 7048, 7048P, 7048R, and 7048R-RA)	12
Dell PowerConnect 62xx Series (6224, 6224P, 6224F, 6248, 6248P).....	13
About Dell.....	14

Figures

Figure 1. Example of an Expansion Module for Blade Switch	6
Figure 2. Dell PowerConnect M8024-k Blade Switch (10G Ethernet) and Available Modules	7
Figure 3. Dell PowerConnect M8024 Blade Switch (10G Ethernet) and Available Modules	7
Figure 4. Dell PowerConnect M6220 Blade Switch (1G Ethernet) and Available Modules	8
Figure 5. Dell Force 10 MXL Blade Switch (10/40G Ethernet) and Available Modules	9
Figure 6. Dell PowerConnect M6348 Blade Switch (1G Ethernet)	9
Figure 7. Dell PowerConnect 8100 Series Switch (40/10G Ethernet) and Available Modules.....	11
Figure 8. Dell PowerConnect 7000 Series Switch (1G Ethernet) and Available Modules	12
Figure 9. Dell PowerConnect 62xx Series Switch (1G Ethernet) and Available Modules.....	13

Introduction

Dell™ offers several blade and rack-mounted switches that allow users to upgrade the hardware by installing *expansion modules*. Thanks to Dell's FlexIO technology, these modules can be used to increase access ports, augment upstream bandwidth, extend media forms (10GBase-T, SFP+, QSFP+, CX4, XFP), or add stacking capabilities. This document identifies each Dell PowerConnect switch and its corresponding set of expansion modules.

The document is divided into two main areas: *Blade Switches and Corresponding Modules* lists and describes modules for corresponding blade switches that install into a Dell M1000e blade chassis; *Rack Switches and Corresponding Modules* lists and describes modules for corresponding rack-mounted switches.

When possible, Dell allows for a module to be used in multiple devices. Customers who have purchased a module for one device can freely move that module to another device when supported. There are three groups of switches described in this document that can use the same modules interchangeably within its group:

- PowerConnect M6220, 6224, 6224P, 6224F, 6248, and 6248P support the same expansion modules.
- PowerConnect M8024 and M8024-k support the same expansion modules.
- PowerConnect 7024, 7024P, 7024F, 7048, 7048P 7048R, and 7048R-RA support the same expansion modules.
- PowerConnect 8132, 8132F, 8164, 8164F and Dell Force10 MXL support the same expansion modules.

NOTE: Whenever a module is moved from an MXL to an 8100 or vice versa, a reload of the switch is required for proper functioning.

Unless noted, when two bays are available on a device, the same type of modules can be installed in both bays at the same time, or two different modules can be installed at the same time, one in each bay. Currently, there are no more than two expansion slots in any of the PowerConnect devices. Listed below are all possible configurations:

- 1 slot/bay available: empty
- 1 slot/bay available: installed
- 2 slots/bays available: empty / empty
- 2 slots/bays available: installed / empty
- 2 slots/bays available: empty / installed
- 2 slots/bays available: installed / installed

NOTE: In the last bullet above, any two modules may be installed, whether they are the same or different types, unless noted in the module description (for example, the stacking modules for the 62xx and M6220 can only be installed in bay 1).

There are several CX4 expansion modules available for PowerConnect switches. Each CX4 module listed below shows whether it has a clip-style or screw-style connector. Regardless of the type of connection required, Dell has cables available to complete all CX4 connections. One such cable includes a CX4

clip-style on one end and a CX4 screw-style on the other, which may be required when connecting certain devices.

SFP+ Modules and Optic Requirements

When selecting optic transceivers or cables for SFP+ modules described in this document, it is important to understand that while some SFP+ ports will accept both 1G and 10G, not all do. As seen in the table below, most *fixed port* SFP+ ports on Dell PowerConnect and Force10 switches allow both 10G and 1G SFP+ optics; however, the *expansion module ports* often allow only 10G optics.


Port Type / Switch	SFP+ expansion module ports	SFP+ fixed ports
M6220	10G only	n/a
M8024	10G only	n/a
M8024-k	10G only	1G and 10G
Force10 MXL	1G and 10G	n/a
62XX	10G only	n/a
70XX	1G and 10G	n/a
81XX	1G and 10G	1G and 10G

PowerConnect switches that do not accept expansion modules are not listed in the table above, even though they may contain SFP+ *fixed* ports (e.g. M6348 and 8000 series).

Blade Switches and Corresponding Modules

The Dell PowerEdge M1000e blade chassis has six slots in the rear that allow for a number of Dell PowerConnect switches to be installed. Most of these blade switches also have hardware upgrades of their own in the form of expansion modules as shown in Figure 1.


Figure 1. Example of an Expansion Module for Blade Switch

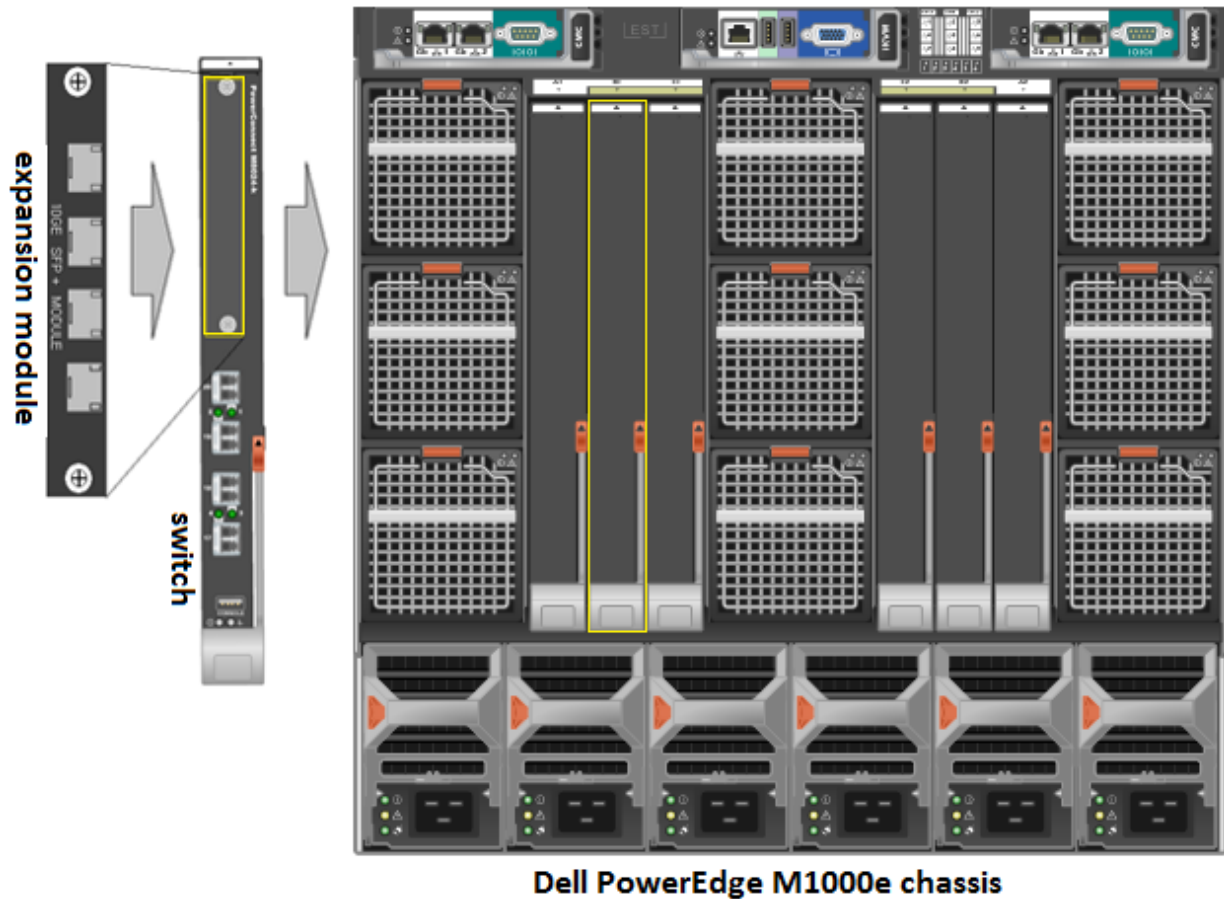

This section identifies each type of blade switch for the M1000e and corresponding expansion modules and provides an overview of each of these modules to help in identifying the right module for its purpose. A picture of each switch is provided below. Under each switch are pictures of supported modules, descriptions, and Dell part numbers for identification.

Dell PowerConnect M8024-k

Figure 2. Dell PowerConnect M8024-k Blade Switch (10G Ethernet) and Available Modules

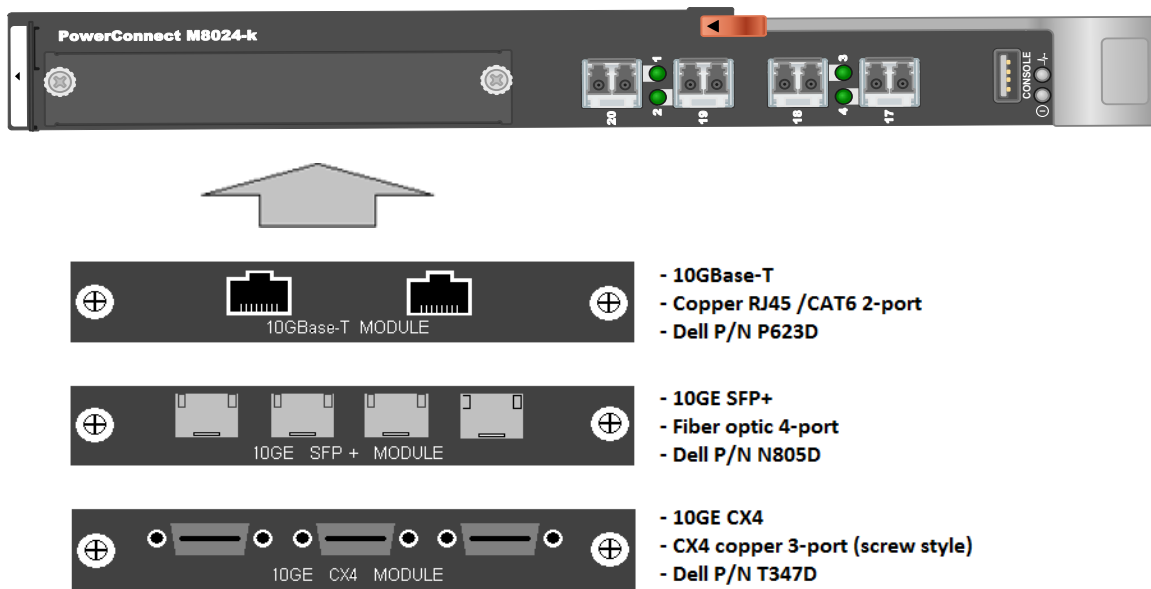


The PowerConnect M8024 and M8024-k switches support the same expansion modules.

Fixed SFP+ ports on an M8024-k can run 10G or 1G optics, but the SFP+ expansion module for the M8024-k can only run 10G optics. This limitation only applies to the M8024-k SFP+ expansion module and is not prevalent on other devices or modules (including the M8024).

Dell PowerConnect M8024


Figure 3. Dell PowerConnect M8024 Blade Switch (10G Ethernet) and Available Modules

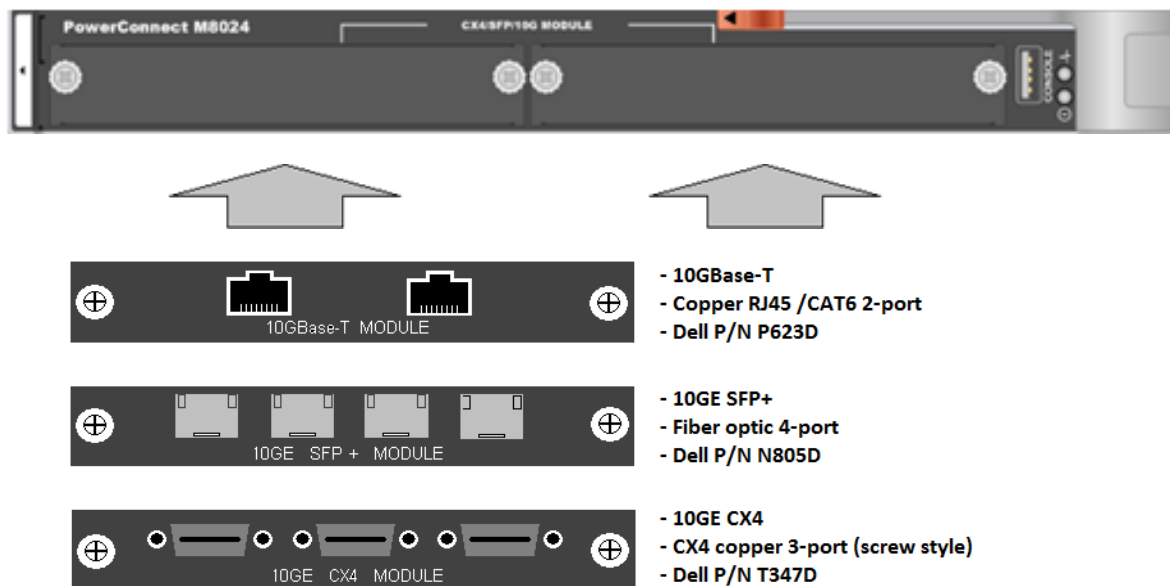

The PowerConnect M8024 and M8024-k switches support the same expansion modules. All three modules will install into either bay on the M8024.

Dell PowerConnect M6220

Figure 4. Dell PowerConnect M6220 Blade Switch (1G Ethernet) and Available Modules

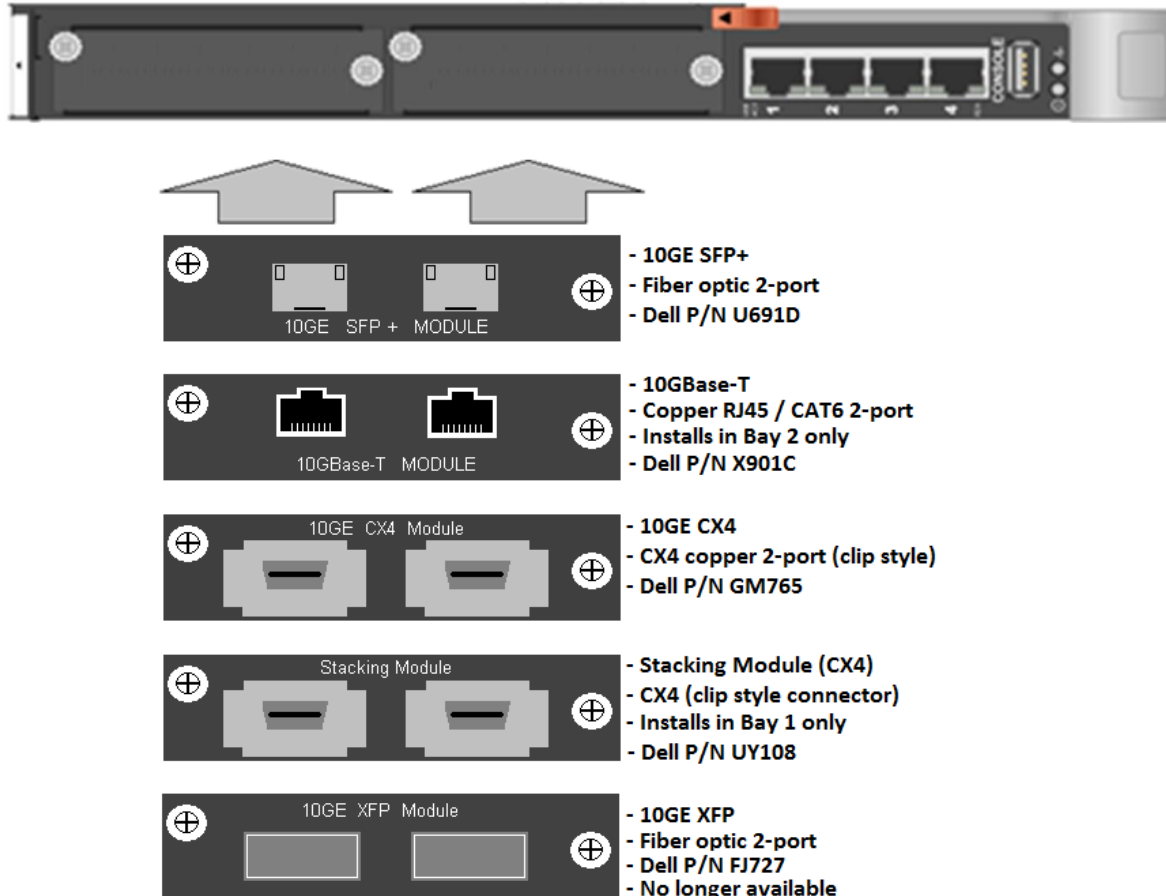


The PowerConnect M6220 supports the same expansion modules as the PowerConnect 6224, 6224P, 6224F, 6248, and 6248P.

The Stacking module only installs in Bay 1 (left bay). The 10GBase-T module only installs in Bay 2 (right bay).

Both the Stacking module and 10GE CX4 module can be configured to either role (Ethernet or Stacking). By default, each module functions according to its module ID. Upon changing the role of a module, a reboot is required for the change to take effect. Consult the *62xx Command Line Interface Guide* (<http://support.dell.com/support/edocs/network/PC62xx/en/index.htm>) for instructions on how to change roles.

Dell Force10 MXL

Figure 5. Dell Force 10 MXL Blade Switch (10/40G Ethernet) and Available Modules

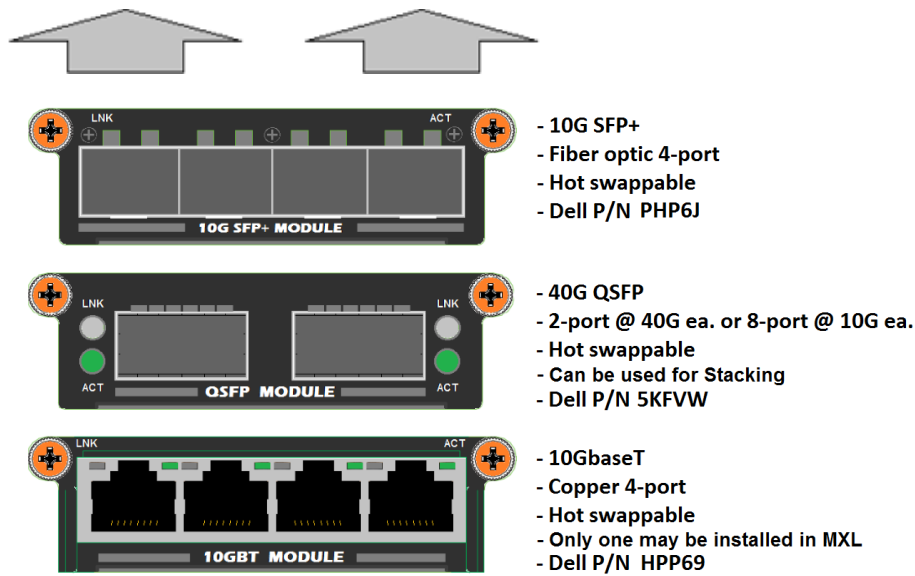

The Dell Force10 MXL supports the same expansion modules as the Dell PowerConnect 8100 series rack mounted switches. Whenever a module is moved from an MXL to an 8100 or vice versa, a reload of the switch is required for proper functioning of the module.

Dell PowerConnect M6348

Figure 6. Dell PowerConnect M6348 Blade Switch (1G Ethernet)



The PowerConnect M6348 has no expansion slots; therefore, it does not support any modules. However, the front panel does provide sixteen 10/100/1000Base-T auto-sensing full-duplex RJ-45 ports, two 10G SFP+ ports, and two 10G CX4 ports. There are also 32 internal 1G ports that connect to the servers in the chassis. The stacking ports on the front panel allow stacking between M6348 switches as well as between M6348 and PowerConnect 7000 series switches.

Rack Switches and Corresponding Modules



This section identifies each PowerConnect rack-mounted switch that supports expansion modules, lists each corresponding expansion module, and provides a brief overview of each to help identify the correct module for its purpose.

A picture of each switch is provided below. Under each switch are pictures of supported modules with descriptions and Dell part numbers for identification and ordering.


Dell PowerConnect 8100 Series (8132, 8132F, 8164, and 8164F)

There are four switch models in the Dell PowerConnect 8100 series, each with one bay on the **front** of the switch for an expansion module. The **front view** of the switch is one of the four shown in the figure below. The yellow outline shows the bay on each switch.


Figure 7. Dell PowerConnect 8100 Series Switch (40/10G Ethernet) and Available Modules

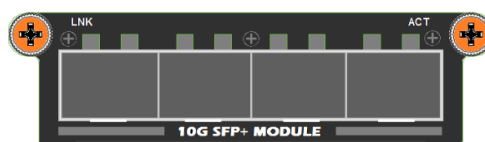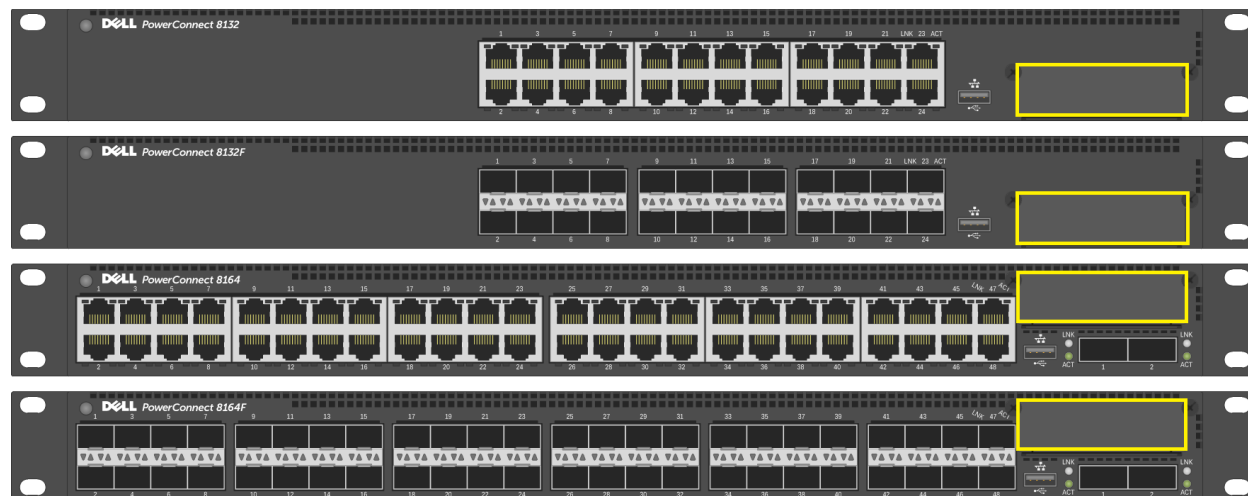

- 10G SFP+
- Fiber optic 2-port
- Hot swappable
- Dell P/N PHP6J

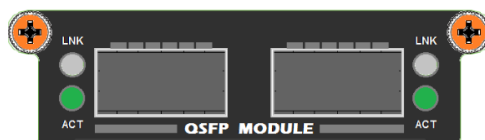

- 40G QSFP
- 2-port @ 40G ea. or up to 8-port @ 10G ea.
- Hot swappable
- Dell P/N 5KFVW

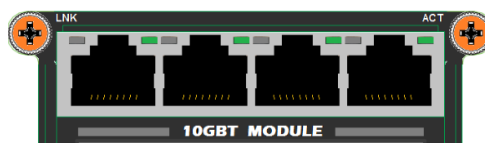

- 10GbseT
- Copper 4-port
- Hot swappable
- Dell P/N HPP69


All three modules may be used for stacking the 8100 series switches. Also, any port on the front of an 8100 may be used for stacking. Orange screws on the modules above indicate that they are hot-swappable modules.

The PowerConnect 8100 series supports the same expansion modules as the Dell Force10 MXL. Whenever a module is moved from an MXL to an 8100 or vice versa, a reload of the switch is required for proper functioning of the module.

Dell PowerConnect 7000 Series (7024, 7024P, 7024F, 7048, 7048P, 7048R, and 7048R-RA)

There are seven different switch models in the Dell PowerConnect 7000 series, each with two bays for expansion modules. Depending on the model, the *rear view* of the switch is one of the three shown in Figure 8. The yellow outlines show the two bays.

Figure 8. Dell PowerConnect 7000 Series Switch (1G Ethernet) and Available Modules

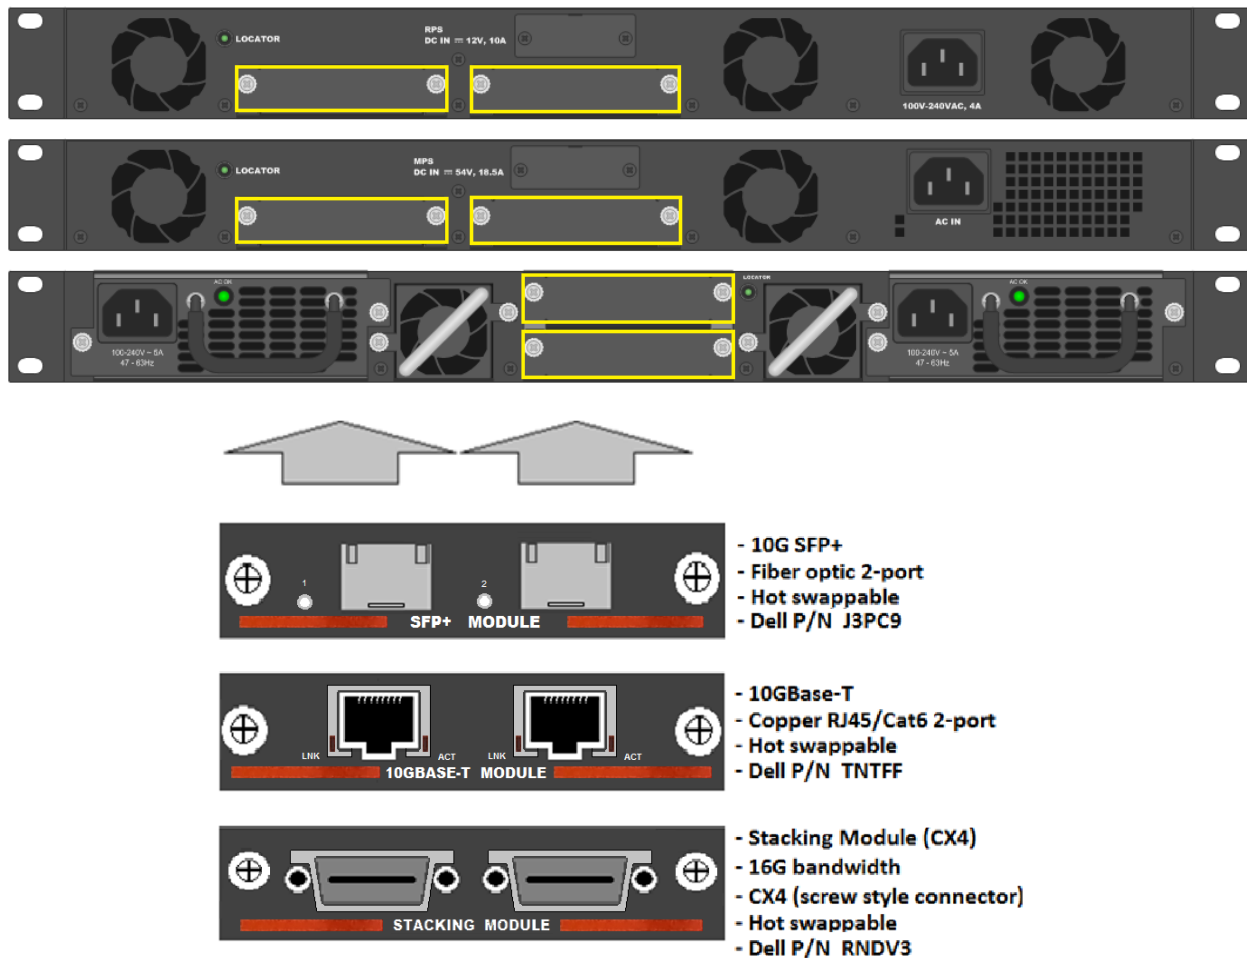


Red/orange lines on these PowerConnect modules indicate that they are hot-swappable modules.

The CX4 Stacking Module for the 7000 series is not capable of changing roles (to Ethernet) as is true for CX4 modules for the 62xx/M62xx. These stacking modules are only used for stacking.

Dell PowerConnect 62xx Series (6224, 6224P, 6224F, 6248, 6248P)

There are five different switch models in the Dell PowerConnect 62xx series, each with two bays for expansion modules. The rear view of the switch looks similar to the one shown in Figure 9. The yellow outlines show the two bays on the left end of the switch.

Figure 9. Dell PowerConnect 62xx Series Switch (1G Ethernet) and Available Modules

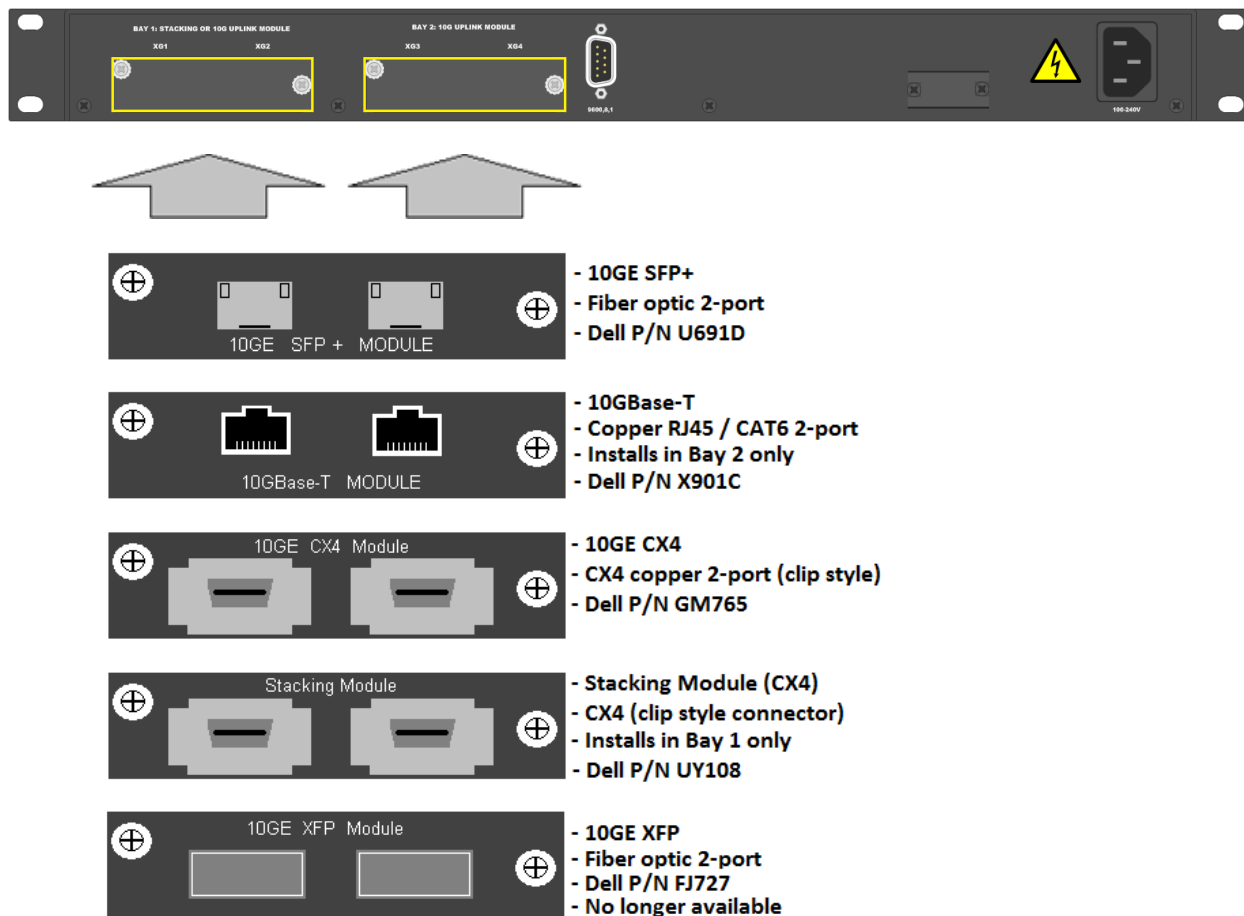

PowerConnect 6224, 6224P, 6224F, 6248, and 6248P support the same expansion modules as the PowerConnect M6220 modular switch.

The Stacking module only installs into Bay 1 (left bay when viewing from the back). The 10GBase-T module only installs into Bay 2 (right bay when viewing from the back).

Both the Stacking module and 10GE CX4 module can be configured to either role (Ethernet or Stacking). By default, each module functions according to its module ID. Upon changing the role of a module, a reboot is required for the change to take effect. Consult the 62xx *Command Line Interface Guide* (<http://support.dell.com/support/edocs/network/PC62xx/en/index.htm>) for instructions on how to change roles.

For more information on Dell PowerConnect products and features, visit www.dell.com/powerconnect.

About Dell

Dell (NASDAQ: DELL) is a leading technology provider to commercial and public enterprises around the world.