



# Dell Networking W-ClearPass Policy Model 6.1

## An Introduction

From the point of view of a network device or other entities that need authentication services, Policy Manager appears as a RADIUS, TACACS+ or Web Authentication server; however, its rich and extensible policy model allows it to broker security functions across a range of existing network infrastructure, identity stores, health/posture services and client technologies within the Enterprise.

### Services Paradigm

Services are the highest level element in the Policy Manager policy model. They have two purposes:


- Unique **Categorization Rules** (per Service) enable Policy Manager to test Access Requests ("Requests") against available Services to provide robust differentiation of requests by access method, location, or other network vendor-specific attributes.

NOTE: Policy Manager ships with a number of configured basic Service types. You can flesh out these Service types, copy them for use as templates, import other Service types from another implementation (from which you have previously exported them), or develop new Services from scratch.

- By wrapping a specific set of **Policy Components**, a Service can coordinate the flow of a request, from authentication, to role and health evaluation, to determination of enforcement parameters for network access.

Figure 1: [Dell Networking W-ClearPass Policy Manager Flow of Control](#) and Table 1: [Policy Manager Service Components](#) illustrate and describe the basic Policy Manager flow of control and its underlying architecture.

Figure 1: Dell Networking W-ClearPass Policy Manager Flow of Control

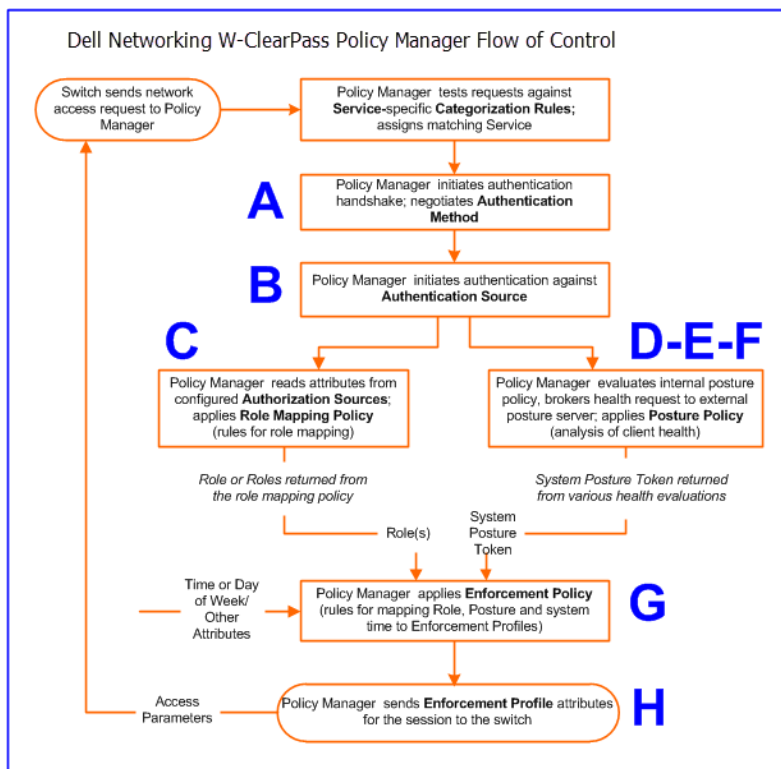

**Table 1: Policy Manager Service Components**

Component	Service: component ratio	Description
<p><b>A - Authentication Method</b></p>	<p>Zero or more per service</p>	<p>EAP or non-EAP method for client authentication.</p> <p>Policy Manager supports four broad classes of authentication methods:</p> <ul style="list-style-type: none"> <li>● <b>EAP, tunneled:</b> PEAP, EAP-FAST, or EAP-TTLS.</li> <li>● <b>EAP, non-tunneled:</b> EAP-TLS or EAP-MD5.</li> <li>● <b>Non-EAP, non-tunneled:</b> CHAP, MS-CHAP, PAP, or MAC-AUTH.</li> <li>● <b>MAC_AUTH</b> must be used exclusively in a MAC-based Authentication Service. When the MAC_AUTH method is selected, Policy Manager: (1) makes internal checks to verify that the request is indeed a <i>MAC Authentication</i> request (and not a spoofed request) and (2) makes sure that the MAC address of the device is present in the authentication source.</li> </ul> <p>Some Services (for example, <i>TACACS+</i>) contain internal authentication methods; in such cases, Policy Manager does not make this tab available.</p>
<p><b>B - Authentication Source</b></p>	<p>Zero or more per service</p>	<p>An Authentication Source is the identity repository against which Policy Manager verifies identity. It supports these Authentication Source types:</p> <ul style="list-style-type: none"> <li>● Microsoft Active Directory</li> <li>● and LDAP compliant directory</li> <li>● RSA or other RADIUS-based token servers</li> <li>● SQL database, including the local user store.</li> <li>● Static Host Lists, in the case of MAC-based Authentication of managed devices.</li> </ul>
<p><b>C - Authorization Source</b></p>	<p>One or more per Authentication Source and zero or more per service</p>	<p>An Authorization Source collects attributes for use in Role Mapping Rules. You specify the attributes you want to collect when you configure the authentication source. Policy Manager supports the following authorization source types:</p> <ul style="list-style-type: none"> <li>● Microsoft Active Directory</li> <li>● any LDAP compliant directory</li> <li>● RSA or other RADIUS-based token servers</li> <li>● SQL database, including the local user store.</li> </ul>
<p><b>C - Role Mapping Policy</b></p>	<p>Zero or one per service</p>	<p>Policy Manager evaluates Requests against Role Mapping Policy rules to match Clients to Role(s). All rules are evaluated and Policy Manager may return more than one Role. If no rules match, the request takes the configured Default Role.</p> <p>Some Services (for example, <i>MAC-based Authentication</i>) may handle role mapping differently:</p> <ul style="list-style-type: none"> <li>● For <i>MAC-based Authentication</i> Services, where role information is not available from an authentication source, an Audit Server can determine role by applying post-audit rules against the client attributes gathered during the</li> </ul>

Component	Service: component ratio	Description
		audit.
<b>D</b> - Internal Posture Policies	Zero or more per service	An Internal Posture Policy tests Requests against internal Posture rules to assess health. Posture rule conditions can contain attributes present in vendor-specific posture dictionaries.
<b>E</b> - Posture Servers	Zero or more per service	<p>Posture servers evaluate client health based on specified vendor-specific posture credentials, typically posture credentials that cannot be evaluated internally by Policy Manager (that is, not by internal posture policies).</p> <p>Currently, Policy Manager supports two forms of posture server interfaces: <i>HCAP</i>, <i>RADIUS</i>, and <i>GAMEv2</i> posture servers.</p>
<b>F</b> - Audit Servers	Zero or more per service	<p>Audit servers evaluate the health of clients that do not have an installed agent, or which cannot respond to Policy Manager interactions. Audit servers typically operate in lieu of authentication methods, authentication sources, internal posture policies and posture server.</p> <p>In addition to returning posture tokens, Audit Servers can contain post-audit rules that map results from the audit into Roles.</p>
<b>G</b> - Enforcement Policy	One per service (mandatory)	Policy Manager tests Posture Tokens, Roles (and system time) against Enforcement Policy rules to return one or more matching Enforcement Policy rules to return one or more matching Enforcement Profiles (that define scope of access for the client).
<b>H</b> - Enforcement Profile	One or more per service	Enforcement Policy Profiles contain attributes that define a client's scope of access for the session. Policy Manager returns these Enforcement Profile attributes to the switch.

## Copyright Information

© 2013 Aruba Networks, Inc. Aruba Networks trademarks include the Aruba Networks logo, Aruba Networks<sup>®</sup>, Aruba Wireless Networks<sup>®</sup>, the registered Aruba the Mobile Edge Company logo, and Aruba Mobility Management System<sup>®</sup>. Dell<sup>™</sup>, the DELL<sup>™</sup> logo, and PowerConnect<sup>™</sup> are trademarks of Dell Inc.

All rights reserved. Specifications in this manual are subject to change without notice.

Originated in the USA. All other trademarks are the property of their respective owners.

### Open Source Code

Certain Aruba products include Open Source software code developed by third parties, including software code subject to the GNU General Public License (GPL), GNU Lesser General Public License (LGPL), or other Open Source Licenses. Includes software from Litech Systems Design. The IF-MAP client library copyright 2011 Infoblox, Inc. All rights reserved. [This product includes software developed by Lars Fenneberg, et al. The Open Source code used can be found at this site:](#)

[http://www.arubanetworks.com/open\\_source](http://www.arubanetworks.com/open_source)

### Legal Notice

The use of Aruba Networks, Inc. switching platforms and software, by all individuals or corporations, to terminate other vendors' VPN client devices constitutes complete acceptance of liability by that individual or corporation for this action and indemnifies, in full, Aruba Networks, Inc. from any and all legal actions that might be taken against it with respect to infringement of copyright on behalf of those vendors.