

FTOS Command Line Reference Guide for the S4820T (FTOS 8.3.19.0) System

Publication Date: January 2013



Force10

Notes, Cautions, and Warnings



NOTE: A NOTE indicates important information that helps you make better use of your computer.



CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.



WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Information in this publication is subject to change without notice.

© 2013 Dell Force10. All rights reserved.

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: Dell™, the DELL logo, Dell Precision™, OptiPlex™, Latitude™, PowerEdge™, PowerVault™, PowerConnect™, OpenManage™, EqualLogic™, KACE™, FlexAddress™ and Vostro™ are trademarks of Dell Inc. Intel®, Pentium®, Xeon®, Core™ and Celeron® are registered trademarks of Intel Corporation in the U.S. and other countries. AMD® is a registered trademark and AMD Opteron™, AMD Phenom™, and AMD Sempron™ are trademarks of Advanced Micro Devices, Inc. Microsoft®, Windows®, Windows Server®, MS-DOS® and Windows Vista® are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Red Hat Enterprise Linux® and Enterprise Linux® are registered trademarks of Red Hat, Inc. in the United States and/or other countries. Novell® is a registered trademark and SUSE™ is a trademark of Novell Inc. in the United States and other countries. Oracle® is a registered trademark of Oracle Corporation and/or its affiliates. Citrix®, Xen®, XenServer® and XenMotion® are either registered trademarks or trademarks of Citrix Systems, Inc. in the United States and/or other countries. VMware®, Virtual SMP®, vMotion®, vCenter®, and vSphere® are registered trademarks or trademarks of VMWare, Inc. in the United States or other countries.

Other trademarks and trade names may be used in this publication to refer to either the entities claiming the marks and names or their products. Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.

1	About this Guide	13
	Objectives	13
	Audience	13
	Conventions	14
	Information Symbols	14
	Related Documents	14
2	CLI Basics	17
	Accessing the Command Line	17
	Multiple Configuration Users	18
	Navigating the Command Line Interface	18
	Obtaining Help	19
	Using the Keyword No	21
	Filtering show Commands	21
	Displaying All Output	22
	Filtering Command Output Multiple Times	22
	Command Modes	23
	EXEC Mode	23
	EXEC Privilege Mode	23
	CONFIGURATION Mode	23
	INTERFACE Mode	23
	LINE Mode	24
	TRACE-LIST Mode	24
	MAC ACCESS LIST Mode	25
	IP ACCESS LIST Mode	25
	ROUTE-MAP Mode	25
	PREFIX-LIST Mode	26
	AS-PATH ACL Mode	26
	IP COMMUNITY LIST Mode	26
	REDIRECT-LIST Mode	26
	SPANNING TREE Mode	27
	Per-VLAN SPANNING TREE Plus Mode	27
	RAPID SPANNING TREE Mode	27
	MULTIPLE SPANNING TREE Mode	28
	PROTOCOL GVRP Mode	28
	ROUTER OSPF Mode	28
	ROUTER RIP Mode	28
	ROUTER ISIS Mode	29
	ROUTER BGP Mode	29
	VLT DOMAIN Mode	29
	Determining the Chassis Mode	30
3	File Management	31
	Overview	31
	Basic File Management Commands	31

	Upgrading the C-Series FPGA	64
4	Control and Monitoring	67
	Overview	67
	Commands	67
5	802.1ag	155
	Overview	155
	Commands	155
6	802.1X	169
	Important Points to Remember	170
7	Access Control Lists (ACL)	187
	Overview	187
	Commands Common to all ACL Types	187
	Common IP ACL Commands	190
	Standard IP ACL Commands	195
	Extended IP ACL Commands	203
	Common MAC Access List Commands	238
	Standard MAC ACL Commands	241
	Extended MAC ACL Commands	246
	IP Prefix List Commands	252
	Route Map Commands	258
	AS-Path Commands	278
	IP Community List Commands	281
8	Bidirectional Forwarding Detection (BFD)	287
	Overview	287
	Commands	287
9	Border Gateway Protocol IPv4 (BGPv4)	303
	Overview	303
	BGPv4 Commands	304
	MBGP Commands	395
	BGP Extended Communities (RFC 4360)	421
10	Bare Metal Provisioning	431
	Overview	431
	Commands	431

11	Content Addressable Memory (CAM)	435
	Overview	435
	CAM Profile Commands	435
	Important Points to Remember	436
	CAM IPv4flow Commands	449
	CAM Layer 2 ACL Commands	452
12	Control Plane Policing (CoPP)	457
	Overview	457
	Commands	457
13	Data Center Bridging	463
	Overview	463
	DCB and Switch Stacking Caveats for the S4820T	463
	DCB Command	463
	PFC Commands	463
	ETS Commands	465
	DCBX Commands	465
14	Dynamic Host Configuration Protocol (DHCP)	499
	Overview	499
	Commands to Configure the System to be a DHCP Server	499
	Commands to Configure Secure DHCP	507
15	Equal Cost Multi-Path	515
	Overview	515
	Commands	515
16	FIPS Cryptography	525
	Overview	525
	FIPS	525
17	FIP Snooping	531
	Overview	531
	FIP	531
18	Force10 Resilient Ring Protocol (FRRP)	543
	Overview	543
	Commands	543
	Important Points to Remember	543

19	GARP VLAN Registration (GVRP)	553
	Overview	553
	Commands	553
	Important Points to Remember	554
20	High Availability (HA)	565
	Overview	565
	Commands	565
21	ICMP Message Types	577
22	Internet Group Management Protocol (IGMP)	579
	Overview	579
	IGMP Commands	579
	Important Points to Remember	579
	IGMP Snooping Commands	592
	Important Points to Remember for IGMP Snooping	592
	Important Points to Remember for IGMP Querier	593
23	Interfaces	599
	Overview	599
	Basic Interface Commands	599
	Port Channel Commands	659
	Time Domain Reflectometer (TDR)	670
	Important Points to Remember	671
	UDP Broadcast	673
	Important Points to Remember	673
24	IPv4 Routing	677
	Overview	677
	Commands	677
25	IPv6 Access Control Lists (IPv6 ACLs)	737
	Overview	737
	Important Points to Remember	737
	IPv6 ACL Commands	738
	IPv6 Route Map Commands	765
26	IPv6 Basics	771
	Overview	771
	Commands	771

27 IPv6 Border Gateway Protocol (IPv6 BGP)	793
Overview	793
IPv6 BGP Commands	793
IPv6 MBGP Commands	865
28 iSCSI Optimization	893
Overview	893
29 Intermediate System to Intermediate System (IS-IS)	901
Overview	901
Commands	901
30 Link Aggregation Control Protocol (LACP)	951
Overview	951
Commands	951
31 Layer 2	959
Overview	959
MAC Addressing Commands	959
Virtual LAN (VLAN) Commands	981
Far-End Failure Detection (FEFD)	992
Overview	992
Commands	992
32 Link Layer Discovery Protocol (LLDP)	1001
Overview	1001
Commands	1001
LLDP-MED Commands	1011
33 Multicast Source Discovery Protocol (MSDP)	1021
Overview	1021
Commands	1021
34 Multiple Spanning Tree Protocol (MSTP)	1033
Overview	1033
Commands	1033
35 Multicast	1049
Overview	1049
IPv4 Multicast Commands	1049
IPv6 Multicast Commands	1059

36 Neighbor Discovery Protocol (NDP)	1067
Overview	1067
Commands	1067
37 Open Shortest Path First (OSPFv2)	1075
Overview	1075
OSPFv2 Commands	1075
38 PIM-Sparse Mode (PIM-SM)	1139
Overview	1139
IPv4 PIM-Sparse Mode Commands	1139
IPv6 PIM-Sparse Mode Commands	1163
39 Port Monitoring	1177
Overview	1177
Commands	1177
Important Points to Remember	1177
40 Private VLAN (PVLAN)	1183
Overview	1183
Commands	1183
Private VLAN Concepts	1183
41 Per-VLAN Spanning Tree Plus (PVST+)	1193
Overview	1193
Commands	1193
42 Quality of Service (QoS)	1207
Overview	1207
Global Configuration Commands	1207
Per-Port QoS Commands	1208
Policy-Based QoS Commands	1218
Important Points to Remember — multicast-bandwidth option	1234
Queue-Level Debugging	1258
43 Routing Information Protocol (RIP)	1269
Overview	1269
Commands	1269
44 Remote Monitoring (RMON)	1291
Overview	1291

Commands	1291
45 Rapid Spanning Tree Protocol (RSTP)	1305
Overview	1305
Commands	1305
46 Security	1317
Overview	1317
Commands	1317
AAA Accounting Commands	1318
Authorization and Privilege Commands	1321
Authentication and Password Commands	1325
RADIUS Commands	1339
TACACS+ Commands	1346
Port Authentication (802.1X) Commands	1349
Important Points to Remember	1350
SSH Server and SCP Commands	1360
Trace List Commands	1375
Secure DHCP Commands	1385
47 Service Provider Bridging	1391
Overview	1391
Commands	1391
Important Points to Remember	1391
48 sFlow	1397
Overview	1397
Important Points to Remember	1397
Commands	1398
49 Simple Network Management Protocol and Syslog	1409
Overview	1409
SNMP Commands	1409
Important Points to Remember	1410
Syslog Commands	1428
50 S-Series Stacking Commands	1443
Overview	1443
Switch Stacking an DCB Caveats for the S4820T	1443
Commands	1444

51 Storm Control	1453
Overview	1453
Commands	1453
Important Points to Remember	1453
52 Spanning Tree Protocol (STP)	1463
Overview	1463
Commands	1463
53 System Time and Date	1475
Overview	1475
Commands	1475
54 S4810 and S4820T u-Boot	1493
Overview	1493
Commands	1493
55 Uplink Failure Detection (UFD)	1497
Overview	1497
Commands	1497
56 VLAN Stacking	1507
Overview	1507
Commands	1507
Important Points to Remember	1507
57 Virtual Link Trunking (VLT)	1519
Overview	1519
Commands	1519
58 Virtual Router Redundancy Protocol (VRRP)	1533
Overview	1533
IPv4 VRRP Commands	1533
IPv6 VRRP Commands	1546
59 S-Series Debugging and Diagnostics	1553
Offline Diagnostic Commands	1553
Important Points to Remember	1553
Buffer Tuning Commands	1556
Hardware Commands	1561

60 SNMP Traps1573

About this Guide

This book provides information on the FTOS Command Line Interface (CLI). It includes some information on the protocols and features found in FTOS and on the Dell Force10 systems supported by FTOS (C-Series **C**, E-Series **E**, and S-Series **S**).

This chapter includes:

- [Objectives](#)
- [Audience](#)
- [Conventions](#)
- [Related Documents](#)

Objectives

This document is intended as a reference guide for the FTOS command line interface (CLI) commands, with detailed syntax statements, along with usage information and sample output.

For details on when to use the commands, refer to the *FTOS Configuration Guide*. That guide contains a chapter with a list of the RFCs and MIBs (management information base files) supported.

Audience

This document is intended for system administrators who are responsible for configuring or maintaining networks. This guide assumes you are knowledgeable in Layer 2 and Layer 3 networking technologies.

Conventions









This document uses the following conventions to describe command syntax:

Convention	Description
keyword	Keywords are in bold and should be entered in the CLI as listed.
<i>parameter</i>	Parameters are in italics and require a number or word to be entered in the CLI.
{X}	Keywords and parameters within braces must be entered in the CLI.
[X]	Keywords and parameters within brackets are optional.
x y	Keywords and parameters separated by bar require you to choose one.
x y	Keywords and parameters separated by a double bar enables you to choose any or all of them.

Information Symbols

[Table 1-1](#) describes symbols contained in this guide.

Table 1-1. Information Symbols

Symbol	Brief	Description
	Note	This symbol signals important operational information.
	Caution	This symbol signals information about situations that could result in equipment damage or loss of data.
	Warning	This symbol signals information about hardware handling that could result in injury.
	C-Series	This symbol indicates that the selected feature is supported on the C-Series.
	E-Series	This symbol indicates that the selected feature is supported on the E-Series TeraScale AND E-Series ExaScale.
	E-Series TeraScale	This symbol indicates that the selected feature is supported on the E-Series TeraScale platform only.
	E-Series ExaScale	This symbol indicates that the selected feature is supported on the E-Series ExaScale platform only.
	S-Series	This symbol indicates that the selected feature is supported on the S-Series.

Related Documents

For more information about the system, refer to the following documents:

- *FTOS Configuration Guide*
- Installation and maintenance guides for your system
- *Release Notes* for your system and FTOS version

CLI Basics

This chapter describes the command structure and command modes. FTOS commands are in a text-based interface that allows you to use launch commands, change the command modes, and configure interfaces and protocols.

This chapter covers the following topics:

- [Accessing the Command Line](#)
- [Multiple Configuration Users](#)
- [Navigating the Command Line Interface](#)
- [Obtaining Help](#)
- [Using the Keyword No](#)
- [Filtering show Commands](#)
- [Command Modes](#)

Accessing the Command Line

When the system boots successfully, you are positioned on the command line in the EXEC mode and *not* prompted to log in. You can access the commands through a serial console port or a Telnet session. When you Telnet into the switch, you are prompted to enter a login name and password.

The following text is an example of a successful Telnet login session.

```
telnet 172.31.1.53
Trying 172.31.1.53...
Connected to 172.31.1.53.
Escape character is '^]'.
Login: username
Password: FTOS>
```

Once you log into the switch, the prompt provides you with current command-level information (refer to [Table 2-1](#)).

Multiple Configuration Users

When a user enters the CONFIGURATION mode and another user(s) is already in that configuration mode, FTOS generates an alert warning message similar to the following:

```
FTOS#conf

% Warning: The following users are currently configuring the system:

User "" on line console0
User "admin" on line vty0 ( 123.12.1.123 )
User "admin" on line vty1 ( 123.12.1.123 )
User "Irene" on line vty3 ( 123.12.1.321 )
FTOS#conf
```

When another user enters the CONFIGURATION mode, FTOS sends a message similar to the following, where the user in this case is “admin” on vty2:

```
% Warning: User "admin" on line vty2 "172.16.1.210" is in configuration
```

Navigating the Command Line Interface

The Command Line Interface (CLI) prompt displayed by FTOS is comprised of:

- “hostname”— the initial part of the prompt, “FTOS” by default. You can change it with the `hostname` command, as described in [hostname](#).
- The second part of the prompt, reflecting the current CLI mode, as shown in [Table 2-1](#).

The CLI prompt changes as you move up and down the levels of the command structure. [Table 2-1](#) lists the prompts and their corresponding command levels, called *modes*. Starting with the CONFIGURATION mode, the command prompt adds modifiers to further identify the mode. The command modes are explained in [Command Modes](#).



Note: Some of the following modes are not available on C-Series or S-Series.

Table 2-1. Command Prompt and Corresponding Command Mode

Prompt	CLI Command Mode
FTOS>	EXEC
FTOS#	EXEC Privilege
FTOS(conf)#	CONFIGURATION

Table 2-1. Command Prompt and Corresponding Command Mode

Prompt	CLI Command Mode
FTOS(conf-if)# FTOS(conf-if-gi-0/0)# FTOS(conf-if-te-0/0)# FTOS(conf-if-fo-0/0)# FTOS(conf-if-lo-0)# FTOS(conf-if-nu-0)# FTOS(conf-if-po-0)# FTOS(conf-if-vl-0)# FTOS(conf-if-so-0/0)# FTOS(conf-if-ma-0/0)# FTOS(conf-if-range)#	INTERFACE
FTOS(config-ext-nacl)# FTOS(config-std-nacl)#	IP ACCESS LIST
FTOS(config-line-aux)# FTOS(config-line-console)# FTOS(config-line-vty)#	LINE
FTOS(config-ext-macl)# FTOS(config-std-macl)#	MAC ACCESS LIST
FTOS(config-mon-sess)#	MONITOR SESSION
FTOS(config-span)#	STP
FTOS(config-mstp)#	MULTIPLE SPANNING TREE
FTOS(config-pvst)#	Per-VLAN SPANNING TREE Plus
FTOS(config-rstp)#	RAPID SPANNING TREE
FTOS(config-gvrp)#	PROTOCOL GVRP
FTOS(config-route-map)#	ROUTE-MAP
FTOS(conf-nprefixl)#	PREFIX-LIST
FTOS(conf-router_rip)#	ROUTER RIP
FTOS(conf-redirect-list)#	REDIRECT
FTOS(conf-router_bgp)#	ROUTER BGP
FTOS(conf-router_ospf)#	ROUTER OSPF
FTOS(conf-router_isis)#	ROUTER ISIS
FTOS(conf-trace-acl)#	TRACE-LIST
FTOS(config-vlt-domain)	VLT DOMAIN

Obtaining Help

As soon as you are in a command mode there are several ways to access help.

- To obtain a list of keywords at any command mode, do the following:

- Enter a ? at the prompt or after a keyword. There must always be a space before the ?.
- To obtain a list of keywords with a brief functional description, do the following:
 - Enter help at the prompt.
- To obtain a list of available options, do the following:
 - Type a keyword followed by a space and a ?
- Type a partial keyword followed by a ?
 - A display of keywords beginning with the partial keyword is listed.

The following text illustrates the results of entering ip ? at the prompt.

```

FTOS(conf)#ip ?
access-list          Named access-list
as-path              BGP autonomous system path filter
community-list      Add a community list entry
domain-list          Domain name to complete unqualified host name
domain-lookup        Enable IP Domain Name System hostname translation
domain-name          Define the default domain name
fib                  FIB configuration commands
ftp                  FTP configuration commands
host                 Add an entry to the ip hostname table
max-frag-count        Max. fragmented packets allowed in IP re-assembly
multicast-routing    Enable IP multicast forwarding
name-server          Specify address of name server to use
pim                  Protocol Independent Multicast
prefix-list           Build a prefix list
radius               Interface configuration for RADIUS
redirect-list        Named redirect-list
route                 Establish static routes
scp                  SCP configuration commands
source-route         Process packets with source routing header options
ssh                  SSH configuration commands
tacacs               Interface configuration for TACACS+
telnet               Specify telnet options
tftp                 TFTP configuration commands
trace-group          Named trace-list
trace-list           Named trace-list
FTOS(conf)#ip

```

When entering commands, you can take advantage of the following timesaving features:

- The commands are not case sensitive.
- You can enter partial (truncated) command keywords. For example, you can enter **int gig int** *interface* for the **interface gigabitethernet** *interface* command.
- Use the **TAB** key to complete keywords in commands.
- Use the **up arrow** key to display the last enabled command.
- Use either the **Backspace** key or the **Delete** key to erase the previous character.

Use the **left** and **right arrow** keys to navigate left or right in the FTOS command line. [Table 2-2](#) defines the key combinations valid at the FTOS command line.

Table 2-2. Short-cut Keys and their Actions

Key Combination	Action
CNTL-A	Moves the cursor to the beginning of the command line.
CNTL-B	Moves the cursor back one character.
CNTL-D	Deletes character at cursor.
CNTL-E	Moves the cursor to the end of the line.
CNTL-F	Moves the cursor forward one character.
CNTL-I	Completes a keyword.
CNTL-K	Deletes all characters from the cursor to the end of the command line.
CNTL-L	Re-enters the previous command.
CNTL-N	Return to more recent commands in the history buffer after recalling commands with Ctrl-P or the up arrow key
CNTL-P	Recalls commands, beginning with the last command
CNTL-R	Re-enters the previous command.
CNTL-U	Deletes the line.
CNTL-W	Deletes the previous word.
CNTL-X	Deletes the line.
CNTL-Z	Ends continuous scrolling of command outputs.
Esc B	Moves the cursor back one word.
Esc F	Moves the cursor forward one word.
Esc D	Deletes all characters from the cursor to the end of the word.

Using the Keyword No

To disable, delete, or return to default values, use the no form of the commands. For most commands, if you type the keyword no in front of the command, you will disable that command or delete it from the running configuration. In this document, the no form of the command is discussed in the Command Syntax portion of the command description.

Filtering show Commands

You can filter the display output of a show command to find specific information, to display certain information only, or to begin the command output at the first instance of a regular expression or phrase.

When you execute a show command, followed by a pipe (|) and one of the parameters listed below and a regular expression, the resulting output either excludes or includes those parameters, as defined by the parameter:

- display — display additional configuration information
- except— display only text that does not match the pattern (or regular expression)
- find — search for the first occurrence of a pattern
- grep — display text that matches a pattern
- no-more — do not paginate the display output
- save — copy output to a file for future use



Note: FTOS accepts a space before or after the pipe, no space before or after the pipe, or any combination. For example:

```
FTOS#command | grep gigabit |except regular-expression | find
regular-expression
```

The grep command option has an ignore-case sub-option that makes the search case-insensitive. For example, the commands:

- show run | grep Ethernet would return a search result with instances containing a capitalized “Ethernet,” such as interface GigabitEthernet 0/0.
- show run | grep ethernet would not return the search result, above, because it only searches for instances containing a non-capitalized “ethernet.”

Executing the command show run | grep Ethernet ignore-case would return instances containing both “Ethernet” and “ethernet.”

Displaying All Output

To display the output all at once (not one screen at a time), use the no-more after the pipe. This is similar to the terminal length *screen-length* command except that the no-more option affects the output of just the specified command. For example:

```
FTOS#show running-config|no-more
```

Filtering Command Output Multiple Times

You can filter a single command output multiple times. Place the save option as the last filter. For example:

```
FTOS# command | grep regular-expression | except regular-expression | grep
other-regular-expression | find regular-expression | no-more | save
```

Command Modes

To navigate to various CLI modes, you need to use specific commands to launch each mode. Navigation to these modes is discussed in the following sections.



Note: Some of the following modes are not available on C-Series or S-Series.

EXEC Mode

When you initially log in to the switch, by default, you are logged into the EXEC mode. This mode allows you to view settings and to enter the EXEC Privilege mode to configure the device. While you are in the EXEC mode, the > prompt is displayed following the “hostname” prompt, as described above, which is “FTOS” by default. You can change it with the hostname command. Refer to the command [hostname](#). Each mode prompt is preceded by the hostname.

EXEC Privilege Mode

The enable command accesses the EXEC Privilege mode. If an administrator has configured an “Enable” password, you will be prompted to enter it here.

The EXEC Privilege mode allows you to access all commands accessible in EXEC mode, plus other commands, such as to clear ARP entries and IP addresses. In addition, you can access the CONFIGURATION mode to configure interfaces, routes, and protocols on the switch. While you are logged in to the EXEC Privilege mode, the # prompt is displayed.

CONFIGURATION Mode

In the EXEC Privilege mode, use the configure command to enter the CONFIGURATION mode and configure routing protocols and access interfaces.

To enter the CONFIGURATION mode:

1. Verify that you are logged in to the EXEC Privilege mode.
2. Enter the configure command. The prompt changes to include (conf).

From this mode, you can enter INTERFACE by using the interface command.

INTERFACE Mode

Use the INTERFACE mode to configure interfaces or IP services on those interfaces. An interface can be physical (for example, a Gigabit Ethernet port) or virtual (for example, the Null interface).

To enter INTERFACE mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the interface command followed by an interface type and interface number that is available on the switch.
3. The prompt changes to include the designated interface and slot/port number, as outlined in [Table 2-3](#).

Table 2-3. Interface prompts

Prompt	Interface Type
FTOS(conf-if)#	INTERFACE mode
FTOS(conf-if-gi-0/0)#	Gigabit Ethernet interface followed by slot/port information
FTOS(conf-if-te-0/0)#	Ten Gigabit Ethernet interface followed by slot/port information
FTOS(conf-if-fo-0/0)#	Forty Gigabit Ethernet interface followed by slot/port information
FTOS(conf-if-lo-0)#	Loopback interface number.
FTOS(conf-if-nu-0)#	Null Interface followed by zero
FTOS(conf-if-po-0)#	Port-channel interface number
FTOS(conf-if-vl-0)#	VLAN Interface followed by VLAN number (range 1 to 4094)
FTOS(conf-if-so-0/0)#	SONET interface followed by slot/port information.
FTOS(conf-if-ma-0/0)#	Management Ethernet interface followed by slot/port information
FTOS(conf-if-range)#	Designated interface range (used for bulk configuration; refer to interface range).

LINE Mode

Use the LINE mode to configure console or virtual terminal parameters.

To enter LINE mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Enter the line command. You must include the keywords console or vty and their line number available on the switch. The prompt changes to include (config-line-console) or (config-line-vty).

You can exit this mode by using the exit command.

TRACE-LIST Mode

When in the CONFIGURATION mode, use the trace-list command to enter the TRACE-LIST mode and configure a Trace list.

1. Verify that you are logged in to the CONFIGURATION mode.
2. Enter the ip trace-list command. You must include the name of the Trace list. The prompt change to include (conf-trace-acl).

You can exit this mode by using the exit command.

MAC ACCESS LIST Mode

While in the CONFIGURATION mode, use the `mac access-list standard` or `mac access-list extended` command to enter the MAC ACCESS LIST mode and configure either standard or extended access control lists (ACL).

To enter MAC ACCESS LIST mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Use the `mac access-list standard` or `mac access-list extended` command. You must include a name for the ACL. The prompt changes to include `(conf-std-macl)` or `(conf-ext-macl)`.

You can return to the CONFIGURATION mode by entering the exit command.

IP ACCESS LIST Mode

While in the CONFIGURATION mode, use the `ip access-list standard` or `ip access-list extended` command to enter the IP ACCESS LIST mode and configure either standard or extended access control lists (ACL).

To enter IP ACCESS LIST mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Use the `ip access-list standard` or `ip access-list extended` command. You must include a name for the ACL. The prompt changes to include `(conf-std-nacl)` or `(conf-ext-nacl)`.

You can return to the CONFIGURATION mode by entering the exit command.

ROUTE-MAP Mode

While in the CONFIGURATION mode, use the `route-map` command to enter the ROUTE-MAP mode and configure a route map.

To enter ROUTE-MAP mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Use the `route-map map-name [permit | deny] [sequence-number]` command. The prompt changes to include `(route-map)`.

You can return to the CONFIGURATION mode by entering the exit command.

PREFIX-LIST Mode

While in the CONFIGURATION mode, use the `ip prefix-list` command to enter the PREFIX-LIST mode and configure a prefix list.

To enter PREFIX-LIST mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Enter the `ip prefix-list` command. You must include a name for the prefix list. The prompt changes to include `(conf-nprefixl)`.

You can return to the CONFIGURATION mode by entering the `exit` command.

AS-PATH ACL Mode

Use the AS-PATH ACL mode to configure an AS-PATH Access Control List (ACL) on the E-Series. Refer to [Chapter 7, Access Control Lists \(ACL\)](#).

To enter AS-PATH ACL mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Enter the `ip as-path access-list` command. You must include a name for the AS-PATH ACL. The prompt changes to include `(config-as-path)`.

You can return to the CONFIGURATION mode by entering the `exit` command.

IP COMMUNITY LIST Mode

Use the IP COMMUNITY LIST mode to configure an IP Community ACL on the E-Series. Refer to [Chapter 7, Access Control Lists \(ACL\)](#).

To enter IP COMMUNITY LIST mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Enter the `ip community-list` command. You must include a name for the Community list. The prompt changes to include `(config-community-list)`.

You can return to the CONFIGURATION mode by entering the `exit` command.

REDIRECT-LIST Mode

Use the REDIRECT-LIST mode to configure a Redirect list on the E-Series, as described in the E-Series *FTOS Command Line Reference Guide* [Chapter 39, Policy-based Routing \(PBR\)](#).

To enter REDIRECT-LIST mode:

1. Verify that you are logged in to the CONFIGURATION mode.
2. Use the `ip redirect-list` command. You must include a name for the Redirect-list. The prompt changes to include `(conf-redirect-list)`.

You can return to the CONFIGURATION mode by entering the `exit` command.

SPANNING TREE Mode

Use the STP mode to enable and configure the Spanning Tree protocol, as described in [Chapter 52, Spanning Tree Protocol \(STP\)](#).

To enter STP mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the protocol spanning-tree `stp-id` command.

You can return to the CONFIGURATION mode by entering the `exit` command.

Per-VLAN SPANNING TREE Plus Mode

Use PVST+ mode to enable and configure the Per-VLAN Spanning Tree (PVST+) protocol, as described in [Chapter 41, Per-VLAN Spanning Tree Plus \(PVST+\)](#).



Note: The protocol is PVST+, but the plus sign is dropped at the CLI prompt

To enter PVST+ mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the protocol spanning-tree `pvst` command.

You can return to the CONFIGURATION mode by entering the `exit` command.

RAPID SPANNING TREE Mode

Use PVST+ mode to enable and configure the RSTP protocol, as described in [Chapter 45, Rapid Spanning Tree Protocol \(RSTP\)](#).

To enter RSTP mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the protocol spanning-tree `rstp` command.

You can return to the CONFIGURATION mode by entering the `exit` command.

MULTIPLE SPANNING TREE Mode

Use MULTIPLE SPANNING TREE mode to enable and configure the Multiple Spanning Tree protocol, as described in [Chapter 34, Multiple Spanning Tree Protocol \(MSTP\)](#).

To enter MULTIPLE SPANNING TREE mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the protocol spanning-tree mstp command.

You can return to the CONFIGURATION mode by entering the exit command.

PROTOCOL GVRP Mode

Use the PROTOCOL GVRP mode to enable and configure GARP VLAN Registration Protocol (GVRP), as described in [Chapter 19, GARP VLAN Registration \(GVRP\)](#).

To enter PROTOCOL GVRP mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the protocol gvrp command syntax.

You can return to the CONFIGURATION mode by entering the exit command.

ROUTER OSPF Mode

Use the ROUTER OSPF mode to configure OSPF, as described in [Chapter 37, Open Shortest Path First \(OSPFv2\)](#).

To enter ROUTER OSPF mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Use the router ospf {*process-id*} command. The prompt changes to include (conf-router_ospf-id).

You can switch to the INTERFACE mode by using the interface command or you can switch to the ROUTER RIP mode by using the router rip command.

ROUTER RIP Mode

Use the ROUTER RIP mode to configure RIP on the C-Series or E-Series, as described in [Chapter 43, Routing Information Protocol \(RIP\)](#).

To enter ROUTER RIP mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the router rip command. The prompt changes to include (conf-router_rip).

You can switch to the INTERFACE mode by using the interface command or you can switch to the ROUTER OSPF mode by using the router ospf command.

ROUTER ISIS Mode

Use the ROUTER ISIS mode to configure ISIS on the E-Series, as described in the E-Series E-Series *FTOS Command Line Reference Guide* chapter [Intermediate System to Intermediate System \(IS-IS\)](#).

To enter ROUTER ISIS mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the router isis [*tag*] command. The prompt changes to include (conf-router_isis).

You can switch to the INTERFACE mode by using the interface command or you can switch to the ROUTER RIP mode by using the router rip command.

ROUTER BGP Mode

Use the ROUTER BGP mode to configure BGP on the C-Series or E-Series, as described in [Chapter 9, Border Gateway Protocol IPv4 \(BGPv4\)](#).

To enter ROUTER BGP mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the router bgp *as-number* command. The prompt changes to include (conf-router_bgp).

You can return to the CONFIGURATION mode by entering the exit command.

VLT DOMAIN Mode

Use VLT DOMAIN mode to enable and configure the VLT domain protocol, as described in [Chapter 57, Virtual Link Trunking \(VLT\)](#).

To enter VLT DOMAIN mode:

1. Verify that you are logged into the CONFIGURATION mode.
2. Enter the config-vlt-domain command.

You can return to the CONFIGURATION mode by entering the exit command.

Determining the Chassis Mode

The chassis mode in FTOS determines which hardware is being supported in an E-Series chassis. The chassis mode is programmed into an EEPROM on the backplane of the chassis and the change takes place only after the chassis is rebooted. Configuring the appropriate chassis mode enables the system to use all the ports on the card and recognize all software features.

File Management

Overview

This chapter contains commands needed to manage the configuration files and includes other file management commands found in FTOS. The commands in this chapter are supported by FTOS on Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810** S4810, **S4820T** S4820T.

This chapter contains these sections:

- [Basic File Management Commands](#)
- [Upgrading the C-Series FPGA](#)

Basic File Management Commands

The commands included in this chapter are:

- [boot config](#)
- [boot host](#)
- [boot network](#)
- [boot system](#)
- [boot system gateway](#)
- [cd](#)
- [change bootflash-image](#)
- [copy](#)
- [copy \(Streamline Upgrade\)](#)
- [copy running-config startup-config](#)
- [delete](#)
- [dir](#)
- [download alt-boot-image](#)
- [download alt-full-image](#)
- [download alt-system-image](#)
- [format \(C-Series and E-Series\)](#)

- format flash (S-Series)
- format flash (Z9000)
- fsck flash (S-Series)
- logging coredump
- logging coredump server
- pwd
- rename
- boot system
- show bootvar
- show file
- show file-systems
- show linecard
- show os-version
- show running-config
- show startup-config
- show version
- upgrade (E-Series version)
- upgrade (C-Series version)
- upgrade (S-Series management unit and Z9000)
- upgrade fpga-image

boot config



Set the location and name of the configuration file that is loaded at system start-up (or reload) instead of the default startup-configuration.

Syntax

```
boot config { remote-first | rpm0 file-url | rpm1 file-url }
```

Parameters

remote-first	Enter the keywords <code>remote-first</code> to attempt to load the boot configuration files from a remote location.
rpm0	Enter the keywords <code>rpm0</code> first to specify the local boot configuration file for RPM 0.
rpm1	Enter the keywords <code>rpm1</code> first to specify the local boot configuration file for RPM 1.
<i>file-url</i>	Enter the location information: <ul style="list-style-type: none"> • For a file on the internal Flash, enter <code>flash://</code> followed by the filename. • For a file on the external Flash, enter <code>slot0://</code> followed by the filename.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

To display these changes in the `show bootvar` command output, you must save the running configuration to the startup configuration (`copy running-config startup-config` or `write`).....

Dell Force10 strongly recommends using local files for configuration (RPM0 or RPM1 flash or slot0).

When you specify a file as the boot config file, it is listed in the boot variables (bootvar) as LOCAL CONFIG FILE. If you do not specify a boot config file, then the startup-configuration is used, although the bootvar shows LOCAL CONFIG FILE = variable does not exist. When you specify a boot config file, the switch reloads with that config file, rather than the startup-config. Note that if you specify a local config file which is not present in the specified location, then the startup-configuration is loaded.

The write memory command always saves the running-configuration to the file labeled startup-configuration. When using a LOCAL CONFIG FILE other than the startup-config, use the copy command to save any running-configuration changes to that local file.

The following text is an example of output for `show bootvar` with *no* boot configuration:

```
FTOS#show bootvar
PRIMARY IMAGE FILE = flash://FTOS-EF-8.2.1.0.bin
SECONDARY IMAGE FILE = flash://FTOS-EF-7.6.1.0.bin
DEFAULT IMAGE FILE = flash://FTOS-EF-7.5.1.0.bin
LOCAL CONFIG FILE = variable does not exist
PRIMARY HOST CONFIG FILE = variable does not exist
SECONDARY HOST CONFIG FILE = variable does not exist
PRIMARY NETWORK CONFIG FILE = variable does not exist
SECONDARY NETWORK CONFIG FILE = variable does not exist
CURRENT IMAGE FILE = flash://FTOS-EF-8.2.1.0.bin
CURRENT CONFIG FILE 1 = flash://startup-config
CURRENT CONFIG FILE 2 = variable does not exist
CONFIG LOAD PREFERENCE = local first
BOOT INTERFACE GATEWAY IP ADDRESS = variable does not exist
```

The following text is an example of output for `show bootvar` with a boot configuration:

```
FTOS#show bootvar
PRIMARY IMAGE FILE = flash://FTOS-EF-8.2.1.0.bin
SECONDARY IMAGE FILE = flash://FTOS-EF-7.6.1.0.bin
DEFAULT IMAGE FILE = flash://FTOS-EF-7.5.1.0.bin
LOCAL CONFIG FILE = variable does not exist
PRIMARY HOST CONFIG FILE = variable does not exist
SECONDARY HOST CONFIG FILE = variable does not exist
PRIMARY NETWORK CONFIG FILE = variable does not exist
SECONDARY NETWORK CONFIG FILE = variable does not exist
CURRENT IMAGE FILE = flash://FTOS-EF-8.2.1.0.bin
CURRENT CONFIG FILE 1 = flash://CustomerA.cfg
CURRENT CONFIG FILE 2 = variable does not exist
CONFIG LOAD PREFERENCE = local first
BOOT INTERFACE GATEWAY IP ADDRESS = variable does not exist
```

**Related
Commands**

show bootvar	Display the variable settings for the E-Series boot parameters.
------------------------------	---

boot host



Set the location of the configuration file from a remote host.

Syntax`boot host {primary | secondary} remote-url`**Parameters**

<code>primary</code>	Enter the keywords <code>primary</code> to attempt to load the primary host configuration files.
<code>secondary</code>	Enter the keywords <code>secondary</code> to attempt to load the secondary host configuration files.
<code>remote-url</code>	Enter the following location keywords and information: <ul style="list-style-type: none"> For a file on an FTP server, enter <code>ftp://user:password@hostip/filepath</code> For a file on a TFTP server, enter <code>tftp://hostip/filepath</code>

Defaults

Not configured.

Command Modes

CONFIGURATION

**Command
History**

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

**Usage
Information**To display these changes in the [show bootvar](#) command output, you must save the running configuration to the startup configuration (using the [copy](#) command).**Related
Commands**

show bootvar	Display the variable settings for the E-Series boot parameters.
------------------------------	---

boot network



Set the location of the configuration file in a remote network.

Syntax`boot network {primary | secondary} remote-url`**Parameters**

<code>primary</code>	Enter the keywords <code>primary</code> to attempt to load the primary network configuration files.
<code>secondary</code>	Enter the keywords <code>secondary</code> to attempt to load the secondary network configuration files.
<code>remote-url</code>	Enter the following location keywords and information: <ul style="list-style-type: none"> For a file on an FTP server, enter <code>ftp://user:password@hostip/filepath</code> For a file on a TFTP server, enter <code>tftp://hostip/filepath</code>

Defaults

None

Command Modes	CONFIGURATION
Command History	Version 7.5.1.0 Introduced on C-Series E-Series original Command
Usage Information	To display these changes in the show bootvar command output, you must save the running configuration to the startup configuration (using the copy command).
Related Commands	show bootvar Display the variable settings for the E-Series boot parameters.

boot system



Tell the system where to access the FTOS image used to boot the system.

Syntax boot system { rpm0 | rpm1 } (default | primary | secondary) *file-url*

Parameters	rpm0	Enter the keyword rpm0 to configure boot parameters for RPM0.
	rpm1	Enter the keyword rpm1 to configure boot parameters for RPM1.
	default	After entering rpm0 or rpm1, enter the keyword default to specify the parameters to be used if those specified by primary or secondary fail. The default location should always be the internal flash device (flash:), so that you can be sure that a verified image is available there.
	primary	After entering rpm0 or rpm1, enter the keyword primary to configure the boot parameters used in the first attempt to boot FTOS.
	secondary	After entering rpm0 or rpm1, enter the keyword secondary to configure boot parameters used if the primary operating system boot selection is not available.
	<i>file-url</i>	To boot from a file: <ul style="list-style-type: none"> • on the internal Flash, enter flash:// followed by the filename. • on an FTP server, enter ftp://user:password@hostip/filepath • on the external Flash, enter slot0:// followed by the filename. • on a TFTP server, enter tftp://hostip/filepath

Defaults Not configured.

Command Modes	CONFIGURATION
Command History	Version 7.5.1.0 Introduced on C-Series E-Series original Command
Usage Information	To display these changes in the show bootvar command output, you must save the running configuration to the startup configuration (using the copy command) and reload system.

**Related
Commands**

change bootflash-image	Change the primary, secondary, or default boot image configuration.
boot system gateway	Specify the IP address of the default next-hop gateway for the management subnet.

boot system gateway

C **E**

Specify the IP address of the default next-hop gateway for the management subnet.

Syntax`boot system gateway ip-address`**Parameters**

<i>ip-address</i>	Enter an IP address in dotted decimal format.
-------------------	---

Command Modes

CONFIGURATION

**Usage
Information**

Saving the address to the startup configuration file preserves the address in NVRAM in case the startup configuration file is deleted.

**Command
History**

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

**Related
Commands**

change bootflash-image	Change the primary, secondary, or default boot image configuration.
--	---

cd

C **E** **S**

Change to a different working directory.

Syntax`cd directory`**Parameters**

<i>directory</i>	(OPTIONAL) Enter one of the following: <ul style="list-style-type: none"> flash: (internal Flash) or any sub-directory slot0: (external Flash) or any sub-directory (C-Series and E-Series only)
------------------	--

Command Modes

EXEC Privilege

**Command
History**

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

change bootflash-image

C **E**

Change boot flash image from which to boot.

Syntax`change bootflash-image { cp | linecard linecard-slot | rp }`

Parameters	cp	Enter the keyword <code>cp</code> to change the bootflash image on the Control Processor on the RPM.
	linecard <i>linecard-slot</i>	Enter the keyword <code>linecard</code> followed by the slot number to change the bootflash image on a specific line card. C-Series Range: 0-7 E-Series Range: 0 to 13 on the E1200; 0 on 6 on the E600, and 0 to 5 on the E300.
	rp	Enter the keyword <code>rp</code> to change the bootflash image on the RPM Route Processor.

Defaults Not configured.

Command Modes EXEC Privilege

Command History

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information A system message appears stating that the bootflash image has been changed. You must reload the system before the system can switch to the new bootflash image.



Copy one file to another location. FTOS supports IPv4 and IPv6 addressing for FTP, TFTP, and SCP (in the *hostip* field).

Syntax `copy source-file-url destination-file-url`

Parameters	<i>file-url</i>	Enter the following location keywords and information: <ul style="list-style-type: none"> To copy a file from the internal FLASH, enter <code>flash://</code> followed by the filename. To copy a file on an FTP server, enter <code>ftp://user:password@hostip/filepath</code> To copy a file from the internal FLASH on RPM0, enter <code>rpm0flash://filepath</code> To copy a file from the external FLASH on RPM0, enter <code>rpm0slot0://filepath</code> To copy a file from the internal FLASH on RPM1, enter <code>rpm1flash://filepath</code> To copy a file from the external FLASH on RPM1, enter <code>rpm1slot0://filepath</code> To copy the running configuration, enter the keyword <code>running-config</code>. To copy the startup configuration, enter the keyword <code>startup-config</code>. To copy using Secure Copy (SCP), enter the keyword <code>scp</code>: (If <code>scp</code>: is entered in the source position, then enter the target URL; If <code>scp</code>: is entered in the target position, first enter the source URL; refer to the examples below.) To copy a file on the external FLASH, enter <code>slot0://</code> followed by the filename. To copy a file on a TFTP server, enter <code>tftp://hostip/filepath</code> <p>ExaScale only</p> <ul style="list-style-type: none"> To copy a file from a USB drive on RPM0, enter <code>rpm0usbflash://filepath</code> To copy a file from an external USB drive, enter <code>usbflash://filepath</code>
-------------------	-----------------	---

Command Modes EXEC Privilege

Command History

Version 8.4.1.0	Added IPv6 addressing support for FTP, TFTP, and SCP.
Version 8.2.1.0	Added <code>usbflash</code> and <code>rpm0usbflash</code> commands on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series and added SSH port number to SCP prompt sequence on all systems.
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

FTOS supports a maximum of 100 files, at the root directory level, on both the internal and external Flash.

The `usbflash` and `rpm0usbflash` commands are supported on E-Series ExaScale platform only. Refer to the FTOS Release Notes for a list of approved USB vendors.

When copying a file to a remote location (for example, using Secure Copy (SCP)), enter only the keywords and FTOS prompts you for the rest of the information.

For example, when using SCP, you can enter `copy running-config scp:`
The `running-config` is the source, and the target is specified in the ensuing prompts. FTOS prompts you to enter any required information, as needed for the named destination—remote destination, destination filename, user ID and password, etc.

When you use the `copy running-config startup-config` command to copy the running configuration (the startup configuration file amended by any configuration changes made since the system was started) to the startup configuration file, FTOS creates a backup file on the internal flash of the startup configuration.

FTOS supports copying the running-configuration to a TFTP server or to an FTP server:

```
copy running-config tftp:
```

```
copy running-config ftp:
```

The following text is an example of the output when the running-configuration is copied:

```
FTOS#copy running-config scp:/
Address or name of remote host []: 10.10.10.1
Destination file name [startup-config]? old_running
User name to login remote host? *****
Password to login remote host? *****
```

In this example — `copy scp: flash:` — specifying SCP in the first position indicates that the target is to be specified in the ensuing prompts. Entering `flash:` in the second position means that the target is the internal Flash. In the following example, the source is on a secure server running SSH, so the user is prompted for the UDP port of the SSH server on the remote host.

```
FTOS#copy scp: flash:
Address or name of remote host []: 10.11.199.134
Port number of the server [22]: 99
```

```
Source file name []: test.cfg
User name to login remote host: admin
Password to login remote host:
Destination file name [test.cfg]: test1.cfg
```

**Related
Commands**

[cd](#)

Change working directory.

copy (Streamline Upgrade)



Copy a system image to a local file and update the boot profile.

Syntax

`copy source-url target-url [boot-image [synchronize-rpm [external]]]`

Parameters

<i>source-url</i>	Enter the source file in url format. The source file is a valid Dell Force10 release image. Image validation is automatic.
<i>target-url</i>	Enter the local target file in url format.
<i>boot-image</i>	Enter the keyword boot-image to designate this copy command as a streamline update.
<i>synchronize-rpm</i>	Enter the keyword synchronize-rpm to copy the new image file to the peer RPM.
<i>external</i>	Enter the keyword external to designate the target device on the peer RPM as external flash (instead of the default internal flash). Default: Internal Flash

Defaults

No default behavior

Command Modes

CONFIGURATION

**Command
History**

Version 8.4.1.0	Added IPv6 addressing support for FTP, TFTP, and SCP.
Version 7.5.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced

**Usage
Information**

In this streamline copy command, the source image is copied to the primary RPM and then, if specified, to the standby RPM. After the copy is complete, the new image file path on each RPM is automatically configured as the primary image path for the next boot. The current system image (the one from which the RPM booted) is automatically configured as the secondary image path.

FTOS supports IPv4 and IPv6 addressing for FTP, TFTP, and SCP.



Note: The keywords **boot-image**, **synchronize-rpm**, and **external** can be used on the Primary RPM only.

copy running-config startup-config

C **E**

Copy running configuration to the startup configuration.

Syntax

copy running-config startup-config *{duplicate}*

Command Modes

EXEC Privilege

Command History

Version 7.5.1.0 Introduced on C-Series

Version 6.3.1.0 Introduced

Usage Information

This command is useful for quickly making a changed configuration on one chassis available on external flash in order to move it to another chassis.

When you use the copy running-config startup-config duplicate command to copy the running configuration to the startup configuration, FTOS creates a backup file on the internal flash of the startup configuration.

delete

C **E** **S**

Delete a file from the flash. Once deleted, files cannot be restored.

Syntax

delete *flash-url* [no-confirm]

Parameters

<i>flash-url</i>	Enter the following location and keywords: <ul style="list-style-type: none"> For a file or directory on the internal Flash, enter <code>flash://</code> followed by the filename or directory name. For a file or directory on the external Flash, enter <code>slot0://</code> followed by the filename or directory name.
no-confirm	(OPTIONAL) Enter the keyword <code>no-confirm</code> to specify that FTOS does not require user input for each file prior to deletion.

Command Modes

EXEC Privilege

Command History

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

dir

C **E** **S**

Display the files in a file system. The default is the current directory.

Syntax

dir [*filename* | *directory name:*]

Parameters	<i>filename</i> <i>directory name</i> : (OPTIONAL) Enter one of the following: <ul style="list-style-type: none"> For a file or directory on the internal Flash, enter <code>flash://</code> followed by the filename or directory name. For a file or directory on the external Flash, enter <code>slot0://</code> followed by the filename or directory name:
Command Modes	EXEC Privilege
Command History	<hr/> Version 7.6.1.0 Introduced on S-Series <hr/> Version 7.5.1.0 Introduced on C-Series <hr/> E-Series original Command <hr/>
Example	<pre>FTOS#dir Directory of flash: 1 -rwx 6478482 May 13 101 16:54:34 E1200.BIN flash: 64077824 bytes total (57454592 bytes free) FTOS#</pre>
Related Commands	<hr/> cd Change working directory. <hr/>

download alt-boot-image



Download an alternate boot image to the chassis.

Syntax `download alt-boot-image file-url`

Command Modes EXEC Privilege

Command History	<hr/> Version 7.7.1.0 Removed from E-Series and C-Series <hr/> Version 7.5.1.0 Introduced on C-Series <hr/> E-Series original Command <hr/>
------------------------	--

Usage Information Starting with FTOS 7.7.1.0, the functions of this command are incorporated into the upgrade command.

For software upgrade details, refer to the FTOS Release Notes.

Related Commands	<hr/> upgrade (E-Series version) Upgrade the bootflash or boot selector versions. <hr/> upgrade (C-Series version) Upgrade the bootflash or boot selector versions. <hr/>
-------------------------	---

download alt-full-image



Download an alternate FTOS image to the chassis.

Syntax	download alt-full-image <i>file-url</i>
Command Modes	EXEC Privilege
Command History	Version 7.7.1.0 Removed form E-Series
	Version 6.5.1.0 Introduced
Usage Information	Starting with FTOS 7.7.1.0, the functions of this command are incorporated into the upgrade command.
	For software upgrade details, refer to the FTOS Release Notes.
Related Commands	upgrade (E-Series version) Upgrade the bootflash or boot selector versions

download alt-system-image



Download an alternate system image (not the boot flash or boot selector image) to the chassis.

Syntax	download alt-system-image <i>file-url</i>
Command Modes	EXEC Privilege
Command History	Version 7.7.1.0 Removed from E-Series
	Version 6.5.1.0 Introduced
Usage Information	Starting with FTOS 7.7.1.0, the functions of this command are incorporated into the upgrade command.
	For software upgrade details, refer to the FTOS Release Notes.
Related Commands	upgrade (E-Series version) Upgrade the bootflash or boot selector versions

format (C-Series and E-Series)



Erase all existing files and reformat a file system. Once the file system is formatted, files cannot be restored.

Syntax	format <i>filesystem</i> : [dosFs1.0 dosFs2.0]
Parameters	<i>filesystem</i> : Enter one of the following: <ul style="list-style-type: none"> To reformat the internal Flash, enter flash: To reformat the external Flash, enter slot0:
	dosFs1.0 Enter the keyword dosFs1.0 to format in DOS 1.0 (the default)
	dosFs2.0 Enter the keyword dosFs2.0 to format in DOS 2.0

Default	DOS 1.0 (dosFs1.0)
Command Modes	EXEC Privilege
Command History	<hr/> Version 7.5.1.0 Introduced on C-Series <hr/> E-Series original Command <hr/>
Usage Information	<p>When you format flash:</p> <ol style="list-style-type: none"> 1. The startup-config is erased. 2. All cacheboot data files are erased and you must reconfigure cacheboot to regain it. 3. All generated SSH keys are erased and you must recreate them. 4. All archived configuration files are erased. 5. All trace logs, crash logs, core dumps, and call-home logs are erased. 6. In-service Process patches are erased. <p>After reformatting is complete, three empty directories are automatically created on flash: CRASH_LOG_DIR, TRACE_LOG_DIR and NVTRACE_LOG_DIR.</p> <p>Note: Version option is available on LC-ED-RPM only. LC-EE3-RPM, LC-EF-RPM, and LC-EF3-RPM supports DOS 2.0 only.</p>
Related Commands	<hr/> show file Display contents of a text file in the local filesystem. <hr/> show file-systems Display information about the file systems on the system. <hr/>

format flash (S-Series)

S **S4810**

S4820T

Erase all existing files and reformat the filesystem in the internal flash memory. Once the filesystem is formatted, files cannot be restored.

Syntax	format flash:
Default	flash memory
Command Modes	EXEC Privilege
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 7.8.1.0 Introduced on S-Series <hr/>
Usage Information	You must include the colon (:) when entering this command.

Caution: This command deletes all files, including the startup configuration file. After executing this command, consider saving the running config as the startup config (use the `write memory` command or `copy run start`).

Related Commands

copy	Copy the current configuration to either the startup-configuration file or the terminal.
show file	Display contents of a text file in the local filesystem.
show file-systems	Display information about the file systems on the system.

format flash (Z9000)



Erase all existing files and reformat the file system in the internal flash memory or the USB drive. Once the file system is formatted, files cannot be restored.

Syntax

`format [flash: | slot0: | usbflash:]`

Parameters

<code>flash: slot0: </code>	<code>flash:</code> Reformat the file system in the internal flash memory.
<code>usbflash:</code>	<code>slot0:</code> Reformat the file system in the external flash memory, i.e., SSD.
	<code>usbflash:</code> Reformat the file system in the usbflash.

Default

flash memory

Command Modes

EXEC Privilege

Command History

Version 8.3.11.1	Introduced on the Z9000
------------------	-------------------------

Usage Information

You must include the colon (:) when entering this command.

Caution: This command deletes all files, including the startup configuration file. So, after executing this command, consider saving the running config as the startup config (use the `write memory` command or `copy run start`).

fsck flash (S-Series)



Checks the flash file system for errors.

Syntax

`fsck flash:`
`fsck usbflash:`

Default

none

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
------------------	--------------------------

Usage Information

You must include the colon (:) when entering this command.


This command checks the specified flash memory for errors. If errors are found, the command will recommend that you format the flash.

Caution: If you elect to format the flash, all files, including the startup configuration file will be lost. If you do decide to format the specified flash, consider saving the running config as the startup config (use the write memory command or copy run start).

Related Commands

copy	Copy the current configuration to either the startup-configuration file or the terminal.
show file	Display contents of a text file in the local filesystem.
show file-systems	Display information about the file systems on the system.

logging coredump



Enable coredump.

Syntax

logging coredump {cp | linecard {*number* | all} | rps}

Parameters

cp	Enable coredump for the CP.
linecard	Enable coredump for a linecard.
rps	Enable coredump for RP 1 and 2.

Defaults

The kernel coredump is enabled by default for RP 1 and 2 on E-Series. The kernel coredump for CP and application coredump are disabled on all systems by default.

Command Modes

CONFIGURATION

Command History

Version 8.3.11.1	Introduced on the Z9000
Version 7.7.1.0	Restructured command to accommodate core dumps for CP. Introduced on C-Series and S-Series
Version 6.5.1.0	Application coredump naming convention enhanced to include application.
Version 6.1.1.0	Introduced

Usage Information

The Kernel core dump can be large and may take up to 5 to 30 minutes to upload. FTOS does not overwrite application core dumps so you should delete them as necessary to conserve space on the flash; if the flash is out of memory, the coredump is aborted. On the S-Series, if the FTP server is not reachable, the application coredump is aborted. FTOS completes the coredump process and wait until the upload is complete before rebooting the system.

Related Commands

logging coredump server	Designate a sever to upload kernel core-dumps.
---	--

logging coredump server



Designate a server to upload core dumps.

Syntax

logging coredump server { *ipv4-address* | *ipv6-address* } username *name* password [*type*] *password*

Parameters

<i>{ ipv4-address ipv6-address }</i>	Enter the server IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X).
<i>name</i>	Enter a username to access the target server.
<i>type</i>	Enter the password type: <ul style="list-style-type: none"> • Enter 0 to enter an unencrypted password. • Enter 7 to enter a password that has already been encrypted using a Type 7 hashing algorithm.
<i>password</i>	Enter a password to access the target server.

Defaults

Crash kernel files are uploaded to flash by default.

Command Modes

CONFIGURATION

Command History

Version 8.4.1.0	Added support for IPv6.
Version 7.7.1.0	Restructured command to accommodate core dumps for CP. Introduced on C-Series and S-Series.
Version 6.1.1.0	Introduced

Usage Information

Since flash space may be limited, using this command ensures your entire crash kernel files are uploaded successfully and completely. Only a single coredump server can be configured. Configuration of a new coredump server will over-write any previously configured server.



Note: You must disable [logging coredump](#) before you designate a new server destination for your core dumps.

Related Commands

logging coredump	Disable the kernel coredump
----------------------------------	-----------------------------

pwd



Display the current working directory.

Syntax

pwd

Command Modes

EXEC Privilege

Command History

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Example

```
FTOS#pwd
flash:
FTOS#
```

Related Commands

cd	Change directory.
--------------------	-------------------

rename

C **E** **S**

Rename a file in the local file system.

Syntax `rename url url`

Parameters

<i>url</i>	Enter the following keywords and a filename: <ul style="list-style-type: none">For a file on the internal Flash, enter <code>flash://</code> followed by the filename.For a file on the external Flash, enter <code>slot0://</code> followed by the filename.
------------	--

Command Modes EXEC Privilege

Command History

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

show boot system

C **E**

Displays information about boot images currently configured on the system.

Syntax `show boot system {all | linecard [slot | all] | rpm}`

Parameters

all	Enter this keyword to display boot image information for all linecards and RPMs.
linecard	Enter this keyword to display boot image information for the specified line card(s) on the system.
rpm	Enter this keyword to display boot image information for all RPMs on the system.

Defaults No default values or behavior

Command Modes EXEC
EXEC Privilege

Command History

Version 7.7.1.0	Introduced on C-Series and E-Series
-----------------	-------------------------------------

Example

```
FTOS#show bootvar
PRIMARY_IMAGE_FILE = ftp://box:password@10.31.1.205//home/5.3.1/5.3.1.0/
FTOS-ED-RPMI-5.3.1.0.bin
SECONDARY_IMAGE_FILE = variable does not exist
```

```

DEFAULT IMAGE FILE = flash://FTOS-ED-5.3.1.0.bin
LOCAL CONFIG FILE = variable does not exist
PRIMARY HOST CONFIG FILE = variable does not exist
SECONDARY HOST CONFIG FILE = variable does not exist
PRIMARY NETWORK CONFIG FILE = variable does not exist
SECONDARY NETWORK CONFIG FILE = variable does not exist
CURRENT IMAGE FILE = ftp://box:password@10.31.1.205//home/5.3.1/5.3.1.0/
FTOS-ED-RPMI-5.3.1.0.bin
CURRENT CONFIG FILE 1 = flash://startup-config
CURRENT CONFIG FILE 2 = variable does not exist
CONFIG LOAD PREFERENCE = local first
BOOT INTERFACE GATEWAY IP ADDRESS = variable does not exist
RELOAD MODE = normal-reload
FTOS#

```

show bootvar



Display the variable settings for the E-Series boot parameters.

Syntax

show bootvar

Command Modes

EXEC Privilege

Command History

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Example

```

FTOS#show bootvar
PRIMARY IMAGE FILE = ftp://box:password@10.31.1.205//home/5.3.1/5.3.1.0/
FTOS-ED-RPMI-5.3.1.0.bin
SECONDARY IMAGE FILE = variable does not exist
DEFAULT IMAGE FILE = flash://FTOS-ED-5.3.1.0.bin
LOCAL CONFIG FILE = variable does not exist
PRIMARY HOST CONFIG FILE = variable does not exist
SECONDARY HOST CONFIG FILE = variable does not exist
PRIMARY NETWORK CONFIG FILE = variable does not exist
SECONDARY NETWORK CONFIG FILE = variable does not exist
CURRENT IMAGE FILE = ftp://box:password@10.31.1.205//home/5.3.1/5.3.1.0/
FTOS-ED-RPMI-5.3.1.0.bin
CURRENT CONFIG FILE 1 = flash://startup-config
CURRENT CONFIG FILE 2 = variable does not exist
CONFIG LOAD PREFERENCE = local first
BOOT INTERFACE GATEWAY IP ADDRESS = variable does not exist
FTOS#

```

Related Commands

boot config	Set the location of configuration files on local devices.
boot host	Set the location of configuration files from the remote host.
boot network	Set the location of configuration files from a remote network.
boot system	Set the location of FTOS image files.
boot system gateway	Specify the IP address of the default next-hop gateway for the management subnet.

show file



Display contents of a text file in the local filesystem.

Syntax	show file <i>filesystem</i>	
Parameters	<i>filesystem</i>	Enter one of the following: <ul style="list-style-type: none"> • <i>flash</i>: for the internal Flash • <i>slot0</i>: for the external Flash
Command Modes	EXEC Privilege	
Command History	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	
Example	<pre> FTOS#show file flash://startup-config ! boot system rpm0 primary ftp://test.server@10.16.1.144//home/images/E1200_405-3.1.2b1.86.bin boot system rpm0 secondary flash://FTOS-ED-6.1.1.0.bin boot system rpm0 default ftp://:@/ ! redundancy auto-synchronize persistent-data redundancy primary rpm0 ! hostname E1200-20 ! enable password 7 94849d8482d5c3 ! username test password 7 93e1e7e2ef ! enable restricted 7 948a9d848cd5c3 ! protocol spanning-tree 0 bridge-priority 8192 rapid-root-failover enable ! interface GigabitEthernet 0/0 no ip address shutdown </pre>	
Related Commands	format (C-Series and E-Series)	Erase all existing files and reformat a filesystem on the E-Series or C-Series platform.
	format flash (S-Series)	Erase all existing files and reformat the filesystem in the internal flash memory on and S-Series.
	show file-systems	Display information about the file systems on the system.

show file-systems



Display information about the file systems on the system.

Syntax	show file-systems
Command Modes	EXEC Privilege

Command History

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Example

```

FTOS#show file-systems
      Size (b)      Free (b)      Feature      Type      Flags      Prefixes
63938560      51646464      dosFs2.0      MMC      rw      flash:
63938560      18092032      dosFs1.0      MMC      rw      slot0:
      -            -            -            network   rw      ftp:
      -            -            -            network   rw      tftp:
      -            -            -            network   rw      scp:
FTOS#

```

Table 3-1. show file-systems Command Output Fields

Field	Description
size(b)	Lists the size in bytes of the storage location. If the location is remote, no size is listed.
Free(b)	Lists the available size in bytes of the storage location. If the location is remote, no size is listed.
Feature	Displays the formatted DOS version of the device.
Type	Displays the type of storage. If the location is remote, the word <code>network</code> is listed.
Flags	Displays the access available to the storage location. The following letters indicate the level of access: <ul style="list-style-type: none"> r = read access w = write access
Prefixes	Displays the name of the storage location.

Related Commands

format (C-Series and E-Series)	Erase all existing files and reformat a filesystem.
format flash (S-Series)	Erase all existing files and reformat the filesystem in the internal flash memory.
show file	Display contents of a text file in the local filesystem.
show sfm	Display the current SFM status.

show linecard



View the current linecard status.

Syntaxshow linecard [*number* | all | boot-information]**Parameters**

<i>number</i>	Enter a number to view information on that linecard. Range: 0 to 6.
all	(OPTIONAL) Enter the keyword <code>all</code> to view a table with information on all present linecards.
boot-information	(OPTIONAL) Enter the keyword <code>boot-information</code> to view cache boot information of all line cards in table format.

Command Modes

EXEC Privilege

Command History

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Example

```

FTOS#show linecard boot-information

-- Line cards --
# Status CurType Serial      Booted   Next     Cache   Boot
  #         number    from     boot     boot     boot     flash
-----
0         -
1         -
2         -
3 online E48TF  FX000032632  4.7.7.171  4.7.7.171  A: invalid B: invalid  A: 2.3.2.1 [b] B: 2.3.2.1
4         -
5         -
6         -
FTOS#

```

show os-version



Display the release and software image version information of the image file specified or, optionally, the image loaded on the RPM (C-Series and E-Series only).

Syntaxshow os-version [*file-url*]**Parameters**

file-url (OPTIONAL) Enter the following location keywords and information:

- For a file on the internal Flash, enter `flash://` followed by the filename.
- For a file on an FTP server, enter `ftp://user:password@hostip/filepath`
- For a file on the external Flash, enter `slot0://` followed by the filename.
- For a file on a TFTP server, enter `tftp://hostip/filepath`

Note: ftp and tftp are the only S-Series options.

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Command History

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Usage Information**Note:** A filepath that contains a dot (.) is not supported.**Example (E-Series)**

```

FTOS#show os-version

RELEASE IMAGE INFORMATION :
-----
Platform      Version      Size      ReleaseTime
E-series: EF  7.5.1.0     27676168  Aug 15 2007 10:06:21

TARGET IMAGE INFORMATION :

```

**Example
(C-Series)**

```
-----
      Type           Version           Target           checksum
      runtime        7.5.1.0         control processor passed
      runtime        7.5.1.0         route processor  passed
      runtime        7.5.1.0         terascale linecard passed
      boot flash     2.4.1.1         control processor passed
      boot flash     2.4.1.1         route processor  passed
      boot flash     2.3.1.3         terascale linecard passed
      boot selector  2.4.1.1         control processor passed
      boot selector  2.4.1.1         route processor  passed
      boot selector  2.3.1.3         terascale linecard passed

```

FTOS#

FTOS#show os-version

RELEASE IMAGE INFORMATION :

```
-----
      Platform      Version      Size      ReleaseTime
      C-series: CB   7.5.1.0     23734363  Aug 18 2007 11:49:51

```

TARGET IMAGE INFORMATION :

```
-----
      Type           Version           Target           checksum
      runtime        7.5.1.0         control processor passed
      runtime        7.5.1.0         linecard         passed
      boot flash     2.7.0.1         control processor passed
      boot flash     1.0.0.40        linecard         passed
      boot selector  2.7.0.1         control processor passed
      boot selector  1.0.0.40        linecard         passed

```

FPGA IMAGE INFORMATION :

```
-----
      Card           Version      Release Date
      Primary RPM    4.1         May 02 2007
      Secondary RPM  4.1         May 02 2007
      LC0            3.2         May 02 2007
      LC5            3.2         May 02 2007
      LC6            2.2         May 02 2007

```

FTOS#

show running-config

C **E** **S**

Display the current configuration and display changes from the default values.

Syntax

show running-config [*entity*] [configured] [status]

Parameters

- entity* (OPTIONAL) Enter one of the keywords listed below to display that entity's current (non-default) configuration. Note that, if nothing is configured for that entity, nothing is displayed and the prompt returns:
- **aaa** for the current AAA configuration
 - **acl** for the current ACL configuration
 - **arp** for the current static ARP configuration
 - **as-path** for the current AS-path configuration
 - **bfd** for the current BFD configuration
 - **bgp** for the current BGP configuration
 - **boot** for the current boot configuration
 - **cam-profile** for the current CAM profile in the configuration.
 - **class-map** for the current class-map configuration
 - **community-list** for the current community-list configuration
 - **ecmp-group** for the current ECMP group configuration
 - **ethernet** for the current Ethernet CFM configuration
 - **fefd** for the current FEFD configuration
 - **ftp** for the current FTP configuration
 - **frmp** for the current FRRP configuration
 - **fvrp** for the current FVRP configuration
 - **gvrp** for the current GVRP configuration
 - **hardware-monitor** for hardware-monitor action-on-error settings
 - **host** for the current host configuration
 - **hypervisor** for the current hypervisor configuration
 - **igmp** for the current IGMP configuration
 - **interface** for the current interface configuration
 - **ip** for the current IP configuration
 - **isis** for the current ISIS configuration
 - **line** for the current line configuration
 - **lldp** for the current LLDP configuration
 - **load-balance** for the current port-channel load-balance configuration
 - **logging** for the current logging configuration

- **mac** for the current MAC ACL configuration
- **mac-address-table** for the current MAC configuration
- **management-route** for the current Management port forwarding configuration
- **mld** for the current MLD configuration
- **monitor** for the current Monitor configuration
- **mroute** for the current Mroutes configuration
- **msdp** for the current MSDP configuration
- **ntp** for the current NTP configuration
- **ospf** for the current OSPF configuration
- **pim** for the current PIM configuration
- **policy-map-input** for the current input policy map configuration
- **policy-map-output** for the current output policy map configuration
- **po-failover-group** for the current Port-channel failover-group configuration
- **prefix-list** for the current prefix-list configuration
- **privilege** for the current privilege configuration
- **qos-policy-input** for the current input qos policy configuration
- **qos-policy-output** for the current output qos policy configuration
- **radius** for the current RADIUS configuration
- **redirect-list** for the current redirect-list configuration
- **redundancy** for the current RPM redundancy configuration
- **resolve** for the current DNS configuration
- **rip** for the current RIP configuration
- **rmon** for the current RMON configuration
- **route-map** for the current route map configuration

- **sflow** for the current sFlow configuration
- **snmp** for the current SNMP configuration
- **spanning-tree** for the current spanning tree configuration
- **static** for the current static route configuration
- **status** for the file status information
- **tacacs+** for the current TACACS+ configuration
- **tftp** for the current TFTP configuration
- **trace-group** for the current trace-group configuration
- **trace-list** for the current trace-list configuration
- **uplink-state-group** for the uplink state group configuration
- **users** for the current users configuration
- **vlt** for the current VLT configuration
- **wred-profile** for the current wred-profile configuration

config (OPTIONAL) Enter the keyword configuration to display line card interfaces with non-default configurations only.

status (OPTIONAL) Enter the keyword status to display the checksum for the running configuration and the start-up configuration.

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0 Added hardware-monitor option

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

Version 7.4.1.0 Expanded to include last configuration change and start-up last updated (date and time) and who made the change

Version 6.5.4.0 Added status option

Example (partial)

```

FTOS#show running-config
Current Configuration ...
! Version 7.4.1.0
! Last configuration change at Tue Apr 10 17:43:38 2007 by admin
! Startup-config last updated at Thu Mar 29 02:35:08 2007 by default
!
boot system rpm0 primary flash://FTOS-EF-7.4.1.0.bin
boot system rpm0 secondary flash://FTOS-EF-6.3.1.2.bin
boot system rpm0 default flash://FTOS-EF-6.5.1.8.bin
!
...

```

Example

```

FTOS#show running-config status

running-config checksum 0xB4B9BF03
startup-config checksum 0x8803620F
FTOS#

```

Usage Information

The status option enables you to display the size and checksum of the running configuration and the startup configuration.

show sfm



View the current SFM status.

Syntax

show sfm [*number* [brief] | all]

Parameters

<i>number</i>	Enter a number to view information on that SFM. Range: 0 to 8.
all	(OPTIONAL) Enter the keyword all to view a table with information on all present SFMs.
brief	(OPTIONAL) Enter the keyword brief to view a list with SFM status. Note: The brief option is not available on C-Series.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Example (E-Series)

```

FTOS#show sfm

Switch Fabric State: up

-- SFM card 0 --
Status          : active
Card Type       : SFM - Switch Fabric Module
Up Time        : 37 min, 24 sec
Temperature     : 49C
Power Status    : PEM0: absent or down    PEM1: up
Serial Number   : 0018102
Part Number    : 7520012900 Rev 02
Vendor Id      : 02
Date Code      : 06182004
Country Code   : 01

```

**Example
(show sfm all)**

```

FTOS#show sfm all

Switch Fabric State:  up

--  Switch Fabric Modules  --
Slot  Status
-----
0    active
1    active
2    active
3    active
4    active
5    active
6    active
7    active
8    active
FTOS#

```

Table 3-2. show sfm Command Output Fields

Field	Description
Switch Fabric State:	States that the Switch Fabric is up (8 SFMs are online and operating).
Status	Displays the SFM's active status.
Card Type	States the type of SFM.
Up Time	Displays the number of hours and minutes since the RPM's last reboot.
Temperature	Displays the temperature of the RPM. Minor alarm status if temperature is over 65° C.
Power Status	Displays power status: absent, down, or up
Serial Num	Displays the line card serial number.
Part Num	Displays the line card part number.
Vendor ID	Displays an internal code, which specifies the manufacturing vendor.
Date Code	Displays the line card's manufacturing date.
Country Code	Displays the country of origin. 01 = USA

show startup-config

C **E** **S**

Display the startup configuration.

Syntax

show startup-config

Command Modes

EXEC Privilege

Command History

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

Version 7.4.1.0 Expanded to include last configuration change and start-up last updated (date and time) and who made the change.

Example

```

FTOS#show startup-config

```



```

! Version 7.4.1.0
! Last configuration change at Thu Mar 29 02:16:07 2007 by default
! Startup-config last updated at Thu Mar 29 02:35:08 2007 by default
!
boot system rpm0 primary flash://FTOS-EF-7.4.1.0.bin
boot system rpm0 secondary flash://FTOS-EF-6.3.1.2.bin
boot system rpm0 default flash://FTOS-EF-6.5.1.8.bin
!
...

```

**Related
Commands**

[show running-config](#) Display current (running) configuration.

show version

C **E** **S**

S4810

S4820T

Display the current FTOS version information on the system.

Syntax

show version

Command Modes

EXEC Privilege

**Command
History**

Version 8.3.19.0 Introduced on S4820T

Version 8.3.12.0 Introduced on S4810

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

**Example
(E-Series)**

```

FTOS#show version
Dell Force10 Networks Real Time Operating System SoftwareDe
Dell Force10 Operating System Version: 1.0
Dell Force10 Application Software Version: 5.3.1.0
Copyright (c) 1999-2004 by Dell Force10 Networks, Inc.
Build Time: Sun May 9 00:57:03 PT 2004
Build Path: /local/local0/Release/5-4-1/SW/Bsp/Diag
Dell Force10 uptime is 1 days, 3 hours, 16 minutes

System image file is "/home/5.3.1/5.3.1.0/FTOS-ED-RPM1-5.3.1.0.bin"

Chassis Type: E1200
Control Processor: IBM PowerPC 405GP (Rev D) with 268435456 bytes of memory.
Route Processor 1: IBM PowerPC 405GP (Rev D) with 536870912 bytes of memory.
Route Processor 2: IBM PowerPC 405GP (Rev D) with 536870912 bytes of memory.

128K bytes of non-volatile configuration memory.

 1 Route Processor Module
 9 Switch Fabric Module
 1 24-port GE line card with SFP optics (EE)
 1 12-port GE Flex line card with SFP optics (EE)
 1 2-port OC48c line card with SR optics (EC)
 2 24-port GE line card with SX optics (EB)
 1 2-port 10GE WAN PHY line card with 10Km (1310nm) optics (EE)
 1 12-port GE Flex line card with SFP optics (EC)

```

**Example
(S-Series)**

```

    1 2-port 10GE LAN PHY line card with 10Km (1310nm) optics (ED)
    1 12-port OC12c/3c PoS line card with IR optics (EC)
    1 24-port GE line card with SFP optics (ED)
    1 FastEthernet/IEEE 802.3 interface(s)
120 GigabitEthernet/IEEE 802.3 interface(s)
    14 SONET network interface(s)
    4 Ten GigabitEthernet/IEEE 802.3 interface(s)
FTOS#

```

```

FTOS#show version
Dell Force10 Networks Real Time Operating System Software
Dell Force10 Operating System Version: 1.0
Dell Force10 Application Software Version: E7-8-1-13
Copyright (c) 1999-2008 by Dell Force10 Networks, Inc.
Build Time: Mon Nov 24 18:59:27 2008
Build Path: /local/local/sw/build/build2/Release/7-8-1/SW/SRC
Dell Force10 uptime is 1 minute(s)
System Type: S50V
Control Processor: MPC8451E with 252739584 bytes of memory.

```

32M bytes of boot flash memory.

```

    1 48-port E/FE/GE with POE (SB)
    48 GigabitEthernet/IEEE 802.3 interface(s)
    4 Ten GigabitEthernet/IEEE 802.3 interface(s)
FTOS#

```

**Example
(S4810 & S4820T)**

```

FTOS#
FTOS#show version
Dell Force10 Real Time Operating System Software
Dell Force10 Operating System Version: 1.0
Dell Force10 Application Software Version: Z9K-ICC-PRIM-SYNC-8-3-11-173
Copyright (c) 1999-2012 by Dell Inc. All Rights Reserved.
Build Time: Mon Jul 16 22:19:01 PDT 2012
Build Path: /local/local/build/build15/8.3.12.0/SW/SRC/Radius
FTOS uptime is 1 minute(s)

```

System image file is "s4810-14"

```

System Type: S4810
Control Processor: Freescale QorIQ P2020 with 2147483648 bytes of memory.

```

128M bytes of boot flash memory.

```

    1 52-port GE/TE/FG (SE)
    52 Ten GigabitEthernet/IEEE 802.3 interface(s)

```

FTOS#

FTOS#

FTOS#

FTOS#config t

FTOS(conf)#int te 0/5

FTOS(conf-if-te-0/5)#no shut

FTOS(conf-if-te-0/5)#

FTOS(conf-if-te-0/5)#

FTOS(conf-if-te-0/5)#

FTOS(conf-if-te-0/5)#ipv6 nd prefix FEC0::/10

FTOS(conf-if-te-0/5)#

FTOS(conf-if-te-0/5)#show conf

!

interface TenGigabitEthernet 0/5

ip address 78.21.1.3/24

ipv6 nd prefix fec0::/10

flowcontrol rx on tx on

no shutdown

FTOS(conf-if-te-0/5)#

Table 3-3. show version Command Fields

Lines beginning with	Description
Dell Force10 Network...	Name of the operating system
Dell Force10 Operating...	OS version number
Dell Force10 Application...	Software version
Copyright (c)...	Copyright information
Build Time...	Software build's date stamp
Build Path...	Location of the software build files loaded on the system
Dell Force10 uptime is...	Amount of time the system has been up
System image...	Image file name
Chassis Type:	Chassis type (E1200, E600, E600i, E300, C300, C150)
Control Processor:...	Control processor information and amount of memory on processor.
Route Processor 1:...	E-Series route processor 1 information and the amount of memory on that processor.
Route Processor 2:...	E-Series route processor 2 information and the amount of memory on that processor.
128K bytes...	Amount and type of memory on system.
1 Route Processor...	Hardware configuration of the system, including the number and type of physical interfaces available.

upgrade (E-Series version)

E

Upgrade the bootflash, boot selector, or system image on a processor.

Syntax

```
upgrade {bootflash-image | bootselector-image | system-image} {all | linecard
linecard-slot | rpm} {booted | file-url}
```

Parameters

bootflash-image	Enter the keyword <code>bootflash-image</code> to upgrade the bootflash image.
bootselector-image	Enter the keyword <code>bootselector-image</code> to upgrade the boot selector image. Use with TAC supervision only.
system-image	Enter the keyword <code>system-image</code> to upgrade the cache boot image.
all	Enter the keyword <code>all</code> to upgrade the bootflash/boot selector image on all processors in the E-Series. This keyword does not upgrade the bootflash on the standby RPM.
linecard <i>linecard-slot</i>	Enter the keyword <code>linecard</code> followed by the slot number to change the bootflash image on a specific line card. E-Series Range: 0 to 13 on the E1200; 0 to 6 for the E600; 0 to 5 on the E300

	rpm	Enter the keyword rpm to upgrade the bootflash/boot selector image on all processors on the RPM.
	booted	Enter this keyword to upgrade using the image packed with the currently running FTOS image.
	file-url	Enter the following location keywords and information to upgrade using an FTOS image other than the one currently running: Enter the transfer method and file location: <code>flash://filename</code> <code>ftp://userid:password@hostip/filepath</code> <code>slot0://filename</code> <code>tftp://hostip/filepath</code>
Defaults	No configuration or default values	
Command Modes	EXEC Privilege	
Command History	Version 7.7.1.0 Removed alt-bootflash-image, alt-bootselector-image, alt-system-image options, rp1, rp2, and cp options.	
	E-Series original Command	
Usage Information	<p>A system message appears stating the Bootflash upgrade status. Reload the system to boot from the upgraded boot images.</p> <p>Once the URL is specified, the same downloaded image can be used for upgrading an individual RPM, line cards, SFM FPGA, and system-image for cache-boot without specifying the <i>file-url</i> again using the command <code>upgrade {bootflash-image bootselector-image system-image} {all linecard <i>linecard-slot</i> rpm}</code>. After 20 minutes, the cached memory is released and returned for general use, but the URL is maintained and you do not have to specify it for subsequent upgrades.</p>	
Related Commands	upgrade fpga-image	Upgrade the FPGA version in the specified E-Series SFM.
	boot system	Display configured boot image information

upgrade (C-Series version)



Upgrade the bootflash or boot selector image on a processor.

Syntax

`upgrade {bootflash-image | bootselector-image | system-image} {all | linecard {number | all} | rpm} [booted | file-url | repair]`

Parameters

bootflash-image	Enter the keyword bootflash-image to upgrade the bootflash image.
bootselector-image	Enter the keyword bootselector-image to upgrade the boot selector image. Use with TAC supervision only.
system-image	Enter the keyword system-image to upgrade the system image. Use with TAC supervision only.

all	Enter the keyword all to upgrade the bootflash or boot selector image on all processors. This keyword does not upgrade the bootflash on the standby RPM. Enter the keyword all after the keyword linecard to upgrade the bootflash or boot selector image on all linecards.
linecard <i>number</i>	Enter the keyword linecard followed by the line card slot number. Range: E1200 and E1200i AC/DC: 0-13 E600 and E600i: 0-6 E300: 0-5 C300: 0-7 C150: 0-3 S-Series: 0-0
rpm	Enter the keyword rpm to upgrade the system image of a selector image on all processors on the RPM.
repair	Enter this keyword to upgrade a line card newly inserted into an already upgraded chassis. This option is only available with the system-image keyword.
booted	Upgrade the bootflash or bootselector image using the currently running FTOS image.
<i>file-url</i>	Enter the following location keywords and information to upgrade using an FTOS image other than the one currently running: <ul style="list-style-type: none"> • To specify an FTOS image on the internal flash, enter flash://<i>file-path/filename</i>. • To specify an FTOS image on an FTP server, enter ftp://<i>user:password@hostip/filepath</i> • To specify an FTOS image on the external flash on the primary RPM, slot0://<i>file-path/filename</i> • To copy a file on a TFTP server, enter tftp://<i>hostip/filepath/filename</i>

Defaults

FTOS uses the boot flash image that was packed with it if no URL is specified.

Command Modes

EXEC Privilege

Command History

Version 7.7.1.0 Introduced **system-image** option

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Usage Information

A system message appears stating the Bootflash upgrade status. Reload the system to boot from the upgraded boot images.

Once the URL is specified, the same downloaded image can be used for upgrading an individual RPM, line cards, SFM FPGA, and system-image for cache-boot without specifying the *file-url* again using the command **upgrade {bootflash-image | bootselector-image | system-image} {all | linecard *linecard-slot* | rpm}**. After 20 minutes, the cached memory is released and returned for general use, but the URL is maintained and you do not have to specify it for subsequent upgrades.

**Related
Commands**

upgrade fpga-image	Upgrade the FPGA version in the specified E-Series SFM.
boot system	Display configured boot image information

upgrade (S-Series management unit and Z9000)

S **Z** **S4810**

S4820T

Upgrade the bootflash image or system image of the S-Series or Z-Series management unit.

Syntax

upgrade {boot | system} {ftp: | scp: | tftp: | flash partition: {A: |B:} | stack-unit | usbflash | slot0:} *file-url*

Parameters

boot	Enter this keyword to change the boot image.
system	Enter this keyword to change the system image.
ftp:	After entering this keyword you can either follow it with the location of the source file in this form: <i>//userid:password@hostip/filepath</i> , or press Enter to launch a prompt sequence.
scp:	After entering this keyword you can either follow it with the location of the source file in this form: <i>//userid:password@hostip/filepath</i> , or press Enter to launch a prompt sequence.
slot0:	After entering this keyword you can either follow it with the location of the source file in this form: <i>//hostlocation/filepath</i> , or press Enter to launch a prompt sequence.
tftp:	After entering this keyword you can either follow it with the location of the source file in this form: <i>//hostlocation/filepath</i> , or press Enter to launch a prompt sequence.
flash:	After entering this keyword you can either follow it with the location of the source file in this form: <i>flash/filepath</i> , or press Enter to launch a prompt sequence.
A: B:	Enter the partition to upgrade from the flash. S4810, S4820T, or Z9000 only
stack-unit:	After entering this keyword to synch the image to the stack-unit.
usbflash:	After entering this keyword you can either follow it with the location of the source file in this form: <i>usbflash://filepath</i> , or press Enter to launch a prompt sequence. S55 only

Defaults

No configuration or default values

Command Modes

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.11.1	Introduced on the Z9000, adding support for the SSD on the Z9000 only
Version 7.7.1.0	Added support for TFTP and SCP.
Version 7.6.1.0	Introduced on S-Series

**Usage
Information**

You must reload FTOS after executing this command. Use the command [upgrade system stack-unit \(S-Series stack member\)](#) to copy FTOS from the management unit to one or more stack members.

Related Commands	show sfm	Display the SFM status.
	upgrade (E-Series version)	Upgrade the E-Series.

Usage Information On E-Series ExaScale, you cannot upgrade SFMs using this command when Cache Boot is configured. If you attempt an upgrade, you must reload the chassis to recover.

Upgrading the C-Series FPGA

These commands are for upgrading the FPGA for C-Series RPMs and line cards.

- [restore fpga-image](#)
- [upgrade fpga-image](#)

restore fpga-image



Copy the backup C-Series FPGA image to the primary FPGA image.

Syntax `restore fpga-image {rpm | linecard} number`

Parameters	<code>rpm</code>	Enter rpm to upgrade an RPM FPGA.
	<code>linecard</code>	Enter linecard to upgrade a line card FPGA.
	<code>number</code>	Enter the line card or RPM slot number. C-Series Line Card Range: 0-7, RPM Range: 0-1

Defaults None.

Command Mode EXEC Privilege

Command History	Version 7.7.1.0	Renamed keyword <code>primary-fpga-flash</code> to <code>fpga-image</code> .
	Version 7.5.1.0	Introduced on C-Series

```

Example

FTOS#restore fpga-image linecard 4

Current FPGA information in the system:
=====

Card                FPGA Name          Current Version    New Version
-----
LC4                 48 Port 1G LCM FPGA      A: 3.6             restore

*****
* Warning - Upgrading FPGA is inherently risky and should *
* only be attempted when necessary. A failure at this upgrade may *
* cause a board RMA. Proceed with caution ! *
*****

Restore fpga image for linecard 4 [yes/no]: yes

```



```
FPGA restore in progress. Please do NOT power off the card.
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

```
Upgrade result :
=====
Linecard 4 FPGA restore successful.
```

Usage Information

Reset the card using the power-cycle option after restoring the FPGA command.

Related Commands

reset	Reset a card.
-----------------------	---------------

upgrade fpga-image



Upgrade the primary FPGA image.

Syntax

```
upgrade fpga-image {rpm {number | all} | linecard {number | all} [system-fpga | link-fpga] | all} {booted | file-url}
```

Parameters

<i>rpm number</i>	Enter rpm followed by the RPM slot number to upgrade an RPM FPGA Range: 0-1
<i>linecard number</i>	Enter linecard followed by the line card slot number to upgrade a linecard FPGA. Range: 0-7 on the C300, 0-3 on the C150
<i>all</i>	Enter the keyword <i>all</i> to upgrade all RPM and linecard FPGAs. Enter the keyword <i>all</i> after the keyword <i>rpm</i> to upgrade all FPGAs on all RPMs. Enter the keyword <i>all</i> after the keyword <i>linecard</i> to upgrade all FPGAs on all linecards.
<i>system-fpga</i>	(OPTIONAL) Enter <i>system-fpga</i> to upgrade only the system FPGA on a fiber linecard. Contact the Dell Force10 TAC before using this keyword.
<i>link-fpga</i>	(OPTIONAL) Enter <i>link-fpga</i> to upgrade only the link FPGA on a fiber linecard. Contact the Dell Force10 TAC before using this keyword.
<i>booted</i>	Upgrade the FPGA image using the currently running FTOS image.
<i>file-url</i>	Enter the following location keywords and information to upgrade the FPGA using an FTOS image other than the one currently running: <ul style="list-style-type: none"> To specify an FTOS image on the internal flash, enter <i>flash://file-path/filename</i>. To specify an FTOS image on an FTP server, enter <i>ftp://user:password@hostip/filepath</i> To specify an FTOS image on the external flash on the primary RPM, <i>slot0://file-path/filename</i> To copy a file on a TFTP server, enter <i>tftp://hostip/filepath/filename</i>

Defaults

None.

Command Mode

EXEC Privilege

Command History

Version 7.7.1.0	Renamed the primary-fpga-flash keyword to fpga-image. Added support for upgrading using a remote FTOS image.
-----------------	--

Version 7.6.1.0	Added support for the all keyword
-----------------	-----------------------------------

Version 7.5.1.0	Introduced on C-Series
-----------------	------------------------

Example

```
FTOS#conf
FTOS(conf)# upgrade primary-fpga-flash rpm
Proceed to upgrade primary fpga flash for rpm 0 [confirm yes/no]: yes
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
FTOS#
```

Usage Information

Reset the card using the power-cycle option after restoring the FPGA command.

Related Commands

reset	Reset a line card or RPM.
-----------------------	---------------------------

restore fpga-image	This command copies the backup FPGA image to the primary FPGA image.
------------------------------------	--

Control and Monitoring

Overview

This chapter contains the following commands to configure and monitor the system, including Telnet, FTP, and TFTP as they apply to the following Dell Force10 platforms **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.



Note: Beginning in release 8.3.10.0, the `enable xfp-power-updates` command was deprecated for the S4810 only. It was replaced by the `enable optic-info-update interval` command to update information on temperature and power monitoring in the SNMP MIB.

Commands

asf-mode	rpm <slot> location-led
audible cut-off	send
banner exec	service timestamps
banner login	show alarms
banner motd	show chassis
cam-audit linecard	show command-history
cam-audit stack-unit	show command-tree
clear alarms	show console lp
clear command history	show cpu-traffic-stats
clear line	show debugging
configure	show environment (C-Series and E-Series)
debug cpu-traffic-stats	show environment (S-Series)
debug ftpserver	show inventory (C-Series and E-Series)
disable	show inventory (S-Series)
do	show linecard
enable	show linecard boot-information
enable optic-info-update interval	show memory (C-Series and E-Series)
enable xfp-power-updates	show memory (S-Series)

end	show processes cpu (C-Series and E-Series)
epoch	show processes cpu (S-Series)
exec-banner	show processes ipc flow-control
exec-timeout	show processes memory (C-Series and E-Series)
exit	ftp-server username
ftp-server topdir	show processes memory (S-Series)
hostname	show rpm
ip ftp password	show software ifm
ip ftp source-interface	show switch links
ip ftp username	show system (S-Series, S4810 and S4820T)
ip telnet server enable	show tech-support (C-Series and E-Series)
ip telnet source-interface	show tech-support (S-Series)
ip tftp source-interface	ssh-peer-rpm
line	telnet
linecard	telnet-peer-rpm
module power-off	terminal length
motd-banner	terminal xml
ping	traceroute
power-off	undebug all
power-on	upload trace-log
reload	virtual-ip
reset	write

asf-mode



S4810

S4820T

Enable Alternate Store and Forward (ASF) mode and forward packets as soon as a threshold is reached.

Syntax

asf-mode stack-unit { *unit-id* / *all* } queue size

To return to standard Store and Forward mode, enter no asf-mode stack unit.

Parameters	<i>unit-id</i>	Enter the stack member unit identifier of the stack member to reset. S4810 and S4820T range: 0 - 11 Z9000 range: 0 - 7 all Note: The S4810 and S4820T commands accept Unit ID numbers 0-11, though S4810 and the S4820T support stacking up to 6 units with FTOS version 8.3.12.0.
	queue size	Enter the queue size of the stack member. Range: 0 - 15
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.11.0	Introduced on the Z9000
	Version 8.3.7.0	Introduced on the S4810
Usage Information	You <i>must</i> save the configuration and reload the system to implement ASF. When you enter the command, the system sends a message stating that the new mode is enabled when the system reloads.	

audible cut-off

E Turn off an audible alarm.

Syntax audible cut-off

Defaults Not configured.

Command Modes EXEC Privilege

banner exec

C E S Configure a message that is displayed when a user enters the EXEC mode.

Syntax banner exec *c line c*

Parameters	<i>c</i>	Enter the keywords banner exec, and then enter a character delineator, represented here by the letter <i>c</i> , and press ENTER.
	<i>line</i>	Enter a text string for your banner message ending the message with your delineator. In the example below, the delineator is a percent character (%); the banner message is “testing, testing”.

Defaults No banner is displayed.

Command Modes CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

Optionally, use the `banner exec` command to create a text string that is displayed when the user accesses the EXEC mode. The `exec-banner` command toggles that display.

Example

```
FTOS(conf)#banner exec ?
LINE                c banner-text c, where 'c' is a delimiting character
FTOS(conf)#banner exec %
Enter TEXT message. End with the character '%'.
This is the banner%
FTOS(conf)#end
FTOS#exit
4d21h5m: %RPM0-P:CP %SEC-5-LOGOUT: Exec session is terminated for user on line console

This is the banner

FTOS con0 now available

Press RETURN to get started.
4d21h6m: %RPM0-P:CP %SEC-5-LOGIN_SUCCESS: Login successful for user on line console

This is the banner
FTOS>
```

Related Commands

banner login	Sets a banner for login connections to the system.
banner motd	Sets a Message of the Day banner.
exec-banner	Enable the display of a text string when the user enters the EXEC mode.
line	Enable and configure console and virtual terminal lines to the system.

banner login

C E S

Set a banner to be displayed when logging on to the system.

Syntax

`banner login { keyboard-interactive | no keyboard-interactive } [c line c]`

Parameters

keyboard-interactive	Enter this keyword to require a carriage return (CR) to get the message banner prompt.
c	Enter a delineator character to specify the limits of the text banner. In the example below, the % character is the delineator character.
line	Enter a text string for your text banner message ending the message with your delineator. In the example below, the delineator is a percent character (%). Ranges: <ul style="list-style-type: none"> • maximum of 50 lines • up to 255 characters per line

Defaults

No banner is configured and the CR is required when creating a banner.

Command Modes

CONFIGURATION

Command History

Version 8.2.1.0	Introduced keyboard-interactive keyword
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

A login banner message is displayed only in EXEC Privilege mode after entering the enable command followed by the password. These banners are not displayed to users in EXEC mode.

Related Commands

banner exec	Sets a banner to be displayed when you enter EXEC Privilege mode.
banner motd	Sets a Message of the Day banner.

Example

```

FTOS(conf)#banner login ?
keyboard-interactive  Press enter key to get prompt
LINE                  c banner-text c, where 'c' is a delimiting character
FTOS(conf)#no banner login ?
keyboard-interactive  Prompt will be displayed by default
<cr>
FTOS(conf)#banner login keyboard-interactive

Enter TEXT message.  End with the character '%'.
This is the banner%
FTOS(conf)#end
FTOS#exit

13d21h9m: %RPM0-P:CP %SEC-5-LOGOUT: Exec session is terminated for user on line console
This is the banner
FTOS con0 now available
Press RETURN to get started.
13d21h10m: %RPM0-P:CP %SEC-5-LOGIN_SUCCESS: Login successful for user on line console
This is the banner

```

banner motd

C E S

Set a Message of the Day (MOTD) banner.

Syntax`banner motd c line c`**Parameters**

<i>c</i>	Enter a delineator character to specify the limits of the text banner. In the above figures, the % character is the delineator character.
<i>line</i>	Enter a text string for your message of the day banner message ending the message with your delineator. In the example figures above, the delineator is a percent character (%).

Defaults

No banner is configured.

Command Modes

CONFIGURATION

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	
Usage Information	A MOTD banner message is displayed only in EXEC Privilege mode after entering the <code>enable</code> command followed by the password. These banners are not displayed to users in EXEC (non-privilege) mode.	
Related Commands	banner exec	Sets a banner to be displayed when you enter the EXEC Privilege mode.
	banner login	Sets a banner to be displayed after successful login to the system.

cam-audit linecard

E

Enable audit of the IPv4 forwarding table on all line cards.

Syntax

`cam-audit linecard all ipv4-fib interval time-in-minutes`

Parameters

<code>all</code>	Enter the keyword <code>all</code> to enable CAM audit on all line cards.
<code>ipv4-fib</code>	Enter the keyword <code>ipv4-fib</code> to designate the CAM audit on the IPv4 forwarding entries.
<code>interval <i>time-in-minutes</i></code>	Enter the keyword <code>interval</code> followed by the frequency in minutes of the CAM audit. Range: 5 to 1440 minutes (24 hours) Default: 60 minutes

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

Usage Information

Enables periodic audits of software and hardware copies of the IPv4 forwarding table.

cam-audit stack-unit

S4810

Enable audit of the IPv4 and IPv6 forwarding table on all line cards.

S4820T

Syntax

`cam-audit stack-unit [all | ipv4-fib | ipv6-fib] interval time-in-minutes`

Parameters	all	Enter the keyword all to enable CAM audit on all line cards.
	ipv4-fib	Enter the keyword ipv4-fib to designate the CAM audit on the IPv4 forwarding entries.
	ipv6-fib	Enter the keyword ipv6-fib to designate the CAM audit on the IPv6 forwarding entries.
	interval <i>time-in-minutes</i>	Enter the keyword interval followed by the frequency in minutes of the CAM audit. Range: 5 to 1440 minutes (24 hours) Default: 60 minutes
Defaults	Disabled	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.10.0	Introduced on S4810
Usage Information	Enables periodic audits of software and hardware copies of the IPv4 and IPv6 forwarding table.	

clear alarms

C **E** **S**

Clear alarms on the system.

Syntax

clear alarms

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Usage Information

This command clear alarms that are no longer active. If an alarm situation is still active, it is n in the system output.

clear command history

C **E** **S**

Clear the command history log.

Syntax

clear command history

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Related Commands

show command-history	Display a buffered log of all commands entered by all users along with a time stamp.
--------------------------------------	--

clear line

C **E** **S**

Reset a terminal line.

Syntaxclear line { *line-number* | aux 0 | console 0 | vty *number* }**Parameters**

<i>line-number</i>	Enter a number for one of the 12 terminal lines on the system. Range: 0 to 11.
aux 0	Enter the keywords aux 0 to reset the Auxiliary port. Note: This option is supported on E-Series only.
console 0	Enter the keyword console 0 to reset the Console port.
vty <i>number</i>	Enter the keyword vty followed by a number to clear a Terminal line. Range: 0 to 9

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

configure

C **E** **S**

Enter the CONFIGURATION mode from the EXEC Privilege mode.

Syntax

configure [terminal]

Parameters

terminal	(OPTIONAL) Enter the keyword terminal to specify that you are configuring from the terminal.
----------	---

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Example

```
FTOS#configure
FTOS (conf) #
```

debug cpu-traffic-stats

C **E** **S**

Enable the collection of CPU traffic statistics.

Syntax

debug cpu-traffic-stats

Defaults

Disabled

Command Modes

EXEC Privilege

Command History

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

Version 6.2.1.1 Introduced on E-Series

Usage Information

This command enables (and disables) the collection of CPU traffic statistics from the time this command is executed (not from system boot). However, excessive traffic received by a CPU will automatically trigger (turn on) the collection of CPU traffic statistics. The following message is an indication that collection of CPU traffic is automatically turned on. Use the [show cpu-traffic-stats](#) to view the traffic statistics.

Excessive traffic is received by CPU and traffic will be rate controlled



Note: This command must be enabled before the [show cpu-traffic-stats](#) command will display traffic statistics. Dell Force10 recommends that you disable debugging (no debug cpu-traffic-stats) once troubleshooting is complete.

Related Commands

[show cpu-traffic-stats](#) Display cpu traffic statistics

debug ftpserver

C **E** **S**

View transactions during an FTP session when a user is logged into the FTP server.

Syntax

debug ftpserver

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.6.1.0 Introduced on S-Series

disable

C E S Z

Return to the EXEC mode.

Syntax

`disable [level]`

Parameters

<i>level</i>	(OPTIONAL) Enter a number for a privilege level of the FTOS. Range: 0 to 15. Default: 1
--------------	---

Defaults

1

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

do

C E S

Allows the execution of most EXEC-level commands from all CONFIGURATION levels without returning to the EXEC level.

Syntax

`do command`

Parameters

<i>command</i>	Enter an EXEC-level command.
----------------	------------------------------

Defaults

No default behavior

Command Modes

CONFIGURATION
INTERFACE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced on E-Series

Usage Information

The following commands are *not* supported by the do command:

- enable
- disable
- exit
- config

Example

```
FTOS(conf-if-te-5/0)#do clear counters
Clear counters on all interfaces [confirm]
FTOS(conf-if-te-5/0)#
FTOS(conf-if-te-5/0)#do clear logging
Clear logging buffer [confirm]
FTOS(conf-if-te-5/0)#
FTOS(conf-if-te-5/0)#do reload
System configuration has been modified. Save? [yes/no]: n
Proceed with reload [confirm yes/no]: n
FTOS(conf-if-te-5/0)#
```

enable



Enter the EXEC Privilege mode or any other privilege level configured. After entering this command, you may need to enter a password.

Syntax

enable [*level*]

Parameters

<i>level</i>	(OPTIONAL) Enter a number for a privilege level of FTOS. Range: 0 to 15. Default: 15
--------------	--

Defaults

15

Command Modes

EXEC

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

E-Series original Command

Usage Information

Users entering the EXEC Privilege mode or any other configured privilege level can access configuration commands. To protect against unauthorized access, use the [enable password](#) command to configure a password for the enable command at a specific privilege level. If no privilege level is specified, the default is privilege level 15.

Related Commands

enable password	Configure a password for the enable command and to access a privilege level.
---------------------------------	--

enable optic-info-update interval

S4810

Enable polling intervals of optical information updates for SNMP.

S4820T

Syntax

enable optical-info-update interval *seconds*

To disable optical power information updates, use the no enable optical-info-update interval command.

Parameters

interval <i>seconds</i>	Enter the keyword interval followed by the polling interval in seconds. Range: 120 to 6000 seconds Default: 300 seconds (5 minutes)
-------------------------	---

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Replacement command for S4820T only. Replaces the enable xfp-power-updates command.
Version 8.3.10.0	Replacement command for S4810 only. Replaces the enable xfp-power-updates command.

Usage Information

The default interval for the polling is 300 seconds (5 minutes). Use this command to enable the polling and to configure the polling frequency.

enable xfp-power-updates

C E S

Enable XFP power updates for SNMP.

Syntax

enable xfp-power-updates interval *seconds*

To disable XFP power updates, use the no enable xfp-power-updates command.

Parameters

interval <i>seconds</i>	Enter the keyword interval followed by the polling interval in seconds. Range: 120 to 6000 seconds Default: 300 seconds (5 minutes)
-------------------------	---

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.10.0	Deprecated command for S4810 only. Replaced by the enable optic-info-update interval command to update information on temperature and power monitoring in the SNMP MIB.
Version 8.1.1.0	Introduced on E-Series ExaScale

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

The chassis MIB contain the entry chSysXfpRecvPower in the chSysPortTable table. Periodically, IFA polls the XFP power for each of the ports, and sends the values to IFM where it is cached. The default interval for the polling is 300 seconds (5 minutes). Use this command to enable the polling and to configure the polling frequency.

end

C **E** **S**

Return to the EXEC Privilege mode from other command modes (for example, the CONFIGURATION or ROUTER OSPF modes).

Syntax

end

Command Modes

CONFIGURATION, SPANNING TREE, MULTIPLE SPANNING TREE, LINE, INTERFACE, TRACE-LIST, VRRP, ACCESS-LIST, PREFIX-LIST, AS-PATH ACL, COMMUNITY-LIST, ROUTER OSPF, ROUTER RIP, ROUTER ISIS, ROUTER BGP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Related Commands

exit	Return to the lower command mode.
----------------------	-----------------------------------

epoch

E

Set the epoch scheduling time for the chassis.

Syntax

epoch {2.4 |3.2 | 10.4}

Parameters

2.4	Enter the keyword 2.4 to set the epoch to 2.4 micro-seconds and lower the latency. This option is available on the E600i and E1200i E-Series ExaScale systems only.
3.2	Enter the keyword 3.2 to set the epoch to 3.2 micro-seconds and lower the latency. This option is available on the E600/E600i and E1200/E1200i only. ExaScale does not supports this setting with FTOS 8.3.1.0 and later.
10.4	Enter the keyword 10.4 to set the epoch to 10.4 micro-seconds. This is the default setting and is available on the E300, E600/E600i, and E1200.

Defaults

10.4

Command Modes

CONFIGURATION

Command History

Version 8.3.1.0	Added 2.4 micro-seconds option. ExaScale supports only 10.4 microseconds and 2.4 microseconds with FTOS 8.3.1.0 and later.
Version 8.1.1.2	Introduced on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i
Version 6.2.1.1	Support for E300 introduced (10.4 only)
Version 6.1.1.0	Values changed as described above

Usage Information

You save the configuration and reload the chassis for the changes to the epoch command setting to take affect.

When using 10 SFMs in an ExaScale chassis, the 10.4 and 2.4 settings are both line rate. Additionally, the 2.4 setting has a lower latency.

When using 9 SFMs in an ExaScale chassis, the 10.4 setting is line rate; the 2.4 setting reduces throughput. Dell Force10 recommends using the 10.4 setting when the system has 9 SFMs.

Using 8 SFMs in an ExaScale chassis reduces throughput at any epoch setting.



Note: The E300 supports only the 10.4 epoch setting. The E-Series TeraScale E600/E600i and the E1200/E1200i systems support the 10.4 and the 3.2 epoch settings.



Note: For E-Series ExaScale, the 2.4 setting is supported on FTOS version 8.3.1.0 and later. The 10.4 setting is supported on all ExaScale FTOS versions. The 3.2 setting is only supported on FTOS versions 8.2.1.0 and earlier.

exec-banner

C **E** **S**

Enable the display of a text string when the user enters the EXEC mode.

Syntax

exec-banner

Defaults

Enabled on all lines (if configured, the banner appears).

Command Modes

LINE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage

Optionally, use the banner exec command to create a text string that is displayed when the user accesses the EXEC mode. This command toggles that display.

**Related
Commands**

banner exec	Configure a banner to display when entering the EXEC mode.
line	Enable and configure console and virtual terminal lines to the system.

exec-timeout

C **E** **S**

Set a time interval the system will wait for input on a line before disconnecting the session.

Syntax

`exec-timeout minutes [seconds]`

To return to default settings, enter no exec-timeout.

Parameters

<i>minutes</i>	Enter the number of minutes of inactivity on the system before disconnecting the current session. Range: 0 to 35791 Default: 10 minutes for console line; 30 minutes for VTY line.
<i>seconds</i>	(OPTIONAL) Enter the number of seconds Range: 0 to 2147483 Default: 0 seconds

Defaults

10 minutes for console line; 30 minutes for VTY lines; 0 seconds

Command Modes

LINE

**Command
History**

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

E-Series original Command

**Usage
Information**

To remove the time interval, enter `exec-timeout 0 0`.

Example

```
FTOS con0 is now available

Press RETURN to get started.
FTOS>
```

exit

C **E** **S**

Return to the lower command mode.

Syntax

`exit`

Command Modes

EXEC Privilege, CONFIGURATION, LINE, INTERFACE, TRACE-LIST, PROTOCOL GVRP, SPANNING TREE, MULTIPLE SPANNING TREE, MAC ACCESS LIST, ACCESS-LIST, AS-PATH ACL, COMMUNITY-LIST, PREFIX-LIST, ROUTER OSPF, ROUTER RIP, ROUTER ISIS, ROUTER BGP

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	
Related Commands	end	Return to the EXEC Privilege command mode.

ftp-server enable

C **E** **S**

Enable FTP server functions on the system.

Syntax ftp-server enable

Defaults Disabled.

Command Modes CONFIGURATION

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

Example

```
morpheus% ftp 10.31.1.111
Connected to 10.31.1.111.
220 FTOS (1.0) FTP server ready
Name (10.31.1.111:dch): dch
331 Password required
Password:
230 User logged in
ftp> pwd
257 Current directory is "flash:"
ftp> dir
200 Port set okay
150 Opening ASCII mode data connection
  size      date       time       name
-----
    512     Jul-20-2004 18:15:00  tgting
    512     Jul-20-2004 18:15:00  diagnostic
    512     Jul-20-2004 18:15:00  other
    512     Jul-20-2004 18:15:00  tgt
226 Transfer complete
329 bytes received in 0.018 seconds (17.95 Kbytes/s)
ftp>
```

Related Commands	ftp-server topdir	Set the directory to be used for incoming FTP connections to the E-Series.
	ftp-server username	Set a username and password for incoming FTP connections to the E-Series.

ftp-server topdir

C E S

Specify the top-level directory to be accessed when an incoming FTP connection request is made.

Syntax ftp-server topdir *directory*

Parameters	<i>directory</i> Enter the directory path.
-------------------	--

Defaults The internal flash is the default directory.

Command Modes CONFIGURATION

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

Usage Information After you enable FTP server functions with the [ftp-server enable](#) command, Dell Force10 recommends that you specify a top-level directory path. Without a top-level directory path specified, the FTOS directs users to the flash directory when they log in to the FTP server.

Related Commands	ftp-server enable	Enables FTP server functions on the E-Series.
	ftp-server username	Set a username and password for incoming FTP connections to the E-Series.

ftp-server username

C E S

Create a user name and associated password for incoming FTP server sessions.

Syntax ftp-server username *username* password [*encryption-type*] *password*

Parameters	<i>username</i>	Enter a text string up to 40 characters long as the user name.
	password <i>password</i>	Enter the keyword <code>password</code> followed by a string up to 40 characters long as the password. Without specifying an encryption type, the password is unencrypted.
	<i>encryption-type</i>	(OPTIONAL) After the keyword <code>password</code> enter one of the following numbers: <ul style="list-style-type: none">• 0 (zero) for an unencrypted (clear text) password• 7 (seven) for hidden text password.

Defaults Not enabled.

Command Modes CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

hostname

C **E** **S**

Set the host name of the system.

Syntaxhostname *name***Parameters**

<i>name</i>	Enter a text string, up to 32 characters long.
-------------	--

Defaults

FTOS

Command Modes

CONFIGURATION

Command History

Version 8.3.12.0	Changed default from “Force10” to “FTOS”
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

The hostname is used in the prompt.

ip ftp password

C **E** **S**

Specify a password for outgoing FTP connections.

Syntaxip ftp password [*encryption-type*] *password***Parameters**

<i>encryption-type</i>	(OPTIONAL) Enter one of the following numbers: <ul style="list-style-type: none"> • 0 (zero) for an unencrypted (clear text) password • 7 (seven) for hidden text password
<i>password</i>	Enter a string up to 40 characters as the password.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series original Command

Usage Information

The password is listed in the configuration file; you can view the password by entering the `show running-config ftp` command.

The password configured by the `ip ftp password` command is used when you use the `ftp:` parameter in the `copy` command.

Related Commands

`copy`

Copy files.

`ip ftp username`

Set the user name for FTP sessions.

ip ftp source-interface

C **E** **S**

Specify an interface's IP address as the source IP address for FTP connections.

Syntax

`ip ftp source-interface interface`

Parameters

interface

Enter the following keywords and slot/port or number information:

- For an 100/1000 Ethernet interface, enter the keyword `GigabitEthernet` followed by the slot/port information.
 - For a 1-Gigabit Ethernet interface, enter the keyword `GigabitEthernet` followed by the slot/port information.
 - For Loopback interfaces, enter the keyword `loopback` followed by a number from zero (0) to 16383.
 - For a Port Channel interface, enter the keyword `port-channel` followed by a number:
C-Series and S-Series: 1-128
E-Series: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale
 - For SONET interface types, enter the keyword `sonet` followed by the slot/port information.
 - For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
 - For a 40-Gigabit Ethernet interface, enter the keyword `fortyGigE` followed by the slot/port information.
 - For a VLAN interface, enter the keyword `vlan` followed by a number from 1 to 4094.
-

Defaults

The IP address on the system that is closest to the Telnet address is used in the outgoing packets.

Command Modes

CONFIGURATION

Command History

Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale.

Version 8.2.1.0 Increased number of VLANs on ExaScale to 4094 (was 2094)

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.6.1.0 Support added for S-Series

Related Commands

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

copy	Copy files from and to the switch.
----------------------	------------------------------------

ip ftp username

C **E** **S**

Assign a user name for outgoing FTP connection requests.

Syntaxip ftp username *username***Parameters**

<i>username</i>	Enter a text string as the user name up to 40 characters long.
-----------------	--

Defaults

No user name is configured.

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage InformationYou must also configure a password with the [ip ftp password](#) command.**Related Commands**

ip ftp password	Set the password for FTP connections.
---------------------------------	---------------------------------------

ip telnet server enable

C **E** **S**

Enable the Telnet server on the switch.

Syntax

ip telnet server enable

To disable the Telnet server, execute the no ip telnet server enable command.

Defaults

Enabled

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced on E-Series

**Related
Commands**

[ip ssh server](#) Enable SSH server on the system.

ip telnet source-interface

C **E** **S**

Set an interface's IP address as the source address in outgoing packets for Telnet sessions.

Syntax `ip telnet source-interface interface`

Parameters

interface Enter the following keywords and slot/port or number information:

- For an 100/1000 Ethernet interface, enter the keyword `GigabitEthernet` followed by the slot/port information.
- For a 1-Gigabit Ethernet interface, enter the keyword `GigabitEthernet` followed by the slot/port information.
- For Loopback interfaces, enter the keyword `loopback` followed by a number from zero (0) to 16383.
- For the SONET interfaces, enter the keyword `sonet` followed by slot/port information.
- For a Port Channel, enter the keyword `port-channel` followed by a number:
C-Series and **S-Series**: 1-128
E-Series: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword `fortyGigE` followed by the slot/port information.
- For VLAN interface, enter the keyword `vlan` followed by a number from 1 to 4094.

Defaults The IP address on the system that is closest to the Telnet address is used in the outgoing packets.

Command Modes CONFIGURATION

**Command
History**

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Increased number of VLANs on ExaScale to 4094 (was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

**Related
Commands**

[telnet](#) Telnet to another device.

ip tftp source-interface

C **E** **S**

Assign an interface's IP address in outgoing packets for TFTP traffic.

Syntax `ip tftp source-interface interface`

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interfaces, enter the keyword loopback followed by a number from zero (0) to 16383. For a Port Channel, enter the keyword port-channel followed by a number: C-Series and S-Series: 1-128 E-Series: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale For the SONET interfaces, enter the keyword sonet followed by slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Defaults

The IP address on the system that is closest to the Telnet address is used in the outgoing packets.

Command Modes

CONFIGURATION

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Increased number of VLANs on ExaScale to 4094 (was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

line

C **E** **S**

Enable and configure console and virtual terminal lines to the system. This command accesses LINE mode, where you can set the access conditions for the designated line.

Syntax

`line {aux 0 | console 0 | vty number [end-number]}`

Parameters

<i>aux 0</i>	<p>Enter the keyword aux 0 to configure the auxiliary terminal connection.</p> <p>Note: This option is supported on E-Series only.</p>
<i>console 0</i>	<p>Enter the keyword console 0 to configure the console port.</p> <p>The console option for the S-Series is <0-0>.</p>
<i>vty number</i>	<p>Enter the keyword vty followed by a number from 0 to 9 to configure a virtual terminal line for Telnet sessions.</p> <p>The system supports 10 Telnet sessions.</p>
<i>end-number</i>	<p>(OPTIONAL) Enter a number from 1 to 9 as the last virtual terminal line to configure. You can configure multiple lines at one time.</p>

Defaults	Not configured								
Command Modes	CONFIGURATION								
Command History	<table border="1"> <tr> <td>Version 8.1.1.0</td> <td>Introduced on E-Series ExaScale</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td colspan="2">E-Series original Command</td> </tr> </table>	Version 8.1.1.0	Introduced on E-Series ExaScale	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	E-Series original Command	
Version 8.1.1.0	Introduced on E-Series ExaScale								
Version 7.6.1.0	Introduced on S-Series								
Version 7.5.1.0	Introduced on C-Series								
E-Series original Command									
Usage Information	You cannot delete a terminal connection.								
Related Commands	<table border="1"> <tr> <td>access-class</td> <td>Restrict incoming connections to a particular IP address in an IP access control list (ACL).</td> </tr> <tr> <td>password</td> <td>Specify a password for users on terminal lines.</td> </tr> <tr> <td>show linecard</td> <td>Display the line card(s) status.</td> </tr> </table>	access-class	Restrict incoming connections to a particular IP address in an IP access control list (ACL).	password	Specify a password for users on terminal lines.	show linecard	Display the line card(s) status.		
access-class	Restrict incoming connections to a particular IP address in an IP access control list (ACL).								
password	Specify a password for users on terminal lines.								
show linecard	Display the line card(s) status.								

linecard



Pre-configure a line card in a currently empty slot of the system or a different line card type for the slot. To pre-configure a 4-port 40G line card, refer to the [linecard](#) command.

Syntax	<code>linecard <i>number</i> <i>card-type</i></code>								
Parameters	<table border="1"> <tr> <td><i>number</i></td> <td>Enter the number of the slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E6001, and 0 to 5 on a E300.</td> </tr> <tr> <td><i>card-type</i></td> <td>Enter the line card ID (the Supported Hardware section in the Release Notes).</td> </tr> </table>	<i>number</i>	Enter the number of the slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E6001, and 0 to 5 on a E300.	<i>card-type</i>	Enter the line card ID (the Supported Hardware section in the Release Notes).				
<i>number</i>	Enter the number of the slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E6001, and 0 to 5 on a E300.								
<i>card-type</i>	Enter the line card ID (the Supported Hardware section in the Release Notes).								
Defaults	Not configured								
Command Modes	CONFIGURATION								
Command History	<table border="1"> <tr> <td>Version 8.1.1.2</td> <td>Introduced on E-Series ExaScale E600i</td> </tr> <tr> <td>Version 8.1.1.0</td> <td>Introduced on E-Series ExaScale E1200i</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td colspan="2">E-Series original Command</td> </tr> </table>	Version 8.1.1.2	Introduced on E-Series ExaScale E600i	Version 8.1.1.0	Introduced on E-Series ExaScale E1200i	Version 7.5.1.0	Introduced on C-Series	E-Series original Command	
Version 8.1.1.2	Introduced on E-Series ExaScale E600i								
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i								
Version 7.5.1.0	Introduced on C-Series								
E-Series original Command									
Usage Information	Use this command only for empty slots or a slot where you have hot-swapped a different line card type. Before inserting a card of a different type into the pre-configured slot, execute the <code>no linecard <i>number</i></code> command. The following screenshot shows the current supported C-Series line cards, along with their “card types” (card-type IDs).								

**Example
(C-Series)**

```

FTOS#show linecard 3

-- Line card 11 --
Status          : not present

FTOS#linecard 3 ?
E46TB 36-port GE 10/100/1000Base-T with RJ45 - 8-port FE/GE with SFP - 2-port 10GE with SFP+
E46VB 36-port GE 10/100/1000Base-T with RJ45 and PoE - 8-port FE/GE with SFP - 2-port 10GE with SFP+
E48PB 48-port FE/GE line card with SFP optics (CB)
E48TB 48-port GE 10/100/1000Base-T line card with RJ45 interfaces (CB)
E48VB 48-port GE 10/100/1000Base-T line card with RJ45 interfaces and PoE (CB)
EX4PB 4-port 10GE LAN PHY line card with XFP optics (CB)
EX8PB 8-port 10GE LAN PHY line card with XFP optics (CB)
FTOS#linecard 3 EX4PB
FTOS#show linecard 3

-- Line card 11 --
Status          : not present
Required Type  : EX4PB - 4-port 10GE LAN PHY line card with XFP optics (CB)

```

**Note:** It is advisable to shut down interfaces on a line card that you are hot-swapping.**Related
Commands**

[show linecard](#) Display the line card(s) status.

linecard (4-port 40G line card)



Pre-configure an empty slot in an E-Series ExaScale switch for a 4-port 40 GigabitEthernet line card or reconfigure a slot in which you have hot-swapped a 4-port 40G line card.

Syntax

```

linecard slot-number card-type { linerate | oversubscribed } active-ports
port-set0 port-number [port-number] port-set1 port-number [port-number]

```

Parameters

<i>slot-number</i>	Enter the slot number in which you will use the line card. Range: 0 - 13 on an E1200i; 0 - 5 on an E600i.
<i>card-type</i>	Enter the line card ID. Valid values are: EX04PH: Configures the slot for a 6-port 40GE line card with 10M CAM (LC-EH-40GE-4P). EX04PJ: Configures the slot for a 6-port 40GE line card with 40M CAM (LC-EJ-40GE-4P).
<i>linerate</i>	Configure two ports on the line card to transmit data at full line rate (40 Gbps).
<i>oversubscribed</i>	Configure four ports on the line card for oversubscribed data transmission.
<i>active-ports</i>	Enable the active ports for the specified mode (<i>linerate</i> or <i>oversubscribed</i>).

port-set0 <i>port-number</i> [<i>port-number</i>]	Enter the port number(s) used to specify the active ports on port pipe 0. Port-number range: 0 - 2 . On port pipe 0, 0 - 2 corresponds to ports 0, 1, and 2 on the line card. If you configure linerate mode, enter one port number for port pipe 0. If you configure oversubscribed mode, enter two port numbers (separated by a space).
port-set1 <i>port-number</i> [<i>port-number</i>]	Enter the port number(s) used to specify the active ports on port pipe 1. Port-number range: 0 - 2 . On port pipe 1, 0 - 2 corresponds to ports 3, 4, and 5 on the line card. If you configure linerate mode, enter one port number for port pipe 1. If you configure oversubscribed mode, enter two port numbers (separated by a space).

Defaults

When you insert a 4-port 40G line card in an ExaScale slot, the line card is set to operate in oversubscribed mode with active ports 1 and 2 on port pipe 0 (portset0 1 2) and active ports 0 and 1 on port pipe 1 (portset1 0 1).

Command Modes

CONFIGURATION

Command History

Version 8.5.1.0	Introduced on E-Series ExaScale E600i and E1200i.
-----------------	---

Usage Information

Use this command only to configure an empty slot or a slot in which you have hot-swapped a 4-port 40G line card. Before you insert a different line-card type into a slot pre-configured for a 4-port 40G line card, be sure to enter the `no linecard number` command.



Warning: After you enter the **linecard** command to reconfigure a 4-port 40G line card installed in an ExaScale switch, you are prompted to reboot the line card to activate the settings. Traffic on the line card is interrupted when you reset the card.

On a 4-port 40G line card, there are six ports and two port pipes: 0 and 1. Each port pipe consists of three ports, one CFP port and two QSFP ports:

- Ports 0, 1, and 2 use pipe 0.
- Ports 3, 4, and 5 use pipe 1.

To configure linerate mode, you specify one port on each pipe. To configure oversubscribed mode, you specify two ports on each pipe.

Example

```
FTOS (conf)# linecard 5 EX04PJ oversubscribed active-ports port-set0 1 2 port-set1 0 1

FTOS (conf)# linecard 13 EX04PH linerate active-ports port-set0 2 port-set1 0

FTOS (conf)# linecard 5 EX04PJ linerate active-ports port-set0 1 port-set1 1
Updating the linecard mode or active-ports will require a linecard reboot.
Proceed with reset of linecard? [confirm yes/no]:
```

Related Commands

show linecard	Display the line card(s) status.
-------------------------------	----------------------------------

module power-off

C **E**

Turn off power to a line card at next reboot.

Syntax

module power-off linecard *number*

Parameters

linecard <i>number</i>	Enter the keyword line card followed by the line card slot number C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
------------------------	---

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.1.1.2	Introduced on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

motd-banner

C **E** **S**

Enable a Message of the Day (MOTD) banner to appear when you log in to the system.

Syntax

motd-banner

Defaults

Enabled on all lines.

Command Modes

LINE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

ping

C **E** **S**

S4810

S4820T

Test connectivity between the system and another device by sending echo requests and waiting for replies.

Syntax ping [vrf <id>] [host / ip-address / ipv6-address] [count {number / continuous}] [datagram-size] [timeout] [source (ip src-ipv4-address) / interface] [tos] [df-bit (y/n)] [validate-reply(y/n)] [outgoing-interface] [pattern pattern] [sweep-min-size] [sweep-max-size] [sweep-interval] [ointerface (ip src-ipv4-address) | interface]

Parameter	
<i>vrf</i>	(OPTIONAL) E-Series Only : Enter the VRF Instance name of the device to which you are testing connectivity.
<i>host</i>	(OPTIONAL) Enter the host name of the devices to which you are testing connectivity.
<i>ip-address</i>	(OPTIONAL) Enter the IPv4 address of the device to which you are testing connectivity. The address must be in the dotted decimal format.
<i>ipv6-address</i>	(OPTIONAL) E-Series only Enter the IPv6 address, in the x:x:x::x format, to which you are testing connectivity. Note: The :: notation specifies successive hexadecimal fields of zeros
<i>count</i>	Enter the number of echo packets to be sent. <i>number:</i> 1- 2147483647 <i>Continuous:</i> transmit echo request continuously Default: 5
<i>datagram size</i>	Enter the ICMP datagram size. Range: 36 - 15360 bytes Default: 100
<i>timeout</i>	Enter the interval to wait for an echo reply before timing out. Range: 0 -3600 seconds Default: 2 seconds
<i>source</i>	The IPv4 or IPv6 source address or source interface. For IPv6 addresses, this may be an address in the Global or link-local address zones.
<i>tos</i>	(IPv4 only) Type of service required.
<i>df-bit</i>	(IPv4 only) Enter “Y” or “N” for the “don’t fragment bit” in IPv4 header
<i>outgoing-interface</i>	(IPv6 link-local address) Enter outgoing interface for ping packets to a destination link-local address.
<i>validate-reply</i>	(IPv4 only) Enter “Y” or “N” for reply validation.
<i>pattern pattern</i>	(IPv4 only) Enter the IPv4 data pattern. Range: 0 - FFFF Default: 0xABCD
<i>sweep-min-size</i>	The minimum size of datagram in sweep range. Range: 52 - 15359 bytes
<i>swim-max-size</i>	The maximum size of datagram in sweep range. Range: 52 - 15359 bytes
<i>sweep-interval</i>	Incremental value for sweep size. Range: 1 - 15308 seconds.
<i>ointerface</i>	(IPv4 only) The outgoing interface for multicast packets.

Defaults None

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added support for outgoing-interface option for link-local IPv6 addressing on the S4820T.
Version 8.3.12.0	Added support for outgoing-interface option for link-local IPv6 addressing on the S4810.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.1.0	IPv6 pinging available on management interface.
Version 8.3.1.0	Introduced extended ping options.
Version 8.2.1.0	Introduced on E-Series ExaScale (IPv6)
Version 8.1.1.0	Introduced on E-Series ExaScale (IPv4)
Version 7.9.1.0	Introduced VRF
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced support for C-Series
Version 7.4.1.0	Added support for IPv6 address on E-Series

Usage Information

When you enter the ping command without specifying an IP/IPv6 address (Extended Ping), you are prompted for a target IP/IPv6 address, a repeat count, a datagram size (up to 1500 bytes), a timeout in seconds, and for Extended Commands. [Chapter 21, ICMP Message Types](#) for information on the ICMP message codes that return from a ping command.

Example (IPv4)

```
FTOS#ping 172.31.1.255

Type Ctrl-C to abort.

Sending 5, 100-byte ICMP Echos to 172.31.1.255, timeout is 2 seconds:
Reply to request 1 from 172.31.1.208      0 ms
Reply to request 1 from 172.31.1.216     0 ms
Reply to request 1 from 172.31.1.205     16 ms
:
:
Reply to request 5 from 172.31.1.209     0 ms
Reply to request 5 from 172.31.1.66     0 ms
Reply to request 5 from 172.31.1.87     0 ms

FTOS#
```

Example (IPv6)

```
FTOS#ping 100::1

Type Ctrl-C to abort.

Sending 5, 100-byte ICMP Echos to 100::1, timeout is 2 seconds:
!!!!
Success rate is 100.0 percent (5/5), round-trip min/avg/max = 0/0/0 (ms)
FTOS#
```

The following table provides descriptions for the status response symbols displayed in output.

Table 1 ping command Status Response Symbols and Descriptions

Symbol	Description
!	Each exclamation point indicates receipt of a reply
.	Each period indicates the network server timed out while waiting for a reply
U	A destination unreachable error PDU was received
Q	Source quench (destination too busy)
M	Could not fragment
?	Unknown packet type
&	Packet lifetime exceeded

power-off

C **E**

Turn off power to a selected line card or the standby (extra) Switch Fabric Module (SFM).

Syntax

`power-off {linecard number | sfm sfm-slot-id}`

Parameters

<code>linecard <i>number</i></code>	Enter the keyword <code>linecard</code> and a number for the line card slot number. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
<code>sfm <i>sfm-slot-id</i></code>	Enter the keyword <code>sfm</code> by the slot number of the SFM to which you want to turn off power. Note: This option is supported on E-Series only.

Defaults

Disabled

Command Modes

EXEC Privilege

Command History

Version 8.1.1.2	Introduced on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Related Commands

power-on	Power on a line card or standby SFM.
--------------------------	--------------------------------------

power-on

C **E**

Turn on power to a line card or the standby (extra) Switch Fabric Module (SFM).

Syntax power-on {linecard *number* | sfm *sfm-slot-id*}

Parameters	linecard <i>number</i>	Enter the keyword <code>linecard</code> and a number for the line card slot number. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
	sfm standby	Enter the keyword <code>sfm</code> followed by the slot number of the SFM to power on. Note: This option is supported on E-Series only.

Defaults Disabled

Command Modes EXEC Privilege

Command History	Version 8.1.1.2	Introduced on E-Series ExaScale E600i
	Version 8.1.1.0	Introduced on E-Series ExaScale E1200i
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

Related Commands	power-off	Power off a line card or standby SFM.
-------------------------	---------------------------	---------------------------------------

reload

C **E** **S**

Reboot FTOS.

Syntax reload

Command Modes EXEC Privilege

Command History	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

Usage Information If there is a change in the configuration, FTOS will prompt you to save the new configuration. Or you can save your running configuration with the `copy running-config` command.

Related Commands	reset	Reset a line card, RPM, a standby SFM (EtherScale only), or a failed SFM (TeraScale and ExaScale).
	reset stack-unit	Reset any designated stack member except the management unit

reset

C **E**

Reset a line card, RPM, a standby SFM (EtherScale only), or a failed SFM (TeraScale only).

Syntax reset { linecard *number* [hard | power-cycle] | rpm *number* [hard | power-cycle] | sfm *slot number* | standby }

Parameters	<i>linecard number</i>	Enter the keyword <code>linecard</code> and a number for the line card slot number. (Optional) Add the keyword <code>hard</code> or <code>power-cycle</code> (<code>power-cycle</code> is C-Series only) to power cycle the line card. C-Series Range: 0-7 E-Series Range: 0 to 13 on E1200/E1200i, 0 to 6 on E600/E600i, and 0 to 5 on E300
	<code>hard</code>	Enter the keyword <code>hard</code> to power cycle the line card.
	<code>power-cycle</code>	Enter the keyword <code>power-cycle</code> after upgrading a C-Series FPGA to cause the FPGA to be reprogrammed based on the contents of the FPGA PROM. Note: This option is supported on C-Series only.
	<i>rpm number</i>	Enter the keyword <code>rpm</code> followed by a number for the RPM slot number. (Optional) Add the keyword <code>hard</code> or <code>power-cycle</code> (C-Series only) to power cycle the RPM. Range: 0 to 1
	<code>sfm standby</code>	Enter the keyword <code>sfm standby</code> to reset the standby SFM. Note: This option is supported on E-Series EtherScale only.
	<i>sfm slot number</i>	Enter the keyword <code>sfm</code> followed by the failed or powered-off SFM slot number. Note: Supported on E-Series only

Defaults Disabled.

Command Modes EXEC Privilege

Command History	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

Usage Information The command `reset` without any options is a soft reset, which means FTOS boots the line card from its runtime image. The `hard` option reloads the FTOS image on the line card. Use the `power-cycle` after upgrading an FPGA.

When a soft reset is issued on a line card (`reset linecard number`), FTOS boots the line card from its runtime image. Only when you enter `reset linecard number hard` is the software image reloaded on the line card.

Related Commands	reload	Reboots the system.
	restore fpga-image	Copy the backup C-Series FPGA image to the primary FPGA image.

rpm <slot> location-led



Toggle the location LED on/off on the E-Series ExaScale RPM (LC-EH-RPM).

Syntax rpm slot *number* location-led [on | off]

Parameters	rpm slot <i>number</i>	Enter the slot number E1200i: 0-13 E600i: 0-6
	on off	Toggles the LED on the RPM on or off.
Defaults	OFF	
Command Modes	EXEC	
Command History	Version 8.2.1.0	Introduced on the E-Series ExaScale
Usage Information	The LED setting is not saved through power cycles.	

send

C **E** **S**

Send messages to one or all terminal line users.

Syntax

send [*] | [*line*] | [aux] | [console] | [vty]

Parameters	*	Enter the asterisk character * to send a message to all tty lines.
	<i>line</i>	Send a message to a specific line. Range: 0 to 11
	aux	Enter the keyword aux to send a message to an Auxiliary line. Note: This option is supported on E-Series only.
	console	Enter the keyword console to send a message to the Primary terminal line.
	vty	Enter the keyword vty to send a message to the Virtual terminal
	Defaults	No default behavior or values
Command Modes	EXEC	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 6.5.1.0	Introduced on E-Series
Usage Information	Messages can contain an unlimited number of lines, however each line is limited to 255 characters. To move to the next line, use the <CR>. To send the message use CTR-Z, to abort a message use CTR-C.	

service timestamps

C **E** **S**

Add time stamps to debug and log messages. This command adds either the uptime or the current time and date.

Syntax `service timestamps [debug | log] [datetime [localtime] [msec] [show-timezone] | uptime]`

Parameters	
debug	(OPTIONAL) Enter the keyword <code>debug</code> to add timestamps to debug messages.
log	(OPTIONAL) Enter the keyword <code>log</code> to add timestamps to log messages with severity 0 to 6.
datetime	(OPTIONAL) Enter the keyword <code>datetime</code> to have the current time and date added to the message.
localtime	(OPTIONAL) Enter the keyword <code>localtime</code> to include the localtime in the timestamp.
msec	(OPTIONAL) Enter the keyword <code>msec</code> to include milliseconds in the timestamp.
show-timezone	(OPTIONAL) Enter the keyword <code>show-timezone</code> to include the time zone information in the timestamp.
uptime	(OPTIONAL) Enter the keyword <code>uptime</code> to have the timestamp based on time elapsed since system reboot.

Defaults Not configured.

Command Modes CONFIGURATION

Command History	
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information If you do not specify parameters and enter `service timestamps`, it appears as `service timestamps debug uptime` in the running-configuration.

Use the [show running-config](#) command to view the current options set for the [service timestamps](#) command.

show alarms

C **E** **S**

View alarms for the RPM, SFMs, line cards and fan trays.

Syntax `show alarms [threshold]`

Parameters	
threshold	(OPTIONAL) Enter the keyword <code>threshold</code> to display the temperature thresholds set for the line cards, RPM, and SFMs.

Command Modes

EXEC

EXEC Privilege

Command History

 Version 8.1.1.0 Introduced on E-Series ExaScale

 Version 7.6.1.0 Introduced on S-Series

 Version 7.5.1.0 Introduced on C-Series

 E-Series original Command

Example (E-Series)

FTOS# show alarms

-- Minor Alarms --

Alarm Type	Duration

RPM 0 PEM A failed or rmvd	7 hr, 37 min
SFM 0 PEM A failed or rmvd	7 hr, 37 min
SFM 1 PEM A failed or rmvd	7 hr, 37 min
SFM 2 PEM A failed or rmvd	7 hr, 37 min
SFM 3 PEM A failed or rmvd	7 hr, 37 min
SFM 4 PEM A failed or rmvd	7 hr, 37 min
SFM 5 PEM A failed or rmvd	7 hr, 37 min
SFM 6 PEM A failed or rmvd	7 hr, 37 min
SFM 7 PEM A failed or rmvd	7 hr, 36 min
line card 1 PEM A failed or rmvd	7 hr, 36 min
line card 4 PEM A failed or rmvd	7 hr, 36 min
only 8 SFMs in chassis	7 hr, 35 min

show chassis

C **E**

View the configuration and status of modules in the system. Use this command to determine the chassis mode.

Syntax

show chassis [brief]

Parameters

 brief (OPTIONAL) Enter the keyword **brief** to view a summary of the show chassis output.

Command Modes

EXEC

EXEC Privilege

Command History

 Version 8.1.1.0 Introduced on E-Series ExaScale

 Version 7.5.1.0 Introduced on C-Series

 E-Series original Command

**Example
(E-Series)**

```
FTOS#show chassis brief
Chassis Type   : E1200
Chassis Mode   : TeraScale
Chassis Epoch  : 3.2 micro-seconds

-- Line cards --
Slot  Status          NxtBoot   ReqTyp   CurTyp   Version   Ports
-----
 0  not present
 1  not present
 2  not present
 3  not present
 4  not present
 5  not present
 6  not present
 7  not present
 8  not present
 9  not present
10  not present
11  online             online    E48PF    E48PF    6.1.1.0   48
12  not present
13  not present
    E48PF
-- Route Processor Modules --
Slot  Status          NxtBoot   Version
-----
 0  active             online    6.1.1.0
 1  not present

Switch Fabric State: up

-- Switch Fabric Modules --
Slot  Status
-----
 0  active
 1  active
 2  active
 3  active
 4  active
 5  active
 6  active
 7  active
 8  active

-- Power Entry Modules --
Bay  Status
-----
 0  up
 1  up

-- Fan Status --
Tray  Status  Temp    Volt    Speed          PEM0  PEM1  Fan1  Fan2  Fan3
-----
 0  up      < 50C  12-16V  low/2100-2700 RPM  up    up    up    up    up
 1  up      < 50C  12-16V  low/2100-2700 RPM  up    up    up    up    up
 2  up      < 50C  12-16V  low/2100-2700 RPM  up    up    up    up    up
 3  up      < 50C  12-16V  low/2100-2700 RPM  up    up    up    up    up
 4  up      < 50C  16-20V  med/2700-3200 RPM  up    up    up    up    up
 5  up      < 50C  12-16V  low/2100-2700 RPM  up    up    up    up    up
```

**Related
Commands**

show linecard	View line card status
show rpm	View Route Processor Module status.
show sfm	View Switch Fabric Module status.

show command-history

C **E** **S**

Display a buffered log of all commands entered by all users along with a time stamp.

Syntax show command-history

Defaults None.

Command Mode EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

One trace log message is generated for each command. No password information is saved to this file. A command-history trace log is saved to a file upon an RPM failover. This file can be analyzed by the Dell Force10 TAC to help identify the root cause of an RPM failover.

Example

```
FTOS#show command-history
[11/20 15:47:22]: CMD-(CLI):[service password-encryption]by default from console
[11/20 15:47:22]: CMD-(CLI):[service password-encryption hostname Force10]by default from console
- Repeated 3 times.
[11/20 15:47:23]: CMD-(CLI):[service timestamps log datetime]by default from console
[11/20 15:47:23]: CMD-(CLI):[hostname Force10]by default from console
[11/20 15:47:23]: CMD-(CLI):[enable password 7 *****]by default from console
[11/20 15:47:23]: CMD-(CLI):[username admin password 7 *****]by default from console
[11/20 15:47:23]: CMD-(CLI):[enable restricted 7 *****]by default from console
[11/20 15:47:23]: CMD-(CLI):[protocol spanning-tree rstp]by default from console
[11/20 15:47:23]: CMD-(CLI):[protocol spanning-tree pvst]by default from console
[11/20 15:47:23]: CMD-(CLI):[no disable]by default from console
[11/20 15:47:23]: CMD-(CLI):[interface gigabitethernet 0/1]by default from console
[11/20 15:47:23]: CMD-(CLI):[ip address 1.1.1.1 /24]by default from console
[11/20 15:47:23]: CMD-(CLI):[ip access-group abc in]by default from console
[11/20 15:47:23]: CMD-(CLI):[no shutdown]by default from console
[11/20 15:47:23]: CMD-(CLI):[interface gigabitethernet 0/2]by default from console
[11/20 15:47:23]: CMD-(CLI):[no ip address]by default from console
[11/20 15:47:23]: CMD-(CLI):[shutdown]by default from console
[11/20 15:47:23]: CMD-(CLI):[interface gigabitethernet 0/3]by default from console
[11/20 15:47:23]: CMD-(CLI):[ip address 5.5.5.1 /24]by default from console
[11/20 15:47:23]: CMD-(CLI):[no shutdown]by default from console
[11/20 15:47:23]: CMD-(CLI):[interface gigabitethernet 0/4]by default from console
[11/20 15:47:23]: CMD-(CLI):[no ip address]by default from console
[11/20 15:47:23]: CMD-(CLI):[shutdown]by default from console
[11/20 15:47:23]: CMD-(CLI):[interface gigabitethernet 0/5]by default from console
[11/20 15:47:23]: CMD-(CLI):[no ip address]by default from console
[11/20 15:47:23]: CMD-(CLI):[shutdown]by default from console
[11/20 21:17:35]: CMD-(CLI):[line console 0]by default from console
[11/20 21:17:36]: CMD-(CLI):[exec-timeout 0]by default from console
[11/20 21:17:36]: CMD-(CLI):[exit]by default from console
[11/20 21:19:25]: CMD-(CLI):[show command-history]by default from console
FTOS#
```

Related Commands

clear command history	Clear the command history log.
---------------------------------------	--------------------------------

show command-tree

C **E** **S**

Display the entire CLI command tree, and optionally, display the utilization count for each commands and its options.

Syntax show command-tree [count | no]

Parameters	count	Display the command tree with a usage counter for each command.
	no	Display all of the commands that may be preceded by the keyword no, which is the keyword used to remove a command from the running-configuration.

Defaults None

Command Mode EXEC
EXEC Privilege

Command History	Version 8.2.1.0	Introduced
------------------------	-----------------	------------

Usage Information Reload the system to reset the command-tree counters.

Example

```
FTOS#show command-tree count
!
Enable privilege mode:

enable                command usage:3
  <0-15>              option usage:    0

exit                  command usage:1

show command-tree
  count               command usage:9
                     option usage:    3

show version          command usage:1
!
Global configuration mode:


aaa authentication enable  command usage:1
  WORD                  option usage:    1
default                 option usage:    0
enable                  option usage:    0
line                    option usage:    0
none                    option usage:    0
radius                  option usage:    1
tacacs+                 option usage:    0
```

show console lp

C **E**

View the buffered boot-up log of a line card.

Syntax show console lp *number*

Parameters	<i>number</i>	Enter the line card slot number. Range: 0–7 for the C300 Range: 0–13 for the E1200 Range: 0–6 for the E600 Range: 0–5 for the E300
Defaults	None	
Command Mode	EXEC	EXEC Privilege
Command History	Version 7.5.1.0	Introduced on C-Series E-Series original Command
Usage Information		Caution: Use this command only when you are working directly with a technical support representative to troubleshoot a problem. Do not use this command unless a technical support representative instructs you to do so.

show cpu-traffic-stats

C **E** **S**

View the CPU traffic statistics.

Syntax

show cpu-traffic-stats [*port number* | all | cp | linecard {all | *slot#* } | rp1 | rp2]

Parameters

<i>port number</i>	(OPTIONAL) Enter the port number to display traffic statistics on that port only. Range: 1 to 1568
all	(OPTIONAL) Enter the keyword all to display traffic statistics on all the interfaces receiving traffic, sorted based on traffic.
cp	(OPTIONAL) Enter the keyword cp to display traffic statistics on the specified CPU. Note: This option is supported on E-Series only.
linecard	(OPTIONAL) Enter the keyword linecard followed by either all or the slot number to display traffic statistics on the designated line card. Note: This option is supported on C-Series only.
rp1	(OPTIONAL) Enter the keyword rp1 to display traffic statistics on the RP1. Note: This option is supported on E-Series only.
rp2	(OPTIONAL) Enter the keyword rp2 to display traffic statistics on the RP2. Note: This option is supported on E-Series only.

Defaults

all

Command Modes

EXEC

Command History

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Example (E-Series)

```

FTOS#show cpu-traffic-stats
Processor : CP
-----
    Received 100% traffic on GigabitEthernet 8/2    Total packets:100
    LLC:0, SNAP:0, IP:100, ARP:0, other:0
    Unicast:100, Multicast:0, Broadcast:0

Processor : RP1
-----
    Received 62% traffic on GigabitEthernet 8/2    Total packets:500
    LLC:0, SNAP:0, IP:500, ARP:0, other:0
    Unicast:500, Multicast:0, Broadcast:0

    Received 37% traffic on GigabitEthernet 8/1    Total packets:300
    LLC:0, SNAP:0, IP:300, ARP:0, other:0
    Unicast:300, Multicast:0, Broadcast:0

Processor : RP2
-----
    No CPU traffic statistics.
FTOS#

```

Usage Information

Traffic statistics are sorted on a per-interface basis; the interface receiving the most traffic is displayed first. All CPU and port information is displayed unless a specific port or CPU is specified. Traffic information is displayed for router ports only; not for management interfaces. The traffic statistics are collected only after the [debug cpu-traffic-stats](#) command is executed; not from the system bootup.



Note: After debugging is complete, use the [no debug cpu-traffic-stats](#) command to shut off traffic statistics collection.

Related Commands

debug cpu-traffic-stats	Enable CPU traffic statistics for debugging
---	---

show debugging



View a list of all enabled debugging processes.

Syntax

show debugging

Command Mode

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Example

```
FTOS#show debug
```

```

Generic IP:
  IP packet debugging is on for
  ManagementEthernet 0/0
  Port-channel 1-2
  Port-channel 5
  GigabitEthernet 4/0-3,5-6,10-11,20
  GigabitEthernet 5/0-1,5-6,10-11,15,17,19,21
ICMP packet debugging is on for
  GigabitEthernet 5/0,2,4,6,8,10,12,14,16
FTOS#

```

show environment (C-Series and E-Series)

C **E**

View the system component status (for example, temperature, voltage).

Syntax

show environment [all | fan | linecard | linecard-voltage | PEM | RPM | SFM]

Parameters

all	Enter the keyword all to view all components.
fan	Enter the keyword fan to view information on the fans. The output of this command is chassis dependent. Refer to the examples for show chassis , show command-history , and show cpu-traffic-stats and for a comparison of output.
linecard	Enter the keyword linecard to view only information on line cards
linecard-voltage	Enter the keyword linecard-voltage to view line card voltage information.
PEM	Enter the keyword pem to view only information on power entry modules.
RPM	Enter the keyword rpm to view only information on RPMs.
SFM	Enter the keyword sfm to view only information on SFMs. Note: This option is supported on E-Series only.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Added temperature information for C-Series fans (refer to the last example)
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

Fan speed is controlled by temperatures measured at the sensor located on the fan itself. The fan temperatures shown with this command may not accurately reflect the temperature and fan speed. Refer to your hardware installation guide for fan speed and temperature information.

Example (E1200)

```

FTOS#show environment

-- Fan Status --
Tray  Status  Temp      Volt      Speed      PEM0  PEM1  Fan1  Fan2  Fan3
-----

```

```

0 up < 50C 12-16V low/2100-2700 RPM up up up up up
1 up < 50C 12-16V low/2100-2700 RPM up up up up up
2 up < 50C 12-16V low/2100-2700 RPM up up up up up
3 up < 50C 12-16V low/2100-2700 RPM up up up up up
4 up < 50C 16-20V med/2700-3200 RPM up up up up up
5 up < 50C 12-16V low/2100-2700 RPM up up up up up
-- Power Entry Modules --
Bay Status
-----
0 absent or down
1 up

-- Line Card Environment Status --
Slot Status Temp PEM0 PEM1 Voltage
-----
0 not present
1 not present
2 not present
3 not present
4 not present
5 not present
6 not present
7 not present
8 not present
9 not present
10 not present
11 booting 53C down up ok
12 not present
13 not present

-- RPM Environment Status --
Slot Status Temp PEM0 PEM1 Voltage
-----
0 active 48C down up ok
1 not present

-- SFM Environment Status --
Slot Status Temp PEM0 PEM1
-----
0 active 49C up up
1 active 47C up up
2 active 46C up up
3 active 48C up up
4 active 52C up up
5 active 50C up up
6 active 47C up up
7 active 48C up up
8 active 47C up up

```

Example (E600)

```

FTOS#show environment fan

-- Fan Status --
Status Temp Fan1 Fan2 Fan3 Serial Num Version
-----
up 29C 6000 RPM 7500 RPM 7500 RPM 0.0

FTOS#

```

Example (C300)

```

FTOS#show env fan

-- Fan Status --
-----
Tray 0
-----

```

```

FanNumber   Speed   Status
    0        4170   up
    1        4140   up
    2        3870   up
    3        4140   up
    4        3870   up
    5        3810   up
FTOS#

```

show environment (S-Series)



View S-Series system component status (for example, temperature, voltage).

Syntax

show environment [all | fan | stack-unit *unit-id* | pem]

Parameters

all	Enter the keyword <code>all</code> to view all components.
fan	Enter the keyword <code>fan</code> to view information on the fans. The output of this command is chassis dependent.
stack-unit <i>unit-id</i>	Enter the keyword <code>stack-unit</code> followed by the <i>unit-id</i> to display information on a specific stack member. Range: 0 to 1.
pem	Enter the keyword <code>pem</code> to view only information on power entry modules.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.8.1.0	The output of the <code>show environment fan</code> command for S-Series is changed to display fan speeds instead of just showing the fan status as up or down.
Version 7.6.1.0	Introduced for S-Series. S-Series options and output differ from the C-Series/E-Series version.

Usage Information

The second example shows the output of the `show environment fan` command as it appears prior to FTOS 7.8.1.0.

Example (show environment all)

```

FTOS#show environment all

-- Fan Status --
-----
Unit  TrayStatus  Fan0   Fan1   Fan2   Fan3   Fan4   Fan5
-----
  0    up         up     up     up     up     up     up

-- Power Supplies --
Unit  Bay  Status  Type
-----
  0    0    up      AC
  0    1    absent

-- Unit Environment Status --
Unit  Status      Temp  Voltage
-----
  0*  online      50C   ok

```

```

* Management Unit
-- Fan Status --
Unit Status Speed Fan1 Fan2 Fan3 Fan4 Fan5 Fan6 Serial Num Version

```

```

-----
--
1 up high up up up up up up 1234 1

```

Example
(show environment fan)

```
FTOS#show environment fan
```

```
-- Fan Status --
```

```

-----
Unit TrayStatus Fan0 Fan1 Fan2 Fan3 Fan4 Fan5
0 up up up up up up up

```

Example
(show environment pem)

```
FTOS#show environment pem
```

```
-- Power Supplies --
```

```

-----
Unit Bay Status Type
0 0 up AC
0 1 absent

```

Example
(show environment stack-unit)

```
FTOS#show environment stack-unit 0
```

```
-- Unit Environment Status --
```

```

-----
Unit Status Temp Voltage
0* online 49C ok

```

```
* Management Unit
```

show inventory (C-Series and E-Series)

C **E**

Display the chassis type, components (including media), FTOS version including hardware identification numbers and configured protocols.

Syntax

```
show inventory [media slot]
```

Parameters

media slot	(OPTIONAL) Enter the keyword <i>media</i> followed by the slot number. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300
------------	---

Defaults

No default behavior or values

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Output expanded to include SFP+ media in C-Series.
Version 7.7.1.0	Vendor field removed from output of <i>show inventory media</i> .
Version 7.5.1.0	Introduced on C-Series and expanded to include transceiver media

Version 6.2.1.0	Expanded to include Software Protocol Configured field on E-Series
Version 5.3.1.0	Introduced on E-Series

Usage Information

The `show inventory media` command provides some details about installed pluggable media (SFP, XFP), as shown in the [Example \(show inventory media\)](#). Use the `show interfaces` command to get more details about installed pluggable media.

The display output might include a double asterisk (**) next to the SFMs, for example:

```
...
0      CC-E-SFM **    0004875          7490007411      A
1      CC-E-SFM **    0004889          7490007411      A
...
```

The double asterisk generally indicates the SFM's frequency capabilities, indicating either that they are operating at 125 MHz or that the frequency capability, which is stored in an EPROM, cannot be determined.

If there are no fiber ports in the line card, then just the header under `show inventory media` will be displayed. If there are fiber ports but no optics inserted, then the output will display "Media not present or accessible".

Example (C300)

```
FTOS# show inventory
Chassis Type      : C300
Chassis Mode      : 1.0
Software Version  : FTOS-EF-7.6.1.0
```

Slot	Item	Serial Number	Part Number	Revision
	C300	TY000001400	7520029999	04
3	LC-CB-GE-48T	FX000020075	7520036700	01
0	LC-CB-RPM	0060361	7520029300	02
0	CC-C-1200W-AC	N/A	N/A	N/A
1	CC-C-1200W-AC	N/A	N/A	N/A
0	CC-C300-FAN			

* - standby

```
Software Protocol Configured
```

```
-----
OSPF
```

```
FTOS#
```

Example (E-Series)

```
FTOS# show inventory
Chassis Type      : E300
Chassis Mode      : TeraScale
Software Version  : FTOS-EF-7.5.1.0
```

Slot	Item	Serial Number	Part Number	Revision
	E300	0015259	7520009601	02
1	LC-EF3-10GE-2P	0017259	7520012501	01
2	LC-EF3-GE-48T	0017269	7520009702	01
3	LC-EF3-1GE-24P	0031151	7520014206	04

```

4 LC-EF3-1GE-24P      0017291      7520014202   02
0 LC-EF3-RPM          0031177      7520013808   05
0 CC-E-SFM            0019071      7520003706   A
1 CC-E-SFM            0019120      7520003706   A
1 CC-E300-PWR-DC     TDX0524-00031 7520015400   A
0 CC-E300-FAN        N/A          N/A          N/A

```

* - standby

Software Protocol Configured

```

-----
BFD
BGP
ISIS
OSPF
RIP
OSPFV3

```

FTOS#

Example
(show inventory media slot)

```

FTOS#show inventory media 3
Slot Port Type Media Serial Number      F10Qualified
-----
...
  3   11 SFP  1000BASE-SX U9600L0          Yes
...

```

Example
(show inventory media)

```

FTOS#show inventory media
Slot Port Type Media Serial Number      F10Qualified
-----
1    0 SFP  1000BASE-SX P11BWxz          Yes
  1    1 SFP  1000BASE-LX H833612        Yes
  1    2 SFP  1000BASE-SX B342232075       Yes
  1    3 SFP  1000BASE-SX P6F02U2        Yes
  1    4 SFP  1000BASE-SX AMGX367        Yes
  1    5 SFP  1000BASE-SX B320210155       Yes
  1    6 SFP  1000BASE-SX B342232168       Yes
  1    7 SFP  1000BASE-SX H11VJ8F        Yes
  1    8 SFP  1000BASE-SX AJUR367        Yes
  1    9 SFP  1000BASE-SX AJLH367        Yes
  1   10      Media not present or accessible
  1   11      Media not present or accessible
  1   12 SFP  1000BASE-SX P11DCP3          Yes
!----- output truncated -----!

```

Related Commands

show interfaces	Display a specific interface configuration.
show interfaces transceiver	Display the physical status and operational status of an installed transceiver. The output also displays the transceiver's serial number.

show inventory (S-Series)



Display the S-Series switch type, components (including media), FTOS version including hardware identification numbers and configured protocols.

Syntax

show inventory [media slot]

Parameters

media slot (OPTIONAL) Enter the keyword *media* followed by the stack ID of the stack member for which you want to display pluggable media inventory.

Defaults

No default behavior or values

Command Modes

CONFIGURATION

Command History

Version 7.6.1.0 Introduced this version of the command for S-Series. S-Series output differs from E-Series.

Usage

If there are no fiber ports in the unit, then just the header under *show inventory media* will be displayed. If there are fiber ports but no optics inserted, then the output will display “Media not present or accessible”.

Example (show inventory)

```
FTOS #show inventory
System Type       : S4810
System Mode       : 1.0
Software Version  : E8-3-12-2
```

Unit Type	Serial Number	Part Number	Rev	Piece Part ID	Rev	Svc Tag	Exprs	Svc Code
* 2 S4810-01-64F	HADL123J20113	7590009602	A	N/A	N/A	N/A	N/A	N/A
2 S4810-PWR-AC	H6DL123J20113	7590008502	A	N/A	N/A	N/A	N/A	N/A
2 S4810-FAN	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
2 S4810-FAN	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

* - Management Unit

Software Protocol Configured

FTOS#

Example (show inventory media)

```
FTOS #show inventory media
Slot  Port  Type      Media                Serial Number        F10Qualified
-----
2     0     UNKNOWN   UNKNOWN              YYYYYY              No
2     1     SFP+      10GBASE-CU1M        DM63910000000008   Yes
2     2     SFP       1000BASE-SX         PLE71M5             Yes
2     3     SFP       1000BASE-SX         U9E00M1             Yes
2     4
2     5
2     6
2     7
2     8
2     9
2    10
2    11
2    12     SFP+      10GBASE-CU1M        APF11030021261     Yes
2    13     SFP+      10GBASE-CU1M        APF11030021230     Yes
2    14     SFP+      10GBASE-CU3M        129830840          No
2    15     SFP+      10GBASE-CU3M        TED1417B065        No
2    16
2    17
FTOS #
```


**Related
Commands**

show interfaces	interface configuration.
show interfaces transceiver	Display the physical status and operational status of an installed transceiver. The output also displays the transceiver's serial number.

show linecard

C **E**

Display the line card(s) status.

Syntax

show linecard [*number* [brief] | all]

Parameters

<i>number</i>	(OPTIONAL) Enter a slot number to view information on the line card in that slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600, and 0 to 5 on a E300.
all	(OPTIONAL) Enter the keyword all to view a table with information on all present line cards.
brief	(OPTIONAL) Enter the keyword brief to view an abbreviated list of line card information.

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

**Example
(E-Series)**

```
FTOS#show linecard 11

-- Line card 11 --
Status      : online
Next Boot   : online
Required Type : E48PF - 48-port GE line card with SFP optics (EF)
Current Type  : E48PF - 48-port GE line card with SFP optics (EF)
Hardware Rev  : Base - 1.0  PP0 - n/a  PP1 - n/a
Num Ports    : 48
Up Time      : 12 hr, 37 min
FTOS Version : 6.2.1.x
Jumbo Capable : yes
Boot Flash   : A: 2.0.3.4 B: 2.0.3.4 [booted]
Memory Size  : 268435456 bytes
Temperature  : 49C
Power Status : PEM0: absent or down  PEM1: up
Voltage      : ok
Serial Number :
Part Number   :                Rev
Vendor Id     :
Date Code     :
Country Code  :
FTOS#
```

**Example
(C-Series)**

```

FTOS#show linecard 11

-- Line card 11 --
Status      : online
Next Boot   : online
Required Type : E48PF - 48-port GE line card with SFP optics (EF)
Current Type  : E48PF - 48-port GE line card with SFP optics (EF)
Hardware Rev : Base - 1.0  PP0 - n/a  PP1 - n/a
Num Ports   : 48
Up Time     : 12 hr, 37 min
FTOS Version : 6.2.1.x
Jumbo Capable : yes
Boot Flash  : A: 2.0.3.4 B: 2.0.3.4 [booted]
Memory Size : 268435456 bytes
Temperature : 49C
Power Status : PEM0: absent or down    PEM1: up
Voltage     : ok
Serial Number :
Part Number  :                      Rev
Vendor Id   :
Date Code   :
Country Code :
FTOS#

```

**Example
(show linecard
brief)**

```

FTOS#show linecard 11 brief

-- Line card 11 --
Status      : online
Next Boot   : online
Required Type : E48PF - 48-port GE line card with SFP optics (EF)
Current Type  : E48PF - 48-port GE line card with SFP optics (EF)
Hardware Rev : Base - 1.0  PP0 - n/a  PP1 - n/a
Num Ports   : 48
Up Time     : 11 hr, 24 min
FTOS Version : 6.1.1.0
Jumbo Capable : yes
FTOS#

```

[Table 4-1](#) list the definitions of the fields shown in the examples.

Table 4-1. Descriptions for show linecard output

Field	Description
Line card	Displays the line card slot number (only listed in show linecard all command output).
Status	Displays the line card's status.
Next Boot	Displays whether the line card is to be brought online at the next system reload.
Required Type	Displays the line card type configured for the slot. The Required Type and Current Type must match. Use the linecard command to reconfigure the line card type if they do not match.
Current Type	Displays the line card type installed in the slot. The Required Type and Current Type must match. Use the linecard command to reconfigure the line card type if they do not match.
Hardware Rev	Displays the chip set revision.

Table 4-1. Descriptions for show linecard output

Field	Description
Num Ports	Displays the number of ports in the line card.
Up Time	Displays the number of hours and minutes the card is online.
FTOS Version	Displays the operating software version.
Jumbo Capable	Displays Yes or No indicating if the line card can support Jumbo frames. This field does not state whether the chassis is operating in EtherScale or TeraScale mode.
Boot Flash Ver	Displays the two possible Bootflash versions. The [Booted] keyword next to the version states which version was used at system boot.
Memory Size	List the memory of the line card processor.
Temperature	Displays the temperature of the line card. Minor alarm status if temperature is over 65° C.
Power Status	Lists the type of power modules used in the chassis: <ul style="list-style-type: none"> • AC = AC power supply • DC = DC Power Entry Module (PEM)
Voltage	Displays OK if the line voltage is within range.
Serial Number	Displays the line card serial number.
Part Num	Displays the line card part number.
Vendor ID	Displays an internal code, which specifies the manufacturing vendor.
Date Code	Displays the line card's manufacturing date.

Related Commands

linecard	Pre-configure a line card in a currently empty slot of the system or a different line card type for the slot.
show interfaces linecard	Display information on all interfaces on a specific line card.
show chassis	View information on all elements of the system.
show rpm	View information on the RPM.
show sfm	View information on the SFM.

show linecard boot-information

E

View the line card status and boot information.

Syntax

show linecard boot-information

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 6.5.1.4 Introduced on E-Series

Example

```

FTOS#show linecard boot-information

-- Line cards --
# Status  CurType  Serial  Booted  Next  Cache  Boot
# Status  CurType  number from   boot  boot   flash
-----
0 online  EXW4PF  012345  B: 6.5.1.4  6.5.1.4  A: invalid B: 6.5.1.4  A: 2.3.0.8 [b] B: invalid

1  -

2 online  E48TF   0031318  6.5.1.4  6.5.1.4  A: invalid B: 6.5.1.4  A:
2.3.0.6 B: 2.3.0.8 [b]

3  -

4  -

5  -

6  -
FTOS#

```

[Table 4-2](#) defines the fields in the example.

Table 4-2. Descriptions for show linecard boot-information output

Field	Description
#	Displays the line card slot numbers, beginning with slot 0. The number of slots listed is dependent on your chassis: E-Series: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
Status	Indicates if a line card is online, offline, or booting. If a line card is not detected in the slot, a hyphen (-) is displayed.
CurType	Displays the line card identification number, for example EXW4PF.
Serial number	Displays the line card serial number.
Booted from	Indicates whether the line card cache booted or system booted. In addition, the image with which the line card booted is also displayed. If the line card cache booted, then the output is A: or B: followed by the image in the flash partition (A: 6.5.1.4 or B: 6.5.1.4). If the line card system booted, then display is the current FTOS version number (6.5.1.4).
Next boot	Indicates if the next line card boot is a cache boot or system boot and which image will be used in the boot.
Cache boot	Displays the system image in cache boot flash partition A: and B: for the line card. If the cache boot does not contain a valid image, “invalid” is displayed.
Boot flash	Displays the two possible Boot flash versions. The [b] next to the version number is the current boot flash, that is the image used in the last boot.

Usage Information

The display area of this command uses the maximum 80 character length. If your display area is not set to 80 characters, the display will wrap.

**Related
Commands**

show linecard	View the line card status
upgrade (E-Series version)	Upgrade the boot flash, boot selector, or system image
download alt-boot-image	Download an alternate boot image to the chassis
download alt-full-image	Download an alternate FTOS image to the chassis
download alt-system-image	Download an alternate system image to the chassis

show memory (C-Series and E-Series)



View current memory usage on the system.

Syntax

show memory [cp | lp *slot-number* | rp1 | rp2]

Parameters

cp	(OPTIONAL) Enter the keyword <code>cp</code> to view information on the Control Processor on the RPM.
lp <i>slot-number</i>	(OPTIONAL) Enter the keyword <code>lp</code> and the slot number to view information on the line-card processor in that slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
rp1	(OPTIONAL) Enter the keyword <code>rp1</code> to view information on Route Processor 1 on the RPM. Note: This option is supported on the E-Series only.
rp2	(OPTIONAL) Enter the keyword <code>rp2</code> to view information on Route Processor 2 on the RPM. Note: This option is supported on the E-Series only.

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

**Usage
Information**

The output for `show memory` displays the memory usage of LP part (`sysdlp`) of the system. The `Sysdlp` is an aggregate task that handles all the tasks running on C-Series' and E-Series' LP.

In FTOS Release 7.4.1.0 and higher, the total counter size (for all 3 CPUs) in [show memory \(C-Series and E-Series\)](#) and [show processes memory \(C-Series and E-Series\)](#) will differ based on which FTOS processes are counted.

- In the [show memory \(C-Series and E-Series\)](#) display output, the memory size is equal to the size of the application processes.
- In the [show processes memory \(C-Series and E-Series\)](#) display output, the memory size is equal to the size of the application processes *plus* the size of the system processes.

**Example
(E-Series)**

```

FTOS#show memory
  Statistics On  CP Processor
  =====
Total (b)      Used (b)      Free (b)      Lowest (b)    Largest (b)
452689184     64837834     387851350    387805590    371426976
  Statistics On RP1 Processor
  =====
Total (b)      Used (b)      Free (b)      Lowest (b)    Largest (b)
629145600     4079544      625066056    625066056    0
  Statistics On RP2 Processor
  =====
Total (b)      Used (b)      Free (b)      Lowest (b)    Largest (b)
510209568     47294716    462914852    462617968    446275376
FTOS#

```

[Table 4-3](#) defines the fields displayed in the example.

Table 4-3. Descriptions for show memory output

Field	Description
Lowest	Displays the memory usage the system went to in the lifetime of the system. Indirectly, it indicates the maximum usage in the lifetime of the system: Total minus Lowest.
Largest	The current largest available. This relates to block size and is not related to the amount of memory on the system.

show memory (S-Series)



View current memory usage on the S-Series switch.

Syntax

show memory [stack-unit 0-7]

Parameters

stack-unit 0-7	(OPTIONAL) Enter the keyword stack-unit followed by the stack unit ID of the S-Series stack member to display memory information on the designated stack member.
----------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.6.1.0	Introduced this version of the command for the S-Series
-----------------	---

Usage Information

The output for show memory displays the memory usage of LP part (sysdlp) of the system. The Sysdlp is an aggregate task that handles all the tasks running on the S-Series' CPU.

Example

```

FTOS#show memory stack-unit 0
  Statistics On Unit 0 Processor
  =====
Total (b)      Used (b)      Free (b)      Lowest (b)    Largest (b)
268435456     4010354      264425102    264375410    264425102

```

**Example
(S4820T)**

```
FTOS#show memory stack 0
      Statistics On Unit 0 Processor
      =====
      Total (b)      Used (b)      Free (b)      Lowest (b)      Largest (b)
2147483648      4322398      2143161250      2142548382      2143161250
FTOS#
```

show processes cpu (C-Series and E-Series)

C E

View CPU usage information based on processes running in the system.

Syntax

show processes cpu [cp | rp1 | rp2] [lp [*linecard-number* [1-99] | all | summary]

Parameters

cp	(OPTIONAL) Enter the keyword cp to view CPU usage of the Control Processor.
rp1	(OPTIONAL) Enter the keyword rp1 to view CPU usage of the Route Processor 1. Note: This option is supported on the E-Series only.
rp2	(OPTIONAL) Enter the keyword rp2 to view CPU usage of the Route Processor 2. Note: This option is supported on the E-Series only.
lp <i>linecard</i> [1-99]	(OPTIONAL) Enter the keyword lp followed by the line card number to display the CPU usage of that line card. The optional 1-99 variable sets the number of tasks to display in order of the highest CPU usage in the past five (5) seconds.
lp all	(OPTIONAL) Enter the keyword lp all to view CPU utilization on all active line cards.
lp summary	(OPTIONAL) Enter the keyword lp summary to view a summary of the line card CPU utilization.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Modified: Added the lp all option
Version 6.5.1.0	Modified: The granularity of the output for rp1 and rp2 is changed. The the output is now at the process level, so process-specific statistics are displayed.

**Example
(show processes
cpu)**

```
FTOS#show processes cpu
      CPU Statistics On CP Processor
      =====

CPU utilization for five seconds: 4%/2%; one minute: 2%; five minutes: 2%
PID      Runtime (ms)  Invoked      uSecs      5Sec      1Min      5Min  TTY
Process
0xd02e4e8  1498633      89918      16666      3.00%      2.67%      2.67%  0
KP
0xd9d4c70      0          0          0          0.00%      0.00%      0.00%  0
tLogTask
```

0xd9cd200	0	0	0	0.00%	0.00%	0.00%	0
soc_dpc							
0xd9bf588	0	0	0	0.00%	0.00%	0.00%	0
tARL							
0xd9bd2f8	0	0	0	0.00%	0.00%	0.00%	0
tBCMlink							
0xd9bb0e0	700	42	16666	0.00%	0.00%	0.00%	0
tBcmTask							
0xd9798d0	106683	6401	16666	0.00%	0.00%	0.00%	0
tNetTask							
0xd3368a0	0	0	0	0.00%	0.00%	0.00%	0
tWdbTask							
0xd3329b0	166	10	16600	0.00%	0.00%	0.00%	0
tWdtTask							
0xd32a8c8	102500	6150	16666	0.00%	0.00%	0.00%	0
tme							
0xd16b1d8	12050	723	16666	0.00%	0.00%	0.00%	0
ipc							
0xd1680c8	33	2	16500	0.00%	0.00%	0.00%	0
irc							
0xd156008	116	7	16571	0.00%	0.00%	0.00%	0
RpmAvailMgr							
0xd153ab0	216	13	16615	0.00%	0.00%	0.00%	0
ev							
-more-							

**Example
(show processes
cpu rp1)**

```
FTOS#show processes cpu rp1
```

CPU utilization for five seconds: 0%/0%; one minute: 0%; five minutes: 0%

PID	Runtime (ms)	Invoked	uSecs	5Sec	1Min	5Min	TTY
Process							
0x0000007c	60	6	10000	0.00%	0.00%	0.00%	0
ospf							
0x00000077	460	46	10000	0.00%	0.00%	0.00%	0
dsm							
0x00000074	100	10	10000	0.00%	0.00%	0.00%	0
ipml							
0x0000006e	180	18	10000	0.00%	0.00%	0.00%	0
rtm							
0x0000006b	100	10	10000	0.00%	0.00%	0.00%	0
rip							
0x00000068	120	12	10000	0.00%	0.00%	0.00%	0
acl							
0x00000064	690	69	10000	0.00%	0.00%	0.00%	0
sysdl							
0x00000062	20	2	10000	0.00%	0.00%	0.00%	0
sysmon							
0x00000024	880	88	10000	0.00%	0.00%	0.00%	0
sshd							
0x00000022	0	0	0	0.00%	0.00%	0.00%	0
inetd							
0x00000020	2580	258	10000	0.00%	0.00%	0.00%	0
mount_mfs							
0x00000013	0	0	0	0.00%	0.00%	0.00%	0
mount_mfs							
0x00000006	80	8	10000	0.00%	0.00%	0.00%	0
sh							
0x00000005	30	3	10000	0.00%	0.00%	0.00%	0
aiodoned							
0x00000004	840	84	10000	0.00%	0.00%	0.00%	0
ioflush							
0x00000003	250	25	10000	0.00%	0.00%	0.00%	0
reaper							


```

0x00000002      0      0      0  0.00%  0.00%  0.00%  0
pagedaemon
0x00000001     160     16  10000  0.00%  0.00%  0.00%  0
init
0x00000000     700     70  10000  0.00%  0.00%  0.00%  0
swapper
0x00000088     260     26  10000  0.00%  0.00%  0.00%  0
bgp

```

**Example
(show processes
cpu rp2)**

```

FTOS#show processes cpu rp2
CPU utilization for five seconds: 0%/0%; one minute: 0%; five minutes: 0%

```

PID	Runtime(ms)	Invoked	uSecs	5Sec	1Min	5Min	TTY
Process							
0x00000090	140	14	10000	0.00%	0.00%	0.00%	0
vrrp							
0x0000008d	120	12	10000	0.00%	0.00%	0.00%	0
fvrp							
0x00000088	360	36	10000	0.00%	0.00%	0.00%	0
xstp							
0x00000084	60	6	10000	0.00%	0.00%	0.00%	0
span							
0x00000083	180	18	10000	0.00%	0.00%	0.00%	0
pim							
0x00000080	80	8	10000	0.00%	0.00%	0.00%	0
igmp							
0x0000007b	130	13	10000	0.00%	0.00%	0.00%	0
ipm2							
0x00000078	700	70	10000	0.00%	0.00%	0.00%	0
mrtm							
0x00000074	100	10	10000	0.00%	0.00%	0.00%	0
l2mgr							
0x00000070	80	8	10000	0.00%	0.00%	0.00%	0
l2pm							
0x0000006c	80	8	10000	0.00%	0.00%	0.00%	0
arpm							
0x00000068	60	6	10000	0.00%	0.00%	0.00%	0
acl2							
0x00000064	750	75	10000	0.00%	0.00%	0.00%	0
sysd2							
0x00000062	0	0	0	0.00%	0.00%	0.00%	0
sysmon							
0x00000024	880	88	10000	0.00%	0.00%	0.00%	0
sshd							
0x00000022	0	0	0	0.00%	0.00%	0.00%	0
inetd							
0x00000020	2250	225	10000	0.00%	0.00%	0.00%	0
mount_mfs							
0x00000013	0	0	0	0.00%	0.00%	0.00%	0
mount_mfs							
0x00000006	100	10	10000	0.00%	0.00%	0.00%	0
sh							
0x00000005	0	0	0	0.00%	0.00%	0.00%	0
aiodoned							
0x00000004	960	96	10000	0.00%	0.00%	0.00%	0
ioflush							
0x00000003	140	14	10000	0.00%	0.00%	0.00%	0
reaper							
0x00000002	0	0	0	0.00%	0.00%	0.00%	0
pagedaemon							
0x00000001	160	16	10000	0.00%	0.00%	0.00%	0
init							

```

0x00000000      700      70      10000      0.00%      0.00%      0.00%      0
swapper
0x00000098      140      14      10000      0.00%      0.00%      0.00%      0
msdp

```

Usage Information

The CPU utilization for the last five seconds as shown in the first example is 4%/2%. The first number (4%) is the CPU utilization for the last five seconds. The second number (2%) indicates the percent of CPU time spent at the interrupt level.

show processes cpu (S-Series)



Display CPU usage information based on processes running in an S-Series.

Syntax

```
show processes cpu [management-unit 1-99 [details] | stack-unit 0-7 | summary | ipc |
memory [stack-unit 0-7]]
```

Parameters

management-unit 1-99 [details]	(OPTIONAL) Display processes running in the control processor. The 1-99 variable sets the number of tasks to display in order of the highest CPU usage in the past five (5) seconds. Add the details keyword to display all running processes (except sysdip). Example 3.
stack-unit 0-7	(OPTIONAL) Enter the keyword stack-unit followed by the stack member ID (Range 0 to 7). As an option of show processes cpu, this option displays CPU usage for the designated stack member. Example 2. Or, as an option of memory, this option limits the output of memory statistics to the designated stack member. Example 5.
summary	(OPTIONAL) Enter the keyword summary to view a summary view of CPU usage for all members of the stack. Example 1.
ipc	(OPTIONAL) Enter the keyword ipc to display inter-process communication statistics.
memory	(OPTIONAL) Enter the keyword memory to display memory statistics. Example 4.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.7.1.0	Modified: Added management-unit [details] keywords.
Version 7.6.1.0	Introduced for S-Series

Example (show processes cpu summary)

```

FTOS#show processes cpu summary

CPU utilization 5Sec 1Min 5Min
-----
Unit0  0%   0%   0%

CPU utilization  5Sec   1Min   5Min
-----
Unit1* 1%   0%  0%

```

```
Unit2 0% 0% 0%
Unit3 0% 0% 0%
```

```
* Mgmt Unit
```

Example
(show processes cpu management-unit)

```
FTOS#show processes cpu management-unit 0
```

```
CPU utilization for five seconds: 1%/0%; one minute: 10%; five minutes: 2%
```

PID	Runtime(ms)	Invoked	uSecs	5Sec	1Min	5Min	TTY
Process							
272	20	2	10000	0.00%	0.00%	0.00%	0
topoDPC							
271	0	0	0	0.00%	0.00%	0.00%	0
bcmNHOP							
270	0	0	0	0.00%	0.00%	0.00%	0
bcmDISC							
269	0	0	0	0.00%	0.00%	0.00%	0
bcmATP-RX							
268	0	0	0	0.00%	0.00%	0.00%	0
bcmATP-TX							
267	30	3	10000	0.00%	0.00%	0.00%	0
bcmSTACK							
266	380	38	10000	0.00%	0.00%	0.08%	0
bcmRX							
265	30	3	10000	0.00%	0.00%	0.00%	0
bcmLINK.0							
264	0	0	0	0.00%	0.00%	0.00%	0
bcmXGS3AsyncTX							
263	0	0	0	0.00%	0.00%	0.00%	0
bcmTX							
262	160	16	10000	0.00%	0.00%	0.00%	0
bcmCNTR.0							
260	0	0	0	0.00%	0.00%	0.00%	0
bcmDPC							
253	10690	1069	10000	0.00%	10.00%	2.97%	0
sysd							
251	2380	238	10000	0.00%	0.00%	0.50%	0
kfldintr							
58	30	3	10000	0.00%	0.00%	0.00%	0
sh							
36	50	5	10000	0.00%	0.00%	0.00%	0 13 5 3 1

```
!----- output truncated -----!
```

Example
(show processes cpu stack-unit)

```
FTOS#show processes cpu stack-unit 0
```

```
CPU Statistics On Unit0 Processor
=====
```

```
CPU utilization for five seconds: 0%/0%; one minute: 0%; five minutes: 0%
```

PID	Runtime(ms)	Invoked	uSecs	5Sec	1Min	5Min	TTY	Process
52	8260	826	10000	0.00%	0.00%	0.22%	0	sysd
124	1160	116	10000	0.00%	0.00%	0.12%	0	KernLrnAgMv
116	70	7	10000	0.00%	0.00%	0.00%	0	xstp
109	50	5	10000	0.00%	0.00%	0.00%	0	span
108	60	6	10000	0.00%	0.00%	0.00%	0	pim
103	70	7	10000	0.00%	0.00%	0.00%	0	igmp
100	70	7	10000	0.00%	0.00%	0.00%	0	mrtm
96	70	7	10000	0.00%	0.00%	0.00%	0	l2mgr
92	100	10	10000	0.00%	0.00%	0.00%	0	l2pm
86	30	3	10000	0.00%	0.00%	0.00%	0	arpm
83	40	4	10000	0.00%	0.00%	0.00%	0	ospf
80	100	10	10000	0.00%	0.00%	0.00%	0	dsm
74	60	6	10000	0.00%	0.00%	0.00%	0	rtm
70	30	3	10000	0.00%	0.00%	0.00%	0	rip

68	120	12	10000	0.00%	0.00%	0.00%	0	ipml
64	70	7	10000	0.00%	0.00%	0.00%	0	acl
63	30	3	10000	0.00%	0.00%	0.00%	0	bcmLINK.1
62	290	29	10000	0.00%	0.00%	0.00%	0	bcmCNTR.1
61	50	5	10000	0.00%	0.00%	0.00%	0	bcmRX
60	40	4	10000	0.00%	0.00%	0.00%	0	bcmLINK.0
59	0	0	0	0.00%	0.00%	0.00%	0	bcmXGS3AsyncTX
58	0	0	0	0.00%	0.00%	0.00%	0	bcmTX
57	340	34	10000	0.00%	0.00%	0.00%	0	bcmCNTR.0
55	0	0	0	0.00%	0.00%	0.00%	0	bcmDPC
117	60	6	10000	0.00%	0.00%	0.00%	0	frrp
28	0	0	0	0.00%	0.00%	0.00%	0	inetd
21	450	45	10000	0.00%	0.00%	0.00%	0	mount_mfs
18	130	13	10000	0.00%	0.00%	0.00%	0	mount_mfs
11	0	0	0	0.00%	0.00%	0.00%	0	syslogd
6	30	3	10000	0.00%	0.00%	0.00%	0	sh
5	10	1	10000	0.00%	0.00%	0.00%	0	aiodoned
4	0	0	0	0.00%	0.00%	0.00%	0	ioflush
3	20	2	10000	0.00%	0.00%	0.00%	0	reaper
2	0	0	0	0.00%	0.00%	0.00%	0	pagedaemon
1	0	0	0	0.00%	0.00%	0.00%	0	init
0	10	1	10000	0.00%	0.00%	0.00%	0	swapper

**Example
(show processes
memory)**

FTOS#show processes memory

```

Memory Statistics On Unit 0 Processor (bytes)
=====
start
Total      : 160231424, MaxUsed      : 130596864 [09/19/2007 03:11:17]
CurrentUsed: 130596864, CurrentFree: 29634560
SharedUsed : 14261872, SharedFree  : 6709672
PID Process      ResSize      Size      Allocs      Frees      Max      Current
124 KernLrnAgMv  140410880      0          0          0          0          0
117 frrp          5677056      217088      87650      0          87650      87650
116 xstp          7585792      1536000     551812     49692     518684     502120
109 span          5709824      221184     55386      0          55386     55386
108 pim           5869568      720896     12300      0          12300     12300
103 igmp          5513216     327680     18236     16564     18236     1672
100 mrtn          6905856     516096     72846      0          72846     72846
96 l2mgr         6107136     491520     254858     115948     172038     138910
92 l2pm          5607424     221184     667578     579740     120966     87838
86 arpm          5353472     208896     54528     16564     54528     37964
83 ospf           4210688     475136          0          0          0          0
80 dsm           6057984     552960     22838      0          22838     22838
74 rtm           6311936     577536     574792     298152     376024     276640
70 rip           5001216     249856          528      0          528      528
68 ipml          5292032     339968     67224      0          67224     67224
64 acl           5607424     544768     140086     66256     123522     73830
63 bcmLINK.1  40410880      0          0          0          0          0
62 bcmCNTR.1  140410880      0          0          0          0          0
61 bcmRX         140410880      0          0          0          0          0
60 bcmLINK.0  140410880      0          0          0          0          0
59 bcmXGS3AsyncTX 140410880      0          0          0          0          0
58 bcmTX         140410880      0          0          0          0          0
57 bcmCNTR.0  140410880      0          0          0          0          0
55 bcmDPC        140410880      0          0          0          0          0
52 sysd          44650496     22876160     3930856     1358248     2589172     2572608
28 inetd         876544       69632          0          0          0          0
21 mount_mfs    22642688     1953792          0          0          0          0
!---output truncated -----!

```

**Example
(show processes
memory stack-unit)**

FTOS#show processes memory stack-unit 0

Memory Statistics On Unit 0 Processor (bytes)

```

=====
start
Total      : 160231424, MaxUsed      : 130596864 [09/19/2007 03:11:17]
CurrentUsed: 130560000, CurrentFree: 29671424
SharedUsed : 14261872, SharedFree  : 6709672

PID  Process      ResSize      Size      Allocs      Frees      Max      Current
124 KernLrnAgMv  140410880    0          0           0           0         0         0
117 frrp          5677056     217088     87650       0           87650    87650
116 xstp          7585792     1536000    551812      49692       518684   502120
109 span          5709824     221184     55386       0           55386    55386
108 pim          5869568     720896     12300       0           12300    12300
103 igmp          5513216     327680     18236       16564       18236    1672
100 mrmt         6905856     516096     72846       0           72846    72846
96  l2mgr         6107136     491520     254858      115948      172038   138910
92  l2pm          5607424     221184     667578      579740      120966   87838
86  arpm          5353472     208896     54528       16564       54528    37964
83  ospf          4210688     475136     0           0           0         0
80  dsm           6057984     552960     22838       0           22838    22838
74  rtm           6311936     577536     574792      298152      376024   276640
70  rip           5001216     249856     528         0           528      528
68  ipml          5292032     339968     67224       0           67224    67224
!----output truncated -----!

```

Related Commands

show hardware layer2 acl	Display Layer 2 ACL data for the selected stack member and stack member port-pipe.
show hardware layer3	Display Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.
show hardware stack-unit	Display the data plane or management plane input and output statistics of the designated component of the designated stack member.
show hardware system-flow	Display Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.
show interfaces stack-unit	Display information on all interfaces on a specific S-Series stack member.
show processes memory (S-Series)	Display CPU usage information based on processes running in an S-Series

show processes ipc flow-control

C E S

Display the Single Window Protocol Queue (SWPQ) statistics.

Syntax

show processes ipc flow-control [cp | rp1 | rp2 | lp *linecard-number*]

Parameters

cp	(OPTIONAL) Enter the keyword cp to view the Control Processor's SWPQ statistics.
rp1	(OPTIONAL) Enter the keyword rp1 to view the Control Processor's SWPQ statistics on Route Processor 1.*

rp2	(OPTIONAL) Enter the keyword <code>rp2</code> to view the Control Processor's SWPQ statistics on Route Processor 2.*
lp <i>linecard-number</i>	(OPTIONAL) Enter the keyword <code>lp</code> followed by the line card number to view the Control Processor's SWPQ statistics on the specified line card.*

* In the **S-Series**, this command supports only the `cp` keyword, not the `rp1`, `rp2`, and `lp` options.

Defaults No default values or behavior

Command Modes EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Example (C-Series)

```
FTOS# show processes ipc flow-control cp

Q Statistics on CP Processor
  TxProcess   RxProcess   Cur   High   Time   Retr   Msg   Ack   Aval   Max
             Len      Mark  Out   ies   Sent   Rcvd  Retra  Retra
ACL0         RIM0        0     0     0     0     0     0    10    10
  ACL0       DIFFSERV0  0     0     0     0     0     0     0    10    10
  ACL0       IGMP0      0     0     0     0     0     0     0    10    10
  ACL0       PIM0      0     0     0     0     0     0     0    50    50
  ACL0       ACL20     0     1     0     0     2     2     7    255   255
  CFG0       CFGDATASYN 0     2     0     0     7     7     9    25    25
  DHCP0     ACL0      0     1     0     0     9     9     0    25    25
  DHCP0     IFMGR0    0     0     0     0     0     0     1   136   136
  RIM0       ARPMGR0   0     1     0     0     1     1    50    50
  ACL20     IGMP0     0     0     0     0     4     4     0    25    25
  LACP0     IFMGR0    0     2     0     0     0     0    100  100
  ARPMGR0   MRIM0     0     0     0     0     0     0     0    50    50
  ACL20     PIM0     0     0     0     0     1     1     1    25    25
  MACMGR0   ACL0     0     1     0     0     0     0    100  100
  TCLASSMGR0 ARPMGR0  0     0     0     0     0     0     8     8
  IFMGR0    IPMGR2    0     6     0     0    44    44
!-----output truncated-----!
```

Example (E-Series)

```
FTOS# show processes ipc flow-control cp

Q Statistics on CP Processor
  TxProcess   RxProcess   Cur   High   Time   Retr   Msg   Ack   Aval   Max
             Len      Mark  Out   ies   Sent   Rcvd  Retra  Retra
  DHCP0     ACL0      0     1     0     0     6     6    25    25
  DHCP0     IFMGR0    0     0     0     0     0     0    25    25
  IFMGR0     FEFD0    0     3     0     0    27    27     8     8
  IFMGR0     IPMGR0   0     6     0     0    44    44     8     8
  IFMGR0     SNMP0    0     1     0     0    16    16     8     8
  IFMGR0     SFL_CP0  0     4     0     0    31    31     8     8
  IFMGR0     EVENTTERMLOG0 0     1     0     0     6     6     8     8
  IFMGR0     PORTMIRRO 0     0     0     0     0     0     8     8
  IFMGR0     DHCP0    0     1     0     0     6     6     8     8
  IFMGR0     TCLASSMGR0 0     2     0     0    13    13     8     8
```

```

IFMGR0      VRRP0      0      3      0      0      25      25      8      8
IFMGR0      MRTMO      0      2      0      0      21      21      8      8
TCLASSMGR0  ARPMGR0     0      0      0      0      0      0      100    100
IFMGR0      IPMGR2     0      6      0      0      44      44      8      8
!-----output truncated-----!

```

Table 4-4 list the definitions of the fields shown in the examples above.

Table 4-4. Description of show processes ipc flow-control cp output

Field	Description
Source QID /Tx Process	Source Service Identifier
Destination QID/Rx Process	Destination Service Identifier
Cur Len	Current number of messages enqueued
High Mark	Highest number of packets in the queue at any point of time
#of to / Timeout	Timeout count
#of Retr /Retries	Number of retransmissions
#msg Sent/Msg Sent/	Number of messages sent
#msg Ackd/Ack Rcvd	Number of messages acknowledged
Retr /Available Retra	Number of retries left
Total/ Max Retra	Number of retries allowed

**Example
(show processes
ipc flow-control
rp1)**

```

FTOS# show processes ipc flow-control rp2

[qid] Source->Dest      Cur High #of #of #msg #msg Retr total
      Len Mark to  Retr Sent Ackd
-----
[1] unknown2->unknown2  0   0  0  0   0   0   3   3
[2] l2pm0->spanMgr0    0   2  0  0 2298 2298 25 25
[3] fvrp0->macMgr0     0   0  0  0   0   0  25 25
[4] l2pm0->fvrp0       0   2  0  0 1905 1905 25 25
[5] fvrp0->l2pm0       0   0  0  0   0   0  25 25
[6] stp0->l2pm0        0   0  0  0   0   0  25 25
[7] spanMgr0->macMgr0  0   0  0  0   0   0  25 25
[8] spanMgr0->ipMgr0   0   0  0  0   0   0  25 25
FTOS#

```

**Example
(show processes
ipc flow-control
lp1)**

```

FTOS#show processes ipc flow-control lp 10
Q Statistics on LP 10
      TxProcess RxProcess      Cur   High  Time  Retries  Msg   Ack   Aval  Max
      Len      Mark  Out    ies    Sent Rcvd  Retra Retra
-----
ACL_AGENT10      PIMO      0     0    0     0     0     0     20    20
ACL_AGENT10      PIMO      0     0    0     0     0     0     20    20
FRRPAGT10        FRRP0     0     0    0     0     0     0     30    30
IFAGT10          IFMGR0    0     1    0     0     1     1     8     8
LPDMACAGENT10    MACMGR0   0     0    0     0     0     0     25    25
FTOS#

```

**Example
(S-Series)**

```

Force10#show processes ipc flow-control
Q Statistics on CP Processor
      TxProcess RxProcess      Cur   High  Time  Retr  Msg   Ack   Aval  Max
      Len      Mark  Out   ies  Sent Rcvd  Retra Retra
-----
ACL0          RTM0      0     0    0     0     0     0     10    10

```

```

        ACL0      DIFFSERV0      0      0      0      0      0      0      10      10
        ACL0      IGMP0          0      0      0      0      0      0      10      10
        ACL0      PIM0           0      0      0      0      0      0      10      10
        LACP0     IFMGR0         0      0      0      0      0      0      25      25
        RTM0      ARPMGR0        0      0      0      0      0      0      136     136
        MACMGR0   ACL0           0      0      0      0      0      0      25      25
        ARPMGR0   MRTM0          0      0      0      0      0      0      100     100
        DHCP0     ACL0           0      1      0      0      1      1      25      25
        DHCP0     IFMGR0         0      0      0      0      0      0      25      25
        L2PM0     SPANMGR0        0      2      0      0      14     14      25      25
        ARPMGR0   FIBAGT0          0      1      0      0      1      1      100     100
        SPANMGR0   MACMGR0          0      0      0      0      0      0      25      25
        SPANMGR0   IPMGR0          0      0      0      0      0      0      25      25
        SPANMGR0   L2PM0          0      0      0      0      0      0      25      25
        STP0      L2PM0          0      0      0      0      0      0      25      25
        RTM0      FIBAGT0          0      2      0      0      4      4      255     255
        L2PM0     STP0           0      5      0      0      5      5      25      25
        ACL_AGENT0 PIM0           0      0      0      0      0      0      20      20
        ACL_AGENT0 PIM0           0      0      0      0      0      0      20      20
        FRRP0     L2PM0          0      0      0      0      0      0      25      25
        L2PM0     FRRP0          0      1      0      0      13     13      25      25
        ACL0      ACL_AGENT0      0      4      0      0      7      7      90      90
        ACL0      MACAGENT0       0      0      0      0      0      0      90      90
        IFMGR0   EVENTTERMLOG0      0      1      0      0      1      1      8      8
        IFMGR0   SNMP0           0      1      0      0      1      1      8      8
        IFMGR0   IPMGR0          0      7      0      0      9      9      8      8
        IFMGR0   DIFFSERV0        0      2      0      0      3      3      8      8
        DIFFSERV0 ACL_AGENT0      0      0      0      0      0      0      100     100
!-----output truncated -----!

```

Usage Information

The Single Window Protocol (SWP) provides flow control-based reliable communication between the sending and receiving software tasks.

Important Points to Remember

- A sending task enqueues messages into the SWP queue³ for a receiving task and waits for an acknowledgement.
- If no response is received within a defined period of time, the SWP timeout mechanism resubmits the message at the head of the FIFO queue.
- After retrying a defined number of times, the following timeout message is generated:

SWP-2-NOMORETIMEOUT

- In the display output in the example above, a retry (Retries) value of zero indicates that the SWP mechanism reached the maximum number of retransmissions without an acknowledgement.

show processes memory (C-Series and E-Series)



View memory usage information based on processes running in the system.

Syntax

```
show processes memory [cp | lp slot-number {lp all | lp summary} | rp1 | rp2]
```


Parameters

cp	(OPTIONAL) Enter the keyword <code>cp</code> to view memory usage of the Control Processor.
lp <i>slot-number</i>	(OPTIONAL) Enter the keyword <code>lp</code> and the slot number to view information on the line-card processor in that slot. C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/E1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
lp all	(OPTIONAL) Enter the keyword <code>lp all</code> to view CP memory usage on all active line cards.
lp summary	(OPTIONAL) Enter the keyword <code>lp summary</code> to view a summary of the line card CP memory usage.
rp1	(OPTIONAL) Enter the keyword <code>rp1</code> to view memory usage of the Route Processor 1. Note: This option is supported on the E-Series only.
rp2	(OPTIONAL) Enter the keyword <code>rp2</code> to view memory usage of the Route Processor 2. Note: This option is supported on the E-Series only.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.2	Introduced on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Added <code>lp all</code> and <code>lp summary</code> options
Version 6.5.1.0	For <code>rp1</code> and <code>rp2</code> only, the output displays memory consumption of all the processes including a summary, as shown in the second and third examples.

Usage Information

The output for `show process memory` displays the memory usage statistics running on CP part (`sysd`) of the system. The `Sysd` is an aggregate task that handles all the tasks running on C-Series' and E-Series' CP.

In FTOS Release 7.4.1.0 and higher, the total counter size (for all 3 CPUs) in `show memory` and `show processes memory` will differ based on which FTOS processes are counted.

- In the [show memory \(C-Series and E-Series\)](#) display output, the memory size is equal to the size of the application processes.
- In the [show processes memory \(C-Series and E-Series\)](#) display output, the memory size is equal to the size of the application processes *plus* the size of the system processes.

Example

```
FTOS#show processes memory
Memory Statistics On CP Processor (bytes)
=====
Total: 452689184, MaxUsed: 64886986, CurrentUsed: 64873866, Current
TaskName TotalAllocated TotalFreed MaxHeld CurrentHolding
tRootTask 39083408 1395840 38143920 37687568
```

tARL	64	0	64	64
tBcmTask	256	0	256	256
tPortmapd	18560	0	18560	18560
tShell	3440	0	3440	3440
tPingTmo0	0	1088	0	0
tExcTask	0	592864	0	0
tme	4002494	192	4002302	4002302
ipc	34060	192	34060	33868
irc	943436	0	943436	943436
RpmAvailMgr	9376	32	9344	9344
ev	133188	0	133188	133188
evterm	26752	0	26752	26752
evhdlr	2528	8064	2528	0
d1m	7556256	7366960	1239104	189296
d1a	416	0	416	416
tsm	15136	0	15136	15136
fmg	766560	0	766560	766560
fileProc	416	0	416	416
sysAdmTsk	42028	0	42028	42028

Example
(show processes
memory rp1)

FTOS#show processes memory rp1

Total : 954650624, MaxUsed : 114135040 [3/8/2006 15:1:42]
CurrentUsed: 114135040, CurrentFree: 840515584
SharedUsed : 7849096, SharedFree : 13122448

PID	Process	ResSize	Size	Allocs	Frees	Max	Current
124	ospf	3215360	425984	0	0	0	0
119	dsm	7749632	1859584	797026	0	797026	797026
114	ipm1	3821568	229376	297324	0	297324	297324
112	rtm	4722688	421888	925008	0	925008	925008
107	rip	3731456	253952	198216	0	198216	198216
104	acl	4734976	430080	1127524	0	1127524	1127524
100	sysd1	11636736	2019328	965798	0	965798	965798
98	sysmon	528384	94208	0	0	0	0
36	sshd	1286144	430080	0	0	0	0
34	inetd	663552	98304	0	0	0	0
32	mount_mfs	42397696	2514944	0	0	0	0
19	mount_mfs	364544	2449408	0	0	0	0
6	sh	446464	737280	0	0	0	0
5	aiodoned	76529664	0	0	0	0	0
4	ioflush	76529664	0	0	0	0	0
3	reaper	76529664	0	0	0	0	0
2	pagedaemon	76529664	0	0	0	0	0
1	init	139264	2375680	0	0	0	0
0	swapper	76529664	0	0	0	0	0

Example
(show processes
memory rp2)

FTOS#show processes memory rp2

Total : 953700352, MaxUsed : 149417984 [3/8/2006 12:33:6]
CurrentUsed: 149417984, CurrentFree: 804282368
SharedUsed : 7847200, SharedFree : 13124344

PID	Process	ResSize	Size	Allocs	Frees	Max	Current
145	vrp	3870720	266240	297324	0	297324	297324
141	fvrp	4472832	204800	797010	0	797010	797010
138	xstp	10764288	7155712	367534	0	367534	367534
133	span	4136960	167936	565810	0	565810	565810
132	pim	6664192	516096	2812528	0	2812528	2812528
128	igmp	4112384	344064	627684	0	627684	627684
124	ipm2	3923968	237568	363396	0	363396	363396
120	mrtm	25567232	593920	697790	0	697790	697790

116	l2mgr	4579328	520192	830098	0	830098	830098
112	l2pm	3874816	225280	367446	32948	367446	334498
108	arpm	3702784	208896	268420	0	268420	268420
104	acl2	3485696	94208	132144	0	132144	132144
100	sysd2	11657216	1679360	998834	0	998834	998834
98	sysmon	528384	94208	0	0	0	0
36	sshd	1286144	430080	0	0	0	0
34	inetd	663552	98304	0	0	0	0
32	mount_mfs	41791488	2514944	0	0	0	0
19	mount_mfs	364544	2449408	0	0	0	0
6	sh	446464	737280	0	0	0	0
5	aiodoned	76967936	0	0	0	0	0
4	ioflush	76967936	0	0	0	0	0
3	reaper	76967936	0	0	0	0	0
2	pagedaemon	76967936	0	0	0	0	0
1	init	139264	2375680	0	0	0	0
0	swapper	76967936	0	0	0	0	0

FTOS#

Table 4-5 defines the fields that appear in the show processes memory output.

Table 4-5. Descriptions of show processes memory rp1/rp2 output

Field	Description
Total:	Total system memory available
MaxUsed:	Total maximum memory used ever (history indicated with time stamp)
CurrentUsed:	Total memory currently in use
CurrentFree:	Total system memory available
SharedUsed:	Total used shared memory
SharedFree:	Total free shared memory
PID	Process ID
Process	Process Name
ResSize	Actual resident size of the process in memory
Size	Process test, stack, and data size
Allocs	Total dynamic memory allocated
Frees	Total dynamic memory freed
Max	Maximum dynamic memory allocated
Current	Current dynamic memory in use

show processes memory (S-Series)



Display memory usage information based on processes running in the S-Series system.

Syntax

show processes memory { management-unit | stack unit { 0-7 | all | summary } }

Parameters

management-unit	Enter the keyword <code>management-unit</code> for CPU memory usage of the stack management unit.
stack unit 0–7	Enter the keyword <code>stack unit</code> followed by a stack unit ID of the member unit for which to display memory usage on the forwarding processor.
all	Enter the keyword <code>all</code> for detailed memory usage on all stack members.
summary	Enter the keyword <code>summary</code> for a brief summary of memory availability and usage on all stack members.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.7.1.0	Modified: Added management-unit option
Version 7.6.1.0	Introduced on S-Series

Usage Information

The output for `show process memory` displays the memory usage statistics running on CP part (sysd) of the system. The Sysd is an aggregate task that handles all the tasks running on S-Series' CP.

For S-Series, the output of `show memory` and this command will differ based on which FTOS processes are counted.

- In the `show memory` display output, the memory size is equal to the size of the application processes.
- In the output of this command, the memory size is equal to the size of the application processes *plus* the size of the system processes.

Example (S-Series)

```
FTOS#show processes memory stack-unit 0
Total: 268435456, MaxUsed: 2420244, CurrentUsed: 2420244, CurrentFree: 266015212
TaskName TotalAllocated TotalFreed MaxHeld CurrentHolding
tme 435406 397536 54434 37870
ipc 16652 0 16652 16652
timerMgr 33304 0 33304 33304
sysAdmTsk 33216 0 33216 33216
tFib4 1943960 0 1943960 1943960
aclAgent 90770 16564 74206 74206
ifagt_1 21318 16564 21318 4754
dsagt 6504 0 6504 6504
MacAgent 269778 0 269778 269778
```

Example (show processes memory management-unit)

```
FTOS#show processes management-unit

Total      : 151937024, MaxUsed      : 111800320 [2/25/2008 4:18:53]
CurrentUsed: 98848768, CurrentFree: 53088256
SharedUsed : 13007848, SharedFree : 7963696

PID Process      ResSize      Size      Allocs      Frees      Max      Current
337 KemLnAgMv    117927936      0          0           0           0           0
331 vrrp          5189632      249856     50572        0          50572      50572
323 frxp         5206016      241664     369238        0          369238     369238
322 xstp         7430144      2928640     38328         0          38328      38328
321 pim          5267456      823296     62168         0          62168      62168
314 igmp         4960256      380928     18588        16564       18588      2024
313 mrtm         6742016     1130496     72758         0          72758      72758
```

```

308 l2mgr      5607424    552960    735214    380972    619266    354242
301 l2pm      5001216    167936    1429522   1176044   286606    253478
298 arpm      4628480    217088    71092     33128     71092     37964
294 ospf      5468160    503808    724204    662560    78208     61644
288 dsm       6778880    1159168   39490     16564     39490     22926
287 rtm       5713920    602112    442280    198768    376024    243512
284 rip       4562944    258048    528       0         528       528
281 lacp      4673536    266240    221060    0         221060    221060
277 ipml      4837376    380928    83788     0         83788     83788
273 acl       5005312    512000    239564    149076    123616    90488
272 topoDPC   117927936  0         0         0         0         0
271 bcmNHOP   117927936  0         0         0         0         0
270 bcmDISC   117927936  0         0         0         0         0
269 bcmATP-RX 117927936  0         0         0         0         0
268 bcmATP-TX 117927936  0         0         0         0         0
267 bcmSTACK  117927936  0         0         0         0         0
266 bcmRX     117927936  0         0         0         0         0
265 bcmLINK.0 117927936  0         0         0         0         0
!----- output truncated -----!

```

Table 4-6 defines the fields that appear in the show processes memory output.

Table 4-6. Descriptions of show processes memory output

Field	Description
Total:	Total system memory available
MaxUsed:	Total maximum memory used ever (history indicated with time stamp)
CurrentUsed:	Total memory currently in use
CurrentFree:	Total system memory available
SharedUsed:	Total used shared memory
SharedFree:	Total free shared memory
PID	Process ID
Process	Process Name
ResSize	Actual resident size of the process in memory
Size	Process test, stack, and data size
Allocs	Total dynamic memory allocated
Frees	Total dynamic memory freed
Max	Maximum dynamic memory allocated
Current	Current dynamic memory in use

show processes switch-utilization

E Show switch fabric utilization.

Syntax show processes switch-utilization

Command Mode EXEC

EXEC Privilege

Command History

 Version 8.1.1.0 Introduced on E-Series ExaScale

 E-Series original Command

Example

```
FTOS#show processes switch-utilization

Switch fabric utilization      5Sec   1Min   5Min
-----
3%      3%      3%
```

Usage Information

An asterisk (*) in the output indicates a legacy card that is not support by the show processes switch-utilization command.

show rpm
C
E

Show the current RPM status.

Syntax

show rpm [*number* [brief] | all]

Parameters

<i>number</i>	(OPTIONAL) Enter either zero (0) or 1 for the RPM.
---------------	--

all	(OPTIONAL) Enter the keyword all to view a table with information on all present RPMs.
-----	--

brief	(OPTIONAL) Enter the keyword brief to view an abbreviated list of RPM information.
-------	--

Command Modes

EXEC

EXEC Privilege

Command History

 Version 8.1.1.0 Introduced on E-Series ExaScale

 Version 7.5.1.0 Introduced on C-Series

 E-Series original Command

Example (E-Series)

```
FTOS#show RPM 0

-- RPM card 0 --
Status      : active
Next Boot   : online
Card Type    : RPM - Route Processor Module (LC-EF-RPM)
Hardware Rev : 2.0
Num Ports   : 1
Up Time     : 36 min, 51 sec
Last Restart : reset
FTOS Version : 6.2.1.0
Jumbo Capable : yes
CP Boot Flash : A: 2.4.0.6           B: 2.4.0.7 [booted]
RP1 Boot Flash: A: 2.4.0.7 [booted]  B: 2.4.0.5
RP2 Boot Flash: A: 2.4.0.7 [booted]  B: 2.4.0.5
CP Mem Size  : 536870912 bytes
RP1 Mem Size : 0 bytes
RP2 Mem Size : 0 bytes
Temperature  : 49C
Power Status : PEM0: absent or down  PEM1: up
```

```

Voltage      : ok
Serial Number : 0016788
Part Number  : 7520013800 Rev 01
Vendor Id    : 01
Date Code    : 06182004
Country Code : 01
FTOS#

```

Table 4-7 defines the fields displayed in the previous example.

Table 4-7. Descriptions of show rpm output

Field	Description
Status	Displays the RPM's status.
Next Boot	Displays whether the RPM is to be brought online at the next system reload.
Card Type	Displays the RPM catalog number.
Hardware Rev	Displays the E-Series chipset hardware revision level: 1.0 (non-Jumbo); 1.5 (Jumbo-enabled); 2.0 (or above is TeraScale).
Num Ports	Displays the number of active ports.
Up Time	Displays the number of hours and minutes since the RPM's last reboot.
Last Restart	States the reason for the last RPM reboot. C-Series possible values: <ul style="list-style-type: none"> • "normal power-cycle" (reset power-cycle command) • "reset by master" (peer RPM reset by master RPM) • "over temperature shutdown" • "power supply failed" E-Series possible values: <ul style="list-style-type: none"> • "normal power-cycle" (insufficient power, normal power cycle) • "reset by user" (automatic failover, software reload of both RPMs, or master RPM resetting peer) • "force-failover" (redundancy force-failover command)
FTOS Version	Displays the operating software version.
Jumbo Capable	Displays a Yes or No indicating if the RPM is capable of sending and receiving Jumbo frames. This field does not indicate if the chassis is in Jumbo mode; for that determination, use the show chassis brief command.
CP Boot Flash	Displays the two possible Boot Flash versions for the Control Processor. The [Booted] keyword next to the version states which version was used at system boot.
RP1 Boot Flash	Displays the two possible Boot Flash versions for the Routing Processor 1. The [Booted] keyword next to the version states which version was used at system boot.
RP2 Boot Flash	Displays the two possible Boot Flash versions for the Routing Processor 2. The [Booted] keyword next to the version states which version was used at system boot.
CP Mem Size	Displays the memory of the Control Processor.
RP1 Mem Size	Displays the memory of the Routing Processor 1.
RP2 Mem Size	Displays the memory of the Routing Processor 2.

Table 4-7. Descriptions of show rpm output

Field	Description
Temperature	Displays the temperature of the RPM. Minor alarm status if temperature is over 65° C.
Power Status	Lists the status of the power modules in the chassis.
Voltage	Displays the power rails for the line card.
Serial Num	Displays the line card serial number.
Part Num	Displays the line card part number.
Vendor ID	Displays an internal code, which specifies the manufacturing vendor.
Date Code	Displays the line card's manufacturing date.
Country Code	Displays the country of origin. 01 = USA

**Related
Commands**

show chassis	View information on all elements of the system.
show linecard	View information on a line card.
show sfm	View information on the SFM.

show software ifm



Display interface management (IFM) data.

Syntax

```
show software ifm { clients [summary] | ifagt number | ifcb interface | stack-unit unit-ID |
trace-flags }
```

Parameters

<i>clients</i>	Enter the keyword <i>clients</i> to display IFM client information.
<i>summary</i>	(OPTIONAL) Enter the keyword summary to display brief information about IFM clients.
<i>ifagt number</i>	Enter the keyword <i>ifagt</i> followed by the number of an interface agent to display software pipe and IPC statistics.

<i>ifcb interface</i>	<p>Enter the keyword <i>ifcb</i> followed by one of the following interface IDs followed by the slot/port information to display interface control block information for that interface:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <i>GigabitEthernet</i>. For a Port Channel interface, enter the keyword <i>port-channel</i> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10G Ethernet interface, enter the keyword <i>TenGigabitEthernet</i>. For a 40-Gigabit Ethernet interface, enter the keyword <i>fortyGigE</i>. <p>C-Series options also include:</p> <ul style="list-style-type: none"> <i>fastethernet</i> for a Fast Ethernet interface <i>loopback</i> for a Loopback interface <i>managementethernet</i> for a Management Ethernet interface <i>null</i> for a Null interface <i>vlan</i> for a VLAN interface (Range: 1–4094, 1-2094 for ExaScale)
<i>stack-unit unit-ID</i>	<p>Enter the keyword <i>stack-unit</i> followed by the stack member number to display IFM information for that unit. Range: 0-1 Note: This option is only available on S-Series.</p>
<i>trace-flags</i>	<p>Enter the keyword <i>trace-flags</i> to display IFM information for internal trace flags.</p>
Defaults	None
Command Mode	EXEC EXEC Privilege
Command History	<p>Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale.</p> <p>Version 7.6.1.0 Introduced for C-Series and S-Series.</p>

Example (S-Series)

```

FTOS#show software ifm clients summary
ClntType  Inst      svcMask      subSvcMask    tlvSvcMask    tlvSubSvc swp
IPM       0         0x00000000  0x00000000  0x90ff71f3   0x021e0e81  31
RTM       0         0x00000000  0x00000000  0x800010ff   0x01930000  43
VRRP     0         0x00000000  0x00000000  0x803330f3   0x00400000  39
L2PM     0         0x00000000  0x00000000  0x87ff79ff   0x0e032200  45
ACL      0         0x00000000  0x00000000  0x867f50c3   0x000f0218  44
OSPF     0         0x00000dfa  0x00400098  0x00000000   0x00000000  0
PIM      0         0x000000f3  0x00030000  0x00000000   0x00000000  0
IGMP     0         0x000e027f  0x00000000  0x00000000   0x00000000  0
SNMP     0         0x00000000  0x00000000  0x800302c0   0x00000002  30
EVTTERM  0         0x00000000  0x00000000  0x800002c0   0x00000000  29
MRTM     0         0x00000000  0x00000200  0x81f7103f   0x00000000  38
DSM      0         0x00000000  0x00000000  0x80771003   0x00000000  32
LACP     0         0x00000000  0x00000000  0x8000383f   0x00000000  35
DHCP     0         0x00000000  0x00000000  0x800000c2   0x0000c000  37
V6RAD    0         0x00000433  0x00030000  0x00000000   0x00000000  0
Unidentified Client0      0x006e0002  0x00000000  0x00000000  0x00000000  0

FTOS#

```

show switch links



View the switch fabric backplane or internal status.

Syntax

show switch links {backplane | internal}

Parameters

backplane	Enter the keyword <code>backplane</code> to view a table with information on the link status of the switch fabric backplane for both SFMs.
internal	Enter the keyword <code>internal</code> to view a table with information on the internal status of the switch fabric modules.

Defaults

None

Command Modes

EXEC

Command History

Version 7.5.1.0	Introduced on C-Series
-----------------	------------------------

Example

```
FTOS# show switch links backplane
```

```
Switch fabric backplane link status:
```

LC SlotID	SFM0 Links Status				SFM1 Links Status			
	Port0	Port1	Port2	Port3	Port4	Port5	Port6	Port7
0	up	up	up	up	down	down	down	down
1	not present							
2	not present							
3	not present							
4	not present							
5	not present							
6	up	up	up	up	down	down	down	down
7	not present							

up - Both ends of the link are up


down - Both ends of the link are down

up / down - SFM side up and LC side down

down / up - SFM side down and LC side up

FTOS#

show system (S-Series, S4810 and S4820T)



S4810

Display the current status of all units in the system.



Syntax

show system [brief | stack-unit *unit-id*]

Parameters

brief	(OPTIONAL) Enter the keyword <code>brief</code> to view an abbreviated list of system information.
stack-unit <i>unit-id</i>	(OPTIONAL) Enter the keyword <code>stack-unit</code> followed by the stack member ID for information on that stack member. Range: 0 to 7.

Command Modes

EXEC

EXEC Privilege**Command History**

Version 7.8.1.0	Modified output: Boot Flash field will display code level for boot code 2.8.1.1 and newer, while older boot codes are displayed as “Present”
Version 7.7.1.0	Modified output: Added Master Priority field.
Version 7.6.1.0	Introduced for S-Series switches

Usage

The second example shows the output from the show system brief command. The last example shows the output from the show system stack-unit command.

Example (show system)

```

FTOS#show system

Stack MAC : 00:01:e8:8b:3e:42
Reload-Type      : normal-reload [Next boot : normal-reload]

-- Unit 0 --
Unit Type       : Management Unit
Status          : online
Next Boot       : online
Required Type   : S4810 - 52-port GE/TE/FG (SE)
Current Type    : S4810 - 52-port GE/TE/FG (SE)
Master priority : 0
Hardware Rev    : 3.0
Num Ports       : 64
Up Time         : 3 hr, 7 min
FTOS Version    : 4810-8-3-7-1667
Jumbo Capable   : yes
POE Capable     : no
FIPS Mode       : disabled
Stack MAC : 00:01:e8:8b:3e:42
Reload-Type      : normal-reload [Next boot : normal-reload]

-- Unit 0 --
Unit Type       : Management Unit
Status          : online
Next Boot       : online
Required Type   : S4810 - 52-port GE/TE/FG (SE)
Current Type    : S4810 - 52-port GE/TE/FG (SE)
Master priority : 0
Hardware Rev    : 3.0
Num Ports       : 64
Up Time         : 3 hr, 7 min
FTOS Version    : 4810-8-3-7-1667
Jumbo Capable   : yes
POE Capable     : no
FIPS Mode       : disabled
Burned In MAC   : 00:01:e8:8b:3e:42
No Of MACs      : 3

-- Power Supplies --
Unit  Bay  Status      Type  FanStatus
-----
  0    0    up          AC    up
  0    1    absent         AC    absent

-- Fan Status --
Unit Bay  TrayStatus Fan0  Speed  Fan1  Speed
-----

```

```

0 0 up up 6720 up 6960
0 1 up up 6720 up 6960

```

```

Speed in RPM
Burned In MAC : 00:01:e8:8b:3e:42
No Of MACs : 3

```

```
-- Power Supplies --
```

Unit	Bay	Status	Type	FanStatus
0	0	up	AC	up
0	1	absent		absent

```
-- Fan Status --
```

Unit	Bay	TrayStatus	Fan0	Speed	Fan1	Speed
0	0	up	up	6720	up	6960
0	1	up	up	6720	up	6960

```
Speed in RPM
```

```
FTOS #
```

```
FTOS#show system brief
```

```
Stack MAC : 0:1:e8:d6:4:70
```

```
-- Stack Info --
```

Unit	UnitType	Status	ReqTyp	CurTyp	Version	Ports
0	Member	not present				
1	Standby	online	S50V	S50V	7.7.1.0	52
2	Mgmt	online	S50V	S50V	7.7.1.0	52
3	Member	not present				
4	Member	not present				
5	Member	not present				
6	Member	not present				
7	Member	not present				

```
-- Module Info --
```

Unit	Module No	Status	Module Type	Ports
1	0	online	S50-01-10GE-2P	2
1	1	online	S50-01-24G-2S	1
2	0	online	S50-01-10GE-2P	2
2	1	online	S50-01-24G-2S	1

```
-- Power Supplies --
```

Unit	Bay	Status	Type
1	0	up	AC
1	1	absent	
2	0	up	AC
2	1	absent	

```
-- Fan Status --
```

Unit	TrayStatus	Fan0	Fan1	Fan2	Fan3	Fan4	Fan5
1	up	up	up	up	up	up	up
2	up	up	up	up	up	up	up

```
FTOS#
```

**Example
(show system
brief)**

**Example
(show system
stack-unit)**

```

FTOS#show system stack-unit 0

-- Unit 0 --
Unit Type       : Management Unit
Status          : online
Next Boot       : online
Required Type   : S50V - 48-port E/FE/GE with POE (SB)
Current Type    : S50V - 48-port E/FE/GE with POE (SB)
Master Priority  : 4
Hardware Rev    : 2.0
Num Ports       : 52
Up Time         : 3 hr, 17 min
FTOS Version    : 7.6.1.0a
Jumbo Capable   : yes
POE Capable     : no
Boot Flash      : Present
Memory Size     : 254701568 bytes
Temperature     : 43C
Voltage         : ok
Serial Number   : DZ267160000
Part Number     : 7590003600 Rev B
Vendor Id       : 07
Date Code       : 12172007
Country Code    : 01
Burned In MAC   : 00:01:e8:cc:cc:cc
No Of MACs     : 3

--Module 0--
Status          : online
Module Type     : S50-01-10GE-2P   - 2-port 10GE XFP (SB)
Num Ports       : 2
Hot Pluggable   : no

-- Module 1 -
Status          : online
Module Type     : S50-01-10GE-2C   - 2-port 10GE CX4 (SB)
Num Ports       : 2
Hot Pluggable   : no

- Power Supplies --
Unit   Bay   Status   Type
-----
  0     0    up       AC
  0     1   absent

-- Fan Status --
-----
Unit   TrayStatus  Fan0   Fan1   Fan2   Fan3   Fan4   Fan5
-----
  0    up          up     up     up     up     up     up
FTOS#

```

**Related
Commands**

show version	Display the FTOS version.
show processes memory (S-Series)	Display memory usage based on running processes.
show system stack-ports	Display information about the stack ports on all switches in the S-Series stack.

show hardware stack-unit	Display the data plane and management plane input and output statistics of a particular stack member.
stack-unit priority	Configure the ability of an S-Series switch to become the management unit of a stack.

show tech-support (C-Series and E-Series)

C **E**

Display, or save to a file, a collection of data from other show commands, the information necessary for Force10 Networks technical support to perform troubleshooting.

Syntax

show tech-support [linecard 0-6 | page] | {display | except | find | grep | no-more | save}

Parameters

linecard 0-6	(OPTIONAL) Enter the keyword <code>linecard</code> followed by the linecard number to view information relating to a specific linecard.
page	(OPTIONAL) Enter the keyword <code>page</code> to view 24 lines of text at a time. Press the SPACE BAR to view the next 24 lines. Press the ENTER key to view the next line of text.
display, except, find, grep, no-more	If you use the pipe command (), then enter one of these keywords to filter command output. Refer to Filtering show Commands in the CLI Basics chapter for details on filtering commands.
save	Enter the <code>save</code> keyword (following the pipe) to save the command output. flash: Save to local flash drive (flash://filename (max 20 chars)) slot0: Save to local file system (slot0://filename (max 20 chars))

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0	Introduced <code>save</code> to file options
Version 7.5.1.0	Introduced on C-Series
Version 6.5.4.0	Show clock included in display on E-Series

Example (C-Series)

```
FTOS#show tech-support page

----- show version -----
Dell Force10 Networks Real Time Operating System Software
Dell Force10 Operating System Version: 1.0
Dell Force10 Application Software Version: FTOS 7.5.1.0
Copyright (c) 1999-2007 by Force10 Networks, Inc.
Build Time: Tue Sep 12 15:39:17 IST 2006
Build Path: /sites/maa/work/sw//C-SERIES/SW/SRC
Dell Force10 uptime is 18 minutes

System image file is "/work/sw/IMAGES/Chassis/C300-ODC-2/FTOS-CS.bin"

Chassis Type: C300
Control Processor: IBM PowerPC 750FX (Rev D2.2) with 1073741824 bytes of memory.
128K bytes of non-volatile configuration memory.

  1 Route Processor/Switch Fabric Module
  2 48-port GE 10/100/1000Base-T line card with RJ45 interface (CB)
  1 FastEthernet/IEEE 802.3 interface(s)
  96 GigabitEthernet/IEEE 802.3 interface(s)
```

```

----- show HA information -----
-- RPM Status --
-----
RPM Slot ID:          0
RPM Redundancy Role:  Primary
RPM State:            Active
RPM SW Version:       CS-1-1-317
Link to Peer:         Down
Peer RPM:              not present

-- RPM Redundancy Configuration --
-----
Primary RPM:          rpm0
Auto Data Sync:       Full
Failover Type:        Hot Failover
Auto reboot RPM:      Disabled
Auto failover limit:  3 times in 60 minutes

...more----

```

**Example
(E-Series)**

```

FTOS#show tech-support ?
linecard          Line card
page              Page through output
|                Pipe through a command
<cr>

FTOS#show tech-support linecard 3 | ?
display           Display additional information
except           Show only text that does not match a pattern
find             Search for the first occurrence of a pattern
grep            Show only text that matches a pattern
no-more         Don't paginate output
save            Save output to a file

FTOS#show tech-support linecard 3 | save ?
flash:           Save to local file system (flash://filename (max 20 chars) )
slot0:          Save to local file system (slot0://filename (max 20 chars) )

FTOS#show tech-support linecard 3 | save flash://LauraSave
Start saving show command report .....

FTOS#dir
Directory of flash:

 1  drwx    32768   Jan 01 1980 00:00:00 +00:00 .
 2  drwx     512   Aug 22 2008 14:21:13 +00:00 ..
 3  drwx    8192   Mar 30 1919 10:31:04 +00:00 TRACE_LOG_DIR
 4  drwx    8192   Mar 30 1919 10:31:04 +00:00 CRASH_LOG_DIR
 5  drwx    8192   Mar 30 1919 10:31:04 +00:00 NVTRACE_LOG_DIR
 6  drwx    8192   Mar 30 1919 10:31:04 +00:00 CORE_DUMP_DIR
 7  d---    8192   Mar 30 1919 10:31:04 +00:00 ADMIN_DIR
 8  -rwx   33059550 Jul 11 2007 17:49:46 +00:00 FTOS-EF-7.4.2.0.bin
 9  drwx    8192   Jan 01 1980 00:18:28 +00:00 diag
10  -rwx   29555751 May 12 2008 17:29:42 +00:00 FTOS-EF-4.7.6.0.bin
11  -rwx   27959813 Apr 04 2008 15:05:12 +00:00 FTOS-EF-7.5.1.0.bin
12  -rwx    4693   May 12 2008 17:24:36 +00:00 config051508
13  -rwx   29922288 Jan 11 2008 14:58:36 +00:00 FTOS-EF-7.6.1.0.bin
14  -rwx    6497   Aug 22 2008 14:18:56 +00:00 startup-config
15  -rwx    5832   Jul 25 2008 11:13:36 +00:00 startup-config.bak
16  -rwx   29947358 Jul 25 2008 11:04:26 +00:00 FTOS-EF-7.6.1.2.bin
17  -rwx    10375   Aug 25 2008 10:55:18 +00:00 LauraSave

```

Usage Information

```
flash: 520962048 bytes total (40189952 bytes free)
FTOS#
```

Without the linecard or page option, the command output is continuous, use **CNTL-z** to interrupt the command output.

The save option works with other filtering commands. This allows you to save specific information of a show command. The save entry should always be the last option.

For example: `Force10#show tech-support |grep regular-expression |except regular-expression | find regular-expression | save flash://result`

This display output is an accumulation of the same information that is displayed when you execute one of the following show commands:

- show cam-profile
- show cam-ipv4flow
- show chassis
- show clock
- show environment
- show file-system
- show interface
- show inventory
- show ip management-route
- show ip protocols
- show ip route summary
- show processes cpu
- show processes memory
- show redundancy
- show rpm
- show running-conf
- show sfm
- show version

Related Commands

show version	Display the FTOS version.
show linecard	Display the line card(s) status.
show environment (C-Series and E-Series)	Display system component status.
show processes memory (C-Series and E-Series)	Display memory usage based on running processes.

show tech-support (S-Series)



Display a collection of data from other show commands, necessary for Dell Force10 technical support to perform troubleshooting on S-Series switches.

Syntax

`show tech-support [stack-unit unit-id | page]`

Parameters

stack-unit	(OPTIONAL) Enter the keyword stack-unit to view CPU memory usage for the stack member designated by <i>unit-id</i> . Range: 0 to 7
page	(OPTIONAL) Enter the keyword page to view 24 lines of text at a time. Press the SPACE BAR to view the next 24 lines. Press the ENTER key to view the next line of text.
	When using the pipe command (), enter one of these keywords to filter command output. Refer to Filtering show Commands in the CLI Basics chapter for details on filtering commands.
save	Enter the save keyword to save the command output. flash: Save to local flash drive (flash://filename (max 20 chars))

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0	Introduced save to file options
Version 7.6.1.0	Expanded to support S-Series switches

Example (show tech-support save)

```

FTOS#show tech-support ?
page                Page through output
stack-unit          Unit Number
|                  Pipe through a command
<cr>
FTOS#show tech-support stack-unit 1 ?
|                  Pipe through a command
<cr>
FTOS#show tech-support stack-unit 1 | ?
except             Show only text that does not match a pattern
find              Search for the first occurrence of a pattern
grep              Show only text that matches a pattern
no-more           Don't paginate output
save              Save output to a file

FTOS#show tech-support stack-unit 1 | save ?
flash:             Save to local file system (flash://filename (max 20 chars) )

FTOS#show tech-support stack-unit 1 | save flash://LauraSave
Start saving show command report .....
FTOS#

FTOS#dir
Directory of flash:

 1 drw-      16384   Jan 01 1980 00:00:00 +00:00 .
 2 drwx      1536   Jul 13 1996 02:38:06 +00:00 ..
 3 d---       512   Nov 20 2007 15:46:44 +00:00 ADMIN_DIR
 4 -rw-      7124   Jul 13 1996 02:33:04 +00:00 startup-config
 5 -rw-      3303   Feb 14 2008 22:01:16 +00:00 startup-config.oldChassis
 6 -rw-      6561   May 17 1996 04:10:54 +00:00 startup-config.bak
 7 -rw-      6539   May 29 1996 10:35:42 +00:00 test.cfg
 8 -rw-       276   Jul 15 1996 23:11:14 +00:00 LauraSave

flash: 3104256 bytes total (3072512 bytes free)
FTOS#

```

Example (show tech-support)

```

FTOS#show tech-support stack-unit 0

----- show version -----
Dell Force10 Networks Real Time Operating System Software
Dell Force10 Operating System Version: 1.0

```

```
Dell Force10 Application Software Version: FTOS 7.6.1.0
Copyright (c) 1999-2007 by Dell Force10 Networks, Inc.
Build Time: Tue Sep 12 15:39:17 IST 2006
Build Path: /sites/maa/work/sw/purushothaman/cser-latest/depot/main/Dev/
Cyclone/Force10 uptime is 18 minutes
```

```
System Type: S50N
Control Processor: MPC8451E with 255545344 bytes of memory.
```

```
32M bytes of Boot-Flash memory.
```

```
  1 48-port E/FE/GE (SB)
 48 GigabitEthernet/IEEE 802.3 interface(s)
  4 Ten GigabitEthernet/IEEE 802.3 interface(s)
```

```
----- show clock -----
12:03:01.695 UTC Wed Nov 21 2007
```

```
----- show running-config -----
Current Configuration ...
! Version E_MAIN4.7.5.414
! Last configuration change at Wed Nov 21 11:42:19 2007 by default
!
service timestamps log datetime
!
hostname Force10
!
enable password 7 xxxxxxxx
!
username admin password 7 xxxxxxxx
!
enable restricted 7 xxxxxxxx
!
interface GigabitEthernet 0/1
  no ip address
  shutdown
!
interface GigabitEthernet 0/2
  no ip address
  shutdown
!
!----- output truncated -----!
```

Usage Information

Without the `page` or `stack-unit` option, the command output is continuous, use **Ctrl-z** to interrupt the command output.

The `save` option works with other filtering commands. This allows you to save specific information of a `show` command. The `save` entry should always be the last option.

For example: `FTOS#show tech-support |grep regular-expression |except regular-expression | find regular-expression | save flash://result`

This display output is an accumulation of the same information that is displayed when you execute one of the following `show` commands:

- `show cam`
- `show clock`
- `show environment`
- `show file`

- show interfaces
- show inventory
- show ip protocols
- show ip route summary
- show processes cpu
- show processes memory
- show redundancy
- show running-conf
- show version

Related Commands

show version	Display the FTOS version.
show system (S-Series, S4810 and S4820T)	Display the current switch status.
show environment (S-Series)	Display system component status.
show processes memory (S-Series)	Display memory usage based on running processes.

ssh-peer-rpm

C **E**

Open an SSH connection to the peer RPM.

Syntax

ssh-peer-rpm [-l *username*]

Parameters

-l <i>username</i>	(OPTIONAL) Enter the keyword -l followed by your user name. Default: The user name associated with the terminal
--------------------	--

Defaults

Not configured.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
Version 6.3.1.0	Introduced on E-Series

Usage Information

This command is not available when the peer RPMs are running different FTOS releases.

telnet

C **E** **S**

S4810

S4820T

Connect through Telnet to a server. The Telnet client and server in FTOS support IPv4 and IPv6 connections. You can establish a Telnet session directly to the router, or a connection can be initiated from the router.

Syntax `telnet { host | ip-address | ipv6-address | vrf vrf instance name } [source-interface]`

Parameters

<i>host</i>	(OPTIONAL) Enter the name of a server.
<i>ip-address</i>	(OPTIONAL) E-Series only. Enter the IPv4 address to which you are testing connectivity in dotted decimal format of the server.
<i>ipv6-address</i> <i>prefix-length</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros
<i>vrf instance</i>	(OPTIONAL) E-Series Only: Enter the keyword vrf followed by the VRF Instance name.
<i>source-interface</i>	(Mandatory for IPv6 link-local addresses; Optional otherwise) Enter the keywords source-interface followed by the interface information to include the source interface. Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword loopback followed by a number from zero (0) to 16383. For the Null interface, enter the keyword null followed by 0. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For SONET interface types, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.

Defaults Not configured.

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added support for source-interface requirements for link-local IPv6 addressing on the S4820T.
Version 8.3.12.0	Added support for source-interface requirements for link-local IPv6 addressing on the S4810.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Introduced on E-Series ExaScale (IPv6) Increased number of VLANs on ExaScale to 4094 (was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale (IPv4)

Version 7.9.1.0	Introduced VRF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and added support for IPv6 address on E-Series only

Usage Information

Telnet to link-local addresses is not supported.

telnet-peer-rpm

C **E**

Open a Telnet connection to the peer RPM.

Syntax

telnet-peer-rpm

Defaults

Not configured.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Usage Information

Opening a telnet connection from the Standby RPM to an Active RPM follows the authentication procedure configured in the chassis. However, opening a telnet connection from the Active RPM into the Standby RPM requires local authentication.

Configuring an ACL on a VTY line will block a Telnet session using the telnet-peer-rpm command in the standby to active RPM direction only. Such an ACL will not block an internal Telnet session in the active RPM to standby RPM direction.

terminal length

C **E** **S**

Configure the number of lines displayed on the terminal screen.

Syntax

terminal length *screen-length*

To return to the default values, enter terminal no length.

Parameters

<i>screen-length</i>	Enter a number of lines. Entering zero will cause the terminal to display without pausing. Range: 0 to 512. Default: 24 lines.
----------------------	--

Defaults

24 lines

Command Modes EXEC
EXEC Privilege

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series original Command	

terminal xml

C **E** Enable XML mode in Telnet and SSH client sessions.

Syntax terminal xml
To exit the XML mode, enter terminal no xml.

Defaults Disabled

Command Modes EXEC
EXEC Privilege

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.7.1.0	Introduced on C-Series
	Version 6.5.1.0	Introduced for E-Series

Usage Information This command enables the XML input mode where you can either cut and paste XML requests or enter the XML requests line-by-line. For more information on using the XML feature, refer to the XML chapter in the *FTOS Configuration Guide*.

traceroute

C **E** **S** View a packet's path to a specific device.

S4810

S4820T

Syntax traceroute { *host* | *vrf instance* | *ip-address* | *ipv6-address* | *outgoing-interface* }

Parameters	<i>host</i>	Enter the name of device.
	<i>vrf instance</i>	(Optional) E-Series Only : Enter the keyword vrf followed by the VRF Instance name.
	<i>ip-address</i>	Enter the IP address of the device in dotted decimal format.

<i>ipv6-address</i>	Enter the IPv6 address, in the X:X:X:X format, to which you are testing connectivity. Note: The :: notation specifies successive hexadecimal fields of zeros
<i>outgoing-interface</i>	(IPv6 link-local address) Enter one of the following types of outgoing interface for traceroute packets to a destination link-local address. <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword <i>gigabitethernet</i> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <i>gigabitethernet</i> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <i>tengigabitethernet</i> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <i>fortyGigE</i> followed by the slot/port information. For a VLAN interface, enter the keyword <i>vlan</i> followed by a number from 1 to 4094, followed by the slot/port information. For a Management Ethernet interface, enter the keyword <i>management ethernet</i> followed by the slot/port information. For a Port Channel interface, enter the keyword <i>port-channel</i> followed by the slot/port information.

Defaults

Timeout = 5 seconds; Probe count = 3; 30 hops max; 40 byte packet size; UDP port = 33434

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added support in the <i>outgoing-interface</i> parameter for link-local IPv6 addressing on the S4820T.
Version 8.3.12.0	Added support in the <i>outgoing-interface</i> parameter for link-local IPv6 addressing on the S4810.
Version 8.4.1.0	IPv6 tracerouting available on management interface.
Version 8.2.1.0	Introduced on E-Series ExaScale with IPv6
Version 8.1.1.0	Introduced on E-Series ExaScale (IPv4 only)
Version 7.9.1.0	Introduced VRF.
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Added support for IPv6 address on E-Series
E-Series original Command	

Usage Information

When you enter the traceroute command without specifying an IP address (Extended Traceroute), you are prompted for a target and source IP address, timeout in seconds (default is 5), a probe count (default is 3), minimum TTL (default is 1), maximum TTL (default is 30), and port number (default is 33434). To keep the default setting for those parameters, press the ENTER key.

For the source IP address option, you may enter IPv6 global addresses only (link-local addresses are not supported).

For IPv6, you are prompted for a minimum hop count (default is 1) and a maximum hop count (default is 64).

Example (IPv4)

```
FTOS#traceroute www.force10networks.com

Translating "www.force10networks.com"...domain server (10.11.0.1) [OK]
Type Ctrl-C to abort.

-----
Tracing the route to www.force10networks.com (10.11.84.18), 30 hops max, 40 byte packets
-----

TTL Hostname                Probe1      Probe2      Probe3
 1  10.11.199.190             001.000 ms 001.000 ms 002.000 ms
 2  gwegress-sjc-02.force10networks.com (10.11.30.126) 005.000 ms 001.000 ms 001.000 ms
 3  fw-sjc-01.force10networks.com (10.11.127.254) 000.000 ms 000.000 ms 000.000 ms
 4  www.force10networks.com (10.11.84.18) 000.000 ms 000.000 ms 000.000 ms
FTOS#
```

The following section contains examples of the IPv6 traceroute command with both a compressed IPv6 address and uncompressed address.

Example (IPv6)

```
FTOS#traceroute 100::1

Type Ctrl-C to abort.

-----
Tracing the route to 100::1, 64 hops max, 60 byte packets
-----

Hops Hostname                Probe1      Probe2      Probe3
 1  100::1                    000.000 ms 000.000 ms 000.000 ms

FTOS#traceroute 3ffe:501:ffff:100:201:e8ff:fe00:4c8b

Type Ctrl-C to abort.

-----
Tracing the route to 3ffe:501:ffff:100:201:e8ff:fe00:4c8b, 64 hops max, 60 byte packets
-----

Hops Hostname                Probe1      Probe2      Probe3
 1  3ffe:501:ffff:100:201:e8ff:fe00:4c8b
                                000.000 ms 000.000 ms 000.000 ms
FTOS#
```

Related Commands

ping	Test connectivity to a device.
----------------------	--------------------------------

undebug all

C **E** **S**

Disable all debug operations on the system.

Syntax

undebug all

Defaults

No default behavior or values

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

upload trace-log



Upload trace log files from the three CPUs (cp, rp1, and rp2)

Syntax

upload trace-log { cp { cmd-history | hw-trace | sw-trace } | rp1 { cmd-history | hw-trace | sw-trace } | rp2 { cmd-history | hw-trace | sw-trace } }

Parameters

cp rp1 rp2	Enter the keyword cp rp1 rp2 to upload the trace log from that CPU.
cmd-history	(OPTIONAL) Enter the keyword cmd-history to upload the CPU's command history.
hw-trace	(OPTIONAL) Enter the keyword hw-trace to upload the CPU's hardware trace.
sw-trace	(OPTIONAL) Enter the keyword sw-trace to upload the CPU's software trace.

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series and expanded to support command history, hardware trace, and software trace logs
Version 6.1.1.0	Introduced on E-Series

Usage Information

The log information is uploaded to flash:/TRACE_LOG_DIR

virtual-ip



Configure a virtual IP address for the active management interface. Virtual addresses can be configured both for IPv4 and IPv6 independently.

Syntax

virtual-ip { ipv4-address | ipv6-address }

Parameters

{ ipv4-address ipv6-address }	Enter the IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::) of the active management interface.
---------------------------------	--

Defaults No default behavior or values

Command Modes CONFIGURATION

Command History

Version 8.4.1.0	Added support for IPv6 addressing.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Usage Information

Both IPv4 and IPv6 virtual address can be configured simultaneously, but only one of each. Each time this command is issued it will replace the previously configured address of the same family, IPv4 or IPv6. The no virtual-ip command now takes an address/prefix-length argument, so that the desired address only is removed. If no virtual-ip is entered without any specified address, then both IPv4 and IPv6 virtual addresses are removed.

Example

```
FTOS#virtual-ip 10.11.197.99/16
FTOS#virtual-ip fdaa:bbbb:cccc:1004::60/64
```

write

C E S

Copy the current configuration to either the startup-configuration file or the terminal.

Syntax

write {memory | terminal}

Parameters

memory	Enter the keyword memory to copy the current running configuration to the startup configuration file. This command is similar to the copy running-config startup-config command.
terminal	Enter the keyword terminal to copy the current running configuration to the terminal. This command is similar to the show running-config command.

Command Modes EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series original Command	

Related Commands

save	Save configurations created in BOOT_USER mode (BLI).
-------------	--

Usage Information

The write memory command saves the running-configuration to the file labeled startup-configuration. When using a LOCAL CONFIG FILE other than the startup-config not named “startup-configuration” (for example, you used a specific file during the [boot config](#) command) the running-config is not saved to that file; use the copy command to save any running-configuration changes to that local file.

802.1ag

Overview

802.1ag is available only on the following Dell Force10 platforms: **S** S-Series and **S4810** and **S4820T**

Commands

This chapter contains the following commands:

- `ccm disable`
- `ccm transmit-interval`
- `clear ethernet cfm traceroute-cache`
- `database hold-time`
- `disable`
- `domain`
- `ethernet cfm`
- `ethernet cfm mep`
- `ethernet cfm mip`
- `mep cross-check`
- `mep cross-check enable`
- `mep cross-check start-delay`
- `ping ethernet`
- `show ethernet cfm domain`
- `show ethernet cfm maintenance-points local`
- `show ethernet cfm maintenance-points remote`
- `show ethernet cfm mipbd`
- `show ethernet cfm statistics`
- `show ethernet cfm port-statistics`
- `show ethernet cfm traceroute-cache`
- `service`
- `traceroute cache hold-time`
- `traceroute cache size`

- [traceroute ethernet](#)

ccm disable

S **S4810**

S4820T

Disable CCM.

Syntax

ccm disable

Enter **no ccm disable** to enable CCM.

Defaults

Disabled

Command Modes

ECFM DOMAIN

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

ccm transmit-interval

S **S4810**

S4820T

Configure the transmit interval (mandatory). The interval specified applies to all MEPs in the domain.

Syntax

ccm transmit-interval *seconds*

Parameters

<i>seconds</i>	Enter a transmit interval. Range: 1,10,60,600
----------------	--

Defaults

10 seconds

Command Modes

ECFM DOMAIN

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

clear ethernet cfm traceroute-cache

S **S4810**

S4820T

Delete all Link Trace Cache entries.

Syntax

clear ethernet cfm traceroute-cache

Defaults None

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

database hold-time

S **S4810** Set the amount of time that data from a missing MEP is kept in the Continuity Check Database.

S4820T

Syntax **database hold-time** *minutes*

Parameters	<i>minutes</i>	Enter a hold-time. Range: 100-65535 minutes
-------------------	----------------	--

Defaults 100 minutes

Command Modes ECFM DOMAIN

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

disable

S **S4810** Disable Ethernet CFM without stopping the CFM process.

S4820T

Syntax **disable**

Defaults Disabled

Command Modes ETHERNET CFM

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

domain

S **S4810**

Create a maintenance domain.

S4820T

Syntax

domain *name* **md-level** *number*

Parameters

<i>name</i>	Name the maintenance domain.
md-level <i>number</i>	Enter a maintenance domain level. Range: 0-7

Defaults

None

Command Modes

ETHERNET CFM

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

ethernet cfm

S **S4810**

Spawn the CFM process. No CFM configuration is allowed until the CFM process is spawned.

S4820T

Syntax

ethernet cfm

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4820T
Version 8.3.1.0	Introduced on S-Series

ethernet cfm mep

S **S4810**

Create a MEP.

S4820T

Syntax

ethernet cfm mep { **up-mep** | **down-mep** } **domain** { *name* | *level* } **ma-name** *name* **mepid** *mep-id*

Parameters	[up-mep down-mep]	Specify whether the MEP is up or down facing. Up-MEP: monitors the forwarding path internal to an bridge on the customer or provider edge; on Dell Force10 systems the internal forwarding path is effectively the switch fabric and forwarding engine. Down-MEP: monitors the forwarding path external another bridge.
	domain [<i>name</i> <i>level</i>]	Enter this keyword followed by the domain name or domain level.
	ma-name <i>name</i>	Enter this keyword followed by the name of the maintenance association.
	mepid <i>mep-id</i>	Enter an MEP ID. Range: 1-8191
	Defaults	None
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

ethernet cfm mip

S **S4810**

S4820T

Create a MIP.

Syntax

ethernet cfm mip domain { *name* | *level* } **ma-name** *name*

Parameters	domain [<i>name</i> <i>level</i>]	Enter this keyword followed by the domain name or domain level.
	ma-name <i>name</i>	Enter this keyword followed by the name of the maintenance association.
Defaults	None	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

mep cross-check

S **S4810**

S4820T

Enable cross-checking for a MEP.

Syntax	mep cross-check <i>mep-id</i>	
Parameters	<i>mep-id</i>	Enter the MEP ID Range: 1-8191
Defaults	None	
Command Modes	ECFM DOMAIN	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

mep cross-check enable

S **S4810**

Enable cross-checking.

S4820T

Syntax	mep cross-check enable { <i>port</i> <i>vlan-id</i> }	
Parameters	<i>port</i>	Down service with no VLAN association.
	<i>vlan-id</i>	Enter the VLAN to apply the cross-check.
Defaults	None	
Command Modes	ECFM DOMAIN	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

mep cross-check start-delay

S **S4810**

Configure the amount of time the system waits for a remote MEP to come up before the cross-check operation is started.

S4820T

Syntax	mep cross-check start-delay <i>number</i>	
Parameters	start-delay <i>number</i>	Enter a start-delay in seconds. Range: 3-100 seconds
Defaults	3 ccms	
Command Modes	ETHERNET CFM	

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

ping ethernet

S **S4810**

Send a Loopback message.

S4820T

Syntax

ping ethernet domain [*name* | *level*] **ma-name** *m a-name* **remote** { *dest-mep-id* | **mac-addr** *mac-address* } **source** { *src-mep-id* | **port** *interface* }

Parameters

<i>name</i> <i>level</i>	Enter the domain name or level.
ma-name <i>ma-name</i>	Enter the keyword followed by the maintenance association name.
<i>dest-mep-id</i>	Enter the MEP ID that will be the target of the ping.
mac-addr <i>mac-address</i>	Enter the keyword followed by the MAC address that will be the target of the ping.
<i>src-mep-id</i>	Enter the MEP ID that will originate the ping.
port <i>interface</i>	Enter the keyword followed by the interface that will originate the ping.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

show ethernet cfm domain

S **S4810**

Display maintenance domain information.

S4820T

Syntax

show ethernet cfm domain [*name* | *level* | **brief**]

Parameters

<i>name</i> <i>level</i>	Enter the maintenance domain name or level.
brief	Enter this keyword to display a summary output.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

Example

```
FTOS# show ethernet cfm domain
```

```
Domain Name: customer
```

```
Level: 7
```

```
Total Service: 1
```

```
Services
```

MA-Name	VLAN	CC-Int	X-CHK Status
My_MA	200	10s	enabled

```
Domain Name: My_Domain
```

```
Level: 6
```

```
Total Service: 1
```

```
Services
```

MA-Name	VLAN	CC-Int	X-CHK Status
Your_MA	100	10s	enabled

show ethernet cfm maintenance-points local

S **S4810**

Display configured MEPs and MIPs.

S4820T

Syntax

show ethernet cfm maintenance-points local [mep | mip]

Parameters

mep	Enter this keyword to display configured MEPs.
mip	Enter this keyword to display configured MIPs.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

Example

```
FTOS#show ethernet cfm maintenance-points local mip
```

```
-----
```

MPID	Domain Name MA Name	Level VLAN	Type Dir	Port MAC	CCM-Status
0	servicel My_MA	4 3333	MIP DOWN	Gi 0/5 00:01:e8:0b:c6:36	Disabled
0	servicel Your_MA	4 3333	MIP UP	Gi 0/5 00:01:e8:0b:c6:36	Disabled

```
-----
```

show ethernet cfm maintenance-points remote

S **S4810**

Display the MEP database.

S4820T

Syntax

show ethernet cfm maintenance-points remote detail [active | domain {level | name} | expired | waiting]

Parameters

active	Enter this keyword to display only the MEPs in active state.
domain [name level]	Enter this keyword followed by the domain name or domain level.
expired	Enter this keyword to view MEP entries that have expired due to connectivity failure.
waiting	Enter this keyword to display MEP entries waiting for response.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

Example

```
FTOS#show ethernet cfm maintenance-points remote detail
```

```
MAC Address: 00:01:e8:58:68:78
Domain Name: cfm0
MA Name: test0
Level: 7
VLAN: 10
MP ID: 900
Sender Chassis ID: Force10
MEP Interface status: Up
MEP Port status: Forwarding
Receive RDI: FALSE
MP Status: Active
```

show ethernet cfm mipdb

S **S4810**

Display the MIP database.

S4820T

Syntax

show ethernet cfm mipdb

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
------------------	--------------------------

Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

show ethernet cfm statistics

S **S4810**

Display MEP statistics.

S4820T

Syntax

show ethernet cfm statistics [**domain** { *name* | *level*}] **vlan-id** *vlan-id* **mpid** *mpid*]

Parameters

domain	Enter this keyword to display statistics for a particular domain.
<i>name</i> <i>level</i>	Enter the domain name or level.
vlan-id <i>vlan-id</i>	Enter this keyword followed by a VLAN ID.
mpid <i>mpid</i>	Enter this keyword followed by a maintenance point ID.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

Example

```
FTOS# show ethernet cfm statistics
```

```
Domain Name: Customer
Domain Level: 7
MA Name: My_MA
MPID: 300
```

```
CCMs:
  Transmitted:                1503      RcvdSeqErrors:                0
LTRs:
  Unexpected Rcvd:              0
LBRs:
  Received:                    0          Rcvd Out Of Order:            0
  Received Bad MSDU:           0
  Transmitted:                  0
```

show ethernet cfm port-statistics

S **S4810**

Display CFM statistics by port.

S4820T

Syntax

show ethernet cfm port-statistics [*interface type slot/port*]

Parameters	interface type	Enter this keyword followed by the interface type.
	slot/port	Enter the slot and port numbers for the port.

Defaults None

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

Example

```

FTOS#show ethernet cfm port-statistics interface gigabitethernet 0/5
Port statistics for port: Gi 0/5
=====

RX Statistics
=====
Total CFM Pkts 75394 CCM Pkts 75394
LBM Pkts 0 LTM Pkts 0
LBR Pkts 0 LTR Pkts 0
Bad CFM Pkts 0 CFM Pkts Discarded 0
CFM Pkts forwarded 102417

TX Statistics
=====
Total CFM Pkts 10303 CCM Pkts 0
LBM Pkts 0 LTM Pkts 3
LBR Pkts 0 LTR Pkts 0

```

show ethernet cfm traceroute-cache

S **S4810**

Display the Link Trace Cache.

S4820T

Syntax **show ethernet cfm traceroute-cache**

Defaults None

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.1.0	Introduced on S-Series

Example

```
FTOS#show ethernet cfm traceroute-cache
```

```
Traceroute to 00:01:e8:52:4a:f8 on Domain Customer2, Level 7, MA name Test2 with VLAN 2
```

```
-----
```

Hops	Host Next Host	IngressMAC Egress MAC	Ingr Action Egress Action	Relay Action FWD Status
4	00:00:00:01:e8:53:4a:f8 00:00:00:01:e8:52:4a:f8	00:01:e8:52:4a:f8	IngOK	RlyHit Terminal MEP

```
-----
```

service

S **S4810**

S4820T

Create a maintenance association.

Syntax

service name vlan vlan-id

Parameters

<i>name</i>	Enter a maintenance association name.
vlan <i>vlan-id</i>	Enter this keyword followed by the VLAN ID. Range: 1-4094

Defaults

None

Command Modes

ECFM DOMAIN

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

traceroute cache hold-time

S **S4810**

S4820T

Set the amount of time a trace result is cached.

Syntax

traceroute cache hold-time minutes

Parameters

<i>minutes</i>	Enter a hold-time. Range: 10-65535 minutes
----------------	---

Defaults

100 minutes

Command Modes

ETHERNET CFM

Command History

Version 8.3.19.0	Introduced on the S4820T
------------------	--------------------------

Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

traceroute cache size

S **S4810**

Set the size of the Link Trace Cache.

S4820T

Syntax

traceroute cache size *entries*

Parameters

<i>entries</i>	Enter the number of entries the Link Trace Cache can hold. Range: 1 - 4095 entries
----------------	---

Defaults

100 entries

Command Modes

ETHERNET CFM

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

traceroute ethernet

S **S4810**

Send a Linktrace message to a MEP.

S4820T

Syntax

traceroute ethernet domain [*name* | *level*] **ma-name** *ma-name* **remote** { **mep-id** *mep-id* | **mac-addr** *mac-address* }

Parameters

domain <i>name</i> <i>level</i>	Enter the keyword followed by the domain name or level.
ma-name <i>ma-name</i>	Enter the keyword followed by the maintenance association name.
mepid <i>mep-id</i>	Enter the MEP ID that will be the trace target.
mac-addr <i>mac-address</i>	Enter the MAC address of the trace target.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.3.1.0	Introduced on S-Series

802.1X

The 802.1X Port Authentication commands are:

- `debug dot1x`
- `dot1x auth-fail-vlan`
- `dot1x auth-server`
- `dot1x auth-type mab-only`
- `dot1x authentication (Configuration)`
- `dot1x authentication (Interface)`
- `dot1x guest-vlan`
- `dot1x host-mode`
- `dot1x mac-auth-bypass`
- `dot1x max-eap-req`
- `dot1x max-suplicants`
- `dot1x port-control`
- `dot1x quiet-period`
- `dot1x reauthentication`
- `dot1x reauth-max`
- `dot1x server-timeout`
- `dot1x supplicant-timeout`
- `dot1x tx-period`
- `show dot1x cos-mapping interface`
- `show dot1x interface`

An authentication server must authenticate a client connected to an 802.1X switch port. Until the authentication, only EAPOL (Extensible Authentication Protocol over LAN) traffic is allowed through the port to which a client is connected. Once authentication is successful, normal traffic passes through the port.

FTOS supports RADIUS and Active Directory environments using 802.1X Port Authentication.

Important Points to Remember

FTOS limits network access for certain users by using VLAN assignments. 802.1X with VLAN assignment has these characteristics when configured on the switch and the RADIUS server.

- 802.1X is supported on **C** C-Series, **E** E-Series, **S** S-Series (S25/S50), **S4810**, **S4820T** and E-Series Terascale **E T**.
- 802.1X is not supported on the LAG or the channel members of a LAG.
- If no VLAN is supplied by the RADIUS server or if 802.1X authorization is disabled, the port is configured in its access VLAN after successful authentication.
- If 802.1X authorization is enabled but the VLAN information from the RADIUS server is not valid, the port returns to the unauthorized state and remains in the configured access VLAN. This prevents ports from appearing unexpectedly in an inappropriate VLAN due to a configuration error. Configuration errors create an entry in Syslog.
- If 802.1X authorization is enabled and all information from the RADIUS server is valid, the port is placed in the specified VLAN after authentication.
- If port security is enabled on an 802.1X port with VLAN assignment, the port is placed in the RADIUS server assigned VLAN.
- If 802.1X is disabled on the port, it is returned to the configured access VLAN.
- When the port is in the force authorized, force unauthorized, or shutdown state, it is placed in the configured access VLAN.
- If an 802.1X port is authenticated and put in the RADIUS server assigned VLAN, any change to the port access VLAN configuration will not take effect.
- The 802.1X with VLAN assignment feature is not supported on trunk ports, dynamic ports, or with dynamic-access port assignment through a VLAN membership.

debug dot1x

E C S
S4810
S4820T

Syntax

Display 802.1X debugging information.

debug dot1x [all | auth-pae-fsm | backend-fsm | eapol-pdu] [interface interface]

Parameters

all	Enable all 802.1X debug messages.
auth-pae-fsm	Enable authentication PAE FSM debug messages.
backend-fsm	Enable Backend FSM debug messages.
eapol-pdu	Enable EAPOL frame trace and related debug messages
interface interface	Restricts the debugging information to an interface.

Defaults Disabled

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810
	Version 8.4.1.0	Introduced on C-Series and S-Series

dot1x auth-fail-vlan

C **E** **S**

S4810

S4820T

Configure an authentication failure VLAN for users and devices that fail 802.1X authentication.

Syntax

dot1x auth-fail-vlan *vlan-id* [**max-attempts** *number*]

To delete the authentication failure VLAN, use the **no dot1x auth-fail-vlan** *vlan-id* [**max-attempts** *number*] command.

Parameters

<i>vlan-id</i>	Enter the VLAN Identifier. Range: 1 to 4094
max-attempts <i>number</i>	(OPTIONAL) Enter the keyword max-attempts followed number of attempts desired before authentication fails. Range: 1 to 5 Default: 3

Defaults

3 attempts

Command Modes

CONFIGURATION (*conf-if-interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series, E-Series and S-Series

Usage Information

If the host responds to 802.1X with an incorrect login/password, the login fails. The switch will attempt to authenticate again until the maximum attempts configured is reached. If the authentication fails after all allowed attempts, the interface is moved to the authentication failed VLAN.

Once the authentication VLAN is assigned, the port-state must be toggled to restart authentication. Authentication will occur at the next re-authentication interval ([dot1x reauthentication](#)).

**Related
Commands**

dot1x port-control	Enable port control on an interface.
dot1x guest-vlan	Configure a guest VLAN for limited access users or for devices that are not 802.1X capable.
show dot1x interface	Display the 802.1X configuration of an interface.

dot1x auth-server

C **E** **S****S4810****S4820T**

Configure the authentication server to RADIUS.

Syntax**dot1x auth-server radius****Defaults**

No default behavior or values

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x auth-type mab-only

C **S** **S4810****S4820T**

Use only the host MAC address to authenticate a device with MAC authentication bypass (MAB).

Syntax**dot1x auth-type mab-only****Defaults**

Disabled

Command Modes

INTERFACE

**Command
History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 8.4.2.1	Introduced on the C-Series and S-Series

**Usage
Information**

The prerequisites for enabling MAB-only authentication on a port are:

- 802.1X authentication must be enabled globally on the switch and on the port (**dot1x authentication** command).
- MAC authentication bypass must be enabled on the port (**dot1x mac-auth-bypass** command).

In MAB-only authentication mode, a port authenticates using the host MAC address even though 802.1x authentication is enabled. If the MAB-only authentication fails, the host is placed in the guest VLAN (if configured).

To disable MAB-only authentication on a port, enter the **no dot1x auth-type mab-only** command.

**Related
Commands**

dot1x mac-auth-bypass	Enable MAC authentication bypass.
---------------------------------------	-----------------------------------

dot1x authentication (Configuration)

C **E** **T** **S**

Enable dot1x globally; dot1x must be enabled both globally and at the interface level.

S4810

S4820T

Syntax

dot1x authentication

To disable dot1x on an globally, use the **no dot1x authentication** command.

Defaults

Disabled

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

**Related
Commands**

dot1x authentication (Interface)	Enable dot1x on an interface.
--	-------------------------------

dot1x authentication (Interface)

C **E** **T** **S**

Enable dot1x on an interface; dot1x must be enabled both globally and at the interface level.

S4810

S4820T

Syntax

dot1x authentication

To disable dot1x on an interface, use the **no dot1x authentication** command.

Defaults

Disabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

Related Commands

dot1x authentication (Configuration)	Enable dot1x globally.
--	------------------------

dot1x guest-vlan

C **E** **S****S4810****S4820T**

Configure a guest VLAN for limited access users or for devices that are not 802.1X capable.

Syntax

dot1x guest-vlan *vlan-id*

To disable the guest VLAN, use the **no dot1x guest-vlan** *vlan-id* command.

Parameters

<i>vlan-id</i>	Enter the VLAN Identifier. Range: 1 to 4094
----------------	--

Defaults

Not configured

Command Modes

CONFIGURATION (*conf-if-interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series, E-Series, and S-Series

Usage Information

802.1X authentication is enabled when an interface is connected to the switch. If the host fails to respond within a designated amount of time, the authenticator places the port in the guest VLAN.

If a device does not respond within 30 seconds, it is assumed that the device is not 802.1X capable. Therefore, a guest VLAN is allocated to the interface and authentication, for the device, will occur at the next re-authentication interval ([dot1x reauthentication](#)).

If the host fails authentication for the designated amount of times, the authenticator places the port in authentication failed VLAN ([dot1x auth-fail-vlan](#)).



Note: Layer 3 portion of guest VLAN and authentication fail VLANs can be created regardless if the VLAN is assigned to an interface or not. Once an interface is assigned a guest VLAN (which has an IP address), then routing through the guest VLAN is the same as any other traffic. However, interface may join/leave a VLAN dynamically.

**Related
Commands**

dot1x auth-fail-vlan	Configure an authentication failure VLAN.
dot1x reauthentication	Enable periodic re-authentication of the client.
dot1x reauth-max	Configure the maximum number of times to re-authenticate a port before it becomes unauthorized.

dot1x host-mode

C **E** **S**

Enable single-host or multi-host authentication.

S4810

S4820T

Syntax

dot1x host-mode { single-host | multi-host | multi-auth }

Parameters

single-host	Enable single-host authentication.
multi-host	Enable multi-host authentication.
multi-auth	Enable multi-supPLICANT authentication.

Defaults

single-host

Command Modes

INTERFACE

**Command
History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 8.4.1.0	The multi-auth option was introduced on the C-Series and S-Series.
Version 8.3.2.0	The single-host and multi-host options were introduced on the C-Series, E-Series, and S-Series

**Usage
Information**

- Single-host mode authenticates only one host per authenticator port, and drops all other traffic on the port.
- Multi-host mode authenticates the first host to respond to an Identity Request, and then permits all other traffic on the port.
- Multi-supPLICANT mode authenticates every device attempting to connect to the network on through the authenticator port.

dot1x mac-auth-bypass

C **S** **S4810**

Enable MAC authentication bypass. If 802.1X times out because the host did not respond to the Identity Request frame, FTOS attempts to authenticate the host based on its MAC address.

S4820T

Syntax

dot1x mac-auth-bypass

Defaults

Disabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 8.4.1.0	Introduced on C-Series and S-Series

Usage Information

To disable MAC authentication bypass on a port, enter the **no dot1x mac-auth-bypass** command.

dot1x max-eap-req

C **E** **S****S4810****S4820T**

Configure the maximum number of times an EAP (Extensive Authentication Protocol) request is transmitted before the session times out.

Syntax**dot1x max-eap-req** *number*

To return to the default, use the **no dot1x max-eap-req** command.

Parameters

<i>number</i>	Enter the number of times an EAP request is transmitted before a session time-out. Range: 1 to 10 Default: 2
---------------	--

Defaults

2

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x max-suplicants

C **E** **T** **S****S4810****S4820T**

Restrict the number of supplicants that can be authenticated and permitted to access the network through the port. This configuration is only takes effect in multi-auth mode.

Syntax**dot1x max-suplicants** *number*

Parameters	<i>number</i>	Enter the number of supplicants that can be authenticated on a single port in multi-auth mode. Range: 1-128 Default: 128
Defaults	128 hosts can be authenticated on a single authenticator port.	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810
	Version 8.4.1.0	Introduced on C-Series and S-Series
Related Commands	dot1x host-mode	Enable single-host or multi-host authentication

dot1x port-control

C **E** **S**

Enable port control on an interface.

S4810

S4820T

Syntax `dot1x port-control {force-authorized | auto | force-unauthorized}`

Parameters	force-authorized	Enter the keyword <code>force-authorized</code> to forcibly authorize a port.
	auto	Enter the keyword <code>auto</code> to authorize a port based on the 802.1X operation result.
	force-unauthorized	Enter the keyword <code>force-unauthorized</code> to forcibly de-authorize a port.

Defaults No default behavior or values

Command Modes Auto

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series

Usage Information The authenticator performs authentication only when port-control is set to **auto**.

dot1x quiet-period

C E S

S4810

S4820T

Set the number of seconds that the authenticator remains quiet after a failed authentication with a client.

Syntax

dot1x quiet-period *seconds*

To disable quiet time, use the **no dot1x quiet-time** command.

Parameters

<i>seconds</i>	Enter the number of seconds. Range: 1 to 65535 Default: 60
----------------	--

Defaults

60 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x reauthentication

C E S

S4810

S4820T

Enable periodic re-authentication of the client.

Syntax

dot1x reauthentication [*interval seconds*]

To disable periodic re-authentication, use the **no dot1x reauthentication** command.

Parameters

interval <i>seconds</i>	(Optional) Enter the keyword interval followed by the interval time, in seconds, after which re-authentication will be initiated. Range: 1 to 31536000 (1 year) Default: 3600 (1 hour)
--------------------------------	---

Defaults

3600 seconds (1 hour)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810

Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x reauth-max

C E S

S4810

S4820T

Configure the maximum number of times a port can re-authenticate before the port becomes unauthorized.

Syntax

dot1x reauth-max *number*

To return to the default, use the **no dot1x reauth-max** command.

Parameters

<i>number</i>	Enter the permitted number of re-authentications. Range: 1 - 10 Default: 2
---------------	--

Defaults

2

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x server-timeout

C E S

S4810

S4820T

Configure the amount of time after which exchanges with the server time out.

Syntax

dot1x server-timeout *seconds*

To return to the default, use the **no dot1x server-timeout** command.

Parameters

<i>seconds</i>	Enter a time-out value in seconds. Range: 1 to 300, where 300 is implementation dependant. Default: 30
----------------	---

Defaults

30 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

When you configure the **dot1x server-timeout** value, you must take into account the communication medium used to communicate with an authentication server and the number of RADIUS servers configured. Ideally, the **dot1x server-timeout** value (in seconds) is based on the configured RADIUS-server timeout and retransmit values and calculated according to the following formula:

dot1x server-timeout *seconds* > (radius-server retransmit *seconds* + 1) * radius-server timeout *seconds*

Where the default values are as follows: **dot1x server-timeout** (30 seconds), radius-server retransmit (3 seconds), and radius-server timeout (5 seconds).

For example:

```
FTOS(conf)#radius-server host 10.11.197.105 timeout 6
FTOS(conf)#radius-server host 10.11.197.105 retransmit 4
FTOS(conf)#interface gigabitethernet 2/23
FTOS(conf-if-gi-2/23)#dot1x server-timeout 40
```

dot1x supplicant-timeout

C **E** **S****S4810****S4820T**

Configure the amount of time after which exchanges with the supplicant time out.

Syntax

dot1x supplicant-timeout *seconds*

To return to the default, use the **no dot1x supplicant-timeout** command.

Parameters

<i>seconds</i>	Enter a time-out value in seconds. Range: 1 to 300, where 300 is implementation dependant. Default: 30
----------------	--

Defaults

30 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x tx-period

C E S

S4810

S4820T

Configure the intervals at which EAPOL PDUs are transmitted by the Authenticator PAE.

Syntax `dot1x tx-period seconds`

To return to the default, use the **no dot1x tx-period** command.

Parameters	<i>seconds</i>	Enter the interval time, in seconds, that EAPOL PDUs are transmitted. Range: 1 to 65535 Default: 30
	Defaults	30 seconds
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series

show dot1x cos-mapping interface

C S S4810

S4820T

Display the CoS priority-mapping table provided by the RADIUS server and applied to authenticated supplicants on an 802.1X-enabled port.

Syntax `show dot1x cos-mapping interface interface [mac-address mac-address]`

Parameters	<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
	<i>mac-address</i>	(Optional) MAC address of an 802.1X-authenticated supplicant.
Defaults	No default values or behavior	
Command Modes	EXEC	
	EXEC privilege	

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810
Version 8.4.2.1	Introduced on the C-Series and S-Series

Usage Information

Enter a supplicant's MAC address using the **mac-address** option to display CoS mapping information only for the specified supplicant.

You can display the CoS mapping information applied to traffic from authenticated supplicants on 802.1X-enabled ports that are in single-host, multi-host, and multi-supplicant authentication modes.

Example

```
FTOS#show dot1x cos-mapping interface gigabitethernet 2/21

802.1p CoS re-map table on Gi 2/21:
-----
Dot1p          Remapped Dot1p
0              7
1              6
2              5
3              4
4              3
5              2
6              1
7              0

FTOS#show dot1x cos-mapping int g 2/21 mac-address 00:00:01:00:07:00

802.1p CoS re-map table on Gi 2/21:
-----

802.1p CoS re-map table for Supplicant: 00:00:01:00:07:00

Dot1p          Remapped Dot1p
0              7
1              6
2              5
3              4
4              3
5              2
6              1
7              0
```

show dot1x interface

C **E** **S****S4810****S4820T**

Display the 802.1X configuration of an interface.

Syntax

show dot1x interface *interface* [**mac-address** *mac-address*]

Parameters	<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
	<i>mac-address</i>	(Optional) MAC address of a supplicant.
Defaults	No default values or behavior	
Command Modes	EXEC	
	EXEC privilege	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.4.2.1	Introduced mac-address option on the C-Series and S-Series
	Version 7.6.1.0	Introduced on C-Series, E-Series, and S-Series
Usage Information	C-Series and S-Series only: Enter a supplicant's MAC address using the mac-address option to display information only on the 802.1X-enabled port to which the supplicant is connected.	
	If 802.1X multi-supplicant authentication is enabled on a port, additional 802.1X configuration details (port authentication status, untagged VLAN ID, authentication PAE state, and backend state) are displayed for each supplicant as shown in the last example.	
Example	<pre> FTOS#show dot1x int Gi 2/32 802.1x information on Gi 2/32: ----- Dot1x Status: Enable Port Control: AUTO Port Auth Status: UNAUTHORIZED Re-Authentication: Disable Untagged VLAN id: None Guest VLAN: Enable Guest VLAN id: 10 Auth-Fail VLAN: Enable Auth-Fail VLAN id: 11 Auth-Fail Max-Attempts: 3 Tx Period: 30 seconds Quiet Period: 60 seconds ReAuth Max: 2 Supplicant Timeout: 30 seconds Server Timeout: 30 seconds Re-Auth Interval: 3600 seconds Max-EAP-Req: 2 Auth Type: SINGLE_HOST Auth PAE State: Initialize Backend State: Initialize </pre>	

**Example
(show dot1x
interface
mac-address)**

```

FTOS#
FTOS#show dot1x interface gig 2/21 mac-address 00:00:01:00:07:00

802.1x information on Gi 2/21:
-----
Dot1x Status:          Enable
Port Control:          AUTO
Re-Authentication:    Disable
Guest VLAN:           Disable
Guest VLAN id:        NONE
Auth-Fail VLAN:       Disable
Auth-Fail VLAN id:    NONE
Auth-Fail Max-Attempts: NONE
Mac-Auth-Bypass:      Enable
Mac-Auth-Bypass Only: Disable
Tx Period:            5 seconds
Quiet Period:         60 seconds
ReAuth Max:           1
Supplicant Timeout:   30 seconds
Server Timeout:       30 seconds
Re-Auth Interval:     60 seconds
Max-EAP-Req:          2
Host Mode:             MULTI_AUTH
Max-Supplicants:      128

Port status and State info for Supplicant: 00:00:01:00:07:00

Port Auth Status:      AUTHORIZED (MAC-AUTH-BYPASS)
Untagged VLAN id:      4094
Auth PAE State:         Authenticated
Backend State:         Idle
FTOS#

```

**Example
(Multi-Supplicant
Authentication
enabled)**

```

FTOS#show dot1x interface g 0/21

802.1x information on Gi 0/21:
-----
Dot1x Status:          Enable
Port Control:          AUTO
Re-Authentication:    Disable
Guest VLAN:           Enable
Guest VLAN id:        100
Auth-Fail VLAN:       Disable
Auth-Fail VLAN id:    NONE
Auth-Fail Max-Attempts: NONE
Mac-Auth-Bypass:      Disable
Mac-Auth-Bypass Only: Disable
Tx Period:            30 seconds
Quiet Period:         60 seconds
ReAuth Max:           3
Supplicant Timeout:   30 seconds
Server Timeout:       30 seconds
Re-Auth Interval:     60 seconds
Max-EAP-Req:          2
Host Mode:             MULTI_AUTH
Max-Supplicants:      128

Port status and State info for Supplicant: 00:00:00:00:00:10

Port Auth Status:      AUTHORIZED
Untagged VLAN id:      400
Auth PAE State:         Authenticated
Backend State:         Idle

```


Port status and State info for Supplicant: 00:00:00:00:00:11

Port Auth Status: AUTHORIZED
Untagged VLAN id: 300
Auth PAE State: Authenticated
Backend State: Idle

Port status and State info for Supplicant: 00:00:00:00:00:15

Port Auth Status: AUTHORIZED (GUEST-VLAN)
Untagged VLAN id: 100
Auth PAE State: Authenticated
Backend State: Idle


Access Control Lists (ACL)

Overview

Access Control Lists (ACLs) are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

FTOS supports the following types of Access Control List (ACL), IP prefix list, and route map:

- [Commands Common to all ACL Types](#)
- [Common IP ACL Commands](#)
- [Standard IP ACL Commands](#)
- [Extended IP ACL Commands](#)
- [Common MAC Access List Commands](#)
- [Standard MAC ACL Commands](#)
- [Extended MAC ACL Commands](#)
- [IP Prefix List Commands](#)
- [Route Map Commands](#)
- [AS-Path Commands](#)
- [IP Community List Commands](#)

 **Note:** For ACL commands used in the Trace function, refer to the section [Trace List Commands](#) in the chapter [Security](#).

 **Note:** For IPv6 ACL commands, refer to [Access Control Lists \(ACL\)](#).

Commands Common to all ACL Types

The following commands are available within each ACL mode and do not have mode-specific options. Some commands may use similar names, but require different options to support the different ACL types (for example, deny).

- [description](#)
- [remark](#)

- [show config](#)

description

C E S

S4810

S4820T

Syntax

description *text*

Parameters

<i>text</i>	Enter a text string up to 80 characters long.
-------------	---

Defaults

Not enabled.

Command Modes

CONFIGURATION-STANDARD-ACCESS-LIST

CONFIGURATION-EXTENDED-ACCESS-LIST

CONFIGURATION-MAC ACCESS LIST-STANDARD

CONFIGURATION-MAC ACCESS LIST-EXTENDED

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 8.1.1.0	Introduced on E-Series ExaScale
-----------------	---------------------------------

Version 7.6.1.0	Introduced on S-Series
-----------------	------------------------

Version 7.5.1.0	Introduced on C-Series
-----------------	------------------------

pre-Version 6.2.1.1	Introduced on E-Series
---------------------	------------------------

remark

C E S

S4810

S4820T

Syntax

remark [*remark-number*] [*description*]

Parameters

<i>remark-number</i>	Enter the remark number. Note that the same sequence number can be used for the remark and an ACL rule. Range: 0 to 4294967290
----------------------	---

<i>description</i>	Enter a description of up to 80 characters.
--------------------	---

Defaults

Not configured

Command Modes

CONFIGURATION-STANDARD-ACCESS-LIST

CONFIGURATION-EXTENDED-ACCESS-LIST

CONFIGURATION-MAC ACCESS LIST-STANDARD

CONFIGURATION-MAC ACCESS LIST-EXTENDED

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Added support for S-Series
	Version 7.5.1.0	Added support for C-Series
	pre-Version 6.4.1.0	Introduced for E-Series

Usage Information

The remark command is available in each ACL mode. You can configure up to 4294967290 remarks in a given ACL.

The following example shows the use of the remark command twice within the CONFIGURATION-STANDARD-ACCESS-LIST mode. Here, the same sequence number was used for the remark and for an associated ACL rule. The remark will precede the rule in the running-config because it is assumed that the remark is for the rule with the same sequence number, or the group of rules that follow the remark.

Example

```

FTOS(config-std-nacl)#remark 10 Deny rest of the traffic
FTOS(config-std-nacl)#remark 5 Permit traffic from XYZ Inc.
FTOS(config-std-nacl)#show config
!
ip access-list standard test
remark 5 Permit traffic from XYZ Inc.
seq 5 permit 1.1.1.0/24
remark 10 Deny rest of the traffic
seq 10 Deny any
FTOS(config-std-nacl)#

```

Related Commands	show config	Display the current ACL configuration.
-------------------------	-----------------------------	--

show config

C E S

S4810

S4820T

Display the current ACL configuration.

Syntax show config

Command Modes

CONFIGURATION-STANDARD-ACCESS-LIST

CONFIGURATION-EXTENDED-ACCESS-LIST

CONFIGURATION-MAC ACCESS LIST-STANDARD

CONFIGURATION-MAC ACCESS LIST-EXTENDED

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Example

```
FTOS(config-ext-nacl)#show conf
!
ip access-list extended patches
FTOS(config-ext-nacl)#
```

Common IP ACL Commands

The following commands are available within both IP ACL modes (Standard and Extended) and do not have mode-specific options. When an access-list (ACL) is created without any rule and then applied to an interface, ACL behavior reflects an implicit permit.

C and **S** platforms support Ingress IP ACLs only.

The following commands allow you to clear, display, and assign IP ACL configurations.

- [access-class](#)
- [clear counters ip access-group](#)
- [ip access-group](#)
- [show ip access-lists](#)
- [show ip accounting access-list](#)



Note: Refer also to [Commands Common to all ACL Types](#).

access-class

C **E** **S**

S4810

S4820T

Syntax

Apply a standard ACL to a terminal line.

```
access-class access-list-name
```

Parameters	<i>access-list-name</i>	Enter the name of a configured Standard ACL, up to 140 characters.
Defaults	Not configured.	
Command Modes	LINE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.2.1.1	Introduced

clear counters ip access-group

C **E** **S**

Erase all counters maintained for access lists.

Syntax clear counters ip access-group [*access-list-name*]

Parameters	<i>access-list-name</i>	(OPTIONAL) Enter the name of a configured access-list, up to 140 characters.
-------------------	-------------------------	--

Command Modes EXEC Privilege

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.2.1.1	Introduced

ip access-group

C **E** **S**

Assign an IP access list (IP ACL) to an interface.

Syntax ip access-group *access-list-name* {in | out} [implicit-permit] [vlan *vlan-id*]

Parameters	<i>access-list-name</i>	Enter the name of a configured access list, up to 140 characters.
	in	Enter the keyword in to apply the ACL to incoming traffic.

out	Enter the keyword <code>out</code> to apply the ACL to outgoing traffic. Note: Available only on 12-port 1-Gigabit Ethernet FLEX line card. Refer to your line card documentation for specifications. Not available on S-Series.
implicit-permit	(OPTIONAL) Enter the keyword <code>implicit-permit</code> to change the default action of the ACL from <code>implicit-deny</code> to <code>implicit-permit</code> (that is, if the traffic does not match the filters in the ACL, the traffic is permitted instead of dropped).
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> followed by the ID numbers of the VLANs. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094)

Defaults Not enabled.

Command Modes INTERFACE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced

Usage Information

You can assign one ACL (standard or extended ACL) to an interface.



Note: This command is supported on the loopback interfaces of EE3, and EF series RPMs. It is *not* supported on loopback interfaces ED series RPM, or on C-Series or S-Series loopback interfaces.

When you apply an ACL that filters IGMP traffic, all IGMP traffic is redirected to the CPUs and soft-forwarded, if required, in the following scenarios:

- on a Layer 2 interface - if a Layer 3 ACL is applied to the interface.
- on a Layer 3 port or on a Layer 2/Layer 3 port

Related Commands

ip access-list standard	Configure a standard ACL.
ip access-list extended	Configure an extended ACL.

show ip access-lists

C E S

S4810

S4820T

Display all of the IP ACLs configured in the system, whether or not they are applied to an interface, and the count of matches/mismatches against each ACL entry displayed.

Syntax

show ip access-lists [*access-list-name*] [interface *interface*] [in | out]

Parameters

<i>access-list-name</i>	Enter the name of a configured MAC ACL, up to 140 characters.
interface <i>interface</i>	Enter the keyword interface followed by the one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN interface,
in out	Identify whether ACL is applied on ingress or egress side.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.1.0	Introduced
Version 8.3.10.0	Added support for VLAN interface on S4810
Version 8.3.7.0	Introduced on S4810

show ip accounting access-list

C **E** **S**

Display the IP access-lists created on the switch and the sequence of filters.

Syntaxshow ip accounting {access-list *access-list-name* | cam_count} interface *interface***Parameters**

<i>access-list-name</i>	Enter the name of the ACL to be displayed.
-------------------------	--

<code>cam_count</code>	List the count of the CAM rules for this ACL.
<code>interface interface</code>	Enter the keyword <code>interface</code> followed by the interface type and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced

Example

```
FTOS#show ip accounting access FILTER1 interface gig 1/6
Extended IP access list FILTER1
seq 5 deny ip any 191.1.0.0 /16 count (0x00 packets)
seq 10 deny ip any 191.2.0.0 /16 order 4
seq 15 deny ip any 191.3.0.0 /16
seq 20 deny ip any 191.4.0.0 /16
seq 25 deny ip any 191.5.0.0 /16
```

[Table 7-1](#) defines the information in the example above.

Table 7-1. show ip accounting access-lists Command Example Field

Field	Description
“Extended IP..”	Displays the name of the IP ACL.
“seq 5...”	Displays the filter. If the keywords <code>count</code> or <code>byte</code> were configured in the filter, the number of packets or bytes processed by the filter is displayed at the end of the line.
“order 4”	Displays the QoS order of priority for the ACL entry.

Standard IP ACL Commands

When an ACL is created without any rule and then applied to an interface, ACL behavior reflects an implicit permit.

C and **S** platforms support Ingress IP ACLs only.

The commands needed to configure a Standard IP ACL are:

- deny
- ip access-list standard
- permit
- resequence access-list
- resequence prefix-list ipv4
- seq



Note: Refer also to [Commands Common to all ACL Types](#) and [Common IP ACL Commands](#).

deny

C **E** **S**

S4810

S4820T

Syntax

Configure a filter to drop packets with a certain IP address.

```
deny { source [mask] | any | host ip-address } [count [byte] | log] [dscp value] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny { source [mask] | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address in dotted decimal format of the network from which the packet was sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous (discontiguous).
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address only.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.

byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to enter ACL matches in the log.
dscp	(OPTIONAL) Enter the keyword <code>dcsp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order of priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default(255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-STANDARD-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.1.0	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

**Related
Commands**

ip access-list standard	Configure a standard ACL.
permit	Configure a permit filter.

ip access-list standard

C E S

S4810

S4820T

Create a standard IP access list (IP ACL) to filter based on IP address.

Syntax

ip access-list standard *access-list-name*

Parameters

<i>access-list-name</i>	Enter a string up to 140 characters long as the ACL name.
-------------------------	---

Defaults

All IP access lists contain an implicit “deny any,” that is, if no match occurs, the packet is dropped.

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option.
Version 6.5.1.0	Expanded to include the optional QoS order priority for the ACL entry.

**Usage
Information**

FTOS supports one ingress and one egress IP ACL per interface.

Prior to 7.8.1.0, names are up to 16 characters long.

The number of entries allowed per ACL is hardware-dependent. Refer to your line card documentation for detailed specification on entries allowed per ACL.

Example

```
FTOS(conf)#ip access-list standard TestList
FTOS(config-std-nacl)#
```

Related Commands

ip access-list extended	Create an extended access list.
show config	Display the current configuration.

permit

C E S

S4810

S4820T

Syntax

Configure a filter to permit packets from a specific source IP address to leave the switch.

```
permit { source [mask] | any | host ip-address} [count [byte] | log] [dscp value] [order] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit { source [mask] | any | host ip-address}` command.

Parameters

<i>source</i>	Enter the IP address in dotted decimal format of the network from which the packet was sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <i>any</i> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <i>host</i> followed by the IP address to specify a host IP address or hostname.
<i>count</i>	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
<i>dscp</i>	(OPTIONAL) Enter the keyword <i>dscp</i> to match to the IP DCSCP values.
<i>byte</i>	(OPTIONAL) Enter the keyword <i>byte</i> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword <i>log</i> to enter ACL matches in the log.
<i>order</i>	(OPTIONAL) Enter the keyword <i>order</i> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <i>order</i> keyword is not used, the ACLs have the lowest order by default (255).
<i>monitor</i>	(OPTIONAL) Enter the keyword <i>monitor</i> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section "Flow-based Monitoring" in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-STANDARD-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Related Commands

deny	Assign a IP ACL filter to deny IP packets.
ip access-list standard	Create a standard ACL.

resequence access-list



Re-assign sequence numbers to entries of an existing access-list.

Syntax

```
resequence access-list { ipv4 | ipv6 | mac } { access-list-name StartingSeqNum Step-to-Increment }
```

Parameters

ipv4 ipv6 mac	Enter the keyword ipv4, or mac to identify the access list type to resequence.
<i>access-list-name</i>	Enter the name of a configured IP access list.

	<i>StartingSeqNum</i>	Enter the starting sequence number to resequence. Range: 0 to 4294967290
	<i>Step-to-Increment</i>	Enter the step to increment the sequence number. Range: 1 to 4294967290
Defaults	No default values or behavior	
Command Modes	EXEC EXEC Privilege	
Command History	Version 8.2.1.0	Introduced on E-Series ExaScale (IPv6)
	Version 8.1.1.0	Introduced on E-Series ExaScale (IPv4)
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 7.4.1.0	Introduced
Usage Information	When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing access-list.	
Related Commands	resequence prefix-list ipv4	Resequence a prefix list

resequence prefix-list ipv4

C **E** **S**

Re-assign sequence numbers to entries of an existing prefix list.

Syntax

resequence prefix-list ipv4 {*prefix-list-name* *StartingSeqNum* *Step-to-increment*}

Parameters

<i>prefix-list-name</i>	Enter the name of configured prefix list, up to 140 characters long.
<i>StartingSeqNum</i>	Enter the starting sequence number to resequence. Range: 0 to 65535
<i>Step-to-Increment</i>	Enter the step to increment the sequence number. Range: 1 to 65535

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.

Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Introduced

Usage Information

When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing prefix list.

Prior to 7.8.1.0, names are up to 16 characters long.

Related Commands

resequence access-list	Resequence an access-list
--	---------------------------

seq

C E S

S4810

S4820T

Assign a sequence number to a deny or permit filter in an IP access list while creating the filter.

Syntax

`seq sequence-number {deny | permit} {source [mask] | any | host ip-address} [count [byte] | log] [dscp value] [order] [monitor] [fragments]`

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290. S4810 and S4820T Range: 0 to 65534
<i>deny</i>	Enter the keyword deny to configure a filter to drop packets meeting this condition.
<i>permit</i>	Enter the keyword permit to configure a filter to forward packets meeting this criteria.
<i>source</i>	Enter a IP address in dotted decimal format of the network from which the packet was received.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword any to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address or hostname.
<i>count</i>	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword log to enter ACL matches in the log.
<i>dscp</i>	(OPTIONAL) Enter the keyword dcsp to match to the IP DCSCP values.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <code>order</code> keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured

Command Modes CONFIGURATION-STANDARD-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `monitor` option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via QoS policy framework.
- The `order` option takes precedence over the `seq sequence-number`.
- If `sequence-number` is **not** configured, then rules with the same `order` value are ordered according to their configuration order.
- If the `sequence-number` is configured, then the `sequence-number` is used as a tie breaker for rules with the same `order`.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

**Related
Commands**

deny	Configure a filter to drop packets.
permit	Configure a filter to forward packets.
seq	Assign a sequence number to a deny or permit filter in an IP access list while creating the filter.

Extended IP ACL Commands

When an ACL is created without any rule and then applied to an interface, ACL behavior reflects an implicit permit.

The following commands configure extended IP ACLs, which in addition to the IP address also examine the packet's protocol type.

C platforms support Ingress IP ACLs only.

E and **S** platforms support Ingress and Egress IP ACLs.

- [deny](#)
- [deny arp](#)
- [deny ether-type](#)
- [deny icmp](#)
- [deny tcp](#)
- [deny udp](#)
- [ip access-list extended](#)
- [permit](#)
- [permit arp](#)
- [permit ether-type](#)
- [permit icmp](#)
- [permit tcp](#)
- [permit udp](#)
- [resequence access-list](#)
- [resequence prefix-list ipv4](#)
- [seq arp](#)
- [seq ether-type](#)

deny

C E S

S4810

S4820T

Syntax

- seq



Note: Refer also to [Commands Common to all ACL Types](#) and [Common IP ACL Commands](#).

Configure a filter that drops IP packets meeting the filter criteria.

```
deny {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address} [count [byte] | log] [dscp value] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

<code>ip</code>	Enter the keyword <code>ip</code> to configure a generic IP access list. The keyword <code>ip</code> specifies that the access list will deny all IP protocols.
<code>ip-protocol-number</code>	Enter a number from 0 to 255 to deny based on the protocol identified in the IP protocol header.
<code>source</code>	Enter the IP address of the network or host from which the packets were sent.
<code>mask</code>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<code>any</code>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<code>host ip-address</code>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<code>destination</code>	Enter the IP address of the network or host to which the packets are sent.
<code>count</code>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<code>byte</code>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<code>log</code>	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to enter ACL matches in the log.
<code>dscp</code>	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <code>order</code> keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

The `monitor` option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Related Commands

<code>deny tcp</code>	Assign a filter to deny TCP packets.
-----------------------	--------------------------------------

deny arp

E

Configure an egress filter that drops ARP packets on egress ACL supported line cards (refer to your line card documentation).

Syntax

```
deny arp { destination-mac-address mac-address-mask | any } vlan vlan-id { ip-address | any | opcode code-number } [count [byte] | log] [order] [monitor]
```

To remove this filter, use one of the following:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny arp { destination-mac-address mac-address-mask | any } vlan vlan-id { ip-address | any | opcode code-number }` command.

Parameters

<i>destination-mac-address mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop any ARP traffic on the interface.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<i>ip-address</i>	Enter an IP address in dotted decimal format (A.B.C.D) as the target IP address of the ARP.
opcode <i>code-number</i>	Enter the keyword <code>opcode</code> followed by the number of the ARP opcode. Range: 1 to 23.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added <code>monitor</code> option
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

You cannot include IP, TCP or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs (ARP and Ether-type) to Layer 2 interfaces only.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

deny ether-type



Configure an egress filter that drops specified types of Ethernet packets on egress ACL supported line cards (refer to your line card documentation).

Syntax

```
deny ether-type protocol-type-number { destination-mac-address mac-address-mask | any }
vlan vlan-id { source-mac-address mac-address-mask | any } [count [byte] | log] [order]
[monitor]
```

To remove this filter, use one of the following:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny ether-type protocol-type-number { destination-mac-address mac-address-mask | any } vlan vlan-id { source-mac-address mac-address-mask | any }` command.

Parameters

<i>protocol-type-number</i>	Enter a number from 600 to FFFF as the specific Ethernet type traffic to drop.
<i>destination-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<i>source-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section "Flow-based Monitoring" in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added monitor option
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

You cannot include IP, TCP or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs (ARP and Ether-type) to Layer 2 interfaces only.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

deny icmp



Configure a filter to drop all or specific ICMP messages.

Syntax

```
deny icmp { source mask | any | host ip-address } { destination mask | any | host ip-address } [dscp] [message-type] [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter’s sequence number or
- Use the `no deny icmp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>dscp</i>	Enter this keyword to deny a packet based on DSCP value. Range: 0-63

<i>message-type</i>	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type (ICMP message types are listed in Table 7-2). Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.1.0	Added <code>dscp</code> keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The `monitor` option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Table 7-2 lists the keywords displayed in the CLI help and their corresponding ICMP Message Type Name.

Table 7-2. ICMP Message Type Keywords

Keyword	ICMP Message Type Name
administratively-prohibited	Administratively prohibited
alternate-address	Alternate host address
conversion-error	Datagram conversion error
dod-host-prohibited	Host prohibited
dod-net-prohibited	Net prohibited
echo	Echo
echo-reply	Echo reply
general-parameter-problem	Parameter problem
host-isolated	Host isolated
host-precedence-unreachable	Host unreachable for precedence
host-redirect	Host redirect
host-tos-redirect	Host redirect for TOS
host-tos-unreachable	Host unreachable for TOS
host-unknown	Host unknown
host-unreachable	Host unreachable
information-reply	Information replies
information-request	Information requests
mask-reply	Mask replies
mask-request	Mask requests
mobile-redirect	Mobile host redirect
net-redirect	Network redirect
net-tos-redirect	Network redirect for TOS
net-tos-unreachable	Network unreachable for TOS
net-unreachable	Network unreachable
network-unknown	Network unknown
no-room-for-option	Parameter required but no room
option-missing	Parameter required but not present
packet-too-big	Fragmentation needed and DF set
parameter-problem	All parameter problems
port-unreachable	Port unreachable
precedence-unreachable	Precedence cutoff
protocol-unreachable	Protocol unreachable
reassembly-timeout	Reassembly timeout

Table 7-2. ICMP Message Type Keywords

Keyword	ICMP Message Type Name
redirect	All redirects
router-advertisement	Router discovery advertisements
router-solicitation	Router discovery solicitations
source-quench	Source quenches
source-route-failed	Source route failed
time-exceeded	All time exceeded
timestamp-reply	Timestamp replies
timestamp-request	Timestamp requests
traceroute	Traceroute
ttl-exceeded	TTL exceeded
unreachable	All unreachables

deny tcp



Configure a filter that drops TCP packets meeting the filter criteria.

Syntax

```
deny tcp { source mask | any | host ip-address } [bit] [operator port [port]] { destination mask | any | host ip-address } [dscp] [bit] [operator port [port]] [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny tcp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<i>dscp</i>	Enter this keyword to deny a packet based on DSCP value. Range: 0-63

<i>bit</i>	Enter a flag or combination of bits: ack: acknowledgement field fin: finish (no more data from the user) psh: push function rst: reset the connection syn: synchronize sequence numbers urg: urgent field
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two ports for the <i>port</i> command parameter.
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>count</i>	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <i>byte</i> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword <i>log</i> to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
<i>order</i>	(OPTIONAL) Enter the keyword <i>order</i> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
<i>monitor</i>	(OPTIONAL) Enter the keyword <i>monitor</i> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
<i>fragments</i>	Enter the keyword <i>fragments</i> to use ACLs to control packet fragments.

Defaults

Not configured.

Command Modes

CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.1.0	Added dscp keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option. Deprecated established keyword.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (gt, lt, range) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024
Total Ports: 1024					

Related Commands

deny	Assign a filter to deny IP traffic.
deny udp	Assign a filter to deny UDP traffic.

deny udp



Configure a filter to drop UDP packets meeting the filter criteria.

Syntax

```
deny udp { source mask | any | host ip-address } [ operator port [port] ] { destination mask | any | host ip-address } [dscp] [ operator port [port] ] [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny udp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<i>dscp</i>	Enter this keyword to deny a packet based on DSCP value. Range: 0-63
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the <code>range</code> logical operand. Range: 0 to 65535
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.

count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.1.0	Added <code>dscp</code> keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the `count byte` options, only bytes are incremented.

The `monitor` option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (gt, lt, range) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 will use 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related

Commands

deny	Assign a deny filter for IP traffic.
deny tcp	Assign a deny filter for TCP traffic.

ip access-list extended

C **E** **S**

54810

54820T

Name (or select) an extended IP access list (IP ACL) based on IP addresses or protocols.

Syntax

ip access-list extended *access-list-name*

To delete an access list, use the no ip access-list extended *access-list-name* command.

Parameters

<i>access-list-name</i>	Enter a string up to 140 characters long as the access list name.
-------------------------	---

Defaults

All access lists contain an implicit “deny any”; that is, if no match occurs, the packet is dropped.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The number of entries allowed per ACL is hardware-dependent. Refer to your line card documentation for detailed specification on entries allowed per ACL.

Prior to 7.8.1.0, names are up to 16 characters long.

Example

```
FTOS (conf) #ip access-list extended TESTListEXTEND
FTOS (config-ext-nacl) #
```

Related Commands

ip access-list standard	Configure a standard IP access list.
show config	Display the current configuration.

permit

C **E** **S**

S4810

S4820T

Configure a filter to pass IP packets meeting the filter criteria.

Syntax

```
permit {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address} [count [byte] | log] [dscp value] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

<code>ip</code>	Enter the keyword <code>ip</code> to configure a generic IP access list. The keyword <code>ip</code> specifies that the access list will permit all IP protocols.
<code>ip-protocol-number</code>	Enter a number from 0 to 255 to permit based on the protocol identified in the IP protocol header. S4810 and S4820T Range: 0 to 128
<code>source</code>	Enter the IP address of the network or host from which the packets were sent.
<code>mask</code>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.

any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword log to enter ACL matches in the log.
dscp	(OPTIONAL) Enter the keyword dscp to match to the IP DSCP values.
order	(OPTIONAL) Enter the keyword order to specify the QoS order of priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword monitor when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword fragments to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the “Quality of Service” chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Related Commands

ip access-list extended	Create an extended ACL.
permit tcp	Assign a permit filter for TCP packets.
permit udp	Assign a permit filter for UDP packets.

permit arp

E

Configure a filter that forwards ARP packets meeting this criteria. This command is supported only on 12-port GE line cards with SFP optics; refer to your line card documentation for specifications. \

Syntax

```
permit arp { destination-mac-address mac-address-mask | any } vlan vlan-id { ip-address | any | opcode code-number } [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, use one of the following:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit arp { destination-mac-address mac-address-mask | any } vlan vlan-id { ip-address | any | opcode code-number }` command.

Parameters

<i>destination-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>any</i>	Enter the keyword <code>any</code> to match and drop any ARP traffic on the interface.
<i>vlan vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<i>ip-address</i>	Enter an IP address in dotted decimal format (A.B.C.D) as the target IP address of the ARP.
<i>opcode code-number</i>	Enter the keyword <code>opcode</code> followed by the number of the ARP opcode. Range: 1 to 16.

count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the Quality of Service chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The monitor option is relevant in the context of flow-based monitoring only. Refer to the [Port Monitoring](#) chapter.

You cannot include IP, TCP or UDP filters in an ACL configured with ARP filters.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

permit ether-type

E

Configure a filter that allows traffic with specified types of Ethernet packets. This command is supported only on 12-port GE line cards with SFP optics; refer to your line card documentation for specifications.

Syntax

```
permit ether-type protocol-type-number { destination-mac-address mac-address-mask | any }
vlan vlan-id { source-mac-address mac-address-mask | any } [count [byte] | log] [order]
[monitor]
```

To remove this filter, use one of the following:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit ether-type protocol-type-number { destination-mac-address mac-address-mask | any } vlan vlan-id { source-mac-address mac-address-mask | any }` command.

Parameters

<i>protocol-type-number</i>	Enter a number from 600 to FFF as the specific Ethernet type traffic to drop.
<i>destination-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<i>source-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <code>order</code> keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added <code>monitor</code> option
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. Refer to the Quality of Service chapter of the *FTOS Configuration Guide* for more information.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The `monitor` option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.

You cannot include IP, TCP or UDP filters in an ACL configured with ARP filters.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

permit icmp



Configure a filter to allow all or specific ICMP messages.

Syntax

```
permit icmp { source mask | any | host ip-address } { destination mask | any | host ip-address } [dscp] [message-type] [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit icmp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <i>any</i> to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword <i>host</i> followed by the IP address to specify a host IP address.
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter this keyword to deny a packet based on DSCP value. Range: 0-63
<i>message-type</i>	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type (ICMP message types are listed in Table 7-2). Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
count	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <i>byte</i> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <i>log</i> to have the information kept in an ACL log file.
order	(OPTIONAL) Enter the keyword <i>order</i> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <i>monitor</i> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.
fragments	Enter the keyword <i>fragments</i> to use ACLs to control packet fragments.

Defaults

Not configured

Command Modes

CONFIGURATION-STANDARD-ACCESS-LIST

Command History

Version 8.3.1.0	Added dscp keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added support for non-contiguous mask and added the monitor option.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the Quality of Service chapter of the *FTOS Configuration Guide* for more information.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

The monitor option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

permit tcp

C E S

Syntax

Configure a filter to pass TCP packets meeting the filter criteria.

```
permit tcp { source mask | any | host ip-address } [bit] [operator port [port]]
{ destination mask | any | host ip-address } [bit] [dscp] [operator port [port]] [count [byte] |
log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no permit tcp { *source mask* | any | host *ip-address* } { *destination mask* | any | host *ip-address* } command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>bit</i>	Enter a flag or combination of bits: ack: acknowledgement field fin: finish (no more data from the user) psh: push function rst: reset the connection syn: synchronize sequence numbers urg: urgent field
dscp	Enter this keyword to deny a packet based on DSCP value. Range: 0-63

<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two port for the <i>port</i> parameter.)
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: 23 = Telnet 20 and 21 = FTP 25 = SMTP 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>count</i>	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword log to enter ACL matches in the log.
<i>order</i>	(OPTIONAL) Enter the keyword order to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
<i>monitor</i>	(OPTIONAL) Enter the keyword monitor when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
<i>fragments</i>	Enter the keyword fragments to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.1.0	Added dscp keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series

Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option. Deprecated <code>established</code> keyword.
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The order option is relevant in the context of the Policy QoS feature only. Refer to the Quality of Service chapter of the FTOS Configuration Guide for more information.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

The monitor option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (`gt`, `lt`, `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port `lt 1023` takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

**Related
Commands**

ip access-list extended	Create an extended ACL.
permit	Assign a permit filter for IP packets.
permit udp	Assign a permit filter for UDP packets.

permit udp

C E S**Syntax**

Configure a filter to pass UDP packets meeting the filter criteria.

```
permit udp { source mask | any | host ip-address } [ operator port [port]] { destination mask | any | host ip-address } [dscp] [ operator port [port]] [count [byte] | log] [order] [monitor] [fragments]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit udp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<i>dscp</i>	Enter this keyword to deny a packet based on DSCP value. Range: 0-63
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the <code>range</code> logical operand. Range: 0 to 65535
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to enter ACL matches in the log.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <code>order</code> keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.1.0	Added <code>dscp</code> keyword.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option.
Version 6.5.1.0	Expanded to include the optional QoS <code>order</code> priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. Refer to the Quality of Service chapter of the *FTOS Configuration Guide* for more information.

The `monitor` option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The C-Series and S-Series cannot count both packets and bytes, so when you enter the `count byte` options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (`gt`, `lt`, `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related Commands

ip access-list extended	Configure an extended ACL.
permit	Assign a permit filter for IP packets.
permit tcp	Assign a permit filter for TCP packets.

resequence access-list

C **E** **S**

Re-assign sequence numbers to entries of an existing access-list.

Syntax

resequence access-list {ipv4 | mac} {access-list-name StartingSeqNum Step-to-Increment}

Parameters

ipv4 mac	Enter the keyword ipv4 or mac to identify the access list type to resequence.
access-list-name	Enter the name of a configured IP access list, up to 140 characters.
StartingSeqNum	Enter the starting sequence number to resequence. Range: 0 - 4294967290
Step-to-Increment	Enter the step to increment the sequence number. Range: 1 - 4294967290

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Added support for S-Series
	Version 7.5.1.0	Added support for C-Series
	Version 7.4.1.0	Introduced for E-Series
Usage Information	When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing access-list. Prior to 7.8.1.0, names are up to 16 characters long.	
Related Commands	resequence prefix-list ipv4 Resequence a prefix list	

resequence prefix-list ipv4

C **E** **S**

Re-assign sequence numbers to entries of an existing prefix list.

Syntax

resequence prefix-list ipv4 { *prefix-list-name* *StartingSeqNum* *Step-to-increment* }

Parameters

<i>prefix-list-name</i>	Enter the name of configured prefix list, up to 140 characters long.
<i>StartingSeqNum</i>	Enter the starting sequence number to resequence. Range: 0 – 65535
<i>Step-to-Increment</i>	Enter the step to increment the sequence number. Range: 1 – 65535

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Added support for S-Series
	Version 7.5.1.0	Added support for C-Series
	Version 7.4.1.0	Introduced for E-Series
Usage Information	When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing prefix list. Prior to 7.8.1.0, names are up to 16 characters long.	
Related Commands	resequence access-list Resequence an access-list	

seq arp

E

Configure an egress filter with a sequence number that filters ARP packets meeting this criteria. This command is supported only on 12-port GE line cards with SFP optics; refer to your line card documentation for specifications.

Syntax

```
seq sequence-number {deny | permit} arp {destination-mac-address mac-address-mask | any} vlan vlan-id {ip-address | any | opcode code-number} [count [byte] | log] [order] [monitor]
```

To remove this filter, use the `no seq sequence-number` command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290.
deny	Enter the keyword <code>deny</code> to drop all traffic meeting the filter criteria.
permit	Enter the keyword <code>permit</code> to forward all traffic meeting the filter criteria.
<i>destination-mac-address</i> <i>mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop any ARP traffic on the interface.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<i>ip-address</i>	Enter an IP address in dotted decimal format (A.B.C.D) as the target IP address of the ARP.
opcode <i>code-number</i>	Enter the keyword <code>opcode</code> followed by the number of the ARP opcode. Range: 1 to 16.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added monitor option
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The monitor option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

The order option is relevant in the context of the Policy QoS feature only. The following applies:

- The seq *sequence-number* is applicable only in an ACL group.
- The order option works across ACL groups that have been applied on an interface via QoS policy framework.
- The order option takes precedence over the seq *sequence-number*.
- If *sequence-number* is **not** configured, then rules with the same order value are ordered according to their configuration order.
- If the *sequence-number* is configured, then the *sequence-number* is used as a tie breaker for rules with the same order.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

You cannot include IP, TCP or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs to interfaces in Layer 2 mode.

seq ether-type



Configure an egress filter with a specific sequence number that filters traffic with specified types of Ethernet packets. This command is supported only on 12-port GE line cards with SFP optics; refer to your line card documentation for specifications.

Syntax

```
seq sequence-number {deny | permit} ether-type protocol-type-number  
{ destination-mac-address mac-address-mask | any } vlan vlan-id { source-mac-address  
mac-address-mask | any } [count [byte] | log] [order] [monitor]
```

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290.
deny	Enter the keyword deny to drop all traffic meeting the filter criteria.

<code>permit</code>	Enter the keyword <code>permit</code> to forward all traffic meeting the filter criteria.
<code>protocol-type-number</code>	Enter a number from 600 to FFFF as the specific Ethernet type traffic to drop.
<code>destination-mac-address</code> <code>mac-address-mask</code>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<code>any</code>	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
<code>vlan</code> <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094) To filter all VLAN traffic specify VLAN 1.
<code>source-mac-address</code> <code>mac-address-mask</code>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<code>count</code>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<code>byte</code>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<code>log</code>	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
<code>order</code>	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the order keyword is not used, the ACLs have the lowest order by default (255).
<code>monitor</code>	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Added <code>monitor</code> option
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The monitor option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

The order option is relevant in the context of the Policy QoS feature only. The following applies:

- The seq *sequence-number* is applicable only in an ACL group.
- The order option works across ACL groups that have been applied on an interface via QoS policy framework.
- The order option takes precedence over the seq *sequence-number*.
- If *sequence-number* is **not** configured, then rules with the same order value are ordered according to their configuration order.
- If the *sequence-number* is configured, then the *sequence-number* is used as a tie breaker for rules with the same order.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

You cannot include IP, TCP or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 filters to interfaces in Layer 2 mode.

seq

C E S

S4810

S4820T

Syntax

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

```
seq sequence-number {deny | permit} {ip-protocol-number | icmp | ip | tcp | udp}
{source mask | any | host ip-address} {destination mask | any | host ip-address} [operator
port [port]] [count [byte] | log] [dscp value] [order] [monitor] [fragments]
```

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290. S4810 and S4820T Range: 1 to 65534
deny	Enter the keyword deny to configure a filter to drop packets meeting this condition.
permit	Enter the keyword permit to configure a filter to forward packets meeting this criteria.
<i>ip-protocol-number</i>	Enter a number from 0 to 255 to filter based on the protocol identified in the IP protocol header.
icmp	Enter the keyword icmp to configure an ICMP access list filter.

<i>ip</i>	Enter the keyword <i>ip</i> to configure a generic IP access list. The keyword <i>ip</i> specifies that the access list will permit all IP protocols.
<i>tcp</i>	Enter the keyword <i>tcp</i> to configure a TCP access list filter.
<i>udp</i>	Enter the keyword <i>udp</i> to configure a UDP access list filter.
<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>any</i>	Enter the keyword <i>any</i> to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword <i>host</i> followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operands: <ul style="list-style-type: none"> • <i>eq</i> = equal to • <i>neq</i> = not equal to • <i>gt</i> = greater than • <i>lt</i> = less than • <i>range</i> = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the <i>range</i> logical operand. Range: 0 to 65535 The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>message-type</i>	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type (ICMP message types are listed in Table 7-2). Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
<i>count</i>	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <i>byte</i> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL, E-Series only) Enter the keyword <i>log</i> to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
<i>dscp</i>	(OPTIONAL) Enter the keyword <i>dscp</i> to match to the IP DCSCP values.
<i>order</i>	(OPTIONAL) Enter the keyword <i>order</i> to specify the QoS priority for the ACL entry. Range: 0-254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) Default: If the <i>order</i> keyword is not used, the ACLs have the lowest order by default (255).

monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

Defaults Not configured

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Add DSCP value for ACL matching.
Version 8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 7.4.1.0	Added support for non-contiguous mask and added the <code>monitor</code> option. Deprecated <code>established</code> keyword
Version 6.5.10	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information

The `monitor` option is relevant in the context of the flow-based monitoring feature only. Refer to the [Port Monitoring](#) chapter.

When you use the `log` option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via QoS policy framework.
- The `order` option takes precedence over the `seq sequence-number`.
- If `sequence-number` is **not** configured, then rules with the same order value are ordered according to their configuration order.
- If the `sequence-number` is configured, then the `sequence-number` is used as a tie breaker for rules with the same order.

If the *sequence-number* is configured, then the *sequence-number* is used as a tie breaker for rules with the same order.



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Related Commands

deny	Configure a filter to drop packets.
permit	Configure a filter to forward packets.

Common MAC Access List Commands

The following commands are available within both MAC ACL modes (Standard and Extended) and do not have mode-specific options.

C and **S** platforms support Ingress MAC ACLs only.

The following commands allow you to clear, display and assign MAC ACL configurations.

- [clear counters mac access-group](#)
- [mac access-group](#)
- [show mac access-lists](#)
- [show mac accounting access-list](#)

clear counters mac access-group

C **E** **S**

Clear counters for all or a specific MAC ACL.

Syntax

clear counters mac access-group [*mac-list-name*]

Parameters

<i>mac-list-name</i>	(OPTIONAL) Enter the name of a configured MAC access list.
----------------------	--

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

mac access-group

C **E** **S**

Apply a MAC ACL to traffic entering or exiting an interface.

Syntax `mac access-group access-list-name {in [vlan vlan-range] | out}`

Parameters	<code><i>access-list-name</i></code>	Enter the name of a configured MAC access list, up to 140 characters.
	<code>vlan <i>vlan-range</i></code>	(OPTIONAL) Enter the keyword <code>vlan</code> followed a range of VLANs. Note that this option is available only with the <code>in</code> keyword option. Range: 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094)
	<code>in</code>	Enter the keyword <code>in</code> to configure the ACL to filter incoming traffic.
	<code>out</code>	Enter the keyword <code>out</code> to configure the ACL to filter outgoing traffic. Not available on S-Series.

Defaults No default behavior or configuration

Command Modes INTERFACE

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Usage Information You can assign one ACL (standard or extended) to an interface.

Prior to 7.8.1.0, names are up to 16 characters long.

Related Commands	mac access-list standard	Configure a standard MAC ACL.
	mac access-list extended	Configure an extended MAC ACL.

show mac access-lists

C E S

54810

54820T

Display all of the Layer 2 ACLs configured in the system, whether or not they are applied to an interface, and the count of matches/mismatches against each ACL entry displayed.

Syntax `show mac access-lists [access-list-name] [interface interface] [in | out]`

Parameters	
<i>access-list-name</i>	Enter the name of a configured MAC ACL, up to 140 characters.
<i>interface interface</i>	Enter the keyword interface followed by the one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
<i>in out</i>	Identify whether ACL is applied on ingress or egress side.
Command Modes	
	EXEC Privilege
Command History	
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.1.0	Introduced

show mac accounting access-list

C **E** **S**

Display MAC access list configurations and counters (if configured).

Syntax

show mac accounting access-list *access-list-name* interface *interface* in | out

Parameters	
<i>access-list-name</i>	Enter the name of a configured MAC ACL, up to 140 characters.
<i>interface interface</i>	Enter the keyword interface followed by the one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 - 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
<i>in out</i>	Identify whether ACL is applied ay Ingress (in) or egress (out) side.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show mac accounting access-list mac-ext interface po 1
Extended mac access-list mac-ext on GigabitEthernet 0/11
seq 5 permit host 00:00:00:00:00:11 host 00:00:00:00:00:19 count (393794576 packets)
seq 10 deny host 00:00:00:00:00:21 host 00:00:00:00:00:29 count (89076777 packets)
seq 15 deny host 00:00:00:00:00:31 host 00:00:00:00:00:39 count (0 packets)
seq 20 deny host 00:00:00:00:00:41 host 00:00:00:00:00:49 count (0 packets)
seq 25 permit any any count (0 packets)
Extended mac access-list mac-ext on GigabitEthernet 0/12
seq 5 permit host 00:00:00:00:00:11 host 00:00:00:00:00:19 count (57589834 packets)
seq 10 deny host 00:00:00:00:00:21 host 00:00:00:00:00:29 count (393143077 packets)
seq 15 deny host 00:00:00:00:00:31 host 00:00:00:00:00:39 count (0 packets)
seq 20 deny host 00:00:00:00:00:41 host 00:00:00:00:00:49 count (0 packets)
seq 25 permit any any count (0 packets)
FTOS#
```

Usage Information

The ACL hit counters in this command increment the counters for each matching rule, not just the first matching rule.

Related Commands

show mac accounting destination	Display destination counters for Layer 2 traffic (available on physical interfaces only).
---	---

Standard MAC ACL Commands

When an access-list is created without any rule and then applied to an interface, ACL behavior reflects implicit permit.

 and  platforms support Ingress MAC ACLs only.

The following commands configure standard MAC ACLs:

- [deny](#)
- [mac access-list standard](#)
- [permit](#)
- [seq](#)



Note: Refer also to [Commands Common to all ACL Types](#) and [Common MAC Access List Commands](#).

deny

C E S

Configure a filter to drop packets with a the MAC address specified.

Syntax

```
deny { any | mac-source-address [mac-source-address-mask] } [count [byte]] [log]
[monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny { any | mac-source-address mac-source-address-mask }` command.

Parameters

any	Enter the keyword <code>any</code> to specify that all traffic is subject to the filter.
<i>mac-source-address</i>	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
<i>mac-source-address-mask</i>	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to log the packets.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section "Flow-based Monitoring" in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not enabled.

Command Modes

CONFIGURATION-MAC ACCESS LIST-STANDARD

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added monitor option
pre-Version 6.1.1.0	Introduced for E-Series



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Usage Information

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

Related Commands

permit	Configure a MAC address filter to pass packets.
seq	Configure a MAC address filter with a specified sequence number.

mac access-list standard

C E S

S4810

S4820T

Name a new or existing MAC access control list (MAC ACL) and enter the MAC ACCESS LIST mode to configure a standard MAC ACL. Refer to [Commands Common to all ACL Types](#) and [Common MAC Access List Commands](#).

Syntax

mac access-list standard *mac-list-name*

Parameters

<i>mac-list-name</i>	Enter a text string as the name of the standard MAC access list (140 character maximum).
----------------------	--

Defaults

Not configured

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

FTOS supports one ingress and one egress MAC ACL per interface.

Prior to 7.8.1.0, names are up to 16 characters long.

The number of entries allowed per ACL is hardware-dependent. Refer to your line card documentation for detailed specification on entries allowed per ACL.

C-Series and S-Series support ingress ACLs only.

Example

```

FTOS (conf) #mac access-list access-list standard TestMAC
FTOS (config-std-macl) #?
deny                Specify packets to reject
description         List description
exit                Exit from access-list configuration mode
no                  Negate a command or set its defaults
permit              Specify packets to forward
remark              Specify access-list entry remark
seq                 Sequence numbers
show                Show Standard ACL configuration

```

permit



Configure a filter to forward packets from a specific source MAC address.

Syntax

```

permit { any | mac-source-address [mac-source-address-mask] } [count [byte]] | [log]
[monitor]

```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit {any | mac-source-address mac-source-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to forward all packets received with a MAC address.
<i>mac-source-address</i>	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
<i>mac-source-address-mask</i>	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to log the packets.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-MAC ACCESS LIST-STANDARD

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0 Support added for C-Series

pre-Version 6.1.1.0 Introduced for E-Series



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Usage Information

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

Related Commands

deny	Configure a MAC ACL filter to drop packets.
seq	Configure a MAC ACL filter with a specified sequence number.

seq




Assign a sequence number to a deny or permit filter in a MAC access list while creating the filter.

Syntax

```
seq sequence-number {deny | permit} {any | mac-source-address [mac-source-address-mask] } [count [byte]] [log] [monitor]
```

Parameters

<i>sequence-number</i>	Enter a number between 0 and 65535.
deny	Enter the keyword deny to configure a filter to drop packets meeting this condition.
permit	Enter the keyword permit to configure a filter to forward packets meeting this criteria.
any	Enter the keyword any to filter all packets.
<i>mac-source-address</i>	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
<i>mac-source-address-mask</i>	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword log to log the packets.
monitor	(OPTIONAL) Enter the keyword monitor when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults	Not configured.
Command Modes	CONFIGURATION-MAC ACCESS LIST-STANDARD
Command History	Version 8.1.1.0 Introduced on E-Series ExaScale
	Version 7.6.1.0 Support added for S-Series
	Version 7.5.1.0 Support added for C-Series
	Version 7.4.1.0 Added monitor option
	pre-Version 6.1.1.0 Introduced for E-Series
 Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.	
Usage Information	When you use the log option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.
Related Commands	deny Configure a filter to drop packets.
	permit Configure a filter to forward packets.

Extended MAC ACL Commands

When an access-list is created without any rule and then applied to an interface, ACL behavior reflects implicit permit.

 and  platforms support Ingress MAC ACLs only.

The following commands configure Extended MAC ACLs.

- [deny](#)
- [mac access-list extended](#)
- [permit](#)
- [seq](#)



Note: Refer also to [Commands Common to all ACL Types](#) and [Common MAC Access List Commands](#).

deny

Configure a filter to drop packets that match the filter criteria.

Syntax

```
deny { any | host mac-address | mac-source-address mac-source-address-mask } { any |
host mac-address | mac-destination-address mac-destination-address-mask }
[ethertype-operator] [count [byte]] [log] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny { any | host mac-address | mac-source-address mac-source-address-mask } { any | host mac-address | mac-destination-address mac-destination-address-mask }` command.

Parameters

<code>any</code>	Enter the keyword <code>any</code> to drop all packets.
<code>host <i>mac-address</i></code>	Enter the keyword <code>host</code> followed by a MAC address to drop packets with that host address.
<code><i>mac-source-address</i></code>	Enter the source MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
<code><i>mac-source-address-mask</i></code>	Specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
<code><i>mac-destination-address</i></code>	Enter the destination MAC address and mask in <code>nn:nn:nn:nn:nn:nn</code> format.
<code><i>mac-destination-address-mask</i></code>	Specify which bits in the MAC address must match. The MAC ACL supports an inverse mask, therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
<code><i>ethertype operator</i></code>	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none"> • <code>ev2</code> - is the Ethernet II frame format. • <code>llc</code> - is the IEEE 802.3 frame format. • <code>snap</code> - is the IEEE 802.3 SNAP frame format.
<code>count</code>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<code>byte</code>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<code>log</code>	(OPTIONAL, E-Series only) Enter the keyword <code>log</code> to log the packets.
<code>monitor</code>	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured.

Command Modes

CONFIGURATION-MAC ACCESS LIST-EXTENDED

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added monitor option
pre-Version 6.1.1.0	Introduced for E-Series



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Usage Information

When you use the log option, CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

Related Commands

permit	Configure a filter to forward based on MAC addresses.
seq	Configure a filter with specific sequence numbers.

mac access-list extended

C **E** **S****S4810****S4820T**

Name a new or existing extended MAC access control list (extended MAC ACL).

Syntax

mac access-list extended *access-list-name*

Parameters

<i>access-list-name</i>	Enter a text string as the MAC access list name, up to 140 characters.
-------------------------	--

Defaults

No default configuration

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

The number of entries allowed per ACL is hardware-dependent. Refer to your line card documentation for detailed specification on entries allowed per ACL.

Prior to 7.8.1.0, names are up to 16 characters long.

Example

```
FTOS(conf)#mac-access-list access-list extended TestMATExt
FTOS(config-ext-macl)#remark 5 IPv4
FTOS(config-ext-macl)#seq 10 permit any any ev2 eq 800 count bytes
FTOS(config-ext-macl)#remark 15 ARP
FTOS(config-ext-macl)#seq 20 permit any any ev2 eq 806 count bytes
FTOS(config-ext-macl)#remark 25 IPv6
FTOS(config-ext-macl)#seq 30 permit any any ev2 eq 86dd count bytes
FTOS(config-ext-macl)#seq 40 permit any any count bytes
FTOS(config-ext-macl)#exit
FTOS(conf)#do show mac accounting access-list snickers interface g0/47 in

Extended mac access-list snickers on GigabitEthernet 0/47
seq 10 permit any any ev2 eq 800 count bytes (559851886 packets 191402152148 bytes)
seq 20 permit any any ev2 eq 806 count bytes (74481486 packets 5031686754 bytes)
seq 30 permit any any ev2 eq 86dd count bytes (7751519 packets 797843521 bytes)
```

Related Commands

mac access-list standard	Configure a standard MAC access list.
show mac accounting access-list	Display MAC access list configurations and counters (if configured).

permit



Configure a filter to pass packets matching the criteria specified.

Syntax

```
permit { any | host mac-address | mac-source-address mac-source-address-mask } { any | host mac-address | mac-destination-address mac-destination-address-mask } [ethertype operator] [count [byte]] | [log] [monitor]
```

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no permit { any | host *mac-address* | *mac-source-address mac-source-address-mask* } { any | *mac-destination-address mac-destination-address-mask* } command.

Parameters

any	Enter the keyword any to forward all packets.
host	Enter the keyword host followed by a MAC address to forward packets with that host address.
<i>mac-source-address</i>	Enter the source MAC address in nn:nn:nn:nn:nn:nn format.
<i>mac-source-address-mask</i>	Specify which bits in the MAC address must be matched. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>mac-destination-address</i>	Enter the destination MAC address and mask in nn:nn:nn:nn:nn:nn format.

<i>mac-destination-address-mask</i>	Specify which bits in the MAC address must be matched. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>ethertype operator</i>	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none"> • ev2 - is the Ethernet II frame format. • llc - is the IEEE 802.3 frame format. • snap - is the IEEE 802.3 SNAP frame format.
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword log to log the packets.
monitor	(OPTIONAL) Enter the keyword monitor when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-EXTENDED

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added monitor option
pre-Version 6.1.1.0	Introduced for E-Series



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Usage Information

When you use the **log** option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

Related Commands

deny	Configure a filter to drop traffic based on the MAC address.
seq	Configure a filter with specific sequence numbers.

seq



Configure a filter with a specific sequence number.

Syntax

```
seq sequence-number {deny | permit} {any | host mac-address | mac-source-address
mac-source-address-mask} {any | host mac-address | mac-destination-address
mac-destination-address-mask} [ethertype operator] [count [byte]] [log] [monitor]
```

Parameters

<i>sequence-number</i>	Enter a number as the filter sequence number. Range: zero (0) to 65535.
deny	Enter the keyword deny to drop any traffic matching this filter.
permit	Enter the keyword permit to forward any traffic matching this filter.
any	Enter the keyword any to filter all packets.
host <i>mac-address</i>	Enter the keyword host followed by a MAC address to filter packets with that host address.
<i>mac-source-address</i>	Enter the source MAC address in nn:nn:nn:nn:nn:nn format. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>mac-source-address-mask</i>	Specify which bits in the MAC address must be matched.
<i>mac-destination-address</i>	Enter the destination MAC address and mask in nn:nn:nn:nn:nn:nn format.
<i>mac-destination-address-mask</i>	Specify which bits in the MAC address must be matched. The MAC ACL supports an inverse mask, therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>ethertype operator</i>	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none">• ev2 - is the Ethernet II frame format.• llc - is the IEEE 802.3 frame format.• snap - is the IEEE 802.3 SNAP frame format.
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
log	(OPTIONAL, E-Series only) Enter the keyword log to log the packets.
monitor	(OPTIONAL) Enter the keyword monitor when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule will be applied to the monitored interface. For details, refer to the section “Flow-based Monitoring” in the Port Monitoring chapter of the <i>FTOS Configuration Guide</i> .

Defaults

Not configured

Command Modes

CONFIGURATION-MAC ACCESS LIST-STANDARD

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added monitor option
pre-Version 6.1.1.0	Introduced for E-Series



Note: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

Usage Information

When you use the log option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

Related Commands

deny	Configure a filter to drop traffic.
permit	Configure a filter to forward traffic.

IP Prefix List Commands

When an access-list is created without any rule and then applied to an interface, ACL behavior reflects implicit permit.

Use these commands to configure or enable IP prefix lists.

- [clear ip prefix-list](#)
- [deny](#)
- [ip prefix-list](#)
- [permit](#)
- [seq](#)
- [show config](#)
- [show ip prefix-list detail](#)
- [show ip prefix-list summary](#)

clear ip prefix-list



Reset the number of times traffic met the conditions (“hit” counters) of the configured prefix lists.

Syntax

```
clear ip prefix-list [prefix-name]
```

Parameters

<i>prefix-name</i>	(OPTIONAL) Enter the name of the configured prefix list to clear only counters for that prefix list, up to 140 characters long.
--------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Default

Clears “hit” counters for all prefix lists unless a prefix list is specified.

Related Commands

ip prefix-list	Configure a prefix list.
--------------------------------	--------------------------

deny

C **E** **S**

Configure a filter to drop packets meeting the criteria specified.

Syntax`deny ip-prefix [ge min-prefix-length] [le max-prefix-length]`**Parameters**

<i>ip-prefix</i>	Specify an IP prefix in the network/length format. For example, 35.0.0.0/8 means match the first 8 bits of address 35.0.0.0.
<i>ge min-prefix-length</i>	(OPTIONAL) Enter the keyword ge followed by the minimum prefix length, which is a number from zero (0) to 32.
<i>le max-prefix-length</i>	(OPTIONAL) Enter the keyword le followed by the maximum prefix length, which is a number from zero (0) to 32.

Defaults

Not configured.

Command Modes

PREFIX-LIST

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Sequence numbers for this filter are automatically assigned starting at sequence number 5.

If the options **ge** or **le** are not used, only packets with an exact match to the prefix are filtered.**Related Commands**

permit	Configure a filter to pass packets.
seq	Configure a drop or permit filter with a specified sequence number.

ip prefix-list

C E S

S4810

S4820T

Enter the PREFIX-LIST mode and configure a prefix list.

Syntax `ip prefix-list prefix-name`

Parameters

<i>prefix-name</i>	Enter a string up to 16 characters long as the name of the prefix list, up to 140 characters long.
--------------------	--

Command Modes CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Prefix lists redistribute OSPF and RIP routes meeting specific criteria. For related RIP commands supported on C-Series and E-Series, refer to the [Routing Information Protocol \(RIP\)](#) chapter. For related OSPF commands supported on all three platforms, refer to the E-Series *E-Series FTOS Command Line Reference Guide* [Open Shortest Path First \(OSPFv2\)](#) chapter.

Prior to 7.8.1.0, names are up to 16 characters long.

Related Commands

show ip route list	Display IP routes in an IP prefix list.
show ip prefix-list summary	Display a summary of the configured prefix lists.

permit

C E S

Configure a filter that passes packets meeting the criteria specified.

Syntax `permit ip-prefix [ge min-prefix-length] [le max-prefix-length]`

Parameters

<i>ip-prefix</i>	Specify an IP prefix in the network/length format. For example, 35.0.0.0/8 means match the first 8 bits of address 35.0.0.0.
<i>ge min-prefix-length</i>	(OPTIONAL) Enter the keyword <code>ge</code> followed by the minimum prefix length, which is a number from zero (0) to 32.
<i>le max-prefix-length</i>	(OPTIONAL) Enter the keyword <code>le</code> followed by the maximum prefix length, which is a number from zero (0) to 32.

Command Modes PREFIX-LIST

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Sequence numbers for this filter are automatically assigned starting at sequence number 5.

If the options `ge` or `le` are not used, only packets with an exact match to the prefix are filtered.

Related Commands	deny	Configure a filter to drop packets.
	seq	Configure a drop or permit filter with a specified sequence number.

seq



Assign a sequence number to a deny or permit filter in a prefix list while configuring the filter.

Syntax

```
seq sequence-number {deny | permit} {any} | [ip-prefix /nn {ge min-prefix-length} {le max-prefix-length}] | [bitmask number]
```

Parameters	<i>sequence-number</i>	Enter a number. Range: 1 to 4294967294.
	deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
	permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this condition.
	any	(OPTIONAL) Enter the keyword <code>any</code> to match any packets.
	<i>ip-prefix /nn</i>	(OPTIONAL) Specify an IP prefix in the network/length format. For example, 35.0.0.0/8 means match the first 8 bits of address 35.0.0.0.
	ge <i>min-prefix-length</i>	(OPTIONAL) Enter the keyword <code>ge</code> followed by the minimum prefix length, which is a number from zero (0) to 32.
	le <i>max-prefix-length</i>	(OPTIONAL) Enter the keyword <code>le</code> followed by the maximum prefix length, which is a number from zero (0) to 32.
	bitmask <i>number</i>	Enter the keyword <code>bitmask</code> followed by a bit mask number in dotted decimal format.

Defaults Not configured.

Command Modes PREFIX-LIST

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Added support for S-Series

	Version 7.5.1.0	Added support for C-Series
	Version 6.3.1.0	Added bit mask option
Usage Information	If the options <code>ge</code> or <code>le</code> are not used, only packets with an exact match to the prefix are filtered.	
Related Commands	deny	Configure a filter to drop packets.
	permit	Configure a filter to pass packets.

show config

C **E** **S**

Display the current PREFIX-LIST configurations.

Syntax

show config

Command Modes

PREFIX-LIST

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS(conf-nprefix1)#show config
!
ip prefix-list snickers
FTOS(conf-nprefix1)#
```

show ip prefix-list detail

C **E** **S**

Display details of the configured prefix lists.

Syntax

show ip prefix-list detail [*prefix-name*]

Parameters

<i>prefix-name</i>	(OPTIONAL) Enter a text string as the name of the prefix list, up to 140 characters.
--------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0 Support added for C-Series

pre-Version 6.1.1.0 Introduced for E-Series

Example

```
FTOS#show ip prefix-list detail
Prefix-list with the last deletion/insertion: filter_ospf
ip prefix-list filter_in:
count: 3, range entries: 3, sequences: 5 - 10
  seq 5 deny 1.102.0.0/16 le 32 (hit count: 0)
  seq 6 deny 2.1.0.0/16 ge 23 (hit count: 0)
  seq 10 permit 0.0.0.0/0 le 32 (hit count: 0)
ip prefix-list filter_ospf:
count: 4, range entries: 1, sequences: 5 - 10
  seq 5 deny 100.100.1.0/24 (hit count: 5)
  seq 6 deny 200.200.1.0/24 (hit count: 1)
  seq 7 deny 200.200.2.0/24 (hit count: 1)
  seq 10 permit 0.0.0.0/0 le 32 (hit count: 132)
FTOS#
```

show ip prefix-list summary

C **E** **S**

Display a summary of the configured prefix lists.

Syntax

show ip prefix-list summary [*prefix-name*]

Parameters

prefix-name (OPTIONAL) Enter a text string as the name of the prefix list, up to 140 characters long.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.8.1.0 Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

pre-Version 6.1.1.0 Introduced for E-Series

Example

```

FTOS#show ip prefix summary
Prefix-list with the last deletion/insertion: test
ip prefix-list test:
count: 3, range entries: 1, sequences: 5 - 15
ip prefix-list test1:
count: 2, range entries: 2, sequences: 5 - 10
ip prefix-list test2:
count: 1, range entries: 1, sequences: 5 - 5
ip prefix-list test3:
count: 1, range entries: 1, sequences: 5 - 5
ip prefix-list test4:
count: 1, range entries: 1, sequences: 5 - 5
ip prefix-list test5:
count: 1, range entries: 1, sequences: 5 - 5
ip prefix-list test6:
count: 1, range entries: 1, sequences: 5 - 5
FTOS#

```

Route Map Commands

When an access-list is created without any rule and then applied to an interface, ACL behavior reflects implicit permit.

The following commands allow you to configure route maps and their redistribution criteria.

- [continue](#)
- [description](#)
- [match as-path](#)
- [match community](#)
- [match interface](#)
- [match ip address](#)
- [match ip next-hop](#)
- [match ip route-source](#)
- [match metric](#)
- [match origin](#)
- [match route-type](#)
- [match tag](#)
- [route-map](#)
- [set as-path](#)
- [set automatic-tag](#)
- [set comm-list delete](#)
- [set community](#)
- [set level](#)
- [set local-preference](#)
- [set metric](#)
- [set metric-type](#)

- [set next-hop](#)
- [set origin](#)
- [set tag](#)
- [set weight](#)
- [show config](#)
- [show route-map](#)

continue

C **E** **S**

Configure a route-map to go to a route-map entry with a higher sequence number.

Syntax

continue [*sequence-number*]

Parameters

<i>sequence-number</i>	(OPTIONAL) Enter the route map sequence number. Range: 1 - 65535 Default: no sequence number
------------------------	--

Defaults

Not Configured

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Introduced

Usage Information

The continue feature allows movement from one route-map entry to a specific route-map entry (the sequence number). If the sequence number is not specified, the continue feature simply moves to the next sequence number (also known as an implied continue). If a match clause exists, the continue feature executes only after a successful match occurs. If there are no successful matches, continue is ignored.

Match clause with Continue clause

The continue feature can exist without a match clause. A continue clause without a match clause executes and jumps to the specified route-map entry.

With a match clause and a continue clause, the match clause executes first and the continue clause next in a specified route map entry. The continue clause launches only after a successful match. The behavior is:

- A successful match with a continue clause, the route map executes the set clauses and then goes to the specified route map entry upon execution of the continue clause.
- If the next route map entry contains a continue clause, the route map will execute the continue clause if a successful match occurs.

- If the next route map entry does not contain a continue clause, the route map evaluates normally. If a match does not occur, the route map does not continue and will fall through to the next sequence number, if one exists.

Set clause with Continue clause

If the route-map entry contains sets with the continue clause, then set actions is performed first followed by the continue clause jump to the specified route map entry.

- If a set actions occurs in the first route map entry and then the same set action occurs with a different value in a subsequent route map entry, the last set of actions overrides the previous set of actions with the same set command.
- If set community additive and set as-path prepend are configure, the communities and AS numbers are pre-pended.

Related Commands

set community	Specify a COMMUNITY attribute
set as-path	Configure a filter to modify the AS path

description

C **E** **S**

Add a description to this route map.

Syntax

description { *description* }

Parameters

<i>description</i>	Enter a description to identify the route map (80 characters maximum).
--------------------	--

Defaults

No default behavior or values

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 7.7.1.0	Introduced

Related Commands

route-map	Enable a route map
---------------------------	--------------------

match as-path

C **E** **S**

Configure a filter to match routes that have a certain AS number in their BGP path.

Syntax

match as-path *as-path-name*

Parameters

<i>as-path-name</i>	Enter the name of an established AS-PATH ACL, up to 140 characters.
---------------------	---

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

[set as-path](#) Add information to the BGP AS_PATH attribute.

match community

C **E** **S**

Configure a filter to match routes that have a certain COMMUNITY attribute in their BGP path.

Syntax

match community *community-list-name* [exact]

Parameters

<i>community-list-name</i>	Enter the name of a configured community list.
exact	(OPTIONAL) Enter the keywords exact to process only those routes with this community list name.

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

[ip community-list](#) Configure an Community Access list.

[set community](#) Specify a COMMUNITY attribute.

[neighbor send-community](#) Send COMMUNITY attribute to peer or peer group.

match interface

C **E** **S**

Configure a filter to match routes whose next hop is on the interface specified.

Syntax

match interface *interface*

To remove a match, use the no match interface *interface* command.

Parameters	<p><i>interface</i> Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For the loopback interface, enter the keyword loopback followed by a number from zero (0) to 16383. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094, 1-2094 for ExaScale (can used IDs 1-4094). 												
Defaults	Not configured												
Command Modes	ROUTE-MAP												
Command History	<table border="1"> <tr> <td>Version 8.5.1.0</td> <td>Added support for 4-port 40G line cards on ExaScale.</td> </tr> <tr> <td>Version 8.1.1.0</td> <td>Introduced on E-Series ExaScale</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Support added for S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Support added for C-Series</td> </tr> <tr> <td>pre-Version 6.1.1.0</td> <td>Introduced for E-Series</td> </tr> </table>	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.	Version 8.1.1.0	Introduced on E-Series ExaScale	Version 7.6.1.0	Support added for S-Series	Version 7.5.1.0	Support added for C-Series	pre-Version 6.1.1.0	Introduced for E-Series		
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.												
Version 8.1.1.0	Introduced on E-Series ExaScale												
Version 7.6.1.0	Support added for S-Series												
Version 7.5.1.0	Support added for C-Series												
pre-Version 6.1.1.0	Introduced for E-Series												
Related Commands	<table border="1"> <tr> <td>match ip address</td> <td>Redistribute routes that match an IP address.</td> </tr> <tr> <td>match ip next-hop</td> <td>Redistribute routes that match the next-hop IP address.</td> </tr> <tr> <td>match ip route-source</td> <td>Redistribute routes that match routes advertised by other routers.</td> </tr> <tr> <td>match metric</td> <td>Redistribute routes that match a specific metric.</td> </tr> <tr> <td>match route-type</td> <td>Redistribute routes that match a route type.</td> </tr> <tr> <td>match tag</td> <td>Redistribute routes that match a specific tag.</td> </tr> </table>	match ip address	Redistribute routes that match an IP address.	match ip next-hop	Redistribute routes that match the next-hop IP address.	match ip route-source	Redistribute routes that match routes advertised by other routers.	match metric	Redistribute routes that match a specific metric.	match route-type	Redistribute routes that match a route type.	match tag	Redistribute routes that match a specific tag.
match ip address	Redistribute routes that match an IP address.												
match ip next-hop	Redistribute routes that match the next-hop IP address.												
match ip route-source	Redistribute routes that match routes advertised by other routers.												
match metric	Redistribute routes that match a specific metric.												
match route-type	Redistribute routes that match a route type.												
match tag	Redistribute routes that match a specific tag.												

match ip address

C **E** **S**

Configure a filter to match routes based on IP addresses specified in an access list.

Syntax

match ip address *prefix-list-name*

Parameters

<i>prefix-list-name</i>	Enter the name of configured prefix list, up to 140 characters.
-------------------------	---

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

match interface	Redistribute routes that match the next-hop interface.
match ip next-hop	Redistribute routes that match the next-hop IP address.
match ip route-source	Redistribute routes that match routes advertised by other routers.
match metric	Redistribute routes that match a specific metric.
match route-type	Redistribute routes that match a route type.
match tag	Redistribute routes that match a specific tag.

match ip next-hop

C **E** **S**

Configure a filter to match based on the next-hop IP addresses specified in an IP access list or IP prefix list.

Syntax

```
match ip next-hop { access-list | prefix-list prefix-list-name }
```

Parameters

<i>access-list-name</i>	Enter the name of a configured IP access list, up to 140 characters.
prefix-list <i>prefix-list-name</i>	Enter the keywords prefix-list followed by the name of configured prefix list.

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

match interface	Redistribute routes that match the next-hop interface.
match ip address	Redistribute routes that match an IP address.
match ip route-source	Redistribute routes that match routes advertised by other routers.
match metric	Redistribute routes that match a specific metric.

match route-type	Redistribute routes that match a route type.
match tag	Redistribute routes that match a specific tag.

match ip route-source

C **E** **S**

Configure a filter to match based on the routes advertised by routes specified in IP access lists or IP prefix lists.

Syntax

match ip route-source { *access-list* | prefix-list *prefix-list-name* }

Parameters

<i>access-list-name</i>	Enter the name of a configured IP access list, up to 140 characters.
prefix-list <i>prefix-list-name</i>	Enter the keywords prefix-list followed by the name of configured prefix list, up to 140 characters.

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

match interface	Redistribute routes that match the next-hop interface.
match ip address	Redistribute routes that match an IP address.
match ip next-hop	Redistribute routes that match the next-hop IP address.
match metric	Redistribute routes that match a specific metric.
match route-type	Redistribute routes that match a route type.
match tag	Redistribute routes that match a specific tag.

match metric

C **E** **S**

Configure a filter to match on a specified value.

Syntax

match metric *metric-value*

Parameters

<i>metric-value</i>	Enter a value to match. Range: zero (0) to 4294967295.
---------------------	---

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Related Commands	match interface	Redistribute routes that match the next-hop interface.
	match ip address	Redistribute routes that match an IP address.
	match ip next-hop	Redistribute routes that match the next-hop IP address.
	match ip route-source	Redistribute routes that match routes advertised by other routers.
	match route-type	Redistribute routes that match a route type.
	match tag	Redistribute routes that match a specific tag.

match origin

C **E** **S**

Configure a filter to match routes based on the value found in the BGP path ORIGIN attribute.

Syntax match origin { *egp* | *igp* | *incomplete* }

Parameters	<i>egp</i>	Enter the keyword <i>egp</i> to match routes originating outside the AS.
	<i>igp</i>	Enter the keyword <i>igp</i> to match routes originating within the same AS.
	<i>incomplete</i>	Enter the keyword <i>incomplete</i> to match routes with incomplete routing information.

Defaults Not configured.

Command Modes ROUTE-MAP

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	pre-Version 6.1.1.0	Introduced for E-Series

match route-type

C **E** **S**

Configure a filter to match routes based on the how the route is defined.

54810

54820T

Syntax match route-type { *external* [*type-1* | *type-2*] | *internal* | *level-1* | *level-2* | *local* }

Parameters	<i>external</i> [<i>type-1</i> <i>type-2</i>]	Enter the keyword <i>external</i> followed by either <i>type-1</i> or <i>type-2</i> to match only on OSPF Type 1 routes or OSPF Type 2 routes.
	<i>internal</i>	Enter the keyword <i>internal</i> to match only on routes generated within OSPF areas.

level-1	Enter the keyword <code>level-1</code> to match IS-IS Level 1 routes.
level-2	Enter the keyword <code>level-2</code> to match IS-IS Level 2 routes.
local	Enter the keyword <code>local</code> to match only on routes generated within the switch.

Defaults Not configured.

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

match interface	Redistribute routes that match the next-hop interface.
match ip address	Redistribute routes that match an IP address.
match ip next-hop	Redistribute routes that match the next-hop IP address.
match ip route-source	Redistribute routes that match routes advertised by other routers.
match metric	Redistribute routes that match a specific metric.
match tag	Redistribute routes that match a tag.

match tag

C **E** **S**

S4810

S4820T

Configure a filter to redistribute only routes that match a specified tag value.

Syntax

`match tag tag-value`

Parameters

<i>tag-value</i>	Enter a value as the tag on which to match. Range: zero (0) to 4294967295.
------------------	---

Defaults Not configured

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

match interface	Redistribute routes that match the next-hop interface.
match ip address	Redistribute routes that match an IP address.
match ip next-hop	Redistribute routes that match the next-hop IP address.
match ip route-source	Redistribute routes that match routes advertised by other routers.
match metric	Redistribute routes that match a specific metric.
match route-type	Redistribute routes that match a route type.

route-map

C E S

S4810

S4820T

Enable a route map statement and configure its action and sequence number. This command also places you in the ROUTE-MAP mode.

Syntax

`route-map map-name [permit | deny] [sequence-number]`

Parameters

<i>map-name</i>	Enter a text string of up to 140 characters to name the route map for easy identification.
permit	(OPTIONAL) Enter the keyword <code>permit</code> to set the route map default as permit. If no keyword is specified, the default is <code>permit</code> .
deny	(OPTIONAL) Enter the keyword <code>deny</code> to set the route map default as deny.
<i>sequence-number</i>	(OPTIONAL) Enter a number to identify the route map for editing and sequencing with other route maps. You are prompted for a sequence number if there are multiple instances of the route map. Range: 1 to 65535.

Defaults

Not configured

If no keyword (`permit` or `deny`) is defined for the route map, the `permit` action is the default.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS (conf) #route-map dempsey
FTOS (config-route-map) #
```

Usage Information

Use caution when you delete route maps because if you do not specify a sequence number, all route maps with the same *map-name* are deleted when you use no [route-map map-name](#) command.

Prior to 7.8.1.0, names are up to 16 characters long.

Related Commands

show config	Display the current configuration.
-----------------------------	------------------------------------

set as-path

C E S

S4810

S4820T

Configure a filter to modify the AS path for BGP routes.

Syntax

set as-path prepend *as-number* [... *as-number*]

Parameters

prepend <i>as-number</i>	Enter the keyword <code>prepend</code> followed by up to eight AS numbers to be inserted into the BGP path information. Range: 1 to 65535
--------------------------	--

Defaults

Not configured

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

You can prepend up to eight AS numbers to a BGP route.

This command influences best path selection in BGP by inserting a tag or AS number into the `AS_PATH` attribute.

Related Commands

match as-path	Redistribute routes that match an AS-PATH attribute.
ip as-path access-list	Configure an AS-PATH access list.

neighbor filter-list	Configure a BGP filter based on the AS-PATH attribute.
show ip community-lists	Display configured IP Community access lists.

set automatic-tag

C E S

S4810

S4820T

Configure a filter to automatically compute the tag value of the route.

Syntax set automatic-tag

To return to the default, enter no set automatic-tag.

Defaults Not configured.

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 8.1.1.0	Introduced on E-Series ExaScale
-----------------	---------------------------------

Version 7.6.1.0	Support added for S-Series
-----------------	----------------------------

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

pre-Version 6.1.1.0	Introduced for E-Series
---------------------	-------------------------

Related Commands

set level	Specify the OSPF area for route redistribution.
---------------------------	---

set metric	Specify the metric value assigned to redistributed routes.
----------------------------	--

set metric-type	Specify the metric type assigned to redistributed routes.
---------------------------------	---

set tag	Specify the tag assigned to redistributed routes.
-------------------------	---

set comm-list delete

C E S

S4810

S4820T

Configure a filter to remove the specified community list from the BGP route's COMMUNITY attribute.

Syntax set comm-list *community-list-name* delete

Parameters

<i>community-list-name</i>	Enter the name of an established Community list, up to 140 characters.
----------------------------	--

Defaults Not configured.

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

The community list used in the `set comm-list delete` command must be configured so that each filter contains only one community. For example, the filter `deny 100:12` is acceptable, but the filter `deny 120:13 140:33` results in an error.

If the `set comm-list delete` command and the `set community` command are configured in the same route map sequence, then the deletion command (`set comm-list delete`) is processed before the insertion command (`set community`).

Prior to 7.8.1.0, names are up to 16 characters long.

Related Commands

ip community-list	Configure community access list.
match community	Redistribute routes that match the COMMUNITY attribute.
set community	Specify a COMMUNITY attribute.

set community

Allows you to assign a BGP COMMUNITY attribute.

Syntax

```
set community { community-number | local-as | no-advertise | no-export | none } [additive]
```

To delete a BGP COMMUNITY attribute assignment, use the `no set community { community-number | local-as | no-advertise | no-export | none }` command.

Parameters

<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system.
local-AS	Enter the keywords <code>local-AS</code> to drop all routes with the COMMUNITY attribute of <code>NO_EXPORT_SUBCONFED</code> . All routes with the <code>NO_EXPORT_SUBCONFED</code> (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
no-advertise	Enter the keywords <code>no-advertise</code> to drop all routes containing the well-known community attribute of <code>NO_ADVERTISE</code> . All routes with the <code>NO_ADVERTISE</code> (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.

no-export	Enter the keywords <code>no-export</code> to drop all routes containing the well-known community attribute of <code>NO_EXPORT</code> . All routes with the <code>NO_EXPORT</code> (0xFFFFFFFF) community attribute must not be advertised outside a BGP confederation boundary.
none	Enter the keywords <code>none</code> to remove the community attribute from routes meeting the route map criteria.
additive	(OPTIONAL) Enter the keyword <code>additive</code> add the communities to already existing communities.

Defaults Not configured

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

ip community-list	Configure a Community access list.
match community	Redistribute routes that match a BGP COMMUNITY attribute.
neighbor send-community	Assign the COMMUNITY attribute.
show ip bgp community	Display BGP community groups.
show ip community-lists	Display configured Community access lists.

set level

C **E** **S**

S4810

S4820T

Configure a filter to specify the IS-IS level or OSPF area to which matched routes are redistributed.

Syntax

`set level { backbone | level-1 | level-1-2 | level-2 | stub-area }`

Parameters

backbone	Enter the keyword <code>backbone</code> to redistribute matched routes to the OSPF backbone area (area 0.0.0.0).
level-1	Enter the keyword <code>level-1</code> to redistribute matched routes to IS-IS Level 1.
level-1-2	Enter the keyword <code>level-1-2</code> to redistribute matched routes to IS-IS Level 1 and Level 2.
level-2	Enter the keyword <code>level-2</code> to redistribute matched routes to IS-IS Level 2.
stub-area	Enter the keyword <code>stub</code> to redistributed matched routes to OSPF stub areas.

Defaults Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

set automatic-tag	Compute the tag value of the route.
set metric	Specify the metric value assigned to redistributed routes.
set metric-type	Specify the metric type assigned to redistributed routes.
set tag	Specify the tag assigned to redistributed routes.

set local-preference

C E S

S4810

S4820T

Configure a filter to set the BGP LOCAL_PREF attribute for routers within the local autonomous system.

Syntaxset local-preference *value***Parameters**

<i>value</i>	Enter a number as the LOCAL_PREF attribute value. Range: 0 to 4294967295
--------------	---

Defaults

Not configured

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

The [set local-preference](#) command changes the LOCAL_PREF attribute for routes meeting the route map criteria. To change the LOCAL_PREF for all routes, use the [bgp default local-preference](#) command.

Related Commands

bgp default local-preference	Change default LOCAL_PREF attribute for all routes.
--	---

set metric

C E S

S4810

S4820T

Configure a filter to assign a new metric to redistributed routes.

Syntax

set metric [+ | -] *metric-value*

To delete a setting, enter no set metric.

Parameters

+	(OPTIONAL) Enter + to add a metric-value to the redistributed routes.
-	(OPTIONAL) Enter - to subtract a metric-value from the redistributed routes.
<i>metric-value</i>	Enter a number as the new metric value. Range: zero (0) to 4294967295

Defaults

Not configured

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

set automatic-tag	Compute the tag value of the route.
set level	Specify the OSPF area for route redistribution.
set metric-type	Specify the route type assigned to redistributed routes.
set tag	Specify the tag assigned to redistributed routes.

set metric-type

C E S

S4810

S4820T

Configure a filter to assign a new route type for routes redistributed to OSPF.

Syntax

set metric-type { internal | external | type-1 | type-2 }

Parameters

internal	Enter the keyword <code>internal</code> to assign the Interior Gateway Protocol metric of the next hop as the route's BGP MULTI_EXIT_DES (MED) value.
external	Enter the keyword <code>external</code> to assign the IS-IS external metric.

	type-1	Enter the keyword type-1 to assign the OSPF Type 1 metric.
	type-2	Enter the keyword type-2 to assign the OSPF Type 2 metric.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Implemented internal keyword
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series
Related Commands	set automatic-tag	Compute the tag value of the route.
	set level	Specify the OSPF area for route redistribution.
	set metric	Specify the metric value assigned to redistributed routes.
	set tag	Specify the tag assigned to redistributed routes.

set next-hop

C E S

S4810

S4820T

Configure a filter to specify an IP address as the next hop.

Syntax

`set next-hop ip-address`

Parameters

<i>ip-address</i>	Specify an IP address in dotted decimal format.
-------------------	---

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

If the [set next-hop](#) command is configured, its configuration takes precedence over the [neighbor next-hop-self](#) command in the ROUTER BGP mode.

If you configure the [set next-hop](#) command with the interface's (either Loopback or physical) IP address, the software declares the route unreachable.

**Related
Commands**

match ip next-hop	Redistribute routes that match the next-hop IP address.
neighbor next-hop-self	Configure the routers as the next hop for a BGP neighbor.

set origin

C E S

S4810

S4820T

Configure a filter to manipulate the BGP ORIGIN attribute.

Syntax

set origin { igrp | egrp | incomplete }

Parameters

egrp	Enter the keyword egrp to set routes originating from outside the local AS.
igrp	Enter the keyword igrp to set routes originating within the same AS.
incomplete	Enter the keyword incomplete to set routes with incomplete routing information.

Defaults

Not configured.

Command Modes

ROUTE-MAP

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

set tag

C E S

S4810

S4820T

Configure a filter to specify a tag for redistributed routes.

Syntax

set tag *tag-value*

Parameters

<i>tag-value</i>	Enter a number as the tag. Range: zero (0) to 4294967295.
------------------	--

Defaults

Not configured

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

set automatic-tag	Compute the tag value of the route.
set level	Specify the OSPF area for route redistribution.
set metric	Specify the metric value assigned to redistributed routes.
set metric-type	Specify the route type assigned to redistributed routes.

set weight

C E S

S4810

S4820T

Configure a filter to add a non-RFC compliant attribute to the BGP route to assist with route selection.

Syntaxset weight *weight***Parameters**

<i>weight</i>	Enter a number as the weight to be used by the route meeting the route map specification. Routes with a higher weight are preferred when there are multiple routes to the same destination. Range: 0 to 65535 Default: router-originated = 32768; all other routes = 0
---------------	---

Defaults

router-originated = 32768; all other routes = 0

Command Modes

ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

If you do not use the [set weight](#) command, router-originated paths have a weight attribute of 32768 and all other paths have a weight attribute of zero.

show config

C E S

Display the current route map configuration.

S4810

S4820T

Syntax show config

Command Modes ROUTE-MAP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS(config-route-map)#show config
!
route-map hopper permit 10
FTOS(config-route-map)#
```

show route-map

C E S

Display the current route map configurations.

S4810

S4820T

Syntax show route-map [*map-name*]

Parameters *map-name* (OPTIONAL) Enter the name of a configured route map, up to 140 characters.

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show route-map
route-map firpo, permit, sequence 10
Match clauses:
Set clauses:
  tag 34
FTOS#
```

Related Commands

route-map	Configure a route map.
---------------------------	------------------------

AS-Path Commands

This feature is supported on E-Series only, as indicated by this character under each command heading: **E**

The following commands configure AS-Path ACLs.

- [deny](#)
- [ip as-path access-list](#)
- [permit](#)
- [show config](#)
- [show ip as-path-access-lists](#)

deny

E

Create a filter to drop routes that match the route's AS-PATH attribute. Use regular expressions to identify which routes are affected by the filter.

Syntax

`deny as-regular-expression`

Parameters

<i>as-regular-expression</i>	<p>Enter a regular expression to match BGP AS-PATH attributes. Use one or a combination of the following:</p> <ul style="list-style-type: none"> • . = (period) matches on any single character, including white space • * = (asterisk) matches on sequences in a pattern (zero or more sequences) • + = (plus sign) matches on sequences in a pattern (one or more sequences) • ? = (question mark) matches sequences in a pattern (0 or 1 sequences). You must enter an escape sequence (CNTL+v) prior to entering the ? regular expression. • [] = (brackets) matches a range of single-character patterns. • ^ = (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.) • \$ = (dollar sign) matches the end of the output string. • _ = (underscore) matches a comma (,), left brace ({}), right brace (}), left parenthesis, right parenthesis, the beginning of the input string, the end of the input string, or a space. • = (pipe) matches either character.
------------------------------	--

Defaults	Not configured
Command Modes	AS-PATH ACL
Usage Information	The regular expression must match part of the ASCII-text in the AS-PATH attribute of the BGP route.
Command History	Version 8.1.1.0 Introduced on E-Series ExaScale
	pre-Version 6.1.1.0 Introduced for E-Series

ip as-path access-list

E **S4810**
S4820T

Enter the AS-PATH ACL mode and configure an access control list based on the BGP AS_PATH attribute.

Syntax ip as-path access-list *as-path-name*

Parameters	<i>as-path-name</i> Enter the access-list name, up to 140 characters.
-------------------	---

Defaults Not configured

Command Modes CONFIGURATION

Example FTOS(conf)#ip as-path access-list TestPath
FTOS(config-as-path)#

Usage Information Use the [match as-path](#) or [neighbor filter-list](#) commands to apply the AS-PATH ACL to BGP routes.

Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 8.1.1.0 Introduced on E-Series ExaScale
	Version 7.8.1.0 Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	pre-Version 6.1.1.0 Introduced for E-Series

Related Commands	match as-path Match on routes contain a specific AS-PATH.
	neighbor filter-list Configure filter based on AS-PATH information.

permit

E

Create a filter to forward BGP routes that match the route's AS-PATH attributes. Use regular expressions to identify which routes are affected by this filter.

Syntax permit *as-regular-expression*

Parameters*as-regular-expression*

Enter a regular expression to match BGP AS-PATH attributes.

Use one or a combination of the following:

- . = (period) matches on any single character, including white space
- * = (asterisk) matches on sequences in a pattern (zero or more sequences)
- + = (plus sign) matches on sequences in a pattern (one or more sequences)
- ? = (question mark) matches sequences in a pattern (0 or 1 sequences). **You must enter an escape sequence (CNTL+v) prior to entering the ? regular expression.**
- [] = (brackets) matches a range of single-character patterns.
- ^ = (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.)
- \$ = (dollar sign) matches the end of the output string.
- _ = (underscore) matches a comma (,), left brace ({}), right brace ({}), left parenthesis, right parenthesis, the beginning of the input string, the end of the input string, or a space.
- | = (pipe) matches either character.

Defaults

Not configured

Command Modes

AS-PATH ACL

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

pre-Version 6.1.1.0 Introduced for E-Series

show config

E

Display the current configuration.

Syntax

show config

Command Mode

AS-PATH ACL

Command History

Version 8.1.1.0 Introduced on E-Series ExaScale

pre-Version 6.1.1.0 Introduced for E-Series

Example

```
FTOS(config-as-path)#show config
!
ip as-path access-list snickers
deny .3
FTOS(config-as-path)#
```

show ip as-path-access-lists

E **S4810**

Display the all AS-PATH access lists configured on the E-Series.

S4820T**Syntax**

show ip as-path-access-lists

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip as-path-access-lists
ip as-path access-list 1
  permit ^$
  permit ^\(.*\) $
  deny .*
ip as-path access-list 91
  permit ^$
  deny .*
  permit ^\(.*\) $
FTOS#
```

IP Community List Commands

IP Community List commands are supported on E-Series only, as indicated by this character under each command heading: **E**

The commands in this section are.

- [deny](#)
- [ip community-list](#)
- [permit](#)
- [show config](#)
- [show ip community-lists](#)

deny

E

Create a filter to drop routes matching a BGP COMMUNITY number.

Syntax

```
deny { community-number | local-AS | no-advertise | no-export | quote-regexp
regular-expressions-list | regexp regular-expression }
```

Parameters

<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system.
local-AS	Enter the keywords local-AS to drop all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.

no-advertise	Enter the keywords no-advertise to drop all routes containing the well-known community attribute of NO_ADVERTISE . All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.				
no-export	Enter the keywords no-export to drop all routes containing the well-known community attribute of NO_EXPORT . All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.				
regex <i>regular-expression</i>	Enter the keyword regex followed by a regular expression. Use one or a combination of the following: <ul style="list-style-type: none"> • . = (period) matches on any single character, including white space • * = (asterisk) matches on sequences in a pattern (zero or more sequences) • + = (plus sign) matches on sequences in a pattern (one or more sequences) • ? = (question mark) matches sequences in a pattern (0 or 1 sequences). You must enter an escape sequence (CNTL+v) prior to entering the ? regular expression. • [] = (brackets) matches a range of single-character patterns. • ^ = (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.) • \$ = (dollar sign) matches the end of the output string. • _ = (underscore) matches a comma (,), left brace ({}), right brace ({}), left parenthesis, right parenthesis, the beginning of the input string, the end of the input string, or a space. • = (pipe) matches either character. 				
Defaults	Not configured.				
Command Modes	COMMUNITY-LIST				
Command History	<table border="1"> <tr> <td>Version 8.1.1.0</td> <td>Introduced on E-Series ExaScale</td> </tr> <tr> <td>pre-Version 6.1.1.0</td> <td>Introduced for E-Series</td> </tr> </table>	Version 8.1.1.0	Introduced on E-Series ExaScale	pre-Version 6.1.1.0	Introduced for E-Series
Version 8.1.1.0	Introduced on E-Series ExaScale				
pre-Version 6.1.1.0	Introduced for E-Series				

ip community-list

E **S4810**

S4820T

Enter **COMMUNITY-LIST** mode and create an IP community-list for BGP.

Syntax

ip community-list *comm-list-name*

To delete a community-list, use the **no ip community-list** *comm-list-name* command.

Parameters

<i>comm-list-name</i>	Enter a text string as the name of the community-list, up to 140 characters.
-----------------------	--

Command Modes

CONFIGURATION

Example

```
FTOS(conf)#ip community-list TestComList
FTOS(config-community-list)#
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
pre-Version 6.1.1.0	Introduced for E-Series

permit

E

Configure a filter to forward routes that match the route's COMMUNITY attribute.

Syntax

```
permit { community-number | local-AS | no-advertise | no-export | quote-regexp  
regular-expressions-list | regexp regular-expression }
```

Parameters

<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system.
local-AS	Enter the keywords local-AS to drop all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
no-advertise	Enter the keywords no-advertise to drop all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
no-export	Enter the keywords no-export to drop all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.
regexp <i>regular-expression</i>	Enter the keyword regexp followed by a regular expression. Use one or a combination of the following: <ul style="list-style-type: none">• . = (period) matches on any single character, including white space• * = (asterisk) matches on sequences in a pattern (zero or more sequences)• + = (plus sign) matches on sequences in a pattern (one or more sequences)• ? = (question mark) matches sequences in a pattern (0 or 1 sequences). You must enter an escape sequence (CNTL+v) prior to entering the ? regular expression.• [] = (brackets) matches a range of single-character patterns.• ^ = (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.)• \$ = (dollar sign) matches the end of the output string.• _ = (underscore) matches a comma (,), left brace ({}), right brace ({}), left parenthesis, right parenthesis, the beginning of the input string, the end of the input string, or a space.• = (pipe) matches either character.

Defaults

Not configured

Command Modes COMMUNITY-LIST

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

show config

E

Display the non-default information in the current configuration.

Syntax

show config

Command Mode

COMMUNITY-LIST

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS(config-std-community-list)#show config
!
ip community-list standard patches
deny 45:1
permit no-export
FTOS(config-std-community-list)#
```

show ip community-lists

E **S4810**

Display configured IP community lists in alphabetic order.

S4820T

Syntax

show ip community-lists [*name*]

Parameters

<i>name</i>	(OPTIONAL) Enter the name of the o or extended IP community list, up to 140 characters.
-------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip community-lists
ip community-list standard 1
deny 701:20
deny 702:20
deny 703:20
deny 704:20
deny 705:20
deny 14551:20
deny 701:112
deny 702:112
deny 703:112
deny 704:112
deny 705:112
deny 14551:112
deny 701:666
deny 702:666
deny 703:666
deny 704:666
deny 705:666
deny 14551:666
FTOS#
```


Bidirectional Forwarding Detection (BFD)

Overview

Bidirectional Forwarding Detection (BFD) is a detection protocol that provides fast forwarding path failure detection. The FTOS implementation is based on the standards specified in the IETF Draft draft-ietf-bfd-base-03 and supports BFD on all Layer 3 physical interfaces including VLAN interfaces and port-channels.

BFD is supported on the C-Series **C**, E-Series **E**, **S4810** and **S4820T** as indicated by the characters that appear under each of the command headings.

Commands

- [bfd all-neighbors](#)
- [bfd disable](#)
- [bfd enable \(Configuration\)](#)
- [bfd enable \(Interface\)](#)
- [bfd interval](#)
- [bfd neighbor](#)
- [bfd protocol-liveness](#)
- [clear bfd counters](#)
- [debug bfd](#)
- [ip route bfd](#)
- [ip ospf bfd all-neighbors](#)
- [isis bfd all-neighbors](#)
- [neighbor bfd](#)
- [neighbor bfd disable](#)
- [show bfd counters](#)
- [show bfd neighbors](#)
- [vrrp bfd](#)

bfd all-neighbors

C E S4810

S4820T

Enable BFD sessions with all neighbors discovered by Layer 3 protocols IS-IS, OSPF, or BGP on router interfaces, and (optionally) reconfigure the default timer values.

Syntax

bfd all-neighbors [interval *interval* min_rx *min_rx* multiplier *value* role { active | passive }]

Parameters

interval <i>milliseconds</i>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
min_rx <i>milliseconds</i>	Enter this keyword to specify the minimum rate at which the local system would like to receive control packets from the remote system. Range: 50 to 100 Default: 100
multiplier <i>value</i>	Enter this keyword to specify the number of packets that must be missed in order to declare a session down. Range: 3 to 50 Default: 3
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none"> Active—The active system initiates the BFD session. Both systems can be active for the same session. Passive—The passive system does not initiate a session. It only responds to a request for session initialization from the active system. Default: Active

Defaults

Parameters

Command Modes

ROUTER OSPF

ROUTER BGP

ROUTER ISIS (Not available on C-Series)

Command History

Version 8.3.19.0	BFD for BGP was introduced on the S4820T.
Version 8.3.8.0	BFD for BGP was introduced on the S4810.
Version 8.4.1.3	BFD for BGP was introduced on the E-Series ExaScale.
Version 8.2.1.0	BFD for OSPF and ISIS introduced on the E-Series ExaScale.
Version 7.6.1.0	BFD for OSPF introduced on the C-Series.
Version 7.5.1.0	BFD for ISIS introduced on the E-Series.
Version 7.4.1.0	BFD for OSPF introduced on the E-Series.

Usage Information

All neighbors inherit the timer values configured with the `bfd all-neighbors` command except in the following cases:

- Timer values configured with the `isis bfd all-neighbors` or `ip ospf bfd all-neighbors` commands in INTERFACE mode override timer values configured with the `bfd all-neighbors` command. Likewise, using the `no bfd all-neighbors` command does not disable BFD on an interface if BFD is explicitly enabled using the command `isis bfd all-neighbors`.
- Neighbors that have been explicitly enabled or disabled for a BFD session with the `bfd neighbor` or `neighbor bfd disable` commands in ROUTER BGP mode do not inherit the global BFD enable/disable values configured with the `bfd all-neighbors` command or configured for the peer group to which a neighbor belongs. The neighbors inherit only the global timer values (configured with the `bfd all-neighbors` command).

Related Commands

<code>show bfd neighbors</code>	Display BFD neighbor information on all interfaces or a specified interface.
<code>bfd neighbor</code>	Explicitly enable a BFD session with a BGP neighbor or a BGP peer group.
<code>neighbor bfd disable</code>	Explicitly disable a BFD session with a BGP neighbor or a BGP peer group.

bfd disable

C **E**

Disable all VRRP sessions in a VRRP group.

Syntax

`bfd disable`

Re-enable BFD using the command `no bfd disable`.

Defaults

BFD is disabled by default.

Command Modes

INTERFACE VRRP

Command History

Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.5.1.0	Introduced on E-Series

bfd enable (Configuration)

C **E** **S4810**

Enable BFD on all interfaces.

S4820T

Syntax

`bfd enable`

Disable BFD using the `no bfd enable` command.

Defaults BFD is disabled by default.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

bfd enable (Interface)

C **E** **S4810**
S4820T

Enable BFD on an interface.

Syntax bfd enable

Defaults BFD is enabled on all interfaces when you enable BFD from CONFIGURATION mode.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

bfd interval

C **E** **S4810**
S4820T

Specify non-default BFD session parameters beginning with the transmission interval.

This command is deprecated as of FTOS 8.3.12.0.

Syntax bfd interval *interval* min_rx *min_rx* multiplier *value* role { active | passive }

Parameters

interval <i>milliseconds</i>	Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
min_rx <i>milliseconds</i>	Enter this keyword to specify the minimum rate at which the local system would like to receive control packets from the remote system. Range: 50 to 100 Default: 100

multiplier <i>value</i>	Enter this keyword to specify the number of packets that must be missed in order to declare a session down. Range: 3 to 50 Default: 3
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none"> Active—The active system initiates the BFD session. Both systems can be active for the same session. Passive—The passive system does not initiate a session. It only responds to a request for session initialization from the active system. Default: Active

Defaults

Parameters

Command Modes

INTERFACE


Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Deprecated command. Replaced by
Version 8.3.10.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS(conf-if-gi-0/3)#bfd interval 250 min_rx 300 multiplier 4 role passive
FTOS(conf-if-gi-0/3)#
```

bfd neighbor



Establish a BFD session with a neighbor.

This command is deprecated as of FTOS 8.3.12.0.

Syntax

bfd neighbor *ip-address*

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format (A.B.C.D).
-------------------	--

Defaults

None

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Deprecated command. Replaced by
Version 8.3.10.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series

Version 7.5.1.0	Added support for VLAN and port-channel interfaces on E-Series.
-----------------	---

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

Related Commands

show bfd neighbors	Display BFD neighbor information on all interfaces or a specified interface.
------------------------------------	--

bfd protocol-liveness

E **S4810**

Enable the BFD protocol liveness feature.

S4820T

Syntax

bfd protocol-liveness

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.10.0	Introduced on S4810
------------------	---------------------

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

Usage Information

Protocol Liveness is a feature that notifies the BFD Manager when a client protocol (e.g OSPF, ISIS) is disabled. When a client is disabled, all BFD sessions for that protocol are torn down. Neighbors on the remote system receive an Admin Down control packet and are placed in the Down state. Peer routers might take corrective action by choosing alternative paths for the routes that originally pointed to this router.

clear bfd counters

C **E**

Clear all BFD counters, or counters for a particular interface.

Syntax

clear bfd counters [*interface*]

Parameters	<i>interface</i>	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a port-channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale, and 1 to 512 for ExaScale For VLAN interfaces, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. For ExaScale VLAN interfaces, the range is 1-2730 (VLAN IDs can be 0-4093).
Defaults	None	
Command Modes	EXEC Privilege	
Command History	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.7.1.0	Introduced on C-Series
	Version 7.5.1.0	Added support for VLAN and port-channel interfaces on E-Series
	Version 7.4.1.0	Introduced on E-Series
Related Commands	show bfd counters	Display BFD counter information.

debug bfd

C **E**

Enable BFD debugging.

Syntax

`debug bfd { detail | event / packet } { all | interface } [mode] [count number]`

Parameters	<i>detail</i>	(OPTIONAL) Enter this keyword to display detailed information about BFD packets.
	<i>event</i>	(OPTIONAL) Enter this keyword to display information about BFD state. The mode option is not available with this option.
	<i>packet</i>	(OPTIONAL) Enter the keyword <code>packet</code> to display brief information about control packets.
	<i>all</i>	Enter this keyword to enable debugging on all interfaces. The count option is not available with this option.

<i>interface</i>	<p>Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a port-channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale, and 1 to 512 for ExaScale. For VLAN interfaces, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. For ExaScale VLAN interfaces, the range is 1 to 2730 (VLAN IDs can be 0 to 4093).
<i>mode</i>	<p>(OPTIONAL) Enter one of the following debug transmission modes:</p> <ul style="list-style-type: none"> Enter the keyword <code>both</code> to display information for both received and sent packets. Enter the keyword <code>rx</code> to display information for received packets. Enter the keyword <code>tx</code> to display information for sent packets. <p>Default: <code>both</code></p>
<i>count number</i>	<p>(OPTIONAL) Enter this keyword followed by the number of debug messages to display. Range: 1 to 65534 Default: Infinite—that is, if a count number is not specified an infinite number of debug messages will display.</p>

Defaults Disabled

Command Modes EXEC Privilege

Command History

Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.5.1.0	Added support for VLAN and port-channel interfaces on E-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

Since BFD can potentially transmit 20 packets per interface, debugging information should be restricted.

ip route bfd



Enable BFD for all neighbors configured through static routes.

Syntax

`ip route bfd [interval interval min_rx min_rx multiplier value role { active | passive }]`

Parameters	<code>interval <i>milliseconds</i></code>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
	<code>interval <i>milliseconds</i></code>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
	<code>multiplier <i>value</i></code>	Enter this keyword to specify the number of packets that must be missed in order to declare a session down. Range: 3 to 50 Default: 3
	<code>role [active passive]</code>	Enter the role that the local system assumes: <ul style="list-style-type: none"> Active—The active system initiates the BFD session. Both systems can be active for the same session. Passive—The passive system does not initiate a session. It only responds to a request for session initialization from the active system. Default: Active
Defaults	Parameters	
Command Modes	CONFIGURATION	
Command History	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on C-Series
	Version 7.4.1.0	Introduced on E-Series
Related Commands	show bfd neighbors	Display BFD neighbor information on all interfaces or a specified interface.

ip ospf bfd all-neighbors

S4810

Establish BFD sessions with all OSPF neighbors on a single interface.

S4820T

Syntax

`ip ospf bfd all-neighbors`

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.12.0 Introduced on S4810

**Related
Commands**

bfd all-neighbors	Enable BFD sessions with all neighbors discovered by Layer 3 protocols IS-IS, OSPF or BFP on router interfaces.
neighbor bfd disable	Explicitly disable a BFD session with a BFP neighbor or a BFP peer group.
show bfd neighbors	Display BFD neighbor information on all interfaces or a specified interface.

isis bfd all-neighbors

E

Enable BFD on all IS-IS neighbors discovered on an interface.

Syntax

```
isis bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role { active | passive }]]
```

Parameters

disable	(OPTIONAL) Enter the keyword disable to disable BFD on this interface.
interval <i>milliseconds</i>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
min_rx <i>milliseconds</i>	Enter this keyword to specify the minimum rate at which the local system would like to receive control packets from the remote system. Range: 50 to 100 Default: 100
multiplier <i>value</i>	Enter this keyword to specify the number of packets that must be missed in order to declare a session down. Range: 3 to 50 Default: 3
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none"> Active—The active system initiates the BFD session. Both systems can be active for the same session. Passive—The passive system does not initiate a session. It only responds to a request for session initialization from the active system. Default: Active

Defaults

Parameters

Command Modes

INTERFACE

**Command
History**

Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on E-Series

**Usage
Information**

This command provides the flexibility to fine tune the timer values based on individual interface needs when ISIS BFD is configured in CONFIGURATION mode. Any timer values specified with this command override timers set using the command [bfd all-neighbors](#). Using the *no* form of this command will not disable BFD if BFD is configured in CONFIGURATION mode.

Use the keyword `disable` to disable BFD on a specific interface while BFD is configured in from CONFIGURATION mode.

neighbor bfd

S4810 E X

S4820T

Explicitly enable a BFD session with a BGP neighbor or a BGP peer group.

Syntax

```
neighbor { ip-address | peer-group-name } bfd
```

Parameters

<i>ip-address</i>	Enter the IP address of the BGP neighbor that you want to explicitly enable for BFD sessions in dotted decimal format (A.B.C.D).
<i>peer-group-name</i>	Enter the name of the peer group that you want to explicitly enable for BFD sessions.

Defaults

None

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Introduced on the S4810.
Version 8.4.1.3	Introduced on the E-Series ExaScale.

Usage Information

When you enable a BFD session with a specified BGP neighbor or peer group using the `bfd neighbor` command, the default BFD session parameters are used (interval: 100 milliseconds, `min_rx`: 100 milliseconds, `multiplier`: 3 packets, and `role`: active) if no parameters have been specified with the `bfd all-neighbors` command.

When you explicitly enable a BGP neighbor for a BFD session with the `bfd neighbor` command:

- The neighbor does not inherit the global BFD enable values configured with the `bfd all-neighbors` command or configured for the peer group to which the neighbor belongs.
- The neighbor only inherits the global timer values configured with the `bfd all-neighbors` command: `interval`, `min_rx`, and `multiplier`.

Related Commands

<code>bfd all-neighbors</code>	Enable BFD sessions with all neighbors discovered by Layer 3 protocols.
<code>neighbor bfd disable</code>	Explicitly disable a BFD session with a BGP neighbor or a BGP peer group.
<code>show bfd neighbors</code>	Display BFD neighbor information on all interfaces or a specified interface.

neighbor bfd disable

S4810 E X

S4820T

Explicitly disable a BFD session with a BGP neighbor or a BGP peer group.

Syntax

neighbor { *ip-address* | *peer-group-name* } bfd disable

Parameters

<i>ip-address</i>	Enter the IP address of the BGP neighbor that you want to explicitly disable for BFD sessions in dotted decimal format (A.B.C.D).
<i>peer-group-name</i>	Enter the name of the peer group that you want to explicitly disable for BFD sessions.

Defaults

None

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Introduced on the S4810.
Version 8.4.1.3	Introduced on the E-Series ExaScale.

Usage Information

When you explicitly disable a BGP neighbor for a BFD session with the [neighbor bfd disable](#) command:

- The neighbor does not inherit the global BFD disable values configured with the [bfd all-neighbors](#) command or configured for the peer group to which the neighbor belongs.
- The neighbor only inherits the global timer values configured with the [bfd all-neighbors](#) command: interval, min_rx, and multiplier.

When you remove the disabled state of a BFD for BGP session with a specified neighbor by entering the [no neighbor bfd disable](#) command, the BGP link with the neighbor returns to normal operation and uses the BFD session parameters globally configured with the [bfd all-neighbors](#) command or configured for the peer group to which the neighbor belongs.

Related Commands

bfd all-neighbors	Enable BFD sessions with all neighbors discovered by Layer 3 protocols.
bfd neighbor	Explicitly enable a BFD session with a BGP neighbor or a BGP peer group.
show bfd neighbors	Display BFD neighbor information on all interfaces or a specified interface.

show bfd counters

C E

Display BFD counter information.

Syntax

```
show bfd counters [bgp | isis | ospf | vrrp | static-route] [interface]
```

Parameters

<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a port-channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale, and 1 to 512 for ExaScale For VLAN interfaces, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. For ExaScale VLAN interfaces, the range is 1-2730 (VLAN IDs can be 0-4093).
<i>bgp</i>	(OPTIONAL) Enter this keyword to display counter information for BFD sessions established with BGP neighbors.
<i>isis</i>	(OPTIONAL) Enter this keyword to display counter information for BFD sessions established with ISIS neighbors. This option is not available on C-Series.
<i>ospf</i>	(OPTIONAL) Enter this keyword to display counter information for BFD sessions established with OSPF neighbors.
<i>static-route</i>	(OPTIONAL) Enter this keyword to display counter information for BFD sessions established with ISIS neighbors.
<i>vrrp</i>	(OPTIONAL) Enter this keyword to display counter information for BFD sessions established with VRRP neighbors.

Defaults

None

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.4.1.3	Added support for BFD for BGP on the E-Series ExaScale.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on C-Series
Version 7.5.1.0	Added support for BFD for VLAN and port-channel interfaces, ISIS, and VRRP on E-Series.
Version 7.4.1.0	Introduced BFD on physical ports, static routes, and OSPF on E-Series.

Example

```
FTOS#show bfd counters

Interface                Tx      Rx
GigabitEthernet 1/3     522    625
FTOS#
```

show bfd neighbors

C E S4810

S4820T

Display BFD neighbor information on all interfaces or a specified interface.

Syntax

show bfd neighbors *interface* [detail]

Parameters

<i>interface</i>	<p>Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale, and 1 to 512 for ExaScale For VLAN interfaces, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. For ExaScale VLAN interfaces, the range is 1-2730 (VLAN IDs can be 0-4093).
<i>detail</i>	(OPTIONAL) Enter the keyword <code>detail</code> to view detailed information about BFD neighbors.

Defaults

None

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added support for BFD for BGP on the S4820T.
Version 8.3.8.0	Added support for BFD for BGP on the S4810.
Version 8.4.1.3	Added support for BFD for BGP on the E-Series ExaScale.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.5.1.0	Added BFD on VLAN and port-channel interfaces on E-Series
Version 7.4.1.0	Introduced BFD on physical ports on E-Series

Example

```

FTOS#show bfd neighbors

*          - Active session role
Ad Dn     - Admin Down
B         - BGP
C         - CLI
I         - ISIS
O         - OSPF
R         - Static Route (RTM)

   LocalAddr      RemoteAddr      Interface State Rx-int Tx-int Mult Clients
* 10.1.3.2        10.1.3.1        Gi 1/3   Up    300   250   3      C
FTOS#

```

Example (show bfd neighbors detail)

```

FTOS#show bfd neighbors detail

Session Discriminator: 1
Neighbor Discriminator: 1
Local Addr: 10.1.3.2
Local MAC Addr: 00:01:e8:02:15:0e
Remote Addr: 10.1.3.1
Remote MAC Addr: 00:01:e8:27:2b:f1
Int: GigabitEthernet 1/3
State: Up
Configured parameters:
  TX: 100ms, RX: 100ms, Multiplier: 3
Neighbor parameters:
  TX: 250ms, RX: 300ms, Multiplier: 4
Actual parameters:
  TX: 300ms, RX: 250ms, Multiplier: 3
Role: Active
Delete session on Down: False
Client Registered: CLI
Uptime: 00:02:04
Statistics:
  Number of packets received from neighbor: 376
  Number of packets sent to neighbor: 314
  Number of state changes: 2
  Number of messages from IFA about port state change: 0
  Number of messages communicated b/w Manager and Agent: 6
FTOS#

```

Related Commands

bfd neighbor	Establish a BFD session with a neighbor.
bfd all-neighbors	Establish BFD sessions with all neighbors discovered by the IS-IS protocol or OSPF protocol out of all interfaces.

vrrp bfd

C **E**

Establish a VRRP BFD session.

Syntax

```

vrrp bfd { all-neighbors | neighbor ip-address } [interval interval min_rx min_rx multiplier value
role { active | passive } ]

```

Parameters

<code>all-neighbors</code>	Establish BFD sessions with all BFD neighbors on an interface.
<code>neighbor <i>ip-address</i></code>	Enter the IP address of the BFD neighbor.

<code>interval <i>milliseconds</i></code>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
<code>interval <i>milliseconds</i></code>	(OPTIONAL) Enter this keyword to specify non-default BFD session parameters beginning with the transmission interval. Range: 50 to 1000 Default: 100
<code>multiplier</code>	Enter this keyword to specify the number of packets that must be missed in order to declare a session down. Range: 3 to 50 Default: 3
<code>role [active passive]</code>	Enter the role that the local system assumes: <ul style="list-style-type: none"> • Active—The active system initiates the BFD session. Both systems can be active for the same session. • Passive—The passive system does not initiate a session. It only responds to a request for session initialization from the active system. Default: Active

Defaults

Parameters.

Command Modes

INTERFACE








Command History

Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on C-Series
Version 7.5.1.0	Introduced on E-Series

Border Gateway Protocol IPv4 (BGPv4)

Overview

BGPv4 is supported as shown in the following table.

FTOS version	Platform support	
8.3.19.0	S4820T	
8.3.11.1	Z9000	
8.3.7.0	S4810	
8.1.1.0	E-Series ExaScale	
7.8.1.0	S-Series	
7.7.1.0.	C-Series	
pre-7.7.1.0	E-Series TeraScale	

For detailed information on configuring BGP, refer to the BGP chapter in the *FTOS Configuration Guide*.

This chapter contains the following sections:

- [BGPv4 Commands](#)
- [MBGP Commands](#)
- [BGP Extended Communities \(RFC 4360\)](#)

BGPv4 Commands

Border Gateway Protocol (BGP) is an external gateway protocol that transmits interdomain routing information within and between Autonomous Systems (AS). BGP version 4 (BGPv4) supports Classless InterDomain Routing (CIDR) and the aggregation of routes and AS paths. Basically, two routers (called neighbors or peers) exchange information including full routing tables and periodically send messages to update those routing tables.



Note: FTOS Version 7.7.1 supports 2-Byte (16-bit) and 4-Byte (32-bit) format for Autonomous System Numbers (ASNs), where the 2-Byte format is 1-65535, the 4-Byte format is 1-4294967295.

Note: FTOS Version 8.3.1.0 supports Dotted format as well as the Traditional Plain format for AS Numbers. The dot format is displayed when using the show ip bgp commands. To determine the comparable dot format for an ASN from a traditional format, use `ASN/65536 . ASN%65536`. For more information about using the 2 or 4-Byte format, refer to the *FTOS Configuration Guide*.

The following commands enable you to configure and enable BGP.

- [address-family](#)
- [aggregate-address](#)
- [bgp add-path](#)
- [bgp always-compare-med](#)
- [bgp asnotation](#)
- [bgp bestpath as-path ignore](#)
- [bgp bestpath as-path multipath-relax](#)
- [bgp bestpath med confed](#)
- [bgp bestpath med missing-as-best](#)
- [bgp bestpath router-id ignore](#)
- [bgp client-to-client reflection](#)
- [bgp cluster-id](#)
- [bgp confederation identifier](#)
- [bgp confederation peers](#)
- [bgp dampening](#)
- [bgp default local-preference](#)
- [bgp enforce-first-as](#)
- [bgp fast-external-fallover](#)
- [bgp four-octet-as-support](#)
- [bgp graceful-restart](#)
- [bgp log-neighbor-changes](#)
- [bgp non-deterministic-med](#)

- bgp recursive-bgp-next-hop
- bgp regex-eval-optz-disable
- bgp router-id
- bgp soft-reconfig-backup
- capture bgp-pdu neighbor
- capture bgp-pdu max-buffer-size
- clear ip bgp
- clear ip bgp dampening
- clear ip bgp flap-statistics
- debug ip bgp
- debug ip bgp dampening
- debug ip bgp events
- debug ip bgp keepalives
- debug ip bgp notifications
- debug ip bgp soft-reconfiguration
- debug ip bgp updates
- default-metric
- description
- distance bgp
- max-paths
- neighbor activate
- neighbor add-path
- neighbor advertisement-interval
- neighbor advertisement-start
- neighbor allowas-in
- neighbor default-originate
- neighbor description
- neighbor distribute-list
- neighbor ebgp-multihop
- neighbor fall-over
- neighbor filter-list
- neighbor graceful-restart
- neighbor local-as
- neighbor maximum-prefix
- neighbor next-hop-self
- neighbor password
- neighbor peer-group (assigning peers)
- neighbor peer-group (creating group)
- neighbor peer-group passive
- neighbor remote-as

- neighbor remove-private-as
- neighbor route-map
- neighbor route-reflector-client
- neighbor send-community
- neighbor shutdown
- neighbor soft-reconfiguration inbound
- neighbor timers
- neighbor update-source
- neighbor weight
- network
- network backdoor
- redistribute
- redistribute isis
- redistribute ospf
- router bgp
- show capture bgp-pdu neighbor
- show config
- show ip bgp
- show ip bgp cluster-list
- show ip bgp community
- show ip bgp community-list
- show ip bgp dampened-paths
- show ip bgp detail
- show ip bgp extcommunity-list
- show ip bgp filter-list
- show ip bgp flap-statistics
- show ip bgp inconsistent-as
- show ip bgp neighbors
- show ip bgp next-hop
- show ip bgp paths
- show ip bgp paths as-path
- show ip bgp paths community
- show ip bgp peer-group
- show ip bgp regexp
- show ip bgp summary
- show running-config bgp
- timers bgp

address-family

C E S

Enable the IPv4 multicast or the IPv6 address family.

S4810

S4820T

Syntax address-family [ipv4 multicast| ipv6unicast]

Parameters	ipv4 multicast	Enter BGPv4 multicast mode.
	ipv6 unicast	Enter BGPv6 mode.

Defaults Not configured.

Command Modes ROUTER BGP

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 6.5.1.0	Introduced

aggregate-address

C E S

Summarize a range of prefixes to minimize the number of entries in the routing table.

S4810

S4820T

Syntax aggregate-address *ip-address mask* [advertise-map *map-name*] [as-set] [attribute-map *map-name*] [summary-only] [suppress-map *map-name*]

Parameters	<i>ip-address mask</i>	Enter the IP address and mask of the route to be the aggregate address. Enter the IP address in dotted decimal format (A.B.C.D) and mask in / prefix format (/x).
	advertise-map <i>map-name</i>	(OPTIONAL) Enter the keywords advertise-map followed by the name of a configured route map to set filters for advertising an aggregate route.
	as-set	(OPTIONAL) Enter the keyword as-set to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.
	attribute-map <i>map-name</i>	(OPTIONAL) Enter the keywords attribute-map followed by the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.
	summary-only	(OPTIONAL) Enter the keyword summary-only to advertise only the aggregate address. Specific routes will not be advertised.
	suppress-map <i>map-name</i>	(OPTIONAL) Enter the keywords suppress-map followed by the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults	Not configured.								
Command Modes	ROUTER BGP ADDRESS FAMILY ROUTER BGP ADDRESS FAMILY IPv6								
Usage Information	<p>At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.</p> <p>Do not add the <code>as-set</code> parameter to the aggregate, if routes within the aggregate are constantly changing as the aggregate will flap to keep track of the changes in the <code>AS_PATH</code>.</p> <p>In route maps used in the <code>suppress-map</code> parameter, routes meeting the <code>deny</code> clause are not suppress; in other words, they are allowed. The opposite is true: routes meeting the <code>permit</code> clause are suppressed.</p> <p>If the route is injected via the <code>network</code> command, that route will still appear in the routing table if the <code>summary-only</code> parameter is configured in the <code>aggregate-address</code> command.</p> <p>The <code>summary-only</code> parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the <code>neighbor distribute-list</code> command.</p> <p>In the <code>show ip bgp</code> command, aggregates contain an 'a' in the first column and routes suppressed by the aggregate contain an 's' in the first column.</p>								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

bgp add-path

S4810

S4820T

Allow the advertisement of multiple paths for the same address prefix without the new paths replacing any previous ones.

Syntax

`bgp add-path [send | receive | both] count`

Parameters

send	Enter this keyword to indicate that the system will send multiple paths to peers.
receive	Enter this keyword to indicate that the system will accept multiple paths from peers.

	both	Enter this keyword to indicate that the system will send and accept multiple paths from peers.
	count	Enter the number of paths supported. Range: 2-64
Defaults	Disabled	
Command Modes	ROUTER BGP	
Related Commands	neighbor add-path	Specify that this neighbor/peer group can send/receive multiple path advertisements.
Command History	Version 8.3.19.0 Introduced on the S4820T.	
	Version 8.3.8.0 Introduced on the S4810.	

bgp always-compare-med



Enables you to enable comparison of the MULTI_EXIT_DISC (MED) attributes in the paths from different external ASs.

Syntax

bgp always-compare-med

To disable comparison of MED, enter no bgp always-compare-med.

Defaults

Disabled (that is, the software only compares MEDs from neighbors within the same AS).

Command Modes

ROUTER BGP

Usage Information

Any update without a MED attribute is the least preferred route

If you enable this command, use the [clear ip bgp](#) * command to recompute the best path.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 8.2.1.0	Introduced command
Version 7.7.1.0	Introduced support on C-Series

bgp asnotation

C E S

S4810

S4820T

Enables you to implement a method for AS Number representation in the CLI.

Syntax

`bgp asnotation [asplain | asdot+ | asdot]`

To disable a dot or dot+ representation and return to ASPLAIN, enter no bgp asnotation.

Defaults

asplain

Command Modes

ROUTER BGP

Usage Information

You must enable [bgp four-octet-as-support](#) before enabling this feature. If you disable four-octet-support after using dot or dot+ format, the AS Numbers revert to asplain text.

When you apply an asnotation, it is reflected in the running-configuration. If you change the notation type, the running-config is updated dynamically and the new notation is shown.

Related Commands

bgp four-octet-as-support	Enable 4-byte support for the BGP process
---	---

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 8.3.1.0	Introduced Dynamic Application of AS Notation changes
Version 8.2.1.0	Introduced

Example

```
FTOS(conf)#router bgp 1
FTOS(conf-router_bgp)#bgp asnotation asdot
FTOS(conf-router_bgp)#ex
FTOS(conf)#do show run | grep bgp

router bgp 1
  bgp four-octet-as-support
  bgp asnotation asdot

FTOS(conf)#router bgp 1
FTOS(conf-router_bgp)#bgp asnotation asdot+
FTOS(conf-router_bgp)#ex

FTOS(conf)#do show run | grep bgp
router bgp 1
  bgp four-octet-as-support
```

```

    bgp asnotation asdot+

FTOS(conf)#router bgp 1
FTOS(conf-router_bgp)#bgp asnotation asplain
FTOS(conf-router_bgp)#ex
FTOS(conf)#do show run |grep bgp
router bgp 1
    bgp four-octet-as-support

FTOS(conf)#

```

bgp bestpath as-path ignore

C **E** **S**

S4810

S4820T

Ignore the AS PATH in BGP best path calculations.

Syntax

bgp bestpath as-path ignore

To return to the default, enter no bgp bestpath as-path ignore.

Defaults

Disabled (that is, the software considers the AS_PATH when choosing a route as best).

Command Modes

ROUTER BGP

Usage Information

If you enable this command, use the [clear ip bgp](#) * command to recompute the best path.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp bestpath as-path multipath-relax

S4810 **Z**

S4820T

Include prefixes received from different AS paths during multipath calculation.

Syntax

bgp bestpath as-path multipath-relax

To return to the default BGP routing process, enter no bgp bestpath as-path multipath-relax.

Defaults	Disabled				
Command Modes	ROUTER BGP				
Usage Information	The bestpath router bgp configuration mode command changes the default bestpath selection algorithm. The multipath-relax option allows load-sharing across providers with different (but equal-length) autonomous system paths. Without this option, ECMP expects the AS paths to be identical for load-sharing.				
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.11.4</td> <td>Introduced on the Z9000.</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.11.4	Introduced on the Z9000.
Version 8.3.19.0	Introduced on the S4820T.				
Version 8.3.11.4	Introduced on the Z9000.				

bgp bestpath med confed

C E S

S4810

S4820T

Enable MULTI_EXIT_DISC (MED) attribute comparison on paths learned from BGP confederations.

Syntax bgp bestpath med confed

To disable MED comparison on BGP confederation paths, enter no bgp bestpath med confed.

Defaults Disabled

Command Modes ROUTER BGP

Usage Information The software compares the MEDs only if the path contains no external autonomous system numbers. If you enable this command, use the [clear ip bgp *](#) command to recompute the best path.

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

bgp bestpath med missing-as-best

C E S

S4810

S4820T

During path selection, indicate preference to paths with missing MED (MULTI_EXIT_DISC) over those paths with an advertised MED attribute.

Syntax bgp bestpath med missing-as-best

To return to the default selection, use the `no bgp bestpath med missing-as-best` command.

Defaults Disabled

Command Modes ROUTER BGP

Usage Information The MED is a 4-byte unsigned integer value and the default behavior is to assume a missing MED as 4294967295. This command causes a missing MED to be treated as 0. During the path selection, paths with a lower MED are preferred over those with a higher MED.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 6.3.1.0	Introduced

bgp bestpath router-id ignore

C **E** **S**

Do not compare router-id information for external paths during best path selection.

S4810

S4820T

Syntax `bgp bestpath router-id ignore`

To return to the default selection, use the `no bgp bestpath router-id ignore` command.

Defaults Disabled

Command Modes ROUTER BGP

Usage Information Configuring this option will retain the current best-path. When sessions are subsequently reset, the oldest received path will be chosen as the best-path.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 8.3.1.0	Introduced

bgp client-to-client reflection

C **E** **S**

Enables you to enable route reflection between clients in a cluster.

S4810

S4820T

Syntax	bgp client-to-client reflection								
	To disable client-to-client reflection, enter no bgp client-to-client reflection.								
Defaults	Enabled when a route reflector is configured.								
Command Modes	ROUTER BGP								
Usage Information	Route reflection to clients is not necessary if all client routers are fully meshed.								
Related Commands	<table border="1"> <tr> <td>bgp cluster-id</td> <td>Assign ID to a BGP cluster with two or more route reflectors.</td> </tr> <tr> <td>neighbor route-reflector-client</td> <td>Configure a route reflector and clients.</td> </tr> </table>	bgp cluster-id	Assign ID to a BGP cluster with two or more route reflectors.	neighbor route-reflector-client	Configure a route reflector and clients.				
bgp cluster-id	Assign ID to a BGP cluster with two or more route reflectors.								
neighbor route-reflector-client	Configure a route reflector and clients.								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

bgp cluster-id

C **E** **S**

S4810

S4820T

Assign a cluster ID to a BGP cluster with more than one route reflector.

Syntax bgp cluster-id { *ip-address* | *number* }

To delete a cluster ID, use the no bgp cluster-id { *ip-address* | *number* } command.

Parameters	<table border="1"> <tr> <td><i>ip-address</i></td> <td>Enter an IP address as the route reflector cluster ID.</td> </tr> <tr> <td><i>number</i></td> <td>Enter a route reflector cluster ID as a number from 1 to 4294967295.</td> </tr> </table>	<i>ip-address</i>	Enter an IP address as the route reflector cluster ID.	<i>number</i>	Enter a route reflector cluster ID as a number from 1 to 4294967295.
<i>ip-address</i>	Enter an IP address as the route reflector cluster ID.				
<i>number</i>	Enter a route reflector cluster ID as a number from 1 to 4294967295.				

Defaults Not configured.

Command Modes ROUTER BGP

Usage Information When a BGP cluster contains only one route reflector, the cluster ID is the route reflector's router ID. For redundancy, a BGP cluster may contain two or more route reflectors and you assign a cluster ID with the [bgp cluster-id](#) command. Without a cluster ID, the route reflector cannot recognize route updates from the other route reflectors within the cluster.

The default format for displaying the cluster-id is dotted decimal, but if you enter the cluster-id as an integer, it will be displayed as an integer.

Related Commands

bgp client-to-client reflection	Enable route reflection between route reflector and clients.
neighbor route-reflector-client	Configure a route reflector and clients.
show ip bgp cluster-list	View paths with a cluster ID.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp confederation identifier

C E S

S4810

S4820T

Configure an identifier for a BGP confederation.

Syntax

`bgp confederation identifier as-number`

To delete a BGP confederation identifier, use the `no bgp confederation identifier as-number` command.

Parameters

<i>as-number</i>	Enter the AS number. Range: 0-65535 (2-Byte) <i>or</i> 1-4294967295 (4-Byte) <i>or</i> 0.1-65535.65535 (Dotted format)
------------------	---

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

You must configure your system to accept 4-Byte formats before entering a 4-Byte AS Number. All the routers in the Confederation must be 4 or 2-Byte identified routers. You cannot mix them.

The autonomous systems configured in this command are visible to the EBGp neighbors. Each autonomous system is fully meshed and contains a few connections to other autonomous systems. The next hop, MED, and local preference information is preserved throughout the confederation.

FTOS accepts confederation EBGp peers without a LOCAL_PREF attribute. The software sends AS_CONFED_SET and accepts AS_CONFED_SET and AS_CONF_SEQ.

Related Commands

bgp four-octet-as-support	Enable 4-Byte support for the BGP process.
---	--

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series Added support for 4-Byte format

bgp confederation peers

C E S

S4810

S4820T

Specify the Autonomous Systems (ASs) that belong to the BGP confederation.

Syntaxbgp confederation peers *as-number* [...*as-number*]

To return to the default, enter no bgp confederation peers.

Parameters

<i>as-number</i>	Enter the AS number. Range: 0-65535 (2-Byte) <i>or</i> 1-4294967295 (4-Byte) <i>or</i> 0.1-65535.65535 (Dotted format)
<i>...as-number</i>	(OPTIONAL) Enter up to 16 confederation numbers. Range: 0-65535 (2-Byte) <i>or</i> 1-4294967295 (4-Byte) <i>or</i> 0.1-65535.65535 (Dotted format)

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

All the routers in the Confederation must be 4 or 2 byte identified routers. You cannot mix them.

The Autonomous Systems configured in this command are visible to the EBGp neighbors. Each Autonomous System is fully meshed and contains a few connections to other Autonomous Systems.

After specifying autonomous systems numbers for the BGP confederation, recycle the peers to update their configuration.

Related Commands

bgp confederation identifier	Configure a confederation ID.
bgp four-octet-as-support	Enable 4-byte support for the BGP process.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series Added support for 4-byte format

bgp dampening

C E S

54810

54820T

Enable BGP route dampening and configure the dampening parameters.

Syntax

`bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]`

To disable route dampening, use the `no bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]` command.

Parameters

<i>half-life</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half after the half-life period expires. Range: 1 to 45. Default: 15 minutes
<i>reuse</i>	(OPTIONAL) Enter a number as the reuse value, which is compared to the flapping route's Penalty value. If the Penalty value is less than the reuse value, the flapping route is once again advertised (or no longer suppressed). Range: 1 to 20000. Default: 750
<i>suppress</i>	(OPTIONAL) Enter a number as the suppress value, which is compared to the flapping route's Penalty value. If the Penalty value is greater than the suppress value, the flapping route is no longer advertised (that is, it is suppressed). Range: 1 to 20000. Default: 2000
<i>max-suppress-time</i>	(OPTIONAL) Enter the maximum number of minutes a route can be suppressed. The default is four times the half-life value. Range: 1 to 255. Default: 60 minutes.
<code>route-map map-name</code>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of a configured route map. Only match commands in the configured route map are supported.

Defaults

Disabled.

Command Modes

ROUTER-BGP-ADDRESS FAMILY

Usage Information

If you enter `bgp dampening`, the default values for *half-life*, *reuse*, *suppress*, and *max-suppress-time* are applied. The parameters are position-dependent, therefore, if you configure one parameter, you must configure the parameters in the order they appear in the CLI.

Related Commands	show ip bgp dampened-paths View the BGP paths
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.7.0 Introduced on the S4810.
	Version 7.8.1.0 Introduced support on S-Series
	Version 7.7.1.0 Introduced support on C-Series

bgp default local-preference

C **E** **S**

S4810

S4820T

Change the default local preference value for routes exchanged between internal BGP peers.

Syntax

bgp default local-preference *value*

To return to the default value, enter no bgp default local-preference.

Parameters	<i>value</i>	Enter a number to assign to routes as the degree of preference for those routes. When routes are compared, the higher the degree of preference or local preference value, the more the route is preferred. Range: 0 to 4294967295 Default: 100
-------------------	--------------	--

Defaults 100

Command Modes ROUTER BGP

Usage Information

The [bgp default local-preference](#) command setting is applied by all routers within the AS. To set the local preference for a specific route, use the [set local-preference](#) command in the ROUTE-MAP mode.

Related Commands	set local-preference Assign a local preference value for a specific route.
-------------------------	--

Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.7.0 Introduced on the S4810.
	Version 7.8.1.0 Introduced support on S-Series
	Version 7.7.1.0 Introduced on C-Series

bgp enforce-first-as

C **E** **S**

S4810

S4820T

Disable (or enable) enforce-first-as check for updates received from EBGp peers.

Syntax	<p>bgp enforce-first-as</p> <p>To turn off the default, use the no bgp enforce-first-as command.</p>										
Defaults	Enabled										
Command Modes	ROUTER BGP										
Usage Information	<p>This is enabled by default, that is for all updates received from EBGP peers, BGP ensures that the first AS of the first AS segment is always the AS of the peer. If not, the update is dropped and a counter is incremented. Use the show ip bgp neighbors command to view the “failed enforce-first-as check counter.</p> <p>If enforce-first-as is disabled, it can be viewed via the show ip protocols command.</p>										
Related Commands	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">show ip bgp neighbors</td> <td style="padding: 2px;">View the information exchanged by BGP neighbors</td> </tr> <tr> <td style="padding: 2px;">show ip protocols</td> <td style="padding: 2px;">View Information on routing protocols.</td> </tr> </table>	show ip bgp neighbors	View the information exchanged by BGP neighbors	show ip protocols	View Information on routing protocols.						
show ip bgp neighbors	View the information exchanged by BGP neighbors										
show ip protocols	View Information on routing protocols.										
Command History	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Version 8.3.19.0</td> <td style="padding: 2px;">Introduced on the S4820T.</td> </tr> <tr> <td style="padding: 2px;">Version 8.3.7.0</td> <td style="padding: 2px;">Introduced on the S4810.</td> </tr> <tr> <td style="padding: 2px;">Version 7.8.1.0</td> <td style="padding: 2px;">Introduced support on S-Series</td> </tr> <tr> <td style="padding: 2px;">Version 7.7.1.0</td> <td style="padding: 2px;">Introduced support for C-Series</td> </tr> <tr> <td style="padding: 2px;">Version 7.4.1.0</td> <td style="padding: 2px;">Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support for C-Series	Version 7.4.1.0	Introduced
Version 8.3.19.0	Introduced on the S4820T.										
Version 8.3.7.0	Introduced on the S4810.										
Version 7.8.1.0	Introduced support on S-Series										
Version 7.7.1.0	Introduced support for C-Series										
Version 7.4.1.0	Introduced										

bgp fast-external-fallover

C **E** **S**

S4810

S4820T

Enable the fast external fallover feature, which immediately resets the BGP session if a link to a directly connected external peer fails.

Syntax	<p>bgp fast-external-fallover</p> <p>To disable fast external fallover, enter no bgp fast-external-fallover.</p>								
Defaults	Enabled.								
Command Modes	ROUTER BGP								
Usage Information	The bgp fast-external-fallover command appears in the show config command output.								
Command History	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Version 8.3.19.0</td> <td style="padding: 2px;">Introduced on the S4820T.</td> </tr> <tr> <td style="padding: 2px;">Version 8.3.7.0</td> <td style="padding: 2px;">Introduced on the S4810.</td> </tr> <tr> <td style="padding: 2px;">Version 7.8.1.0</td> <td style="padding: 2px;">Introduced support on S-Series</td> </tr> <tr> <td style="padding: 2px;">Version 7.7.1.0</td> <td style="padding: 2px;">Introduced support for C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support for C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support for C-Series								

bgp four-octet-as-support

C E S

S4810

S4820T

Enable 4-byte support for the BGP process.

Syntax

bgp four-octet-as-support

To disable fast external fallover, enter no bgp four-octet-as-support.

Defaults

Disabled (supports 2-Byte format)

Command Modes

ROUTER BGP

Usage Information

Routers supporting 4-Byte ASNs advertise that function in the OPEN message. The behavior of a 4-Byte router will be slightly different depending on whether it is speaking to a 2-Byte router or a 4-Byte router.

When creating Confederations, all the routers in the Confederation must be 4 or 2 byte identified routers. You cannot mix them.

Where the 2-Byte format is 1-65535, the 4-Byte format is 1-4294967295. Both formats are accepted, and the advertisements will reflect the entered format.

For more information about using the 2 or 4-Byte format, refer to the *FTOS Configuration Guide*.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced command Introduced support on C-Series

bgp graceful-restart

C E S

S4810

S4820T

Enable graceful restart on a BGP neighbor, a BGP node, or designate a local router to support graceful restart as a receiver only.

Syntax

bgp graceful-restart [restart-time *seconds*] [stale-path-time *seconds*] [role receiver-only]

To return to the default, enter the no bgp graceful-restart command.

Parameters	<code>restart-time seconds</code>	Enter the keyword <code>restart-time</code> followed by the maximum number of seconds needed to restart and bring-up all the peers. Range: 1 to 3600 seconds Default: 120 seconds
	<code>stale-path-time seconds</code>	Enter the keyword <code>stale-path-time</code> followed by the maximum number of seconds to wait before restarting a peer's stale paths. Default: 360 seconds.
	<code>role receiver-only</code>	Enter the keyword <code>role receiver-only</code> to designate the local router to support graceful restart as a receiver only.
Defaults	as above	
Command Modes	ROUTER-BGP	
Usage Information	<p>This feature is advertised to BGP neighbors through a capability advertisement. In receiver only mode, BGP saves the advertised routes of peers that support this capability when they restart.</p> <p>BGP graceful restart is active only when the neighbor becomes established. Otherwise it is disabled. Graceful-restart applies to all neighbors with established adjacency.</p>	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

bgp log-neighbor-changes

C **E** **S**

Enable logging of BGP neighbor resets.

Syntax

`bgp log-neighbor-changes`

To disable logging, enter `no bgp log-neighbor-changes`.

Defaults

Enabled.

Command Modes

ROUTER BGP

Usage Information

Use the [show logging](#) command in the EXEC mode to view BGP neighbor resets.

The [bgp log-neighbor-changes](#) command appears in the [show config](#) command output.

Related Commands

show logging	View logging settings and system messages logged to the system.
------------------------------	---

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp non-deterministic-med

C E S

S4810

S4820T

Compare MEDs of paths from different Autonomous Systems.

Syntax

bgp non-deterministic-med

To return to the default, enter no bgp non-deterministic-med.

Defaults

Disabled (that is, paths/routes for the same destination but from different ASs will not have their MEDs compared).

Command Modes

ROUTER BGP

Usage Information

In non-deterministic mode, paths are compared in the order in which they arrive. This method can lead to FTOS choosing different best paths from a set of paths, depending on the order in which they are received from the neighbors since MED may or may not get compared between adjacent paths. In deterministic mode (no bgp non-deterministic-med), FTOS compares MED between adjacent paths within an AS group since all paths in the AS group are from the same AS.

When you change the path selection from deterministic to non-deterministic, the path selection for existing paths remains deterministic until you enter [clear ip bgp](#) command to clear existing paths.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp recursive-bgp-next-hop

C E S

S4810

S4820T

Enable next-hop resolution through other routes learned by BGP.

Syntax

bgp recursive-bgp-next-hop

To disable next-hop resolution, use the no bgp recursive-bgp-next-hop command.

Defaults

Enabled

Command Modes	ROUTER BGP												
Usage Information	<p>This command is a <i>knob</i> to disable BGP next-hop resolution via BGP learned routes. During the next-hop resolution, only the <i>first</i> route that the next-hop resolves through is verified for the route's protocol source and is checked if the route is learned from BGP or not.</p> <p>The <code>clear ip bgp</code> command is required for this command to take effect and to keep the BGP database consistent. Execute the <code>clear ip bgp</code> command right after executing this command.</p>												
Related Commands	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 2px;"><code>clear ip bgp</code></th> <th style="text-align: left; padding: 2px;">Description.</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">Version 8.3.19.0</td> <td style="padding: 2px;">Introduced on the S4820T.</td> </tr> <tr> <td style="padding: 2px;">Version 8.3.7.0</td> <td style="padding: 2px;">Introduced on the S4810.</td> </tr> <tr> <td style="padding: 2px;">Version 7.8.1.0</td> <td style="padding: 2px;">Introduced support on S-Series</td> </tr> <tr> <td style="padding: 2px;">Version 7.7.1.0</td> <td style="padding: 2px;">Introduced support on C-Series</td> </tr> <tr> <td style="padding: 2px;">Version 7.2.1.0</td> <td style="padding: 2px;">Introduced</td> </tr> </tbody> </table>	<code>clear ip bgp</code>	Description.	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series	Version 7.2.1.0	Introduced
<code>clear ip bgp</code>	Description.												
Version 8.3.19.0	Introduced on the S4820T.												
Version 8.3.7.0	Introduced on the S4810.												
Version 7.8.1.0	Introduced support on S-Series												
Version 7.7.1.0	Introduced support on C-Series												
Version 7.2.1.0	Introduced												
Command History													

bgp regex-eval-optz-disable

C E S

S4810

S4820T

Disables the Regex Performance engine that optimizes complex regular expression with BGP.

Syntax `bgp regex-eval-optz-disable`

To re-enable optimization engine, use the `no bgp regex-eval-optz-disable` command.

Defaults Enabled by default

Command Modes ROUTER BGP (conf-router_bgp)

Usage Information BGP uses regular expressions (regex) to filter route information. In particular, the use of regular expressions to filter routes based on AS-PATHs and communities is quite common. In a large scale configuration, filtering millions of routes based on regular expressions can be quite CPU intensive, as a regular expression evaluation involves generation and evaluation of complex finite state machines.

BGP policies, containing regular expressions to match as-path and communities, tend to use a lot of CPU processing time, which in turn affects the BGP routing convergence. Additionally, the `show bgp` commands, which are filtered through regular expressions, use up CPU cycles particularly with large databases. The Regex Engine Performance Enhancement feature optimizes the CPU usage by caching and reusing regular expression evaluation results. This caching and reuse may be at the expensive of RP1 processor memory.

Related Commands	show ip protocols	View information on all routing protocols enabled and active on the E-Series.
-------------------------	-----------------------------------	---

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced

Example

```

FTOS(conf-router_bgp)#no bgp regex-eval-optz-disable
FTOS(conf-router_bgp)#do show ip protocols
Routing Protocol is "ospf 22222"
  Router ID is 2.2.2.2
    Area           Routing for Networks
    51              10.10.10.0/00

Routing Protocol is "bgp 1"
  Cluster Id is set to 10.10.10.0
  Router Id is set to 10.10.10.0
  Fast-external-fallover enabled
  Regular expression evaluation optimization enabled
  Capable of ROUTE_REFRESH
  For Address Family IPv4 Unicast
    BGP table version is 0, main routing table version 0
    Distance: external 20 internal 200 local 200

FTOS(conf-router_bgp)#

```

bgp router-id

C E S

S4810

S4820T

Assign a user-given ID to a BGP router.

Syntaxbgp router-id *ip-address*

To delete a user-assigned IP address, enter no bgp router-id.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format to reset only that BGP neighbor.
-------------------	---

Defaults

The router ID is the highest IP address of the Loopback interface or, if no Loopback interfaces are configured, the highest IP address of a physical interface on the router.

Command Modes

ROUTER BGP

Usage Information

Peering sessions are reset when you change the router ID of a BGP router.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp soft-reconfig-backup

C E S

S4810

S4820T

Use this command *only* when route-refresh is *not* negotiated to avoid the peer from resending messages.

Syntax

bgp soft-reconfig-backup

To return to the default setting, use the no bgp soft-reconfig-backup command.

Defaults

Off

Command Modes

ROUTER BGP

Usage Information

When soft-reconfiguration is enabled for a neighbor and the clear ip bgp soft in is executed, the update database stored in the router is replayed and updates are reevaluated. With this command, the replay and update process is triggered only if route-refresh request is *not* negotiated with the peer. If the request is indeed negotiated (upon execution of clear ip bgp soft in), then BGP sends a route-refresh request to the neighbor and receives all of the peer's updates.



Note: This command is supported in BGP Router Configuration mode for IPv4 Unicast address only.

Related Commands

clear ip bgp soft in	Activate inbound policies without resetting the BGP TCP session.
--------------------------------------	--

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.2.1.0	Introduced

capture bgp-pdu neighbor

C E S

S4810

S4820T

Enable capture of an IPv4 BGP neighbor packet.

Syntax capture bgp-pdu neighbor *ipv4-address* direction {both | rx | tx}

To disable capture of the IPv4 BGP neighbor packet, use the no capture bgp-pdu neighbor *ipv4-address* command.

Parameters	ipv4-address	Enter the IPv4 address of the target BGP neighbor.
	direction {both rx tx}	Enter the keyword direction and a direction— either rx for inbound, tx for outbound, or both.

Defaults Not configured.

Command Modes EXEC Privilege

Related Commands	capture bgp-pdu max-buffer-size	Specify a size for the capture buffer.
	show capture bgp-pdu neighbor	Display BGP packet capture information

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.5.1.0	Introduced

capture bgp-pdu max-buffer-size

C E S

S4810

S4820T

Set the size of the BGP packet capture buffer. This buffer size pertains to both IPv4 and IPv6 addresses.

Syntax capture bgp-pdu max-buffer-size *100-102400000*

Parameters	<i>100-102400000</i>	Enter a size for the capture buffer.
-------------------	----------------------	--------------------------------------

Defaults 40960000 bytes.

Command Modes EXEC Privilege

Related Commands	capture bgp-pdu neighbor	Enable capture of an IPv4 BGP neighbor packet.
	capture bgp-pdu neighbor (ipv6)	Enable capture of an IPv6 BGP neighbor packet.
	show capture bgp-pdu neighbor	Display BGP packet capture information for an IPv6 address on the E-Series.

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.5.1.0	Introduced

clear ip bgp

C E S

S4810

S4820T

Reset BGP sessions on the E-Series. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax

```
clear ip bgp * | as-number | ip-address [flap-statistics | soft [in | out]]
```

Parameters

*	Enter an asterisk (*) to reset all BGP sessions.
<i>as-number</i>	Enter the AS number to reset all neighbors belonging to that AS. Range: 0 to 65535 (2-Byte) <i>or</i> 1 to 4294967295 (4-Byte) <i>or</i> 0.1 to 65535.65535 (Dotted format)
<i>ip-address</i>	Enter an IP address in dotted decimal format to reset all prefixes from that neighbor.
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to reset the flap statistics on all prefixes from that neighbor.
soft	(OPTIONAL) Enter the keyword soft to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration. Note: If you enter clear ip bgp <i>ip-address</i> soft, both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword in to activate only inbound policies.
out	(OPTIONAL) Enter the keyword out to activate only outbound policies.

Command Modes

EXEC Privilege

Related Commands

bgp recursive-bgp-next-hop	Disable next-hop resolution through other routes learned by BGP
bgp soft-reconfig-backup	Turn on BGP Soft Reconfiguration

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 6.5.1.0	Expanded to include the <i>as-number</i> option

clear ip bgp peer-group

C E S

Reset a peer-group's BGP sessions.

S4810

S4820T

Syntax clear ip bgp peer-group *peer-group-name*

Parameters

<i>peer-group-name</i>	Enter the peer group name to reset the BGP sessions within that peer group.
------------------------	---

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

clear ip bgp dampening

C E S

Clear information on route dampening and return suppressed route to active state.

S4810

S4820T

Syntax clear ip bgp dampening [*ip-address mask*]

Parameters

<i>ip-address mask</i>	(OPTIONAL) Enter an IP address in dotted decimal format and the prefix mask in slash format (/x) to clear dampening information only that BGP neighbor.
------------------------	---

Command Modes EXEC Privilege

Usage Information After you enter this command, the software deletes history routes and returns suppressed routes to active state.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

clear ip bgp flap-statistics

C E S

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

S4810

S4820T

Syntax

```
clear ip bgp flap-statistics [ip-address mask | filter-list as-path-name | regexp regular-expression]
```

Parameters

<i>ip-address mask</i>	(OPTIONAL) Enter an IP address in dotted decimal format and the prefix mask in slash format (/x) to reset only that prefix.
filter-list <i>as-path-name</i>	(OPTIONAL) Enter the keyword filter-list followed by the name of a configured AS-PATH list.
regexp <i>regular-expression</i>	(OPTIONAL) Enter the keyword regexp followed by regular expressions. Use one or a combination of the following: <ul style="list-style-type: none">• . = (period) any single character (including a white space)• * = (asterisk) the sequences in a pattern (0 or more sequences)• + = (plus) the sequences in a pattern (1 or more sequences)• ? = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.• [] = (brackets) a range of single-character patterns.• () = (parenthesis) groups a series of pattern elements to a single element• { } = (braces) minimum and the maximum match count• ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.• \$ = (dollar sign) the end of the output string.

Command Modes

EXEC Privilege

Usage Information

If you enter [clear ip bgp flap-statistics](#) without any parameters, all statistics are cleared.

Related Commands

show debugging	View enabled debugging operations.
show ip bgp flap-statistics	View BGP flap statistics.
undebg all	Disable all debugging operations.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

debug ip bgp

C E S

S4810

S4820T

Display all information on BGP, including BGP events, keepalives, notifications, and updates.

Syntax

```
debug ip bgp [ip-address | peer-group peer-group-name] [in | out]
```

To disable all BGP debugging, enter no debug ip bgp.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
peer-group <i>peer-group-name</i>	Enter the keyword peer-group followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword in to view only information on inbound BGP routes.
out	(OPTIONAL) Enter the keyword out to view only information on outbound BGP routes.

Command Modes

EXEC Privilege

Usage Information

To view information on both incoming and outgoing routes, do not include the in and out parameters in the debugging command. The in and out parameters cancel each other; for example, if you enter debug ip bgp in and then enter debug ip bgp out, you will not see information on the incoming routes.

Entering a [no debug ip bgp](#) command removes all configured debug commands for BGP.

Related Commands

debug ip bgp events	View information about BGP events.
debug ip bgp keepalives	View information about BGP keepalives.
debug ip bgp notifications	View information about BGP notifications.
debug ip bgp updates	View information about BGP updates.
show debugging	View enabled debugging operations.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

debug ip bgp dampening

C E S

S4810

S4820T

Display information on routes being dampened.

Syntax	debug ip bgp dampening [in out]								
	To disable debugging, enter no debug ip bgp dampening.								
Parameters	<table border="1"> <tr> <td>in</td> <td>(OPTIONAL) Enter the keyword in to view only inbound dampened routes.</td> </tr> <tr> <td>out</td> <td>(OPTIONAL) Enter the keyword out to view only outbound dampened routes.</td> </tr> </table>	in	(OPTIONAL) Enter the keyword in to view only inbound dampened routes.	out	(OPTIONAL) Enter the keyword out to view only outbound dampened routes.				
in	(OPTIONAL) Enter the keyword in to view only inbound dampened routes.								
out	(OPTIONAL) Enter the keyword out to view only outbound dampened routes.								
Command Modes	EXEC Privilege								
Usage Information	Enter no debug ip bgp command to remove all configured debug commands for BGP.								
Related Commands	<table border="1"> <tr> <td>show debugging</td> <td>View enabled debugging operations.</td> </tr> <tr> <td>show ip bgp dampened-paths</td> <td>View BGP dampened routes.</td> </tr> </table>	show debugging	View enabled debugging operations.	show ip bgp dampened-paths	View BGP dampened routes.				
show debugging	View enabled debugging operations.								
show ip bgp dampened-paths	View BGP dampened routes.								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

debug ip bgp events



Display information on local BGP state changes and other BGP events.

Syntax

debug ip bgp [*ip-address* | peer-group *peer-group-name*] events [in | out]

To disable debugging, use the no debug ip bgp [*ip-address* | peer-group *peer-group-name*] events command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
peer-group <i>peer-group-name</i>	(OPTIONAL) Enter the keyword peer-group followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword in to view only events on inbound BGP messages.
out	(OPTIONAL) Enter the keyword out to view only events on outbound BGP messages.

Command Modes

EXEC Privilege

Usage Information

Enter [no debug ip bgp](#) command to remove all configured debug commands for BGP.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

debug ip bgp keepalives

C E S

S4810

S4820T

Display information about BGP keepalive messages.

Syntaxdebug ip bgp [*ip-address* | peer-group *peer-group-name*] keepalives [in | out]

To disable debugging, use the no debug ip bgp [*ip-address* | peer-group *peer-group-name*] keepalives [in | out] command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
peer-group <i>peer-group-name</i>	(OPTIONAL) Enter the keyword peer-group followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword in to view only inbound keepalive messages.
out	(OPTIONAL) Enter the keyword out to view only outbound keepalive messages.

Command Modes

EXEC Privilege

Usage InformationEnter **no debug ip bgp** command to remove all configured debug commands for BGP.**Command History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

debug ip bgp notifications

C E S

S4810

S4820T

Enables you to view information about BGP notifications received from neighbors.

Syntaxdebug ip bgp [*ip-address* | peer-group *peer-group-name*] notifications [in | out]

To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] notifications [in | out]` command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group</i> <i>peer-group-name</i>	(OPTIONAL) Enter the keyword <code>peer-group</code> followed by the name of the peer group.
	<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view BGP notifications received from neighbors.
	<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view BGP notifications sent to neighbors.

Command Modes EXEC Privilege

Usage Information Enter `no debug ip bgp` command to remove all configured debug commands for BGP.

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

debug ip bgp soft-reconfiguration

C E S

Enable soft-reconfiguration debug.

S4810

S4820T

Syntax `debug ip bgp { ip-address | peer-group-name } soft-reconfiguration`

To disable, use the `no debug ip bgp { ip-address | peer-group-name } soft-reconfiguration` command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults Disabled

Command Modes EXEC Privilege

Usage Information This command turns on BGP soft-reconfiguration inbound debugging. If no neighbor is specified, debug is turned on for all neighbors.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.2.1.0	Introduced

debug ip bgp updates

C E S

S4810

S4820T

Enables you to view information about BGP updates.

Syntax

debug ip bgp updates [in | out | prefix-list prefix-list-name]

To disable debugging, use the no debug ip bgp [*ip-address* | peer-group *peer-group-name*] updates [in | out] command.

Parameters

in	(OPTIONAL) Enter the keyword in to view only BGP updates received from neighbors.
out	(OPTIONAL) Enter the keyword out to view only BGP updates sent to neighbors.
prefix-list <i>prefix-list-name</i>	(OPTIONAL) Enter the keyword prefix-list followed by the name of an established prefix list. If the prefix list is not configured, the default is <i>permit</i> (to allow all routes).
<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group to disable or enable all routers within the peer group.

Command Modes

EXEC Privilege

Usage Information

Enter **no debug ip bgp** command to remove all configured debug commands for BGP.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.7.1	Introduced support on C-Series

default-metric

C E S

S4810

S4820T

Enables you to change the metrics of redistributed routes to locally originated routes. Use this command with the [redistribute](#) command.

Syntax `default-metric number`

To return to the default setting, enter no default-metric.

Parameters	<i>number</i>	Enter a number as the metric to be assigned to routes from other protocols. Range: 1 to 4294967295.
-------------------	---------------	--

Defaults 0

Command Modes ROUTER BGP

Usage Information The `default-metric` command in BGP sets the value of the BGP MULTI_EXIT_DISC (MED) attribute for redistributed routes only.

Related Commands	<code>bgp always-compare-med</code>	Enable comparison of all BGP MED attributes.
	<code>redistribute</code>	Redistribute routes from other routing protocols into BGP.

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

description

C **E** **S**

S4810

S4820T

Enter a description of the BGP routing protocol

Syntax `description { description }`

To remove the description, use the no description { *description* } command.

Parameters	<i>description</i>	Enter a description to identify the BGP protocol (80 characters maximum).
-------------------	--------------------	---

Defaults No default behavior or values

Command Modes ROUTER BGP

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	pre-7.7.1.0	Introduced

**Related
Commands**

[router bgp](#)

Enter ROUTER mode on the switch.

distance bgp

C E S

S4810

S4820T

Configure three administrative distances for routes.

Syntax

`distance bgp external-distance internal-distance local-distance`

To return to default values, enter no distance bgp.

Parameters

<i>external-distance</i>	Enter a number to assign to routes learned from a neighbor external to the AS. Range: 1 to 255 Default: 20
<i>internal-distance</i>	Enter a number to assign to routes learned from a router within the AS. Range: 1 to 255 Default: 200
<i>local-distance</i>	Enter a number to assign to routes learned from networks listed in the network command. Range: 1 to 255 Default: 200

Defaults

external-distance = 20; *internal-distance* = 200; *local-distance* = 200

Command Modes

ROUTER BGP



Caution: Dell Force10 recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.

**Usage
Information**

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table. Routes from confederations are treated as internal BGP routes.

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

max-paths

C E S Z

S4810

S4820T

Configure the maximum number of parallel routes (multipath support) BGP supports.

Syntax

max-paths { ebgp | ibgp } *number*

To return to the default values, enter no max-paths.

Parameters

ebgp	Enter the keyword ebgp to enable multipath support for External BGP routes.
ibgp	Enter the keyword ibgp to enable multipath support for Internal BGP routes.
<i>number</i>	Enter a number as the maximum number of parallel paths. S4810, S4820T, Z9000 Range: 1 to 64 ExaScale Range: 1 to 16 Default: 1

Defaults

none

Command Modes

ROUTER BGP

Usage Information

If you enable this command, use the [clear ip bgp](#) * command to recompute the best path.

For optimal configuration, set the *number* variable to the highest possible value. Dell Force10 recommends maintaining the default setting or the next highest value.

Command History

Version 8.3.19.0	Introduced on the S4820.
Version 8.3.8.0	Command syntax changed to max-paths (was maximum-paths).
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor activate

C E S

S4810

S4820T

This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI (Address Family Identifier/Subsequent Address Family Identifier).

Syntax

neighbor [*ip-address* | *peer-group-name*] activate

To disable, use the no neighbor [*ip-address* | *peer-group-name*] activate command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group
	activate	Enter the keyword activate to enable the neighbor/peer group in the new AFI/SAFI.
Defaults	Disabled	
Command Modes	CONFIGURATION-ROUTER-BGP-ADDRESS FAMILY	
Usage Information	By default, when a neighbor/peer group configuration is created in the Router BGP context, it is enabled for the IPv4/Unicast AFI/SAFI. By using activate in the new context, the neighbor/peer group is enabled for AFI/SAFI.	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

neighbor add-path

S4810

S4820T

This command allows the specified neighbor/peer group to send/receive multiple path advertisements.

Syntax

neighbor [*ip-address* | *peer-group-name*] add-path [send | receive | both] *count*

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.
	send	Enter this keyword to indicate that the system will send multiple paths to peers.
	receive	Enter this keyword to indicate that the system will accept multiple paths from peers.
	both	Enter this keyword to indicate that the system will send and accept multiple paths from peers.
	<i>count</i>	Enter the number paths supported. Range: 2 to 64
Defaults	none	
Command Modes	CONFIGURATION-ROUTER-BGP-ADDRESS FAMILY	
Related Commands	bgp add-path	Allow the advertisement of multiple paths for the same address prefix without the new paths implicitly replacing any previous ones.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Introduced on the S4810.

neighbor advertisement-interval

C **E** **S**

S4810

S4820T

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax

neighbor { *ip-address* | *peer-group-name* } advertisement-interval *seconds*

To return to the default value, use the no neighbor { *ip-address* | *peer-group-name* } advertisement-interval command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. Range: 0 to 600 seconds. Default: 5 seconds for internal BGP peers; 30 seconds for external BGP peers.

Defaults

seconds = 5 seconds (internal peers); *seconds* = 30 seconds (external peers)

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor advertisement-start

C **E** **S**

S4810

S4820T

Set the minimum interval before starting to send BGP routing updates.

Syntax

neighbor { *ip-address* } advertisement-start *seconds*

To return to the default value, use the no neighbor { *ip-address* } advertisement-start command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>seconds</i>	Enter a number as the time interval, in seconds, before BGP route updates are sent. Range: 0 to 3600 seconds.
Defaults	<i>none</i>	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

neighbor allowas-in

C **E** **S**

S4810

S4820T

Set the number of times an AS number can occur in the AS path

Syntax

neighbor { *ip-address* | *peer-group-name* } allowas-in *number*

To return to the default value, use the no neighbor { *ip-address* | *peer-group-name* } allowas-in command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
	<i>number</i>	Enter a number of times to allow this neighbor ID to use the AS path. Range: 1 to 10.
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Related Commands	bgp four-octet-as-support	Enable 4-Byte support for the BGP process.
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced on C-Series and E-Series

neighbor default-originate

C E S

Inject the default route to a BGP peer or neighbor.

S4810

S4820T

Syntax

neighbor { *ip-address* | *peer-group-name* } default-originate [route-map *map-name*]

To remove a default route, use the no neighbor { *ip-address* | *peer-group-name* } default-originate command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the default route of all routers in that peer group.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

If you apply a route map to a BGP peer or neighbor with the [neighbor default-originate](#) command configured, the software does not apply the set filters in the route map to that BGP peer or neighbor.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor description

C E S

Assign a character string describing the neighbor or group of neighbors (peer group).

S4810

S4820T

Syntax

neighbor { *ip-address* | *peer-group-name* } description *text*

To delete a description, use the no neighbor { *ip-address* | *peer-group-name* } description command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>text</i>	Enter a continuous text string up to 80 characters.

Defaults	Not configured.								
Command Modes	ROUTER BGP								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

neighbor distribute-list

C **E** **S**

Distribute BGP information via an established prefix list.

S4810

S4820T

Syntax

neighbor { *ip-address* | *peer-group-name* } distribute-list *prefix-list-name* { in | out }

To delete a neighbor distribution list, use the no neighbor { *ip-address* | *peer-group-name* } distribute-list *prefix-list-name* { in | out } command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to apply the distribute list filter to all routers in the peer group.
<i>prefix-list-name</i>	Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
in	Enter the keyword in to distribute only inbound traffic.
out	Enter the keyword out to distribute only outbound traffic.

Defaults	Not configured.								
Command Modes	ROUTER BGP								
Usage Information	Other BGP filtering commands include neighbor filter-list , ip as-path access-list and neighbor route-map .								
Related Commands	<table border="1"> <tr> <td>ip as-path access-list</td> <td>Configure IP AS-Path ACL.</td> </tr> <tr> <td>neighbor filter-list</td> <td>Assign a AS-PATH list to a neighbor or peer group.</td> </tr> <tr> <td>neighbor route-map</td> <td>Assign a route map to a neighbor or peer group.</td> </tr> </table>	ip as-path access-list	Configure IP AS-Path ACL.	neighbor filter-list	Assign a AS-PATH list to a neighbor or peer group.	neighbor route-map	Assign a route map to a neighbor or peer group.		
ip as-path access-list	Configure IP AS-Path ACL.								
neighbor filter-list	Assign a AS-PATH list to a neighbor or peer group.								
neighbor route-map	Assign a route map to a neighbor or peer group.								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

neighbor ebgp-multihop

C E S

S4810

S4820T

Attempt and accept BGP connections to external peers on networks that are not directly connected.

Syntax

neighbor { *ip-address* | *peer-group-name* } ebgp-multihop [*ttl*]

To disallow and disconnect connections, use the no neighbor { *ip-address* | *peer-group-name* } ebgp-multihop command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
ttl	(OPTIONAL) Enter the number of hops as the Time to Live (ttl) value. Range: 1 to 255. Default: 255

Defaults

Disabled.

Command Modes

ROUTER BGP

Usage Information

To prevent loops, the [neighbor ebgp-multihop](#) command will not install default routes of the multihop peer. Networks not directly connected are not considered valid for best path selection.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor fall-over

C E S

S4810

S4820T

Enable or disable fast fall-over for BGP neighbors.

Syntax

neighbor { *ipv4-address* | *peer-group-name* } fall-over

To disable, use the no neighbor { *ipv4-address* | *peer-group-name* } fall-over command.

Parameters

<i>ipv4-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.

Defaults

Disabled

Command Modes	ROUTER BGP										
Usage Information	When fall-over is enabled, BGP keeps track of IP or IPv6 reachability to the peer remote address and the peer local address. Whenever either address becomes unreachable (i.e, no active route exists in the routing table for peer IP or IPv6 destination/local address), BGP brings down the session with the peer.										
Related Commands	show ip bgp neighbors Display information on the BGP neighbors										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> <tr> <td>Version 7.4.1.0</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series	Version 7.4.1.0	Introduced
Version 8.3.19.0	Introduced on the S4820T.										
Version 8.3.7.0	Introduced on the S4810.										
Version 7.8.1.0	Introduced support on S-Series										
Version 7.7.1.0	Introduced support on C-Series										
Version 7.4.1.0	Introduced										

neighbor filter-list

C E S

S4810

S4820T

Configure a BGP filter based on the AS-PATH attribute.

Syntax

neighbor { *ip-address* | *peer-group-name* } filter-list *as-path-name* { in | out }

To delete a BGP filter, use the no neighbor { *ip-address* | *peer-group-name* } filter-list *as-path-name* { in | out } command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
<i>as-path-name</i>	Enter the name of an established AS-PATH access list (up to 140 characters). If the AS-PATH access list is not configured, the default is permit (allow routes).
in	Enter the keyword in to filter inbound BGP routes.
out	Enter the keyword out to filter outbound BGP routes.

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

Use the [ip as-path access-list](#) command syntax in the CONFIGURATION mode to enter the AS-PATH ACL mode and configure AS-PATH filters to deny or permit BGP routes based on information in their AS-PATH attribute.

**Related
Commands**

ip as-path access-list	Enter AS-PATH ACL mode and configure AS-PATH filters.
--	---

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, ACL names are up to 16 characters long.
Version 7.7.1.0	Introduced support on C-Series

neighbor graceful-restart

C **E** **S**

Enable graceful restart on a BGP neighbor.

S4810**S4820T****Syntax**

```
neighbor { ip-address | peer-group-name } graceful-restart [restart-time seconds]
[stale-path-time seconds] [role receiver-only]
```

To return to the default, enter the `no bgp graceful-restart` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
<i>restart-time seconds</i>	Enter the keyword <code>restart-time</code> followed by the maximum number of seconds needed to restart and bring-up all the peers. Range: 1 to 3600 seconds Default: 120 seconds
<i>stale-path-time seconds</i>	Enter the keyword <code>stale-path-time</code> followed by the maximum number of seconds to wait before restarting a peer's stale paths. Default: 360 seconds.
<i>role receiver-only</i>	Enter the keyword <code>role receiver-only</code> to designate the local router to support graceful restart as a receiver only.

Defaults

as above

Command Modes

ROUTER BGP

**Usage
Information**

This feature is advertised to BGP neighbors through a capability advertisement. In receiver only mode, BGP saves the advertised routes of peers that support this capability when they restart.

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor local-as

C E S

S4810

S4820T

Configure Internal BGP (IBGP) routers to accept *external* routes from neighbors with a local AS number in the AS number path

Syntax

neighbor { *ip-address* | *peer-group-name* } local-as *as-number* [no-prepend]

To return to the default value, use the no neighbor { *ip-address* | *peer-group-name* } local-as command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>as-number</i>	Enter the AS number to reset all neighbors belonging to that AS. Range: 0-65535 (2-Byte) <i>or</i> 1-4294967295 (4-Byte) <i>or</i> 0.1-65535.65535 (Dotted format)
no prepend	Specifies that local AS values are not prepended to announcements from the neighbor.

Defaults

Not configured.

Command Modes

ROUTER BGP

Related Commands

[bgp](#) Enable 4-Byte support for the BGP process.
[four-octet-as-support](#)

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced command Introduced support on C-Series

neighbor maximum-prefix

C E S

S4810

S4820T

Control the number of network prefixes received.

Syntax

neighbor { *ip-address* | *peer-group-name* } maximum-prefix *maximum* [*threshold*]
[warning-only]

To return to the default values, use the no neighbor { *ip-address* | *peer-group-name* } maximum-prefix *maximum* command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. Range: 1 to 4294967295.
<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the <i>maximum</i> value. When the number of prefixes reaches this percentage of the <i>maximum</i> value, the E-Series software sends a message. Range: 1 to 100 percent. Default: 75
warning-only	(OPTIONAL) Enter the keyword <code>warning-only</code> to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults

threshold = 75

Command Modes

ROUTER BGP

Usage Information

If the `neighbor maximum-prefix` is configured and the neighbor receives more prefixes than allowed by the `neighbor maximum-prefix` command configuration, the neighbor goes down and the `show ip bgp summary` command displays (prfxcd) in the State/PfxRcd column for that neighbor. The neighbor remains down until you enter the `clear ip bgp` command for the neighbor or the peer group to which the neighbor belongs or you enter `neighbor shutdown` and `neighbor no shutdown` commands.

Related Commands

<code>show ip bgp summary</code>	Displays the current BGP configuration.
----------------------------------	---

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor next-hop-self

C **E** **S**

S4810

S4820T

Enables you to configure the router as the next hop for a BGP neighbor. (This command is used for IBGP).

Syntax

`neighbor { ip-address | peer-group-name } next-hop-self`

To return to the default setting, use the `no neighbor { ip-address | peer-group-name } next-hop-self` command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group.
Defaults	Disabled.	
Command Modes	ROUTER BGP	
Usage Information	If the set next-hop command in the ROUTE-MAP mode is configured, its configuration takes precedence over the neighbor next-hop-self command.	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

neighbor password

C **E** **S**

S4810

S4820T

Enable Message Digest 5 (MD5) authentication on the TCP connection between two neighbors.

Syntax

`neighbor { ip-address | peer-group-name } password [encryption-type] password`

To delete a password, use the `no neighbor { ip-address | peer-group-name } password` command.

Parameters	<i>ip-address</i>	Enter the IP address of the router to be included in the peer group.
	<i>peer-group-name</i>	Enter the name of a configured peer group.
	<i>encryption-type</i>	(OPTIONAL) Enter 7 as the encryption type for the <i>password</i> entered. 7 means that the password is encrypted and hidden.
	<i>password</i>	Enter a text string up to 80 characters long. The first character of the <i>password</i> must be a letter. You cannot use spaces in the password.

Defaults Not configured.

Command Modes ROUTER BGP

Usage Information

Configure the same password on both BGP peers or a connection does not occur. When you configure MD5 authentication between two BGP peers, each segment of the TCP connection between them is verified and the MD5 digest is checked on every segment sent on the TCP connection.

Configuring a password for a neighbor will cause an existing session to be torn down and a new one established.

If you specify a BGP peer group by using the *peer-group-name* parameter, all the members of the peer group will inherit the characteristic configured with this command.

If you configure a password on one neighbor, but you have not configured a password for the neighboring router, the following message appears on the console while the routers attempt to establish a BGP session between them:

```
%RPM0-P:RP1 %KERN-6-INT: No BGP MD5 from [peer's IP address]
:179 to [local router's IP address]:65524
```

Also, if you configure different passwords on the two routers, the following message appears on the console:

```
%RPM0-P:RP1 %KERN-6-INT: BGP MD5 password mismatch from
[peer's IP address] : 11502 to [local router's IP address] :179
```

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor peer-group (assigning peers)

C E S

S4810

S4820T

Enables you to assign one peer to a existing peer group.

Syntax

```
neighbor ip-address peer-group peer-group-name
```

To delete a peer from a peer group, use the `no neighbor ip-address peer-group peer-group-name` command.

Parameters

<i>ip-address</i>	Enter the IP address of the router to be included in the peer group.
<i>peer-group-name</i>	Enter the name of a configured peer group.

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

You can assign up to 256 peers to one peer group.

When you add a peer to a peer group, it inherits all the peer group's configured parameters. A peer cannot become part of a peer group if any of the following commands are configured on the peer:

- [neighbor advertisement-interval](#)
- [neighbor distribute-list out](#)
- [neighbor filter-list out](#)
- [neighbor next-hop-self](#)
- [neighbor route-map out](#)
- [neighbor route-reflector-client](#)
- [neighbor send-community](#)

A neighbor may keep its configuration after it was added to a peer group if the neighbor's configuration is more specific than the peer group's, and the neighbor's configuration does not affect outgoing updates.

A peer group must exist before you add a peer to it. If the peer group is disabled (shutdown) the peers within the group are also disabled (shutdown).

Related Commands

clear ip bgp	Resets BGP sessions.
neighbor peer-group (creating group)	Create a peer group.
show ip bgp peer-group	View BGP peers.
show ip bgp neighbors	View BGP neighbors configurations.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor peer-group (creating group)

C **E** **S**

S4810

S4820T

Enables you to create a peer group and assign it a name.

Syntax

neighbor *peer-group-name* peer-group

To delete a peer group, use the no neighbor *peer-group-name* peer-group command.

Parameters

<i>peer-group-name</i>	Enter a text string up to 16 characters long as the name of the peer group.
------------------------	---

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

When a peer group is created, it is disabled (shut mode).

Related Commands

neighbor peer-group (assigning peers)	Assign routers to a peer group.
neighbor remote-as	Assign an indirectly connected AS to a neighbor or peer group.
neighbor shutdown	Disable a peer or peer group.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor peer-group passive

C E S

S4810

S4820T

Enable passive peering on a BGP peer group, that is, the peer group does not send an OPEN message, but will respond to one.

Syntax

neighbor *peer-group-name* peer-group passive [*limit sessions*]

To delete a passive peer-group, use the no neighbor *peer-group-name* peer-group passive command.

Parameters

<i>peer-group-name</i>	Enter a text string up to 16 characters long as the name of the peer group.
limit	(Optional, S4810 and S4820T only) Enter the keyword limit to constrain the numbers of sessions for this peer-group. Range: 2-256 Default: 256

Defaults

Not Configured

Command Modes

ROUTER BGP

Usage Information

After you configure a peer group as passive, you must assign it a subnet using the [neighbor soft-reconfiguration inbound](#) command.

For passive eBGP limits, the Remote AS must be different from the AS for this neighbor.

Related Commands

neighbor soft-reconfiguration inbound	Assign a subnet to a dynamically-configured BGP neighbor.
neighbor remote-as	Create and specify the remote peer to the BGP neighbor

Command History

Version 8.3.19.0	Introduced the limit keyword on the S4820T.
Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Introduced the limit keyword on the S4810.

Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor remote-as

C E S

S4810

S4820T

Create and specify the remote peer to the BGP neighbor.

Syntax

neighbor { *ip-address* | *peer-group-name* } remote-as *number*

To delete a remote AS entry, use the no neighbor { *ip-address* | *peer-group-name* } remote-as *number* command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor to enter the remote AS in its routing table.
<i>peer-group-name</i>	Enter the name of the peer group to enter the remote AS into routing tables of all routers within the peer group.
<i>number</i>	Enter a number of the AS. Range: 0-65535 (2-Byte) or 1-4294967295 (4-Byte)

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

You must configure your system to accept 4-Byte formats before entering a 4-Byte AS Number. If the *number* parameter is the same as the AS number used in the [router bgp](#) command, the remote AS entry in the neighbor is considered an internal BGP peer entry.

This command creates a peer and the newly created peer is disabled (shutdown).

Related Commands

router bgp	Enter the ROUTER BGP mode and configure routes in an AS.
bgp four-octet-as-support	Enable 4-Byte support for the BGP process.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series Added 4-Byte support.

neighbor remove-private-as

C E S

S4810

S4820T

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax

neighbor { *ip-address* | *peer-group-name* } remove-private-as

To return to the default, use the no neighbor { *ip-address* | *peer-group-name* } remove-private-as command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor to remove the private AS numbers.
<i>peer-group-name</i>	Enter the name of the peer group to remove the private AS numbers

Defaults

Disabled (that is, private AS number are not removed).

Command Modes

ROUTER BGP

Usage Information

Applies to EBGp neighbors only.

You must configure your system to accept 4-byte formats before entering a 4-byte AS Number.

If the AS-PATH contains both public and private AS number or contains AS numbers of an EBGp neighbor, the private AS numbers are not removed.

If a confederation contains private AS numbers in its AS-PATH, the software removes the private AS numbers only if they follow the confederation numbers in the AS path.

Private AS numbers are 64512 to 65535 (2-Byte).

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series Added 4-Byte support.

neighbor route-map

C E S

S4810

S4820T

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax

neighbor { *ip-address* | *peer-group-name* } route-map *map-name* { in | out }

To remove the route map, use the no neighbor { *ip-address* | *peer-group-name* } route-map *map-name* { in | out } command.

Parameters	
<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>map-name</i>	Enter the name of an established route map. If the Route map is not configured, the default is deny (to drop all routes).
in	Enter the keyword in to filter inbound routes.
out	Enter the keyword out to filter outbound routes.

Defaults Not configured.

Command Modes ROUTER BGP

Usage Information When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

Command History	
Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor route-reflector-client

C E S

S4810

S4820T

Configure the router as a route reflector and the specified neighbors as members of the cluster.

Syntax neighbor { *ip-address* | *peer-group-name* } route-reflector-client

To remove one or more neighbors from a cluster, use the no neighbor { *ip-address* | *peer-group-name* } route-reflector-client command. If you delete all members of a cluster, you also delete the route-reflector configuration on the router.

Parameters	
<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults Not configured.

Command Modes

ROUTER BGP

Usage Information

A route reflector reflects routes to the neighbors assigned to the cluster. Neighbors in the cluster do not need not be fully meshed. By default, when no route reflector is used, internal BGP (IBGP) speakers in the network must be fully meshed.

The first time you enter this command the router is configured as a route reflector and the specified BGP neighbors are configured as clients in the route-reflector cluster.

When you remove all clients of a route reflector using the `no neighbor route-reflector-client` command, the router no longer functions as a route reflector.

If the clients of a route reflector are fully meshed, you can configure the route reflector to not reflect routes to specified clients by using the `no bgp client-to-client reflection` command.

Related Commands

bgp client-to-client reflection	Enable route reflection between route reflector and clients.
---	--

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor send-community

C E S

S4810

S4820T

Send a COMMUNITY attribute to a BGP neighbor or peer group. A COMMUNITY attribute indicates that all routes with that attribute belong to the same community grouping.

Syntax

```
neighbor { ip-address | peer-group-name } send-community
```

To disable sending a COMMUNITY attribute, use the `no neighbor { ip-address | peer-group-name } send-community` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to send a COMMUNITY attribute to all routers within the peer group.

Defaults

Not configured and COMMUNITY attributes are not sent to neighbors.

Command Modes

ROUTER BGP

Usage Information

To configure a COMMUNITY attribute, use the [set community](#) command in the ROUTE-MAP mode.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor shutdown

C E S

S4810

S4820T

Disable a BGP neighbor or peer group.

Syntaxneighbor { *ip-address* | *peer-group-name* } shutdown

To enable a disabled neighbor or peer group, use the neighbor { *ip-address* | *peer-group-name* } no shutdown command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults

Enabled (that is, BGP neighbors and peer groups are disabled.)

Command Modes

ROUTER BGP

Usage Information

Peers that are enabled within a peer group are disabled when their peer group is disabled.

The [neighbor shutdown](#) command terminates all BGP sessions on the BGP neighbor or BGP peer group. Use this command with caution as it terminates the specified BGP sessions. When a neighbor or peer group is shutdown, use the [show ip bgp summary](#) command to confirm its status.

Related Commands

show ip bgp summary	Displays the current BGP configuration.
show ip bgp neighbors	Displays the current BGP neighbors.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor soft-reconfiguration inbound

C E S

Enable soft-reconfiguration for BGP.

S4810

S4820T

Syntax

neighbor { *ip-address* | *peer-group-name* } soft-reconfiguration inbound

To disable, use the no neighbor { *ip-address* | *peer-group-name* } soft-reconfiguration inbound command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults

Disabled

Command Modes

ROUTER BGP

Usage Information

This command enables soft-reconfiguration for the BGP neighbor specified. BGP will store all the updates received by the neighbor but will not reset the peer-session.



Caution: Inbound update storage is a memory-intensive operation. The entire BGP update database from the neighbor is stored in memory *regardless* of the inbound policy results applied on the neighbor.



Note: This command is supported in BGP Router Configuration mode for IPv4 Unicast address only.

Related Commands

show ip bgp neighbors	Display routes received by a neighbor
---------------------------------------	---------------------------------------

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.4.1.0	Introduced

neighbor subnet

C E S

Enable passive peering so that the members of the peer group are dynamic

Syntax

neighbor *peer-group-name* subnet *subnet-number* *mask*

To remove passive peering, use the no neighbor *peer-group-name* subnet *subnet-number* *mask* command.

Parameters	<i>subnet-number</i>	Enter a subnet number in dotted decimal format (A.B.C.D.) as the allowable range of addresses included in the Peer group. To allow all addresses, enter 0.0.0.0/0.
	<i>mask</i>	Enter a prefix mask in / prefix-length format (/x).
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

neighbor timers

C **E** **S**

S4810

S4820T

Set keepalive and hold time timers for a BGP neighbor or a peer group.

Syntax

neighbor { *ip-address* | *peer-group-name* } timers *keepalive holdtime*

To return to the default values, use the no neighbor { *ip-address* | *peer-group-name* } timers command.

Parameters	<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to set the timers for all routers within the peer group.
	<i>keepalive</i>	Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. Range: 1 to 65535 Default: 60 seconds
	<i>holdtime</i>	Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. Range: 3 to 65535 Default: 180 seconds

Defaults *keepalive* = 60 seconds; *holdtime* = 180 seconds.

Command Modes ROUTER BGP

Usage Information

Timer values configured with the [neighbor timers](#) command override the timer values configured with the any other command.

When two neighbors that are configured with different *keepalive* and *holdtime* values negotiate for new values, the resulting values will be as follows:

- the lower of the *holdtime* values is the new *holdtime* value, and

- whichever is the lower value; one-third of the new *holdtime* value, or the configured *keepalive* value is the new *keepalive* value.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor update-source

C E S

S4810

S4820T

Enable the E-Series software to use Loopback interfaces for TCP connections for BGP sessions.

Syntax

`neighbor { ip-address | peer-group-name } update-source interface`

To use the closest interface, use the `no neighbor { ip-address | peer-group-name } update-source interface` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>interface</i>	Enter the keyword <code>loopback</code> followed by a number of the loopback interface. Range: 0 to 16383.

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

Loopback interfaces are up constantly and the BGP session may need one interface constantly up to stabilize the session. The [neighbor update-source](#) command is not necessary for directly connected internal BGP sessions.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

neighbor weight

C E S

S4810

S4820T

Assign a weight to the neighbor connection, which is used to determine the best path.

Syntax `neighbor { ip-address | peer-group-name } weight weight`

To remove a weight value, use the `no neighbor { ip-address | peer-group-name } weight` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>weight</i>	Enter a number as the weight. Range: 0 to 65535 Default: 0

Defaults

0

Command Modes

ROUTER BGP

Usage Information

In the FTOS best path selection process, the path with the highest weight value is preferred.



Note: Reset the neighbor connection (`clear ip bgp *` command) to apply the weight to the connection and recompute the best path.

If the `set weight` command is configured in a route map applied to this neighbor, the weight set in that command overrides the weight set in the `neighbor weight` command.

Related Commands

<code>set weight</code>	Assign a weight to all paths meeting the route map criteria.
-------------------------	--

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

network

C **E** **S**

S4810

S4820T

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

`network ip-address mask [route-map map-name]`

To remove a network, use the `no network ip-address mask [route-map map-name]` command.

Parameters	<i>ip-address</i>	Enter an IP address in dotted decimal format of the network.
	<i>mask</i>	Enter the mask of the IP address in the slash prefix length format (for example, /24). The mask appears in command outputs in dotted decimal format (A.B.C.D).
	<i>route-map map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ip address • set community • set local-preference • set metric • set next-hop • set origin • set weight If the route map is not configured, the default is deny (to drop all routes).
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Usage Information	FTOS software resolves the network address configured by the network command with the routes in the main routing table to ensure that the networks are reachable via non-BGP routes and non-default routes.	
Related Commands	redistribute	Redistribute routes into BGP.
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.7.0	Introduced on the S4810.
	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series

network backdoor

C **E** **S**

Specify this IGP route as the preferred route.

S4810

S4820T

Syntax

`network ip-address mask backdoor`

To remove a network, use the `no network ip-address mask backdoor` command.

Parameters	<i>ip-address</i>	Enter an IP address in dotted decimal format of the network.
	<i>mask</i>	Enter the mask of the IP address in the slash prefix length format (for example, /24). The mask appears in command outputs in dotted decimal format (A.B.C.D).

Defaults	Not configured.								
Command Modes	ROUTER BGP								
Usage Information	Though FTOS does not generate a route due to backdoor config, there is an option for injecting/sourcing a local route in presence of network backdoor config on a learned route.								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.7.0	Introduced on the S4810.	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series
Version 8.3.19.0	Introduced on the S4820T.								
Version 8.3.7.0	Introduced on the S4810.								
Version 7.8.1.0	Introduced support on S-Series								
Version 7.7.1.0	Introduced support on C-Series								

redistribute

C E S

S4810

S4820T

Redistribute routes into BGP.

Syntax

redistribute { connected | static } [route-map *map-name*]

To disable redistribution, use the no redistribute { connected | static } command.

Parameters

connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
static	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ip address • set community • set local-preference • set metric • set next-hop • set origin • set weight If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGP

Usage Information

With FTOS version 8.3.1.0 and later, the redistribute command can be used to advertise the IGP cost as the MED on redistributed routes. When the route-map is set with metric-type internal and applied outbound to an EBGp peer/peer-group, the advertised routes corresponding to those peer/peer-group will have IGP cost set as MED.

If you do not configure `default-metric` command, in addition to the `redistribute` command, or there is no route map to set the metric, the metric for redistributed static and connected is “0”.

To redistribute the default route (0.0.0.0/0) configure the `neighbor default-originate` command.

Related Commands

<code>neighbor default-originate</code>	Inject the default route.
---	---------------------------

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 8.3.1.0	Introduced ability to substitute IGP cost for MED when a peer/peer-group outbound route-map is set as internal.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

redistribute isis



Redistribute IS-IS routes into BGP.

Syntax

```
redistribute isis [WORD][level-1 | level-1-2 | level-2] [metric metric-value] [route-map map-name]
```

To return to the default values, enter the `no redistribute isis [WORD][level-1 | level-1-2 | level-2] [metric metric-value] [route-map map-name]` command.

Parameters

<i>WORD</i>	ISO routing area tag
level-1	(OPTIONAL) Enter the keyword level-1 to independently redistributed into Level 1 routes only.
level-1-2	(OPTIONAL) Enter the keyword level-1-2 to independently redistributed into Level 1 and Level 2 routes. This is the default.
level-2	(OPTIONAL) Enter the keyword level-2 to independently redistributed into Level 2 routes only

	<code>metric <i>metric-value</i></code>	(OPTIONAL) Enter the keyword <code>metric</code> followed by the metric value used for the redistributed route. Use a metric value that is consistent with the destination protocol. Range: 0 to 16777215 Default: 0
	<code>route-map <i>map-name</i></code>	Enter the keyword <code>route-map</code> followed by the map name that is an identifier for a configured route map. The route map should filter imported routes from the source routing protocol to the current routing protocol. If you do not specify a <i>map-name</i> , all routes are redistributed. If you specify a keyword, but fail to list route map tags, no routes will be imported.
Defaults	level-1-2	
Command Modes	ROUTER BGP	
Example	<pre>FTOS(conf)#router bgp 1 FTOS(conf-router_bgp)#redistribute isis level-1 metric 44 route-map rmap-is2bgp FTOS(conf-router_bgp)#show running-config bgp ! router bgp 1 redistribute isis level-1 metric 44 route-map rmap-is2bgp</pre>	
Usage Information	<p>With FTOS version 8.3.1.0 and later, the <code>redistribute</code> command can be used to advertise the IGP cost as the MED on redistributed routes. When the route-map is set with <code>metric-type internal</code> and applied outbound to an EBGp peer/peer-group, the advertised routes corresponding to those peer/peer-group will have IGP cost set as MED.</p> <p>IS-IS to BGP redistribution supports matching of level-1 or level-2 routes or all routes (default). More advanced match options can be performed using route maps. The metric value of redistributed routes can be set by the redistribution command.</p>	
Command History	Version 8.3.1.0	Introduced ability to substitute IGP cost for MED when a peer/peer-group outbound route-map is set as internal.
	Version 6.3.1.0	Introduced

redistribute ospf

C E S

S4810

S4820T

Redistribute OSPF routes into BGP.

Syntax

```
redistribute ospf process-id [[match external {1 | 2}] [match internal]] [route-map map-name]
```

To stop redistribution of OSPF routes, use the `no redistribute ospf process-id` command.

Parameters	<i>process-id</i>	Enter the number of the OSPF process. Range: 1 to 65535
	match external {1 2}	(OPTIONAL) Enter the keywords match external to redistribute OSPF external routes. You can specify 1 or 2 to redistribute those routes only.
	match internal	(OPTIONAL) Enter the keywords match internal to redistribute OSPF internal routes only.
	route-map <i>map-name</i>	(OPTIONAL) Enter the keywords route-map followed by the name of a configured Route map.

Defaults Not configured.

Command Modes ROUTER BGP

Usage Information

With FTOS version 8.3.1.0 and later, the redistribute command can be used to advertise the IGP cost as the MED on redistributed routes. When the route-map is set with metric-type internal and applied outbound to an EBGp peer/peer-group, the advertised routes corresponding to those peer/peer-group will have IGP cost set as MED.

When you enter `redistribute isis process-id` command without any other parameters, FTOS redistributes all OSPF internal routes, external type 1 routes, and external type 2 routes. This feature is not supported by an RFC.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 8.3.1.0	Introduced ability to substitute IGP cost for MED when a peer/peer-group outbound route-map is set as internal.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

router bgp

C E S

S4810

S4820T

Enter ROUTER BGP mode to configure and enable BGP.

Syntax

`router bgp as-number`

To disable BGP, use the `no router bgp as-number` command.

Parameters

<i>as-number</i>	Enter the AS number. Range: 1 to 65535 (2-Byte) or 1-4294967295 (4-Byte) or 0.1-65535.65535 (Dotted format)
------------------	--

Defaults Not enabled.

Command Modes

CONFIGURATION

Example

```
FTOS(conf)#router bgp 3
FTOS(conf-router_bgp)#
```

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

Usage Information

At least one interface must be in Layer 3 mode for the router bgp command to be accepted. If no interfaces are enabled for Layer 3, an error message appears: % Error: No router id configured.

show capture bgp-pdu neighbor

C **E** **S**

S4810

S4820T

Display BGP packet capture information for an IPv4 address on the system.

Syntax

show capture bgp-pdu neighbor *ipv4-address*

Parameters

<i>ipv4-address</i>	Enter the IPv4 address (in dotted decimal format) of the BGP address to display packet information for that address.
---------------------	--

Command Modes

EXEC Privilege

Example

```
FTOS(conf-router_bgp)#show capture bgp-pdu neighbor 20.20.20.2

Incoming packet capture enabled for BGP neighbor 20.20.20.2
Available buffer size 40958758, 26 packet(s) captured using 680 bytes
PDU[1] : len 101, captured 00:34:51 ago
  ffffffff ffffffff ffffffff ffffffff 00650100 00000013 00000000 00000000 419ef06c 00000000
  00000000 00000000 00000000 00000000 0181a1e4 0181a25c 41af92c0 00000000 00000000 00000000
  00000000 00000001 0181a1e4 0181a25c 41af9400 00000000
PDU[2] : len 19, captured 00:34:51 ago
  ffffffff ffffffff ffffffff ffffffff 00130400
PDU[3] : len 19, captured 00:34:51 ago
  ffffffff ffffffff ffffffff ffffffff 00130400
[. . .]

Outgoing packet capture enabled for BGP neighbor 20.20.20.2
Available buffer size 40958758, 27 packet(s) captured using 562 bytes
PDU[1] : len 41, captured 00:34:52 ago
  ffffffff ffffffff ffffffff ffffffff 00290104 000100b4 14141401 0c020a01 04000100 01020080
  00000000
PDU[2] : len 19, captured 00:34:51 ago
  ffffffff ffffffff ffffffff ffffffff 00130400
PDU[3] : len 19, captured 00:34:50 ago
  ffffffff ffffffff ffffffff ffffffff 00130400
[. . .]
FTOS#
```

**Related
Commands**

capture bgp-pdu max-buffer-size	Specify a size for the capture buffer.
---	--

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.5.1.0	Introduced

show config

C **E** **S**

S4810

S4820T

View the current ROUTER BGP configuration.

Syntax

show config

Command Modes

ROUTER BGP

Example

```
FTOS(conf-router_bgp)#show confi
!
router bgp 45
 neighbor suzanne peer-group
 neighbor suzanne no shutdown
 neighbor sara peer-group
 neighbor sara shutdown
 neighbor 13.14.15.20 peer-group suzanne
 neighbor 13.14.15.20 shutdown
 neighbor 123.34.55.123 peer-group suzanne
 neighbor 123.34.55.123 shutdown
FTOS(conf-router_bgp)#
```

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp

C **E** **S**

S4810

S4820T

View the current BGP IPv4 routing table for the system.

Syntax

show ip bgp [*ipv4 unicast*] [*network [network-mask] [longer-prefixes]*]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the <i>ipv4 unicast</i> keywords to view information only related to <i>ipv4 unicast</i> routes.
<i>network</i>	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
<i>network-mask</i>	(OPTIONAL) Enter the network mask (in slash prefix format) of the BGP network address.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <i>longer-prefixes</i> to view all routes with a common prefix.

Command Modes

EXEC

EXEC Privilege

Usage Information

When you enable *bgp non-deterministic-med* command, the *show ip bgp* command output for a BGP route does not list the *INACTIVE* reason.

Example

```
FTOS>show ip bgp
BGP table version is 847562, local router ID is 63.114.8.131
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

      Network          Next Hop          Metric      LocPrf   Weight  Path
*> 0.0.0.0/0          63.114.8.33
* 3.0.0.0/8           63.114.8.33
*>                    63.114.8.33
*> 3.3.0.0/16         0.0.0.0           22          32768   ?
                    63.114.8.35
                    0 18508 ?
*> 4.0.0.0/8          63.114.8.33
                    0 18508 701 1 i
*> 4.2.49.12/30       63.114.8.33
                    0 18508 209 i
* 4.17.250.0/24       63.114.8.33
                    0 18508 209 1239 13716 i
*>                    63.114.8.33
                    0 18508 701 1239 13716 i
* 4.21.132.0/23       63.114.8.33
                    0 18508 209 6461 16422 i
*>                    63.114.8.33
                    0 18508 701 6461 16422 i
*> 4.24.118.16/30     63.114.8.33
                    0 18508 209 i
*> 4.24.145.0/30      63.114.8.33
                    0 18508 209 i
*> 4.24.187.12/30     63.114.8.33
                    0 18508 209 i
*> 4.24.202.0/30      63.114.8.33
                    0 18508 209 i
*> 4.25.88.0/30       63.114.8.33
                    0 18508 209 3561 3908 i
*> 5.0.0.0/9          63.114.8.33           0
                    0 18508 ?
*> 5.0.0.0/10         63.114.8.33           0
                    0 18508 ?
*> 5.0.0.0/11         63.114.8.33           0
                    0 18508 ?
--More--
```

[Table 9-1](#) defines the information displayed in the previous example

Table 9-1. show ip bgp Command Example Fields

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.

Table 9-1. show ip bgp Command Example Fields

Field	Description
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Related Commands

show ip bgp community	View BGP communities.
neighbor maximum-prefix	Control number of network prefixes received.

Command History

Version 8.3.19.0	Added the add-path option to the S4820T. Output on the S4820T shows ADDPATH parameters.
Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Added the add-path option to the S4810. Output on the S4810 shows ADDPATH parameters.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp cluster-list

C E S

View BGP neighbors in a specific cluster.

S4810

S4820T

Syntax

show ip bgp [*ipv4 unicast*] cluster-list [*cluster-id*]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>cluster-id</i>	(OPTIONAL) Enter the cluster id in dotted decimal format.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp cluster-list
BGP table version is 64444683, local router ID is 120.1.1.1
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
* I	10.10.10.1/32	192.68.16.1	0	100	0	i
* I		192.68.16.1	0	100	0	i
*>I		192.68.16.1	0	100	0	i
* I		192.68.16.1	0	100	0	i

```

* I          192.68.16.1          0          100          0 i
* I          192.68.16.1          0          100          0 i
* I 10.19.75.5/32 192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
*>I         192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
* I 10.30.1.0/24 192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
*>I         192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?
* I          192.68.16.1          0          100          0 ?

```

Table 9-2 defines the information displayed in the previous example.

Table 9-2. **show ip bgp cluster-list Command Fields**

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp community

C **E** **S**

S4810

S4820T

View information on all routes with Community attributes or view specific BGP community groups.

Syntax

```
show ip bgp [ipv4 unicast] community [community-number] [local-as] [no-export]
[no-advertise]
```

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the <i>ipv4 unicast</i> keywords to view information only related to <i>ipv4 unicast</i> routes.
<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
local-AS	Enter the keywords <i>local-AS</i> to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
no-advertise	Enter the keywords <i>no-advertise</i> to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
no-export	Enter the keywords <i>no-export</i> to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.

Command Modes

EXEC

EXEC Privilege

Usage Information

To view the total number of COMMUNITY attributes found, use the [show ip bgp](#) summary command. The text line above the route table states the number of COMMUNITY attributes found.

Example

```

FTOS>show ip bgp community
BGP table version is 3762622, local router ID is 63.114.8.48
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

      Network          Next Hop           Metric      LocPrf   Weight  Path
* i 3.0.0.0/8          205.171.0.16
*>i 4.2.49.12/30       205.171.0.16
* i 4.21.132.0/23      205.171.0.16
*>i 4.24.118.16/30     205.171.0.16
*>i 4.24.145.0/30      205.171.0.16
*>i 4.24.187.12/30    205.171.0.16
*>i 4.24.202.0/30     205.171.0.16
*>i 4.25.88.0/30       205.171.0.16
*>i 6.1.0.0/16         205.171.0.16
*>i 6.2.0.0/22         205.171.0.16
*>i 6.3.0.0/18         205.171.0.16
*>i 6.4.0.0/16         205.171.0.16
*>i 6.5.0.0/19         205.171.0.16
*>i 6.8.0.0/20         205.171.0.16
*>i 6.9.0.0/20         205.171.0.16
*>i 6.10.0.0/15        205.171.0.16
*>i 6.14.0.0/15        205.171.0.16
*>i 6.133.0.0/21       205.171.0.16
*>i 6.151.0.0/16       205.171.0.16
--More--

```

The `show ip bgp community` command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the `show ip bgp` command output.

Table 9-3. Command Example Fields: show ip bgp community

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp community-list

C E S

View routes that are affected by a specific community list.

S4810

S4820T

Syntax

`show ip bgp [ipv4 unicast] community-list community-list-name [exact-match]`

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>community-list-name</i>	Enter the name of a configured IP community list. (max 16 chars)
<i>exact-match</i>	Enter the keyword for an exact match of the communities.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp community-list pass
BGP table version is 0, local router ID is 10.101.15.13
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
```

```
Network          Next Hop          Metric          LocPrf          Weight          Path
```

FTOS#

The `show ip bgp community-list` command without any parameters lists BGP routes matching the Community List and the output is the same as for the `show ip bgp` command output.

Table 9-4. `show ip bgp community-list` Command Example Fields

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp dampened-paths

C E S

View BGP routes that are dampened (non-active).

S4810

S4820T

Syntax

`show ip bgp [ipv4 unicast] dampened-paths`

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS>show ip bgp damp
BGP table version is 210708, local router ID is 63.114.8.2
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
      Network          From             Reuse          Path
FTOS>
```

Table 9-5 defines the information displayed in the previous example [Figure](#).

Table 9-5. **show ip bgp dampened-paths Command Example**

Field	Description
Network	Displays the network ID to which the route is dampened.
From	Displays the IP address of the neighbor advertising the dampened route.
Reuse	Displays the hour:minutes:seconds until the dampened route is available.
Path	Lists all the ASs the dampened route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp detail

C **E** **S**

Display BGP internal information for IPv4 Unicast address family.

S4810

S4820T

Syntax

show ip bgp [*ipv4 unicast*] detail

Defaults

none

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp detail
```

```
Detail information for BGP Node
bgpNdP 0x41a17000 : NdTmrP 0x41a17000 : NdKATmrP 0x41a17014 : NdTics 74857 :
NhLocAS 1 : NdState 2 : NdRPMPrim 1 : NdListSoc 13
NdAuto 1 : NdEqCost 1 : NdSync 0 : NdDefOrg 0
NdV6ListSoc 14 NdDefDid 0 : NdConfedId 0 : NdMedMissVal -1 :
NdIgnrIlliId 0 : NdRRC2C 1 : NdClstId 33686273 : NdPaTblP 0x41a19088
NdASPTblP 0x41a19090 : NdCommTblP 0x41a19098 : NhOptTransTblP 0x41a190a0 : NdRRClstTblP 0x41a190a8
NdPktPA 0 : NdLocCBP 0x41a6f000 : NdTmpPAP 0x419efc80 : NdTmpASPAP 0x41a25000 : NdTmpCommP 0x41a25800
NdTmpRRC1P 0x41a4b000 : NdTmpOptP 0x41a4b800 : NdTmpNHP : NdOrigPAP 0
NdOrgNHP 0 : NdModPathP 0x419efcc0 : NdModASPAP 0x41a4c000 : NdModCommP 0x41a4c800
NdModOptP 0x41a4d000 : NdModNHP : NdComSortBufP 0x41a19110 : NdComSortHP 0x41a19d04 : NdIpPvMsk 0 : AFRstSet 0x41a1a298 : NhqDfrdHP 0x41a1a3e0 :
NumNhDfrd 0 : CfgHdrAFMsk 1
AFChkNetTmrP 0x41ee705c : AFRtDamp 0 : AlwaysCmpMed 0 : LoccHld 10 : LoccRem 10 : softReconfig 0x41a1a58c
DefMet 0 : AutoSumm 1 : NhopsP 0x41a0d100 : Starts 0 : Stops 0 : Opens 0
Closes 0 : Fails 0 : FataIs 0 : ConnExps 0 : HldExps 0 : KeepExps 0
```

```

RxOpens 0 : RxKeeps 0 : RxUpds 0 : RxNotifs 0 : TxUpds 0 : TxNotifs 0
BadEvs 0 : SynFails 0 : RxeCodeP 0x41a1b6b8 : RxHdrCodeP 0x41a1b6d4 : RxOpCodeP 0x41a1b6e4
RxUpdCodeP 0x41a1b704 : TxEcodeP 0x41a1b734 : TxHdrCodeP 0x41a1b750 : TxOpCodeP 0x41a1b760
TxUpdCodeP 0x41a1b780 : TrEvt 0 : LocPref 100 : tmpPathP 0x41a1b7b8 : LogNbrChgs 1
RecursiveNH 1 : PgCfgId 0 : KeepAlive 0 : HldTime 0 : DioHdl 0 : AggrValTmrP 0x41ee7024
UpdNetTmrP 0 : RedistTmrP 0x41ee7094 : PeerChgTmrP 0 : CleanRibTmrP 0x41ee7104
PeerUpdTmrP 0x41ee70cc : DfrdNHlTmrP 0x41ee7174 : DfrdRtselTmrP 0x41ee713c : PastExtFallOver 1 : PastIntFallOver 0 : Enforce1stAS 1
PeerIdBitsP 0x41967120 : softOutSz 16 : RibUpdCtxCBP 0
UpdPeerCtxCBP 0 : UpdPeerCtxAFI 0 : TcpcioCtxCB 0 : RedistBlk 1
NextCBPurg 1101119536 : NumPeerToPurge 0 : PeerIBGPcnt 0 : NonDet 0 : DfrdPathSel 0
BGPRst 0 : NumGrCfg 1 : DfrdTmestmp 0 : SnmpTrps 0 : IgnrBestPthASP 0
RstOn 1 : RstMod 1 : RstRole 2 : AFFalgs 7 : RstInt 120 : MaxeorExtInt 361
FixedPartCrt 1 : VarParCrt 1
Packet Capture max allowed length 40960000 : current length 0

```

```

Peer Grp List
Nbr List
Confed Peer List
Address Family specific Information
AFIndex 0
NdSpFlag 0x41a190b0 : AFRttP 0x41a0d200 : NdRIMMrP 0x41a19d28 : NdRIMAFtblVer 0 : NdRibCtxAddr 1101110688
NdRibCtxAddrLen 255 : NdAFPPrefix 0 : NdAFNLRIP 0 : NdAFNLRILen 0 : NdAFWPttrP 0
NdAFWLen 0 : NdAfnH : NdAFRedRttP 0x41a0d400 : NdRecCtxAdd 1101110868
NdRedCtxAddrLen 255 : NdAfnRedMrP 0x41a19e88 : AFAggrRttP 0x41a0d600 : AFaggrCtxAddr 1101111028 : AFaggrCtxAddrLen 255
AfnNumAggrPfx 0 : AfnNumAggrASSet 0 : AfnNumSuppmap 0 : AfnNumAggrValidPfx 0 : AfnMPathRttP 0x41a0d700
MpathCtxAddr 1101111140 : MpathCtxAddrLen 255 : AfnBorSet 0x41a19f98 : NumDfrdPfx 0
AfnActPeerHd 0x41a1a3a4 : AfnExtDist 1101112312 : AfnIntDist 200 : AfnLocDist 200
AfnNumRRc 0 : AfnRR 0 : AfnNetRttP 0x41a0d300 : AfnNetCtxAddr 1101112392 : AfnNetCtxAddrLen 255
AfnNwCtxAddr 1101112443 : AfnNwCtxAddrLen 255 : AfnNetBKDrRttP 0x41a0d500 : AfnNetBKDRcnt 0 : AfnDampHLife 0
AfnDampReuse 0 : AfnDampSupp 0 : AfnDampMaxHld 0 : AfnDampCeiling 0 : AfnDampRmap 0x41a1a508
AfnNumDampd 0 : AfnNumHist 0 : AfnNumTotalHist 0 : AfnDfrdRtListP 0x41a1b5fc : AfnDfrdNodeCnt 0 : softRecfgAf 0x41a1b5b4 : softRecfgCgaf 0x41a1b5f0
AfnCfCnt 0 : AfnRedistCfg 0 : IBGP_Mpath 0 : EBGP_Mpath 0 : DebugInPflist : DebugOutPflist

```

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.5.1.0	Introduced

show ip bgp extcommunity-list

C **E** **S**

View information on all routes with Extended Community attributes.

S4810

S4820T

Syntax

show ip bgp [*ipv4 unicast*] extcommunity-list [*list name*]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>list name</i>	Enter the extended community list name you wish to view.

Command Modes

EXEC

EXEC Privilege

Usage Information

To view the total number of COMMUNITY attributes found, use the [show ip bgp](#) summary command. The text line above the route table states the number of COMMUNITY attributes found.

The [show ip bgp community](#) command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the [show ip bgp](#) command output.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp filter-list

C E S

S4810

S4820T

View the routes that match the filter lists.

Syntax

`show ip bgp [ipv4 unicast] filter-list as-path-name`

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>as-path-name</i>	Enter the name of an AS-PATH.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp filter-list hello
BGP table version is 80227, local router ID is 120.1.1.1
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
* I 6.1.5.0/24	192.100.11.2	20000	9999	0	?
* I	192.100.8.2	20000	9999	0	?
* I	192.100.9.2	20000	9999	0	?
* I	192.100.10.2	20000	9999	0	?
*>I	6.1.5.1	20000	9999	0	?
* I	6.1.6.1	20000	9999	0	?
* I	6.1.20.1	20000	9999	0	?
* I 6.1.6.0/24	192.100.11.2	20000	9999	0	?
* I	192.100.8.2	20000	9999	0	?
* I	192.100.9.2	20000	9999	0	?
* I	192.100.10.2	20000	9999	0	?
*>I	6.1.5.1	20000	9999	0	?
* I	6.1.6.1	20000	9999	0	?
* I	6.1.20.1	20000	9999	0	?
* I 6.1.20.0/24	192.100.11.2	20000	9999	0	?
* I	192.100.8.2	20000	9999	0	?


```

* I          192.100.9.2          20000      9999      0 ?
* I          192.100.10.2         20000      9999      0 ?
FTOS#

```

Table 9-6 defines the information displayed in the previous example.

Table 9-6. Command Example fields: show ip bgp filter-list

Field	Description
Path source codes	Lists the path sources shown to the right of the last AS number in the Path column: <ul style="list-style-type: none"> • i = internal route entry • a = aggregate route entry • c = external confederation route entry • n = network route entry • r = redistributed route entry
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp flap-statistics

C **E** **S**

View flap statistics on BGP routes.

S4810

S4820T

Syntax

show ip bgp [*ipv4 unicast*] flap-statistics [*ip-address* [*mask*]] [*filter-list as-path-name*] [*regexp regular-expression*]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>ip-address</i>	(OPTIONAL) Enter the IP address (in dotted decimal format) of the BGP network to view information only on that network.
<i>mask</i>	(OPTIONAL) Enter the network mask (in slash prefix (/x) format) of the BGP network address.

<code>filter-list <i>as-path-name</i></code>	(OPTIONAL) Enter the keyword <code>filter-list</code> followed by the name of a configured AS-PATH ACL.
<code>regex <i>regular-expression</i></code>	Enter a regular expression then use one or a combination of the following characters to match: <ul style="list-style-type: none"> • <code>.</code> = (period) any single character (including a white space) • <code>*</code> = (asterisk) the sequences in a pattern (0 or more sequences) • <code>+</code> = (plus) the sequences in a pattern (1 or more sequences) • <code>?</code> = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. • <code>[]</code> = (brackets) a range of single-character patterns. • <code>()</code> = (parenthesis) groups a series of pattern elements to a single element • <code>{ }</code> = (braces) minimum and the maximum match count • <code>^</code> = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. • <code>\$</code> = (dollar sign) the end of the output string.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS>show ip bgp flap
BGP table version is 210851, local router ID is 63.114.8.2
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

      Network                From                Flaps Duration Reuse      Path
FTOS>
```

[Table 9-7](#) defines the information displayed in the previous example.

Table 9-7. show ip bgp flap-statistics Command Example Fields

Field	Description
Network	Displays the network ID to which the route is flapping.
From	Displays the IP address of the neighbor advertising the flapping route.
Flaps	Displays the number of times the route flapped.
Duration	Displays the hours:minutes:seconds since the route first flapped.
Reuse	Displays the hours:minutes:seconds until the flapped route is available.
Path	Lists all the ASs the flapping route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.

Version 7.8.1.0 Introduced support on S-Series.

Version 7.7.1.0 Introduced support on C-Series.

show ip bgp inconsistent-as

C E S

54810

54820T

View routes with inconsistent originating Autonomous System (AS) numbers, that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax

show ip bgp [*ipv4 unicast*] inconsistent-as

Command Modes

EXEC

EXEC Privilege

Example (Partial)

```
FTOS>show ip bgp inconsistent-as
BGP table version is 280852, local router ID is 10.1.2.100
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
* 3.0.0.0/8	63.114.8.33			0 18508 209 7018 80	i
*	63.114.8.34			0 18508 209 7018 80	i
*	63.114.8.60			0 18508 209 7018 80	i
*>	63.114.8.33			0 18508 701 80	i
*> 3.18.135.0/24	63.114.8.60			0 18508 209 7018 ?	
*	63.114.8.34			0 18508 209 7018 ?	
*	63.114.8.33			0 18508 701 7018 ?	
*	63.114.8.33			0 18508 209 7018 ?	
*> 4.0.0.0/8	63.114.8.60			0 18508 209 1	i
*	63.114.8.34			0 18508 209 1	i
*	63.114.8.33			0 18508 701 1	i
*	63.114.8.33			0 18508 209 1	i
* 6.0.0.0/20	63.114.8.60			0 18508 209 3549	i
*	63.114.8.34			0 18508 209 3549	i
*>	63.114.8.33	0		0 18508 ?	
*	63.114.8.33			0 18508 209 3549	i
* 9.2.0.0/16	63.114.8.60			0 18508 209 701	i
*	63.114.8.34			0 18508 209 701	i

--More--

Table 9-8. show ip bgp inconsistent-as Command Example Fields

Fields	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.

Table 9-8. show ip bgp inconsistent-as Command Example Fields

Fields	Description
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp neighbors

C E S

S4810

S4820T

Enables you to view the information exchanged by BGP neighbors.

Syntax

show ip bgp [*ipv4 unicast*] neighbors [*ip-address* [advertised-routes | dampened-routes | detail | flap-statistics | routes | {received-routes [*network* [*network-mask*]]} | {denied-routes [*network* [*network-mask*]]}]]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor to view only BGP information exchanged with that neighbor.
advertised-routes	(OPTIONAL) Enter the keywords advertised-routes to view only the routes the neighbor sent.
dampened-routes	(OPTIONAL) Enter the keyword dampened-routes to view information on dampened routes from the BGP neighbor.
detail	(OPTIONAL) Enter the keyword detail to view neighbor-specific internal information for the IPv4 Unicast address family.
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to view flap statistics on the neighbor's routes.
routes	(OPTIONAL) Enter the keywords routes to view only the neighbor's feasible routes.
received-routes [<i>network</i> [<i>network-mask</i>]]	(OPTIONAL) Enter the keywords received-routes followed by either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information received from neighbors. Note: neighbor soft-reconfiguration inbound must be configured prior to viewing all the information received from the neighbors.
denied-routes [<i>network</i> [<i>network-mask</i>]]	(OPTIONAL) Enter the keywords denied-routes followed by either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information on routes denied via neighbor inbound filters.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added the add-path option to the S4820T. Output on the S4820T shows ADDPATH parameters.
Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Added the add-path option to the S4810. Output on the S4810 shows ADDPATH parameters.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.5.1.0	Added detail option and output now displays default MED value
Version 7.2.1.0	Added received and denied route options
Version 6.3.10	The output is changed to display the total number of advertised prefixes

Example (S4810 & S4820T)

```
FTOS#show ip bgp neighbors
BGP neighbor is 10.10.10.1, remote AS 23456, external link
  BGP version 4, remote router ID 10.10.10.1
  BGP state ESTABLISHED, in this state for 00:00:35
  . . .
  Capabilities received from neighbor for IPv4 Unicast :
    MULTIPROTO_EXT(1)
    ROUTE_REFRESH(2)
    4_OCTECT_AS(65)
    ADD_PATH (69)
    CISCO_ROUTE_REFRESH(128)
```

Example (partial)

```
FTOS#show ip bgp neighbors
BGP neighbor is 100.10.10.2, remote AS 200, external link
  BGP version 4, remote router ID 192.168.2.101
  BGP state ESTABLISHED, in this state for 00:16:12
  Last read 00:00:12, last write 00:00:03
  Hold time is 180, keepalive interval is 60 seconds
  Received 1404 messages, 0 in queue
    3 opens, 1 notifications, 1394 updates
    6 keepalives, 0 route refresh requests
  Sent 48 messages, 0 in queue
    3 opens, 2 notifications, 0 updates
    43 keepalives, 0 route refresh requests
  Minimum time between advertisement runs is 30 seconds
  Minimum time before advertisements start is 0 seconds

  Capabilities received from neighbor for IPv4 Unicast :
    MULTIPROTO_EXT(1)
    ROUTE_REFRESH(2)
    CISCO_ROUTE_REFRESH(128)

  Capabilities advertised to neighbor for IPv4 Unicast :
    MULTIPROTO_EXT(1)
    ROUTE_REFRESH(2)
    ROUTE_REFRESH(2)
    GRACEFUL_RESTART(64)
    CISCO_ROUTE_REFRESH(128)
```

```
Route map for incoming advertisements is test
Maximum prefix set to 4 with threshold 75
```

```
For address family: IPv4 Unicast
BGP table version 34, neighbor version 34
5 accepted prefixes consume 20 bytes
Prefix advertised 0, denied 4, withdrawn 0
```

```
Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer
```

```
Connections established 2; dropped 1
Last reset 00:18:21, due to Maximum prefix limit reached
```

```
Notification History
'Connection Reset' Sent : 1 Recv: 0
```

```
Local host: 100.10.10.1, Local port: 179
Foreign host: 100.10.10.2, Foreign port: 47496
```

```
FTOS#
```

```
FTOS>show ip bgp neighbors 192.14.1.5 advertised-routes
```

```
BGP table version is 74103, local router ID is 33.33.33.33
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*>r 1.10.1.0/24	0.0.0.0	5000		32768	?
*>r 1.11.0.0/16	0.0.0.0	5000		32768	?
.....					
*>I 223.94.249.0/24	223.100.4.249	0	100	0	?
*>I 223.94.250.0/24	223.100.4.250	0	100	0	?
*>I 223.100.0.0/16	223.100.255.254	0	100	0	?

```
Total number of prefixes: 74102
```

Example
(show ip bgp
neighbors
advertised-routes)

```
FTOS#show ip bgp neighbors 100.10.10.2 received-routes
```

```
BGP table version is 13, local router ID is 120.10.10.1
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed
n - network, D - denied, S - stale
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Metric	LocPrf	Weight	Path
D 70.70.21.0/24	100.10.10.2		0	0	100 200 ?
D 70.70.22.0/24	100.10.10.2		0	0	100 200 ?
D 70.70.23.0/24	100.10.10.2		0	0	100 200 ?
D 70.70.24.0/24	100.10.10.2		0	0	100 200 ?
*> 70.70.25.0/24	100.10.10.2		0	0	100 200 ?
*> 70.70.26.0/24	100.10.10.2	0	0	0	100 200 ?
*> 70.70.27.0/24	100.10.10.2	0	0	0	100 200 ?
*> 70.70.28.0/24	100.10.10.2	0	0	0	100 200 ?
*> 70.70.29.0/24	100.10.10.2	0	0	0	100 200 ?

```
FTOS#
```

Example
(show ip bgp ip
neighbors
received-route)

Example
(show ip bgp
neighbors
denied-routes)

```
FTOS#show ip bgp neighbors 100.10.10.2 denied-routes
```

```
4 denied paths using 205 bytes of memory
BGP table version is 34, local router ID is 100.10.10.2
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed
n - network, D - denied, S - stale
```

Origin codes: i - IGP, e - EGP, ? - incomplete

	Network	Next Hop	Metric	LocPrf	Weight	Path
D	70.70.21.0/24	100.10.10.2		0	0	100 200 ?
D	70.70.22.0/24	100.10.10.2		0	0	100 200 ?
D	70.70.23.0/24	100.10.10.2		0	0	100 200 ?
D	70.70.24.0/24	100.10.10.2		0	0	100 200 ?

FTOS#

Table 9-9. Command Example fields: show ip bgp neighbors

Lines beginning with	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information: <ul style="list-style-type: none"> last read is the time (hours:minutes:seconds) the router read a message from its neighbor hold time is the number of seconds configured between messages from its neighbor keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive.
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Soft reconfiguration	This line indicates that soft reconfiguration inbound is configured.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(list of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL or Prefix list configured for the policy.
For address family:	Displays IPv4 Unicast as the address family.
BGP table version	Displays the which version of the primary BGP routing table the router and the neighbor are using.
accepted prefixes	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.

Table 9-9. Command Example fields: show ip bgp neighbors

Lines beginning with	Description
Prefix advertised	Displays the number of network prefixes advertised, the number rejected and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word never is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Related Commands

[show ip bgp](#)

View the current BGP routing table.

show ip bgp next-hop

C **E** **S**

S4810

S4820T

View all next hops (via learned routes only) with current reachability and flap status. This command only displays one path, even if the next hop is reachable by multiple paths.

Syntax

show ip bgp next-hop

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS>show ip bgp next-hop
Next-hop      Via                               RefCount  Cost  Flaps  Time Elapsed
63.114.8.33   63.114.8.33, Gi 12/22           240984    0    0 00:18:25
63.114.8.34   63.114.8.34, Gi 12/22           135152    0    0 00:18:13
63.114.8.35   63.114.8.35, Gi 12/22             1    0    0 00:18:07
63.114.8.60   63.114.8.60, Gi 12/22           135155    0    0 00:18:11
FTOS>
```

Table 9-10. Command Example fields: show ip bgp next-hop

Field	Description
Next-hop	Displays the next-hop IP address.
Via	Displays the IP address and interface used to reach the next hop.
RefCount	Displays the number of BGP routes using this next hop.
Cost	Displays the cost associated with using this next hop.

Table 9-10. Command Example fields: show ip bgp next-hop

Field	Description
Flaps	Displays the number of times the next hop has flapped.
Time Elapsed	Displays the time elapsed since the next hop was learned. If the route is down, then this field displays time elapsed since the route went down.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp paths

C E S

View all the BGP path attributes in the BGP database.

S4810

S4820T

Syntax

show ip bgp paths [*regexp regular-expression*]

Parameters

<i>regexp regular-expression</i>	<p>Enter a regular expression then use one or a combination of the following characters to match:</p> <ul style="list-style-type: none"> . = (period) any single character (including a white space) * = (asterisk) the sequences in a pattern (0 or more sequences) + = (plus) the sequences in a pattern (1 or more sequences) ? = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. [] = (brackets) a range of single-character patterns. () = (parenthesis) groups a series of pattern elements to a single element { } = (braces) minimum and the maximum match count ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. \$ = (dollar sign) the end of the output string.
----------------------------------	--

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp path
Total 16 Paths
Address      Hash Refcount Metric Path
0x1efe7e5c   15    10000      32 ?
0x1efe7e1c   71    10000      23 ?
0x1efe7ddc   127   10000      22 ?
0x1efe7d9c   183   10000      43 ?
0x1efe7d5c   239   10000      42 ?
```

```

0x1efe7c9c    283          6          {102 103} ?
0x1efe7b1c    287          336 20000  ?
0x1efe7d1c    295         10000      13 ?
0x1efe7c5c    339          6          {92 93} ?
0x1efe7cdc    351         10000      12 ?
0x1efe7c1c    395          6          {82 83} ?
0x1efe7bdc    451          6          {72 73} ?
0x1efe7b5c    491          78         0 ?
0x1efe7adc    883          2        120 i
0x1efe7e9c    983         10000      33 ?
0x1efe7b9c   1003         6         0 i
FTOS#

```

Table 9-11. Command Example fields: show ip bgp paths

Field	Description
Total	Displays the total number of BGP path attributes.
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
RefCount	Displays the number of BGP routes using this path attribute.
Metric	Displays the MED attribute for this path attribute.
Path	Displays the AS path for the route, with the origin code for the route listed last. Numbers listed between braces { } are AS_SET information.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp paths as-path

C **E** **S**

View all unique AS-PATHs in the BGP database

S4810

S4820T

Syntax

show ip bgp paths as-path

Command Modes

EXEC

EXEC Privilege

Example

```

FTOS#show ip bgp paths as-path
Total 13 AS-Paths
Address      Hash  Refcount AS-Path
0x1ea3c1ec   251    1 42
0x1ea3c25c   251    1 22
0x1ea3c1b4   507    1 13
0x1ea3c304   507    1 33
0x1ea3c10c   763    1 {92 93}

```

```

0x1ea3c144      763      1 {102 103}
0x1ea3c17c      763      1 12
0x1ea3c2cc      763      1 32
0x1ea3c09c      764      1 {72 73}
0x1ea3c0d4      764      1 {82 83}
0x1ea3c224     1019      1 43
0x1ea3c294     1019      1 23
0x1ea3c02c     1021      4
FTOS#

```

Table 9-12. Command Example fields: show ip bgp paths community

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcount	Displays the number of BGP routes using these AS-Paths.
AS-Path	Displays the AS paths for this route, with the origin code for the route listed last. Numbers listed between braces { } are AS_SET information.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp paths community

C E S

S4810

S4820T

View all unique COMMUNITY numbers in the BGP database.

Syntax

show ip bgp paths community

Command Modes

EXEC

EXEC Privilege

Example

```

E1200-BGP>show ip bgp paths community
Total 293 Communities
Address      Hash Refcount Community
0x1ec88a5c   3      4 209:209 209:6059 209:31272 3908:900 19092:300
0x1e0f10ec   15     4 209:209 209:3039 209:31272 3908:900 19092:300
0x1c902234   37     2 209:209 209:7193 209:21362 3908:900 19092:300
0x1f588cd4   41     24 209:209 209:6253 209:21362 3908:900 19092:300
0x1e805884   46     2 209:209 209:21226 286:777 286:3033 1899:3033 64675:21092
0x1e433f4c   46     8 209:209 209:5097 209:21362 3908:900 19092:300
0x1f173294   48     16 209:209 209:21226 286:40 286:777 286:3040 5606:40 12955:5606
0x1c9f8e24   50     6 209:209 209:4069 209:21362 3908:900 19092:300
0x1c9f88e4   53     4 209:209 209:3193 209:21362 3908:900 19092:300
0x1f58a944   57     6 209:209 209:2073 209:21362 3908:900 19092:300
0x1ce6be44   80     2 209:209 209:999 209:40832
0x1c6e2374   80     2 209:777 209:41528

```

```

0x1f58ad6c      82          46 209:209 209:41528
0x1c6e2064      83          2 209:777 209:40832
0x1f588ecc      85          570 209:209 209:40832
0x1f57cc0c      98          2 209:209 209:21226 286:3031 13646:1044 13646:1124 13646:1154 13646:1164
13646:1184 13646:1194 13646:1204 13646:1214 13646:1224 13646:1234 13646:1244 13646:1254 13646:1264 13646:3000
0x1d65b2ac     117         6 209:209 209:999 209:31272
0x1f5854ac     119        18 209:209 209:21226 286:108 286:111 286:777 286:3033 517:5104
0x1d77b49c     119         2 209:209 209:21226 286:81 286:777 286:3358 790:51 790:61 790:3358
0x1c6e210c     120         2 209:777 209:31272
0x1f588bf4     122        680 209:209 209:31272
0x1f004f64     123        12 209:209 209:21226 286:777 286:3031 5466:20
--More--

```

Table 9-13. Command Example fields: show ip bgp paths community

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcunt	Displays the number of BGP routes using these communities.
Community	Displays the community attributes in this BGP path.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp peer-group

C **E** **S**

Enables you to view information on the BGP peers in a peer group.

S4810

S4820T

Syntax

show ip bgp [*ipv4 unicast*] peer-group [*peer-group-name* [detail | summary]]

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the ipv4 unicast keywords to view information only related to ipv4 unicast routes.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
detail	(OPTIONAL) Enter the keyword detail to view detailed status information of the peers in that peer group.
summary	(OPTIONAL) Enter the keyword summary to view status information of the peers in that peer group. The output is the same as that found in show ip bgp summary command

Command Modes

EXEC

EXEC Privilege

**Example
(S4810 & S4820T)**

```
FTOS#show ip bgp peer-group

Peer-group pgl
  BGP version 4
  Minimum time between advertisement runs is 30 seconds

  For address family: IPv4 Unicast
  BGP neighbor is pgl
Number of peers in this group 4
Update packing has 4_OCTECT_AS support enabled
Add-path support enabled
Peer-group members (* - outbound optimized):
  1.1.1.5
  1.1.1.6
  10.10.10.2*
  20.20.20.100
```

Example

```
FTOS#show ip bgp peer-group

Peer-group RT-PEERS
Description: ***peering-with-RT***
BGP version 4
Minimum time between advertisement runs is 30 seconds

For address family: IPv4 Unicast
BGP neighbor is RT-PEERS
Number of peers in this group 20
Peer-group members (* - outbound optimized):
  12.1.1.2*
  12.1.1.3*
  12.1.1.4*
  12.1.1.5*
  12.1.1.6*
  12.2.1.2*
  12.2.1.3*
  12.2.1.4*
  12.2.1.5*
  12.2.1.6*
  12.3.1.2*
  12.3.1.3*
  12.3.1.4*
  12.3.1.5*
  12.3.1.6*
  12.4.1.2*
  12.4.1.3*
  12.4.1.4*
  12.4.1.5*
  12.4.1.6*
```

Table 9-14. Command Example fields: show ip bgp peer-group

Line beginning with	Description
Peer-group	Displays the peer group's name.
Administratively shut	Displays the peer group's status if the peer group is not enabled. If the peer group is enabled, this line is not displayed.
BGP version	Displays the BGP version supported.
Minimum time	Displays the time interval between BGP advertisements.
For address family	Displays IPv4 Unicast as the address family.

Table 9-14. Command Example fields: show ip bgp peer-group

Line beginning with	Description
BGP neighbor	Displays the name of the BGP neighbor.
Number of peers	Displays the number of peers currently configured for this peer group.
Peer-group members:	Lists the IP addresses of the peers in the peer group. If the address is outbound optimized, a * is displayed next to the IP address.

Related Commands

neighbor peer-group (assigning peers)	Assign peer to a peer-group.
neighbor peer-group (creating group)	Create a peer group.
show ip bgp peer-group (multicast)	View information on the BGP peers in a peer group.

Command History

Version 8.3.19.0	Added the add-path option to the S4820T. Output on the S4820T shows ADDPATH parameters.
Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.8.0	Added the add-path option to the S4810. Output on the S4810 shows ADDPATH parameters.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.8.1.0	Introduced support on S-Series

show ip bgp regexp

C E S

S4810

S4820T

Display the subset of BGP routing table matching the regular expressions specified.

Syntaxshow ip bgp regexp *regular-expression* [*character*]

Parameters

regular-expression [*character*]

Enter a regular expression then use one or a combination of the following characters to match:

- `.` = (period) any single character (including a white space)
- `*` = (asterisk) the sequences in a pattern (0 or more sequences)
- `+` = (plus) the sequences in a pattern (1 or more sequences)
- `?` = (question mark) sequences in a pattern (either 0 or 1 sequences). **You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.**
- `[]` = (brackets) a range of single-character patterns.
- `()` = (parenthesis) groups a series of pattern elements to a single element
- `{ }` = (braces) minimum and the maximum match count
- `^` = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- `$` = (dollar sign) the end of the output string.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp regexp ^2914+
BGP table version is 3700481, local router ID is 63.114.8.35
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network        Next Hop        Metric      LocPrf  Weight Path
*>I 3.0.0.0/8      1.1.1.2          0         100    0 2914 1239 80 i
*>I 4.0.0.0/8      1.1.1.2          0         100    0 2914 3356 i
*>I 4.17.225.0/24  1.1.1.2          0         100    0 2914 11853 11853 11853 11853 6496
*>I 4.17.226.0/23  1.1.1.2          0         100    0 2914 11853 11853 11853 11853 6496
*>I 4.17.251.0/24  1.1.1.2          0         100    0 2914 11853 11853 11853 11853 6496
*>I 4.17.252.0/23  1.1.1.2          0         100    0 2914 11853 11853 11853 11853 6496
*>I 4.19.2.0/23    1.1.1.2          0         100    0 2914 701 6167 6167 6167 i
*>I 4.19.16.0/23   1.1.1.2          0         100    0 2914 701 6167 6167 6167 i
*>I 4.21.80.0/22   1.1.1.2          0         100    0 2914 174 4200 16559 i
*>I 4.21.82.0/24   1.1.1.2          0         100    0 2914 174 4200 16559 i
*>I 4.21.252.0/23  1.1.1.2          0         100    0 2914 701 6389 8063 19198 i
*>I 4.23.180.0/24  1.1.1.2          0         100    0 2914 3561 6128 30576 i
*>I 4.36.200.0/21  1.1.1.2          0         100    0 2914 14742 11854 14135 i
*>I 4.67.64.0/22   1.1.1.2          0         100    0 2914 11608 19281 i
*>I 4.78.32.0/21   1.1.1.2          0         100    0 2914 3491 29748 i
*>I 6.1.0.0/16     1.1.1.2          0         100    0 2914 701 668 i
*>I 6.2.0.0/22     1.1.1.2          0         100    0 2914 701 668 i
*>I 6.3.0.0/18     1.1.1.2          0         100    0 2914 701 668 i
```

Table 9-15. Command Example fields: show ip bgp regexp

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then non-BGP routes exist in the router's routing table.

Table 9-15. Command Example fields: show ip bgp regexp

Field	Description
Metric	Displays the BGP router's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the AS paths the route passed through to reach the destination network.

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp summary

C E S

Enables you to view the status of all BGP connections.

S4810

S4820T

Syntaxshow ip bgp [*ipv4 unicast*] summary**Command Modes**

EXEC

EXEC Privilege

Example

```

FTOS#show ip bgp summary
BGP router identifier 120.10.10.1, local AS number 100
BGP table version is 34, main routing table version 34
9 network entrie(s) using 1372 bytes of memory
5 paths using 380 bytes of memory
4 denied paths using 164 bytes of memory
BGP-RIB over all using 385 bytes of memory
2 BGP path attribute entrie(s) using 168 bytes of memory
1 BGP AS-PATH entrie(s) using 39 bytes of memory
1 BGP community entrie(s) using 43 bytes of memory
2 neighbor(s) using 7232 bytes of memory

Neighbor          AS      MsgRcvd  MsgSent    TblVer  InQ   OutQ  Up/Down   State/Pfx
100.10.10.2       200         46       41         34     0     0 00:14:33    5
120.10.10.2       300         40       47         34     0     0 00:37:10    0
FTOS#

```

Table 9-16. Command Example fields: show ip bgp summary

Field	Description
BGP router identifier	Displays the local router ID and the AS number.
BGP table version	Displays the BGP table version and the main routing table version.

Table 9-16. Command Example fields: show ip bgp summary

Field	Description
network entries	Displays the number of network entries and route paths and the amount of memory used to process those entries.
paths	Displays the number of paths and the amount of memory used.
denied paths	Displays the number of denied paths and the amount of memory used.
BGP path attribute entries	Displays the number of BGP path attributes and the amount of memory used to process them.
BGP AS-PATH entries	Displays the number of BGP AS_PATH attributes processed and the amount of memory used to process them.
BGP community entries	Displays the number of BGP COMMUNITY attributes processed and the amount of memory used to process them. The show ip bgp community command provides more details on the COMMUNITY attributes.
Dampening enabled	Displayed only when dampening is enabled. Displays the number of paths designated as history, dampened, or penalized.
Neighbor	Displays the BGP neighbor address.
AS	Displays the AS number of the neighbor.
MsgRcvd	Displays the number of BGP messages that neighbor received.
MsgSent	Displays the number of BGP messages that neighbor sent.
TblVer	Displays the version of the BGP table that was sent to that neighbor.
InQ	Displays the number of messages from that neighbor waiting to be processed.
OutQ	Displays the number of messages waiting to be sent to that neighbor. If a number appears in parentheses, the number represents the number of messages waiting to be sent to the peer group.
Up/Down	<p>Displays the amount of time that the neighbor is in the Established stage. If the neighbor has never moved into the Established stage, the word never is displayed.</p> <p>The output format is:</p> <pre> Time Established-----Display Example < 1 day ----- 00:12:23 (hours:minutes:seconds) < 1 week ----- 1d21h (DaysHours) > 1 week ----- 11w2d (WeeksDays) </pre>
State/Pfxrcd	<p>If the neighbor is in Established stage, the number of network prefixes received.</p> <p>If a maximum limit was configured with the neighbor maximum-prefix command, (prfxd) appears in this column.</p> <p>If the neighbor is not in Established stage, the current stage is displayed (Idle, Connect, Active, OpenSent, OpenConfirm) When the peer is transitioning between states and clearing the routes received, the phrase (Purging) may appear in this column.</p> <p>If the neighbor is disabled, the phrase (Admin shut) appears in this column.</p>

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show running-config bgp

C E S

S4810

S4820T

Use this feature to display the current BGP configuration.

Syntax

show running-config bgp

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

timers bgp

C E S

S4810

S4820T

Adjust BGP Keep Alive and Hold Time timers.

Syntaxtimers bgp *keepalive holdtime*

To return to the default, enter no timers bgp.

Parameters

<i>keepalive</i>	Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. Range: 1 to 65535 Default: 60 seconds
<i>holdtime</i>	Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. Range: 3 to 65535 Default: 180 seconds

Defaults

No default values or behavior

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.
Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

MBGP Commands

Multiprotocol BGP (MBGP) is an enhanced BGP that enables multicast routing policy throughout the Internet and connecting multicast topologies between BGP and autonomous systems (AS). FTOS MBGP is implemented as per IETF RFC 1858.

FTOS version 7.8.1.0 and later support MBGP for IPv6 on **E_T** and **C** platforms.

FTOS version 7.8.1.0 and later support MBGP for IPv4 Multicast only on the **S** platform.

FTOS version 8.2.1.0 and later support MBGP on the E-Series ExaScale **E_X** platform.

The MBGP commands are:

- [address family ipv4 multicast \(MBGP\)](#)
- [aggregate-address](#)
- [bgp dampening](#)
- [clear ip bgp ipv4 multicast](#)
- [clear ip bgp dampening](#)
- [clear ip bgp flap-statistics](#)
- [debug ip bgp dampening](#)
- [debug ip bgp dampening](#)
- [debug ip bgp dampening](#)
- [debug ip bgp peer-group updates](#)
- [debug ip bgp updates](#)
- [distance bgp](#)
- [neighbor activate](#)
- [neighbor advertisement-interval](#)
- [neighbor default-originate](#)
- [neighbor distribute-list](#)
- [neighbor filter-list](#)
- [neighbor maximum-prefix](#)

- [neighbor next-hop-self](#)
- [neighbor remove-private-as](#)
- [neighbor route-map](#)
- [neighbor route-reflector-client](#)
- [network](#)
- [redistribute](#)
- [redistribute ospf](#)
- [show ip bgp ipv4 multicast](#)
- [show ip bgp cluster-list](#)
- [show ip bgp community](#)
- [show ip bgp community-list](#)
- [show ip bgp dampened-paths](#)
- [show ip bgp filter-list](#)
- [show ip bgp flap-statistics](#)
- [show ip bgp inconsistent-as](#)
- [show ip bgp ipv4 multicast neighbors](#)
- [show ip bgp peer-group](#)
- [show ip bgp summary](#)

address family ipv4 multicast (MBGP)

C **E** **T** **S**

This command changes the context to SAFI (Subsequent Address Family Identifier).

Syntax address family ipv4 multicast

To remove SAFI context, use the no address family ipv4 multicast command.

Parameters

ipv4	Enter the keyword ipv4 to specify the address family as IPV4.
multicast	Enter the keyword multicast to specify multicast as SAFI.

Defaults IPv4 Unicast

Command Modes ROUTER BGP (conf-router_bgp)

Usage Information All subsequent commands will apply to this address family once this command is executed. You can exit from this AFI/SAFI to the IPv4 Unicast (the default) family by entering exit and returning to the Router BGP context.

Command History

Version 7.8.1.0	Introduced support on S-Series for MBGP IPv4 Multicast
Version 7.7.1.0	Introduced support on C-Series

aggregate-address



Summarize a range of prefixes to minimize the number of entries in the routing table.

Syntax

```
aggregate-address ip-address mask [advertise-map map-name] [as-set] [attribute-map map-name] [summary-only] [suppress-map map-name]
```

Parameters

<i>ip-address mask</i>	Enter the IP address and mask of the route to be the aggregate address. Enter the IP address in dotted decimal format (A.B.C.D) and mask in /prefix format (/x).
advertise-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>advertise-map</code> followed by the name of a configured route map to set filters for advertising an aggregate route.
as-set	(OPTIONAL) Enter the keyword <code>as-set</code> to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.
attribute-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>attribute-map</code> followed by the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.
summary-only	(OPTIONAL) Enter the keyword <code>summary-only</code> to advertise only the aggregate address. Specific routes will not be advertised.
suppress-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>suppress-map</code> followed by the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults

Not configured.

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Usage Information

At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.

Do not add the `as-set` parameter to the aggregate. If routes within the aggregate are constantly changing, the aggregate will flap to keep track of the changes in the AS_PATH.

In route maps used in the `suppress-map` parameter, routes meeting the `deny` clause are not suppressed; in other words, they are allowed. The opposite is true: routes meeting the `permit` clause are suppressed.

If the route is injected via the [network](#) command, that route will still appear in the routing table if the `summary-only` parameter is configured in the [aggregate-address](#) command.

The `summary-only` parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the [neighbor distribute-list](#) command.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

bgp dampening

C E T S

Enable MBGP route dampening.

Syntaxbgp dampening [*half-life time*] [route-map *map-name*]

To disable route dampening, use the no bgp dampening [*half-life time*] [route-map *map-name*] command.

Parameters

<i>half-life time</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half, after the half-life period expires. Range: 1 to 45. Default: 15 minutes
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map. Only match commands in the configured route map are supported.

Defaults

Disabled.

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

clear ip bgp ipv4 multicast

C E T S

Reset MBGP sessions.

Syntaxclear ip bgp ipv4 multicast * *ip-address* [dampening | flap-statistics] peer-group]**Parameters**

*	Enter the character * to clear all peers.
<i>ip-address</i>	Enter an IP address in dotted decimal format to clear the prefixes from that neighbor.
dampening	(OPTIONAL) Enter the keyword dampening to clear route flap dampening information.
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to reset the flap statistics on all prefixes from that neighbor.
peer-group	(OPTIONAL) Enter the keyword peer-group to clear all members of a peer-group.

Command Modes EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

clear ip bgp dampening

C **E** **T** **S**

Clear information on route dampening.

Syntax

clear ip bgp dampening ipv4 multicast *network network-mask*

Parameters

dampening	Enter the keyword dampening to clear route flap dampening information.
<i>network</i>	(OPTIONAL) Enter the network address in dotted decimal format (A.B.C.D).
<i>network-mask</i>	(OPTIONAL) Enter the network mask in slash prefix format (/x).

Command Modes EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

clear ip bgp flap-statistics

C **E** **T** **S**

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

Syntax

clear ip bgp ipv4 multicast flap-statistics network | filter-list *list* | regexp *regexp*

Parameters

Network	(OPTIONAL) Enter the network address to clear flap statistics in dotted decimal format (A.B.C.D).
---------	---

filter-list <i>list</i>	(OPTIONAL) Enter the keyword <code>filter-list</code> followed by the name of a configured AS-PATH list (max 16 characters).
regex <i>regex</i>	(OPTIONAL) Enter the keyword <code>regex</code> followed by regular expressions. Use one or a combination of the following: <ul style="list-style-type: none"> • <code>.</code> = (period) any single character (including a white space) • <code>*</code> = (asterisk) the sequences in a pattern (0 or more sequences) • <code>+</code> = (plus) the sequences in a pattern (1 or more sequences) • <code>?</code> = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. • <code>[]</code> = (brackets) a range of single-character patterns. • <code>()</code> = (parenthesis) groups a series of pattern elements to a single element • <code>{ }</code> = (braces) minimum and the maximum match count • <code>^</code> = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. • <code>\$</code> = (dollar sign) the end of the output string.

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

debug ip bgp dampening

C E T S

View information on routes being dampened.

Syntax`debug ip bgp ipv4 multicast dampening`To disable debugging, enter `no debug ip bgp ipv4 multicast dampening`**Parameters**

dampening	Enter the keyword <code>dampening</code> to clear route flap dampening information.
-----------	---

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

debug ip bgp peer-group updates

C E T S

View information about BGP peer-group updates.

`debug ip bgp peer-group peer-group-name updates [in | out]`

To disable debugging, enter `no debug ip bgp peer-group peer-group-name updates [in | out]` command.

Parameters

<code>peer-group</code> <i>peer-group-name</i>	Enter the keyword <code>peer-group</code> followed by the name of the <code>peer-group</code> .
<code>updates</code>	Enter the keyword <code>updates</code> to view BGP update information.
<code>in</code>	(OPTIONAL) Enter the keyword <code>in</code> to view only BGP updates received from neighbors.
<code>out</code>	(OPTIONAL) Enter the keyword <code>out</code> to view only BGP updates sent to neighbors.

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

debug ip bgp updates



View information about BGP updates.

`debug ip bgp updates [in | out]`

To disable debugging, enter `no debug ip bgp updates [in | out]` command.

Parameters

<code>updates</code>	Enter the keyword <code>updates</code> to view BGP update information.
<code>in</code>	(OPTIONAL) Enter the keyword <code>in</code> to view only BGP updates received from neighbors.
<code>out</code>	(OPTIONAL) Enter the keyword <code>out</code> to view only BGP updates sent to neighbors.

Command Modes

EXEC Privilege

Defaults

Disabled.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

distance bgp



Define an administrative distance for routes.

Syntax

`distance bgp external-distance internal-distance local-distance`

To return to default values, enter no distance bgp.

Parameters

<i>external-distance</i>	Enter a number to assign to routes learned from a neighbor external to the AS. Range: 1 to 255 Default: 20
<i>internal-distance</i>	Enter a number to assign to routes learned from a router within the AS. Range: 1 to 255 Default: 200
<i>local-distance</i>	Enter a number to assign to routes learned from networks listed in the network command. Range: 1 to 255 Default: 200

Defaults

external-distance = 20; *internal-distance* = 200; *local-distance* = 200

Command Modes

ROUTER BGP (conf-router_bgp_af)



Caution: Dell Force10 recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.

Usage Information

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table. Routes from confederations are treated as internal BGP routes.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor activate



This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI.

Syntax

neighbor [*ip-address* | *peer-group-name*] activate

To disable, use the no neighbor [*ip-address* | *peer-group-name*] activate command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group
activate	Enter the keyword activate to enable the neighbor/peer group in the new AFI/SAFI.

Defaults	Disabled						
Command Modes	ROUTER BGP Address Family (conf-router_bgp_af)						
Usage Information	By default, when a neighbor/peer group configuration is created in the Router BGP context, it is enabled for the IPv4/Unicast AFI/SAFI. By using activate in the new context, the neighbor/peer group is enabled for AFI/SAFI.						
Related Commands	address family ipv4 multicast (MBGP) Changes the context to SAFI						
Command History	<table border="1"> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced IPv6 MGBP support for E-Series</td> </tr> </table>	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series
Version 7.8.1.0	Introduced support on S-Series						
Version 7.7.1.0	Introduced support on C-Series						
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series						

neighbor advertisement-interval

C **E** **T** **S**

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax

neighbor { *ip-address* | *peer-group-name* } advertisement-interval *seconds*

To return to the default value, use the no neighbor { *ip-address* | *peer-group-name* } advertisement-interval command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. Range: 0 to 600 seconds. Default: 5 seconds for internal BGP peers; 30 seconds for external BGP peers.

Defaults

seconds = 5 seconds (internal peers); *seconds* = 30 seconds (external peers)

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor default-originate

C **E** **T** **S**

Inject the default route to a BGP peer or neighbor.

Syntax neighbor { *ip-address* | *peer-group-name* } default-originate [route-map *map-name*]

To remove a default route, use the no neighbor { *ip-address* | *peer-group-name* } default-originate command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to set the default route of all routers in that peer group.
	route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER BGP Address Family (conf-router_bgp_af)

Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor distribute-list

C **E** **T** **S**

Distribute BGP information via an established prefix list.

Syntax neighbor [*ip-address* | *peer-group-name*] distribute-list *prefix-list-name* [in | out]

To delete a neighbor distribution list, use the no neighbor [*ip-address* | *peer-group-name*] distribute-list *prefix-list-name* [in | out] command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to apply the distribute list filter to all routers in the peer group.
	<i>prefix-list-name</i>	Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
	in	Enter the keyword in to distribute only inbound traffic.
	out	Enter the keyword out to distribute only outbound traffic.

Defaults Not configured.

Command Modes ROUTER BGP Address Family (conf-router_bgp_af)

Usage Information Other BGP filtering commands include: [neighbor filter-list](#), [ip as-path access-list](#), and [neighbor route-map](#).

Related Commands

ip as-path access-list	Configure IP AS-Path ACL.
neighbor filter-list	Assign a AS-PATH list to a neighbor or peer group.
neighbor route-map	Assign a route map to a neighbor or peer group.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor filter-list



Configure a BGP filter based on the AS-PATH attribute.

Syntax

`neighbor [ip-address | peer-group-name] filter-list aspath access-list-name [in | out]`

To delete a BGP filter, use the `no neighbor [ip-address | peer-group-name] filter-list aspath access-list-name [in | out]` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
<i>access-list-name</i>	Enter the name of an established AS-PATH access list (up to 140 characters). If the AS-PATH access list is not configured, the default is permit (to allow routes).
in	Enter the keyword <code>in</code> to filter inbound BGP routes.
out	Enter the keyword <code>out</code> to filter outbound BGP routes.

Defaults

Not configured.

Command Modes

ROUTER BGP Address Family (`conf-router_bgp_af`)

Usage Information

Use the [ip as-path access-list](#) command syntax in the CONFIGURATION mode to enter the AS-PATH ACL mode and configure AS-PATH filters to deny or permit BGP routes based on information in their AS-PATH attribute.

Related Commands

ip as-path access-list	Enter AS-PATH ACL mode and configure AS-PATH filters.
--	---

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor maximum-prefix

C E T S

Control the number of network prefixes received.

Syntax

neighbor *ip-address* | *peer-group-name* maximum-prefix *maximum* [*threshold*]
[warning-only]

To return to the default values, use the no neighbor *ip-address* | *peer-group-name* maximum-prefix *maximum* command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.
<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. Range: 1 to 4294967295.
<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the <i>maximum</i> value. When the number of prefixes reaches this percentage of the <i>maximum</i> value, FTOS sends a message. Range: 1 to 100 percent. Default: 75
warning-only	(OPTIONAL) Enter the keyword warning-only to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults

threshold = 75

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor next-hop-self

C E T S

Enables you to configure the router as the next hop for a BGP neighbor.

Syntax

neighbor *ip-address* | *peer-group-name* next-hop-self

To return to the default setting, use the no neighbor *ip-address* | *peer-group-name* next-hop-self command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.

Defaults	Disabled.						
Command Modes	ROUTER BGP Address Family (conf-router_bgp_af)						
Usage Information	If the set next-hop command in the ROUTE-MAP mode is configured, its configuration takes precedence over the neighbor next-hop-self command.						
Command History	<table border="1"> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S-Series</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced IPv6 MGBP support for E-Series</td> </tr> </table>	Version 7.8.1.0	Introduced support on S-Series	Version 7.7.1.0	Introduced support on C-Series	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series
Version 7.8.1.0	Introduced support on S-Series						
Version 7.7.1.0	Introduced support on C-Series						
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series						

neighbor remove-private-as

C **E** **T** **S**

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax

neighbor *ip-address* | *peer-group-name* remove-private-as

To return to the default, use the no neighbor *ip-address* | *peer-group-name* remove-private-as command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor to remove the private AS numbers.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group to remove the private AS numbers

Defaults

Disabled (that is, private AS number are not removed).

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor route-map

C **E** **T** **S**

Apply an established route map to either incoming or outbound routes of a BGP neighbor or c peer group.

Syntax

neighbor [*ip-address* | *peer-group-name*] route-map *map-name* [in | out]

To remove the route map, use the no neighbor [*ip-address* | *peer-group-name*] route-map *map-name* [in | out] command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.
	<i>map-name</i>	Enter the name of an established route map. If the Route map is not configured, the default is deny (to drop all routes).
	in	Enter the keyword in to filter inbound routes.
	out	Enter the keyword out to filter outbound routes.
Defaults	Not configured.	
Command Modes	ROUTER BGP Address Family (conf-router_bgp_af)	
Usage Information	<p>When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.</p> <p>If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.</p>	
Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

neighbor route-reflector-client

C **E** **T** **S**

Configure a neighbor as a member of a route reflector cluster.

Syntax

neighbor *ip-address* | *peer-group-name* route-reflector-client

To indicate that the neighbor is not a route reflector client or to delete a route reflector configuration, use the no neighbor *ip-address* | *peer-group-name* route-reflector-client command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.
Defaults	Not configured.	
Command Modes	ROUTER BGP Address Family (conf-router_bgp_af)	

Usage Information

The first time you enter this command it configures the neighbor as a route reflector and members of the route-reflector cluster. Internal BGP (IBGP) speakers do not need to be fully meshed if you configure a route reflector.

When all clients of a route reflector are disabled, the neighbor is no longer a route reflector.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

network



Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

`network ip-address mask [route-map map-name]`

To remove a network, use the `no network ip-address mask [route-map map-name]` command.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format of the network.
<i>mask</i>	Enter the mask of the IP address in the slash prefix length format (for example, /24). The mask appears in command outputs in dotted decimal format (A.B.C.D).
<i>route-map map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> <code>match ip address</code> <code>set community</code> <code>set local-preference</code> <code>set metric</code> <code>set next-hop</code> <code>set origin</code> <code>set weight</code> If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGP Address Family (`conf-router_bgp_af`)

Usage Information

FTOS resolves the network address configured by the `network` command with the routes in the main routing table to ensure that the networks are reachable via non-BGP routes and non-default routes.

Related Commands

redistribute	Redistribute routes into BGP.
------------------------------	-------------------------------

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

redistribute

C E T S

Redistribute routes into BGP.

Syntaxredistribute [connected | static] [route-map *map-name*]

To disable redistribution, use the no redistribute [connected | static] [route-map *map-name*] command.

Parameters

connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
static	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ip address • set community • set local-preference • set metric • set next-hop • set origin • set weight If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Usage Information

If you do not configure [default-metric](#) command in addition to the [redistribute](#) command, or there is no route map to set the metric, the metric for redistributed static and connected is “0”.

To redistribute the default route (0.0.0.0/0) configure the [neighbor default-originate](#) command.

Related Commands

neighbor default-originate	Inject the default route.
--	---------------------------

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

redistribute ospf

C E T S

Redistribute OSPF routes into BGP.

Syntax

```
redistribute ospf process-id [[match external {1 | 2}] [match internal]] [route-map map-name]
```

To stop redistribution of OSPF routes, use the `no redistribute ospf process-id` command.

Parameters

<i>process-id</i>	Enter the number of the OSPF process. Range: 1 to 65535
match external {1 2}	(OPTIONAL) Enter the keywords match external to redistribute OSPF external routes. You can specify 1 or 2 to redistribute those routes only.
match internal	(OPTIONAL) Enter the keywords match internal to redistribute OSPF internal routes only.
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords route-map followed by the name of a configured Route map.

Defaults

Not configured.

Command Modes

ROUTER BGP Address Family (conf-router_bgp_af)

Usage Information

When you enter `redistribute ospf process-id` command without any other parameters, FTOS redistributes all OSPF internal routes, external type 1 routes, and external type 2 routes.

This feature is not supported by an RFC.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

show ip bgp ipv4 multicast

C E T S

View the current MBGP routing table for the system.

Syntax

```
show ip bgp ipv4 multicast [detail | network [network-mask] [length]]
```

Parameters

detail	(OPTIONAL) Enter the keyword detail to display BGP internal information for the IPv4 Multicast address family.
<i>network</i>	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.

<i>network-mask</i>	(OPTIONAL) Enter the network mask (in slash prefix format) of the BGP network address.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <i>longer-prefixes</i> to view all routes with a common prefix.

Command Modes

EXEC

EXEC Privilege

Example

```

FTOS#show ip bgp ipv4 multicast
BGP table version is 14, local router ID is 100.10.10.1
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

      Network          Next Hop          Metric      LocPrf Weight Path
*>I 25.1.0.0/16       25.25.25.25         0           100     0  i
*>I 25.2.0.0/16       25.25.25.26         0           100     0  ?
*>I 25.3.0.0/16       211.1.1.165         0           100     0  ?
*>r 144.1.0.0/16      0.0.0.0             0           32768   ?
*>r 144.2.0.0/16      100.10.10.10        0           32768   ?
*>r 144.3.0.0/16      211.1.1.135         0           32768   ?
*>n 145.1.0.0/16      0.0.0.0             0           32768   i
FTOS#

```

Table 9-17. show ip bgp Command Example Fields

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

Related Commands

show ip bgp community	View BGP communities.
---------------------------------------	-----------------------

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series
Version 7.8.1.0	Introduced support on S-Series

show ip bgp cluster-list



View BGP neighbors in a specific cluster.

Syntax	show ip bgp ipv4 multicast cluster-list [<i>cluster-id</i>]
Parameters	<i>cluster-id</i> (OPTIONAL) Enter the cluster id in dotted decimal format.
Command Modes	EXEC EXEC Privilege
Command History	Version 7.8.1.0 Introduced support on S-Series Version 7.7.1.0 Introduced support on C-Series Version 7.6.1.0 Introduced IPv6 MGBP support for E-Series

show ip bgp community

C **E** **S**

View information on all routes with Community attributes or view specific BGP community groups.

Syntax	show ip bgp ipv4 multicast community [<i>community-number</i>] [local-as] [no-export] [no-advertise]								
Parameters	<table border="1"> <tr> <td><i>community-number</i></td> <td>Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.</td> </tr> <tr> <td>local-AS</td> <td>Enter the keywords local-AS to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.</td> </tr> <tr> <td>no-advertise</td> <td>Enter the keywords no-advertise to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.</td> </tr> <tr> <td>no-export</td> <td>Enter the keywords no-export to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.</td> </tr> </table>	<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.	local-AS	Enter the keywords local-AS to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.	no-advertise	Enter the keywords no-advertise to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.	no-export	Enter the keywords no-export to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.
<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.								
local-AS	Enter the keywords local-AS to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.								
no-advertise	Enter the keywords no-advertise to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.								
no-export	Enter the keywords no-export to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.								
Command Modes	EXEC EXEC Privilege								
Usage Information	To view the total number of COMMUNITY attributes found, use the show ip bgp summary command. The text line above the route table states the number of COMMUNITY attributes found.								

The `show ip bgp community` command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the `show ip bgp` command output.

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

show ip bgp community-list

C **E** **T** **S**

View routes that are affected by a specific community list.

Syntax

`show ip bgp ipv4 multicast community-list community-list-name`

Parameters

<i>community-list-name</i>	Enter the name of a configured IP community list.
----------------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series

show ip bgp dampened-paths

C **E** **T** **S**

View BGP routes that are dampened (non-active).

Syntax

`show ip bgp ipv4 multicast dampened-paths`

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.8.1.0	Introduced support on S-Series
Version 7.7.1.0	Introduced support on C-Series
Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

show ip bgp filter-list

C **E** **T** **S**

View the routes that match the filter lists.

Syntax

`show ip bgp ipv4 multicast filter-list as-path-name`

Parameters	<i>as-path-name</i>	Enter the name of an AS-PATH.
Command Modes	EXEC	
	EXEC Privilege	
Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

show ip bgp flap-statistics

C **E** **T** **S**

View flap statistics on BGP routes.

Syntax show ip bgp ipv4 multicast flap-statistics [*ip-address* [*mask*]] [filter-list *as-path-name*] [regexp *regular-expression*]

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address (in dotted decimal format) of the BGP network to view information only on that network.
	<i>mask</i>	(OPTIONAL) Enter the network mask (in slash prefix (/x) format) of the BGP network address.
	filter-list <i>as-path-name</i>	(OPTIONAL) Enter the keyword filter-list followed by the name of a configured AS-PATH ACL.
	regexp <i>regular-expression</i>	Enter a regular expression then use one or a combination of the following characters to match: <ul style="list-style-type: none"> • . = (period) any single character (including a white space) • * = (asterisk) the sequences in a pattern (0 or more sequences) • + = (plus) the sequences in a pattern (1 or more sequences) • ? = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. • [] = (brackets) a range of single-character patterns. • () = (parenthesis) groups a series of pattern elements to a single element • { } = (braces) minimum and the maximum match count • ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. • \$ = (dollar sign) the end of the output string.

Command Modes EXEC
EXEC Privilege

Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series

show ip bgp inconsistent-as

C E T S

View routes with inconsistent originating Autonomous System (AS) numbers, that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax show ip bgp ipv4 multicast inconsistent-as

Command Modes EXEC

EXEC Privilege

Command History

Version 7.8.1.0 Introduced support on S-Series

Version 7.7.1.0 Introduced support on C-Series

show ip bgp ipv4 multicast neighbors

C E T S

Enables you to view the information exchanged by BGP neighbors.

Syntax show ip bgp ipv4 multicast neighbors [*ip-address* [advertised-routes | dampened-routes | detail | flap-statistics | routes]]

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address, in either IPv4 or IPv6 format, of the neighbor to view only BGP information exchanged with that neighbor.
advertised-routes	(OPTIONAL) Enter the keywords advertised-routes to view only the routes the neighbor sent.
dampened-routes	(OPTIONAL) Enter the keyword dampened-routes to view information on dampened routes from the BGP neighbor.
detail	(OPTIONAL) Display detailed neighbor information.
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to view flap statistics on the neighbor's routes.
routes	(OPTIONAL) Enter the keywords routes to view only the neighbor's feasible routes.

Command Modes EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp ipv4 multicast neighbors
BGP neighbor is 25.25.25.25, remote AS 6400, internal link
  BGP version 4, remote router ID 25.25.25.25
  BGP state ESTABLISHED, in this state for 00:02:18
  Last read 00:00:16, hold time is 180, keepalive interval is 60 seconds
Received 1404 messages, 0 in queue
  3 opens, 1 notifications, 1394 updates
  6 keepalives, 0 route refresh requests
Sent 48 messages, 0 in queue
  3 opens, 2 notifications, 0 updates
  43 keepalives, 0 route refresh requests
Minimum time between advertisement runs is 5 seconds
Minimum time before advertisements start is 0 seconds
```



```

Capabilities received from neighbor for IPv4 unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)
Capabilities advertised to neighbor for IPv4 Multicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)
Update source set to Loopback 0
For address family: IPv4 Multicast
BGP table version 14, neighbor version 14
3 accepted prefixes consume 12 bytes
Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer
Connections established 2; dropped 1
Last reset 00:03:17, due to user reset

Notification History
'Connection Reset' Sent : 1 Recv: 0

Local host: 100.10.10.1, Local port: 179
Foreign host: 25.25.25.25, Foreign port: 2290

BGP neighbor is 211.1.1.129, remote AS 640, external link
BGP version 4, remote router ID 0.0.0.0
BGP state ACTIVE, in this state for 00:00:36
Last read 00:00:41, hold time is 180, keepalive interval is 60 seconds
Received 28 messages, 0 notifications, 0 in queue
Sent 6 messages, 3 notifications, 0 in queue
Received 18 updates, Sent 6 updates
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds

For address family: IPv4 Multicast
BGP table version 14, neighbor version 0
0 accepted prefixes consume 0 bytes
Prefix advertised 0, rejected 0, withdrawn 0

Connections established 3; dropped 3
Last reset 00:00:37, due to user reset

Notification History
'Connection Reset' Sent : 3 Recv: 0

No active TCP connection
FTOS#

```

Table 9-18. Command Example fields: show ip bgp ipv4 multicast neighbors

Lines beginning with	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.

Table 9-18. Command Example fields: show ip bgp ipv4 multicast neighbors

Lines beginning with	Description
Last read	This line displays the following information: <ul style="list-style-type: none"> last read is the time (hours:minutes:seconds) the router read a message from its neighbor hold time is the number of seconds configured between messages from its neighbor keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive.
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(list of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL or Prefix list configured for the policy.
For address family:	Displays IPv4 Unicast as the address family.
BGP table version	Displays the which version of the primary BGP routing table the router and the neighbor are using.
accepted prefixes	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.
Prefix advertised	Displays the number of network prefixes advertised, the number rejected and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word never is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Related Commands[show ip bgp](#)

View the current BGP routing table.

Command History

Version 7.8.1.0 Introduced support on S-Series

Version 7.7.1.0 Introduced support on C-Series

Version 7.6.1.0 Introduced IPv6 MGBP support for E-Series

show ip bgp peer-group

C E T S

Enables you to view information on the BGP peers in a peer group.

Syntax show ip bgp ipv4 multicast peer-group [*peer-group-name* [detail | summary]]

Parameters	<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
	detail	(OPTIONAL) Enter the keyword detail to view detailed status information of the peers in that peer group.
	summary	(OPTIONAL) Enter the keyword summary to view status information of the peers in that peer group. The output is the same as that found in show ip bgp summary command

Command Modes

EXEC

EXEC Privilege

Related Commands	neighbor peer-group (assigning peers)	Assign peer to a peer-group.
	neighbor peer-group (creating group)	Create a peer group.
	show ip bgp peer-group	View information on the BGP peers in a peer group.

Command History	Version 7.8.1.0	Introduced support on S-Series
	Version 7.7.1.0	Introduced support on C-Series
	Version 7.6.1.0	Introduced IPv6 MGBP support for E-Series
	Version 7.5.1.0	Modified: added detail option

show ip bgp summary

C E T S

Enables you to view the status of all BGP connections.

Syntax show ip bgp ipv4 multicast summary

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#sho ip bgp ipv4 multicast summary
BGP router identifier 100.10.10.1, local AS number 6400
BGP table version is 14, main routing table version 14
7 network entrie(s) and 7 paths using 972 bytes of memory
2 BGP path attribute entrie(s) using 112 bytes of memory
1 BGP AS-PATH entrie(s) using 35 bytes of memory

Neighbor      AS      MsgRcvd  MsgSent    TblVer  InQ   OutQ  Up/Down   State/Pfx
-----
25.25.25.25   6400    21       9          14     0     0  00:02:04    3
211.1.1.129   640     28       6           0     0     0  00:00:21 Active
FTOS#
```

Table 9-19. Command Example fields: show ip bgp ipv4 multicast summary

Field	Description
BGP router identifier	Displays the local router ID and the AS number.
BGP table version	Displays the BGP table version and the main routing table version.
network entries	Displays the number of network entries and route paths and the amount of memory used to process those entries.
BGP path attribute entries	Displays the number of BGP path attributes and the amount of memory used to process them.
BGP AS-PATH entries	Displays the number of BGP AS_PATH attributes processed and the amount of memory used to process them.
BGP community entries	Displays the number of BGP COMMUNITY attributes processed and the amount of memory used to process them. The show ip bgp community command provides more details on the COMMUNITY attributes.
Dampening enabled	Displayed only when dampening is enabled. Displays the number of paths designated as history, dampened, or penalized.
Neighbor	Displays the BGP neighbor address.
AS	Displays the AS number of the neighbor.
MsgRcvd	Displays the number of BGP messages that neighbor received.
MsgSent	Displays the number of BGP messages that neighbor sent.
TblVer	Displays the version of the BGP table that was sent to that neighbor.
InQ	Displays the number of messages from that neighbor waiting to be processed.
OutQ	Displays the number of messages waiting to be sent to that neighbor. If a number appears in parentheses, the number represents the number of messages waiting to be sent to the peer group.
Up/Down	Displays the amount of time (in hours:minutes:seconds) that the neighbor is in the Established stage. If the neighbor has never moved into the Established stage, the word never is displayed.
State/Pfx	If the neighbor is in Established stage, the number of network prefixes received. If a maximum limit was configured with the neighbor maximum-prefix command, (prfxd) appears in this column. If the neighbor is not in Established stage, the current stage is displayed (Idle, Connect, Active, OpenSent, OpenConfirm) When the peer is transitioning between states and clearing the routes received, the phrase (Purging) may appear in this column. If the neighbor is disabled, the phrase (Admin shut) appears in this column.

Command History

Version 7.8.1.0 Introduced support on S-Series

Version 7.7.1.0 Introduced support on C-Series

Version 7.6.1.0 Introduced IPv6 MGBP support for E-Series

BGP Extended Communities (RFC 4360)

BGP Extended Communities, as defined in RFC 4360, is an optional transitive BGP attribute. It provides two major advantages over Standard Communities:

- The range is extended from 4-octet (AA:NN) to 8-octet (Type:Value) to provide enough number communities.
- Communities are structured using a new “Type” field (1 or 2-octets), allowing you to provide granular control/filter routing information based on the type of extended communities.

The BGP Extended Community commands are:

- [deny](#)
- [deny regex](#)
- [description](#)
- [ip extcommunity-list](#)
- [match extcommunity](#)
- [permit](#)
- [permit regex](#)
- [set extcommunity rt](#)
- [set extcommunity soo](#)
- [show ip bgp ipv4 extcommunity-list](#)
- [show ip bgp paths extcommunity](#)
- [show ip extcommunity-list](#)
- [show running-config extcommunity-list](#)

deny



Use this feature to reject (deny) from the two types of extended communities, Route Origin (rt) or Site-of-Origin (soo).

Syntax

```
deny {rt | soo} {as4 ASN4:NN | ASN:NNNN | IPADDR:NN}
```

To remove (delete) the rule, use the `no deny {rt | soo} {as4 ASN4:NN | ASN:NNNN | IPADDR:NN}` command.

Parameters	<code>rt</code>	Enter the keyword <code>rt</code> to designate a Route Origin community
	<code>soo</code>	Enter the keyword <code>soo</code> to designate a Site-of-Origin community (also known as Route Origin).
	<code>as4 ASN4:NN</code>	Enter the keyword <code>as4</code> followed by the 4-octet AS specific extended community number in the format <code>ASN4:NN</code> (4-byte AS number:2-byte community value).
	<code>ASN:NNNN</code>	Enter the 2-octet AS specific extended community number in the format <code>ASN:NNNN</code> (2-byte AS number:4-byte community value).
	<code>IPADDR:NN</code>	Enter the IP address specific extended community in the format <code>IPADDR:NN</code> (4-byte IPv4 Unicast Address:2-byte community value)
Defaults	Not configured	
Command Modes	CONFIGURATION (conf-ext-community-list)	
Related Commands	permit	Configure to add (permit) rules
	show ip extcommunity-list	Display the Extended Community list
Command History	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

deny regex

C **E** **S**

This feature enables you to specify an extended communities to reject (deny) using a regular expressions (regex).

Syntax `deny regex {regex}`

To remove, use the `no deny regex {regex}` command.

Parameters	<code>regex</code>	Enter a regular expression.
Defaults	Not configured	
Command Modes	CONFIGURATION (conf-ext-community-list)	
Usage Information	Duplicate commands are silently accepted.	
Example	<pre>FTOS (conf-ext-community-list)#deny regexp 123 FTOS (conf-ext-community-list)#</pre>	
Related Commands	permit regex	Permit a community using a regular expression

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

description

C E S

Use this feature to designate a meaningful description to the extended community.

Syntax

description { *line* }

To remove the description, use the no description { *line* } command.

Parameters

<i>line</i>	Enter a description (maximum 80 characters).
-------------	--

Defaults

Not configured

Command Modes

CONFIGURATION (conf-ext-community-list)

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

ip extcommunity-list

C E S

Use this feature to enter the Extended Community-list mode.

Syntax

ip extcommunity-list *word*

To exit from this mode, use the exit command.

Parameters

<i>word</i>	Enter a community list name (maximum 16 characters).
-------------	--

Defaults

No defaults values or behavior

Command Modes

CONFIGURATION (conf-ext-community-list)

Usage Information

This new mode will change the prompt. the example below.

Example

```
FTOS(conf)#ip extcommunity-list test
FTOS(conf-ext-community-list)#
```

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

match extcommunity

C **E** **S**

Use this feature to match an extended community in the Route Map mode.

Syntax

match extcommunity { *extended community list name* }

To change the match, use the no match extcommunity { *extended community list name* } command.

Parameters

<i>extended community list name</i>	Enter the name of the extended community list.
-------------------------------------	--

Defaults

No defaults values or behavior

Command Modes

ROUTE MAP (config-route-map)

Usage Information

Like standard communities, extended communities can be used in route-map to match the attribute.

Example

```
FTOS(config-route-map)#match extcommunity Freedombird
FTOS(config-route-map)#
```

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

permit

C **E** **S**

Use this feature to add rules (permit) from the two types of extended communities, Route Origin (rt) or Site-of-Origin (soo).

Syntax

permit { rt | soo } { as4 *ASN4:NN* | *ASN:NNNN* | *IPADDR:NN* }

To change the rules, use the no permit { rt | soo } { as4 *ASN4:NN* | *ASN:NNNN* | *IPADDR:NN* } command.

Parameters

rt	Enter the keyword rt to designate a Route Origin community
soo	Enter the keyword soo to designate a Site-of-Origin community (also known as Route Origin).
as4 <i>ASN4:NN</i>	Enter the keyword as4 followed by the 4-octet AS specific extended community number in the format <i>ASN4:NN</i> (4-byte AS number:2-byte community value).
<i>ASN:NNNN</i>	Enter the 2-octet AS specific extended community number in the format <i>ASN:NNNN</i> (2-byte AS number:4-byte community value).
<i>IPADDR:NN</i>	Enter the IP address specific extended community in the format <i>IPADDR:NN</i> (4-byte IPv4 Unicast Address:2-byte community value)

Defaults

Not Configured

Command Modes CONFIGURATION (conf-ext-community-list)

Related Commands	deny	Configure to delete (deny) rules
	show ip extcommunity-list	Display the Extended Community list

Command History	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

permit regex

C **E** **S**

This feature enables you to specify extended communities to forward (permit) using a regular expression (regex).

Syntax permit regex {*regex*}

To remove, use the no permit regex {*regex*} command.

Parameters	<i>regex</i>	Enter a regular expression.
-------------------	--------------	-----------------------------

Defaults Not configured

Command Modes CONFIGURATION (conf-ext-community-list)

Usage Information Duplicate commands are silently accepted.

Example

```
FTOS (conf-ext-community-list) #permit regex 123
FTOS (conf-ext-community-list) #
```

Related Commands	deny regex	Deny a community using a regular expression
-------------------------	----------------------------	---

Command History	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

set extcommunity rt

C **E** **S**

Use this feature to set Route Origin community attributes in Route Map.

Syntax set extcommunity rt {as4 *ASN4:NN* [non-trans] | *ASN:NNNN* [non-trans] | *IPADDR:NN* [non-trans]} [additive]

To delete the Route Origin community, use the no set extcommunity command.

Parameters	<code>as4 ASN4:NN</code>	Enter the keyword <code>as4</code> followed by the 4-octet AS specific extended community number in the format <code>ASN4:NN</code> (4-byte AS number:2-byte community value).
	<code>ASN:NNNN</code>	Enter the 2-octet AS specific extended community number in the format <code>ASN:NNNN</code> (2-byte AS number:4-byte community value).
	<code>IPADDR:NN</code>	Enter the IP address specific extended community in the format <code>IPADDR:NN</code> (4-byte IPv4 Unicast Address:2-byte community value)
	<code>additive</code>	(OPTIONAL) Enter the keyword <code>additive</code> to add to the existing extended community.
	<code>non-trans</code>	(OPTIONAL) Enter the keyword <code>non-trans</code> to indicate a non-transitive BGP extended community.
Defaults	No default values or behavior	
Command Modes	ROUTE MAP (config-route-map)	
Usage Information	<p>If the set community <code>rt</code> and <code>soo</code> are in the same route-map entry, we can define the behavior as:</p> <ul style="list-style-type: none"> • If <code>rt</code> option comes before <code>soo</code>, with or without <code>additive</code> option, then <code>soo</code> overrides the communities set by <code>rt</code> • If <code>rt</code> options comes after <code>soo</code>, without the <code>additive</code> option, then <code>rt</code> overrides the communities set by <code>soo</code> • If <code>rt</code> with <code>additive</code> option comes after <code>soo</code>, then <code>rt</code> adds the communities set by <code>soo</code> 	
Related Commands	<code>set extcommunity soo</code>	Set extended community site-of-origin in route-map.
Command History	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

set extcommunity soo

C **E** **S**

Use this feature to set extended community site-of-origin in Route Map.

Syntax

```
set extcommunity soo {as4 ASN4:NN | ASN:NNNN | IPADDR:NN [non-trans]}
```

To delete the site-of-origin community, use the `no set extcommunity` command.

Parameters	<code>as4 ASN4:NN</code>	Enter the keyword <code>as4</code> followed by the 4-octet AS specific extended community number in the format <code>ASN4:NN</code> (4-byte AS number:2-byte community value).
	<code>ASN:NNNN</code>	Enter the 2-octet AS specific extended community number in the format <code>ASN:NNNN</code> (2-byte AS number:4-byte community value).

<i>IPADDR:NN</i>	Enter the IP address specific extended community in the format IPADDR:NN (4-byte IPv4 Unicast Address:2-byte community value)
non-trans	(OPTIONAL) Enter the keyword non-trans to indicate a non-transitive BGP extended community.

Defaults No default behavior or values

Command Modes ROUTE MAP (config-route-map)

Usage Information If the set community rt and soo are in the same route-map entry, we can define the behavior as:

- If rt option comes before soo, with or without additive option, then soo overrides the communities set by rt
- If rt options comes after soo, without the additive option, then rt overrides the communities set by soo
- If rt with additive option comes after soo, then rt adds the communities set by soo

Related Commands

set extcommunity rt	Set extended community route origins via the route-map
-------------------------------------	--

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

show ip bgp ipv4 extcommunity-list

C **E** **S**

Use this feature to display IPv4 routes matching the extended community list name.

Syntax show ip bgp [ipv4 [multicast | unicast] | ipv6 unicast] extcommunity-list *name*

Parameters

multicast	Enter the keyword multicast to display the multicast route information.
unicast	Enter the keyword unicast to display the unicast route information.
ipv6 unicast	Enter the keywords ipv6 unicast to display the IPv6 unicast route information.
<i>name</i>	(OPTIONALLY) Enter the name of the extcommunity-list.

Defaults No default values or behavior

Command Modes EXEC
EXEC Privilege

Usage Information If there is a type or sub-type that is not well-known, it will be displayed as:
TTSS : XX : YYYY

Where TT is type, SS is sub-type displayed in hexadecimal format, XX:YYYY is the value divided into 2-byte and 4-byte values in decimal format. This format is consistent with other vendors.

For example, if the extended community has type 0x04, sub-type 0x05, value 0x20 00 00 00 10 00, it will be displayed as:

```
0x0405:8192:4096
```

Non-transitive extended communities are marked with an asterisk, as shown in the figure below.

Example

```
FTOS#show ip bgp ipv4 multicast extcommunity-list
BGP routing table entry for 192.168.1.0/24, version 2

Paths: (1 available, table Default-IP-Routing-Table.)
Not advertised to any peer
Received from :
 100.100.1.2 (2.4.0.1) Best
   AS_PATH : 200
  Next-Hop : 100.100.1.2, Cost : 0
  Origin IGP, Metric 4294967295 (Default), LocalPref 100, Weight 0, external
  Communities :
    300:400          500:600

  Extended Communities :
    RT:1111:4278080 SoO:35:4          SoO:36:50529043      SoO:37:50529044
    SoO:38:50529045 SoO:0.0.0.2:33 SoO:506.62106:34    0x0303:254:11223*
```

FTOS#

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

show ip bgp paths extcommunity



Use this feature to display all BGP paths having extended community attributes.

Syntax

```
show ip bgp paths extcommunity
```

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip bgp paths extcommunity
Total 1 Extended Communities

Address          Hash      Refcount   Extended Community
-----
0x41d57024      12272     1          RT:7:200 SoO:5:300 SoO:0.0.0.3:1285
FTOS#
```

Table 9-20. Command Example fields: show ip bgp paths community

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
RefCount	Displays the number of BGP routes using these extended communities.
Community	Displays the extended community attributes in this BGP path.

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

show ip extcommunity-list

C **E** **S**

Display the IP extended community list.

Syntax

show ip extcommunity-list [*word*]

Parameters

<i>word</i>	Enter the name of the extended community list you want to view.
-------------	---

Defaults

Defaults.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#show ip extcommunity-list test
ip extcommunity-list test
deny RT:1234:12
permit regexp 123
deny regexp 234
deny regexp 123
FTOS#
```

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

show running-config extcommunity-list

C **E** **S**

Use this feature to display the current configuration of the extended community lists.

Syntax

show running-config extcommunity-list [*word*]

Parameters

<i>word</i>	Enter the name of the extended community list you want to view.
-------------	---

Defaults No default values or behavior

Command Modes EXEC Privilege

Example FTOS#show running-config extcommunity-list test

```
ip extcommunity-list test
  permit rt 65033:200
  deny soo 101.11.11.2:23
  permit rt as4 110212:340
  deny regex ^(65001_)$
FTOS#
```

Command History

Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

Bare Metal Provisioning

Overview

[Bare Metal Provisioning](#) is supported on platforms: S55 S60 S4810 S4820T Z

Bare Metal Provisioning version 2.0 is supported on S4810, S4820T, and Z switches.

In a data center network, Bare Metal Provisioning (BMP) automates the configuration and updating of switches, ensuring standard configurations across installed devices.

You can configure auto-configuration on a single switch or on multiple switches. BMP allows you to set up a stack with a minimum of effort, but is also useful for quick configuration of a single switch.

For additional information on BMP in an auto-configuration mode, refer to the *Open Automation Guide*.

BMP 2.0 eases configuration by providing the following key features:

- Boot images and running configurations are specified in a DHCP server.
- Files are automatically downloaded from a file server and applied by the switch
- Switch access is allowed through all ports (management and user ports) with or without DHCP-based dynamic IP address configuration of a switch.
- Booting up in Layer 3 mode with interfaces already in no shutdown mode and only enabling some basic protocols enabled to protect the system and the network

Commands

- [reload-type](#)
- [show reload-type](#)
- [stop jump-start](#)

reload-type

S4810

S4820T

BMP 2.0 auto-configuration mode: Configure a switch to reload in normal mode or as a DHCP client with all ports configured for Layer 3 traffic.

Syntax

```
reload-type {normal-reload | jump-start [config-download {enable | disable}]
[dhcp-timeout minutes]}
```

Parameters

normal-reload	The switch reloads in normal mode using the FTOS image and startup configuration file stored in the local flash.
jump-start	The switch reloads in Jumpstart mode as a DHCP client.
config-download {enable disable}	(Optional) Configure whether the switch boots up using the configuration file downloaded from the DHCP/file servers (<i>enable</i>) OR if the downloaded file will be discarded and the startup configuration file stored in the local flash will be used (<i>disable</i>).
dhcp-timeout <i>minutes</i>	(Optional) Configure the DHCP timeout (in minutes) after which the Jumpstart reload stops. Range: 1 to 50. Default: Infinite number of retries.

Defaults

A switch running BMP 2.0 reloads in Jumpstart mode as a DHCP client with all ports configured for Layer 3 traffic.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.10.1	Introduced on S4810.

Usage Information

For an initial setup, the **config-download** parameter of the **reload-type** command is enabled. After the configuration file is successfully downloaded, the **config-download** parameter is automatically disabled. You can enable it again using the **reload-type** command.

After you set the auto-configuration mode (Jumpstart or Normal reload) using the **reload-type** command, you must enter the **reload** command to reload the switch in the configured mode.

When a switch reloads in Jumpstart mode, all ports, including the management port, are automatically configured as Layer 3 physical ports. The switch acts as a DHCP client on the ports for a user-configured time (*dhcp-timeout* option). You can reconfigure the default startup configuration and DHCP timeout values.

If a switch enters a loop while reloading in Jumpstart mode because the switch continuously tries to contact a DHCP server and a DHCP server is not found, enter the **stop jump-start** command to interrupt the reload and boot up in normal mode. The startup configuration is then loaded from the local flash on the switch.

Use the **reload-type** command in BMP 2.0 to toggle between Normal and Jumpstart auto-configuration modes. The reload settings for the auto-configuration mode that you configure are stored in memory and retained for future reboots and BMP software upgrades. You can enter the **reload** command at any time to reload the switch in the last configured mode: Normal reload or Jumpstart mode.

Related Commands	show reload-type	Display the current reload mode (Normal or jump-start mode)
	stop jump-start	Stops the Jumpstart process to prevent a loop if the DHCP server is not found.

show reload-type

S4810

Display the currently configured reload mode.

S4820T

Syntax

show reload-type

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.1 Introduced on S4820T.

Version 8.3.10.1 Introduced on S4810.

Usage Information

Use the [show reload-type](#) command to check the currently configured auto-configuration mode (Jumpstart or Normal reload) on a switch running BMP 2.0.

You can also use the **show bootvar** command to display the current reload mode for BMP 2.0 with the path of the FTOS image file retrieved from a DHCP server.

Example

```
FTOS#show reload-type
```

```
Reload-Type      :      normal-reload [Next boot : normal-reload]
```

Related Commands

reload-type	Configure the reload mode as normal or Jumpstart.
-----------------------------	---

stop jump-start

S4810

Stop the switch from reloading in Jumpstart mode to prevent an infinite loop.

S4820T

Syntax

stop jump-start

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.10.1	Introduced on S4810.

Related Commands

reload-type	Configure the reload mode as normal or Jumpstart.
-----------------------------	---

Usage Information

Use the **stop jump-start** command on a switch running BMP 2.0 if the switch enters a loop while reloading in Jumpstart mode; loop occurs when the switch is continuously trying to contact a DHCP server and a DHCP server is not found. The **stop jump-start** command stops the switch from connecting to the DHCP server. After the **stop jump-start** command is used, the next default reload type will be a normal reload. This will be indicated in the show reload-type command.

Content Addressable Memory (CAM)

Overview

Content Addressable Memory (CAM) commands are supported on the Dell Force10 E-Series TeraScale **E**_T, C-Series **C**, S-Series **S**, **S4810**, or **S4820T** platforms as indicated by the characters that appear under each of the command headings.



Note: Not all CAM commands are supported on all platforms. Be sure to note the platform symbol when looking for a command.



Warning: If you are using these features for the first time, contact Dell Force10 Technical Assistance Center (TAC) for guidance. For information on contacting Dell Force10 TAC, visit the Dell Force10 website at www.force10networks.com/support

This chapter includes the following sections:

- [CAM Profile Commands](#)
- [CAM IPv4flow Commands](#)
- [CAM Layer 2 ACL Commands](#)

CAM Profile Commands

The CAM profiling feature enables you to partition the CAM to best suit your application. For example:

- Configure more Layer 2 FIB entries when the system is deployed as a switch.
- Configure more Layer 3 FIB entries when the system is deployed as a router.
- Configure more ACLs (when IPv6 is not employed).
- Hash MPLS packets based on source and destination IP addresses for LAGs.
- Hash based on bidirectional flow for LAGs.
- Optimize the VLAN ACL Group feature, which permits group VLANs for IP egress ACLs.


Important Points to Remember

- CAM Profiles are available on FTOS versions 6.3.1.1 and later for the E-Series TeraScale.
- FTOS versions 7.8.1.0 and later support CAM allocations on the C-Series and S-Series.
- FTOS versions 8.3.12.0 and later support CAM allocations on the **S4810** and **S4820T**.
- All line cards within a single system must have the same CAM profile (including CAM sub-region configurations); this profile must match the system CAM profile (the profile on the primary RPM).
- FTOS automatically reconfigures the CAM profile on line cards and the secondary RPM to match the system CAM profile by saving the correct profile on the card and then rebooting it.
- The CAM configuration is applied to entire system when you use CONFIGURATION mode commands. You must save the running-configuration to affect the change.
- When budgeting your CAM allocations for ACLs and QoS configurations, remember that ACL and QoS rules might consume more than one CAM entry depending on complexity. For example, TCP and UDP rules with port range options might require more than one CAM entry.
- After you install a secondary RPM, copy the running-configuration to the startup-configuration so that the new RPM has the correct CAM profile.
- You MUST save your changes and reboot the system for CAM profiling or allocations to take effect.

The CAM Profiling commands are:

- [cam-acl \(Configuration\)](#)
- [cam-acl \(EXEC Privilege\)](#)
- [cam-optimization](#)
- [cam-profile \(Config\)](#)
- [show cam-acl](#)
- [show cam-acl-egress](#)
- [show cam-profile](#)
- [show cam-usage](#)
- [test cam-usage](#)

cam-acl (Configuration)



Select the default CAM allocation settings or reconfigure new CAM allocation for Layer 2, IPv4 and IPv6 ACLs, Layer 2 and Layer 3 (IPv4) QoS, Layer 2 Protocol Tunneling (L2PT), IP and MAC source address validation for DHCP, Ethernet Connectivity Fault Management (CFM) ACLs, and Policy-based Routing (PBR).

Syntax `cam-acl { default | l2acl number ipv4acl number ipv6acl number ipv4qos number l2qos number l2pt number ipmacacl number ecfmacl number [vman-qos | vman-dual-qos number] ipv4pbr number [fcoeacl number iscsiopacl number]}`

Parameters	default	Use the default CAM profile settings, and set the CAM as follows. L3 ACL (ipv4acl): 4 L2 ACL(l2acl): 5 IPv6 L3 ACL (ipv6acl): 0 L3 QoS (ipv4qos): 1 L2 QoS (l2qos): 1
	<code>l2acl number ipv4acl number ipv6acl number, ipv4qos number l2qos number, l2pt number ipmacacl number ecfmacl number [vman-qos vman-dual-qos number] ipv4pbr number [fcoeacl number iscsiopacl number]</code>	Allocate space to each CAM region. Enter the CAM profile name followed by the amount of CAM space to be allotted. The total space allocated must equal 13 blocks. The range for ipv4acl is 1 to 4. The ipv6acl range must be a factor of 2.

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Added fcoeacl and iscsiopacl keywords for S4820T.
	Version 8.3.19.0	Clarified block information for S4820T.
	Version 8.3.19.0	Introduced on S4820T.
	Version 8.3.12.0	Added fcoeacl and iscsiopacl keywords for S4810.
	Version 8.3.10.2	Clarified block information for S4810.
	Version 8.3.10.0	Introduced on S4810.
	Version 8.3.1.0	Added ecfmacl , vman-qos , and vman-dual-qos keywords.
	Version 8.2.1.0	Introduced on the S-Series.
	Version 7.8.1.0	Introduced on the C-Series.

Usage Information You must save the new CAM settings to the startup-config (write-mem or copy run start) then reload the system for the new settings to take effect.

The total amount of space allowed is 16 FP Blocks. System flow requires 3 blocks that cannot be reallocated. The **ipv4acl** profile range is 1 to 4.

When configuring space for IPv6 ACLs, the total number of Blocks must equal 13.

On the S4810 and the S4820T, there can be *only one* odd number of Blocks in the CLI configuration; the other Blocks must be in factors of 2. For example, a CLI configuration of 5+4+2+1+1 Blocks is not supported; a configuration of 6+4+2+1 Blocks is supported.

Ranges for the CAM profiles are 1 to 10, except for the **ipv6acl** profile which is 0 to 10. The **ipv6acl** allocation must be a factor of 2 (2, 4, 6, 8, 10).

If allocation values are not entered for the CAM regions, the value is 0.

cam-acl-egress (Configuration)



Select the FP groups for CAM access control lists for Layer 2, IPv4 and IPv6 ACLs.

Syntax

`cam-acl-egress {default | l2acl number ipv4acl number ipv6acl number}`

Parameters

default	Reset the egress CAM ACL entries to the default settings.
<code>l2acl <i>number</i> ipv4acl <i>number</i> ipv6acl <i>number</i></code>	Allocate space to each CAM region. Enter the CAM profile name followed by the amount of CAM space to be allotted. The total space allocated must equal 13. l2acl range: 1 to 4 ipv4acl range: 1 to 4 ipv6acl range: 0 to 4

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.10.0	Introduced on the S4810
Version 8.3.1.0	Added <code>ecmacl</code> , <code>vman-qos</code> , and <code>vman-dual-qos</code> keywords.
Version 8.2.1.0	Introduced on the S-Series
Version 7.8.1.0	Introduced on the C-Series

Usage Information

You must save the new CAM settings to the startup-config (**write-mem** or **copy run start**) then reload the system for the new settings to take effect.

There are 4 groups total. You must allocate at least one group for L2ACL and IPv4 ACL.

Ranges for the CAM profiles are 1 to 4 for l2acl. The range for the **ipv6acl** profile is 0 to 10. The **ipv6acl** allocation must be a factor of 2 (2, 4, 6, 8, 10).

cam-acl (EXEC Privilege)



Adjust linecard CAM setting to match chassis settings.

This command is deprecated as of FTOS 8.3.1.0

Syntax

`cam-acl {chassis |linecard}`

Command Modes

EXEC Privilege

Command History

Version 8.3.1.0	COMMAND DEPRECATED
Version 7.8.1.0	Introduced on the C-Series

cam-optimization

C **S**

Optimize CAM utilization for QoS Entries by minimizing require policy-map CAM space.

Syntax **cam-optimization [qos]**

Parameters	qos	Optimize CAM usage for Quality of Service (QoS)
-------------------	------------	---

Command Modes CONFIGURATION

Defaults Disabled

Command History	Version 8.2.1.0	Introduced on the S-Series
	Version 7.8.1.0	Introduced on the C-Series and S-Series

Usage Information When this command is enabled, if a Policy Map containing classification rules (ACL and/or dscp/ip-precedence rules) is applied to more than one physical interface on the same port pipe, only a single copy of the policy will be written (only 1 FP entry will be used).

Note that an ACL itself may still require more that a single FP entry, regardless of the number of interfaces. Refer to *IP Access Control Lists, Prefix Lists, and Route-map* in the *FTOS Configuration Guide* for complete discussion.

cam-profile (Config)

E

Set the default CAM profile and the required microcode.

Syntax `cam-profile profile microcode microcode`

Parameters

<i>profile</i>	<p>Choose one of the following CAM profiles:</p> <ul style="list-style-type: none"> • Enter the keyword <code>default</code> to specify the default CAM profile. • Enter the keyword <code>eg-default</code> to specify the default CAM profile for EG (dual-CAM) line cards. • Enter the keyword <code>ipv4-320k</code> to specify the CAM profile that provides 320K entries for the IPv4 Forwarding Information Base (FIB). • Enter the keyword <code>ipv4-egacl-16k</code> to specify the CAM profile that provides 16K entries for egress ACLs. <ul style="list-style-type: none"> • Enter the keyword <code>ipv6-extacl</code> to specify the CAM profile that provides IPv6 functionality. • Enter the keyword <code>l2-ipv4-inacl</code> to specify the CAM profile that provides 32K entries for ingress ACLs. • Enter the keyword <code>unified-default</code> to specify the CAM profile that maintains the CAM allocations for the IPv6 and IPv4 FIB while allocating more CAM space for the Ingress and Egress Layer 2 ACL, and IPv4 ACL regions. • Enter the keyword <code>ipv4-vrf</code> to specify the CAM profile that maintains the CAM allocations for the IPv4 FIB while allocating CAM space for VRF. • Enter the keyword <code>ipv4-v6-vrf</code> to specify the CAM profile that maintains the CAM allocations for the IPv4 and IPv6 FIB while allocating CAM space for VRF. • Enter the keyword <code>ipv4-64k-ipv6</code> to specify the CAM profile that provides an alternate to <code>ipv6-extacl</code> that redistributes CAM space from the IPv4 FIB to IPv4 Flow and IPv6 FIB.
----------------	--

microcode <i>microcode</i>	<p>Choose a microcode based on the CAM profile you chose. Not all microcodes are available to be paired with a CAM profile.</p> <ul style="list-style-type: none"> • Enter the keyword <code>default</code> to select the microcode that distributes CAM space for a typical deployment. • Enter the keyword <code>lag-hash-align</code> to select the microcode for applications that require the same hashing for bi-directional traffic. • Enter the keyword <code>lag-hash-mpls</code> to select the microcode for hashing based on MPLS labels (up to five labels deep). • Enter the keyword <code>ipv6-extacl</code> to select the microcode for IPv6. • Enter the keyword <code>acl-group</code> to select the microcode for applications that need 16k egress IPv4 ACLs. • Enter the keyword <code>ipv4-vrf</code> to select the microcode for IPv4 VRF applications. • Enter the keyword <code>ipv4-v6-vrf</code> to select the microcode for IPv4 and IPv6 VRF applications. • E-Series TeraScale only: Select <code>l2-switched-pbr</code> microcode if you apply a PBR redirect list to a VLAN interface and want to prevent Layer 2 traffic from being redirected and dropped. <code>l2-switched-pbr (IPv4-LDA)</code> microcode allows only Layer 3 traffic to be redirected while Layer 2 traffic is switched within the VLAN.
-----------------------------------	---

Defaults

cam-profile default microcode default

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.4.1.0	Added support for <code>l2-switched-pbr</code> microcode.
Version 8.2.1.0	Added support for the <code>ipv4-64k-ipv6</code> profile.

Version 7.9.1.0	Added support for VRF protocols.
Version 7.5.1.0	Added the l2-ipv4-inacl CAM profile
Version 7.4.2.0	Added the unified-default CAM profile and lag-hash-align microcode
Version 7.4.1.0	Added the lag-hash-mpls microcode
Version 6.5.1.0	Added the eg-default and ipv4-320k CAM profiles
Version 6.3.1.0	Introduced on E-Series

Usage Information

You must save the running configuration using the command `copy running-config startup-config` after changing the CAM profile from CONFIGURATION mode. CAM profile changes take effect after the next chassis reboot.



Note: Do not use the `ipv4-egacl-16` CAM profile for Layer 2 egress ACLs.



Note: Do not make any changes to the CAM profile after you change the profile to `ipv4-320K` and save the configuration until after you reload the chassis; any changes lead to unexpected behavior. After you reload the chassis, you may make changes to the IPv4 Flow partition.

show cam-acl

C **S** **S4810**

S4820T

Display the details of the CAM profiles on the chassis and all line cards.

Syntax

`show cam-acl`

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810.
Version 7.8.1.0	Introduced on C-Series

Usage Information

The display reflects the settings implemented with the `cam-acl` command.

Example (default for C-Series / S-Series)

```
FTOS#show cam-acl

-- Chassis Cam ACL --
      Current Settings(in block sizes)
L2Acl      :      6
Ipv4Acl    :      5
Ipv6Acl    :      0
Ipv4Qos    :      1
L2Qos      :      1
L2PT       :      0
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos:      0
```

```

Ipv4pbr      :          0

-- Line card 4 --
          Current Settings(in block sizes)
L2Ac1       :          6
Ipv4Ac1     :          5
Ipv6Ac1     :          0
Ipv4Qos     :          1
L2Qos       :          1
L2PT        :          0
IpMacAc1    :          0
VmanQos     :          0
VmanDualQos :          0
Ipv4pbr     :          0

```

FTOS#

FTOS#show cam-acl

```

-- Chassis Cam ACL --
          Current Settings(in block sizes)
L2Ac1       :          4
Ipv4Ac1     :          4
Ipv6Ac1     :          0
Ipv4Qos     :          2
L2Qos       :          1
L2PT        :          0
IpMacAc1    :          0
VmanQos     :          0
VmanDualQos :          0
EcfmAc1     :          0
FcoeAc1     :          0
iscsiOptAc1 :          2

```

-- Stack unit 0 --

```

          Current Settings(in block sizes)
L2Ac1       :          4
Ipv4Ac1     :          4
Ipv6Ac1     :          0
Ipv4Qos     :          2
L2Qos       :          1
L2PT        :          0
IpMacAc1    :          0
VmanQos     :          0
VmanDualQos :          0
EcfmAc1     :          0
FcoeAc1     :          0
iscsiOptAc1 :          2

```

FTOS#

FTOS#show cam-acl

```

-- Chassis Cam ACL --
          Current Settings(in block sizes)
L2Ac1       :          2
Ipv4Ac1     :          2
Ipv6Ac1     :          2
Ipv4Qos     :          2
L2Qos       :          2
L2PT        :          1
IpMacAc1    :          2
VmanQos     :          0

```

Example
(default for S4810
& S4820T)

Example
(non-default for
C-Series /
S-Series)

```

VmanDualQos:      0
Ipv4pbr          :      0

-- Line card 4 --
                Current Settings(in block sizes)
L2Acl           :      5
Ipv4Acl         :      5
Ipv6Acl         :      1
Ipv4Qos         :      1
L2Qos           :      1
L2PT            :      0
IpMacAcl        :      0
VmanQos         :      0
VmanDualQos:    0
Ipv4pbr         :      0

FTOS#

```

show cam-acl-egress

C **S**

Display the details of the FP groups allocated for the egress ACL.

Syntax

show cam-acl-egress

Defaults

None

Command Modes

Configuration

Usage Information

The display reflects the settings implemented with the cam-acl-egress command.

Example (default)

```

FTOS#show cam-acl-egress

-- Chassis Egress Cam ACL --
                Current Settings(in block sizes)
L2Acl           :      1
Ipv4Acl         :      1
Ipv6Acl         :      2

-- Stack unit 0 --
                Current Settings(in block sizes)
L2Acl           :      1
Ipv4Acl         :      1
Ipv6Acl         :      2

FTOS#

```

show cam-profile

E

Display the details of the CAM profiles on the chassis and all line cards.

Syntax

show cam-profile [*profile* *microcode* *microcode* | summary]

Parameters

<i>profile</i>	(OPTIONAL) Choose a single CAM profile to display: <ul style="list-style-type: none"> • Enter the keyword <code>default</code> to specify the default CAM profile. • Enter the keyword <code>eg-default</code> to specify the default CAM profile for EG (dual-CAM) line cards. • Enter the keyword <code>ipv4-320k</code> to specify the CAM profile that provides 320K entries for the IPv4 Forwarding Information Base (FIB). • Enter the keyword <code>ipv4-egacl-16k</code> to specify the CAM profile that provides 16K entries for egress ACLs. • Enter the keyword <code>ipv6-extacl</code> to specify the CAM profile that provides IPv6 functionality. • Enter the keyword <code>l2-ipv4-inacl</code> to specify the CAM profile that provides 32K entries for ingress ACLs. • Enter the keyword <code>unified-default</code> to specify the CAM profile that maintains the CAM allocations for the IPv6 and IPv4 FIB while allocating more CAM space for the Ingress and Egress Layer 2 ACL, and IPv4 ACL regions. • Enter the keyword <code>ipv4-vrf</code> to specify the CAM profile that maintains the CAM allocations for the IPv4 FIB while allocating CAM space for VRF. • Enter the keyword <code>ipv4-v6-vrf</code> to specify the CAM profile that maintains the CAM allocations for the IPv4 and IPv6 FIB while allocating CAM space for VRF.
<i>microcode</i> <i>microcode</i>	Choose the microcode to display. Not all microcodes are available to be paired with a CAM profile. <ul style="list-style-type: none"> • Enter the keyword <code>default</code> to select the microcode that distributes CAM space for a typical deployment. • Enter the keyword <code>lag-hash-align</code> to select the microcode for applications that require the same hashing for bi-directional traffic. • Enter the keyword <code>lag-hash-mpls</code> to select the microcode for hashing based on MPLS labels (up to five labels deep). • Enter the keyword <code>ipv6-extacl</code> to select the microcode for IPv6. • Enter the keyword <code>acl-group</code> to select the microcode for applications that need 16k egress IPv4 ACLs. • Enter the keyword <code>ipv4-vrf</code> to select the microcode for IPv4 VRF applications. • Enter the keyword <code>ipv4-v6-vrf</code> to select the microcode for IPv4 and IPv6 VRF applications. • Enter the keyword <code>ipv4-64k-ipv6</code> to specify the CAM profile that provides an alternate to <code>ipv6-extacl</code> that redistributes CAM space from the IPv4 FIB to IPv4Flow and IPv6 FIB.
<i>summary</i>	(OPTIONAL) Enter this keyword to view a summary listing of the CAM profile and microcode on the chassis and all line cards.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.2.1.0	Added support for <code>ipv4-64k-ipv6</code> profile
Version 7.9.1.0	Added support for VRF protocols.
Version 6.3.1.0	Introduced on E-Series

Usage Information

If the CAM profile has been changed, this command displays the current CAM profile setting in one column and in the other column displays the CAM profile and the microcode that will be configured for the chassis and all online line cards *after the next reboot*.

**Example
(show
cam-profile
summary)**

```
FTOS#show cam-profile summary

-- Chassis CAM Profile --
      : Current Settings : Next Boot
Profile Name      : Default           : Default
MicroCode Name   : Default           : Default

      : Current Settings : Next Boot
-- Line card 1 --
Profile Name      : Default           : Default
MicroCode Name   : Default           : Default

      : Current Settings : Next Boot
-- Line card 6 --
Profile Name      : Default           : Default
MicroCode Name   : Default           : Default
FTOS#
```

**Example
(show
cam-profile)**

```
FTOS#show cam-profile

-- Chassis Cam Profile --

CamSize          : 18-Meg
      : Current Settings : Next Boot
Profile Name     : DEFAULT           : DEFAULT
L2FIB           : 32K entries        : 32K entries
L2ACL           : 1K entries          : 1K entries
IPv4FIB         : 256K entries        : 256K entries
IPv4ACL         : 12K entries         : 12K entries
IPv4Flow        : 24K entries         : 24K entries
EgL2ACL         : 1K entries          : 1K entries
EgIPv4ACL       : 1K entries          : 1K entries
Reserved        : 8K entries          : 8K entries
IPv6FIB         : 0 entries           : 0 entries
IPv6ACL         : 0 entries           : 0 entries
IPv6Flow        : 0 entries           : 0 entries
EgIPv6ACL       : 0 entries           : 0 entries
MicroCode Name  : Default             : Default

-- Line card 0 --
CamSize          : 18-Meg
      : Current Settings : Next Boot
Profile Name     : DEFAULT           : DEFAULT
L2FIB           : 32K entries        : 32K entries
L2ACL           : 1K entries          : 1K entries
IPv4FIB         : 256K entries        : 256K entries
IPv4ACL         : 12K entries         : 12K entries
IPv4Flow        : 24K entries         : 24K entries
EgL2ACL         : 1K entries          : 1K entries
EgIPv4ACL       : 1K entries          : 1K entries
Reserved        : 8K entries          : 8K entries
IPv6FIB         : 0 entries           : 0 entries
IPv6ACL         : 0 entries           : 0 entries
IPv6Flow        : 0 entries           : 0 entries
EgIPv6ACL       : 0 entries           : 0 entries
MicroCode Name  : Default             : Default
FTOS#
```

show cam-usage

E

Display Layer 2, Layer 3, ACL, or all CAM usage statistics.

Syntax

show cam-usage [acl | router | switch]

Parameters

acl	(OPTIONAL) Enter this keyword to display Layer 2 and Layer 3 ACL CAM usage.
router	(OPTIONAL) Enter this keyword to display Layer 3 CAM usage.
switch	(OPTIONAL) Enter this keyword to display Layer 2 CAM usage.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 6.5.1.0 Introduced on E-Series

Example

```
FTOS#show cam-usage
Linecard|Portpipe| CAM Partition | Total CAM | Used CAM | Available CAM
=====|=====|=====|=====|=====|=====
      1 |      0 | IN-L2 ACL |      1008 |      320 |      688
      |      | IN-L2 FIB |     32768 |     1132 |     31636
      |      | IN-L3 ACL |     12288 |         2 |     12286
      |      | IN-L3 FIB |    262141 |         14 |    262127
      |      | IN-L3-SysFlow |      2878 |         45 |      2833
      |      | IN-L3-TrcList |      1024 |          0 |      1024
      |      | IN-L3-McastFib |      9215 |          0 |      9215
      |      | IN-L3-Qos |      8192 |          0 |      8192
      |      | IN-L3-PBR |      1024 |          0 |      1024
      |      | IN-V6 ACL |          0 |          0 |          0
      |      | IN-V6 FIB |          0 |          0 |          0
      |      | IN-V6-SysFlow |          0 |          0 |          0
      |      | IN-V6-McastFib |          0 |          0 |          0
      |      | OUT-L2 ACL |      1024 |          0 |      1024
      |      | OUT-L3 ACL |      1024 |          0 |      1024
      |      | OUT-V6 ACL |          0 |          0 |          0
      1 |      1 | IN-L2 ACL |      320 |          0 |      320
      |      | IN-L2 FIB |     32768 |     1136 |     31632
      |      | IN-L3 ACL |     12288 |         2 |     12286
      |      | IN-L3 FIB |    262141 |         14 |    262127
      |      | IN-L3-SysFlow |      2878 |         44 |      2834
--More--
```

Example (show cam-usage acl)

```
FTOS#show cam-usage acl
Linecard|Portpipe| CAM Partition | Total CAM | Used CAM | Available CAM
=====|=====|=====|=====|=====|=====
      11 |      0 | IN-L2 ACL |      1008 |          0 |      1008
      |      | IN-L3 ACL |     12288 |          2 |     12286
      |      | OUT-L2 ACL |      1024 |          2 |      1022
      |      | OUT-L3 ACL |      1024 |          0 |      1024
```

FTOS#

Example (show cam-usage router)

```
FTOS#show cam-usage router
Linecard|Portpipe| CAM Partition | Total CAM | Used CAM | Available CAM
=====|=====|=====|=====|=====|=====
      11 |      0 | IN-L3 ACL |      8192 |          3 |      8189
```

		IN-L3 FIB	196607	1	196606
		IN-L3-SysFlow	2878	0	2878
		IN-L3-TrcList	1024	0	1024
		IN-L3-McastFib	9215	0	9215
		IN-L3-Qos	8192	0	8192
		IN-L3-PBR	1024	0	1024
		OUT-L3 ACL	16384	0	16384
11	1	IN-L3 ACL	8192	3	8189
		IN-L3 FIB	196607	1	196606
		IN-L3-SysFlow	2878	0	2878
		IN-L3-TrcList	1024	0	1024
		IN-L3-McastFib	9215	0	9215
		IN-L3-Qos	8192	0	8192
		IN-L3-PBR	1024	0	1024
		OUT-L3 ACL	16384	0	16384

FTOS#

FTOS#show cam-usage switch

Linecard	Portpipe	CAM Partition	Total CAM	Used CAM	Available CAM
11	0	IN-L2 ACL	7152	0	7152
		IN-L2 FIB	32768	1081	31687
		OUT-L2 ACL	0	0	0
11	1	IN-L2 ACL	7152	0	7152
		IN-L2 FIB	32768	1081	31687
		OUT-L2 ACL	0	0	0

FTOS#

Example
(show cam-usage switch)

test cam-usage

C E S

Verify that enough CAM space is available for the IPv6 ACLs you have created.

Syntax

test cam-usage service-policy input *input policy name* linecard {*number* | all}

Parameters

<i>policy-map name</i>	Enter the name of the policy-map to verify.
<i>number</i>	Enter all to get information for all the linecards/stack-units, or enter the linecard/stack-unit <i>number</i> to get information for a specific card. Range: 0-6 for E-Series, 0-7 for C-Series, 0-7 for S-Series.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0 Introduced

Usage Information

This command applies to both IPv4 and IPv6 CAM Profiles, but is best used when verifying QoS optimization for IPv6 ACLs.

QoS Optimization for IPv6 ACLs does not impact the CAM usage for applying a policy on a single (or the first of several) interfaces. It is most useful when a policy is applied across multiple interfaces; it can reduce the impact to CAM usage across subsequent interfaces.

**Example
(C-Series)**

The following examples show some sample output when using the test cam-usage command.

```
FTOS#test cam-usage service-policy input LauraMapTest linecard all
```

```
Linecard | Portpipe | CAM Partition | Available CAM | Estimated CAM per Port | Status
-----|-----|-----|-----|-----|-----
      2 |      1 | IPv4Flow |      232 |      0 | Allowed
      2 |      1 | IPv6Flow |       0 |      0 | Allowed
      4 |      0 | IPv4Flow |      232 |      0 | Allowed
      4 |      0 | IPv6Flow |       0 |      0 | Allowed
FTOS#
```

```
FTOS#test cam-usage service-policy input LauraMapTest linecard 4 port-set 0
```

```
Linecard | Portpipe | CAM Partition | Available CAM | Estimated CAM per Port | Status
-----|-----|-----|-----|-----|-----
      4 |      0 | IPv4Flow |      232 |      0 | Allowed
      4 |      0 | IPv6Flow |       0 |      0 | Allowed
FTOS#
```

```
FTOS#test cam-usage service-policy input LauraMapTest linecard 2 port-set 1
```

```
Linecard | Portpipe | CAM Partition | Available CAM | Estimated CAM per Port | Status
-----|-----|-----|-----|-----|-----
      2 |      1 | IPv4Flow |      232 |      0 | Allowed
      2 |      1 | IPv6Flow |       0 |      0 | Allowed
FTOS#
```

Table 11-1. Output Explanations: test cam-usage (C-Series)

Term	Explanation
Linecard	Lists the line card or linecards that are checked. Entering all shows the status for linecards in the chassis
Portpipe	Lists the portpipe (port-set) or port pipes (port-sets) that are checked. Entering all shows the status for linecards and port-pipes in the chassis.
CAM Partition	Shows the CAM profile of the CAM
Available CAM	Identifies the amount of CAM space remaining for that profile
Estimated CAM per Port	Estimates the amount of CAM space the listed policy will require.
Status	Indicates whether or not the policy will be allowed in the CAM

**Example
(S-Series)**

```
FTOS#test cam-usage service-policy input LauraIn stack-unit all
```

```
Stack-Unit | Portpipe | CAM Partition | Available CAM | Estimated CAM per Port | Status
-----|-----|-----|-----|-----|-----
      0 |      0 | IPv4Flow |      102 |      0 | Allowed
      0 |      1 | IPv4Flow |      102 |      0 | Allowed
FTOS#
!
FTOS#test cam-usage service-policy input LauraIn stack-unit 0 port-set 1
```



```


Stack-Unit | Portpipe | CAM Partition | Available CAM | Estimated CAM per Port | Status
-----
0 | 1 | IPv4Flow | 102 | 0 | Allowed
FTOS#

```

Table 11-2. Output Explanations: test cam-usage (S-Series)

Term	Explanation
Stack-Unit	Lists the stack unit or units that are checked. Entering all shows the status for all stacks.
Portpipe	Lists the portpipe (port-set) or port pipes (port-sets) that are checked. Entering all shows the status for linecards and port-pipes in the chassis.
CAM Partition	Shows the CAM profile of the CAM
Available CAM	Identifies the amount of CAM space remaining for that profile
Estimated CAM per Port	Estimates the amount of CAM space the listed policy will require.
Status	Indicates whether or not the policy will be allowed in the CAM

CAM IPv4flow Commands

IPv4Flow sub-partitions are supported on the E-Series TeraScale platform 

The 18-megabit user configurable CAM is divided into multiple regions such as Layer 2 FIB, Layer 3 FIB, IPv4Flow, IPv4 Ingress ACL, etc. The IPv4Flow region is further sub-divided into 5 regions: System Flow, QoS, PBR, Trace-lists, Multicast FIB & ACL.

You can change the amount of CAM space allocated to each sub-region. You can configure the IPv4Flow region in both EtherScale and TeraScale. In EtherScale, these commands allocate CAM space for IPv4Flow sub-regions and the IPv4 ACL region.

Like CAM profiles, you can configure the IPv4Flow region from EXEC Privilege and CONFIGURATION mode.

The CAM IPv4flow commands are:

- [cam ipv4flow \(EXEC Privilege\)](#)
- [cam-ipv4flow \(CONFIGURATION\)](#)
- [show cam-ipv4flow](#)

cam ipv4flow (EXEC Privilege)

E **T**

Configure the amount of CAM space in IPv4flow sub-regions.

This command is deprecated as of FTOS 8.3.1.0.

Syntax

cam ipv4flow { chassis all | linecard *number* } { default | acl *value* multicast-fib *value* pbr *value* qos *value* system-flow *value* trace-list *value* }

Command Modes

EXEC Privilege

Command History

Version 8.3.1.0	COMMAND DEPRECATED
Version 6.3.1.0	Introduced on E-Series

cam-ipv4flow (CONFIGURATION)

E **T**

Configure the amount of CAM space in IPv4flow sub-regions.

Syntax

cam-ipv4flow { default | multicast-fib *value* pbr *value* qos *value* system-flow *value* trace-list *value* }

Parameters

default	Enter the keyword default to reset the IPV4Flow CAM region to its default setting.
multicast-fib <i>value</i>	Enter the keyword multicast-fib followed by the number of entries for the multicast FIB sub-region in 1K increments. Range: 1 to 32 KB Default: 9 KB
pbr <i>value</i>	Enter the keyword pbr followed by the number of entries for the PBR sub-region in 1K increments. Range: 1 to 32 KB Default: 1 KB
qos <i>value</i>	Enter the keyword qos followed by the number of entries for the QoS sub-region in 1K increments. Range: 1 to 32 KB Default: 8 KB
system-flow <i>value</i>	Enter the keyword system-flow followed by the number of entries for the system-flow sub-region in 1K increments. Range: 4 to 32 KB Default: 5 KB
trace-list <i>value</i>	Enter the keyword trace-list followed by the number of entries for the trace-list sub-region in 1K increments. Range: 1 to 32 KB Default: 1 KB

Defaults

Parameters

Command Modes

CONFIGURATION

Command History	Version 6.3.1.0	Introduced on E-Series
Usage Information	CAM profile changes take effect after the next chassis reboot.	
Related Commands	copy	Save the running configuration.
	show cam-ipv4flow	Display the CAM IPv4flow entries.

show cam-ipv4flow

E **T**

Display details about the IPv4Flow sub-regions.

Syntax show cam-ipv4flow

Command Modes EXEC Privilege

Command History	Version 6.3.1.0	Introduced on E-Series
------------------------	-----------------	------------------------

Example

```

FTOS#show cam-ipv4flow

-- Chassis Cam Ipv4Flow --
          Current Settings  Next Boot
Acl      : 8K                5K
Multicast Fib/Acl : 9K                12K
Pbr      : 1K                1K
Qos      : 8K                8K
System Flow : 5K                5K
Trace Lists : 1K                1K

-- Line card 2 --
          Current Settings  Next Boot
Acl      : 5K                0K
Multicast Fib/Acl : 9K                12K
Pbr      : 1K                1K
Qos      : 8K                8K
System Flow : 5K                5K
Trace Lists : 1K                1K

-- Line card 8 --
          Current Settings  Next Boot
Acl      : 5K                0K
Multicast Fib/Acl : 9K                12K
Pbr      : 1K                1K
Qos      : 8K                8K
System Flow : 5K                5K
Trace Lists : 1K                1K

-- Line card 13 --
          Current Settings  Next Boot
Acl      : 5K                0K
Multicast Fib/Acl : 9K                12K
Pbr      : 1K                1K
Qos      : 8K                8K
System Flow : 5K                5K
Trace Lists : 1K                1K
FTOS#

```

```

FTOS#show cam-ipv4flow

-- Chassis Cam Ipv4Flow --
          Current Settings  Next Boot
Acl      : 8K              5K
Multicast Fib/Acl : 9K              12K
Pbr      : 1K              1K
Qos      : 8K              8K
System Flow : 5K              5K
Trace Lists : 1K              1K

-- Line card 2 --
          Current Settings  Next Boot
Acl      : 5K              0K
Multicast Fib/Acl : 9K              12K
Pbr      : 1K              1K
Qos      : 8K              8K
System Flow : 5K              5K
Trace Lists : 1K              1K

-- Line card 8 --
          Current Settings  Next Boot
Acl      : 5K              0K
Multicast Fib/Acl : 9K              12K
Pbr      : 1K              1K
Qos      : 8K              8K
System Flow : 5K              5K
Trace Lists : 1K              1K

-- Line card 13 --
          Current Settings  Next Boot
Acl      : 5K              0K
Multicast Fib/Acl : 9K              12K
Pbr      : 1K              1K
Qos      : 8K              8K
System Flow : 5K              5K
Trace Lists : 1K              1K
FTOS#

```

Usage Information


If the IPv4Flow sub-region has been changed, this command displays the current IPv4Flow configuration in one column and in the other column displays the IPv4Flow configuration that will be loaded *after the next reboot*.

Related Commands

[cam-ipv4flow \(CONFIGURATION\)](#)

Configure the amount of CAM space in IPv4flow sub-regions.

CAM Layer 2 ACL Commands

IPv4Flow sub-partitions are supported on the E-Series TeraScale platform 

The CAM Layer 2 ACL commands are:

- [cam l2acl \(EXEC Privilege\)](#)
- [cam-l2acl \(CONFIGURATION\)](#)
- [show cam-l2acl](#)

The 18-megabit user configurable CAM is divided into multiple regions such as Layer 2 FIB, Layer 3 FIB, IPv4Flow, IPv4 Ingress ACL, etc. The Layer 2 ACL region is further sub-divided into 6 regions: Sysflow, L2ACL, PVST, QoS, L2PT, FRRP.

You can change the amount of CAM space, in percentage, allocated to each sub-region. The amount of space that you can distribute to the sub-partitions is equal to the amount of CAM space that the selected CAM profile allocates to the Layer 2 ACL partition. FTOS requires that you specify the amount of CAM space for all sub-partitions and that the sum of all sub-partitions is 100%.

Like CAM profiles, you can configure the Layer 2 ACL partition from EXEC Privilege mode or CONFIGURATION mode.

cam l2acl (EXEC Privilege)

E **T**

Re-allocate the amount of space, in percentage, for each Layer 2 ACL CAM sub-partition.

This command is deprecated as of FTOS 8.3.1.0

Syntax

cam l2acl { chassis all | linecard *number* } { default | system-flow *percentage* l2acl *percentage* pvst *percentage* qos *percentage* l2pt *percentage* frrp *percentage* }

Command Modes

EXEC Privilege

Command History

Version 8.3.1.0 COMMAND DEPRECATED

Version 7.7.1.0 Introduced on E-Series

cam-l2acl (CONFIGURATION)

E **T**

Re-allocate the amount of space, in percentage, for each Layer 2 ACL CAM sub-partition.

Syntax

cam-l2acl { default | system-flow *percentage* l2acl *percentage* pvst *percentage* qos *percentage* l2pt *percentage* frrp *percentage* }

Parameters

default	Enter this keyword to reset the Layer 2 ACL CAM sub-partition space allocations to the default values (Sysflow: 6, L2ACL: 14, PVST: 50, QoS: 12, L2PT: 13, FRRP: 5).
system-flow <i>percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for system flow entries. Enter the keyword system-flow and specify the percentage. Range: 5 to 100
l2acl <i>percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for Layer 2 ACL entries. Enter the keyword l2acl and specify the percentage. Range: 5 to 95

<i>pvst percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for PVST+ entries. Enter the keyword <i>pvst</i> and specify the percentage. Range: 5 to 95
<i>qos percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for QoS entries. Enter the keyword <i>qos</i> and specify the percentage. Range: 5 to 95
<i>l2pt percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for L2PT entries. Enter the keyword <i>l2pt</i> and specify the percentage. Range: 5 to 95
<i>frp percentage</i>	Allocate a percentage of the Layer 2 ACL CAM space for FRRP entries. Enter the keyword <i>frp</i> and specify a percentage. Range: 5 to 95

Command Modes

CONFIGURATION

Command History

Version 7.7.1.0 Introduced on E-Series

Usage Information

The PVST sub-partition requires a minimum number of entries when employing PVST+. the CAM chapter of the FTOS Configuration Guide for the E-Series.

Related Commands

[show cam-l2acl](#) Display the percentage of the Layer 2 ACL CAM partition that is allocated to each Layer 2 ACL CAM sub-partition.

show cam-l2acl

Display the percentage of the Layer 2 ACL CAM partition that is allocated to each Layer 2 ACL CAM sub-partition. If configuration has changed, the command displays the current configuration and the configuration that FTOS will write to the CAM after the next chassis reboot.

Syntax

show cam-l2acl

Command Modes

EXEC Privilege

Command History

Version 7.7.1.0 Introduced on E-Series

Example

```
FTOS#show cam-l2acl

-- Chassis Cam L2-ACL --
      Current Settings(in percent)
Sysflow  :          6
L2Acl    :          14
Pvst     :          50
Qos      :          12
L2pt     :          13
Frrp     :           5

-- Line card 1 --
      Current Settings(in percent)
Sysflow  :          6
L2Acl    :          14
```

```
Pvst      :      50
Qos       :      12
L2pt     :      13
Frrp     :       5

-- Line card 5 --
          Current Settings (in percent)
Sysflow  :       6
L2Acl   :      14
--More--
```

**Related
Commands**

cam-l2acl (CONFIGURATION)	Re-allocate the amount of space, in percentage, for each Layer 2 ACL CAM sub-partition.
---	---

Control Plane Policing (CoPP)

Overview

The CoPP commands are supported on the Dell Force10 **S4810** **S4820T** and **Z** Z-Series platforms as indicated by the characters that appear under each of the command headings.

Commands

- [control-plane-cpuqos](#)
- [service-policy rate-limit-cpu-queues](#)
- [service-policy rate-limit-protocols](#)
- [show cpu-queue rate cp](#)
- [show ip protocol-queue-mapping](#)
- [show ipv6 protocol-queue-mapping](#)
- [show mac protocol-queue-mapping](#)

control-plane-cpuqos

S4810

Enter control-plane mode and configure the switch to manage control-plane traffic.

S4820T

Syntax

control-plane-cpuqos

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

service-policy rate-limit-cpu-queues

S4810

Apply a policy map for the system to rate limit control traffic on a per-queue basis.

S4820T

Syntax

service-policy rate-limit-cpu-queues *policy-name*

Parameters

<i>policy-name</i>	Enter the service-policy name, in a string up to 140 characters.
--------------------	--

Defaults

Not configured.

Command Modes

CONTROL-PLANE-CPUQOS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Usage Information

A policy-map must be created by associating a queue number with the qos-policy.

The QoS policies must be created prior to enabling this command.

Related Commands

qos-policy-input	Create a QoS input policy map.
class-map	Create a QoS class map.
policy-map-input	Create an input policy map.

service-policy rate-limit-protocols

S4810

Apply a policy for the system to rate limit control protocols on a per-protocol basis.

S4820T

Syntax

service-policy rate-limit-protocols *policy-name*

Parameters

<i>policy-name</i>	Enter the service-policy name, in a string up to 140 characters.
--------------------	--

Defaults

Not configured.

Command Modes

CONTROL-PLANE-CPUQOS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Usage Information

This command applies the service-policy based on the type of protocol defined in the ACL rules.

The ACL and QoS policies must be created prior to enabling this command.

**Related
Commands**

ip access-list extended	Create an extended IP ACL
ipv6 access-list	Create an IPv6 ACL
mac access-list extended	Create an extended MAC ACL.
qos-policy-input	Create a QoS input policy map.
class-map	Create a QoS class map.
policy-map-input	Create an input policy map.

show cpu-queue rate cp

S4810

Display the rates for each queue.

S4820T**Syntax**

show cpu-queue rate cp

Defaults

Not configured.

Command Modes

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Example

```
FTOS#show cpu-queue rate cp
Service-Queue          Rate (PPS)
-----
Q0                      1300
Q1                      300
Q2                      300
Q3                      300
Q4                      2000
Q5                      400
Q6                      400
Q7                      1100
FTOS#
```

show ip protocol-queue-mapping

S4810

Display the queue mapping for each configured protocol.

S4820T**Syntax**

show ip protocol-queue-mapping

Defaults

Not configured.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Example

```

FTOS#show ip protocol-queue-mapping
Protocol  Src-Port  Dst-Port  TcpFlag  Queue  EgPort  Rate (kbps)
-----  -
TCP (BGP)  any/179   179/any   _        Q6     CP       100
UDP (DHCP) 67/68     68/67     _        Q6/Q5  CP       _
UDP (DHCP-R) 67       67        _        Q6     CP       _
TCP (FTP)   any       21        _        Q6     CP       _
ICMP       any       any       _        Q6     CP       _
IGMP       any       any       _        Q7     CP       _
TCP (MSDP) any/639   639/any   _        Q6     CP       _
UDP (NTP)  any       123       _        Q6     CP       _
OSPF       any       any       _        Q7     CP       _
PIM        any       any       _        Q7     CP       _
UDP (RIP)  any       520       _        Q7     CP       _
TCP (SSH)  any       22        _        Q6     CP       _
TCP (TELNET) any      23        _        Q6     CP       _
VRRP      any       any       _        Q7     CP       _
FTOS#

```

show ipv6 protocol-queue-mapping

S4810

Display the queue mapping for each configured IPv6 protocol.

S4820T**Syntax**

show ipv6 protocol-queue-mapping

Defaults

Not configured.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Example

```

FTOS#show ipv6 protocol-queue-mapping
Protocol  Src-Port  Dst-Port  TcpFlag  Queue  EgPort  Rate (kbps)
-----  -
TCP (BGP)  any/179   179/any   _        Q6     CP       _
ICMP       any       any       _        Q6     CP       _
VRRP      any       any       _        Q7     CP       _
FTOS#

```

show mac protocol-queue-mapping

S4810

Display the queue mapping for the MAC protocols.

S4820T

Syntax show mac protocol-queue-mapping

Defaults Not configured.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.8.0 Introduced on S4810

Example

```
FTOS#show mac protocol-queue-mapping
Protocol      Destination Mac      EtherType      Queue      EgPort      Rate (kbps)
-----
ARP           any                  0x0806        Q5/Q6      CP           --
FRRP         01:01:e8:00:00:10/11 any              Q7         CP           --
LACP         01:80:c2:00:00:02   0x8809        Q7         CP           --
LLDP         any                  0x88cc        Q7         CP           --
GVRP         01:80:c2:00:00:21   any            Q7         CP           --
STP          01:80:c2:00:00:00   any            Q7         CP           --
ISIS         01:80:c2:00:00:14/15 any            Q7         CP           --
              09:00:2b:00:00:04/05 any            Q7         CP           --
FTOS#
```


Data Center Bridging

Overview

Data center bridging (DCB) refers to a set of IEEE Ethernet enhancements that provide data centers with a single, robust, converged network to support multiple traffic types, including LAN, server, and storage traffic.

DCB and Switch Stacking Caveats for the S4820T

The following is a list of behaviors and limitations regarding the use of DCB over S4820T ports involved in switch stacking:

- You can enable DCB only on 40 Gig (QSPF+) ports.
- DCB is not supported over any of the 48 RJ-45 10 Gig ports while they are configured in stacking mode.
- You cannot configure stacking on any of the 48 RJ-45 10 Gig ports, if DCB is enabled on any of the 40 Gig stacking ports.
- If DCB is enabled, it will disable the ability to use any of the 48 10 Gig ports for stacking.

The Dell Force10 operating software (FTOS) commands for data center bridging features include 802.1Qbb priority-based flow control (PFC), 802.1Qaz enhanced transmission selection (ETS), and the Data Center Bridging Exchange (DCBX) protocol. CLI commands for individual DCB features are as follows:

DCB Command

- `dcb-enable`

PFC Commands

- `clear pfc counters`
- `dcb-input`
- `dcb-policy input`
- `dcb-policy input stack-unit stack-ports all`
- `dcb stack-unit pfc-buffering pfc-port pfc-queues`
- `description`
- `pfc link-delay`
- `pfc mode on`
- `pfc priority`

- `pfc no-drop queues`
- `show dcb`
- `show interface pfc`
- `show interface pfc statistics`
- `show qos dcb-input`
- `show stack-unit stack-ports pfc detail`

ETS Commands

- `bandwidth-percentage`
- `clear ets counters`
- `dcb-enable`
- `dcb-output`
- `dcb-policy output`
- `dcb-policy output stack-unit stack-ports all`
- `description`
- `ets mode on`
- `priority-list`
- `priority-group`
- `priority-group qos-policy`
- `qos-policy-output ets`
- `scheduler`
- `set-pgid`
- `show interface ets`
- `show qos dcb-output`
- `show qos priority-groups`
- `show stack-unit stack-ports ets detail`

DCBX Commands

- `advertise dcbx-appln-tlv`
- `advertise dcbx-tlv`
- `dcbx version`
- `dcbx port-role`
- `fcoe priority-bits`
- `iscsi priority-bits`
- `debug dcbx`
- `show interface dcbx detail*`

advertise dcbx-appln-tlv

54810

On a DCBX port with a manual role, configure the application priority TLVs advertised on the interface to DCBX peers.

54820T

Syntax `advertise dcbx-appln-tlv {fcoe | iscsi}`

To remove the application priority TLVs, use the `no advertise dcbx-appln-tlv {fcoe | iscsi}` command.

Parameters

`{fcoe | iscsi}`

Enter the application priority TLVs, where:

- **fcoe**: enables the advertisement of FCoE in application priority TLVs.
- **iscsi**: enables the advertisement of iSCSI in application priority TLVs.

Defaults Application priority TLVS are enabled to advertise FCoE and iSCSI.

Command Modes PROTOCOL LLDP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information To disable TLV transmission, use the `no` form of the command; for example, `no advertise dcbx-appln-tlv iscsi`.

advertise dcbx-tlv

S4810

On a DCBX port with a manual role, configure the PFC and ETS TLVs advertised to DCBX peers.

S4820T

Syntax `advertise dcbx-tlv {ets-conf | ets-reco | pfc} [ets-conf | ets-reco | pfc] [ets-conf | ets-reco | pfc]`

To remove the advertised ETS TLVs, use the `no advertise dcbx-tlv` command.

Parameters

{ets-conf ets-reco pfc}	Enter the PFC and ETS TLVs to be advertised, where: <ul style="list-style-type: none"> <code>ets-conf</code>: enables the advertisement of ETS configuration TLVs. <code>ets-reco</code>: enables the advertisement of ETS recommend TLVs. <code>pfc</code>: enables the advertisement of PFC TLVs.
-----------------------------	--

Defaults All PFC and ETS TLVs are advertised.

Command Modes PROTOCOL LLDP

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information You can configure the transmission of more than one TLV type at a time; for example: `advertise dcbx-tlv ets-conf ets-reco`.

You can enable ETS recommend TLVs (`ets-reco`) only if ETS configuration TLVs (`ets-conf`) are enabled. To disable TLV transmission, use the `no` form of the command; for example, `no advertise dcbx-tlv pfc ets-reco`.

DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.

Configure DCBX operation at the `INTERFACE` level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the `show interface dcbx detail` command.

bandwidth-percentage

S4810

Configure the bandwidth percentage allocated to priority traffic in port queues.

S4820T

Syntax bandwidth-percentage *percentage*

To remove the configured bandwidth percentage, use the `no bandwidth-percentage` command.

Parameters

<i>percentage</i>	(Optional) Enter the bandwidth percentage. The percentage range is 1 to 100% in units of 1%.
-------------------	---

Defaults none

Command Modes QOS-POLICY-OUT-ETS

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

By default, equal bandwidth is assigned to each port queue and each dot1p priority in a priority group. Use the **bandwidth-percentage** command to configure bandwidth amounts in associated dot1p queues. When specified bandwidth is assigned to some port queues and not to others, the remaining bandwidth (100% minus assigned bandwidth amount) is equally distributed to unassigned non-strict priority queues in the priority group. The sum of the allocated bandwidth to all queues in a priority group should be 100% of the bandwidth on the link.

ETS-assigned bandwidth allocation applies only to data queues, not to control queues.

The configuration of bandwidth allocation and strict-queue scheduling is not supported at the same time for a priority group. If both are configured, the configured bandwidth allocation will be ignored for priority-group traffic when you apply the output policy on an interface.

By default, equal bandwidth is assigned to each priority group in the ETS output policy applied to an egress port if no bandwidth allocation is configured. The sum of configured bandwidth allocation to dot1p priority traffic in all ETS priority groups must be 100%. You must allocate at least 1% of the total bandwidth to each priority group and queue. If bandwidth is assigned to some priority groups but not to others, the remaining bandwidth (100% minus assigned bandwidth amount) is equally distributed to non-strict-priority groups which have no configured scheduler.

Related Commands

qos-policy-output ets	Create a QoS output policy.
scheduler	Schedule priority traffic in port queues.

clear ets counters

S4810

Clear all ETS TLV counters on an interface.

S4820T

Syntax	clear ets counters port-type slot/port
Parameters	<hr/> port-type Enter the keyword port-type followed by the slot/port information. <hr/>
Defaults	none
Command Modes	EXEC Privilege
Command History	<hr/> Version 8.3.19.0 Introduced on the S4820T. <hr/> Version 8.3.12.0 Introduced on the S4810. <hr/> Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module <hr/>

clear pfc counters

S4810

Clear the PFC TLV counters and PFC statistics on an interface or stack unit.

S4820T

Syntax	clear pfc counters [port-type slot/port stack-unit {unit number all } all stack-ports all]]
Parameters	<hr/> port-type Enter the keyword port-type followed by the slot/port information. <hr/> stack-unit <i>unit number</i> Enter the keyword stack-unit followed by the stack-unit number to be cleared. <hr/> <i>all stack-ports all</i> Enter the keyword all stack-ports all to clear the counters on all interfaces. <hr/>
Defaults	none
Command Modes	EXEC Privilege
Command History	<hr/> Version 8.3.19.0 Introduced on the S4820T. <hr/> Version 8.3.12.0 Introduced on the S4810. <hr/> Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module <hr/>

dcb-enable

S4810

Enable Data Center Bridging.

S4820T

Syntax	dcb enable To disable DCB, use the no dcb enable command.
Defaults	none
Command Modes	CONFIGURATION

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Related Commands	dcb-policy input	Apply the input policy with the PFC configuration to an ingress interface.
-------------------------	----------------------------------	--

Usage Information By default, iSCSI is enabled on the unit and flowcontrol is enabled on all of the interfaces or if link-level flow control is enabled on one or more interfaces. To enable DCB, do one of the following:

- Apply the **dcb-input policy** command with the command **no pfc-mode on** to all the interfaces.
- Disable flow-control on all of the interfaces.

dcb-input

S4810

Create a DCB input policy to apply pause or flow control for specified priorities using a configure delay time.

S4820T

Syntax `dcb-input policy-name`

To delete the DCB input policy, use the `no dcb-input` command.

Parameters	<i>policy-name</i>	Maximum: 32 alphanumeric characters.
-------------------	--------------------	--------------------------------------

Defaults none

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information As soon as you apply a DCB policy with PFC enabled on an interface, DCBX starts exchanging information with PFC-enabled peers. The IEEE802.1Qbb, CEE, and CIN versions of PFC TLV are supported. DCBX also validates PFC configurations received in TLVs from peer devices.

By applying a DCB input policy with PFC enabled, you enable PFC operation on ingress port traffic. To achieve complete lossless handling of traffic, you must also enable PFC on all DCB egress ports or configure the dot1p priority-queue assignment of PFC priorities to lossless queues (refer to [pfc no-drop queues](#)).

To remove a DCB input policy, including the PFC configuration it contains, enter the **no dcb-input *policy-name*** command in interface configuration mode.

Related Commands	dcb-policy input	Apply the input policy with the PFC configuration.
-------------------------	----------------------------------	--

dcb-output

S4810

Create a DCB output policy to associate an ETS configuration with priority traffic.

S4820T

Syntax `dcb-output policy-name`

To remove the ETS output policy globally, use the `no dcb output policy-name` command.

Parameters

<i>policy-name</i>	Enter the DCB output policy name. Maximum: 32 alphanumeric characters.
--------------------	---

Defaults none

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

Create a DCB output policy to associate a priority group with an ETS output policy with scheduling and bandwidth configuration. You can apply a DCB output policy on multiple egress ports. When you apply an ETS output policy on an interface, ETS-configured scheduling and bandwidth allocation take precedence over any configured settings in QoS output policies.

The ETS configuration associated with 802.1 priority traffic in a DCB output policy is used in DCBX negotiation with ETS peers.

Related Commands

dcb-policy output	Apply the output policy.
-----------------------------------	--------------------------

dcb-policy input

S4810

Apply the input policy with the PFC configuration to an ingress interface.

Syntax `dcb-policy input policy-name`

To delete the input policy, use the `no dcb-policy input` command.

Parameters

<i>policy name</i>	Enter the input policy name with the PFC configuration to an ingress interface.
--------------------	---

Defaults none

Command Modes INTERFACE

Command History

Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

If you apply an input policy with PFC disabled ([no pfc mode on](#)):

- Link-level flow control can be enabled on the interface. To delete the input policy, you must first disable link-level flow control. PFC is then enabled automatically on the interface because an interface is by default PFC-enabled.
- PFC still allows you to configure lossless queues on a port to ensure no-drop handling of lossless traffic.

When you apply an input policy to an interface, an error message is displayed if:

- The PFC dot1p priorities result in more than two lossless port queues globally on the switch.
- Link-level flow control is already enabled. PFC and link-level flow control cannot be enabled at the same time on an interface.

In a switch stack, you must configure all stacked ports with the same PFC configuration.

A DCB input policy for PFC applied to an interface may become invalid if the dot1p-queue mapping is reconfigured. This situation occurs when the new dot1p-queue assignment exceeds the maximum number (2) of lossless queues supported globally on the switch. In this case, all PFC configurations received from PFC-enabled peers are removed and re-synchronized with the peer devices.

Traffic may be interrupted when you reconfigure PFC no-drop priorities in an input policy or re-apply the policy to an interface.

Related Commands

dcb-input	Create a DCB input policy.
---------------------------	----------------------------

dcb-policy input stack-unit stack-ports all

S4810

Apply the specified DCB input policy on all ports of the switch stack or a single stacked switch.

S4820T

Syntax

`dcb-policy input stack-unit {all | stack-unit-id} stack-ports all dcb-input-policy-name`

To remove all DCB input policies applied to the stacked ports and rest the PFC to its default settings, use the `no dcb-policy input stack-unit all` command.

To remove only the DCB input policies applied to the specified switch, use the `no dcb-policy input stack-unit` command.

Parameters

<i>stack-unit-id</i>	Enter the stack unit identification.
<i>dcb-input-policy-name</i>	Enter the policy name for the DCB input policy.

Defaults

None

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Usage Information	The <code>dcb-policy input stack-unit all</code> command overwrites any previous <code>dcb-policy input stack-unit stack-unit-id</code> configurations. Similarly, a <code>dcb-policy input stack-unit stack-unit-id</code> command overwrites any previous <code>dcb-policy input stack-unit all</code> configuration.	
Related Commands	dcb-policy output stack-unit stack-ports all Apply the specified DCB output policy.	

dcb-policy output

S4810

Apply the output policy with the ETS configuration to an egress interface.

S4820T

Syntax `dcb-policy output policy-name`

To delete the output policy, use the `no dcb-policy output` command.

Parameters	<i>policy name</i>	Enter the output policy name.
-------------------	--------------------	-------------------------------

Defaults none

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information When you apply an ETS output policy to on interface, ETS-configured scheduling and bandwidth allocation take precedence over any configured settings in QoS output policies.

When DCB is disabled, ETS is disabled by default. When DCB is enabled, ETS is enabled for all interfaces that has the default ETS configuration applied (all dot1p priorities in the same group with equal bandwidth allocation).

Related Commands	dcb-output	Create a DCB output policy.
-------------------------	----------------------------	-----------------------------

dcb-policy output stack-unit stack-ports all

S4810

Apply the specified DCB output policy on all ports of the switch stack or a single stacked switch.

S4820T

Syntax `dcb-policy output stack-unit {all | stack-unit-id} stack-ports all dcb-output-policy-name`

To remove all DCB output policies applied to the stacked ports, use the `no dcb-policy output stack-unit all` command.

To remove only the DCB output policies applied to the specified switch, use the `no dcb-policy output stack-unit` command.

Parameters	<i>stack-unit-id</i>	Enter the stack unit identification.
	<i>dcb-output-policy-name</i>	Enter the policy name for the DCB output policy.

Defaults none

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information The `dcb-policy output stack-unit all` command overwrites any previous `dcb-policy output stack-unit stack-unit-id` configurations. Similarly, a `dcb-policy output stack-unit stack-unit-id` command overwrites any previous `dcb-policy output stack-unit all` configuration.

You can apply a DCB output policy with ETS configuration to all stacked ports in a switch stack or an individual stacked switch. You can apply different DCB output policies to different stack units.

Related Commands	dcb-policy input stack-unit	Apply the specified DCB input policy.
	stack-ports all	

dcb stack-unit all pfc-buffering pfc-port pfc-queues

S4810

Configure the PFC buffer for all switches in the stack.

S4820T

Syntax `dcb stack-unit all pfc-buffering pfc-port {1-64} pfc-queues {1-2}`

To remove the configuration for the PFC buffer on all switches in the stack, use the `no dcb stack-unit all pfc-buffering pfc-port-count pfc-queues` command.

Parameters	<i>pfc-port-count</i> {1-64}	Enter the pfc-port count. Range: 1 to 64.
	<i>pfc-queues</i> {1-2}	Enter the pfc-queue number. Range: 1 to 2.

Defaults The PFC buffer is enabled on all ports on the stack unit.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

If you configure PFC on a 40GbE port, count the 40GbE port as four PFC-enabled ports in the `pfc-port` number you enter in the command syntax.

To achieve lossless PFC operation, the PFC port count and queue number used for the reserved buffer size that is created must be greater than or equal to the buffer size required for PFC-enabled ports and lossless queues on the switch.

You must reload the stack or a specified stack unit (use the `reload` command in EXEC Privilege mode) for the PFC buffer configuration to take effect.

Related Commands

dcb stack-unit pfc-buffering pfc-port pfc-queues	Configure the PFC buffer for all port pipes in a specified stack unit.
--	--

dcb stack-unit pfc-buffering pfc-port pfc-queues

S4810

Configure the PFC buffer for all port pipes in a specified stack unit by specifying the port-pipe number, number of PFC-enabled ports, and number of configured lossless queues.

S4820T

Syntax

`dcb stack-unit stack-unit-id [port-set port-set-id] pfc-buffering pfc-ports { 1-64} pfc-queues { 1-2}`

To remove the configuration for the PFC buffer on all port pipes in a specified stack unit, use the `no dcb stack-unit stack-unit-id [port-set port-set-id] pfc-buffering pfc-ports pfc-queues` command.

Parameters

<code><i>stack-unit-id</i></code>	Enter the stack-unit identification. Range:0 to 5.
<code>port-set</code>	Enter the port-set identification.
<code>pfc-ports { 1-65}</code>	Enter the pfc-ports. Range:1 to 64.
<code>pfc-queues { 1-2}</code>	Enter the pfc-queue number. Range:1 to 2.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

If you configure PFC on a 40GbE port, count the 40GbE port as four PFC-enabled ports in the `pfc-port` number you enter in the command syntax.

To achieve lossless PFC operation, the PFC port count and queue number used for the reserved buffer size that is created must be greater than or equal to the buffer size required for PFC-enabled ports and lossless queues on the switch.

You must reload the stack or a specified stack unit (use the `reload` command in EXEC Privilege mode) for the PFC buffer configuration to take effect.

**Related
Commands**

[dcb stack-unit all pfc-buffering pfc-port pfc-queues](#) Configure the PFC buffer for all switches in the stack.

dcbx port-role

S4810

Configure the DCBX port role used by the interface to exchange DCB information.

S4820T

Syntax

`dcbx port-role {config-source | auto-downstream | auto-upstream | manual}`

To remove DCBX port role, use the `no dcbx port-role {config-source | auto-downstream | auto-upstream | manual}` command.

Parameters

<code>config-source auto-downstream auto-upstream manual</code>	Enter the DCBX port role, where: <ul style="list-style-type: none">• config-source: configures the port to serve as the configuration source on the switch.• auto-upstream: configures the port to receive a peer configuration. The configuration source is elected from auto-upstream ports.• auto-downstream: configures the port to accept the internally propagated DCB configuration from a configuration source.• manual: configures the port to operate only on administer-configured DCB parameters. The port does not accept a DCB configuration received from a peer or a local configuration source.
---	---

Defaults

Manual.

Command Modes

INTERFACE PROTOCOL LLDP

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

**Usage
Information**

DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.

Configure DCBX operation at the INTERFACE level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the `show interface dcbx detail` command.

dcbx version

S4810

Configure the DCBX version used on the interface.

S4820T

Syntax

`dcbx version {auto | cee | cin | ieee-v2.5}`

To remove the DCBX version, use the `dcbx version {auto | cee | cin | ieee-v2.5}` command.

Parameters	<p>auto cee cin ieee-v2.5</p> <p>Enter the DCBX version type used on the interface, where:</p> <ul style="list-style-type: none"> auto: configures the port to operate using the DCBX version received from a peer. cee: configures the port to use CDD (Intel 1.01). cin: configures the port to use Cisco-Intel-Nuova (DCBX 1.0). ieee-v2: configures the port to use IEEE 802.1az (Draft 2.5). 						
Defaults	Auto						
Command Modes	<p>PROTOCOL LLDP</p> <p>INTERFACE PROTOCOL LLDP</p>						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on the S4820T.</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 8.3.16.0</td> <td>Introduced on MXL 10/40GbE Switch IO Module</td> </tr> </table>	Version 8.3.19.0	Introduced on the S4820T.	Version 8.3.12.0	Introduced on the S4810.	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Version 8.3.19.0	Introduced on the S4820T.						
Version 8.3.12.0	Introduced on the S4810.						
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module						
Usage Information	<p>DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.</p> <p>Configure DCBX operation at the INTERFACE level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the <code>show interface dcbx detail</code> command.</p>						

debug dcbx

S4810

Enable DCBX debugging.

S4820T

Syntax `debug dcbx {all | auto-detect-timer | config-exchng | fail | mgmt | resource | sem | tlv}`

To disable DCBX debugging, use the `no debug dcbx` command.

Parameters	<p><i>{all auto-detect-timer config-exchng fail mgmt resource sem tlv}</i></p> <p>Enter the type of debugging, where:</p> <ul style="list-style-type: none"> all: enables all DCBX debugging operations. auto-detect-timer: enables traces for DCBX auto-detect timers. config-exchng: enables traces for DCBX configuration exchanges. fail: enables traces for DCBX failures. mgmt: enables traces for DCBX management frames. resource: enables traces for DCBX system resource frames. sem: enables traces for the DCBX state machine. tlv: enables traces for DCBX TLVs.
Defaults	none
Command Modes	EXEC PRIVILEGE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

description

S4810

Enter a text description of the DCB policy (PFC input or ETS output).

S4820T**Syntax** `description text`

To remove the text description, use the `no description` command.

Parameters

<i>text</i>	Enter the description of the output policy. Maximum: 32 characters.
-------------	--

Defaults none**Command Modes** DCB INPUT POLICY

DCB OUTPUT POLICY

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Related Commands

dcb-input	Create a DCB PFC input policy.
dcb-policy input	Apply the output policy.
dcb-output	Create a DCBETS output policy.
dcb-policy output	Apply the output policy.

ets mode on

S4810

Enable the ETS configuration so that scheduling and bandwidth allocation configured in an ETS output policy or received in a DCBX TLV from a peer can take effect on an interface.

S4820T**Syntax** `ets mode on`

To remove the ETS configuration, use the `no ets mode on` command.

Defaults ETS mode is on.**Command Modes** DCB OUTPUT POLICY

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Usage Information	If you disable ETS in an output policy applied to an interface using the <code>no ets mode on</code> command, any previously configured QoS settings at the interface or global level take effect. If QoS settings are configured at the interface or global level and in an output policy map (<code>service-policy output</code> command), the QoS configuration in the output policy takes precedence.	
Related Commands	dcb-output	Create a DCB output policy.
	dcb-policy output	Apply the output policy.

fcoe priority-bits

S4810

Configure the FCoE priority advertised for the FCoE protocol in application priority TLVs.

S4820T

Syntax `fcoe priority-bits priority-bitmap`

To remove the configured FCoE priority, use the `no fcoe priority-bits` command.

Parameters	<i>priority-bitmap</i>	Enter the priority-bitmap range. Range: 1 to FF.
-------------------	------------------------	---

Defaults 0x8

Command Modes PROTOCOL LLDP

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information This command is available at the global level only.

iscsi priority-bits

S4810

Configure the iSCSI priority advertised for the iSCSI protocol in application priority TLVs.

S4820T

Syntax `iscsi priority-bits priority-bitmap`

To remove the configured iSCSI priority, use the `no iscsi priority-bits` command.

Parameters	<i>priority-bitmap</i>	Enter the priority bitmap. Range: 1 to FF.
Defaults	0x10	
Command Modes	PROTOCOL LLDP	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Usage Information	This command is available at the global level only.	

pfc link-delay

S4810

Configure the link delay used to pause specified priority traffic.

S4820T

Syntax pfc link-delay *value*

To remove the link delay, use the no pfc link-delay command.

Parameters	<i>value</i>	Range: (in quanta) 712-65535. One quantum is equal to a 512-bit transmission.
Defaults	45556 quantum	
Command Modes	DCB INPUT POLICY	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Related Commands	dcb-input	Create a DCB input policy.
Usage Information	The minimum link delay should be greater than the round-trip transmission time required by a peer to honor a PFC pause frame multiplied by the number of PFC-enabled ingress ports.	

pfc mode on

S4810

Enable the PFC configuration on the port so that the priorities are included in DCBX negotiation with peer PFC devices.

S4820T

Syntax pfc mode on

To disable the PFC configuration, use the `no pfc mode on` command.

Defaults	PFC mode is on.
Command Modes	DCB INPUT POLICY
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.12.0 Introduced on the S4810.
	Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module
Usage Information	By applying a DCB input policy with PFC enabled, you enable PFC operation on ingress port traffic. To achieve complete lossless handling of traffic, you must also enable PFC on all DCB egress ports or configure the dot1p priority-queue assignment of PFC priorities to lossless queues (see pfc no-drop queues).
	To disable PFC operation on an interface, enter the no pfc mode on command in DCB input policy configuration mode. PFC is enabled and disabled as global DCB operation is enabled (dcb-enable) or disabled (no dcb-enable).
	PFC and link-level flow control cannot be enabled at the same time on an interface.
Related Commands	dcb-input Create a DCB input policy.

pfc no-drop queues

S4810

Configure the port queues that will still function as no-drop queues for lossless traffic.

S4820T

Syntax	<code>pfc no-drop queues <i>queue-range</i></code>
	To remove the no-drop port queues, use the <code>no pfc no-drop queues</code> command.
Parameters	<i>queue-range</i> Enter the queue range. Separate the queue values with a comma; specify a priority range with a dash; for example, <code>pfc no-drop queues 1,3</code> or <code>pfc no-drop queues 2-3</code> . Range: 0 to 3.
Defaults	No lossless queues are configured.
Command Modes	INTERFACE
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.12.0 Introduced on the S4810.
	Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module
Usage Information	The maximum number of lossless queues globally supported on the switch is two.

Table 13-1 lists the dot1p priority-queue assignments.

Table 13-1. dot1p Priority-Queue Assignments

dot1p Value in the Incoming Frame	Egress Queue Assignment
0	0
1	0
2	0
3	1
4	2
5	3
6	3
7	3

pfcc priority

S4810

S4820T

Configure the CoS traffic to be stopped for the specified delay.

Syntax `pfcc priority priority-range`

To delete the pfcc priority configuration, use the `no pfcc priority` command.

Parameters

priority-range Enter the 802.1p values of the frames to be paused. Separate the priority values with a comma; specify a priority range with a dash; for example, `pfcc priority 1,3,5-7`.
Range: 0 to 7.

Defaults None

Command Modes DCB INPUT POLICY

Command History

Version 8.3.19.0 Introduced on the S4820T.
Version 8.3.12.0 Introduced on the S4810.
Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module

Related Commands

[dcb-input](#) Create a DCB input policy.

Usage Information

you can enable any number of 802.1p priorities for PFC. Queues to which PFC priority traffic is mapped are lossless by default. Traffic may be interrupted due to an interface flap (going down and coming up) when you reconfigure the lossless queues for no-drop priorities in a PFC input policy and re-apply the policy to an interface.

The maximum number of lossless queues supported on the switch is two.

The configured priority traffic must be supported by a PFC peer (as detected by DCBX) for PFC to be applied.

priority-group

S4810

Create an ETS priority group to use with an ETS output policy.

S4820T

Syntax `priority-group group-name`

To remove the priority group, use the `no priority-group` command.

Parameters

<code><i>group-name</i></code>	Enter the name of the ETS priority group. Maximum: 32 characters.
--------------------------------	--

Defaults none

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

A priority group consists of 802.1p priority values that are grouped together for similar bandwidth allocation and scheduling, and that share the same latency and loss requirements. All 802.1p priorities mapped to the same queue should be in the same priority group.

All 802.1p priorities should be configured in priority groups associated with an ETS output policy. You can assign each dot1p priority to only one priority group.

The maximum number of priority groups supported in ETS output policies on an interface is equal to the number of data queues (4) on the port. The 802.1p priorities in a priority group can map to multiple queues.

If you configure more than one priority queue as strict priority or more than one priority group as strict priority, the higher numbered priority queue is given preference when scheduling data traffic

Related Commands

priority-list	Configure the 802.1p priorities for an ETS output policy.
set-pgid	Configure the priority-group.

priority-group qos-policy

S4810

Associate the 802.1p priority traffic in a priority group with the ETS configuration in a QoS output policy.

S4820T

Syntax `priority-group group-name qos-policy ets-policy-name`

To remove the 802.1p priority group, use the `no priority-group qos-policy` command.

Parameters	<i>group-name</i>	Enter the group name of the 802.1p priority group. Maximum: 32 characters.
	<i>ets-policy-name</i>	Enter the ETS policy name.
Defaults	none	
Command Modes	DCB OUTPUT POLICY	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Usage Information	The ETS configuration associated with 802.1p priority traffic in a DCB output policy is used in DCBX negotiation with ETS peers.	
	If you disable ETS in an output policy applied to an interface using the <code>no ets mode on</code> command, any previously configured QoS settings at the interface or global level take effect. If QoS settings are configured at the interface or global level and in an output policy map (<code>service-policy output</code> command), the QoS configuration in the output policy takes precedence.	
Related Commands	dcb-output	Create a DCB output policy.
	dcb-policy output	Apply the output policy.

priority-list

S4810

Configure the 802.1p priorities for the traffic on which you want to apply an ETS output policy.

S4820T

Syntax `priority-list value`

To remove the priority list, use the `no priority-list` command.

Parameters	<i>value</i>	Enter the priority list value. Separate priority values with a comma; specify a priority range with a dash; for example, <code>priority-list 3,5-7</code> . Range: 0 to 7.
	none	
Defaults	none	
Command Modes	PRIORITY-GROUP	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Usage Information	By default:	

- All 802.1p priorities are grouped in priority group 0.
- 100% of the port bandwidth is assigned to priority group 0. The complete bandwidth is equally assigned to each priority class so that each class has 12-13%.

Related Commands

priority-group	Create an ETS priority group.
priority-group qos-policy	Associate an ETS priority group with an ETS output policy.
set-pgid	Configure the priority-group.

qos-policy-output ets

S4810

Create a QoS output policy to configure the ETS bandwidth allocation and scheduling for priority traffic.

S4820T

Syntax qos-policy-output *policy-name* ets

To remove the QoS output policy, use the no qos-policy-output ets command.

Parameters

<i>policy-name</i>	Enter the policy name. Maximum: 32 characters.
--------------------	---

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

If an error occurs in an ETS output-policy configuration, the configuration is ignored and the scheduler and bandwidth allocation settings are reset to the ETS default values (all priorities are in the same ETS priority group and bandwidth is allocated equally to each priority).

If an error occurs when a port receives a peer's ETS configuration, the port's configuration is reset to the previously configured ETS output policy. If no ETS output policy was previously applied, the port is reset to the default ETS parameters.

Related Commands

scheduler	Schedule priority traffic in port queues.
bandwidth-percentage	Bandwidth percentage allocated to priority traffic in port queues.

scheduler

S4810

Configure the method used to schedule priority traffic in port queues.

S4820T

Syntax scheduler *value*

To remove the configured priority schedule, use the `no scheduler` command.

Parameters	<i>value</i>	Enter schedule priority value. Range: strict : strict priority traffic is serviced before any other queued traffic.
-------------------	--------------	---

Defaults WERR scheduling is used to queue priority traffic.

Command Modes POLICY-MAP-OUT-ETS

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information dot1p priority traffic on the switch is scheduled to the current queue mapping. dot1p priorities within the same queue should have the same traffic properties and scheduling method.

ETS-assigned scheduling applies only to data queues, not to control queues.

The configuration of bandwidth allocation and strict-queue scheduling is not supported at the same time for a priority group. If both are configured, the configured bandwidth allocation will be ignored for priority-group traffic when you apply the output policy on an interface.

Related Commands	qos-policy-output ets	Configure the ETS bandwidth allocation.
	bandwidth-percentage	Bandwidth percentage allocated to priority traffic in port queues.

set-pgid

S4810

Configure the priority-group identifier.

S4820T

Syntax `set-pgid value`

To remove the priority group, use the `no set-pgid` command.

Parameters	<i>value</i>	Enter the priority group identification. Range: 0 to 7.
-------------------	--------------	--

Defaults none

Command Modes PRIORITY-GROUP

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

**Related
Commands**

priority-group qos-policy	Create an ETS priority group.
priority-list	Configure the 802.1p priorities.

show dcb

S4810

Displays the data center bridging status, the number of PFC-enabled ports, and the number of PFC-enabled queues.

S4820T**Syntax**

show dcb [stack-unit *unit-number*] [port-set port-set *port-set number*]

Parameters

<i>unit number</i>	Enter the DCB unit number. Range: 0 to 5.
<i>port-set number</i>	Enter the port-set number

Command Mode

EXEC PRIVILEGE

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show dcb
stack-unit 0 port-set 0
      DCB Status : Enabled
      PFC Port Count : 56 (current), 56 (configured)
      PFC Queue Count : 2 (current), 2 (configured)
```

**Usage
Information**

Specify a stack-unit number on the Master switch in a stack.

show interface dcbx detail*

S4810

Displays the DCBX configuration on an interface.

S4820T**Syntax**

show interface *port-type slot/port* dcbx detail

Parameters

<i>port-type</i>	Enter the port type.
<i>slot/port</i>	Enter the slot/port number.

Command Mode

EXEC PRIVILEGE

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```

FTOS(conf)# show interface tengigabitethernet 0/49 dcbx detail
FTOS#show interface te 0/49 dcbx detail

E-ETS Configuration TLV enabled           e-ETS Configuration TLV disabled
R-ETS Recommendation TLV enabled          r-ETS Recommendation TLV disabled
P-PFC Configuration TLV enabled           p-PFC Configuration TLV disabled
F-Application priority for FCOE enabled    f-Application Priority for FCOE
disabled                                  disabled
I-Application priority for iSCSI enabled   i-Application Priority for iSCSI
disabled                                  disabled
-----
-----

Interface TenGigabitEthernet 0/49
  Remote Mac Address 00:00:00:00:00:11
  Port Role is Auto-Upstream
  DCBX Operational Status is Enabled
  Is Configuration Source? TRUE

Local DCBX Compatibility mode is CEE
  Local DCBX Configured mode is CEE
  Peer Operating version is CEE
  Local DCBX TLVs Transmitted: ErPfi

Local DCBX Status
-----
  DCBX Operational Version is 0
  DCBX Max Version Supported is 0
  Sequence Number: 2
  Acknowledgment Number: 2
  Protocol State: In-Sync

Peer DCBX Status:
-----
  DCBX Operational Version is 0
  DCBX Max Version Supported is 255
  Sequence Number: 2
  Acknowledgment Number: 2
  Total DCBX Frames transmitted 27
  Total DCBX Frames received 6
  Total DCBX Frame errors 0
  Total DCBX Frames unrecognized 0

```

Table 13-2 lists the show interface dcbx detail field descriptions.

Table 13-2. show interface dcbx detail Command Example Fields

Field	Description
Interface	Interface type with chassis slot and port number.
Port-Role	Configured the DCBX port role: auto-upstream, auto-downstream, config-source, or manual.
DCBX Operational Status	Operational status (enabled or disabled) used to elect a configuration source and internally propagate a DCB configuration. The DCBX operational status is the combination of PFC and ETS operational status.
Configuration Source	Specifies whether the port serves as the DCBX configuration source on the switch: true (yes) or false (no).
Local DCBX Compatibility mode	DCBX version accepted in a DCB configuration as compatible. In auto-upstream mode, a port can only received a DCBX version supported on the remote peer.
Local DCBX Configured mode	DCBX version configured on the port: CEE, CIN, IEEE v2.5, or Auto (port auto-configures to use the DCBX version received from a peer).
Peer Operating version	DCBX version that the peer uses to exchange DCB parameters.
Local DCBX TLVs Transmitted	Transmission status (enabled or disabled) of advertised DCB TLVs (see TLV code at the top of the show command output).

Table 13-2. show interface dcbx detail Command Example Fields (continued)

Field	Description
Local DCBX Status: DCBX Operational Version	DCBX version advertised in Control TLVs.
Local DCBX Status: DCBX Max Version Supported	Highest DCBX version supported in Control TLVs.
Local DCBX Status: Sequence Number	Sequence number transmitted in Control TLVs.
Local DCBX Status: Acknowledgment Number	Acknowledgement number transmitted in Control TLVs.
Local DCBX Status: Protocol State	Current operational state of the DCBX protocol: ACK or IN-SYNC.
Peer DCBX Status: DCBX Operational Version	DCBX version advertised in Control TLVs received from the peer device.
Peer DCBX Status: DCBX Max Version Supported	Highest DCBX version supported in Control TLVs received from the peer device.
Peer DCBX Status: Sequence Number	Sequence number transmitted in Control TLVs received from the peer device.
Peer DCBX Status: Acknowledgment Number	Acknowledgement number transmitted in Control TLVs received from the peer device.
Total DCBX Frames transmitted	Number of DCBX frames sent from the local port.
Total DCBX Frames received	Number of DCBX frames received from the remote peer port.
Total DCBX Frame errors	Number of DCBX frames with errors received.
Total DCBX Frames unrecognized	Number of unrecognizable DCBX frames received.

**Usage
Information**

To clear DCBX frame counters, use the `clear dcbx counters interface stack-unit/port` command.

show interface ets

S4810

Displays the ETS configuration applied to egress traffic on an interface, including priority groups with priorities and bandwidth allocation.

S4820T

Syntax `show interface port-type slot/port ets {summary | detail}`

Parameters

port-type slot/port ets Enter the port-type slot and port ETS information.

{**summary** | **detail**} Enter the keyword **summary** for a summary list of results or enter the keyword **detail** for a full list of results.

Command Mode

EXEC PRIVILEGE

Command History

Version 8.3.19.0 Introduced on the S4820T.

Version 8.3.12.0 Introduced on the S4810.

Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module

Example (ets summary)

FTOS(conf-qos-policy-out-ets)#show interface te 0/3 ets de

Interface TenGigabitEthernet 0/3
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on

Admin Parameters :

Admin is enabled

TC-grp	Priority#	Bandwidth	TSA
0		-	-
1	0,1,2	100%	ETS
2	3	0 %	SP
3	4,5,6,7	0 %	SP
4		-	-
5		-	-
6		-	-
7		-	-

Remote Parameters :

Remote is disabled

Local Parameters :

Local is enabled

TC-grp	Priority#	Bandwidth	TSA
0		-	-
1	0,1,2	100%	ETS
2	3	0 %	SP
3	4,5,6,7	0 %	SP
4		-	-
5		-	-
6		-	-
7		-	-

Oper status is init
ETS DCBX Oper status is Down
State Machine Type is Asymmetric
Conf TLV Tx Status is enabled
Reco TLV Tx Status is enabled

0 Input Conf TLV Pkts, 1955 Output Conf TLV Pkts, 0 Error Conf TLV Pkts
0 Input Reco TLV Pkts, 1955 Output Reco TLV Pkts, 0 Error Reco TLV Pkts

FTOS(conf-qos-policy-out-ets)#do sho int te 0/3 ets de

Interface TenGigabitEthernet 0/3
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on

Admin Parameters :

Admin is enabled

TC-grp	Priority#	Bandwidth	TSA
0		-	-
1	0,1,2	100%	ETS
2	3	0 %	SP
3	4,5,6,7	0 %	SP
4		-	-
5		-	-
6		-	-
7		-	-

Remote Parameters :

Remote is disabled

Local Parameters :

Local is enabled

TC-grp	Priority#	Bandwidth	TSA
0		-	-
1	0,1,2	100%	ETS
2	3	0 %	SP
3	4,5,6,7	0 %	SP
4		-	-
5		-	-
6		-	-
7		-	-

Oper status is init
ETS DCBX Oper status is Down
State Machine Type is Asymmetric
Conf TLV Tx Status is enabled
Reco TLV Tx Status is enabled

0 Input Conf TLV Pkts, 1955 Output Conf TLV Pkts, 0 Error Conf TLV Pkts
0 Input Reco TLV Pkts, 1955 Output Reco TLV Pkts, 0 Error Reco TLV Pkts

FTOS(conf)# show interfaces tengigabitethernet 0/0 ets detail

Interface TenGigabitEthernet 0/0
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on
Admin Parameters :

Admin is enabled
TC-grp Priority# Bandwidth TSA
0 0,1,2,3,4,5,6,7 100% ETS
1 0% ETS
2 0% ETS
3 0% ETS
4 0% ETS
5 0% ETS
6 0% ETS
7 0% ETS

Priority# Bandwidth TSA
0 13% ETS
1 13% ETS
2 13% ETS
3 13% ETS
4 12% ETS
5 12% ETS
6 12% ETS
7 12% ETS

Remote Parameters:

Remote is disabled

Local Parameters :

Local is enabled
TC-grp Priority# Bandwidth TSA
0 0,1,2,3,4,5,6,7 100% ETS
1 0% ETS
2 0% ETS
3 0% ETS
4 0% ETS
5 0% ETS
6 0% ETS
7 0% ETS

```

Priority# Bandwidth TSA
0 13% ETS
1 13% ETS
2 13% ETS
3 13% ETS
4 12% ETS
5 12% ETS
6 12% ETS
7 12% ETS
Oper status is init
Conf TLV Tx Status is disabled
Traffic Class TLV Tx Status is disabled
0 Input Conf TLV Pkts, 0 Output Conf TLV Pkts, 0 Error Conf TLV Pkts
0T LIVnput Traffic Class TLV Pkts, 0 Output Traffic Class TLV Pkts, 0 Error Traffic
Class
Pkts

```

**Example
(ets detail)**

```

FTOS(conf)# show interfaces tengigabitethernet 0/0 ets detail
Interface TenGigabitEthernet 0/0
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on
Admin Parameters :
-----
Admin is enabled
TC-grp  Priority#      Bandwidth      TSA
0         0,1,2,3,4,5,6,7  100%           ETS
1         0%                ETS
2         0%                ETS
3         0%                ETS
4         0%                ETS
5         0%                ETS
6         0%                ETS
7         0%                ETS

Priority#      Bandwidth      TSA
0              13%           ETS
1              13%           ETS
2              13%           ETS
3              13%           ETS
4              12%           ETS
5              12%           ETS
6              12%           ETS
7              12%           ETS

Remote Parameters:
-----
Remote is disabled

Local Parameters :
-----
Local is enabled
TC-grp  Priority#      Bandwidth      TSA
0         0,1,2,3,4,5,6,7  100%           ETS
1         0%                ETS
2         0%                ETS
3         0%                ETS
4         0%                ETS
5         0%                ETS
6         0%                ETS
7         0%                ETS

Priority#      Bandwidth      TSA
0              13%           ETS
1              13%           ETS
2              13%           ETS
3              13%           ETS
4              12%           ETS
5              12%           ETS
6              12%           ETS
7              12%           ETS

Oper status is init
Conf TLV Tx Status is disabled
Traffic Class TLV Tx Status is disabled
0 Input Conf TLV Pkts, 0 Output Conf TLV Pkts, 0 Error Conf TLV Pkts
0 Input Traffic Class TLV Pkts, 0 Output Traffic Class TLV Pkts, 0 Error Traffic Class
TLV
Pkts

```

Table 13-3 lists the show interface ets detail field descriptions.

Table 13-3. show interfaces ets detail Command Example Fields

Field	Description
Interface	Interface type with stack-unit and port number.
Max Supported TC Group	Maximum number of priority groups supported.
Number of Traffic Classes	Number of 802.1p priorities currently configured.
Admin mode	ETS mode: on or off. When on, the scheduling and bandwidth allocation configured in an ETS output policy or received in a DCBX TLV from a peer can take effect on an interface.
Admin Parameters	ETS configuration on local port, including priority groups, assigned dot1p priorities, and bandwidth allocation.
Remote Parameters	ETS configuration on remote peer port, including admin mode (enabled if a valid TLV was received or disabled), priority groups, assigned dot1p priorities, and bandwidth allocation. If ETS admin mode is enabled on the remote port for DCBX exchange, the Willing bit received in ETS TLVs from the remote peer is included.
Local Parameters	ETS configuration on local port, including admin mode (enabled when a valid TLV is received from a peer), priority groups, assigned dot1p priorities, and bandwidth allocation.
Operational status (local port)	Port state for current operational ETS configuration: <ul style="list-style-type: none"> • Init: Local ETS configuration parameters were exchanged with the peer. • Recommend: Remote ETS configuration parameters were received from the peer. • Internally propagated: ETS configuration parameters were received from the configuration source.
ETS DCBX Oper status	Operational status of the ETS configuration on the local port: match or mismatch.
State Machine Type	Type of state machine used for DCBX exchanges of ETS parameters: Feature - for legacy DCBX versions; Asymmetric - for an IEEE version.
Conf TLV Tx Status	Status of ETS Configuration TLV advertisements: enabled or disabled.
ETS TLV Statistic: Input Conf TLV pkts	Number of ETS Configuration TLVs received.
ETS TLV Statistic: Output Conf TLV pkts	Number of ETS Configuration TLVs transmitted.
ETS TLV Statistic: Error Conf TLV pkts	Number of ETS Error Configuration TLVs received.

Usage Information

To clear ETS TLV counters, use the clear ets counters interface *port-type slot/port* command.

show interface pfc

S4810

Displays the PFC configuration applied to ingress traffic on an interface, including priorities and link delay.

S4820T

Syntax show interface *port-type slot/port pfc* {summary | detail}

Parameters	port-type slot/ port pfc	Enter the port-type slot and port PFC information.
	{summary detail}	Enter the keyword summary for a summary list of results or enter the keyword detail for a full list of results.

Command Mode INTERFACE

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```

FTOS# show interfaces tengigabitethernet 0/49 pfc summary
Interface TenGigabitEthernet 0/49
  Admin mode is on
  Admin is enabled
  Remote is enabled, Priority list is 4
  Remote Willing Status is enabled
  Local is enabled
  Oper status is Recommended
  PFC DCBX Oper status is Up
  State Machine Type is Feature
  TLV Tx Status is enabled
  PFC Link Delay 45556 pause quantams
  Application Priority TLV Parameters :
  -----
  FCOE TLV Tx Status is disabled
  ISCSI TLV Tx Status is disabled
  Local FCOE PriorityMap is 0x8
  Local ISCSI PriorityMap is 0x10
  Remote FCOE PriorityMap is 0x8
  Remote ISCSI PriorityMap is 0x8

FTOS# show interfaces tengigabitethernet 0/49 pfc detail
Interface TenGigabitEthernet 0/49
  Admin mode is on
  Admin is enabled
  Remote is enabled
  Remote Willing Status is enabled
  Local is enabled
  Oper status is recommended
  PFC DCBX Oper status is Up
  State Machine Type is Feature
  TLV Tx Status is enabled
  PFC Link Delay 45556 pause quanta
  Application Priority TLV Parameters :
  -----
  FCOE TLV Tx Status is disabled
  ISCSI TLV Tx Status is disabled
  Local FCOE PriorityMap is 0x8
  Local ISCSI PriorityMap is 0x10
  Remote FCOE PriorityMap is 0x8
  Remote ISCSI PriorityMap is 0x8
  0 Input TLV pkts, 1 Output TLV pkts, 0 Error pkts, 0 Pause Tx pkts, 0 Pause Rx pkts

```

Usage Information To clear the PFC TLV counters, use the `clear pfc counters interface port-type slot/port` command.

Table 13-4 lists the show interface pfc summary field descriptions.

Table 13-4. show interfaces pfc summary Command Example Fields

Field	Description
Interface	Interface type with stack-unit and port number.
Admin mode is on Admin is enabled	PFC admin mode is on or off with a list of the configured PFC priorities. When the PFC admin mode is on, PFC advertisements are enabled to be sent and received from peers; received PFC configuration will take effect. The admin operational status for a DCBX exchange of PFC configuration is enabled or disabled.
Remote is enabled, Priority list Remote Willing Status is enabled	Operational status (enabled or disabled) of peer device for DCBX exchange of PFC configuration with a list of the configured PFC priorities. Willing status of peer device for DCBX exchange (Willing bit received in PFC TLV): enabled or disable.
Local is enabled	DCBX operational status (enabled or disabled) with a list of the configured PFC priorities.
Operational status (local port)	Port state for current operational PFC configuration: <ul style="list-style-type: none"> • Init: Local PFC configuration parameters were exchanged with the peer. • Recommend: Remote PFC configuration parameters were received from the peer. • Internally propagated: PFC configuration parameters were received from the configuration source.
PFC DCBX Oper status	Operational status for the exchange of the PFC configuration on the local port: match (up) or mismatch (down).
State Machine Type	Type of state machine used for DCBX exchanges of the PFC parameters: Feature - for legacy DCBX versions; Symmetric - for an IEEE version.
TLV Tx Status	Status of the PFC TLV advertisements: enabled or disabled.
PFC Link Delay	Link delay (in quanta) used to pause specified priority traffic.
Application Priority TLV: FCOE TLV Tx Status	Status of FCoE advertisements in application priority TLVs from the local DCBX port: enabled or disabled.
Application Priority TLV: SCSI TLV Tx Status	Status of iSCSI advertisements in application priority TLVs from the local DCBX port: enabled or disabled.
Application Priority TLV: Local FCOE Priority Map	Priority bitmap used by the local DCBX port in FCoE advertisements in application priority TLVs.
Application Priority TLV: Local iSCSI Priority Map	Priority bitmap used by the local DCBX port in iSCSI advertisements in application priority TLVs.
Application Priority TLV: Remote FCOE Priority Map	Status of FCoE advertisements in application priority TLVs from the remote peer port: enabled or disabled.
Application Priority TLV: Remote iSCSI Priority Map	Status of iSCSI advertisements in application priority TLVs from the remote peer port: enabled or disabled.
PFC TLV Statistics: Input TLV pkts	Number of PFC TLVs received.
PFC TLV Statistics: Output TLV pkts	Number of PFC TLVs transmitted.
PFC TLV Statistics: Error pkts	Number of PFC error packets received.

Table 13-4. show interfaces pfc summary Command Example Fields (continued)

Field	Description
PFC TLV Statistics: Pause Tx pkts	Number of PFC pause frames transmitted.
PFC TLV Statistics: Pause Rx pkts	Number of PFC pause frames received.

show interface pfc statistics

S4810

Displays counters for the PFC frames received and transmitted (by dot1p priority class) on an interface.

S4820T

Syntax show interface *port-type slot/port* pfc statistics

Parameters

<i>port-type</i>	Enter the port type.
<i>slot/port</i>	Enter the slot/port number.

Command Mode

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS#show interfaces te 0/0 pfc statistics
Interface TenGigabitEthernet 0/0
Priority Received PFC Frames Transmitted PFC Frames
-----
0           0           0
1           0           0
2           0           0
3           0           0
4           0           0
5           0           0
6           0           0
7           0           0
```

show qos dcb-input

S4810

Displays the PFC configuration in a DCB input policy.

S4820T

Syntax show qos dcb-input [*dcb-input-policy-name*]

Parameters

<i>dcb-input-policy-name</i>	Enter the PFC profile.
------------------------------	------------------------

Command Mode

EXEC PRIVILEGE

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module
Example	<pre>FTOS(conf)# show qos dcb-input dcb-input pfc-profile pfc link-delay 32 pfc priority 0-1 dcb-input pfc-profile1 no pfc mode on pfc priority 6-7</pre>	

show qos dcb-output

S4810

Displays the ETS configuration in a DCB output policy.

S4820T

Syntax show qos dcb-output [ets-profile]

Parameters	[ets-profile]	Enter the ETS profile.
-------------------	---------------	------------------------

Command Mode EXEC PRIVILEGE

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show qos dcb-output
dcb-output ets
  priority-group san qos-policy san
  priority-group ipc qos-policy ipc
  priority-group lan qos-policy lan
```

show qos priority-groups

S4810

Displays the ETS priority groups configured on the switch, including the 802.1p priority classes and ID of each group.

S4820T

Syntax show qos priority-groups

Command Mode EXEC PRIVILEGE

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS#show qos priority-groups
```



```

priority-group ipc
priority-list 4
set-pgid 2

```

show stack-unit stack-ports ets detail

S4810

Displays the ETS configuration applied to egress traffic on stacked ports, including ETS operational mode on each unit and the configured priority groups with dot1p priorities, bandwidth allocation, and scheduler type.

S4820T

Syntax show stack-unit {all | *stack-unit*} stack-ports {all | *port-number*} ets detail

Parameters

<i>stack-unit</i>	Enter the stack unit identification.
<i>port-number</i>	Enter the port number.

Command Mode

EXEC PRIVILEGE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS(conf)# show stack-unit all stack-ports all ets details
```

```

Stack unit 0 stack port all
Max Supported TC Groups is 4
Number of Traffic Classes is 1
Admin mode is on

Admin Parameters:
-----
Admin is enabled
TC-grp      Priority#          Bandwidth          TSA
-----
0           0,1,2,3,4,5,6,7  100%               ETS
1           -                 -                 -
2           -                 -                 -
3           -                 -                 -
4           -                 -                 -
5           -                 -                 -
6           -                 -                 -
7           -                 -                 -
8           -                 -                 -

Stack unit 1 stack port all
Max Supported TC Groups is 4
Number of Traffic Classes is 1
Admin mode is on
Admin Parameters:
-----
Admin is enabled
TC-grp      Priority#          Bandwidth          TSA
-----
0           0,1,2,3,4,5,6,7  100%               ETS
1           -                 -                 -
2           -                 -                 -
3           -                 -                 -
4           -                 -                 -

```

```

5           -           -
6           -           -
7           -           -
8           -           -

```

show stack-unit stack-ports pfc detail

S4810

Displays the PFC configuration applied to ingress traffic on stacked ports, including PFC operational mode on each unit with the configured priorities, link delay, and number of pause packets sent and received.

S4820T

Syntax `show stack-unit {all | stack-unit} stack-ports {all | port-number} pfc detail`

Parameters

stack-unit Enter the stack unit.

port-number Enter the port number.

Command Mode EXEC PRIVILEGE

Command History

Version 8.3.19.0 Introduced on the S4820T.

Version 8.3.12.0 Introduced on the S4810.

Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module

Example

```

FTOS(conf)# show stack-unit all stack-ports all pfc details

stack unit 0 stack-port all
  Admin mode is On
  Admin is enabled, Priority list is 4-5
  Local is enabled, Priority list is 4-5
  Link Delay 45556 pause quantum
  0 Pause Tx pkts, 0 Pause Rx pkts

stack unit 1 stack-port all
  Admin mode is On
  Admin is enabled, Priority list is 4-5
  Local is enabled, Priority list is 4-5
  Link Delay 45556 pause quantum
  0 Pause Tx pkts, 0 Pause Rx pkts

```

Dynamic Host Configuration Protocol (DHCP)

Overview

Dynamic Host Configuration Protocol (DHCP) is an application layer protocol that dynamically assigns IP addresses and other configuration parameters to network end-stations (hosts) based on configuration policies determined by network administrators.

The basic DHCP commands are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810** or **S4820T**.

- [Commands to Configure the System to be a DHCP Server](#)
- [Commands to Configure Secure DHCP](#)

Commands to Configure the System to be a DHCP Server

- [clear ip dhcp](#)
- [debug ip dhcp server](#)
- [default-router](#)
- [disable](#)
- [dns-server](#)
- [domain-name](#)
- [excluded-address](#)
- [hardware-address](#)
- [host](#)
- [disable](#)
- [lease](#)
- [netbios-name-server](#)
- [netbios-node-type](#)
- [network](#)

- [pool](#)
- [show ip dhcp binding](#)
- [show ip dhcp configuration](#)
- [show ip dhcp conflict](#)
- [show ip dhcp server](#)

clear ip dhcp

C **S** **S4810**
S4820T

Reset DHCP counters.

Syntax

clear ip dhcp [binding {address} | conflict | server statistics]

Parameters

binding	Enter this keyword to delete all entries in the binding table.
address	Enter the IP address to clear the binding entry for a single IP address.
conflicts	Enter this keyword to delete all of the log entries created for IP address conflicts.
server statistics	Enter this keyword to clear all the server counter information.

Command Mode

EXEC Privilege

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

Usage Information

Entering <CR> after **clear ip dhcp binding**, clears all the IPs from the binding table.

debug ip dhcp server

C **S**

Display FTOS debugging messages for DHCP.

Syntax

debug ip dhcp server [events | packets]

Parameters

events	Enter this keyword to display DHCP state changes.
packet	Enter this keyword to display packet transmission/reception.

Command Mode

EXEC Privilege

Default

None

Command History

Version 8.2.1.0	Introduced on C-Series and S-Series.
-----------------	--------------------------------------

default-router

C S S4810
S4820T

Assign a default gateway to clients based on address pool.

Syntax `default-router address [address2...address8]`

Parameters

<i>address</i>	Enter the a list of routers that may be the default gateway for clients on the subnet. You may specify up to 8. List them in order of preference.
----------------	---

Command Mode DHCP <POOL>

Default None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

disable

C S S4810
S4820T

Disable DHCP Server.

DHCP Server is disabled by default. Enable the system to be a DHCP server using the **no** form of the **disable** command.

Syntax `disable`

Command Mode CONFIGURATION

Default Disabled

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

dns-server

C S S4810
S4820T

Assign a DNS server to clients based on address pool.

Syntax `dns-server address [address2...address8]`

Parameters

<i>address</i>	Enter the a list of DNS servers that may service clients on the subnet. You may list up to 8 servers, in order of preference.
----------------	---

Command Mode DHCP <POOL>

Default None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

domain-name

C **S** **S4810**

Assign a domain to clients based on address pool.

S4820T

Syntax **domain-name** *name*

Parameters

<i>name</i>	Give a name to the group of addresses in a pool.
-------------	--

Command Mode DHCP <POOL>

Default None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

excluded-address

C **S** **S4810**

Prevent the server from leasing an address or range of addresses in the pool.

S4820T

Syntax **excluded-address** [*address* | *low-address high-address*]

Parameters

<i>address</i>	Enter a single address to be excluded from the pool.
<i>low-address</i>	Enter the lowest address in a range of addresses to be excluded from the pool.
<i>high-address</i>	Enter the highest address in a range of addresses to be excluded from the pool.

Command Mode DHCP

Default None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

hardware-address

C **S** **S4810**
S4820T

For manual configurations, specify the client hardware address.

Syntax

hardware-address *address*

Parameters

<i>address</i>	Enter the hardware address of the client.
----------------	---

Command Mode

DHCP <POOL>

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

host

C **S** **S4810**
S4820T

For manual (rather than automatic) configurations, assign a host to a single-address pool.

Syntax

host *address*

Parameters

<i>address/mask</i>	Enter the host IP address and subnet mask.
---------------------	--

Command Mode

DHCP <POOL>

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

lease

C **S** **S4810**
S4820T

Specify a lease time for the addresses in a pool.

Syntax `lease { days [hours] [minutes] | infinite }`

Parameters

<i>days</i>	Enter the number of days of the lease. Range: 0-31
<i>hours</i>	Enter the number of hours of the lease. Range: 0-23
<i>minutes</i>	Enter the number of minutes of the lease. Range: 0-59
infinite	Specify that the lease never expires.

Command Mode

DHCP <POOL>


Default

24 hours

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

netbios-name-server



Specify the NetBIOS Windows Internet Naming Service (WINS) name servers, in order of preference, that are available to Microsoft Dynamic Host Configuration Protocol (DHCP) clients.

Syntax

`netbios-name-server address [address2...address8]`

Parameters

<i>address</i>	Enter the address of the NETBIOS name server. You may enter up to 8, in order of preference.
----------------	--

Command Mode

DHCP <POOL>


Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

netbios-node-type



Specify the NetBIOS node type for a Microsoft DHCP client. Dell Force10 recommends specifying clients as hybrid.

Syntax

`netbios-node-type type`

Parameters	<i>type</i>	Enter the NETBIOS node type. Broadcast: Enter the keyword b-node. Hybrid: Enter the keyword h-node. Mixed: Enter the keyword m-node. Peer-to-peer: Enter the keyword p-node.
Command Mode	DHCP <POOL>	
Default	Hybrid	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Introduced on C-Series and S-Series.

network

C **S** **S4810**
S4820T

Specify the range of addresses in an address pool.

Syntax

network *network/prefix-length*

Parameters

<i>network /prefix-length</i>	Specify a range of addresses. Prefix-length Range: 17-31
-------------------------------	---

Command Mode

DHCP <POOL>

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

pool

C **S** **S4810**
S4820T

Create an address pool.

Syntax

pool *name*

Parameters

<i>name</i>	Enter the address pool's identifying name
-------------	---

Command Mode

DHCP

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on C-Series and S-Series.

show ip dhcp binding



Display the DHCP binding table.

Syntax**show ip dhcp binding****Command Mode**

EXEC Privilege

Default

None

Command History

Version 8.2.1.0	Introduced on C-Series and S-Series.
-----------------	--------------------------------------

show ip dhcp configuration



Display the DHCP configuration.

Syntax**show ip dhcp configuration [global | pool *name*]****Parameters**

<i>pool name</i>	Display the configuration for a DHCP pool.
global	Display the DHCP configuration for the entire system.

Command Mode

EXEC Privilege

Default

None

Command History

Version 8.2.1.0	Introduced on C-Series and S-Series.
-----------------	--------------------------------------

show ip dhcp conflict



Display the address conflict log.

Syntax**show ip dhcp conflict *address*****Parameters**

<i>address</i>	Display a particular conflict log entry.
----------------	--

Command Mode

EXEC Privilege

Default

None

Command History

Version 8.2.1.0	Introduced on C-Series and S-Series.
-----------------	--------------------------------------

show ip dhcp server

C S

Display the DHCP server statistics.

Syntax `show ip dhcp server statistics`

Command Mode EXEC Privilege

Default None

Command History

Version 8.2.1.0 Introduced on C-Series and S-Series.

Commands to Configure Secure DHCP

DHCP as defined by RFC 2131 provides no authentication or security mechanisms. Secure DHCP is a suite of features that protects networks that use dynamic address allocation from spoofing and attacks.

- [arp inspection](#)
- [arp inspection-trust](#)
- [clear ip dhcp snooping](#)
- [ip dhcp snooping](#)
- [ip dhcp snooping database](#)
- [ip dhcp snooping binding](#)
- [ip dhcp snooping database renew](#)
- [ip dhcp snooping trust](#)
- [ip dhcp source-address-validation](#)
- [ip dhcp snooping vlan](#)
- [ip dhcp relay information-option](#)
- [ip dhcp snooping verify mac-address](#)
- [show ip dhcp snooping](#)

arp inspection

C E S

Enable Dynamic Arp Inspection (DAI) on a VLAN.

S4810

S4820T

Syntax `arp inspection`

Command Modes INTERFACE VLAN

Default Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on E-Series.
	Version 8.2.1.0	Introduced on C-Series and S-Series
Related Commands	arp inspection-trust	Specify a port as trusted so that ARP frames are not validated against the binding table.

arp inspection-trust

C **E** **S**

S4810

S4820T

Specify a port as trusted so that ARP frames are not validated against the binding table.

Syntax **arp inspection-trust**

Command Modes INTERFACE
INTERFACE PORT-CHANNEL

Default Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on E-Series.
	Version 8.2.1.0	Introduced on C-Series and S-Series

Related Commands	arp inspection	Enable Dynamic ARP Inspection on a VLAN.
-------------------------	--------------------------------	--

clear ip dhcp snooping

C **E** **S**

Clear the DHCP binding table.

Syntax **clear ip dhcp snooping binding**

Command Modes EXEC Privilege

Default None

Command History	Version 8.3.1.0	Introduced on E-Series.
	Version 7.8.1.0	Introduced on C-Series and S-Series

Related Commands	show ip dhcp snooping	Display the contents of the DHCP binding table.
-------------------------	---------------------------------------	---

ip dhcp snooping

C **E** **S**

Enable DHCP Snooping globally.

Syntax `[no] ip dhcp snooping`

Command Modes CONFIGURATION

Default Disabled

Command History

Version 8.3.1.0	Introduced on E-Series.
Version 8.2.1.0	Introduced on C-Series and S-Series for Layer 2 interfaces.
Version 7.8.1.0	Introduced on C-Series and S-Series on Layer 3 interfaces.

Usage Information

When enabled, no learning takes place until snooping is enabled on a VLAN. Upon disabling DHCP Snooping the binding table is deleted, and Option 82, IP Source Guard, and Dynamic ARP Inspection are disabled.

Introduced in FTOS version 7.8.1.0, DHCP Snooping was available for Layer 3 only and dependent on DHCP Relay Agent (**ip helper-address**). FTOS version 8.2.1.0 extends DHCP Snooping to Layer 2, and you do not have to enable relay agent to snoop on Layer 2 interfaces.

Related Commands

ip dhcp snooping vlan	Enable DHCP Snooping on one or more VLANs.
---------------------------------------	--

ip dhcp snooping database

C **E** **S**

Delay writing the binding table for a specified time.

Syntax `ip dhcp snooping database write-delay minutes`

Parameters

<i>minutes</i>	Range: 5-21600
----------------	----------------

Command Modes CONFIGURATION

Default None

Command History

Version 8.3.1.0	Introduced on E-Series.
Version 7.8.1.0	Introduced on C-Series and S-Series

ip dhcp snooping binding

C **E** **S**

Create a static entry in the DHCP binding table.

S4810

S4820T

Syntax `[no] ip dhcp snooping binding mac address vlan-id vlan-id ip ip-address interface type slot/port lease number`

Parameters	
mac address	Enter the keyword <code>mac</code> followed by the MAC address of the host to which the server is leasing the IP address.
vlan-id <i>vlan-id</i>	Enter the keyword <code>vlan-id</code> followed by the VLAN to which the host belongs. Range: 2-4094
ip <i>ip-address</i>	Enter the keyword <code>ip</code> followed by the IP address that the server is leasing.
interface type	Enter the keyword <code>interface</code> followed by the type of interface to which the host is connected. <ul style="list-style-type: none"> For an 10/100 Ethernet interface, enter the keyword <code>fastethernet</code>. For a Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code>. For a SONET interface, enter the keyword <code>sonet</code>. For a Ten Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code>. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code>.
<i>slot/port</i>	Enter the slot and port number of the interface.
<i>lease time</i>	Enter the keyword <code>lease</code> followed by the amount of time the IP address will be leased. Range: 1-4294967295

Command Modes EXEC
EXEC Privilege

Default None

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced on E-Series.
Version 7.8.1.0	Introduced on C-Series and S-Series

Related Commands [show ip dhcp snooping](#) Display the contents of the DHCP binding table.

ip dhcp snooping database renew

C E S

Renew the binding table.

S4810

S4820T

Syntax	ip dhcp snooping database renew	
Command Modes	EXEC	
	EXEC Privilege	
Default	None	
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.3.1.0 Introduced on E-Series. <hr/> Version 7.8.1.0 Introduced on C-Series and S-Series <hr/>	

ip dhcp snooping trust

C E S

Configure an interface as trusted.

S4810

S4820T

Syntax	[no] ip dhcp snooping trust	
Command Modes	INTERFACE	
Default	Untrusted	
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.3.1.0 Introduced on E-Series. <hr/> Version 7.8.1.0 Introduced on C-Series and S-Series <hr/>	

ip dhcp source-address-validation

C E S

Enable IP Source Guard.

S4810

S4820T

Syntax	[no] ip dhcp source-address-validation [ipmac]	
Parameters	<hr/> ipmac Enable IP+MAC Source Address Validation (Not available on E-Series). <hr/>	
Command Modes	INTERFACE	
Default	Disabled	

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on E-Series.
	Version 8.2.1.0	Added keyword <code>ipmac</code> .
	Version 7.8.1.0	Introduced on C-Series and S-Series

Usage Information	<p>You must allocate at least one FP block to <code>ipmacacl</code> before you can enable IP+MAC Source Address Validation.</p> <ol style="list-style-type: none"> 1. Use the command <code>cam-acl l2acl</code> from CONFIGURATION mode 2. Save the running-config to the startup-config 3. Reload the system.
--------------------------	--

ip dhcp snooping vlan

C **E** **S**

Enable DHCP Snooping on one or more VLANs.

Syntax `[no] ip dhcp snooping vlan name`

Parameters	<i>name</i>	Enter the name of a VLAN on which to enable DHCP Snooping.
-------------------	-------------	--

Command Modes CONFIGURATION

Default Disabled

Command History	Version 8.3.1.0	Introduced on E-Series.
	Version 7.8.1.0	Introduced on C-Series and S-Series

Usage Information When enabled the system begins creating entries in the binding table for the specified VLAN(s). Note that learning only happens if there is a trusted port in the VLAN.

Related Commands	ip dhcp snooping trust	Configure an interface as trusted.
-------------------------	--	------------------------------------

ip dhcp relay information-option

C **E** **S**

Enable Option 82.

S4810

S4820T

Syntax `ip dhcp relay information-option [remote-id | trust-downstream]`

Parameters	remote-id	Configure the system to enable remote-id string in option-82
	trust-downstream	Configure the system to trust Option 82 when it is received from the previous-hop router.
Command Modes	CONFIGURATION	
Default	Disabled	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on E-Series.
	Version 7.8.1.0	Introduced on C-Series and S-Series

show ip dhcp snooping

C **E** **S**

Display the contents of the DHCP binding table or display the interfaces configured with IP Source Guard.

Syntax `show ip dhcp snooping [binding | source-address-validation]`

Parameters	binding	Display the binding table.
	source-address-validation	Display the interfaces configured with IP Source Guard.

Command Modes	EXEC	
	EXEC Privilege	
Default	None	
Command History	Version 8.3.1.0	Introduced on E-Series.
	Version 7.8.1.0	Introduced on C-Series and S-Series
Related Commands	clear ip dhcp snooping Clear the contents of the DHCP binding table.	

ip dhcp snooping verify mac-address

C **E** **S**

Validate a DHCP packet's source hardware address against the client hardware address field (CHADDR) in the payload.

Syntax `[no] ip dhcp snooping verify mac-address`

Command Modes	CONFIGURATION
Default	Disabled

**Command
History**

Version 8.3.1.0	Introduced on E-Series.
Version 8.2.1.0	Introduced on C-Series and S-Series

Equal Cost Multi-Path

Overview

The characters that appear below command headings indicate support for the associated Dell Force10 platform as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810** or **S4820T**.

Commands

The ECMP commands are:

- [ecmp-group](#)
- [hash-algorithm](#)
- [hash-algorithm ecmp](#)
- [hash-algorithm d](#)
- [ip ecmp-deterministic](#)
- [ip ecmp-group](#)
- [ipv6 ecmp-deterministic](#)
- [link-bundle-monitor enable](#)
- [link-bundle-distribution trigger-threshold](#)

ecmp-group

S4810

S4820T

Syntax

Provides a mechanism to monitor traffic distribution on an ECMP link bundle. A system log is generated when the standard deviation of traffic distribution on a member link exceeds a defined threshold.

ecmp-group *ecmp-group-id*

To remove the selected interface, use the **ecmp-group no interface** command.

To disable link bundle monitoring, use the **ecmp-group no link-bundle-monitor** command.

Parameters	ecmp-group ID	Enter the identifier number for the ECMP group. Range: 2 to 64.
	interface	Enter the following keywords and slot/port to add the interface to the ECMP group. <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a LAG interface, enter the keyword port-channel followed by the slot/port information. Range: 1 to 128.
Defaults		Off
Command Modes		CONFIGURATION
		CONFIGURATION ECMP-GROUP
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.10.0	Introduced on S4810
Usage Information	Using the Configuration command mode, create an ECMP group ID. Interfaces can then be assigned to the ECMP group using the CONFIGURATION ECMP-GROUP command mode. Link bundle monitoring can be enabled on the port-channel configuration using the CONFIGURATION ECMP-GROUP command mode.	

hash-algorithm

E **S4810**

S4820T

Change the hash algorithm used to distribute traffic flows across a Port Channel. The ECMP, LAG, and line card options are supported only on the E-Series TeraScale and ExaScale chassis.

Syntax

```
hash-algorithm { algorithm-number | { ecmp { checksum | crc | xor } [number] lag
{ checksum | crc | xor } [number] nh-ecmp { checksum | crc | xor } [number] linecard
number ip-sa-mask value ip-da-mask value }
```

To return to the default hash algorithm, use the **no hash-algorithm** command.

To return to the default Equal-cost Multipath Routing (ECMP) hash algorithm, use the **no hash-algorithm ecmp algorithm-value** command.

To remove the hash algorithm on a particular line card, use the **no hash-algorithm linecard number** command.

Parameters

<i>algorithm-number</i>	Enter the algorithm number. Range: 0 to 47 EtherScale range: 0 to 15; 16 to 47 will be considered as 15.
ecmp <i>hash algorithm value</i>	TeraScale and ExaScale Only: Enter the keyword ecmp followed by the ECMP hash algorithm value. Range: 0 to 47
lag <i>hash algorithm value</i>	TeraScale and ExaScale Only: Enter the keyword lag followed by the LAG hash algorithm value. Range: 0 to 47
nh-ecmp <i>hash algorithm value</i>	(OPTIONAL) Enter the keyword nh-ecmp followed by the ECMP hash algorithm value.
linecard <i>number</i>	(OPTIONAL) TeraScale and ExaScale Only: Enter the keyword linecard followed by the linecard slot number. Range: 0 to 13 on an E1200/E1200i, 0 to 6 on an E600/E600i, and 0 to 5 on an E300
ip-sa-mask <i>value</i>	(OPTIONAL) Enter the keyword ip-sa-mask followed by the ECMP/LAG hash mask value. Range: 0 to FF Default: FF
ip-da-mask <i>value</i>	(OPTIONAL) Enter the keyword ip-da-mask followed by the ECMP/LAG hash mask value. Range: 0 to FF Default: FF

Defaults

0 for hash-algorithm value on TeraScale and ExaScale

IPSA and IPDA mask value is FF for line card

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Added nh-ecmp option
Version 7.7.1.1	Added nh-ecmp option
Version 6.5.1.0	Added support for the line card option on TeraScale only
Version 6.3.1.0	Added the support for ECMP and LAG on TeraScale only

Usage Information

Set the default hash-algorithm method on ExaScale systems to ensure CRC is not used for LAG. For example, **hash-algorithm ecmp xor lag checksum nh-ecmp checksum**

To achieve the functionality of hash-align on the ExaScale platform, do not use CRC as a hash-algorithm method.

The hash value calculated with the hash-algorithm command is unique to the entire chassis. The hash algorithm command with the line card option changes the hash for a particular line card by applying the mask specified in the IPSA and IPDA fields.

The line card option is applicable with the lag-hash-align microcode only (refer to [cam-profile \(Config\)](#)). Any other microcode returns an error message as follows:

Message 1 FTOS(conf)#hash-algorithm linecard 5 ip-sa-mask ff ip-da-mask ff

Message 2 % Error: This command is not supported in the current microcode configuration.

In addition, the **linecard number ip-sa-mask value ip-da-mask value** option has the following behavior to maintain bi-directionality:

- When hashing is done on both IPSA and IPDA, the **ip-sa-mask** and **ip-da-mask** values must be equal. (Single Linecard)
- When hashing is done only on IPSA or IPDA, FTOS maintains bi-directionality with masks set to XX 00 for line card 1 and 00 XX for line card 2 (**ip-sa-mask** and **ip-da-mask**). The mask value must be the same for both line cards when using multiple line cards as ingress (where XX is any value from 00 to FF for both line cards). For example, assume traffic is flowing between linecard 1 and linecard 2:

Message 3 hash-algorithm linecard 1 ip-sa-mask aa ip-da-mask 00

Message 4 hash-algorithm linecard 2 ip-sa-mask 00 ip-da-mask aa

The different hash algorithms are based on the number of Port Channel members and packet values. The default hash algorithm (number 0) yields the most balanced results in various test scenarios, but if the default algorithm does not provide a satisfactory distribution of traffic, then use the hash-algorithm command to designate another algorithm.

When a Port Channel member leaves or is added to the Port Channel, the hash algorithm is recalculated to balance traffic across the members.

On TeraScale if the keyword **ECMP** or **LAG** is not entered, FTOS assumes it to be common for both. If the keyword **ECMP** or **LAG** is entered separately, both should fall in the range of 0 to 23 or 24 to 47 since compression enable/disable is common for both.

TeraScale and ExaScale support the range 0-47. The default for ExaScale is 24.

For EtherScale, only the range 0 to 15 is valid; 16 to 47 is considered as 15.

0-11	Compression Enabled
	rotate [0 - 11]

12 - 23	Compression Enabled
	shift [0 - 11]
24 - 35	Compression Disabled
	rotate [0 - 11]
36 - 47	Compression Disabled
	shift [0 - 11]

**Related
Commands**

[load-balance \(E-Series\)](#) Change the traffic balancing method.

hash-algorithm ecmp



Change the hash algorithm used to distribute traffic flows across an ECMP (equal-cost multipath routing) group.

Syntax

hash-algorithm ecmp { **crc-upper } | { **dest-ip** } | { **lsb** }**

To return to the default hash algorithm, use the **no hash-algorithm ecmp** command.

Parameters

crc-upper	Uses the upper 32 bits of the key for the hash computation Default: crc-lower
dest-ip	Uses the destination IP for ECMP hashing Default: enabled
lsb	Returns the LSB of the key as the hash Default: crc-lower

Defaults

crc-lower, dest-ip enabled

Command Modes

CONFIGURATION

**Command
History**

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

**Usage
Information**

The hash value calculated with the hash-algorithm command is unique to the entire chassis. The default ECMP hash configuration is **crc-lower**. This takes the lower 32 bits of the hash key to compute the egress port and is the “fall-back” configuration if the user hasn’t configured anything else.

The different hash algorithms are based on the number of ECMP group members and packet values. The default hash algorithm yields the most balanced results in various test scenarios, but if the default algorithm does not provide satisfactory distribution of traffic, then use this command to designate another algorithm.

When a member leaves or is added to the ECMP group, the hash algorithm is recalculated to balance traffic across the members.

**Related
Commands**

[load-balance \(C-Series and S-Series\)](#)

hash-algorithm d

E

Select the d value for the ECMP, LAG, and NH hashing algorithm.

Syntax**hash-algorithm d value [linecard slot] [port-set number]****Parameters**

d value	Enter the keyword followed by the d value. Range: 0 to 4095
linecard slot	Enter the keyword linecard followed by the linecard slot number.
port-set number	Enter the keyword port-set followed by the linecard port-pipe number.

Defaults

None

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.1.0	Introduced on E-Series.
-----------------	-------------------------

**Usage
Information**

Deterministic ECMP sorts ECMPs in order even though RTM provides them in a random order. However, the hash algorithm uses as a d the lower 12 bits of the chassis MAC, which yields a different hash result for every chassis. This means that for a given flow, even though the prefixes are sorted, two unrelated chassis will select different hops.

FTOS provides a CLI-based solution for modifying the hash d to ensure that on each configured system, the ECMP selection is same. When configured, the same d is set for ECMP, LAG, and NH, and is used for incoming traffic only.



Note: While the d is stored separately on each port-pipe, the same d is used across all CAMs.

Note: You cannot separate LAG and ECMP, but you can use different algorithms across chassis with the same d. If LAG member ports span multiple port-pipes and line cards, set the d to the same value on each port-pipe to achieve deterministic behavior.

Note: If the hash algorithm configuration is removed. Hash d will not go to original factory default setting.

ip ecmp-deterministic

E

Deterministic ECMP Next Hop arranges all ECMPs in order before writing them into the CAM. For example, suppose the RTM learns 8 ECMPs in the order that the protocols and interfaces came up. In this case, the FIB and CAM sort them so that the ECMPs are always arranged. This implementation ensures that every chassis having the same prefixes orders the ECMPs the same.

With 8 or less ECMPs, the ordering is lexicographic and deterministic. With more than 8 ECMPs, ordering is deterministic, but it is not in lexicographic order.

Syntax	ip ecmp-deterministic
Defaults	Disabled
Command Modes	CONFIGURATION
Command History	<hr/> Version 8.3.1.0 Introduced on E-Series. <hr/>
Usage Information	After enabling IPv6 Deterministic ECMP, traffic loss occurs for a few milliseconds while FTOS sorts the CAM entries.

ipv6 ecmp-deterministic

E

Deterministic ECMP Next Hop arranges all ECMPs in order before writing them into the CAM. For example, suppose the RTM learns 8 ECMPs in the order that the protocols and interfaces came up. In this case, the FIB and CAM sort them so that the ECMPs are always arranged. This implementation ensures that every chassis having the same prefixes orders the ECMPs the same.

With 8 or less ECMPs, the ordering is lexicographic and deterministic. With more than 8 ECMPs, ordering is deterministic but it is not in lexicographic order.

Syntax	ipv6 ecmp-deterministic
Defaults	Disabled
Command Modes	CONFIGURATION
Command History	<hr/> Version 8.3.1.0 Introduced on E-Series. <hr/>
Usage Information	After enabling IPv6 Deterministic ECMP, traffic loss occurs for a few milliseconds while FTOS sorts the CAM entries.

ip ecmp-group

S4810

S4820T

Enable and specify the maximum number of ecmp that the L3 CAM hold for a route, By default, when maximum paths are not configured, the CAM can hold a maximum of 16 ecmp per route.

Syntax

```
ip ecmp-group { maximum-paths | { number } { path-fallback } }
```

To negate a command, use the **no** command. For example **no ip ecmp-group maximum-paths { *number* }**

Parameters

maximum-paths	Specify the maximum number of ecmp for a route. Range: 2 to 64
path-fallback	Use the keyword path-fallback to enable this feature. If the feature is enabled, re-enter this keyword to disable the feature.

Defaults

16

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810

Usage Information

You must save the new ECMP settings to the startup-config (write-mem) then reload the system for the new settings to take effect.

Related Commands

show ip cam stack-unit	Display content-addressable memory (CAM) entries for an S-Series switch.
--	--

link-bundle-monitor enable

S4810

S4820T

Provides a mechanism to enable monitoring of traffic distribution on an ECMP link bundle.

Syntax

```
link-bundle-monitor enable
```

To exit from ecmp group mode, use the **exit** command.

Command Modes

ECMP-GROUP

PORT-CHANNEL INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810

link-bundle-distribution trigger-threshold

S4810

Provides a mechanism to set the threshold to trigger when traffic distribution will begin being monitored on an ECMP link bundle.

S4820T

Syntax `link-bundle-distribution trigger-threshold [percent]`

To exit from ecmp group mode, use the **exit** command.

Parameters

<i>percent</i>	Indicate the threshold value when traffic distribution will start being monitored on an ECMP link bundle. Range: 1 to 90% Default: 60%
----------------	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810

show config

S4810

Display the ECMP configuration.

S4820T

Syntax `show config`

Command Modes

CONFIGURATION-ECMP-GROUP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810

Related Commands

show running-config ecmp-group	Display interfaces, LAG, or LAG link bundles being monitored for uneven traffic distribution
---	--

show link-bundle distribution

S4810

Display the link-bundle distribution for the interfaces in the bundle, type of bundle (LAG or ECMP) and the most recently calculated interface utilization (either bytes per second rate or maximum rate) for each interface.

S4820T

Syntax `show link-bundle-distribution`

Command Modes

EXEC Privilege

Example

```

FTOS#show link-bundle-distribution
Link-bundle trigger threshold - 60

ECMP bundle - 5      Utilization[In Percent] - 0      Alarm State - Inactive

Interface           Line Protocol  Utilization[In Percent]
Te 0/4              Up             5
Te 0/3              Up             30

```

Example (S4820T)

```

FTOS#show link-bundle-distribution
Link-bundle trigger threshold - 60

FTOS#

```

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.10.0	Introduced on S4810.

FIPS Cryptography

Overview

The following commands are used to configure the FIPS Cryptography feature on the `S4810` and `S4820T`:

FIPS

- [fips mode enable](#)
- [show fips status](#)
- [show ip ssh](#)
- [ssh](#)

fips mode enable

`S4810` Enable the FIPS cryptography mode on the platform.

`S4820T`:

Syntax [no] fips mode enable

Use the **no fips mode enable** command to disable the FIPS cryptography mode.

Default Disabled

Command Mode CONFIGURATION

Example

```
FTOS(conf)#fips mode enable
WARNING: Enabling FIPS mode will close all SSH/Telnet connections, restart those
servers, and destroy all configured host keys.
proceed (y/n) ? y
FTOS(conf)#
```

**Related
Commands**

ip ssh server	Configure an SSH server.
ssh	Open an SSH connection specifying the hostname, username, port number and version of the SSH client.

Command History

Version 8.3.19.0	Introduced on the S4820&.
Version 8.3.12.0	Introduced on the S4810.

show fips status

S4810

Displays the status of the FIPs mode.

S4820T:**Syntax** show fips status**Default** None**Command Mode** EXEC**Example**

```
FTOS#show fips status
FIPS Mode      : Enabled
FTOS#
```

Related Commands

show ip ssh	Display information about established SSH sessions.
show system (S-Series, S4810 and S4820T)	Display the current status of all units in the system.

Command History

Version 8.3.19.0	Introduced on the S4820&.
Version 8.3.12.0	Introduced on the S4810.

show ip ssh

C E S

Display information about established SSH sessions.

S4810**S4820T:****Syntax** show ip ssh**Command Modes** EXEC

EXEC Privilege

Example Without FIPS Mode enabled:

```
FTOS#sh ip ssh
SSH server           : enabled.
SSH server version   : v1 and v2.
Password Authentication : enabled.
Hostbased Authentication : disabled.
RSA Authentication   : disabled.
  Vty      Encryption      HMAC      Remote IP
  1        3des-cbc        hmac-md5  10.1.20.48
  2        3des-cbc        hmac-md5  10.1.20.48
```

With FIPS Mode enabled:

```
FTOS#sh ip ssh
SSH server           : enabled.
SSH server version   : v2.
Password Authentication : enabled.
Hostbased Authentication : disabled.
RSA Authentication   : disabled.
  Vty      Encryption      HMAC      Remote IP
* 0        aes128-cbc      hmac-sha1 10.11.8.13
  1        aes128-cbc      hmac-sha1 10.1.20.48
```

Related Commands

ip ssh server	Configure an SSH server.
show ip ssh client-pub-keys	Display the client-public keys.

ssh



Open an SSH connection specifying the hostname, username, port number and version of the SSH client.

FTOS supports both inbound and outbound SSH sessions using IPv4 or IPv6 addressing. Inbound SSH supports accessing the system through the management interface as well as through a physical Layer 3 interface.



Note: Some of the parameters in this command require licensing to access.. For more information, please contact your Dell Force10 representative.

Syntax

```
ssh { hostname | ipv4 address | ipv6 address } [-c encryption cipher | -l username | -m HMAC algorithm | -p port-number | -v { 1 | 2 }]
```

Parameters

<i>hostname</i>	(OPTIONAL) Enter the IP address or the hostname of the remote device.
<i>vrf instance</i>	(OPTIONAL) E-Series Only: Enter the keyword vrf following by the VRF Instance name to open a SSH connection to that instance.

<i>ipv4 address</i>	(OPTIONAL) Enter the IP address in dotted decimal format A.B.C.D.
<i>ipv6-address prefix-length</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros
<i>-c encryption cipher</i>	Enter the following encryption cipher to use. (For v2 clients only.): Without the FIPS mode enabled: <ul style="list-style-type: none"> • 3des-cbc: Force ssh to use 3des-cbc encryption cipher. With the FIPS mode enabled: <ul style="list-style-type: none"> • aes128-cbc: Force ssh to use the aes128-cbc encryption cipher. • aes256-cbc: Force ssh to use the aes256-cbc encryption cipher.
<i>-l username</i>	(OPTIONAL) Enter the keyword -l followed by the user name used in this SSH session. Default: The user name of the user associated with the terminal.
<i>-m HMAC algorithm</i>	Enter one of the following HMAC algorithms to use. (For v2 clients only.): Without the FIPS mode enabled: <ul style="list-style-type: none"> • hmac-sha1: Force ssh to use the hmac-sha1 HMAC algorithm. • hmac-sha1-96: Force ssh to use the hmac-sha1-96 HMAC algorithm. • hmac-md5: Force ssh to use the hmac-md5 HMAC algorithm. • hmac-md5-96: Force ssh to use the hmac-md5-96 HMAC algorithm. With the FIPS mode enabled: <ul style="list-style-type: none"> • hmac-sha1: Force ssh to use the hmac-sha1 HMAC algorithm. • hmac-sha1-96: Force ssh to use the hmac-sha1-96 HMAC algorithm.
<i>-p port-number</i>	(OPTIONAL) Enter the keyword -p followed by the port number. Range: 1 to 65536 Default: 22
<i>-v { 1 2 }</i>	(OPTIONAL) Enter the keyword -v followed by the SSH version 1 or 2. Default: The version from the protocol negotiation. Note: If the FIPS mode is enabled, this option does not display in the output.

Defaults As indicated above.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820&.
Version 8.3.12.0	Added support for the -c and -m parameters on the S4810
Version 8.3.7.0	Introduced on S4810
Version 7.9.1.0	Introduced VRF
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Added IPv6 support; Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example If FIPS mode is not enabled:

```
FTOS#ssh 10.11.8.12 ?
-c                Encryption cipher to use (for v2 clients only)
-l                User name option
-m                HMAC algorithm to use (for v2 clients only)
-p                SSH server port option (default 22)
-v                SSH protocol version
<cr>
FTOS#ssh 10.11.8.12 -c ?
3des-cbc          Force ssh to use 3des-cbc encryption cipher
FTOS#ssh 10.11.8.12 -m ?
hmac-sha1         Force ssh to use hmac-sha1 HMAC algorithm
hmac-sha1-96      Force ssh to use hmac-sha1-96 HMAC algorithm
hmac-md5          Force ssh to use hmac-md5 HMAC algorithm
hmac-md5-96       Force ssh to use hmac-md5-96 HMAC algorithm
```

If FIPS mode is enabled:

```
FTOS#ssh 10.11.8.12 ?
-c                Encryption cipher to use (for v2 clients only)
-l                User name option
-m                HMAC algorithm to use (for v2 clients only)
-p                SSH server port option (default 22)
<cr>
FTOS#ssh 10.11.8.12 -c ?
aes128-cbc        Force ssh to use aes128-cbc encryption cipher
aes256-cbc        Force ssh to use aes256-cbc encryption cipher
FTOS#ssh 10.11.8.12 -m ?
hmac-sha1         Force ssh to use hmac-sha1 HMAC algorithm
hmac-sha1-96      Force ssh to use hmac-sha1-96 HMAC algorithm
```


FIP Snooping

Overview

In a converged Ethernet network, an MXL Switch, **S4810**, or **S4820T** can operate as an intermediate Ethernet bridge to snoop on Fibre Channel over Ethernet Initialization Protocol (FIP) packets during the login process on Fibre Channel over Ethernet (FCoE) forwarders (FCFs). Acting as a transit FIP snooping bridge, the switch uses dynamically-created ACLs to permit only authorized FCoE traffic to be transmitted between an FCoE end-device and an FCF.

The following FTOS commands are used to configure and verify the FIP snooping feature on the **S4810** and **S4820T**:

FIP

- [clear fip-snooping database interface vlan](#)
- [clear fip-snooping statistics](#)
- [debug fip snooping](#)
- [feature fip-snooping](#)
- [fip-snooping enable](#)
- [fip-snooping fc-map](#)
- [fip-snooping port-mode fcoe-trusted](#)
- [fip-snooping port-mode fcf](#)
- [show fip-snooping config](#)
- [show fip-snooping enode](#)
- [show fip-snooping fcf](#)
- [show fip-snooping sessions](#)
- [show fip-snooping statistics](#)
- [show fip-snooping system](#)
- [show fip-snooping vlan](#)

clear fip-snooping database interface vlan

S4810

Clear FIP snooping information on a VLAN for a specified FCoE MAC address, ENode MAC address, or FCF MAC address, and remove the corresponding ACLs generated by FIP snooping.

S4820T

Syntax clear fip-snooping database interface vlan { *vlan-id* } enode { *enode-mac-address* } | fcf { *fcf-mac-address* } | session { *session-mac-address* }

Parameters	<i>enode-mac-address</i>	Enter the ENode MAC address to be cleared of FIP snooping information.
	<i>fcf-mac-address</i>	Enter the FCF MAC address to be cleared of FIP snooping information.
	<i>session-mac-address</i>	Enter the MAC address for the session to be cleared of FIP snooping information.

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

clear fip-snooping statistics

S4810

Clears the statistics on the FIP packets snooped on all VLANs, a specified VLAN, or a specified port interface.

S4820T

Syntax clear fip-snooping statistics [interface vlan *vlan-id* | interface *port-type port/slot* | interface port-channel *port-channel-number*]

Parameters	<i>vlan-id</i>	Enter the VLAN ID of the FIP packet statistics to be cleared.
	<i>port-type port/slot</i>	Enter the port-type and slot number of the FIP packet statistics to be cleared.
	<i>port-channel-number</i>	Enter the port channel number of the FIP packet statistics to be cleared.

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

debug fip snooping

S4810

Enable debugging on FIP Snooping.

S4820T

Syntax debug fip-snooping [all | acl | error | ifm | info | ipc | rx]

Parameters	all	Enter the keyword all to enable debugging on all the options.
	acl	Enter the keyword acl
	error	Enter the keyword error
	ifm	Enter the keyword ifm
	info	Enter the keyword info

ipc	Enter the keyword <code>ipc</code>
rx	Enter the keyword <code>rx</code>

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.

feature fip-snooping

S4810

Enable the FIP snooping feature on a switch.

S4820T

Syntax feature fip-snooping

To disable the FIP snooping feature, use the `no feature fip-snooping` command.

Defaults Disabled.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

fip-snooping enable

S4810

Enable FIP snooping on all VLANs or on a specified VLAN.

S4820T

Syntax fip-snooping enable

To disable the FIP snooping feature on all or a specified VLAN, use the `no fip-snooping enable` command.

Defaults FIP snooping is disabled on all VLANs.

Command Modes CONFIGURATION
VLAN INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

The maximum number of FCFs supported per FIP snooping-enabled VLAN is four. The maximum number of FIP snooping sessions supported per ENode server is 16.

fip-snooping fc-map

S4810

Configure the FC-MAP value used by FIP snooping on all VLANs.

S4820T

Syntax

fip-snooping fc-map *fc-map-value*

To remove the configured FM-MAP value, use the no fip-snooping fc-map command.

Parameters

<i>fc-map-value</i>	Enter the FC-MAP value used by FIP snooping. The range is from 0EFC00 to 0EFCFF.
---------------------	---

Defaults

0x0EFC00

Command Mode

CONFIGURATION
VLAN INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

fip-snooping port-mode fcoe-trusted

S4810

Configure the port for bridge-to-bridge links.

S4820T

Syntax

fip-snooping port-mode fcoe-trusted

To remove the bridge-to-bridge link configuration from the port, use the no fip-snooping port-mode fcoe-trusted command.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

The maximum number of FCoE VLANs supported on the switch is eight.

fip-snooping port-mode fcf

S4810

Configure the port for bridge-to-FCF links.

S4820T

Syntax fip-snooping port-mode fcf

To disable the bridge-to-FCF link on a port, use the no fip-snooping port-mode fcf command.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

The maximum number of FCFs supported per FIP snooping-enabled VLAN is four.

show fip-snooping config

S4810

Display the FIP snooping status and configured FC-MAP values.

S4820T

Syntax show fip-snooping config

Command Mode EXEC
EXEC Privilege

Example

```
FTOS# show fip-snooping config
FIP Snooping Feature enabled Status: Enabled
FIP Snooping Global enabled Status: Enabled
Global FC-MAP Value: 0X0EFC00
```

```
FIP Snooping enabled VLANs
VLAN    Enabled      FC-MAP
----    -
100     TRUE           0X0EFC00
```

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

show fip-snooping enode

S4810

Display information on the ENodes in FIP-snooped sessions, including the ENode interface and MAC address, FCF MAC address, VLAN ID and FC-ID.

S4820T

Syntax	show fip-snooping enode [<i>enode-mac-address</i>]				
Parameters	<hr/> <i>enode-mac-address</i> Enter the MAC address of the ENodes to be displayed. <hr/>				
Command Mode	EXEC EXEC Privilege				
Command History	<hr/> Version 8.3.19.0 Introduced on the S4820T. <hr/> Version 8.3.12.0 Introduced on the S4810. <hr/> Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module <hr/>				
Example	<pre> FTOS# show fip-snooping enode Enode MAC Enode Interface FCF MAC VLAN FC-ID ----- d4:ae:52:1b:e3:cd Te 0/11 54:7f:ee:37:34:40 100 62:00:11 </pre>				

Table 17-1. show fip-snooping enode Command Field Description

Field	Description
ENode MAC	MAC address of the ENode
ENode Interface	Slot/ port number of the interface connected to the ENode.
FCF MAC	MAC address of the FCF
VLAN	VLAN ID number used by the session
FC-ID	Fibre Channel session ID assigned by the FCF.

show fip-snooping fcf

S4810

Display information on the FCFs in FIP-snooped sessions, including the FCF interface and MAC address, FCF interface, VLAN ID, FC-MAP value, FKA advertisement period, and number of ENodes connected.

S4820T

Syntax	show fip-snooping fcf [<i>fcf-mac-address</i>]					
Parameters	<hr/> <i>fcf-mac-address</i> Enter the MAC address of the FCF to be displayed. <hr/>					
Command Mode	EXEC EXEC Privilege					
Command History	<hr/> Version 8.3.19.0 Introduced on the S4820T. <hr/> Version 8.3.12.0 Introduced on the S4810. <hr/> Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module <hr/>					
Example	<pre> FTOS# show fip-snooping fcf FCF MAC FCF Interface VLAN FC-MAP FKA_ADV_PERIOD No. of Enodes ----- 54:7f:ee:37:34:40 Po 22 100 0e:fc:00 4000 2 </pre>					

Table 17-2 lists the show fip-snooping fcf command field descriptions.

Table 17-2. show fip-snooping fcf Command Field Descriptions

Field	Description
FCF MAC	MAC address of the FCF
FCF Interface	Slot/port number of the interface to which the FCF is connected.
VLAN	VLAN ID number used by the session
FC-MAP	FC-Map value advertised by the FCF.
ENode Interface	Slot/ number of the interface connected to the ENode.
FKA_ADV_PERIOD	Period of time (in milliseconds) during which FIP keep-alive advertisements are transmitted.
No of ENodes	Number of ENodes connected to the FCF
FC-ID	Fibre Channel session ID assigned by the FCF.

show fip-snooping sessions

S4810

Display information on FIP-snooped sessions on all VLANs or a specified VLAN, including the ENode interface and MAC address, the FCF interface and MAC address, VLAN ID, FCoE MAC address and FCoE session ID number (FC-ID), worldwide node name (WWNN) and the worldwide port name (WWPN).

S4820T

Syntax show fip-snooping sessions [interface vlan *vlan-id*]

Parameters

<i>vlan-id</i>	Enter the vlan-id of the specified VLAN to be displayed.
----------------	--

Command Mode

EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```

Enode MAC      Enode Intf    FCF MAC      FCF Intf     VLAN    FCoE MAC     FC-ID      Port WWPN      Port WWNN
-----
00:00:c9:f1:e1:37 Te 0/28      54:7f:ee:34:77:4e Te 1/47      111      0e:fc:00:b5:00:07 b5:00:07 10:00:00:00:c9:f1:e1:37 20:00:00:00:c9:f1:e1:37
00:c0:dd:12:c0:05 Te 1/26      54:7f:ee:34:77:4e Te 1/47      111      0e:fc:00:b5:00:75 b5:00:75 21:00:00:c0:dd:12:c0:05 20:00:00:c0:dd:12:c0:05

```

Table 17-3 lists the show fip-snooping sessions command field descriptions.

Table 17-3. show fip-snooping sessions Command Field Description

Field	Description
ENode MAC	MAC address of the ENode.
ENode Interface	Slot/ port number of the interface connected to the ENode.
FCF MAC	MAC address of the FCF.

Table 17-3. show fip-snooping sessions Command Field Description (continued)

Field	Description
FCF Interface	Slot/ port number of the interface to which the FCF is connected.
VLAN	VLAN ID number used by the session.
FCoE MAC	MAC address of the FCoE session assigned by the FCF.
FC-ID	Fibre Channel ID assigned by the FCF.
Port WWPN	Worldwide port name of the CNA port.
Port WWNN	Worldwide node name of the CNA port.

show fip-snooping statistics

S4810

Display statistics on the FIP packets snooped on all interfaces, including VLANs, physical ports, and port channels.

S4820T

Syntax show fip-snooping statistics [interface vlan *vlan-id* | interface *port-type port/slot* | interface port-channel *port-channel-number*]

Parameters

<i>vlan-id</i>	Enter the VLAN ID of the FIP packet statistics to be displayed.
<i>port-type port/slot</i>	Enter the port-type and slot number of the FIP packet statistics to be displayed.
<i>port-channel-number</i>	Enter the port channel number of the FIP packet statistics to be displayed.

Command Mode

EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show fip-snooping statistics interface vlan 100
Number of Vlan Requests                :0
Number of Vlan Notifications            :0
Number of Multicast Discovery Solicits   :2
Number of Unicast Discovery Solicits     :0
Number of FLOGI                         :2
Number of FDISC                         :16
Number of FLOGO                           :0
Number of Enode Keep Alive               :9021
Number of VN Port Keep Alive             :3349
Number of Multicast Discovery Advertisement :4437
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts                  :2
Number of FLOGI Rejects                  :0
Number of FDISC Accepts                  :16
Number of FDISC Rejects                  :0
Number of FLOGO Accepts                  :0
Number of FLOGO Rejects                  :0
Number of CVL                            :0
```

```

Number of FCF Discovery Timeouts           :0
Number of VN Port Session Timeouts        :0
Number of Session failures due to Hardware Config :0
FTOS(conf)#

FTOS# show fip-snooping statistics int tengigabitethernet 0/11
Number of Vlan Requests                    :1
Number of Vlan Notifications               :0
Number of Multicast Discovery Solicits     :1
Number of Unicast Discovery Solicits      :0
Number of FLOGI                           :1
Number of FDISC                            :16
Number of FLOGO                             :0
Number of Enode Keep Alive                 :4416
Number of VN Port Keep Alive               :3136
Number of Multicast Discovery Advertisement :0
Number of Unicast Discovery Advertisement :0
Number of FLOGI Accepts                   :0
Number of FLOGI Rejects                   :0
Number of FDISC Accepts                   :0
Number of FDISC Rejects                   :0
Number of FLOGO Accepts                   :0
Number of FLOGO Rejects                   :0
Number of CVL                              :0
Number of FCF Discovery Timeouts           :0
Number of VN Port Session Timeouts        :0
Number of Session failures due to Hardware Config :0

```

**Example
(port channel)**

```

FTOS# show fip-snooping statistics interface port-channel 22
Number of Vlan Requests                    :0
Number of Vlan Notifications               :2
Number of Multicast Discovery Solicits     :0
Number of Unicast Discovery Solicits      :0
Number of FLOGI                           :0
Number of FDISC                            :0
Number of FLOGO                             :0
Number of Enode Keep Alive                 :0
Number of VN Port Keep Alive               :0
Number of Multicast Discovery Advertisement :4451
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts                   :2
Number of FLOGI Rejects                   :0
Number of FDISC Accepts                   :16
Number of FDISC Rejects                   :0
Number of FLOGO Accepts                   :0
Number of FLOGO Rejects                   :0
Number of CVL                              :0
Number of FCF Discovery Timeouts           :0
Number of VN Port Session Timeouts        :0
Number of Session failures due to Hardware Config :0

```

Table 17-4 lists the show fip-snooping statistics command field descriptions.

Table 17-4. show fip-snooping statistics Command Fields Description

Field	Description
Number of Vlan Requests	Number of FIP-snooped VLAN request frames received on the interface
Number of VLAN Notifications	Number of FIP-snooped VLAN notification frames received on the interface.

Table 17-4. show fip-snooping statistics Command Fields Description (continued)

Field	Description
Number of Multicast Discovery Solicits	Number of FIP-snooped multicast discovery solicit frames received on the interface
Number of Unicast Discovery Solicits	Number of FIP-snooped unicast discovery solicit frames received on the interface
Number of FLOGI	Number of FIP-snooped FLOGI request frames received on the interface
Number of FDISC	Number of FIP-snooped FDISC request frames received on the interface
Number of FLOGO	Number of FIP-snooped FLOGO frames received on the interface
Number of ENode Keep Alives	Number of FIP-snooped ENode keep-alive frames received on the interface
Number of VN Port Keep Alives	Number of FIP-snooped VN port keep-alive frames received on the interface
Number of Multicast Discovery Advertisements	Number of FIP-snooped multicast discovery advertisements received on the interface
Number of Unicast Discovery Advertisements	Number of FIP-snooped unicast discovery advertisements received on the interface
Number of FLOGI Accepts	Number of FIP FLOGI accept frames received on the interface
Number of FLOGI Rejects	Number of FIP FLOGI reject frames received on the interface
Number of FDISC Accepts	Number of FIP FDISC accept frames received on the interface
Number of FDISC Rejects	Number of FIP FDISC reject frames received on the interface
Number of FLOGO Accepts	Number of FIP FLOGO accept frames received on the interface
Number of FLOGO Rejects	Number of FIP FLOGO reject frames received on the interface
Number of CVLs	Number of FIP clear virtual link frames received on the interface
Number of FCF Discovery Timeouts	Number of FCF discovery timeouts that occurred on the interface
Number of VN Port Session Timeouts	Number of VN port session timeouts that occurred on the interface
Number of Session failures due to Hardware Config	Number of session failures due to hardware configuration that occurred on the interface

show fip-snooping system

S4810

Display information on the status of FIP snooping on the switch (enabled or disabled), including the number of FCoE VLANs, FCFs, ENodes, and currently active sessions.

S4820T

Syntax show fip-snooping system

Command Mode EXEC
EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show fip-snooping system
Global Mode                : Enabled
FCOE VLAN List (Operational) : 1, 100
FCFs                       : 1
Enodes                     : 2
Sessions                   : 17
```

show fip-snooping vlan

S4810 Display information on the FCoE VLANs on which FIP snooping is enabled.

S4820T

Syntax show fip-snooping vlan

Command Mode EXEC
EXEC Privilege

Example

```
FTOS# show fip-snooping vlan
* = Default VLAN

VLAN    FC-MAP          FCFs    Enodes    Sessions
----    -
*1      -               -       -         -
100     0X0EFC00       1       2         17
```

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

show fips status

S4810 Display the FIPs status on the platform.

S4820T **Note:** You must have a license to access this command. For more information, please contact your Dell Force10 representative.

Syntax show fips status

Default None

Command Modes EXEC

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.

Force10 Resilient Ring Protocol (FRRP)

Overview

Force10 Resilient Ring Protocol (FRRP) is supported on Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

FRRP is a proprietary protocol for that offers fast convergence in a Layer 2 network without having to run the Spanning Tree Protocol. The Resilient Ring Protocol is an efficient protocol that transmits a high-speed token across a ring to verify the link status. All the intelligence is contained in the master node with practically no intelligence required of the transit mode.

Commands

The FRRP commands are:

- `clear frp`
- `debug frp`
- `description`
- `disable`
- `interface`
- `member-vlan`
- `mode`
- `protocol frp`
- `show frp`
- `timer`

Important Points to Remember

- FRRP is media- and speed-independent.
- FRRP is a Dell Force10 proprietary protocol that does not interoperate with any other vendor.
- Spanning Tree must be disabled on both primary and secondary interfaces before Resilient Ring protocol is enabled.

- A VLAN configured as control VLAN for a ring cannot be configured as control or member VLAN for any other ring.
- Member VLANs across multiple rings are not supported in Master nodes.
- If multiple rings share one or more member VLANs, they cannot share any links between them.
- Each ring can have only one Master node; all others are Transit nodes.

clear frrp

C E S4810

S4820T

Clear the FRRP statistics counters.

Syntax

```
clear frrp [ring-id]
```

Parameters

<i>ring-id</i>	(Optional) Enter the ring identification number. Range: 1 to 255
----------------	---

Defaults

No default values or behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced for S4820T
Version 8.3.7.0	Introduced for S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.5.1.0	Introduced

Example

```
FTOS#clear frrp

Clear frrp statistics counter on all ring [confirm] yes

FTOS#clear frrp 4

Clear frrp statistics counter for ring 4 [confirm] yes

FTOS#
```

Usage Information

Executing this command, without the optional *ring-id*, will clear statistics counters on all the available rings. FTOS requires a command line confirmation before the command is executed. This commands clears the following counters:

- hello Rx and Tx counters
- Topology change Rx and Tx counters
- The number of state change counters

Related Commands

show frrp	Display the Resilient Ring Protocol configuration
---------------------------	---

debug frrp

C E S4810

S4820T

Enable FRRP debugging.

Syntax

debug frrp { event | packet | detail } [*ring-id*] [count *number*]

To disable debugging, use the no debug frrp { event | packet | detail } { *ring-id* } [count *number*] command.

Parameters

event	Enter the keyword event to display debug information related to ring protocol transitions.
packet	Enter the keyword packet to display brief debug information related to control packets.
detail	Enter the keyword detail to display detailed debug information related to the entire ring protocol packets.
<i>ring-id</i>	(Optional) Enter the ring identification number. Range: 1 to 255
count <i>number</i>	Enter the keyword count followed by the number of debug outputs. Range: 1 to 65534

Defaults

Disabled

Command Modes

CONFIGURATION (conf-frrp)

Command History

Version 8.3.19.0	Introduced for the S4820T
Version 8.3.7.0	Introduced for the S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

Usage Information

Since the Resilient Ring Protocol can potentially transmit 20 packets per interface, debug information must be restricted.

description

C E

Enter an identifying description of the ring.

Syntax

description *Word*

To remove the ring description, use the no description [*Word*] command.

Parameters

<i>Word</i>	Enter a description of the ring. Maximum: 255 characters
-------------	---

Defaults

No default values or behavior

Command Modes CONFIGURATION (conf-frrp)

Command History

Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

disable

C **E**

Disable the Resilient Ring Protocol.

Syntax

disable

To enable the Resilient Ring Protocol, use the no disable command.

Defaults

Disabled

Command Modes CONFIGURATION (conf-frrp)

Command History

Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

interface

C **E**

Configure the primary, secondary, and control-vlan interfaces.

Syntax

interface {primary *interface* secondary *interface* control-vlan *vlan-id*}

To return to the default, use the no interface {primary *interface* secondary *interface* control-vlan *vlan-id*} command.

Parameters

primary <i>interface</i>	<p>Enter the keyword primary to configure the primary interface followed by one of the following interfaces and slot/port information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
--------------------------	--

secondary interface	Enter the keyword secondary to configure the secondary interface followed by one of the following interfaces and slot/port information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
control-vlan <i>vlan-id</i>	Enter the keyword control-vlan followed by the VLAN ID. Range: 1 to 4094
Defaults	No default values or behavior
Command Modes	CONFIGURATION (conf-frpp)
Command History	Version 8.2.1.0 Introduced for the C-Series
	Version 7.4.1.0 Introduced
Usage Information	This command causes the Ring Manager to take ownership of these two ports after the configuration is validated by the IFM. Ownership is relinquished for a port only when the interface does not play a part in any control VLAN, that is, the interface does not belong to any ring.
Related Commands	show frpp Display the Resilient Ring Protocol configuration information

member-vlan

C **E** **S4810**
S4820T

Specify the member VLAN identification numbers.

Syntax

`member-vlan { vlan-range }`

To return to the default, use the `no member-vlan [vlan-range]` command.

Parameters

<i>vlan-range</i>	Enter the member VLANs using comma separated VLAN IDs, a range of VLAN IDs, a single VLAN ID, or a combination. For example: Comma separated: 3, 4, 6 Range: 5-10 Combination: 3, 4, 5-10, 8
-------------------	---

Defaults No default values or behavior

Command Modes CONFIGURATION (conf-frrp)

Command History

Version 8.3.19.0	Introduced for the S4820T
Version 8.3.7.0	Introduced for the S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

mode

C **E** **S4810**
S4820T

Set the Master or Transit mode of the ring.

Syntax

mode {master | transit}

To reset the mode, use the no mode {master | transit} command.

Parameters

master	Enter the keyword master to set the Ring node to Master mode.
transit	Enter the keyword transit to set the Ring node to Transit mode.

Defaults Mode None

Command Modes CONFIGURATION (conf-frrp)

Command History

Version 8.3.19.0	Introduced for the S4820T
Version 8.3.7.0	Introduced for the S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

protocol frrp

C **E** **S4810**
S4820T

Enter the Resilient Ring Protocol and designate a ring identification.

Syntax

protocol frrp {ring-id}

To exit the ring protocol, use the no protocol frrp {ring-id} command.

Parameters

ring-id	Enter the ring identification number. Range: 1 to 255
---------	--

Defaults No default values or behavior

Command Modes


CONFIGURATION

Command History

Version 8.3.19.0	Introduced for the S4820T
Version 8.3.7.0	Introduced for the S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

Usage Information

This command places you into the Resilient Ring Protocol. After executing this command, the command line prompt changes to conf-frrp.

show frrp

Display the Resilient Ring Protocol configuration.

Syntax

show frrp [*ring-id* [summary]] | [summary]

Parameters

<i>ring-id</i>	Enter the ring identification number. Range: 1 to 255
summary	(OPTIONAL) Enter the keyword summary to view just a summarized version of the Ring configuration.

Defaults

No default values or behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced for the S4820T
Version 8.3.7.0	Introduced for the S4810
Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

Example (show frrp summary)

```
FTOS#show frrp summary

Ring-ID      State      Mode      Ctrl_Vlan  Member_Vlans
-----
2            UP         Master    2           11-20, 25,27-30
31           UP         Transit   31          40-41
50           Down       Transit   50          32
FTOS#
```

**Example
(show frrp
ring-id)**

```

FTOS#show frrp 1
Ring protocol 1 is in Master mode
Ring Protocol Interface:
Primary : GigabitEthernet 0/16 State: Forwarding
Secondary: Port-channel 100 State: Blocking
Control Vlan: 1
Ring protocol Timers: Hello-Interval 50 msec Dead-Interval 150 msec
Ring Master's MAC Address is 00:01:e8:13:a3:19
Topology Change Statistics: Tx:110 Rx:45
Hello Statistics: Tx:13028 Rx:12348
Number of state Changes: 34
Member Vlans: 1000-1009

```

**Example
(show frrp ring-id
summary)**

```

FTOS#
FTOS#show frrp 2 summary

Ring-ID      State      Mode      Ctrl_Vlan  Member_Vlans
-----
2            Up         Master    2          11-20, 25, 27-30
FTOS#

```

**Related
Commands**[protocol frrp](#)

Enter the Resilient Ring Protocol and designate a ring identification

timer

C **E**

Set the hello or dead interval for the Ring control packets.

Syntaxtimer {hello-interval *milliseconds*}| {dead-interval *milliseconds*}

To remove the timer, use the no timer {hello-interval [*milliseconds*]}| {dead-interval *milliseconds*} command.

Parameters

hello-interval <i>milliseconds</i>	Enter the keyword hello-interval followed by the time, in milliseconds, to set the hello interval of the control packets. The milliseconds must be enter in increments of 50 milliseconds, for example 50, 100, 150 and so on. If an invalid value is entered, an error message is generated. Range: 50 to 2000ms Default: 500 ms
------------------------------------	---

dead-interval <i>milliseconds</i>	Enter the keyword dead-interval followed by the time, in milliseconds, to set the dead interval of the control packets. Range: 50 to 6000ms Default: 1500ms Note: The configured dead interval should be at least three times the hello interval
-----------------------------------	--

Defaults

Default as shown

Command Modes

CONFIGURATION (conf-frrp)

**Command
History**

Version 8.2.1.0	Introduced for the C-Series
Version 7.4.1.0	Introduced

**Usage
Information**

The hello interval is the interval at which ring frames are generated from the primary interface of the master node. The dead interval is the time that elapses before a timeout occurs.

GARP VLAN Registration (GVRP)

Overview

The basic GVRP commands are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

The GVRP commands are:

- [clear gvrp statistics](#)
- [debug gvrp](#)
- [disable](#)
- [garp timers](#)
- [gvrp enable](#)
- [gvrp registration](#)
- [protocol gvrp](#)
- [show config](#)
- [show garp timers](#)
- [show gvrp](#)
- [show gvrp statistics](#)

The GARP (Generic Attribute Registration Protocol) mechanism allows the configuration of a GARP participant to propagate through a network quickly. A GARP participant registers or de-registers its attributes with other participants by making or withdrawing declarations of attributes. At the same time, based on received declarations or withdrawals, GARP handles attributes of other participants.

GVRP enables a device to propagate local VLAN registration information to other participant devices and dynamically update the VLAN registration information from other devices. The registration information updates local databases regarding active VLAN members and through which port the VLANs can be reached.

GVRP ensures that all participants on a bridged LAN maintain the same VLAN registration information. The VLAN registration information propagated by GVRP include both manually configured local static entries and dynamic entries from other devices.

GVRP participants have the following components:

- The GVRP application
- GARP Information Propagation (GIP)
- GARP Information Declaration (GID)

Important Points to Remember

- GVRP is supported on Layer 2 ports only.
- All VLAN ports added by GVRP are tagged.
- GVRP is supported on untagged ports belonging to a default VLAN, and tagged ports.
- GVRP cannot be enabled on untagged ports belonging to a non-default VLAN *unless* native VLAN is turned on.
- GVRP requires end stations with dynamic access NICs.
- Based on updates from GVRP-enabled devices, GVRP allows the system to dynamically create a port-based VLAN (unspecified) with a specific VLAN ID and a specific port.
- On a port-by-port basis, GVRP allows the system to learn about GVRP updates to an existing port-based VLAN with that VLAN ID and IEEE 802.1Q tagging.
- GVRP allows the system to send dynamic GVRP updates about your existing port-based VLAN.
- GVRP updates are not sent to any blocked Spanning Tree Protocol (STP) ports. GVRP operates only on ports that are in the forwarding state.
- GVRP operates only on ports that are in the STP forwarding state. If GVRP is enabled, a port that changes to the STP forwarding state automatically begins to participate in GVRP. A port that changes to an STP state other than forwarding no longer participates in GVRP.
- VLANs created dynamically with GVRP exist only as long as a GVRP-enabled device is sending updates. If the devices no longer send updates, or GVRP is disabled, or the system is rebooted, all dynamic VLANs are removed.
- GVRP manages the active topology, not non-topological data such as VLAN protocols. If a local bridge needs to classify and analyze packets by VLAN protocols, you must manually configure protocol-based VLANs, and simply rely on GVRP for VLAN updates. But if the local bridge needs to know only how to reach a given VLAN, then GVRP provides all necessary information.
- The VLAN topologies that GVRP learns are treated differently from VLANs that are statically configured. The GVRP dynamic updates are not saved in NVRAM, while static updates are saved in NVRAM. When GVRP is disabled, the system deletes all VLAN interfaces that were learned through GVRP and leaves unchanged all VLANs that were manually configured.

clear gvrp statistics

C E S

Clear GVRP statistics on an interface.

S4810

S4820T

Syntax clear gvrp statistics interface *interface*

Parameters

interface <i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.• For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.• For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
----------------------------	---

Defaults No default values or behavior.

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Related Commands

show gvrp statistics	Display the GVRP statistics
--------------------------------------	-----------------------------

debug gvrp

C E S

Enable debugging on GVRP.

S4810

S4820T

Syntax debug gvrp {config | events | pdu}

To disable debugging, use the no debug gvrp {config | events | pdu} command.

Parameters

config	Enter the keyword config to enable debugging on the GVRP configuration.
event	Enter the keyword event to enable debugging on the JOIN/LEAVE events. Not available on the S4810 or S4820T.

pdu	Enter the keyword pdu followed one of the following Interface keywords and slot/port or number information: (Not available on S4810 or S4820T) <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. 						
Defaults	Disabled						
Command Modes	EXEC Privilege						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on C, E, and S-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on C, E, and S-Series
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.7.0	Introduced on S4810						
Version 7.6.1.0	Introduced on C, E, and S-Series						

disable

C E S

S4810

S4820T

Globally disable GVRP.

Syntax

disable

To re-enable GVRP, use the **no disable** command.

Defaults

Enabled

Command Modes

CONFIGURATION-GVRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Related Commands

gvrp enable	Enable GVRP on physical interfaces and LAGs.
protocol gvrp	Access GVRP protocol

garp timers

C E S

S4810

S4820T

Set the intervals (in milliseconds) for sending GARP messages.

Syntax

garp timers {join | leave | leave-all}

To return to the previous setting, use the no garp timers {join | leave | leave-all} command.

Parameters

join	Enter the keyword <code>join</code> followed by the number of milliseconds to configure the join time. Range: 100 to 147483647 milliseconds Default: 200 milliseconds Note: Designate the milliseconds in multiples of 100
leave	Enter the keyword <code>leave</code> followed by the number of milliseconds to configure the leave time. Range: 100 to 2147483647 milliseconds Default: 600 milliseconds Note: Designate the milliseconds in multiples of 100
leave-all	Enter the keyword <code>leave-all</code> followed by the number of milliseconds to configure the leave-all time. Range: 100 to 2147483647 milliseconds Default: 1000 milliseconds Note: Designate the milliseconds in multiples of 100

Defaults

Default as above

Command Modes

CONFIGURATION-GVRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Usage Information

Join Timer—Join messages announce the willingness to register some attributes with other participants. Each GARP application entity sends a Join message twice, for reliability, and uses a join timer to set the sending interval.

Leave Timer—Leave announces the willingness to de-register with other participants. Together with the Join, Leave messages help GARP participants complete attribute reregistration and de-registration. Leave Timer starts upon receipt of a `leave` message sent for de-registering some attribute information. If a `join` message is *not* received before the `leave` time expires, the GARP application entity removes the attribute information as requested.

Leave All Timer—The Leave All Timer starts when a GARP application entity starts. When this timer expires, the entity sends a `leave-all` message so that other entities can re-register their attribute information. Then, the `leave-all` time begins again.

**Related
Commands**

show garp timers	Display the current GARP times
----------------------------------	--------------------------------

gvrp enable

C E S

S4810

S4820T

Enable GVRP on physical interfaces and LAGs.

Syntax

gvrp enable

To disable GVRP on the interface, use the no gvrp enable command.

Defaults

Disabled

Command Modes

CONFIGURATION-INTERFACE

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

**Related
Commands**

disable	Globally disable GVRP.
-------------------------	------------------------

gvrp registration

C E S

S4810

S4820T

Configure the GVRP register type.

Syntax

gvrp registration {fixed | normal | forbidden}

To return to the default, use the gvrp register normal command.

Parameters

fixed	Enter the keyword fixed followed by the VLAN range in a comma separated VLAN ID set.
normal	Enter the keyword normal followed by the VLAN range in a comma separated VLAN ID set. This is the default
forbidden	Enter the keyword forbidden followed by the VLAN range in a comma separated VLAN ID set.

Defaults

Default registration is normal

Command Modes

CONFIGURATION-INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Usage Information

The fixed registration prevents an interface, configured via the command line to belong to a VLAN (static configuration), from being un-configured when it receives a Leave message. Therefore, the registration mode on that interface is fixed.

The normal registration is the default registration. The port's membership in the VLANs depends on GVRP. The interface becomes a member of VLANs after learning about the VLAN through GVRP. If the VLAN is removed from the port that sends GVRP advertisements to this device, then the port will stop being a member of the VLAN.

The forbidden is used when you do not want the interface to advertise or learn about VLANs through GVRP.

Related Commands

show gvrp	Display the GVRP configuration including the registration
---------------------------	---

protocol gvrp

C **E** **S**

Access GVRP protocol — (config-gvrp)#.

Syntax

protocol gvrp

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 7.6.1.0	Introduced on C, E, and S-Series
-----------------	----------------------------------

Related Commands

disable	Globally disable GVRP.
-------------------------	------------------------

show config

C **E** **S**

Display the global GVRP configuration.

S4810**S4820T****Syntax**

show config

Command Modes

CONFIGURATION-GVRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Related Commands

gvrp enable	Enable GVRP on physical interfaces and LAGs.
protocol gvrp	Access GVRP protocol.

show garp timers

C E S

S4810

S4820T

Display the GARP timer settings for sending GARP messages.

Syntax

show garp timers

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C, E, and S-Series

Example

```
FTOS#show garp timers
GARP Timers      Value (milliseconds)
-----
Join Timer       200
Leave Timer       600
LeaveAll Timer    10000
FTOS#
```

Related Commands

garp timers	Set the intervals (in milliseconds) for sending GARP messages.
-----------------------------	--

show gvrp

C E S

S4810

S4820T

Display the GVRP configuration.

Syntaxshow gvrp [brief | *interface*]

Parameters	brief	(OPTIONAL) Enter the keyword brief to display a brief summary of the GVRP configuration.
	interface	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
Defaults	No default values or behavior	
Command Modes	EXEC	
	EXEC Privilege	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C, E, and S-Series
Example	<pre>R3#show gvrp brief GVRP Feature is currently enabled. Port GVRP Status Edge-Port ----- Gi 3/0 Disabled No Gi 3/1 Disabled No Gi 3/2 Enabled No Gi 3/3 Disabled No Gi 3/4 Disabled No Gi 3/5 Disabled No Gi 3/6 Disabled No Gi 3/7 Disabled No Gi 3/8 Disabled No R3#show gvrp brief</pre>	
Usage Information	<p>If no ports are GVRP participants, the message output changes from:</p> <p>GVRP Participants running on <port_list></p> <p>to</p> <p>GVRP Participants running on no ports</p>	
Related Commands	show gvrp statistics	Display the GVRP statistics

show gvrp statistics

C **E** **S**

Display the GVRP configuration statistics.

Syntax

show gvrp statistics {interface *interface* | summary}

Parameters

interface <i>interface</i>	<p>Enter the keyword <i>interface</i> followed by one of the interface keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
summary	Enter the keyword summary to display just a summary of the GVRP statistics.

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.6.1.0	Introduced on C, E, and S-Series
-----------------	----------------------------------

Example

```
FTOS#show gvrp statistics int gi 1/0
```

```
Join Empty Received: 0
Join In Received: 0
Empty Received: 0
LeaveIn Received: 0
Leave Empty Received: 0
Leave All Received: 40
Join Empty Transmitted: 156
Join In Transmitted: 0
Empty Transmitted: 0
Leave In Transmitted: 0
Leave Empty Transmitted: 0
Leave All Transmitted: 41
Invalid Messages/Attributes skipped: 0
Failed Registrations: 0
FTOS#
```

Usage Information

Invalid messages/attributes skipped can occur in the following cases:

- The incoming GVRP PDU has an incorrect length.
- "End of PDU" was reached before the complete attribute could be parsed.

- The Attribute Type of the attribute that was being parsed was not the GVRP VID Attribute Type (0x01).
- The attribute that was being parsed had an invalid attribute length.
- The attribute that was being parsed had an invalid GARP event.
- The attribute that was being parsed had an invalid VLAN ID. The valid range is 1 - 4095.

A failed registration can occur for the following reasons:

- Join requests were received on a port that was blocked from learning dynamic VLANs (GVRP Blocking state).
- An entry for a new GVRP VLAN could not be created in the GVRP database.

**Related
Commands**

[show gvrp](#)

Display the GVRP configuration

High Availability (HA)

Overview

High Availability (HA) in FTOS is configuration synchronization to minimize recovery time in the event of a Route Processor Module (RPM) failure. The feature is available on the C-Series and E-Series where noted by these symbols under command headings: **C** **E** **S** **S4810** and **S4820T**

FTOS on the E-Series supports RPM 1 + 1 redundancy. The Primary RPM performs all routing and control operations, while the Secondary RPM is online and monitoring the Primary RPM.

In general, a protocol is defined as “hitless” in the context of an RPM failure/failover, and not failures of a line card, SFM, or power module. A protocol is defined as hitless if an RPM failover has no impact on the protocol.

Some protocols must be specifically enabled for HA, and some protocols are only hitless if related protocols are also enabled as hitless (Refer to the [redundancy protocol](#) command).

High Availability is supported on the S-Series S4810 **S4810** with FTOS 8.3.12.0 and E-Series ExaScale **E**_X with FTOS 8.1.1.0 and later. High Availability is supported on the S4820T **S4820T** with FTOS 8.3.19.0 and later.

Commands

The HA commands available in FTOS are:

- [patch flash://RUNTIME_PATCH_DIR](#)
- [process restartable](#)
- [redundancy auto-failover-limit](#)
- [redundancy disable-auto-reboot](#)
- [redundancy force-failover](#)
- [redundancy primary](#)
- [redundancy protocol](#)
- [redundancy reset-counter](#)

- [redundancy sfm standby](#)
- [redundancy synchronize](#)
- [show patch](#)
- [show processes restartable](#)
- [show redundancy](#)

patch flash://RUNTIME_PATCH_DIR

E **S4810**

Insert an In-Service Modular Hot-Fix patch.

S4820T

Syntax

patch flash://RUNTIME_PATCH_DIR/patch-filename

To remove the patch, enter **no patch flash://RUNTIME_PATCH_DIR/patch-filename**

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.2.1.0	Introduced

Usage Information

The patch filename includes the FTOS version, the platform, the cpu, and the process it affects (FTOS-platform-cpu-process-patchversion.rtp). For example, a patch labeled 7.8.1.0-EH-rp2-l2mgr-1.rtp identifies that this patch applies to FTOS version 7.8.1.0 - E-Series platform, for RP2, addressing the layer 2 management process, and this is the first version of this patch.

There is no need to reload or reboot the system when the patch is inserted. The In-Service Modular patch replaces the existing process code. Once installation is complete, the system executes the patch code as though it was always there.

Related Commands

show patch	Display the system patches loaded with the In-Service Modular Hot Fix Command.
----------------------------	--

process restartable

E **S4810**

Enable a process to be restarted. Restartability is subject to a maximum restart limit — the limit is defined as a configured amount of restarts within a configured amount of time. On the software exception that exceeds the limit, the system reloads (for systems with a single RPM) or fails over (for systems with dual RPMs).

S4820T

Syntax

process restartable [*process*] [**count number**] [**period minutes**]

Parameters	process	Configure a process to be restartable.
	count number	Enter the number of times a process can restart within the configured period. Range: 1-3 Default: 3
	period minutes	Enter the amount of time within which the process can restart <i>count</i> times. Range: 1-60 minutes Default: 60 minutes
Defaults	By default, a process can be restarted a maximum of 3 times within 1 hour. On the exception that exceeds this limit, the system reloads or fails over.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.4.1.0	Introduced on E-Series.
Related Commands	show processes restartable	

redundancy auto-failover-limit



Specify an auto-failover limit for RPMs. When a non-recoverable fatal error is detected, an automatic RPM failover occurs. This command does not affect user-initiated (manual) failovers.

Syntax `redundancy auto-failover-limit [count number [period minutes] | period minutes]`

To disable the auto-failover limit control, enter no redundancy auto-failover-limit.

Parameters	count number	Enter the number of times the RPMs can automatically failover within the period defined in the period parameter. Range: 2 to 10 Default: 3
	period minutes]	Enter a duration in which to allow a number of automatic failovers (limited to the number defined in the count parameter). Range: 5 to 9000 minutes Default: 60 minutes
Defaults	Count: 3 Period: 60 minutes	
Command Modes	CONFIGURATION	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.5.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

Usage Information

If auto failover is disabled, enter the **redundancy auto-failover-limit** (without any parameters) to set auto failover to the default parameters (Count 3, Period 60 minutes). Use the [show redundancy](#) command to view the redundancy status.

When you change one or both of the optional parameters, FTOS checks that the interval between auto failovers is more than five (5) minutes. If the interval is less, FTOS returns a configuration error message.

redundancy disable-auto-reboot

C E S4810

S4820T

Prevent the system from auto-rebooting the failed module.

Syntax

redundancy disable-auto-reboot [*rpm* | *card number* | **all**]

To return to the default, enter **no redundancy disable-auto-reboot rpm**.

Parameters

rpm	Enter the keyword rpm to disable auto-reboot of the failed RPM.
------------	--

Defaults

Disabled (that is, the failed module is automatically rebooted).

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.1.0	Added the all option
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on E-Series

Usage Information

Enabling this command will keep the failed RPM in the failed state. If there are two RPMs in the system, enabling this command prevents the failed RPM from becoming a working Standby RPM. If there is only one RPM in the system, the failed RPM will not recover — this will affect the system.

redundancy force-failover

C E S4810

S4820T

Force the secondary RPM to become primary RPM or force an SFM (on an E-Series chassis only) to become the standby SFM. This command can also be used to upgrade the software on one RPM from the other when the other has been loaded with the upgraded software.

Syntax

redundancy force-failover { *rpm* | *sfm* [*slot-number*] }

Parameters	rpm	Enter the keyword <code>rpm</code> to force the secondary RPM to become the primary RPM.
	sfm slot-number	EtherScale Only — Enter the keyword <code>sfm</code> followed by the SFM slot number. Range: 0 to 8.

Defaults Not configured.

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.5.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

Usage Information

This command can be used to provide a hitless or warm upgrade. A hitless upgrade means that a software upgrade does not require a reboot of the line cards. A warm upgrade means that a software upgrade requires a reset of the line cards and SFMs. A warm upgrade is possible for major releases and lower, while a hitless upgrade can only support patch releases.

You load the software upgrade on one RPM and then issue this command with the **rpm** keyword to move the software to the other RPM. The system senses the condition and provides a series of prompts appropriate to that context, as shown in the following example:



Note: On C-Series, this command could affect traffic (even during hot-failover) since the switch fabric present on the RPM is taken down during the failover.

Example

```
FTOS#redundancy force-failover rpm
Peer RPM's SW version is different but HA compatible.
Failover can be done by warm or hitless upgrade.
All linecards will be reset during warm upgrade.
```

```
Specify hitless upgrade or warm upgrade [confirm hitless/warm]:hitless
Proceed with warm upgrade [confirm yes/no]:
```

Example (force-failover sfm)

```
FTOS#redundancy force-failover sfm 0
%TSM-6-SFM_FAILOVER: Standby switch to SFM 8
Standby switch to SFM 0
FTOS#
```

redundancy primary



Set an RPM as the primary RPM.


Syntax

redundancy primary [rpm0 | rpm1]

To delete a configuration, enter **no redundancy primary**.

Parameters	rpm0	Enter the keyword rpm0 to set the RPM in slot R0 as the primary RPM.
	rpm1	Enter the keyword rpm1 to set the RPM in slot R1 as the primary RPM.
Defaults	The RPM in slot R0 is the Primary RPM.	
Command Modes	CONFIGURATION	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.5.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

redundancy protocol



Enable hitless protocols.


Syntax

redundancy protocol { lACP | xstp }

To disable a hitless protocol, enter **no redundancy protocol { lACP | xstp }**.

Parameters	lACP	Enter the keyword lACP to make LACP hitless.
	xstp	Enter the keyword xstp to invoke hitless STP (all STP modes — MSTP, PVST+, RSTP, STP). Note: On the C-Series, hitless STP is available only for MSTP, PVST+, and RSTP.
Defaults	Disabled	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.2.1.0	Introduced on C-Series
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on E-Series
Related Commands	show lACP	Display the lACP configuration
	show redundancy	Display the current redundancy configuration.

redundancy reset-counter

 **S4810**



Reset failover counter and timestamp information displayed in the [show redundancy](#) command output.

Syntax `redundancy reset-counter`

Defaults Not configured

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on E-Series

redundancy sfm standby



Place the SFM in an offline state.

Syntax `redundancy sfm standby`

Place the SFM in an online state using the command `no redundancy sfm standby` command.

Defaults The SFM is online by default.

Command Modes CONFIGURATION

Command History

Version 7.5.1.0	Introduced on C-Series Only
-----------------	-----------------------------

Usage Information

When a secondary RPM with logical SFM is inserted or removed, the system must add or remove the backplane links to the switch fabric trunk. To avoid traffic disruption, use this command when the secondary RPM is inserted. When this command is executed, the logical SFM on the standby RPM is immediately taken offline and the SFM state is set as “standby”.



Note: This command could affect traffic when taking the secondary SFM offline.

Example

```
FTOS#show sfm all
```

```
Switch Fabric State: up
```

```
-- Switch Fabric Modules --  
Slot Status
```

```
-----
```

```

    0   active
    1   active

FTOS#configure
FTOS(conf)#redundancy sfm standby
Taking secondary SFM offline...
!
FTOS(conf)#do show sfm all

Switch Fabric State:  up

-- Switch Fabric Modules  --
Slot  Status
-----
    0   active
    1   standby

FTOS(conf)#no redundancy sfm
Taking secondary SFM online...
!
FTOS(conf)#do show sfm all

Switch Fabric State:  up

-- Switch Fabric Modules  --
Slot  Status
-----
    0   active
    1   active

```

Related Commands

show sfm	Display the SFM status
show switch links	Display the switch fabric backplane or internal status.

redundancy synchronize

C **E** **S4810**

Manually synchronize data once between the Primary RPM and the Secondary RPM.

S4820T

Syntax

redundancy synchronize [full | persistent-data | system-data]

Parameters

full	Enter the keyword full to synchronize all data.
persistent-data	Enter the keywords persistent-data to synchronize the startup configuration between RPMs.
system-data	Enter the keywords system-data to synchronize persistent-data and the running configuration file, event log, SFM and line card states.

Defaults

Not configured.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale

Version 7.5.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

show patch

E **S4810**

Display the system patches loaded with the In-Service Modular Hot Fix Command.

S4820T

Syntax

show patch

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.2.1.0	Introduced on E-Series

Related Commands

[patch flash://
RUNTIME_PATCH_DIR](#) Insert an In-Service Modular Hot-Fix patch.

show processes restartable

E **S4810**

Display the processes and tasks configured for restartability.

S4820T

Syntax

show processes restartable [history]

Parameters

history	Display the last time the restartable processes crashed.
----------------	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.0	Introduced on E-Series

Example

```
FTOS#show processes restartable
```

```
-----
Process name      State      How many times restarted  Timestamp last restarted
-----
radius            enabled    0                        0          [-]
tacplus           enabled    0                        0          [-]
-----
```

```
FTOS#show processes restartable history
```

```
-----
Process name      Timestamp last crashed
-----
```

radius[5/23/2001 10:11:47]
-----**Related
Commands**[process restartable](#)

show redundancy

C **E** **S4810**

Display the current redundancy configuration.

S4820T**Syntax****show redundancy****Command Modes**

EXEC

EXEC Privilege

**Command
History**-----
Version 8.3.19.0 Introduced on the S4820T.-----
Version 8.3.12.0 Introduced on the S4810.-----
Version 8.1.1.0 Introduced on E-Series ExaScale-----
Version 7.5.1.0 Introduced on C-Series-----
Version 7.6.1.0 Introduced on E-Series
-----**Example**

```

FTOS#show redundancy

-- RPM Status --
-----
RPM Slot ID:          1
RPM Redundancy Role:  Primary
RPM State:            Active
RPM SW Version:       7.5.1.0
Link to Peer:         Up

-- PEER RPM Status --
-----
RPM State:            Standby
RPM SW Version:       7.5.1.0

-- RPM Redundancy Configuration --
-----
Primary RPM:          rpm0
Auto Data Sync:       Full
Failover Type:        Hot Failover
Auto reboot RPM:      Enabled
Auto failover limit:  3 times in 60 minutes

-- RPM Failover Record --
-----
Failover Count:       1
Last failover timestamp: Jul 13 2007 21:25:32
Last failover Reason:  User request

-- Last Data Block Sync Record: --
-----

```

```

Line Card Config:      succeeded Jul 13 2007 21:28:53
Start-up Config:      succeeded Jul 13 2007 21:28:53
SFM Config State:     succeeded Jul 13 2007 21:28:53
Runtime Event Log:    succeeded Jul 13 2007 21:28:53
Running Config:       succeeded Jul 13 2007 21:28:53
FTOS#

```

Table 20-1. show redundancy Command Example Fields

Field	Description
RPM Status	Displays the following information: <ul style="list-style-type: none"> Slot number of the RPM Whether the RPM is Primary or Standby The state of the RPM: Active, Standby, Booting, or Offline Whether the link to the second RPM is up or down.
PEER RPM Status	Displays the state of the second RPM, if present
RPM Redundancy Configuration	Displays the following information: <ul style="list-style-type: none"> which RPM is the preferred Primary on next boot (redundancy primary command) the data sync method configured (redundancy synchronize command). the failover type (you cannot change this; it is software dependent) Hot Failover means the running configuration and routing table are applied on secondary RPM. Fast Failover means the running configuration is not applied on the secondary RPM till failover occurs, and the routing table on line cards is cleared during failover. the status of auto booting the RPM (redundancy disable-auto-reboot command) the parameter for auto failover limit control (redundancy auto-failover-limit command)
RPM Failover Record	Displays the following information: <ul style="list-style-type: none"> RPM failover counter (to reset the counter, use the redundancy reset-counter command) the time and date of the last RPM failover the reason for the last RPM failover.
Last Data Sync Record	Displays the data sync information and the timestamp for the data sync: <ul style="list-style-type: none"> Start-up Config is the contents of the startup-config file. Line Card Config is the line card types configured and interfaces on those line cards. Runtime Event Log is the contents of the Event log. Running Config is the current running-config. This field only appears when you enter the command from the Primary RPM.

Example (S4820T)

```

FTOS#show redundancy

-- Stack-unit Status --
-----
Mgmt ID:                0
Stack-unit ID:          0
Stack-unit Redundancy Role: Primary
Stack-unit State:       Active
Stack-unit SW Version:  FIT-R2D2-1-0-0-89

```

```
Link to Peer:                Down
Peer Stack-unit:             not present

-- Stack-unit Redundancy Configuration --
-----
Primary Stack-unit:          mgmt-id    0
Auto Data Sync:              Full
Failover Type:               Hot Failover
Auto reboot Stack-unit:      Disabled
Auto failover limit:         3 times in 60 minutes

-- Stack-unit Failover Record --
-----
Failover Count:              0
Last failover timestamp:     None
Last failover Reason:        None
Last failover type:          None

-- Last Data Block Sync Record: --
-----
Stack Unit Config:           no block sync done
  Start-up Config:           no block sync done
Runtime Event Log:           no block sync done
  Running Config:            no block sync done
    ACL Mgr:                  no block sync done
    LACP:                     no block sync done
    STP:                      no block sync done
    SPAN:                     no block sync done

FTOS#
```


ICMP Message Types

This chapter lists and describes the possible ICMP Message Type. The first three columns list the possible symbol or type/code. For example, you would receive a ! or 03 as an echo reply from a ping.

Table 21-2. ICMP Messages and their definitions

Symbol	Type	Code	Description	Query	Error
•			Timeout (no reply)		
!	0	3	echo reply	•	
U	3		destination unreachable:		
		0	network unreachable		•
		1	host unreachable		•
		2	protocol unreachable		•
		3	port unreachable		•
		4	fragmentation needed but don't fragment bit set		•
		5	source route failed		•
		6	destination network unknown		•
		7	destination host unknown		•
		8	source host isolated (obsolete)		•
		9	destination network administratively prohibited		•
		10	destination host administratively prohibited		•
		11	network unreachable for TOS		•
		12	host unreachable for TOS		•
		13	communication administratively prohibited by filtering		•
		14	host precedence violation		•
		15	precedence cutoff in effect		•
C	4	0	source quench		•
	5		redirect		•
		0	redirect for network		•
		1	redirect for host		•
		2	redirect for type-of-service and network		•

Table 21-2. ICMP Messages and their definitions

Symbol	Type	Code	Description	Query	Error
		3	redirect for type-of-service and host		•
	8	0	echo request	•	
	9	0	router advertisement	•	
	10	0	router solicitation	•	
&	11		time exceeded:		
		0	time-to-live equals 0 during transit		•
		1	time-to-live equals 0 during reassembly		•
	12		parameter problem:		
		1	IP header bad (catchall error)		•
		2	required option missing		•
	13	0	timestamp request	•	
	14	0	timestamp reply	•	
	15	0	information request (obsolete)	•	
	16	0	information reply (obsolete)	•	
	17	0	address mask request	•	
	18	0	address mask reply	•	

Internet Group Management Protocol (IGMP)

Overview

The IGMP commands are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

This chapter contains the following sections:

- [IGMP Commands](#)
- [IGMP Snooping Commands](#)

IGMP Commands

FTOS supports IGMPv1/v2/v3 and is compliant with RFC-3376.

Important Points to Remember

- FTOS supports PIM-SM and PIM-SSM include and exclude modes.
- IGMPv2 is the default version of IGMP on interfaces. IGMPv3 can be configured on interfaces, and is backward compatible with IGMPv2.
- The maximum number of interfaces supported is 512 on the E-Series. On the C-Series and S-Series 31 interfaces are supported.
- Maximum number of groups supported – no hard limit
- IGMPv3 router interoperability with IGMPv2 and IGMPv1 routers on the same subnet is *not* supported.
- An administrative command (`ip igmp version`) is added to manually set the IGMP version.
- All commands, previously used for IGMPv2, are compatible with IGMPv3.

The commands include:

- `clear ip igmp groups`
- `debug ip igmp`

- [ip igmp access-group](#)
- [ip igmp group-join-limit](#)
- [ip igmp immediate-leave](#)
- [ip igmp last-member-query-interval](#)
- [ip igmp querier-timeout](#)
- [ip igmp query-interval](#)
- [ip igmp query-max-resp-time](#)
- [ip igmp ssm-map](#)
- [ip igmp static-group](#)
- [ip igmp version](#)
- [show ip igmp groups](#)
- [show ip igmp interface](#)
- [show ip igmp ssm-map](#)

clear ip igmp groups

C E S

S4810

S4820T

Clear entries from the group cache table.

Syntax

clear ip igmp groups [*group-address* | *interface*]

Parameters

<i>group-address</i>	(OPTIONAL) Enter the IP multicast group address in dotted decimal format.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For an 100/1000 Base-T Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. • For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. • For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Usage Information

IGMP commands accept *only* non-VLAN interfaces — specifying VLAN will not yield a result.

debug ip igmp

C E S

S4810

S4820T

Enable debugging of IGMP packets.

Syntax

debug ip igmp [*group address* | *interface*]

To disable IGMP debugging, enter no debug ip igmp [*group address* | *interface*]. To disable all debugging, enter undebug all.

Parameters

<i>group-address</i>	(OPTIONAL) Enter the IP multicast group address in dotted decimal format.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by: <ul style="list-style-type: none"> -C-Series and S-Series range: 1-128 -E-Series range: 1-32 for EtherScale, 1-255 for TeraScale For SONET interfaces, enter the keyword sonet followed by the slot/port information. This keyword is only available on E-Series and C-Series. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.

Defaults

Disabled

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Usage Information

IGMP commands accept *only* non-VLAN interfaces — specifying a VLAN will not yield a result. This command displays packets for IGMP and IGMP Snooping.

ip igmp access-group

C E S

S4810

S4820T

Use this feature to specify access control for packets.

Syntax ip igmp access-group *access-list*

To remove the feature, use the no ip igmp access-group *access-list* command.

Parameters	<i>access-list</i>	Enter the name of the extended ACL (16 characters maximum).
-------------------	--------------------	---

Defaults Not configured

Command Modes INTERFACE (*conf-if-interface-slot/port*)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series
	Version 7.6.1.0	Introduced on E-Series

Usage Information The access list accepted is an extended ACL. This feature is used to block IGMP reports from hosts, on a per-interface basis; based on the group address and source address specified in the access list.

ip igmp group-join-limit

C E S

S4810

S4820T

Use this feature to limit the number of IGMP groups that can be joined in a second.

Syntax ip igmp group-join-limit *number*

Parameters	<i>number</i>	Enter the number of IGMP groups permitted to join in a second. Range: 1 to 10000
-------------------	---------------	---

Defaults No default values or behavior

Command Modes CONFIGURATION (*conf-if-interface-slot/port*)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series
	Version 7.6.1.0	Introduced on E-Series

ip igmp immediate-leave

C E S

Enable IGMP immediate leave.

S4810

S4820T

Syntax

ip igmp immediate-leave [group-list *prefix-list-name*]

To disable ip igmp immediate leave, use the no ip igmp immediate-leave command.

Parameters

group-list <i>prefix-list-name</i>	Enter the keyword group-list followed by a string up to 16 characters long of the <i>prefix-list-name</i> .
------------------------------------	---

Defaults

Not configured

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.8.1.0	Introduced on S-Series
-----------------	------------------------

Version 7.7.1.0	Introduced on C-Series
-----------------	------------------------

E-Series legacy command	
-------------------------	--

Usage Information

Querier normally sends a certain number of group specific queries when a leave message is received, for a group, prior to deleting a group from the membership database. There may be situations in which immediate deletion of a group from the membership database is required. This command provides a way to achieve the immediate deletion. In addition, this command provides a way to enable immediate-leave processing for specified groups.

ip igmp last-member-query-interval

C E S

Change the last member query interval, which is the Max Response Time inserted into Group-Specific Queries sent in response to Leave Group messages. This interval is also the interval between Group-Specific Query messages.

S4810

S4820T

Syntax

ip igmp last-member-query-interval *milliseconds*

To return to the default value, enter no ip igmp last-member-query-interval.

Parameters

<i>milliseconds</i>	Enter the number of milliseconds as the interval. Default: 1000 milliseconds Range: 100 to 65535
---------------------	--

Defaults

1000 milliseconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
E-Series legacy command	

ip igmp querier-timeout

C E S

S4810

S4820T

Change the interval that must pass before a multicast router decides that there is no longer another multicast router that should be the querier.

Syntaxip igmp querier-timeout *seconds*

To return to the default value, enter no ip igmp querier-timeout.

Parameters

<i>seconds</i>	Enter the number of seconds the router must wait to become the new querier. Default: 125 seconds Range: 60 to 300
----------------	---

Defaults

125 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on S-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
Version 7.5.1.0	Introduced on C-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
E-Series legacy command	

ip igmp query-interval

C E S

S4810

S4820T

Change the transmission frequency of IGMP general queries sent by the Querier.

Syntaxip igmp query-interval *seconds*

To return to the default values, enter no ip igmp query-interval.

Parameters	<i>seconds</i>	Enter the number of seconds between queries sent out. Default: 60 seconds Range: 1 to 18000
Defaults	60 seconds	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on S-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
	Version 7.5.1.0	Introduced on C-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
	E-Series legacy command	

ip igmp query-max-resp-time

C E S

S4810

S4820T

Set the maximum query response time advertised in general queries.

Syntax

ip igmp query-max-resp-time *seconds*

To return to the default values, enter no ip igmp query-max-resp-time.

Parameters	<i>seconds</i>	Enter the number of seconds for the maximum response time. Default: 10 seconds Range: 1 to 25
Defaults	10 seconds	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series

Version 7.6.1.0	Introduced on S-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
Version 7.5.1.0	Introduced on C-Series in Interface VLAN mode only to enable that system to act as an IGMP Proxy Querier.
E-Series legacy command	

ip igmp ssm-map

C E S

S4810

S4820T

Use a statically configured list to translate (*,G) memberships to (S,G) memberships.

Syntax

`ip igmp ssm-map std-access-list source-address`

Undo this configuration, that is, remove SSM map (S,G) states and replace them with (*,G) states using the command `ip igmp ssm-map std-access-list source-address` command.

Parameters

<i>std-access-list</i>	Specify the standard IP access list that contains the mapping rules for multicast groups.
<i>source-address</i>	Specify the multicast source address to which the groups are mapped.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.7.1.0	Introduced on E-Series

Usage Information

Mapping applies to both v1 and v2 IGMP joins; any updates to the ACL are reflected in the IGMP groups. You may not use extended access lists with this command. When a static SSM map is configured and the router cannot find any matching access lists, the router continues to accept (*,G) groups.

Related Commands

ip access-list standard	Create a standard access list to filter based on IP address.
---	--

ip igmp static-group

C E S

S4810

S4820T

Configure an IGMP static group.

Syntax `ip igmp static-group { group address [exclude [source address]] | [include { source address}] }`

To delete a static address, use the `no ip igmp static-group { group address [exclude [source address]] | [include { source address}] }` command.

Parameters	<i>group address</i>	Enter the group address in dotted decimal format (A.B.C.D)
	exclude <i>source address</i>	(OPTIONAL) Enter the keyword <code>exclude</code> followed by the source address, in dotted decimal format (A.B.C.D), for which a static entry needs to be added.
	include <i>source address</i>	(OPTIONAL) Enter the keyword <code>include</code> followed by the source address, in dotted decimal format (A.B.C.D), for which a static entry needs to be added. Note: A group in include mode must have at least one source address defined.

Defaults No default values or behavior

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.5.1.0	Expanded to support the <code>exclude</code> and <code>include</code> options
	E-Series legacy command	

Usage Information A group in the include mode should have at least one source address defined. In exclude mode if no source address is specified, FTOS implicitly assumes all sources are included. If neither include or exclude is specified, FTOS implicitly assumes a IGMPv2 static join.

Command Limitations

- Only one mode (include or exclude) is permitted per multicast group per interface. To configure another mode, all sources belonging to the original mode must be unconfigured.
- If a static configuration is present and a packet for the same group arrives on an interface, the dynamic entry will completely overwrite all the static configuration for the group.

Related Commands	show ip igmp groups	Display IGMP group information
-------------------------	-------------------------------------	--------------------------------

ip igmp version

C **E** **S**

S4810

S4820T

Manually set the version of the router to IGMPv2 or IGMPv3.

Syntax	ip igmp version {2 3}
Parameters	2 Enter the number 2 to set the IGMP version number to IGMPv2.
	3 Enter the number 3 to set the IGMP version number to IGMPv3.
Defaults	2 (that is IGMPv2)
Command Modes	INTERFACE
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.8.1.0 Introduced on S-Series
	Version 7.7.1.0 Introduced on C-Series
	Version 7.5.1.0 Introduced for E-Series

show ip igmp groups

C E S

View the IGMP groups.

S4810

S4820T

Syntax	show ip igmp groups [<i>group-address</i> [detail] detail <i>interface</i> [<i>group-address</i> [detail]]]
Parameters	<i>group-address</i> (OPTIONAL) Enter the group address in dotted decimal format to view information on that group only.

<i>interface</i>	<p>(OPTIONAL) Enter the interface type and slot/port information:</p> <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a Loopback interface, enter the keyword <code>loopback</code> followed by a number from 0 to 16383. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN interface enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>detail</i>	(OPTIONAL) Enter the keyword <code>detail</code> to display the IGMPv3 source information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series and on C-Series
Version 7.5.1.0	Expanded to support the <code>detail</code> option.
E-Series legacy command	

Usage Information

This command displays the IGMP database including configured entries for either all groups on all interfaces, or all groups on specific interfaces, or specific groups on specific interfaces.

Example

```

FTOS#show ip igmp groups
Total Number of Groups: 5
IGMP Connected Group Membership
Group Address    Interface      Mode          Uptime    Expires    Last Reporter
225.0.0.0        Vlan 100      IGMPv2        00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2
225.0.0.1        Vlan 100      IGMPv2        00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2
225.0.0.2        Vlan 100      IGMPv2        00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2
225.0.0.3        Vlan 100      IGMPv2        00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2
225.0.0.4        Vlan 100      IGMPv2        00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2

```

**Example
(VLT Port
Channel Down)**

Note: The asterisk (*) after the port channel number (Po 2) highlighted in the example below indicates the port channel is VLT, that the local VLT port channel is down and the remote VLT port is up.

```

FTOS#show ip igmp groups
Total Number of Groups: 5
IGMP Connected Group Membership
Group Address      Interface          Mode           Uptime    Expires    Last Reporter
225.0.0.0          Vlan 100          IGMPv2         00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2*
225.0.0.1          Vlan 100          IGMPv2         00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2*
225.0.0.2          Vlan 100          IGMPv2         00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2*
225.0.0.3          Vlan 100          IGMPv2         00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2*
225.0.0.4          Vlan 100          IGMPv2         00:00:05  00:02:04  3.0.0.51
  Member Ports: Po 2*

```

Table 22-1. show ip igmp groups Command Example Fields

Field	Description
Group Address	Lists the multicast address for the IGMP group.
Interface	Lists the interface type, slot and port number.
Mode	Displays the IGMP version used.
Uptime	Displays the amount of time the group has been operational.
Expires	Displays the amount of time until the entry expires.
Last Reporter	Displays the IP address of the last host to be a member of the IGMP group.
Member Ports	Indicates the port channel. If the port channel is VLT, an asterisk (*) after the port channel number indicates the port channel is locally down and that a remote VLT port is up.

show ip igmp interface

C E S

54810

54820T

View information on the interfaces participating in IGMP.

Syntax

show ip igmp interface [*interface*]

Parameters

<i>interface</i>	<p>(OPTIONAL) Enter the interface type and slot/port information:</p> <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a Loopback interface, enter the keyword <code>loopback</code> followed by a number from 0 to 16383. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN interface enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Usage Information

IGMP commands accept *only* non-VLAN interfaces — specifying VLAN will not yield a results.

Example

```
FTOS#show ip igmp interface
GigabitEthernet 0/0 is down, line protocol is down
  Internet protocol processing disabled
GigabitEthernet 0/5 is down, line protocol is down
  Internet protocol processing disabled
GigabitEthernet 0/6 is down, line protocol is down
  Internet protocol processing disabled
GigabitEthernet 0/7 is up, line protocol is down
  Internet protocol processing disabled
GigabitEthernet 7/9 is up, line protocol is up
  Internet address is 10.87.5.250/24
  IGMP is enabled on interface
  IGMP query interval is 60 seconds
  IGMP querier timeout is 120 seconds
  IGMP max query response time is 10 seconds
  IGMP last member query response interval is 1000 ms
  IGMP activity: 0 joins, 0 leaves
  IGMP querying router is 10.87.5.250 (this system)
  IGMP version is 2
FTOS#
```

show ip igmp ssm-map

C E S

S4810

S4820T

Display is a list of groups that are currently in the IGMP group table and contain SSM mapped sources.

Syntax

show ip igmp ssm-map [*group*]

Parameters

<i>group</i>	(OPTIONAL) Enter the multicast group address in the form A.B.C.D to display the list of sources to which this group is mapped.
--------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.7.1.0	Introduced on E-Series

Related Commands

ip igmp ssm-map	Use a statically configured list to translate (*,G) memberships to (S,G) memberships.
---------------------------------	---

IGMP Snooping Commands

FTOS supports IGMP Snooping version 2 and 3 on all Dell Force10 systems:

- [ip igmp snooping enable](#)
- [ip igmp snooping fast-leave](#)
- [ip igmp snooping flood](#)
- [ip igmp snooping last-member-query-interval](#)
- [ip igmp snooping mrouter](#)
- [ip igmp snooping querier](#)
- [show ip igmp snooping mrouter](#)

Important Points to Remember for IGMP Snooping

- FTOS supports version 1, version 2, and version 3 hosts.

- FTOS IGMP snooping implementation is based on IP multicast address (not based on Layer 2 multicast mac-address) and the IGMP snooping entries are in Layer 3 flow table not in Layer 2 FIB.
- FTOS IGMP snooping implementation is based on draft-ietf-magma-snoop-10.
- FTOS supports IGMP snooping on JUMBO enabled cards.
- IGMP snooping is not enabled by default on the switch.
- A maximum of 1800 groups and 600 VLAN are supported.
- IGMP snooping is not supported on default VLAN interface.
- IGMP snooping is not supported over VLAN-Stack-enabled VLAN interfaces (you must disable IGMP snooping on a VLAN interface before configuring VLAN-Stack-related commands).
- IGMP snooping does not react to Layer 2 topology changes triggered by STP.
- IGMP snooping reacts to Layer 2 topology changes triggered by MSTP by sending a general query on the interface that comes in FWD state.

Important Points to Remember for IGMP Querier

- The IGMP snooping Querier supports version 2.
- You must configure an IP address to the VLAN interface for IGMP snooping Querier to begin. The IGMP snooping Querier disables itself when a VLAN IP address is cleared, and then it restarts itself when an IP address is re-assigned to the VLAN interface.
- When enabled, IGMP snooping Querier will not start if there is a statically configured multicast router interface in the VLAN.
- When enabled, IGMP snooping Querier starts after one query interval in case no IGMP general query (with IP SA lower than its VLAN IP address) is received on any of its VLAN members.
- When enabled, IGMP snooping Querier periodically sends general queries with an IP source address of the VLAN interface. If it receives a general query on any of its VLAN member, it will check the IP source address of the incoming frame.

If the IP SA in the incoming IGMP general query frame is lower than the IP address of the VLAN interface, then the switch disables its IGMP snooping Querier functionality.

If the IP SA of the incoming IGMP general query is higher than the VLAN IP address, the switch will continue to work as an IGMP snooping Querier.

ip igmp snooping enable

C **E** **S**

S4810


S4820T

Syntax

Enable IGMP snooping on all or a single VLAN. This is the master on/off switch to enable IGMP snooping.

ip igmp snooping enable

To disable IGMP snooping, enter no ip igmp snooping enable command.

Defaults	Disabled										
Command Modes	CONFIGURATION INTERFACE VLAN										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td colspan="2">E-Series legacy command</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	E-Series legacy command	
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
E-Series legacy command											
Usage Information	<p>You must enter this command to enable IGMP snooping. When enabled from CONFIGURATION mode, IGMP snooping is enabled on all VLAN interfaces (except default VLAN).</p> <p> Note: You must execute the no shutdown command on the VLAN interface for IGMP Snooping to function.</p>										
Related Commands	<table border="1"> <tr> <td>no shutdown</td> <td>Activate an interface</td> </tr> </table>	no shutdown	Activate an interface								
no shutdown	Activate an interface										

ip igmp snooping fast-leave

C **E** **S**

Enable IGMP snooping fast leave for this VLAN.

S4810

S4820T

Syntax	<p>ip igmp snooping fast-leave</p> <p>To disable IGMP snooping fast leave, use the no igmp snooping fast-leave command.</p>										
Defaults	Not configured										
Command Modes	INTERFACE VLAN — (conf-if-vl-n)										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td colspan="2">E-Series legacy command</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	E-Series legacy command	
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
E-Series legacy command											

Usage Information

Queriers normally send a certain number of queries when a leave message is received prior to deleting a group from the membership database. There may be situations in which *fast* deletion of a group is required. When IGMP fast leave processing is enabled, the switch will remove an interface from the multicast group as soon as it detects an IGMP version 2 leave message on the interface.

ip igmp snooping flood

C E S

S4810

S4820T

This command controls the flooding behavior of unregistered multicast data packets. On the E-Series, when flooding is enabled (the default), unregistered multicast data traffic is flooded to all ports in a VLAN. When flooding is disabled, unregistered multicast data traffic is forwarded to *only* multicast router ports, both static and dynamic, in a VLAN. If there is no multicast router port in a VLAN, then unregistered multicast data traffic is dropped. On the

C-Series and S-Series, unregistered multicast data traffic is dropped when flooding is disabled; they do not forward the packets to multicast router ports. On the C-Series and S-Series, Layer 3 multicast must be disabled (no ip multicast-routing) in order to disable Layer 2 multicast flooding.

Syntax ip igmp snooping flood

Defaults Enabled

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the C-Series and S-Series.
Version 7.7.1.1	Introduced on E-Series.

ip igmp snooping last-member-query-interval

C E S

S4810

S4820T

The last member query interval is the “maximum response time” inserted into Group-Specific queries sent in response to Group-Leave messages. This interval is also the interval between successive Group-Specific Query messages. Use this command to change the last member query interval.

Syntax ip igmp snooping last-member-query-interval *milliseconds*

To return to the default value, enter no ip igmp snooping last-member-query-interval.

Parameters

<i>milliseconds</i>	Enter the interval in milliseconds. Default: 1000 milliseconds Range: 100 to 65535
---------------------	--

Defaults	1000 milliseconds
Command Modes	INTERFACE VLAN
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.6.1.0 Introduced on S-Series
	Version 7.5.1.0 Introduced on C-Series
	E-Series legacy command

ip igmp snooping mrouter

C E S

S4810

S4820T

Statically configure a VLAN member port as a multicast router interface.

Syntax

ip igmp snooping mrouter interface *interface*

To delete a specific multicast router interface, use the **no igmp snooping mrouter interface** *interface* command.

Parameters

interface <i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
-----------------------------------	--

Defaults	Not configured
Command Modes	INTERFACE VLAN — (conf-if-vl-n)
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.6.1.0 Introduced on S-Series
	Version 7.5.1.0 Introduced on C-Series
	E-Series legacy command

Usage Information

FTOS provides the capability of statically configuring interface to which a multicast router is attached. To configure a static connection to the multicast router, enter the **ip igmp snooping mrouter interface** command in the VLAN context. The interface to the router must be a part of the VLAN where you are entering the command.

ip igmp snooping querier

C E S

Enable IGMP querier processing for the VLAN interface.

S4810

S4820T

Syntax

ip igmp snooping querier

To disable IGMP querier processing for the VLAN interface, enter no ip igmp snooping querier command.

Defaults

Not configured

Command Modes

INTERFACE VLAN — (conf-if-vl-n)

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

E-Series legacy command

Usage Information

This command enables the IGMP switch to send General Queries periodically. This is useful when there is no multicast router present in the VLAN because the multicast traffic does not need to be routed. An IP address must be assigned to the VLAN interface for the switch to act as a querier for this VLAN.

show ip igmp snooping mrouter

C E S

Display multicast router interfaces.

S4810

S4820T

Syntax

show ip igmp snooping mrouter [vlan number]

Parameters

vlan number Enter the keyword **vlan** followed by the vlan number.
Range: 1 to 4094

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Example

```
FTOS(conf-if-po-100)#show ip ig snooping mrouter
Interface Router Ports
Vlan 100 Po 100
```

Usage Information

If the port channel is a VLT port channel, an asterisk (*) after the port channel number (Po 100*) indicates the port channel is locally down and that a remote VLT port is up.

Related Commands

ip igmp snooping mrouter	Use this command to configure a static connection to the multicast router.
show ip igmp groups	Use this IGMP command to view groups

Interfaces

Overview

The commands in this chapter are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, **S4820T**, or **Z** Z-Series.

Although all interfaces are supported on E-Series ExaScale, some interface functionality is supported on E-Series ExaScale **E**_x with FTOS 8.2.1.0. and later. When this is the case that is noted in the command history.

This chapter defines interface commands and is divided into the following sections:

- [Basic Interface Commands](#)
- [Port Channel Commands](#)
- [Time Domain Reflectometer \(TDR\)](#)
- [UDP Broadcast](#)

Basic Interface Commands

The following commands are for physical, Loopback, and Null interfaces:

- [clear counters](#)
- [clear dampening](#)
- [cx4-cable-length](#)
- [dampening](#)
- [description](#)
- [disable-on-sfm-failure](#)
- [duplex \(Management\)](#)

- duplex (10/100 Interfaces)
- flowcontrol
- interface
- interface loopback
- interface ManagementEthernet
- interface null
- interface range
- interface range macro (define)
- interface range macro name
- interface vlan
- ipg (Gigabit Ethernet interfaces)
- ipg (10 Gigabit Ethernet interfaces)
- keepalive
- lfs enable (EtherScale)
- link debounce-timer
- monitor interface
- mtu
- negotiation auto
- portmode hybrid
- rate-interval
- show config
- show config (from INTERFACE RANGE mode)
- show interfaces
- show interfaces configured
- show interfaces dampening
- show interfaces description
- show interfaces linecard
- show interfaces phy
- show interfaces stack-unit
- show interfaces status
- show interfaces switchport
- show interfaces transceiver
- show range
- show running-config ecmp-group
- shutdown
- speed (for 10/100/1000 interfaces)
- speed (Management interface)
- stack-unit portmode
- switchport
- wanport

clear counters

C E S

S4810

S4820T

Clear the counters used in the show interfaces commands for all VRRP groups, VLANs, and physical interfaces, or selected ones.

Syntax clear counters [*interface*] [vrrp [{[ipv6] *vrid* | vrf *instance*}] | learning-limit]

Parameters

<i>interface</i>	(OPTIONAL) Enter any of the following keywords and slot/port or number to clear counters from a specified interface: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For the management interface on the RPM, enter the keyword ManagementEthernet followed by slot/port information. The slot range is 0-1, and the port range is 0.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
vrrp [[ipv6] <i>vrid</i>]	(OPTIONAL) Enter the keyword vrrp to clear the counters of all VRRP groups. To clear the counters of VRRP groups on all IPv6 interfaces, enter ipv6. To clear the counters of a specified group, enter a <i>vrid</i> number from 1 to 255.
vrrp [vrf <i>instance</i>]	(OPTIONAL) E-Series only: Enter the keyword vrrp to clear counters for all VRRP groups. To clear the counters of VRRP groups in a specified VRF instance, enter the name of the instance (32 characters maximum). IPv6 VRRP groups are not supported.
learning-limit	(OPTIONAL) Enter the keyword learning-limit to clear unknown source address (SA) drop counters when MAC learning limit is configured on the interface. Note: This option is not supported on the S-Series, as the MAC learning limit is not supported

Defaults Without an interface specified, the command clears all interface counters.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.1.0	On the E-Series, support was added for VRRP groups in a VRF instance.

Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior to release supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.5.1.0	Updated definition of the learning-limit option for clarity.

Example

```
FTOS#clear counters
Clear counters on all interfaces [confirm]
```

Related Commands

mac learning-limit	Allow aging of MACs even though a learning-limit is configured or disallow station move on learnt MACs.
show interfaces	Displays information on the interfaces.

clear dampening

C **E** **S**

Clear the dampening counters on all the interfaces or just the specified interface.

S4810

S4820T

Syntax

clear dampening [*interface*]

Parameters

<i>interface</i>	<p>(Optional) Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
------------------	---

Defaults

Without a specific interface specified, the command clears all interface dampening counters

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series


Usage Information On the S4810 and S4820T, after you enter the clear counters command and verify the results with the show interfaces command, the line rate is not reset to 0.00%.

Example

```
FTOS#clear dampening gigabitethernet 1/2
Clear dampening counters on Gi 1/2 [confirm] y
FTOS#
```

Related Commands	show interfaces dampening	Display interface dampening information.
	dampening	Configure dampening on an interface.

cx4-cable-length

 Configure the length of the cable to be connected to the selected CX4 port.

Syntax [no] cx4-cable-length {long | medium | short}

Parameters	long medium short	Enter the keyword that matches the cable length to be used at the selected port: short = For 1-meter and 3-meter cable lengths medium = For 5-meter cable length long = For 10-meter and 15-meter cable lengths
-------------------	-----------------------	--

Defaults medium

Mode Interface

Command History	Version 7.7.1.0 Introduced on S-Series
------------------------	--

Usage Information This command only works on ports that the system recognizes as CX4 ports. The figure below shows an attempt to configure an XFP port in an S25P with the command after inserting a CX4 converter into the port:



Note: When using a long CX4 cable between the C-Series and the S-Series, configure the cable using the cx4-cable-length short command only to avoid any errors.

Note: 15M CX4 active cable is not supported on C-Series and S-series. It is only supported for S2410 with active end on the device.

Example

```
FTOS#show interfaces tengigabitethernet 0/26 | grep "XFP type"

Pluggable media present, XFP type is 10GBASE-CX4

FTOS(conf-if-te-0/26)#cx4-cable-length short
% Error: Unsupported command.
FTOS(conf-if-te-0/26)#cx4-cable-length medium
% Error: Unsupported command.
```

```

FTOS(conf-if-te-0/26)#cx4-cable-length long
% Error: Unsupported command.
FTOS(conf-if-te-0/26)#

```

The figure below shows a successful CX4 cable length configuration.

Example (CX4 Cable Length Configuration)

```

FTOS#config
FTOS(config)#interface tengigabitethernet 0/52
FTOS(conf-if-0/52)#cx4-cable-length long
FTOS(conf-if-0/52)#show config
!
interface TenGigabitEthernet 0/51
  no ip address
  cx4-cable-length long
  shutdown
FTOS(conf-if-0/52)#exit
FTOS(config)#

```

For details on using XFP ports with CX4 cables, your S-Series hardware guide.

Related Commands

show config	Display the configuration of the selected interface.
-----------------------------	--

dampening

C **E** **S**

Configure dampening on an interface.

Syntax dampening [[[[*half-life*] [*reuse-threshold*]] [*suppress-threshold*]] [*max-suppress-time*]]

To disable dampening, use the no dampening [[[[*half-life*] [*reuse-threshold*]] [*suppress-threshold*]] [*max-suppress-time*]] command syntax.

Parameters

<i>half-life</i>	Enter the number of seconds after which the penalty is decreased. The penalty is decreased by half after the half-life period expires. Range: 1 to 30 seconds Default: 5 seconds
<i>reuse-threshold</i>	Enter a number as the reuse threshold, the penalty value below which the interface state is changed to “up”. Range: 1 to 20000 Default: 750
<i>suppress-threshold</i>	Enter a number as the suppress threshold, the penalty value above which the interface state is changed to “error disabled”. Range: 1 to 20000 Default: 2500
<i>max-suppress-time</i>	Enter the maximum number for which a route can be suppressed. The default is four times the half-life value. Range: 1 to 86400 Default: 20 seconds

Defaults Disabled

Command Modes INTERFACE (conf-if-)

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS(config-if-gi-3/2)#dampening 20 800 4500 120
FTOS(config-if-gi-3/2)#
```

Usage Information

With each flap, FTOS penalizes the interface by assigning a penalty (1024) that decays exponentially depending on the configured half-life. Once the accumulated penalty exceeds the suppress threshold value, the interface is moved to the error-disabled state. This interface state is deemed as “down” by all static/dynamic Layer 2 and Layer 3 protocols. The penalty is exponentially decayed based on the half-life timer. Once the penalty decays below the reuse threshold, the interface is enabled. The configured parameters should follow:

- *suppress-threshold* should be greater than *reuse-threshold*
- *max-suppress-time* should be at least 4 times *half-life*



Note: Dampening cannot be applied on an interface that is monitoring traffic for other interfaces.

Related Commands

clear dampening	Clear the dampening counters on all the interfaces or just the specified interface.
show interfaces dampening	Display interface dampening information.

description



Assign a descriptive text string to the interface.

Syntax

description *desc_text*

To delete a description, enter no description.

Parameters

<i>desc_text</i>	Enter a text string up to 240 characters long.
------------------	--

Defaults

No description is defined.

Command Modes

INTERFACE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Modified for E-Series: Revised from 78 to 240 characters.

Usage Information

- Spaces between characters are not preserved after entering this command unless you enclose the entire description in quotation marks (“*desc_text*”).

- Entering a text string after the [description](#) command overwrites any previous text string configured as the description.
- The [shutdown](#) and [description](#) commands are the only commands that you can configure on an interface that is a member of a port-channel.
- Use the [show interfaces description](#) command to display descriptions configured for each interface.

Related Commands

show interfaces description	Display description field of interfaces.
---	--

disable-on-sfm-failure

E Disable select ports on E300 systems when a single SFM is available.

Syntax `disable-on-sfm-failure`

To delete a description, enter no `disable-on-sfm-failure`.

Defaults Port is not disabled

Command Modes INTERFACE

Command History

Version 7.7.1.0	Introduced on E300 systems only
-----------------	---------------------------------

Usage Information

When an E300 system boots up and a single SFM is active this configuration, any ports configured with this feature will be shut down. If an SFM fails (or is removed) in an E300 system with two SFM, ports configured with this feature will be shut down. All other ports are treated normally.

When a second SFM is installed or replaced, all ports are booted up and treated as normally. This feature does not take affect until a single SFM is active in the E300 system.

duplex (Management)

C **E** Set the mode of the Management interface.

Syntax `duplex {half | full}`

To return to the default setting, enter no `duplex`.

Parameters

half	Enter the keyword <code>half</code> to set the Management interface to transmit only in one direction.
------	--

full	Enter the keyword <code>full</code> to set the Management interface to transmit in both directions.
------	---

Defaults Not configured

Command Modes INTERFACE

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.5.1.0	Introduced on C-Series
	Version 6.4.1.0	Documentation modified—added Management to distinguish from duplex (10/100 Interfaces)

Usage Information This command applies only to the Management interface on the RPMs.

Related Commands	interface ManagementEthernet	Configure the Management port on the system (either the Primary or Standby RPM).
	duplex (Management)	Set the mode of the Management interface.
	management route	Configure a static route that points to the Management interface or a forwarding router.
	speed (Management interface)	Set the speed on the Management interface.

duplex (10/100 Interfaces)



Configure duplex mode on any physical interfaces where the speed is set to 10/100. Syntax

duplex { half | full }

To return to the default setting, enter no duplex.

Parameters	half	Enter the keyword <code>half</code> to set the physical interface to transmit only in one direction.
	full	Enter the keyword <code>full</code> to set the physical interface to transmit in both directions.

Defaults Not configured

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 6.4.1.0	Introduced

Usage Information This command applies to any physical interface with speed set to 10/100.



Note: Starting with FTOS 7.8.1.0, when a copper SFP2 module with catalog number GP-SFP2-1T is used in the S25P model of the S-Series, its speed can be manually set with the speed command. When the speed is set to 10 or 100 Mbps, the duplex command can also be executed.

**Related
Commands**

speed (for 10/100/1000 interfaces)	Set the speed on the Base-T Ethernet interface.
negotiation auto	Enable or disable auto-negotiation on an interface.

ecmp-group

S4810**S4820T**

Provides a mechanism to monitor traffic distribution on a LAG link bundle. A system log or SNMP trap is generated when the standard deviation of traffic distribution on a member link exceeds a defined threshold.

Syntax

`ecmp-group { ecmp-path } [interface interface] [monitoring enable]`

To negate a command, use the **no** command.

Parameters

ecmp-path	Enter the path number for the LAG. Range: 2 to 64
interface	Enter the following keywords and slot/port to add the interface to the LAG. <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
monitoring	Enter the keyword monitoring to monitor the LAG. To enable monitoring, follow by entering the keyword enable .

Defaults

Off

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810

flowcontrol

C E S**S4810****S4820T**

Control how the system responds to and generates 802.3x pause frames on 1Gig and 10Gig line cards.

Syntax

`flowcontrol rx {off | on} tx {off | on} threshold {<1-2047> <1-2013> <1-2013>}`

The threshold keyword is supported on C-Series and S-Series only.

Parameters

rx on	Enter the keywords rx on to process the received flow control frames on this port. This is the default value for the receive side.
rx off	Enter the keywords rx off to ignore the received flow control frames on this port.
tx on	Enter the keywords tx on to send control frames from this port to the connected device when a higher rate of traffic is received. This is the default value on the send side.
tx off	Enter the keywords tx off so that flow control frames are not sent from this port to the connected device when a higher rate of traffic is received.
threshold	When tx on is configured, you can set the threshold values for: (C-Series and S-Series only) Number of flow-control packet pointers: 1 to 2047 (default = 75) Flow-control buffer threshold in KB: 1 to 2013 (default = 49KB) Flow-control discard threshold in KB: 1 to 2013 (default= 75KB)

Defaults

C-Series: rx off tx off

E-Series: rx on tx on

S-Series: rx off tx off

S4810: rx on tx off

S4820T: rx on tx off

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 6.5.1.9 and 7.4.1.0	Introduced on E-Series
Version 7.8.1.0	Introduced on C-Series and S-Series with thresholds

Usage Information

The globally assigned 48-bit Multicast address 01-80-C2-00-00-01 is used to send and receive pause frames. To allow full duplex flow control, stations implementing the pause operation instruct the MAC to enable reception of frames with a destination address equal to this multicast address.

The pause:

- Starts when *either* the packet pointer or the buffer threshold is met (whichever is met first). When the discard threshold is met, packets are dropped.
- Ends when *both* the packet pointer and the buffer threshold fall below 50% of the threshold settings.

The *discard threshold* defines when the interface starts dropping the packet on the interface. This may be necessary when a connected device does not honor the flow control frame sent by the S-Series. The discard threshold should be larger than the *buffer threshold* so that the buffer holds at least hold at least 3 packets.

Changes in the flow-control values may not be reflected automatically in the show interface output. As a workaround, apply the new settings, execute shut followed by no shut on the interface, and then check the running-config of the port using the **show interface** command.



Note: If rx flow control is disabled, Dell Force10 recommends rebooting the system.

Important Points to Remember

- Do not enable tx pause when buffer carving is enabled. Consult Dell Force10 TAC for information and assistance.
- Asymmetric flow control (rx on tx off or rx off tx on) setting for the interface port less than 100 Mb/s speed is not permitted. The following error is returned:

```
Can't configure Asymmetric flowcontrol when speed <1G, config ignored
```

- The only configuration applicable to half duplex ports is rx off tx off. The following error is returned:

```
Can't configure flowcontrol when half duplex is configure, config ignored
```

- Half duplex cannot be configured when the flow control configuration is on (default is rx on tx on). The following error is returned:

```
Can't configure half duplex when flowcontrol is on, config ignored
```



Note: The flow control must be off (rx off tx off) before configuring the half duplex.

- Speeds less than 1 Gig cannot be configured when the asymmetric flow control configuration is on. The following error is returned:

```
Can't configure speed <1G when Asymmetric flowcontrol is on, config ignored
```

- FTOS only supports rx on tx on and rx off tx off for speeds less than 1 Gig (Symmetric).
- On the C-Series and S-Series systems, the flow-control sender and receiver must be on the same port-pipe. Flow control is not supported across different port-pipes on the C-Series or S-Series system.

Example

```
FTOS(conf-if-gi-0/1)#show config
!
interface GigabitEthernet 0/1
no ip address
switchport
no negotiation auto
flowcontrol rx off tx on
no shutdown
...
```

The table below displays how FTOS negotiates the flow control values between two Dell Force10 chassis connected back-to-back using 1G copper ports.

Table 23-1. Negotiated Flow Control Values

Configured				Negotiated			
LocRxConf	LocTxConf	RemoteRxConf	RemoteTxConf	LocNegRx	LocNegTx	RemNegRx	RemNegTx
off	off	off	off	off	off	off	off
		off	on	off	off	off	off
		on	off	off	off	off	off
		on	on	off	off	off	off
off	on	off	off	off	off	off	off
		off	on	off	off	off	off
		on	off	off	on	on	on
		on	on	off	off	off	off
on	off	off	off	off	off	off	off
		off	on	on	off	off	on
		on	off	on	on	on	on
		on	on	on	on	on	on
on	on	off	off	off	off	off	off
		off	on	off	off	off	off
		on	off	on	on	on	on
		on	on	on	on	on	on

Related Commands

show running-config	Display the flow configuration parameters (non-default values only).
show interfaces	Display the negotiated flow control parameters.

interface



Configure a physical interface on the switch.

Syntax

`interface interface`

Parameters

<i>interface</i>	<p>Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For 100/1000 Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For SONET interfaces, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
------------------	---

Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 6.4.1.0	Introduced
Example	<pre>FTOS(conf)#interface gig 0/0 FTOS(conf-if-gi-0/0)#exit#</pre>	
Usage Information	You cannot delete a physical interface.	
	By default, physical interfaces are disabled (shutdown) and are in Layer 3 mode. To place an interface in mode, ensure that the interface's configuration does not contain an IP address and enter the switchport command.	
Related Commands	interface loopback	Configure a Loopback interface.
	interface null	Configure a Null interface.
	interface port-channel	Configure a port channel.
	interface vlan	Configure a VLAN.
	show interfaces	Display interface configuration.

interface loopback

C **E** **S** Configure a Loopback interface.

Syntax interface loopback *number*

To remove a loopback interface, use the no interface loopback *number* command.

Parameters	<i>number</i>	Enter a number as the interface number. Range: 0 to 16383.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 6.4.1.0	Introduced
Example	<pre>FTOS(conf)#interface loopback 1655</pre>	

```
FTOS (conf-if-lo-1655) #
```

Related Commands

interface	Configure a physical interface.
interface null	Configure a Null interface.
interface port-channel	Configure a port channel.
interface vlan	Configure a VLAN.

interface ManagementEthernet

C **E** **S**

Configure the Management port on the system (either the Primary or Standby RPM).

S4810

S4820T **Z**

Syntax

interface ManagementEthernet *slot/port*

Parameters

<i>slot/port</i>	Enter the keyword ManagementEthernet followed by slot number (0-1) and port number zero (0).
------------------	--

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.11.1	Introduced on S55, S60 and S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced for C-Series
Version 6.4.1.0	Introduced for E-Series

Example

```
FTOS (conf) #interface managementethernet 0/0
FTOS (conf-if-ma-0/0) #
```

Usage Information

You cannot delete a Management port.

The Management port is enabled by default (**no shutdown**). Use the [ip address](#) command to assign an IP address to the Management port.

If two RPMs are installed in your system, use the [show redundancy](#) command to display which RPM is the Primary RPM.

Related Commands

management route	Configure a static route that points to the Management interface or a forwarding router.
duplex (Management)	Clear FIB entries on a specified line card.
speed (Management interface)	Clear FIB entries on a specified line card.

interface null

C **E** **S** Configure a Null interface on the switch.

Syntax interface null *number*

Parameters

<i>number</i>	Enter zero (0) as the Null interface number.
---------------	--

Defaults Not configured; *number* = 0

Command Modes CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.4.1.0	Introduced

Example

```
FTOS(conf)#interface null 0
FTOS(conf-if-nu-0)#
```

Usage Information You cannot delete the Null interface. The only configuration command possible in a Null interface is [ip unreachable](#)s.

Related Commands

interface	Configure a physical interface.
interface loopback	Configure a Loopback interface.
interface port-channel	Configure a port channel.
interface vlan	Configure a VLAN.
ip unreachable s	Enable generation of ICMP unreachable messages.

interface range

C **E** **S** This command permits configuration of a range of interfaces to which subsequent commands are applied (bulk configuration). Using the interface range command, identical commands can be entered for a range of interfaces.

Syntax interface range *interface, interface,...*

Parameters

<i>interface,</i> <i>interface,...</i>	<p>Enter the keyword interface range and one of the interfaces — slot/port, port-channel or VLAN number. Select the range of interfaces for bulk configuration. You can enter up to six comma separated ranges—spaces are not required between the commas. Comma-separated ranges can include VLANs, port-channels and physical interfaces.</p> <p>Slot/Port information must contain a space before and after the dash. For example, interface range gigabitethernet 0/1 - 5 is valid; interface range gigabitethernet 0/1-5 is not valid.</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
---	--

Defaults

This command has no default behavior or values.

Command Modes

CONFIGURATION

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

When creating an interface range, interfaces appear in the order they are entered; they are not sorted. The command verifies that interfaces are present (physical) or configured (logical). Important things to remember:

- Bulk configuration is created if at least one interface is valid.
- Non-existing interfaces are excluded from the bulk configuration with a warning message.
- The interface range prompt includes interface types with slot/port information for valid interfaces. The prompt allows for a maximum of 32 characters. If the bulk configuration exceeds 32 characters, it is represented by an ellipsis (...).
- When the interface range prompt has multiple port ranges, the smaller port range is excluded from the prompt.

Example
(Bulk Configuration
Warning message)

```
FTOS(conf)#interface range so 2/0 - 1 , te 10/0 , gi 3/0 , fa 0/0
% Warning: Non-existing ports (not configured) are ignored by interface-range
```

Example
(Interface Range
prompt with
multiple ports)

```
FTOS(conf)#interface range gi 2/0 - 23 , gi 2/1 - 10
FTOS(conf-if-range-gi-2/0-23#
```

Example
(Interface Range
prompt with
overlapping port
ranges)

```
FTOS(conf)#interface range gi 2/1 - 11 , gi 2/1 - 23
FTOS(conf-if-range-gi-2/1-23#
```

Only VLAN and port-channel interfaces created using the [interface vlan](#) and [interface port-channel](#) commands can be used in the interface range command.

Use the [show running-config](#) command to display the VLAN and port-channel interfaces. VLAN or port-channel interfaces that are not displayed in the [show running-config](#) command can not be used with the bulk configuration feature of the interface range command. You cannot create virtual interfaces (VLAN, Port-channel) using the interface range command.



Note: If a range has VLAN, physical, port-channel, and SONET interfaces, only commands related to physical interfaces can be bulk configured. To configure commands specific to VLAN, port-channel or SONET, only those respective interfaces should be configured in a particular range.

Example
(Single Range Bulk
Configuration)

The following text is an example of a single range bulk configuration.

```
FTOS(config)# interface range gigabitethernet 5/1 - 23
FTOS(config-if-range)# no shutdown
FTOS(config-if-range)#
```

Example
(Multiple Range Bulk
Configuration Gigabit
Ethernet & Ten Gigabit
Ethernet)

The following example shows how to use commas to add different interface types to the range enabling all Gigabit Ethernet interfaces in the range 5/1 to 5/23 and both Ten Gigabit Ethernet interfaces 1/1 and 1/2.

```
1/1 - 2 FTOS(config-if)# interface range gigabitethernet 5/1 - 23, tengigabitethernet
FTOS(config-if-range)# no shutdown
FTOS(config-if-range)#
```

Example
(Multiple Range Bulk
Configuration with
SONET, VLAN, and
port channel)

The following figure shows how to use commas to add SONET, VLAN, and port-channel interfaces to the range.

```
1/1 - 2, Vlan 2 - 100 , Port 1 - 25 FTOS(config-if)# interface range gigabitethernet 5/1 - 23, tengigabitethernet
FTOS(config-if-range)# no shutdown
FTOS(config-if-range)#
```

**Related
Commands**

interface port-channel	Configure a port channel group.
interface vlan	Configure a VLAN interface.

show config (from INTERFACE RANGE mode)	Show the bulk configuration interfaces.
show range	Show the bulk configuration ranges.
interface range macro (define)	Define a macro for an interface-range.

interface range macro (define)

C **E** **S** Defines a macro for an interface range and then saves the macro in the running configuration.

Syntax define interface range macro *name interface , interface , ...*

Parameters

<i>name</i>	Enter up to 16 characters for the macro name.
<i>interface , interface ,...</i>	<p>Enter the interface keyword (below) and one of the interfaces slot/port, port-channel or VLAN numbers. Select the range of interfaces for bulk configuration. You can enter up to six comma separated ranges—spaces are not required between the commas. Comma-separated ranges can include VLANs, port-channels and physical interfaces.</p> <p>Slot/Port information must contain a space before and after the dash. For example, interface range gigabitethernet 0/1 - 5 is valid; interface range gigabitethernet 0/1-5 is not valid.</p> <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. • For a SONET interface, enter the keyword sonet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. • For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.

Defaults This command has no default behavior or value.

Command Modes CONFIGURATION

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced

Example

```

FTOS(config)# define interface-range test tengigabitethernet 0/0 - 3 ,
gigabitethernet 5/0 - 47 , gigabitethernet 13/0 - 89

FTOS# show running-config | grep define
define interface-range test tengigabitethernet 0/0 - 3 , gigabitethernet 5/0 -
47 , gigabitethernet 13/0 - 89
FTOS(config)#interface range macro test
FTOS(config-if-range-te-0/0-3,gi-5/0-47,gi-13/0-89)#

```

Usage Information

The above text is an example of how to define an interface range macro named *test*. Execute the show running-config command to display the macro definition.

Related Commands

interface range	Configure a range of command (bulk configuration)
interface range macro name	Run an interface range macro.

interface range macro *name*

C **E** **S**

Run the interface-range macro to automatically configure the pre-defined range of interfaces.

Syntax

interface range macro *name*

Parameters

<i>name</i>	Enter the name of an existing macro.
-------------	--------------------------------------

Defaults

This command has no default behavior or value

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced

Usage Information

The following figure runs the macro named *test* that was defined earlier.

Example

```

FTOS(config)#interface range macro test
FTOS(config-if-range-te-0/0-3,gi-5/0-47,gi-13/0-89)#
FTOS

```

Related Commands

interface range	Configure a range of command (bulk configuration)
interface range macro (define)	Define a macro for an interface range (bulk configuration)

interface vlan

C **E** **S**

Configure a VLAN. You can configure up to 4094 VLANs.

Syntax

interface vlan *vlan-id*

To delete a VLAN, use the no interface vlan *vlan-id* command.

Parameters	<i>vlan-id</i>	Enter a number as the VLAN Identifier. Range: 1 to 4094.
Defaults	Not configured, except for the Default VLAN, which is configured as VLAN 1.	
Command Modes	CONFIGURATION	
Command History	Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.0	Introduced for E-Series
Example	<pre>FTOS(conf)#int vlan 3 FTOS(conf-if-vl-3)#</pre>	
Usage Information	<p>For more information on VLANs and the commands to configure them, refer to Virtual LAN (VLAN) Commands.</p> <p>FTP, TFTP, and SNMP operations are not supported on a VLAN. MAC ACLs are not supported in VLANs. IP ACLs are supported. Refer to the Access Control Lists (ACL) chapter.</p>	
Related Commands	interface	Configure a physical interface.
	interface loopback	Configure a loopback interface.
	interface null	Configure a null interface.
	interface port-channel	Configure a port channel group.
	show vlan	Display the current VLAN configuration on the switch.
	shutdown	Disable/Enable the VLAN.
	tagged	Add a Layer 2 interface to a VLAN as a tagged interface.
	untagged	Add a Layer 2 interface to a VLAN as an untagged interface.

ipg (Gigabit Ethernet interfaces)

E Set the Inter-packet gap (IPG) to 8 bytes for traffic on a Gigabit Ethernet interface.

Syntax ipg 8

To return to the default setting, enter no ipg.

Parameters	8	Enter the keyword 8 to set the IPG to 8 bytes.
Defaults	12 bytes	

Command Modes INTERFACE

Command History

Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

For 1-Gigabit Ethernet interfaces only.



Note: This command is an EtherScale only command.

ipg (10 Gigabit Ethernet interfaces)

E Set the Inter-packet Gap for traffic on 10 Gigabit Ethernet interface.

Syntax ipg {ieee-802.3ae | shrink}

To return to the default of averaging the IPG, enter no ipg {shrink | ieee-802.3ae}

Parameters

ieee-802.3ae	Enter the keyword <code>ieee-802.3ae</code> to set the IPG to 12 (12-15) bytes (packet size dependent)
shrink	Enter the keyword <code>shrink</code> to set the IPG to 8 (8-11) bytes (packet size dependent).

Defaults averaging the IPG

Command Modes INTERFACE

Command History

pre-Version 6.1.1.0	Introduced for E-Series (EtherScale-only)
---------------------	---

Usage Information

For 10 Gigabit Ethernet interfaces only.

IPG equals 96 bits times from end of the previous packet to start of the pre-amble of the next packet.

keepalive

C **E** **S**

S4810

S4820T

On SONET interfaces, send keepalive packets periodically to keep an interface alive when it is not transmitting data.

Syntax keepalive [*seconds*]

To stop sending SONET keepalive packets, enter no keepalive.

Parameters	<i>seconds</i>	(OPTIONAL) For SONET interfaces with PPP encapsulation enabled, enter the number of seconds between keepalive packets. Range: 0 to 23767 Default: 10 seconds
Defaults	Enabled	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.2	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.0	Introduced for E-Series
Usage Information	When you configure <code>keepalive</code> , the system sends a self-addressed packet out of the configured interface to verify that the far end of a WAN link is up. When you configure <code>no keepalive</code> , the system does not send keepalive packets and so the local end of a WAN link remains up even if the remote end is down.	

lfs enable (EtherScale)

 Enable Link Fault Signaling (LFS) on EtherScale 10 Gigabit Ethernet interfaces only.

Syntax `lfs enable`

To disable LFS, enter `no lfs enable`.

Defaults Enabled.

Command Modes INTERFACE (10 Gigabit Ethernet interfaces only)


Command History	pre-Version 6.1.1.0	Introduced for E-Series
------------------------	---------------------	-------------------------

Usage Information If there is a failure on the link, FTOS brings down the interface. The interface will stay down until the link failure signal stops.



Note: On TeraScale line cards, LFS is always enabled by default.

link debounce-timer

 Assign the debounce time for link change notification on this interface.

Syntax `link debounce [milliseconds]`

Parameters	<i>milliseconds</i>	Enter the time to delay link status change notification on this interface. Range: 100-5000 ms Default for copper is 3100 ms Default for fiber is 100 ms
Command Modes	INTERFACE	
Command History	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on E-Series
Usage Information	Changes do not affect any ongoing debounces. The timer changes take affect from the next debounce onward.	

monitor interface

C **E** **S**

S4810

S4820T

Monitor counters on a single interface or all interfaces on a line card. The screen is refreshed every 5 seconds and the CLI prompt disappears.

Syntax monitor interface [*interface*]

To disable monitoring and return to the CLI prompt, press the q key.

Parameters	<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For the management port, enter the keyword managementethernet followed by the slot (0-1) and the port (0). For a SONET interface, enter the keyword sonet followed by the slot/port. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
Command Modes	EXEC EXEC Privilege	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

The delta column displays changes since the last screen refresh.

Example (Single Interface)

```

systest-3  Monitor time: 00:00:06  Refresh Intvl.: 2s  Time: 03:26:26

Interface: Gi 0/3, Enabled, Link is Up, Linespeed is 1000 Mbit

Traffic statistics:
      Current      Rate      Delta
Input bytes:      9069828      43 Bps      86
Output bytes:     606915800      43 Bps      86
Input packets:      54001      0 pps      1
Output packets:    9401589      0 pps      1
  64B packets:         67      0 pps      0
Over 64B packets:  49166      0 pps      1
Over 127B packets:   350      0 pps      0
Over 255B packets:  1351      0 pps      0
Over 511B packets:   286      0 pps      0
Over 1023B packets: 2781      0 pps      0

Error statistics:
Input underruns:      0      0 pps      0
Input giants:         0      0 pps      0
Input throttles:      0      0 pps      0
Input CRC:            0      0 pps      0
Input IP checksum:    0      0 pps      0
Input overrun:        0      0 pps      0
Output underruns:     0      0 pps      0
Output throttles:     0      0 pps      0

      m - Change mode              c - Clear screen
      l - Page up                  a - Page down
      T - Increase refresh interval  t - Decrease refresh interval
      q - Quit
  
```

Example (All Interfaces on a Line Card)

```

systest-3  Monitor time: 00:01:31  Refresh Intvl.: 2s  Time: 03:54:14

[delta] Interface  Link      In Packets      [delta]      Out Packets
0       Gi 0/0   Down      0                0            0
0       Gi 0/1   Down      0                0            0
42      Gi 0/2   Up        61512            52           66160
24      Gi 0/3   Up        63086            20           9405888
2661385 Gi 0/4   Up        14697471418     2661481      13392989657
832816  Gi 0/5   Up        3759             3            161959604
5       Gi 0/6   Up        4070             3            8680346
72      Gi 0/7   Up        61934            34           138734357
1       Gi 0/8   Up        61427            1            59960
3       Gi 0/9   Up        62039            53           104239232
79      Gi 0/10  Up        17740044091     372          7373849244
138     Gi 0/11  Up        18182889225     44           7184747584
1       Gi 0/12  Up        18182682056     0            3682
144     Gi 0/13  Up        18182681434     43           6592378911
15      Gi 0/14  Up        61349            55           86281941
27      Gi 0/15  Up        59808            58           62060
1       Gi 0/16  Up        59889            1            61616
81293   Gi 0/17  Up        0                0            14950126
0       Gi 0/18  Up        0                0            0
  
```

```

0      Gi 0/19  Down          0          0          0
18     Gi 0/20  Up            62734      54         62766
9      Gi 0/21  Up            60198      9          200899
1114221 Gi 0/22  Up          17304741100 3157554    10102508511
523329 Gi 0/23  Up          17304769659 3139507    7133354895

```

```

m - Change mode                c - Clear screen
b - Display bytes              r - Display pkts/bytes per sec
l - Page up                    a - Page down
T - Increase refresh interval  t - Decrease refresh interval
q - Quit

```

Table 23-2. monitor Command Menu Options

Key	Description
systest-3	Displays the host name assigned to the system.
monitor time	Displays the amount of time since the monitor interface command was entered.
time	Displays the amount of time the chassis is up (since last reboot).
m	Change the view from a single interface to all interfaces on the line card or visa-versa.
c	Refresh the view.
b	Change the counters displayed from Packets on the interface to Bytes.
r	Change the [delta] column from change in the number of packets/bytes in the last interval to rate per second.
l	Change the view to next interface on the line card, or if in the line card mode, the next line card in the chassis.
a	Change the view to the previous interface on the line card, or if the line card mode, the previous line card in the chassis.
T	Increase the screen refresh rate.
t	Decrease the screen refresh rate.
q	Return to the CLI prompt.

mtu

C **E** **S**

54810

54820T **Z**

Set the maximum Link MTU (frame size) for an Ethernet interface.

Syntax `mtu value`

To return to the default MTU value, enter no mtu.

Parameters	<i>value</i>	Enter a maximum frame size in bytes. Range: 594 to 9252 S4810 and S4820T Range: 594 to 12000 Default: 1554
Defaults	1554	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.0	Introduced for E-Series

Usage Information If the packet includes a Layer 2 header, the difference between the link MTU and IP MTU (ip mtu command) must be enough bytes to include the Layer 2 header:

- On C-Series, the IP MTU will get adjusted automatically when the Layer 2 MTU is configured with the mtu command.
- On the E-Series, you must compensate for a Layer 2 header when configuring IP MTU and link MTU on an Ethernet interface. Use the ip mtu command.

When you enter the **no mtu** command, FTOS reduces the IP MTU value to 1536 bytes. On the E-Series, to return the IP MTU value to the default, enter no ip mtu.

Link MTU and IP MTU considerations for port channels and VLANs are as follows.

Port channels:

- All members must have the same link MTU value and the same IP MTU value.
- The port channel link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the channel members.

Example: if the members have a link MTU of 2100 and an IP MTU 2000, the port channel's MTU values cannot be higher than 2100 for link MTU or 2000 bytes for IP MTU.

VLANs:

- All members of a VLAN must have same IP MTU value.
- Members can have different Link MTU values. Tagged members must have a link MTU 4 bytes higher than untagged members to account for the packet tag.
- The VLAN link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the VLAN members.

Example The VLAN contains tagged members with Link MTU of 1522 and IP MTU of 1500 and untagged members with Link MTU of 1518 and IP MTU of 1500. The VLAN's Link MTU cannot be higher than 1518 bytes and its IP MTU cannot be higher than 1500 bytes.

Table 23-3. Difference between Link MTU and IP MTU

Layer 2 Overhead	Link MTU and IP MTU Delta
Ethernet (untagged)	18 bytes
VLAN Tag	22 bytes
Untagged Packet with VLAN-Stack Header	22 bytes
Tagged Packet with VLAN-Stack Header	26 bytes

negotiation auto

C **E** **S**

Enable auto-negotiation on an interface.

S4810

S4820T

Syntax negotiation auto

To disable auto-negotiation, enter no negotiation auto.

Defaults Enabled.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

This command is supported on C-Series, S-Series, and E-Series (TeraScale and ExaScale) 10/100/1000 Base-T Ethernet interfaces.

The no negotiation auto command is only available if you first manually set the speed of a port to 10Mbps or 100Mbps.

The negotiation auto command provides a mode option for configuring an individual port to forced-master/forced slave once auto-negotiation is enabled



Note: The mode option is not available on non-10/100/1000 Base-T Ethernet line cards.

**Example
(Master/Slave)**

```
FTOS(conf)# int gi 0/0
FTOS(conf-if)#neg auto
FTOS(conf-if-autoneg)# ?

end                Exit from configuration mode
exit               Exit from autoneg configuration mode
mode              Specify autoneg mode
no                Negate a command or set its defaults
show              Show autoneg configuration information
FTOS(conf-if-autoneg)#mode ?
forced-master     Force port to master mode
forced-slave      Force port to slave mode
FTOS(conf-if-autoneg)#
```

If the mode option is not used, the default setting is slave. If you do not configure forced-master or forced slave on a port, the port negotiates to either a master or a slave state. Port status is one of the following:

- Forced-master
- Force-slave
- Master
- Slave
- Auto-neg Error—typically indicates that both ends of the node are configured with forced-master or forced-slave.



Caution: Ensure that one end of your node is configured as forced-master and one is configured as forced-slave. If both are configured the same (that is forced-master or forced-slave), the show interfaces command will flap between an auto-neg-error and forced-master/slave states.

You can display master/slave settings with the show interfaces command.

**Example
(Display Master/
Slave setting)**

```
FTOS#show interfaces configured
GigabitEthernet 13/18 is up, line protocol is up
Hardware is Force10Eth, address is 00:01:e8:05:f7:fc
Current address is 00:01:e8:05:f7:fc
Interface index is 474791997
Internet address is 1.1.1.1/24
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 1000 Mbit, Mode full duplex, Master
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interfaces" counters 00:12:42
Queueing strategy: fifo
Input Statistics:
...
```

Both sides of the link must have auto-negotiation enabled or disabled for the link to come up.

The following table details the possible speed and auto-negotiation combinations for a line between two 10/100/1000 Base-T Ethernet interfaces.

Table 23-4. Auto-negotiation and Link Speed Combinations

Port 0	Port 1	Link Status between Port 1 and Port 2
auto-negotiation enabled* speed 1000 or auto	auto-negotiation enabled* speed 1000 or auto	Up at 1000 Mb/s
auto-negotiation enabled speed 100	auto-negotiation enabled speed 100	Up at 100 Mb/s
auto-negotiation disabled speed 100	auto-negotiation disabled speed 100	Up at 100 Mb/s
auto-negotiation disabled speed 100	auto-negotiation enabled speed 100	Down
auto-negotiation enabled* speed 1000 or auto	auto-negotiation disabled speed 100	Down

* You cannot disable auto-negotiation when the speed is set to 1000 or auto.

Related Commands

[speed \(for 10/100/1000 interfaces\)](#)

Set the link speed to 10, 100, 1000 or auto-negotiate the speed.

portmode hybrid

C **E** **S**

S4810

S4820T

Set a physical port or port-channel to accept *both* tagged and untagged frames. A port configured this way is identified as a hybrid port in report displays.

Syntax portmode hybrid

To return a port to accept *either* tagged or untagged frames (non-hybrid), use the no portmode hybrid command.

Defaults non-hybrid

Command Modes INTERFACE (conf-if-*interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on E-Series and S-Series
Version 7.5.1.0	Introduced on C-Series only

Example

```
FTOS(conf)#interface gi 7/0
FTOS(conf-if-gi-7/0)#portmode hybrid
FTOS(conf-if-gi-7/0)#interface vlan 10
FTOS(conf-if-vl-10)#untagged gi 7/0
FTOS(conf-if-vl-10)#interface vlan 20
FTOS(conf-if-vl-20)#tagged gi 7/0
```

```
FTOS(conf-if-vl-20)#
```

Usage Information

The example above sets a port as hybrid, makes the port a tagged member of VLAN 20, and an untagged member of VLAN 10, which becomes the native VLAN of the port. The port will now accept:

- untagged frames and classify them as VLAN 10 frames
- VLAN 20 tagged frames

Example (Tagged Hybrid Interface)

The next example shows output with “Hybrid” as the newly added value for 802.1QTagged. The options for this field are:

- True—port is tagged
- False—port is untagged
- Hybrid—port accepts both tagged and untagged frames

```
FTOS(conf-if-vl-20)#do show interfaces switchport
Name: GigabitEthernet 7/0
802.1QTagged: Hybrid
Vlan membership:
Vlan 10, Vlan 20
Native VlanId: 10
FTOS(conf-if-vl-20)#
```

Example (Removing Hybrid port configuration)

The text below is an example unconfiguration of the hybrid port using the no portmode hybrid command.



Note: You must remove all other configurations on the port before you can remove the hybrid configuration from the port.

```
FTOS(conf-if-vl-20)#interface vlan 10
FTOS(conf-if-vl-10)#no untagged gi 7/0
FTOS(conf-if-vl-10)#interface vlan 20
FTOS(conf-if-vl-20)#no tagged gi 7/0
FTOS(conf-if-vl-20)#interface gi 7/0
FTOS(conf-if-gi-7/0)#no portmode hybrid
FTOS(conf-if-vl-20)#
```

Related Commands

show interfaces switchport	Display the configuration of switchport (Layer 2) interfaces on the switch.
switchport	Place the interface in a Layer 2 mode.
vlan-stack trunk	Specify an interface as a trunk port to the Stackable VLAN network.

rate-interval



Configure the traffic sampling interval on the selected interface.

Syntax rate-interval *seconds*

Parameters	<i>seconds</i>	Enter the number of seconds for which to collect traffic data. Range: 30 to 299 seconds Note: Since polling occurs every 15 seconds, the number of seconds designated here will round to the multiple of 15 seconds lower than the entered value. For example, if 44 seconds is designated it will round to 30; 45 to 59 seconds will round to 45, and so forth.
Defaults	299 seconds	
Command Modes	INTERFACE	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 6.1.1.0	Introduced
Usage Information	The configured rate interval is displayed, along with the collected traffic data, in the output of show interfaces commands.	
Related Commands	show interfaces	Display information on physical and virtual interfaces.

show config



Display the interface configuration.

Syntax show config

Command Modes	INTERFACE
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 8.1.1.0 Introduced on E-Series ExaScale
	Version 7.6.1.0 Introduced on S-Series
	Version 7.5.1.0 Introduced on C-Series
	pre-Version 6.2.1.0 Introduced for E-Series
Example	<pre>FTOS(conf-if)#show conf ! interface GigabitEthernet 1/7 no ip address switchport no shutdown FTOS(conf-if)#</pre>

show config (from INTERFACE RANGE mode)

C **E** **S** Display the bulk configured interfaces ([interface range](#)).

Syntax show config

Command Modes CONFIGURATION INTERFACE (conf-if-range)

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced on E-Series

Example

```
FTOS(conf)#interface range gigabitethernet 1/1 - 2
FTOS(conf-if-range-gi-1/1-2)#show config
!
interface GigabitEthernet 1/1
 no ip address
 switchport
 no shutdown
!
interface GigabitEthernet 1/2
 no ip address
 switchport
 no shutdown
FTOS(conf-if-range-gi-1/1-2)#
```

show interfaces

C **E** **S** Display information on a specific physical interface or virtual interface.

S4810

S4820T

Syntax show interfaces *interface*

Parameters

<i>interface</i>	<p>Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383. For the management interface on an RPM, enter the keyword ManagementEthernet followed by the slot/port information. The slot range is 0 to 1 and the port range is 0. For a Null interface, enter the keywords null 0. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.2	Include SFP and SFP+ optics power detail in E-Series and C-Series output.
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Output expanded to include SFP+ media in C-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.4.1.0	Changed organization of display output
Version 6.3.1.0	Added Pluggable Media Type field in E-Series TeraScale output

Usage Information

Use this `show interfaces` command for details on a specific interface. Use the `show interfaces linecard` command for details on all interfaces on the designated line card.

Note that, in an E-Series EtherScale chassis, the **show interfaces** command output does not include details about installed SFP or XFP transceivers.

On the S4810, the `show interface` output displays incorrect rate information details over time for link monitoring when the `rate-interval` is configured for 5 seconds. Dell Force10 recommends using higher rate-intervals such as 15 to 299 seconds to minimize the errors

Note: In the CLI output, the power value will be rounded to a 3-digit value. For receive/transmit power that is less than 0.000, an snmp query will return the corresponding dbm value even though the CLI displays as 0.000.

Note: After the counters are cleared, the line-rate continues to increase until it reaches the maximum line rate. When the maximum line rate is reached, there will be no change in the line-rate.

Example

```

FTOS#show interfaces
TenGigabitEthernet 2/0 is down, line protocol is down
Hardware is DellForce10Eth, address is 00:01:e8:8b:3d:e7
  Current address is 00:01:e8:8b:3d:e7
Pluggable media present, Media type is unknown
  Wavelength unknown
Interface index is 100992002
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed auto
Flowcontrol rx on tx off
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 3d17h53m
Queueing strategy: fifo
Input Statistics:
  0 packets, 0 bytes
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  0 packets, 0 bytes, 0 underruns
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts, 0 Unicasts
  0 throttles, 0 discarded, 0 collisions, 0 wredrops
Rate info (interval 299 seconds):
  Input 00.00 Mbits/sec,          0 packets/sec, 0.00% of line-rate
  Output 00.00 Mbits/sec,        0 packets/sec, 0.00% of line-rate
Time since last interface status change: 3d17h51m

```

Table 23-5. Lines in show interfaces Command Example (EtherScale)

Line	Description
TenGigabitEthernet 2/0...	Displays the interface's type, slot/port, and administrative and line protocol status.
Hardware is...	Displays the interface's hardware information and its assigned MAC address.
Interface index...	Displays the interface index number used by SNMP to identify the interface.
Internet address...	States whether an IP address is assigned to the interface. If one is, that address is displayed.
MTU 1554...	Displays link and IP MTU information. If the chassis is in Jumbo mode, this number can range from 576 to 9252.
LineSpeed	Displays the interface's line speed.

Table 23-5. Lines in show interfaces Command Example (EtherScale)

Line	Description
ARP type:...	Displays the ARP type and the ARP timeout value for the interface.
Last clearing...	Displays the time when the show interfaces counters were cleared.
Queuing strategy...	States the packet queuing strategy. FIFO means first in first out.
Input Statistics:	<p>Displays all the input statistics including:</p> <ul style="list-style-type: none"> • Number of packets and bytes into the interface • Number of packets with IP headers, VLAN tagged headers and MPLS headers <p>Note: The sum of the number of packets may not be as expected since a VLAN tagged IP packet counts as both a VLAN packet and an IP packet.</p> <ul style="list-style-type: none"> • Packet size and the number of those packets inbound to the interface • Number of symbol errors, runts, giants, and throttles packets: symbol errors = number packets containing bad data. That is, the port MAC detected a physical coding error in the packet. runts = number of packets that are less than 64B giants = packets that are greater than the MTU size throttles = packets containing PAUSE frames <p>Note: Symbol errors is supported on E-Series EtherScale only.</p> <ul style="list-style-type: none"> • Number of CRC, IP Checksum, overrun, and discarded packets: CRC = packets with CRC/FCS errors IP Checksum = packets with IP Checksum errors overrun = number of packets discarded due to FIFO overrun conditions discarded = the sum of input symbol errors, runts, giants, CRC, IP Checksum, and overrun packets discarded without any processing

Table 23-5. Lines in show interfaces Command Example (EtherScale)

Line	Description
Output Statistics:	<p>Displays output statistics sent out of the interface including:</p> <ul style="list-style-type: none"> Number of packets, bytes and underruns out of the interface packets = total number of packets bytes = total number of bytes underruns = number of packets with FIFO underrun conditions Number of Multicast, Broadcast and Unicast packets: Multicasts = number of MAC multicast packets Broadcasts = number of MAC broadcast packets Unicasts = number of MAC unicast packets Number of IP, VLAN and MPLs packets: IP Packets = number of IP packets Vlans = number of VLAN tagged packets MPLS = number of MPLS packets (found on a LSR interface) Number of throttles and discards packets: throttles = packets containing PAUSE frames discarded = number of packets discarded without any processing
Rate information...	<p>Estimate of the input and output traffic rate over a designated interval (30 to 299 seconds). Traffic rate is displayed in bits, packets per second, and percent of line rate.</p>
Time since...	<p>Elapsed time since the last interface status change (hh:mm:ss format).</p>

**Example
(TeraScale)**

```

FTOS#show interfaces tengigabitethernet 0/0
TenGigabitEthernet 3/0 is up, line protocol is up
Hardware is Force10Eth, address is 00:01:e8:41:77:c5
  Current address is 00:01:e8:41:77:c5
Pluggable media present, XFP type is 10GBASE-SR
  Medium is MultiRate, Wavelength is 850.00nm
  XFP receive power reading is -2.4834
Interface index is 134545468
Port will not be disabled on partial SFM failure
MTU 9252 bytes, IP MTU 9234 bytes
LineSpeed 10000 Mbit
Flowcontrol rx on tx on
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 00:15:14
Queueing strategy: fifo
Input Statistics:
  4410013700 packets, 282240876800 bytes
  0 Vlans
  4410013700 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  857732 packets, 54894848 bytes, 0 underruns
  857732 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts

```

**Example
(1G SFP
Interface)**

```

    0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
    24 Multicasts, 0 Broadcasts, 857708 Unicasts
    0 Vlans,0 throttles, 0 discarded, 0 collisions, 4409143619 wredDrops
Rate info (interval 30 seconds):
    Input 00.00 Mbits/sec,          0 packets/sec, 0.00% of line-rate
    Output 00.00 Mbits/sec,        0 packets/sec, 0.00% of line-rate
Time since last interface status change: 00:12:14
FTOS#

```

```

FTOS#show interfaces gigabitethernet 2/0
GigabitEthernet 2/0 is up, line protocol is down
Hardware is Force10Eth, address is 00:01:e8:41:77:95
    Current address is 00:01:e8:41:77:95
Pluggable media present, SFP type is 1000BASE-SX
    Wavelength is 850nm
Interface index is 100974648
Port will not be disabled on partial SFM failure
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 1000 Mbit
Flowcontrol rx on tx on
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 1w0d5h
Queueing strategy: fifo
Input Statistics:
    0 packets, 0 bytes
    0 Vlans
    0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
    0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
    0 Multicasts, 0 Broadcasts
    0 runts, 0 giants, 0 throttles
    0 CRC, 0 overrun, 0 discarded
Output Statistics:
    0 packets, 0 bytes, 0 underruns
    0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
    0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
    0 Multicasts, 0 Broadcasts, 0 Unicasts
    0 Vlans, 0 throttles, 0 discarded, 0 collisions, 0 wredDrops
Rate info (interval 299 seconds):
    Input 00.00 Mbits/sec,          0 packets/sec, 0.00% of line-rate
    Output 00.00 Mbits/sec,        0 packets/sec, 0.00% of line-rate
Time since last interface status change: 1w0d5h
FTOS#

```

**Example
(10G SFP+
Interface -
C-Series)**

```

FTOS#show interfaces tengigabitethernet 0/44
TenGigabitEthernet 0/44 is down, line protocol is down
Hardware is Force10Eth, address is 00:01:e8:32:44:26
    Current address is 00:01:e8:32:44:26
Pluggable media present, SFP+ type is 10GBASE-CU5M
Medium is MultiRate
Interface index is 45417732
FTOS#

```

**Example
(show interfaces
ManagementEthernet)**

```

FTOS#show interfaces managementethernet 0/0
ManagementEthernet 0/0 is up, line protocol is up
Hardware is Force10Eth, address is 00:01:e8:0b:a9:4c
    Current address is 00:01:e8:0b:a9:4c
Pluggable media not present
Interface index is 503595208
Internet address is 10.11.201.5/16
Link local IPv6 address: fe80::201:e8ff:fe0b:a94c/64
Global IPv6 address: 2222::5/64
Virtual-IP is not set
Virtual-IP IPv6 address is not set
MTU 1554 bytes, IP MTU 1500 bytes

```

```

LineSpeed 10 Mbit, Mode half duplex
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 04:01:08
Queueing strategy: fifo
  Input 943 packets, 78347 bytes, 190 multicast
  Received 0 errors, 0 discarded
  Output 459 packets, 102388 bytes, 15 multicast
  Output 0 errors, 0 invalid protocol
Time since last interface status change: 00:03:09

```

Usage Information

On the C-Series and S-Series, the interface counter “over 1023-byte pkts” does not increment for packets in the range $9216 > x < 1023$.

The Management port is enabled by default (**no shutdown**). If necessary, use the **ip address** command to assign an IP address to the Management port. If two RPMs are installed in your system, use the **show redundancy** command to display which RPM is the Primary RPM.

Related Commands

show interfaces configured	Display any interface with a non-default configuration.
show interfaces linecard	Display information on all interfaces on a specific line card.
show interfaces phy	
show interfaces rate	Display information of either rate limiting or rate policing on the interface.
show interfaces switchport	Display Layer 2 information about the interfaces.
show inventory (C-Series and E-Series)	Display the chassis type, components (including media), FTOS version including hardware identification numbers and configured protocols.
show inventory (S-Series)	Display the S-Series switch type, components (including media), FTOS version including hardware identification numbers and configured protocols.
show ip interface	Display Layer 3 information about the interfaces.
show linecard	Display the line card(s) status.
show range	Display all interfaces configured using the interface range command.

show interfaces configured



Display any interface with a non-default configuration.

Syntax

show interfaces configured

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.4.1.0	Changed organization of display output

Example

```

FTOS#show interfaces configured
GigabitEthernet 13/18 is up, line protocol is up
Hardware is Force10Eth, address is 00:01:e8:05:f7:fc
  Current address is 00:01:e8:05:f7:fc
Interface index is 474791997
Internet address is 1.1.1.1/24
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 1000 Mbit, Mode full duplex, Master
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interfaces" counters 00:12:42
Queueing strategy: fifo
Input Statistics:
  10 packets, 10000 bytes
  0 Vlans
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 10 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  1 packets, 64 bytes, 0 underruns
  1 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 1 Broadcasts, 0 Unicasts
  0 Vlans, 0 throttles, 0 discarded, 0 collisions
Rate info (interval 299 seconds):
  Input 00.00 Mbits/sec,          0 packets/sec, 0.00% of line-rate
  Output 00.00 Mbits/sec,        0 packets/sec, 0.00% of line-rate
Time since last interface status change: 00:04:59
FTOS#

```

**Related
Commands**

show interfaces	Display information on a specific physical interface or virtual interface.
---------------------------------	--

show interfaces dampening

C **E** **S** Display interface dampening information.

Syntax show interfaces dampening *[[interface] [summary] [detail]]*

Parameters	<i>interface</i>	(Optional) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
	<i>summary</i>	(OPTIONAL) Enter the keyword <code>summary</code> to display the current summary of dampening data, including the number of interfaces configured and the number of interfaces suppressed, if any.
	<i>detail</i>	(OPTIONAL) Enter the keyword <code>detail</code> to display detailed interface dampening data.

Defaults No default values or behavior.

Command Modes EXEC

Command History	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 7.4.1.0	Introduced

Example

```

FTOS#show interfaces dampening
Max-Sup Interface      Supp   Flaps   Penalty   Half-Life   Reuse   Suppress
          State
          Gi 3/2       Up     0       0         20         800     4500     120
          Gi 3/10      Up     0       0         5          750     2500     20
FTOS#

```

Related Commands	dampening	Configure dampening on an interface
	show interfaces	Display information on a specific physical interface or virtual interface.
	show interfaces configured	Display any interface with a non-default configuration.

show interfaces debounce

E Display information on interfaces with debounce timer configured.

Syntax show interfaces debounce *interface*

Parameters	<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
	<hr/>	
Command Modes	EXEC	
	EXEC Privilege	
Command History	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.2.1.0	Introduced on E-Series ExaScale.
	Version 7.7.1.0	Introduced on E-Series.
Related Commands	show interfaces	Display information on a specific physical interface or virtual interface.

show interfaces description

C **E** **S** Display the descriptions configured on the interface.

Syntax show interfaces [*interface*] description

Parameters	<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interfaces, enter the keyword loopback followed by a number from 0 to 16383. For the management interface on the RPM, enter the keyword ManagementEthernet followed by the slot/port information. The slot range is 0-1 and the port range is 0. For the Null interface, enter the keywords null 0. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For SONET interfaces, enter the keyword sonet followed by the slot/port. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For VLAN interfaces, enter the keyword vlan followed by a number from 1 to 4094.
	<hr/>	

Command Modes EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale. Prior releases supported 2094.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS>
Interface                OK? Status  Protocol  Description
GigabitEthernet 4/17      NO  admin down down      ***connected-to-host***
GigabitEthernet 4/18      NO  admin down down      ***connected-to-Tom***
GigabitEthernet 4/19      NO  admin down down      ***connected-to-marketing***
GigabitEthernet 4/20      NO  admin down down      ***connected-to-Bill***
GigabitEthernet 4/21      NO  up        down      ***connected-to-Radius-Server***
***connected-to-Web-Server***
GigabitEthernet 4/22      NO  admin down down      ***connected-to-PC-client***
TenGigabitEthernet 6/0    NO  admin down down
GigabitEthernet 8/0       YES up        up
GigabitEthernet 8/1       YES up        up
GigabitEthernet 8/2       YES up        up
GigabitEthernet 8/3       YES up        up
GigabitEthernet 8/4       YES up        up
GigabitEthernet 8/5       YES up        up
GigabitEthernet 8/6       YES up        up
GigabitEthernet 8/7       YES up        up
GigabitEthernet 8/8       YES up        up
GigabitEthernet 8/9       YES up        up
GigabitEthernet 8/10      YES up        up
GigabitEthernet 8/11      YES up        up
FTOS>
```



Table 23-6. show interfaces description Command Example Fields

Field	Description
Interface	Displays type of interface and associated slot and port number.
OK?	Indicates if the hardware is functioning properly.
Status	States whether the interface is enabled (up) or disabled (administratively down).
Protocol	States whether IP is enabled (up) or disabled (down) on the interface.
Description	Displays the description (if any) manually configured for the interface.

Related Commands

show interfaces	Display information on a specific physical interface or virtual interface.
---------------------------------	--

show interfaces linecard

  Display information on all interfaces on a specific line card.

Syntax show interfaces linecard *slot-number*

Parameters	<i>slot-number</i>	Enter a number for the line card slot. C-Series Range: 0-7 for C300; 0-3 for C150 E-Series Range: 0 to 13 on the E1200/1200i, 0 to 6 on the E600/600i, 0 to 5 on the E300

Command Modes

EXEC EXEC Privilege

Command History

Version 8.1.1.2	Introduced support on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage The following figure shows a line card that has an XFP interface. The type, medium, wavelength, and receive power details are displayed. When a device that is not certified by Dell Force10 is inserted, it might work, but its details might not be readable by FTOS and not displayed here.

Example

```
FTOS#show interfaces linecard 0
TenGigabitEthernet 0/0 is down, line protocol is down
Hardware is Force10Eth, address is 00:01:e8:51:b2:d4
  Current address is 00:01:e8:51:b2:d4
Pluggable media present, XFP type is 10GBASE-SR
  Medium is MultiRate, Wavelength is 850.00nm
  XFP receive power reading is -2.3538
Interface index is 33883138
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 10000 Mbit
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 20:16:29
Queueing strategy: fifo
Input Statistics:
  0 packets, 0 bytes
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  0 packets, 0 bytes, 0 underruns
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
--More--
```

Related Commands

show interfaces	Display information on a specific physical interface or virtual interface.
---------------------------------	--

show interfaces phy

C **E** **S** Display auto-negotiation and link partner information.

Syntax show interfaces gigabitethernet *slot/port* phy

Parameters	<code>gigabitethernet</code>	Enter the keyword <code>gigabitethernet</code> followed by the slot/port information.
Command Modes	EXEC EXEC Privilege	
Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 6.5.4.0	Introduced on E-Series

```

Example

FTOS#show int gigabitethernet 1/0 phy
Mode Control:
  SpeedSelection:          10b
  AutoNeg:                 ON
  Loopback:                False
  PowerDown:               False
  Isolate:                  False
  DuplexMode:              Full
Mode Status:
  AutoNegComplete:         False
  RemoteFault:             False
  LinkStatus:              False
  JabberDetect:            False
AutoNegotiation Advertise:
  100MegFullDplx:          True
  100MegHalfDplx:          True
  10MegFullDplx:           False
  10MegHalfDplx:           True
  Asym Pause:              False
  Sym Pause:               False
AutoNegotiation Remote Partner's Ability:
  100MegFullDplx:          False
  100MegHalfDplx:          False
  10MegFullDplx:           False
  10MegHalfDplx:           False
  Asym Pause:              False
  Sym Pause:               False
AutoNegotiation Expansion:
  ParallelDetectionFault:  False
...

```

Table 23-7. Lines in show interfaces gigabitethernet Command Example

Line	Description
Mode Control	Indicates if auto negotiation is enabled. If so, indicates the selected speed and duplex.
Mode Status	Displays auto negotiation fault information. When the interface completes auto negotiation successfully, the <code>autoNegComplete</code> field and the <code>linkstatus</code> field read "True."
AutoNegotiation Advertise	Displays the control words advertised by the local interface during negotiation. Duplex is either half or full. Asym- and Sym Pause is the types of flow control supported by the local interface.

Table 23-7. Lines in show interfaces gigabitethernet Command Example

Line	Description
AutoNegotiation Remote Partner's Ability	Displays the control words advertised by the remote interface during negotiation. Duplex is either half or full. Asym- and Sym Pause is the types of flow control supported by the remote interface
AutoNegotiation Expansion	ParallelDetectionFault is the handshaking scheme in which the link partner continuously transmit an "idle" data packet using the Fast Ethernet MLT-3 waveform. Equipment that does not support auto-negotiation must be configured to exactly match the mode of operation as the link partner or else no link can be established.
1000Base-T Control	1000Base-T requires auto-negotiation. The IEEE Ethernet standard does not support setting a speed to 1000 Mbps with the speed command without auto-negotiation. E-Series line cards support both full-duplex and half-duplex 1000BaseT.
Phy Specific Control	Values are: 0 - Manual MDI 1 - Manual MDIX 2 - N/A 3 - Auto MDI/MDIX
Phy Specific Status	Displays PHY-specific status information. Cable length represents a rough estimate in meters: 0 - < 50 meters 1 - 50 - 80 meters 2 - 80 - 110 meters 3 - 110 - 140 meters 4 - 140 meters. Link Status: Up or Down Speed: Auto 1000MB 100MB 10MB

Related Commands[show interfaces](#)

Display information on a specific physical interface or virtual interface.

show interfaces stack-unit



Display information on all interfaces on a specific S-Series stack member.

Syntaxshow interfaces stack-unit *unit-number***Parameters***unit-number*

Enter the stack member number (0 to 7).

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.11.1	Introduced on Z9000
Version 7.6.1.0	Introduced for S-Series only

Example

```
FTOS#show interfaces stack-unit 0
GigabitEthernet 0/1 is down, line protocol is down
Hardware is Force10Eth, address is 00:01:e8:4c:f2:82
  Current address is 00:01:e8:4c:f2:82
Pluggable media not present
Interface index is 34129154
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed auto, Mode auto
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 3w0d17h
Queueing strategy: fifo
Input Statistics:
  0 packets, 0 bytes
  5144 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  0 packets, 0 bytes, 0 underruns
  0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
  0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
  0 Multicasts, 0 Broadcasts, 0 Unicasts
  0 throttles, 0 discarded, 0 collisions
Rate info (interval 299 seconds):
  Input 00.00 Mbits/sec,          0 packets/sec, 0.00% of line-rate
  Output 00.00 Mbits/sec,        0 packets/sec, 0.00% of line-rate
Time since last interface status change: 3w0d17h

GigabitEthernet 0/2 is down, line protocol is down
Hardware is Force10Eth, address is 00:01:e8:4c:f2:83
  Current address is 00:01:e8:4c:f2:83
!-----output truncated -----!
```

Related Commands

show hardware stack-unit	Display data plane and management plane input/output statistics.
show interfaces	Display information on a specific physical interface or virtual interface.

show interfaces status

C **E** **S**

Display a summary of interface information or specify a line card slot and interface to display status information on that specific interface only.

Syntax

show interfaces [*interface* | *linecard slot-number*] status

Parameters	<i>interface</i>	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
	<i>linecard slot-number</i>	(OPTIONAL) Enter the keyword linecard followed by the slot number. C-Series Range: 0 to 7 for C300; 0 to 3 for C150 E-Series Range: 0 to 13 on the E1200, 0 to 6 on the E600, 0 to 5 on the E300

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.5.1.0	Introduced on E-Series

Example

```
FTOS#show interfaces status
Port      Description  Status Speed      Duplex Vlan
Gi 0/0                    Up    1000 Mbit Auto    --
Gi 0/1                    Down  Auto      Auto    1
Gi 0/2                    Down  Auto      Auto    1
Gi 0/3                    Down  Auto      Auto    --
Gi 0/4  FTOSPort  Up      1000 Mbit Auto    30-130
Gi 0/5                    Down  Auto      Auto    --
Gi 0/6                    Down  Auto      Auto    --
Gi 0/7                    Up    1000 Mbit Auto    1502,1504,1506-1508,1602
Gi 0/8                    Down  Auto      Auto    --
Gi 0/9                    Down  Auto      Auto    --
Gi 0/10                   Down  Auto      Auto    --
Gi 0/11                   Down  Auto      Auto    --
Gi 0/12                   Down  Auto      Auto    --
Gi 0/13                   Down  Auto      Auto    --
Gi 0/14                   Down  Auto      Auto    --
Gi 0/15                   Down  Auto      Auto    --
FTOS#
```

Related Commands

show interfaces	Display information on a specific physical interface or virtual interface.
---------------------------------	--

show interfaces switchport

C **E** **S**

Display only virtual and physical interfaces in Layer 2 mode. This command displays the Layer 2 mode interfaces' IEEE 802.1Q tag status and VLAN membership.

Syntax show interfaces switchport [*interface* [*linecard slot-number*] | stack-unit *unit-id*]

Parameters

<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For SONET interfaces, enter the keyword sonet followed by the slot/port information. This keyword is only available on E-Series and C-Series.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.Enter the keyword backup to view the backup interface for this interface.
<i>linecard slot-number</i>	(OPTIONAL) Enter the keyword linecard followed by the slot number. This option is available only on E-Series and C-Series. C-Series Range: 0-7 for C300; 0-3 for C150 E-Series Range: 0 to 13 on the E1200, 0 to 6 on the E600, 0 to 5 on the E300
<i>stack-unit unit-id</i>	(OPTIONAL) Enter the keyword stack-unit followed by the stack member number. This option is available only on S-Series. Range: 0 to 1

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Support added for hybrid port/native VLAN, introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Example

```
FTOS#show interfaces switchport
Name: GigabitEthernet 13/0
802.1QTagged: Hybrid
Vlan membership:
Vlan    2, Vlan    20
Native VlanId: 20

Name: GigabitEthernet 13/1
802.1QTagged: True
Vlan membership:
Vlan    2

Name: GigabitEthernet 13/2
802.1QTagged: True
Vlan membership:
```

```

Vlan      2

Name: GigabitEthernet 13/3
802.1QTagged: True
Vlan membership:
Vlan      2

--More--

```

Table 23-8. Items in show interfaces switchport Command Example

Items	Description
Name	Displays the interface's type, slot and port number.
802.1QTagged	Displays whether if the VLAN tagged ("True"), untagged ("False"), or hybrid ("Hybrid"), which supports both untagged and tagged VLANs by port 13/0.
Vlan membership	Lists the VLANs to which the interface is a member. Starting with FTOS 7.6.1, this field can display native VLAN membership by port 13/0.

Related Commands

interface	Configure a physical interface on the switch.
show ip interface	Displays Layer 3 information about the interfaces.
show interfaces	Display information on a specific physical interface or virtual interface.
show interfaces transceiver	Display the physical status and operational status of an installed transceiver. The output also displays the transceiver's serial number.

show interfaces transceiver



Display the physical status and operational status of an installed transceiver. The output also displays the transceiver's serial number.

Syntax

```
show interfaces [gigabitethernet slot/port | tengigabitethernet slot/port | fortyGigE slot/port] transceiver
```

Parameters

gigabitethernet	For a 10/100/1000 interface, enter the keyword gigabitethernet followed by the slot/port information.
tengigabitethernet	For a 10G interface, enter the keyword tengigabitethernet followed by the slot/port information.
fortyGigE	For a 40G interface, enter the keyword fortyGigE followed by the slot/port information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.11.1	Introduced on Z9000.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.1.1.0	Introduced on E-Series ExaScale.

Version 7.8.1.0	Output augmented with diagnostic data for pluggable media.
Version 7.7.1.0	Removed three fields in output: Vendor Name, Vendor OUI, Vendor PN.
Version 7.6.1.0	Introduced on C-Series and S-Series.
Version 6.5.4.0	Introduced on E-Series.

Usage Refer to the figure below for an example screenshot, and the following table or a description of the output fields.

For related commands, the Related Commands section, below, and the Debugging and Diagnostics chapter for your platform at the end of this book.

Example

```

FTOS#show interfaces gigabitethernet 1/0 transceiver
SFP is present.

SFP 0 Serial Base ID fields
SFP 0 Id = 0x03
SFP 0 Ext Id = 0x04
SFP 0 Connector = 0x07
SFP 0 Transceiver Code = 0x00 0x00 0x00 0x01 0x20 0x40 0x0c 0x05
SFP 0 Encoding = 0x01
SFP 0 BR Nominal = 0x15
SFP 0 Length(9um) Km = 0x00
SFP 0 Length(9um) 100m = 0x00
SFP 0 Length(50um) 10m = 0x1e
SFP 0 Length(62.5um) 10m = 0x0f
SFP 0 Length(Copper) 10m = 0x00
SFP 0 Vendor Rev = A
SFP 0 Laser Wavelength = 850 nm
SFP 0 CheckCodeBase = 0x66
SFP 0 Serial Extended ID fields
SFP 0 Options= 0x00 0x12
SFP 0 BR max= 0
SFP 0 BR min= 0
SFP 0 Vendor SN= P5N1ACE
SFP 0 Datecode = 040528
SFP 0 CheckCodeExt = 0x5b

SFP 1 Diagnostic Information
=====
SFP 1 Rx Power measurement type = Average
=====
SFP 1 Temp High Alarm threshold = 95.000C
SFP 1 Voltage High Alarm threshold = 3.900V
SFP 1 Bias High Alarm threshold = 17.000mA
SFP 1 TX Power High Alarm threshold = 0.631mW
SFP 1 RX Power High Alarm threshold = 1.259mW
SFP 1 Temp Low Alarm threshold = -25.000C
SFP 1 Voltage Low Alarm threshold = 2.700V
SFP 1 Bias Low Alarm threshold = 1.000mA
SFP 1 TX Power Low Alarm threshold = 0.067mW
SFP 1 RX Power Low Alarm threshold = 0.010mW
=====
SFP 1 Temp High Warning threshold = 90.000C
SFP 1 Voltage High Warning threshold = 3.700V
SFP 1 Bias High Warning threshold = 14.000mA
SFP 1 TX Power High Warning threshold = 0.631mW
SFP 1 RX Power High Warning threshold = 0.794mW
SFP 1 Temp Low Warning threshold = -20.000C
SFP 1 Voltage Low Warning threshold = 2.900V
SFP 1 Bias Low Warning threshold = 2.000mA

```

```

SFP 1 TX Power Low Warning threshold = 0.079mW
SFP 1 RX Power Low Warning threshold = 0.016mW
=====
SFP 1 Temperature                    = 39.930C
SFP 1 Voltage                        = 3.293V
SFP 1 Tx Bias Current                = 6.894mA
SFP 1 Tx Power                      = 0.328mW
SFP 1 Rx Power                      = 0.000mW
=====
SFP 1 Data Ready state Bar          = False
SFP 1 Rx LOS state                  = True
SFP 1 Tx Fault state                = False
SFP 1 Rate Select state             = False
SFP 1 RS state                      = False
SFP 1 Tx Disable state              = False
=====
SFP 1 Temperature High Alarm Flag   = False
SFP 1 Voltage High Alarm Flag       = False
SFP 1 Tx Bias High Alarm Flag       = False
SFP 1 Tx Power High Alarm Flag      = False
SFP 1 Rx Power High Alarm Flag      = False
SFP 1 Temperature Low Alarm Flag    = False
SFP 1 Voltage Low Alarm Flag        = False
SFP 1 Tx Bias Low Alarm Flag        = False
SFP 1 Tx Power Low Alarm Flag       = False
SFP 1 Rx Power Low Alarm Flag       = True
=====
!-----output truncated -----!

```

Table 23-9. Diagnostic Data in show interfaces transceiver

Line	Description
Rx Power measurement type	Output depends on the vendor, typically either “Average” or “OMA” (Receiver optical modulation amplitude).
Temp High Alarm threshold	Factory-defined setting, typically in Centigrade. Value differs between SFPs and SFP+.
Voltage High Alarm threshold	Displays the interface index number used by SNMP to identify the interface.
Bias High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Voltage Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.

Table 23-9. Diagnostic Data in show interfaces transceiver (continued)

Line	Description
Voltage High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Voltage Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Power Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temperature	Current temperature of the sfps.If this temperature crosses Temp High alarm/warning thresholds, then the temperature high alarm/warning flag is set to true.
Voltage	Current voltage of the sfps.If this voltage crosses voltage high alarm/warning thresholds, then the voltage high alarm/warning flag is set to true.
Tx Bias Current	Present Tx bias current of the SFP. If this crosses bias high alarm/warning thresholds, then the tx bias high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, then the tx bias low alarm/warning flag is set to true.
Tx Power	Present Tx power of the SFP. If this crosses Tx power alarm/warning thresholds, then the Tx power high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, then the Tx power low alarm/warning flag is set to true.
Rx Power	Present Rx power of the SFP. This value is either average Rx power or OMA.This depends upon on the Rx Power measurement type displayed above. If this crosses Rx power alarm/warning thresholds, then the Rx power high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, then the Rx power low alarm/warning flag is set to true.
Data Ready state Bar	This field indicates that the transceiver has achieved power up and data is ready. This is set to true if data is ready to be sent, false if data is being transmitted.
Rx LOS state	This is the digital state of the Rx_LOS output pin.This is set to true if the operating status is down.

Table 23-9. Diagnostic Data in show interfaces transceiver (continued)

Line	Description
Tx Fault state	This is the digital state of the Tx Fault output pin.
Rate Select state	This is the digital state of the SFP rate_select input pin.
RS state	This is the reserved digital state of the pin AS(1) per SFF-8079 and RS(1) per SFF-8431.
Tx Disable state	If the admin status of the port is down then this flag will be set to true.
Temperature High Alarm Flag	This can be either true/False and it depends on the Current Temperature value displayed above.
Voltage High Alarm Flag	This can be either true or false, depending on the Current voltage value displayed above.
Tx Bias High Alarm Flag	This can be either true or false, depending on the present Tx bias current value displayed above.
Tx Power High Alarm Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power High Alarm Flag	This can be either true or false, depending on the Current Rx power value displayed above.
Temperature Low Alarm Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage Low Alarm Flag	This can be either true or false, depending on the Current voltage value displayed above.
Tx Bias Low Alarm Flag	This can be either true or false, depending on the Tx bias current value displayed above.
Tx Power Low Alarm Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power Low Alarm Flag	This can be either true or false, depending on the Current Rx power value displayed above.
Temperature High Warning Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage High Warning Flag	This can be either true or false, depending on the Current voltage value displayed above.
Tx Bias High Warning Flag	This can be either true or false, depending on the Tx bias current value displayed above.
Tx Power High Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power High Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Temperature Low Warning Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage Low Warning Flag	This can be either true or false, depending on the Current voltage value displayed above.
Tx Bias Low Warning Flag	This can be either true or false, depending on the present Tx bias current value displayed above.

Table 23-9. Diagnostic Data in show interfaces transceiver (continued)

Line	Description
Tx Power Low Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power Low Warning Flag	This can be either true or false, depending on the Current Rx power value displayed above.

Related Commands

interface	Configure a physical interface on the switch.
show ip interface	Displays Layer 3 information about the interfaces.
show interfaces	Display information on a specific physical interface or virtual interface.
show inventory (C-Series and E-Series)	Display the chassis type, components (including media), FTOS version including hardware identification numbers and configured protocols.
show inventory (S-Series)	Display the S-Series switch type, components (including media), FTOS version including hardware identification numbers and configured protocols.

show range

C E S

Display all interfaces configured using the [interface range](#) command.

Syntax

show range

Command Mode

INTERFACE RANGE (config-if-range)

Command History

Version 8.2.1.0	Support for 4093 VLANs on E-Series ExaScale
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced

Example

```
FTOS(conf-if-range-so-2/0-1,fa-0/0)#show range
interface sonet 2/0 - 1
interface fastethernet 0/0
FTOS(conf-if-range-so-2/0-1,fa-0/0)#
```

Related Commands

interface	Configure a physical interface on the switch.
show ip interface	Displays Layer 3 information about the interfaces.
show interfaces	Display information on a specific physical interface or virtual interface.

show running-config ecmp-group

54810

54820T

Display interfaces, LAG, or LAG link bundles being monitored for uneven traffic distribution using the [ecmp-group](#) monitoring enable command. The ECMP group could have a LAG or a list of 10G/40 interfaces (not *just* LAG link-bundles).

Syntax show running-config ecmp-group

Command Mode CONFIGURATION

Defaults Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.10.0	Introduced on S4810

Related Commands	ecmp-group	Configure a mechanism to monitor traffic distribution.
-------------------------	----------------------------	--

shutdown

C **E** **S**

Disable an interface.

S4810

S4820T

Syntax shutdown

To activate an interface, enter no shutdown.

Defaults The interface is disabled.

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	E-Series legacy command	

Usage Information The **shutdown** command marks a physical interface as unavailable for traffic. To discover if an interface is disabled, use the **show ip interface brief** command. Disabled interfaces are listed as down.

Disabling a VLAN or a port channel causes different behavior. When a VLAN is disabled, the Layer 3 functions within that VLAN are disabled. Layer 2 traffic continues to flow. Entering the **shutdown c** command on a port channel disables all traffic on the port channel and the individual interfaces within the port channel. To enable a port channel, you must enter **no shutdown** on the port channel interface and at least one interface within that port channel.

The **shutdown c** and **description** commands are the only commands that you can configure on an interface that is a member of a port channel.

**Related
Commands**

interface port-channel	Create a port channel interface.
interface vlan	Create a VLAN.
show ip interface	Displays the interface routing status. Add the keyword <code>brief</code> to display a table of interfaces and their status.

speed (for 10/100/1000 interfaces)

C E S

S4810

S4820T

Set the speed for 10/100/1000 Base-T Ethernet interfaces. Both sides of a link must be set to the same speed (10/100/1000) or to auto or the link may not come up.

Syntax speed { 10 | 100 | 1000 | auto }

To return to the default setting, use the `no speed { 10 | 100 | 1000 }` command.

Parameters

10	Enter the keyword 10 to set the interface's speed to 10 Mb/s. Note: This interface speed is not supported on the LC-EH-GE-50P or the LC-EJ-GE-50P card. If the command is entered for these interfaces, an error message appears.
100	Enter the keyword 100 to set the interface's speed to 10/100 Mb/s. Note: When this setting is enabled, only 100Base-FX optics are supported on the LC-EH-GE-50P or the LC-EJ-GE-50P card.
1000	Enter the keyword 1000 to set the interface's speed to 1000 Mb/s. (Auto-negotiation is enabled. Refer to negotiation auto for more information) When this setting is enabled, only 1000Base-FX optics are supported on the LC-EH-GE-50P or the LC-EJ-GE-50P card.
auto	Enter the keyword auto to set the interface to auto-negotiate its speed. (Auto-negotiation is enabled. Refer to negotiation auto for more information)

Defaults auto

Command Modes INTERFACE

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Supported on LC-EH-GE-50P or the LC-EJ-GE-50P cards
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	


**Usage
Information**

This command is found on the 10/100/1000 Base-T Ethernet interfaces.

When auto is enabled, the system performs an automatic discovery to determine the optics installed and configure the appropriate speed.

When you configure a speed for the 10/100/1000 interface, you should confirm the [negotiation auto](#) command setting. Both sides of the link should have auto-negotiation either enabled or disabled. For speed settings of 1000 or auto, the software sets the link to auto-negotiation and you cannot change that setting.



In FTOS, the command **speed 100** is an exact equivalent of **speed auto 100** in IOS.


 **Note:** Starting with FTOS 7.8.1.0, when a copper SFP2 module with catalog number GP-SFP2-1T is used in the S25P model of the S-Series, its speed can be manually set with the speed command. When the speed is set to 10 or 100 Mbps, the duplex command can also be executed.

Related Commands

duplex (10/100 Interfaces)	Configure duplex mode on physical interfaces with the speed set to 10/100.
negotiation auto	Enable or disable auto-negotiation on an interface.

speed (Management interface)

  Set the speed for the Management interface.



Syntax speed { 10 | 100 | auto }

To return to the default setting, use the no speed { 10 | 100 } command.

Parameters

10	Enter the keyword 10 to set the interface's speed to 10 Mb/s.
100	Enter the keyword 100 to set the interface's speed to 100 Mb/s.
auto	Enter the keyword auto to set the interface to auto-negotiate its speed.

Defaults

auto

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.11.1	Introduced on Z9000.
Version 8.3.11.1	Introduced on S55, S60, and S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale.
Version 7.5.1.0	Introduced on C-Series.
pre-Version 6.2.1.0	Introduced for E-Series.


Usage Information

This command is found on the Management interface only.

Related Commands

interface ManagementEthernet	Configure the Management port on the system (either the Primary or Standby RPM).
duplex (Management)	Set the mode of the Management interface.
management route	Configure a static route that points to the Management interface or a forwarding router.

stack-unit portmode



Split a single 40G port into 4-10G ports on the S4810, S4820T, or Z9000.

Syntax

stack-unit *stack-unit* port *number* portmode quad

Parameters

<i>stack-unit</i>	Enter the stack member unit identifier of the stack member to reset. S4810 and S4820T range: 0 to 11 Z9000 range: 0 to 7 Note: The S4810 and S4820T commands accept Unit ID numbers 0-11, though S4810 supports stacking up to 3 units only with FTOS version 8.3.7.1.
<i>number</i>	Enter the port number of the 40G port to be split. S4810 S4820T range: Enter one of the following port numbers: 48, 52, 56, or 60. Z9000 range: 0 to 124 in multiples of 4 (0, 4, 8, 12, ... 120 124)

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.11.1	Introduced on Z9000.
Version 8.3.7.1	Introduced on S4810.

Usage Information

Splitting a 40G port into 4x10G port is supported only on a standalone unit.

- Split ports cannot be used as stack-link to stack an S4810 or S4820T.
- Split ports S4810 or S4820T units cannot be a part of any stacked system.
- The unit number with the split ports must be the default (stack-unit 0)
- This can be verified using CLI “show system brief”. If the unit ID is different than 0, then it must be renumbered to 0 before ports are split. By using the stackunit id renumber 0 command in EXEC mode.

The quad port must be in a default configuration before it can be split into 4x10G ports. The 40G port is lost in the config when the port is split, so be sure the port is also removed from other L2/L3 feature configurations.

The system must be reloaded after issuing the CLI for the change to take effect.

switchport

C E S

S4810

S4820T

Place an interface in Layer 2 mode.

Syntax

```
switchport [backup interface { gigabit slot/port | tengigabit slot/port | fortyGigE slot/port |
port-channel number}]
```

To remove an interface from Layer 2 mode and place it in Layer 3 mode, enter `no switchport`. If a `switchport backup interface` is configured, you must first remove the backup configuration. To remove a `switchport backup interface`, enter `no switchport backup interface { gigabit slot/port | tengigabit slot/port | fortyGigE slot/port | port-channel number }`.

Parameters

backup interface	Use this option to configure a redundant Layer 2 link without using Spanning Tree. This keyword configures a backup port so that if the primary port fails the backup port changes to the up state. If the primary later comes up, it becomes the backup.
gigabit	Enter this keyword if the backup port is a 1G port.
tengigabit	Enter this keyword if the backup port is a 10G port.
fortyGigE	Enter this keyword if the backup port is a 40G port.
port-channel	Enter this keyword if the backup port is a static or dynamic port channel.
<i>slot/port</i>	Specify the line card and port number of the backup port.

Defaults

Disabled (The interface is in Layer 3 mode.)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.1.0	Added support for port-channel interfaces (<code>port-channel <i>number</i></code> option).
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Added <code>backup interface</code> option.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

If an IP address or VRRP group is assigned to the interface, you cannot use the `switchport` command on the interface. To use the `switchport` command on an interface, only the `no ip address` and no shutdown statements must be listed in the show config output.

When you enter the `switchport` command, the interface is automatically added to the default VLAN.

To use the **switchport backup interface** command on a port, you must first enter the **switchport** command. For details, the Configuring Redundant Links section in the Layer 2 chapter of the *FTOS Configuration Guide*.

Related Commands

interface port-channel	Create a port channel interface.
show interfaces switchport	Display information about switchport interfaces.

wanport

E Enable the WAN mode on a TenGigabitEthernet interface.

Syntax wanport

To disable the WAN Port, enter no wanport.

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.1.1.2	Introduced on E-Series ExaScale
pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

The port must be in a shutdown state to change from LAN mode to WAN mode and vice-versa as shown in the figure below.

For E-Series ExaScale systems, you must configure all the ports in a port-pipe to either WANPHY or non-WANPHY. They cannot be mixed on the same port-pipe.

Example

```
interface TenGigabitEthernet 13/0
  no ip address
  no shutdown
FTOS(conf-if-te-13/0)#
FTOS(conf-if-te-13/0)#wanport
% Error: Port should be in shutdown mode, config ignored Te 13/0.
FTOS(conf-if-te-13/0)#
FTOS(conf-if-te-13/0)#shutdown
FTOS(conf-if-te-13/0)#
FTOS(conf-if-te-13/0)#wanport
FTOS(conf-if-te-13/0)#
```

Port Channel Commands

A Link Aggregation Group (LAG) is a group of links that appear to a MAC client as if they were a single link according to IEEE 802.3ad. In FTOS, a LAG is referred to as a Port Channel.

Table 23-10. Port Channel Limits

Platform	Maximum Port Channel IDs	Maximum Members per Port Channel
E-Series ExaScale	255	64
E-Series TeraScale	255	16
E-Series EtherScale	32	16
C-Series	128	8
S-Series	128	8

Because each port can be assigned to only one Port Channel, and each Port Channel must have at least one port, some of those nominally available Port Channels might have no function because they could have no members if there are not enough ports installed. In the S-Series, those ports could be provided by stack members.

The commands in this section are specific to Port Channel interfaces:

- [channel-member](#)
- [group](#)
- [interface port-channel](#)
- [minimum-links](#)
- [port-channel failover-group](#)
- [show config](#)
- [show interfaces port-channel](#)
- [show port-channel-flow](#)



Note: The FTOS implementation of LAG or Port Channel requires that you configure a LAG on both switches manually. For information on FTOS Link Aggregation Control Protocol (LACP) for dynamic LAGs, refer to [Link Aggregation Control Protocol \(LACP\)](#).

For more information on configuring and using Port Channels, refer to the *FTOS Configuration Guide*.

channel-member

C **E** **S**

Add an interface to the Port Channel, while in the INTERFACE PORTCHANNEL mode.

S4810

S4820T

Syntax channel-member *interface*

To delete an interface from a Port Channel, use the no channel-member *interface* command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a 100/1000 Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. • For a Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. • For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. • For a Ten Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
------------------	---

Defaults

Not configured.

Command Modes

INTERFACE PORTCHANNEL

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

Use the [interface port-channel](#) command to access this command.

You cannot add an interface to a Port Channel if the interface contains an IP address in its configuration. Only the [shutdown](#), [description](#), [mtu](#), and [ip mtu](#) commands can be configured on an interface if it is to be added to a Port Channel. The [mtu](#) and [ip mtu](#) commands are only available when the chassis is in Jumbo mode.

Link MTU and IP MTU considerations for Port Channels are:

- All members must have the same link MTU value and the same IP MTU value.
- The Port Channel link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the channel members.

Example: If the members have a link MTU of 2100 and an IP MTU 2000, the Port Channel's MTU values cannot be higher than 2100 for link MTU or 2000 bytes for IP MTU.

When an interface is removed from a Port Channel with the [no channel-member](#) command syntax, the interface reverts to its configuration prior to joining the Port Channel.

An interface can belong to only one Port Channel.

On the E-Series TeraScale, you can add up to 16 interfaces to a Port Channel; E-Series ExaScale can have up to 64. You can have eight interfaces per Port Channel on the C-Series and S-Series. The interfaces can be located on different line cards but must be the same physical type and speed (for example, all 1-Gigabit Ethernet interfaces). However, you can combine 100/1000 interfaces and GE interfaces in the same Port Channel.

If the Port Channel contains a mix of interfaces with 100 Mb/s speed and 1000 Mb/s speed, the software disables those interfaces whose speed does not match the speed of the first interface configured and enabled in the Port Channel. If that first interface goes down, the Port Channel does not change its designated speed; you must disable and re-enable the Port Channel or change the order of the channel members configuration to change the designated speed. Refer to the *FTOS Configuration Guide* for more information on Port Channels.

Related Commands

description	Assign a descriptive text string to the interface.
interface port-channel	Create a Port Channel interface.
shutdown	Disable/Enable the port channel.

group

C E S

S4810

S4820T

Group two LAGs in a supergroup (“fate-sharing group” or “failover group”).

Syntax

```
group group_number port-channel number port-channel number
```

To remove an existing LAG supergroup, use the `no group group_number` command.

Parameters

<i>group_number</i>	Enter an integer from 1 to 32 that will uniquely identify this LAG fate-sharing group.
port-channel <i>number</i>	Enter the keyword <code>port-channel</code> followed by an existing LAG <i>number</i> . Enter this keyword/variable combination twice, identifying the two LAGs to be paired.

Defaults

No default values or behavior

Command Modes

PORT-CHANNEL FAILOVER-GROUP (conf-po-failover-grp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced for C-Series, E-Series, and S-Series

Example

```
FTOS (conf) #port-channel failover-group
FTOS (conf-po-failover-grp) #group 1 port-channel 1 port-channel 2
FTOS (conf-po-failover-grp) #
```

Related Commands

port-channel failover-group	Access the PORT-CHANNEL FAILOVER-GROUP mode to configure a LAG failover group.
show interfaces port-channel	Display information on configured Port Channel groups.

interface port-channel

C **E** **S**

S4810

S4820T

Create a Port Channel interface, which is a link aggregation group containing up to 16 physical interfaces on E-Series, eight physical interfaces on C-Series and S-Series.

Syntax

interface port-channel *channel-number*

To delete a Port Channel, use the no interface port-channel *channel-number* command.

Parameters

<i>channel-number</i>	For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
-----------------------	--

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.0	Introduced for E-Series

Example

```
FTOS(conf)#int port-channel 2
FTOS(conf-if-po-2)#
```

Usage Information

Port Channel interfaces are logical interfaces and can be either in Layer 2 mode (by using the [switchport](#) command) or Layer 3 mode (by configuring an IP address). You can add a Port Channel in Layer 2 mode to a VLAN.

The [shutdown](#), [description](#), and [name](#) commands are the only commands that you can configure on an interface while it is a member of a Port Channel. To add a physical interface to a Port Channel, the interface can only have the [shutdown](#), [description](#), and [name](#) commands configured. The Port Channel's configuration is applied to the interfaces within the Port Channel.

A Port Channel can contain both 100/1000 interfaces and GE interfaces. Based on the first interface configured in the Port Channel and enabled, FTOS determines if the Port Channel uses 100 Mb/s or 1000 Mb/s as the common speed. Refer to [channel-member](#) for more information.

If the line card is in a Jumbo mode chassis, then the [mtu](#) and `ip mtu` commands can also be configured. The Link MTU and IP MTU values configured on the channel members must be greater than the Link MTU and IP MTU values configured on the Port Channel interface.



Note: In a Jumbo-enabled system, all members of a Port Channel must be configured with the same link MTU values and the same IP MTU values.

Related Commands

channel-member	Add a physical interface to the LAG.
interface	Configure a physical interface.
interface loopback	Configure a Loopback interface.
interface null	Configure a null interface.
interface vlan	Configure a VLAN.
shutdown	Disable/Enable the port channel.

minimum-links

C E S

S4810

S4820T

Configure the minimum number of links in a LAG (Port Channel) that must be in “oper up” status for the LAG to be also in “oper up” status.

Syntax `minimum-links number`

Parameters

<i>number</i>	Enter the number of links in a LAG that must be in “oper up” status. Range: 1 to 16 Default: 1
---------------	--

Defaults

1

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.0	Introduced for E-Series

Usage Information

If you use this command to configure the minimum number of links in a LAG that must be in “oper up” status, then the LAG must have at least that number of “oper up” links before it can be declared as up.

For example, if the required minimum is four, and only three are up, then the LAG will be considered down.

port-channel failover-group

C E S

Access the PORT-CHANNEL FAILOVER-GROUP mode to configure a LAG failover group.

S4810

S4820T

Syntax port-channel failover-group

To remove all LAG failover groups, use the no port-channel failover-group command.

Defaults No default values or behavior

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced for C-Series, E-Series, and S-Series

Usage Information

This feature groups two LAGs to work in tandem as a supergroup, so that, for example, if one LAG goes down, the other LAG is taken down automatically, providing an alternate path to reroute traffic, avoiding oversubscription on the other LAG. You can use both static and dynamic (LACP) LAGs to configure failover groups. For details, refer to the Port Channel chapter in the *FTOS Configuration Guide*.

Related Commands

group	Group two LAGs in a supergroup (“fate-sharing group”).
show interfaces port-channel	Display information on configured Port Channel groups.

show config

C E S

Display the current configuration of the selected LAG.

Syntax show config

Command Modes INTERFACE PORTCHANNEL

Example

```
FTOS(conf-if-po-1)#show config
!
interface Port-channel 1
 no ip address
 shutdown
FTOS(conf-if-po-1)#
```

Command History

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

show interfaces port-channel

C **E** **S** Display information on configured Port Channel groups.

Syntax show interfaces port-channel [*channel-number*] [brief]

Parameters	
<i>channel-number</i>	For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
brief	(OPTIONAL) Enter the keyword brief to display only the port channel number, the state of the port channel, and the number of interfaces in the port channel.

Command Modes EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced for S-Series; Modified to display LAG failover group status
Version 7.5.1.0	Introduced for C-Series
E-Series legacy command	

Example (EtherScale)

```
FTOS#show interfaces port-channel 20
Port-channel 20 is up, line protocol is up (Failover-group 1 is down)
Hardware address is 00:01:e8:01:46:fa
Port-channel is part of failover-group 1
Internet address is 1.1.120.1/24
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 2000 Mbit
Members in this channel: Gi 0/5 Gi 0/18
ARP type: ARPA, ARP timeout 04:00:00
Last clearing of "show interfaces" counters 00:00:00
Queueing strategy: fifo
  44507301 packets input, 3563070343 bytes
  Input 44506754 IP Packets, 0 Vlans 0 MPLS
  41 64-byte pkts, 44502871 over 64-byte pkts, 249 over 127-byte pkts
  407 over 255-byte pkts, 3127 over 511-byte pkts, 606 over 1023-byte pkts
  Received 0 input symbol errors, 0 runts, 0 giants, 0 throttles
  0 CRC, 0 IP Checksum, 0 overrun, 0 discarded
  1218120 packets output, 100745130 bytes, 0 underruns
  Output 5428 Multicasts, 4 Broadcasts, 1212688 Unicasts
  1216142 IP Packets, 0 Vlans, 0 MPLS
  0 throttles, 0 discarded
Rate info (interval 299 sec):
  Input 01.50Mbits/sec,          2433 packets/sec
  Output 00.02Mbits/sec,         4 packets/sec
Time since last interface status change: 00:22:34

FTOS#
```

Table 23-11. show interfaces port-channel Command Example Fields

Field	Description
Port-Channel 1...	Displays the LAG's status. In the example, the status of the LAG's LAG fate-sharing group ("Failover-group") is listed.
Hardware is...	Displays the interface's hardware information and its assigned MAC address.
Port-channel is part...	Indicates whether the LAG is part of a LAG fate-sharing group ("Failover-group").
Internet address...	States whether an IP address is assigned to the interface. If one is, that address is displayed.
MTU 1554...	Displays link and IP MTU.
LineSpeed	Displays the interface's line speed. For a port channel interface, it is the line speed of the interfaces in the port channel.
Members in this...	Displays the interfaces belonging to this port channel.
ARP type:...	Displays the ARP type and the ARP timeout value for the interface.
Last clearing...	Displays the time when the show interfaces counters were cleared.
Queueing strategy.	States the packet queuing strategy. FIFO means first in first out.
packets input...	Displays the number of packets and bytes into the interface.
Input 0 IP packets...	Displays the number of packets with IP headers, VLAN tagged headers and MPLS headers. The number of packets may not add correctly because a VLAN tagged IP packet counts as both a VLAN packet and an IP packet.
0 64-byte...	Displays the size of packets and the number of those packets entering that interface. This information is displayed over two lines.
Received 0...	Displays the type and number of errors or other specific packets received. This information is displayed over three lines.
Output 0...	Displays the type and number of packets sent out the interface. This information is displayed over three lines.
Rate information...	Displays the traffic rate information into and out of the interface. Traffic rate is displayed in bits and packets per second.
Time since...	Displays the time since the last change in the configuration of this interface.

**Example
(show interfaces
port-channel brief)**

```

FTOS#sh int por 1 br

LAG Mode  Status      Uptime   Ports
1   L2    up        00:00:08  Gi 3/0   (Up) *
                   Gi 3/1   (Down)
                   Gi 3/2   (Up)

FTOS#

```

Table 23-12. show interfaces port-channel brief Command Example Fields

Field	Description
LAG	Lists the port channel number.
Mode	Lists the mode: <ul style="list-style-type: none"> • L3 - for Layer 3 • L2 - for Layer 2
Status	Displays the status of the port channel. <ul style="list-style-type: none"> • down - if the port channel is disabled (shutdown) • up - if the port channel is enabled (no shutdown)
Uptime	Displays the age of the port channel in hours:minutes:seconds.
Ports	Lists the interfaces assigned to this port channel.
(untitled)	Displays the status of the physical interfaces (up or down). In Layer 2 port channels, an * (asterisk) indicates which interface is the primary port of the port channel. The primary port sends out interface PDU. In Layer 3 port channels, the primary port is not indicated.

Related Commands[show lacp](#)

Display the LACP matrix.

show port-channel-flow

C **E** **S**

Display an egress port in a given port-channel flow.

S4810**S4820T****Syntax**

```
show port-channel-flow outgoing-port-channel number incoming-interface interface { source-ip address destination-ip address } | { protocol number | icmp | tcp | udp } | { source-port number destination-port number } | { source-mac address destination-mac address }
```

Parameters

outgoing-port-channel <i>number</i>	Enter the keyword outgoing-port-channel followed by the number of the port channel to display flow information. <ul style="list-style-type: none"> For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
incoming-interface <i>interface</i>	Enter the keyword incoming-interface followed by the interface type and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
source-ip <i>address</i>	Enter the keyword source-ip followed by the IP source address in IP address format.
destination-ip <i>address</i>	Enter the keyword destination-ip followed by the IP destination address in IP address format.
protocol <i>number</i> icmp tcp udp	On the E-Series only, enter the keyword protocol followed by one of the protocol type keywords: tcp, udp, icmp or protocol number Note: The protocol number keyword applies to E-Series only.
source-port <i>number</i>	Enter the keyword source-port followed by the source port number. Range: 1 to 65536 Default: None
destination-port <i>number</i>	Enter the keyword destination-port followed by the destination port number. Range: 1 to 65536 Default: None
source-mac <i>address</i>	Enter the keyword source-mac followed by the MAC source address in the nn:nn:nn:nn:nn:nn format.
destination-mac <i>address</i>	Enter the keyword destination-mac followed by the MAC destination address in the nn:nn:nn:nn:nn:nn format.

Command Modes

EXEC

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.10.0 Introduced on S4810

Usage Information

Since this command calculates based on a Layer 2 hash algorithm, use this command to display flows for switched Layer 2 packets, *not* for routed packets (use the show ip flow command to display routed packets).

The `show port-channel-flow` command returns the egress port identification in a given port-channel if a valid flow is entered. A mismatched flow error occurs if MAC-based hashing is configured for a Layer 2 interface and the user is trying to display a Layer 3 flow.

The output will display three entries:

- Egress port for unfragmented packets.
- In the event of fragmented packets, egress port of the first fragment.
- In the event of fragmented packets, egress port of the subsequent fragments.

Note: In the `show port channel flow` command output, the egress port for an unknown unicast, multicast or broadcast traffic is not displayed.

Example `show port-channel-flow outgoing-port-channel number incoming-interface interface source-mac address destination-mac address`

- Load-balance is configured for MAC
- Load-balance is configured for IP 4-tuple/2-tuple for the C-Series and S-Series
- A non-IP payload is going out of Layer 2 LAG interface that is a member of VLAN with an IP address.

```
FTOS#show port-channel-flow outgoing-port-channel 1 incoming-interface gi 3/0
source-mac 00:00:50:00:00:00 destination-mac 00:00:a0:00:00:00

Egress Port for port-channel 1, for the given flow, is Te 13/01
```

**Example
(E-Series)**

On the E-Series only:

`show port-channel-flow outgoing-port-channel number incoming-interface interface source-ip address destination-ip address {protocol number [icmp/tcp/udp]} {source-port number destination-port number}`

- Load-balance is configured for IP 5-tuple/3-tuple.
- An IP payload is going out of a Layer 2 LAG interface that is a member of a VLAN with an IP address.

```
FTOS#show port-channel-flow outgoing-port-channel 2 incoming-interface gi 3/0
source-ip 2.2.2.0 destination-ip 3.2.3.1 protocol tcp source-port 5 destination-port 6

Egress Port for port-channel 2, for the given flow:
Unfragmented packet: Gi 1/6
Fragmented packets (first fragment): Gi 1/12
Fragmented packets (remaining fragments): Gi 1/12
```

**Related
Commands**

[load-balance \(E-Series\)](#)

Balance traffic over E-Series port channel members.

Time Domain Reflectometer (TDR)



TDR is useful for troubleshooting an interface that is not establishing a link; either it is flapping or not coming up at all. TDR detects open or short conditions of copper cables on 100/1000 Base-T modules.

- [tdr-cable-test](#)
- [show tdr](#)

Important Points to Remember

- The interface and port must be enabled (configured— the [interface](#) command) before running TDR. An error message is generated if you have not enabled the interface.
- The interface on the far-end device must be shut down before running TDR.
- Since TDR is an intrusive test on an interface that is not establishing a link, do not run TDR on an interface that is passing traffic.
- When testing between two devices, do not run the test on both ends of the cable.

tdr-cable-test

C **E** **S**

Test the condition of copper cables on 100/1000 Base-T modules.

S4810

S4820T

Syntax `tdr-cable-test interface`

Parameters

<i>interface</i>	Enter the keyword GigabitEthernet followed by the slot/port information for the 100/1000 Ethernet interface.
------------------	--

Defaults No default behavior or setting

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.1.1.0	Introduced on E-Series

Usage Information

The interface must be enabled to run the test or an error message is generated:

Message 1 FTOS#tdr-cable-test gigabitethernet 5/2

Message 2 %Error: Interface is disabled GI 5/2

The C-Series and S-Series do not generate log messages is generated when the link flaps down/up during TDR tests. The E-series, does produce these log messages.

Related Commands

show tdr	Display the results of the TDR test.
--------------------------	--------------------------------------

show tdr

C E S

S4810

S4820T

Display the TDR test results.

Syntax show tdr *interface*

Parameters

<i>interface</i>	Enter the keyword GigabitEthernet followed by the slot/port information for the 100/1000 Ethernet interface.
------------------	--

Defaults No default behavior or settings

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Support added for S-Series
Version 7.6.1.0	Support added for C-Series
Version 6.1.1.0	Introduced

Example

```
FTOS#show tdr gigabitethernet 10/47
Time since last test: 00:00:02
Pair A, Length: OK Status: Terminated
Pair B, Length: 92 (+/- 1) meters, Status: Short
Pair C, Length: 93 (+/- 1) meters, Status: Open
Pair D, Length: 0 (+/- 1) meters, Status: Impedance Mismatch
```

Table 23-13. TDR Test Status

Status	Definition
<i>OK Status: Terminated</i>	TDR test is complete, no fault is detected on the cable, and the test is terminated
Length: 92 (+/- 1) meters, Status: Shorted	A short is detected on the cable. The location, in this example 92 meters, of the short is accurate to plus or minus one meter.
Length: 93 (+/- 1) meters, Status: Open	An opening is detected on the cable. The location, in this example 93 meters, of the open is accurate to plus or minus one meter.
Status: Impedance Mismatch	There is an impedance mismatch in the cables.

Usage Information If the TDR test has not been run, an error messages is generated:

Message 3 %Error: Please run the TDR test first

Related Commands

tdr-cable-test	Run the TDR test.
--------------------------------	-------------------

UDP Broadcast

The User Datagram Protocol (UDP) broadcast feature is a software-based method to forward low throughput (not to exceed 200 pps) IP/UDP broadcast traffic arriving on a physical or VLAN interface.

Important Points to Remember

- This feature is available only on the E-Series platform, as noted by this symbol under each command heading: **E**
- This feature applies only to E-Series Layer 3 physical or VLAN interfaces.
- Routing Information Protocol (RIP) is not supported with the UDP Broadcast feature.
- If this feature is configured on an interface using `ip udp-helper udp-port`, then the command `ip directed-broadcast` becomes ineffective on that interface.
- The existing command `show interface` has been modified to display the configured broadcast address.

The commands for UDP Broadcast are:

- `debug ip udp-helper`
- `ip udp-broadcast-address`
- `ip udp-helper udp-port`
- `show ip udp-helper`

debug ip udp-helper

E **S4810**

Enable UDP debug and display the debug information on a console.

S4820T

Syntax `debug ip udp-helper`

To disable debug information, use the `no debug ip udp-helper` command.

Defaults Debug disabled

Command Modes EXEC

EXEC Privilege

Example

```
FTOS#debug ip udp-helper
UDP helper debugging is on
```

```
01:20:22: Pkt rcvd on Gi 5/0 with IP DA (0xffffffff) will be sent on Gi 5/1 Gi 5/2 Vlan 3
```

```
01:44:54: Pkt rcvd on Gi 7/0 is handed over for DHCP processing.
```

Related Commands	ip udp-broadcast-address	Configure a UDP IP address for broadcast
	ip udp-helper udp-port	Enable the UDP broadcast feature on an interface.
	show ip udp-helper	Display the configured UDP helper(s) on all interfaces.
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Pre-version 8.3.7.0	Introduced on E-Series ExaScale

ip udp-broadcast-address

E **S4810** Configure an IP UDP address for broadcast.

S4820T

Syntax `ip udp-broadcast-address address`

To delete the configuration, use the `no ip udp-broadcast-address address` command.

Parameters	<i>address</i>	Enter an IP broadcast address in dotted decimal format (A.B.C.D).
-------------------	----------------	---

Defaults Not Configured

Command Modes INTERFACE (config-if)

Usage Information When a UDP broadcast packet is flooded out of an interface, and the outgoing interface is configured using this command, the outgoing packet's IP destination address is replaced with the configured broadcast address.

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Pre-version 8.3.7.0	Introduced on E-Series ExaScale

Related Commands	debug ip udp-helper	Enable debug and display the debug information on a console.
	show ip udp-helper	Display the configured UDP helper(s) on all interfaces.

ip udp-helper udp-port

E **S4810** Enable the UDP broadcast feature on an interface either for all UDP ports or a specified list of UDP ports.

S4820T

Syntax `ip udp-helper udp-port [udp-port-list]`

To disable the UDP broadcast on a port, use the `no ip udp-helper udp-port [udp-port-list]` command.

Parameters	<i>udp-port-list</i>	(OPTIONAL) Enter up to 16 comma separated UDP port numbers. Note: If this option is not used, all UDP Ports are considered by default.
Defaults	No default behavior or values	
Command Modes	INTERFACE (config-if)	
Usage Information	<p>If the ip helper-address command and ip udp-helper udp-port command are configured, the behavior is that the UDP broadcast traffic with port numbers 67/68 will be unicast relayed to the DHCP server per the ip helper-address configuration. This will occur regardless if the ip udp-helper udp-port command contains port numbers 67/68 or not.</p> <p>If only the ip udp-helper udp-port command is configured, all the UDP broadcast traffic is flooded, including ports 67/68 traffic if those ports are part of the <i>udp-port-list</i>.</p>	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Pre-version 8.3.7.0	Introduced on E-Series ExaScale
Related Commands	ip helper-address	Configure the destination broadcast or host address for DHCP server.
	debug ip udp-helper	Enable debug and display the debug information on a console.
	show ip udp-helper	Display the configured UDP helper(s) on all interfaces.

show ip udp-helper

E **S4810** Display the configured UDP helper(s) on all interfaces.
S4820T

Syntax show ip udp-helper

Defaults No default configuration or values

Command Modes EXEC

Example

```

FTOS#show ip udp-helper
-----
Port      UDP port list
-----
Gi 10/0   656, 658
Gi 10/1   All

```

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Pre-version 8.3.7.0	Introduced on E-Series ExaScale

**Related
Commands**

debug ip udp-helper	Enable debug and display the debug information on a console.
ip udp-broadcast-address	Configure a UDP IP address for broadcast.
ip udp-helper udp-port	Enable the UDP broadcast feature on an interface either for all UDP ports or a specified list of UDP ports.

IPv4 Routing

Overview

The basic IPv4 commands are supported by FTOS on all Dell Force10 systems, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, **S4820T**, or **Z** Z-Series.

Commands

IPv4-related commands are described in this chapter. They are:

- arp
- arp learn-enable
- arp retries
- arp timeout
- clear arp-cache
- clear host
- clear ip fib linecard
- clear ip route
- clear tcp statistics
- debug arp
- debug ip dhcp
- debug ip icmp
- debug ip packet
- ip address
- ip directed-broadcast
- ip domain-list
- ip domain-lookup
- ip domain-name
- ip fib download-igp-only
- ip helper-address
- ip helper-address hop-count disable
- ip host

- ip max-frag-count
- ip mtu
- ip name-server
- ip proxy-arp
- ip redirects
- ip route
- ip source-route
- ip unreachable
- ip vlan-flooding
- load-balance (C-Series and S-Series)
- load-balance (E-Series)
- management route
- show arp
- show arp retries
- show hosts
- show ip cam linecard
- show ip cam stack-unit
- show ip fib linecard
- show ip fib stack-unit
- show ip flow
- show ip interface
- show ip management-route
- show ipv6 management-route
- show ip protocols
- show ip route
- show ip route list
- show ip route summary
- show ip traffic
- show protocol-termination-table
- show tcp statistics

arp

C E S

54810

54820T

Syntax

Use Address Resolution Protocol (ARP) to associate an IP address with a MAC address in the switch.

```
arp vrf {vrf name} ip-address mac-address interface
```

To remove an ARP address, use the no arp *ip-address* command.

Parameters

<i>vrf name</i>	E-Series Only: Enter the VRF process identifier to tie the static route to the VRF process.
<i>ip-address</i>	Enter an IP address in dotted decimal format.
<i>mac-address</i>	Enter a MAC address in nnnn.nnnn.nnnn format.
<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For the Management interface, enter the keyword <code>ManagementEthernet</code> followed by the slot/port information. The slot range is 0-1 and the port range is 0. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

You cannot use Class D or Class E IP addresses or zero IP address (0.0.0.0) when creating a static ARP. Zero MAC addresses (00:00:00:00:00:00) are also invalid.

Related Commands

clear arp-cache	Clear dynamic ARP entries from the ARP table.
show arp	Display ARP table.

arp learn-enable

C **E** **S**

Enable ARP learning via Gratuitous ARP.

S4810**S4820T****Syntax**

arp learn-enable

Defaults Disabled

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced

Usage Information

In FTOS versions prior to 8.3.1.0, if a gratuitous ARP is received some time after an ARP request is sent, only RP2 installs the ARP information. For example:

1. At time t=0 FTOS sends an ARP request for IP *A.B.C.D*
2. At time t=1 FTOS receives an ARP request for IP *A.B.C.D*
3. At time t=2 FTOS installs an ARP entry for *A.B.C.D* only on RP2.

Beginning with version 8.3.1.0, when a Gratuitous ARP is received, FTOS installs an ARP entry on all 3 CPUs.

arp retries

C **E** **S**

S4810

S4820T

Set the number of ARP retries in case the system does not receive an ARP reply in response to an ARP request.

Syntax arp retries *number*

Parameters

<i>number</i>	Enter the number of retries. Range: 5 to 20. Default: 5
---------------	---

Defaults 5

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced

Usage Information

Retries are 20 seconds apart.

Related Commands

show arp retries	Display the configured number of ARP retries.
----------------------------------	---

arp timeout

C E S

S4810

S4820T

Set the time interval for an ARP entry to remain in the ARP cache.

Syntax

arp timeout *minutes*

To return to the default value, enter no arp timeout.

Parameters

<i>seconds</i>	Enter the number of minutes. Range: 0 to 35790 Default: 240 minutes
----------------	---

Defaults

240 minutes (4 hours)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Related Commands

show interfaces	Displays the ARP timeout value for all available interfaces.
---------------------------------	--

clear arp-cache

C E S

S4810

S4820T

Clear the dynamic ARP entries from a specific interface or optionally delete (no-refresh) ARP entries from CAM.

Syntax

clear arp-cache [*vrf name* | *interface* | ip *ip-address*] [no-refresh]

Parameters

<i>vrf name</i>	E-Series Only: Clear only the ARP cache entries tied to the VRF process.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For the Management interface, enter the keyword <code>ManagementEthernet</code> followed by the slot/port information. The slot range is 0-1 and the port range is 0. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>ip ip-address</i>	(OPTIONAL) Enter the keyword <code>ip</code> followed by the IP address of the ARP entry you wish to clear.
<i>no-refresh</i>	(OPTIONAL) Enter the keyword <code>no-refresh</code> to delete the ARP entry from CAM. Or use this option with <i>interface</i> or <i>ip ip-address</i> to specify which dynamic ARP entries you want to delete. Note: Transit traffic may not be forwarded during the period when deleted ARP entries are resolved again and re-installed in CAM. Use this option with extreme caution.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

clear host

C E S

Remove one or all dynamically learnt host table entries.

S4810

S4820T

Syntax clear host *name*

Parameters

<i>name</i>	Enter the name of the host to delete. Enter * to delete all host table entries.
-------------	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

clear ip fib linecard

C E S

Clear all Forwarding Information Base (fib) entries in the specified line card (use this command with caution. Refer to the [Usage Information](#) below.)

S4810

S4820T

Syntax clear ip fib linecard *slot-number* | vrf *vrf instance*

Parameters

<i>slot-number</i>	Enter the number of the line card slot. C-Series and S-Series Range: 0 to 7 E-Series Range: 0 to 13 on E12001200i, 0 to 6 on E600/E600i; 0 to 5 on E300
<i>vrf instance</i>	(Optional) E-Series Only : Clear only the FIB entries on the specified card associated with the VRF instance.

Command Mode

EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.2	Introduced support on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

Use this command to clear Layer 3 CAM inconsistencies.



Caution: Executing this command will cause traffic disruption.

Related Commands

show ip fib linecard	Show FIB entries.
--------------------------------------	-------------------

clear ip route

C E S

S4810

S4820T

Clear one or all routes in the routing table.

Syntax

```
clear ip route { * | ip-address mask | vrf vrf instance }
```

Parameters

*	Enter an asterisk (*) to clear all learned IP routes.
<i>ip-address mask</i>	Enter a specific IP address and mask in dotted decimal format to clear that IP address from the routing table.
<i>vrf instance</i>	(Optional) E-Series Only: Clear only the routes tied to the VRF instance.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Related Commands

ip route	Assign an IP route to the switch.
show ip route	View the routing table.
show ip route summary	View a summary of the routing table.

clear tcp statistics

C E S

Clear TCP counters.

S4810

S4820T

Syntax

clear tcp statistics [all | cp | rp1 | rp2]

Note: These options are supported only on the E-Series.

Parameters

all	Enter the keyword <code>all</code> to clear all TCP statistics maintained on all switch processors.
cp	(OPTIONAL) Enter the <code>cp</code> to clear only statistics from the Control Processor.
rp1	(OPTIONAL) Enter the keyword <code>rp1</code> to clear only the statistics from Route Processor 1.
rp2	(OPTIONAL) Enter the keyword <code>rp2</code> to clear only the statistics from Route Processor 2.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

debug arp

C E S

View information on ARP transactions.

S4810

S4820T

Syntax

debug arp [*interface*] [*count value*]

To stop debugging ARP transactions, enter `no debug arp`.

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>gigabitethernet</code> followed by the slot/port information. For the Management interface, enter the keyword <code>managementethernet</code> followed by the slot/port information. The slot range is 0-1 and the port range is 0. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>count value</i>	(OPTIONAL) Enter the keyword <code>count</code> followed by the count value. Range: 1 to 65534

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.3.1.0	Added the count option

Defaults

No default behavior or values

Usage Information

Use the count option to stop packets from flooding the user terminal when debugging is turned on.

debug ip dhcp

C E S

S4810

S4820T

Enable debug information for DHCP relay transactions and display the information on the console.

Syntax

debug ip dhcp

To disable debug, use the no debug ip dhcp command.

Defaults Debug disabled

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.4.10	Introduced on E-Series

Example

```
FTOS#debug ip dhcp
00:12:21 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP Request, hops = 0, XID = 0xbf05140f, secs = 0, hwaddr =
00:60:CF:20:7B:8C, giaddr = 0.0.0.0
00:12:21 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:26 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP Request, hops = 0, XID = 0xbf05140f, secs = 5, hwaddr =
00:60:CF:20:7B:8C, giaddr = 0.0.0.0
00:12:26 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:40 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP Request, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr =
00:60:CF:20:7B:8C, giaddr = 0.0.0.0
00:12:40 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:42 : %RELAY-I-PACKET: BOOTP REPLY (Unicast) received at interface
14.4.4.1 BOOTP Reply, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr =
00:60:CF:20:7B:8C, giaddr = 113.3.3.17
00:12:42 : %RELAY-I-BOOTREPLY: Forwarded BOOTREPLY for 00:60:CF:20:7B:8C to
113.3.3.254
00:12:42 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP Request, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr =
00:60:CF:20:7B:8C, giaddr = 0.0.0.0
00:12:42 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:42 : %RELAY-I-PACKET: BOOTP REPLY (Unicast) received at interface
14.4.4.1 BOOTP Reply, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr =
00:60:CF:20:7B:8C, giaddr = 113.3.3.17
00:12:42 : %RELAY-I-BOOTREPLY: Forwarded BOOTREPLY for 00:60:CF:20:7B:8C to
113.3.3.254
FTOS#
```

Related Commands

ip helper-address	Specify the destination broadcast or host address for DHCP server request.
ip helper-address hop-count disable	Disable hop-count increment for DHCP relay agent.

debug ip icmp

C **E** **S**

S4810

S4820T

Syntax

View information on the Internal Control Message Protocol (ICMP).

```
debug ip icmp [interface] [count value]
```

To disable debugging, use the no debug ip icmp command.

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For the Management interface, enter the keyword <code>ManagementEthernet</code> followed by the slot/port information. The slot range is 0 and the port range is 0-1. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>count value</i>	(OPTIONAL) Enter the keyword <code>count</code> followed by the count value. Range: 1 to 65534 Default: Infinity

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.3.1.0	Added the count option

Example

```
ICMP: echo request rcvd from src 40.40.40.40
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: echo request sent to dst 40.40.40.40
ICMP: echo request rcvd from src 40.40.40.40
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: echo request sent to dst 40.40.40.40
```

Usage Information

Use the count option to stop packets from flooding the user terminal when debugging is turned on.

debug ip packet

C E S

S4810

S4820T

View a log of IP packets sent and received.

Syntax

debug ip packet [access-group *name*] [count *value*] [*interface*]

To disable debugging, use the no debug ip packet [access-group *name*] [count *value*] [*interface*] command.

Parameters

access-group <i>name</i>	Enter the keyword access-group followed by the access list name (maximum 16 characters) to limit the debug output based on the defined rules in the ACL.
count <i>value</i>	(OPTIONAL) Enter the keyword count followed by the count value. Range: 1 to 65534 Default: Infinity
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword gigabitethernet followed by the slot/port information. For the management interface on the RPM, enter the keyword managementethernet followed by the slot/port information. The slot range is 0-1 and the port range is 0. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword tengigabitethernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.

Command Mode

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added the access-group option
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.3.1.0	Added the count option

Example

IP: s=10.1.2.62 (local), d=10.1.2.206 (Ma 0/0), len 54, sending

```

TCP src=23, dst=40869, seq=2112994894, ack=606901739, win=8191 ACK PUSH
IP: s=10.1.2.206 (Ma 0/0), d=10.1.2.62, len 40, rcvd
TCP src=0, dst=0, seq=0, ack=0, win=0
IP: s=10.1.2.62 (local), d=10.1.2.206 (Ma 0/0), len 226, sending
TCP src=23, dst=40869, seq=2112994896, ack=606901739, win=8192 ACK PUSH
IP: s=10.1.2.216 (Ma 0/0), d=10.1.2.255, len 78, rcvd
UDP src=0, dst=0
IP: s=10.1.2.62 (local), d=10.1.2.3 (Ma 0/0), len 1500, sending fragment
IP Fragment, Ident = 4741, fragment offset = 0
ICMP type=0, code=0
IP: s=10.1.2.62 (local), d=10.1.2.3 (Ma 0/0), len 1500, sending fragment
IP Fragment, Ident = 4741, fragment offset = 1480
IP: s=40.40.40.40 (local), d=224.0.0.5 (Gi 4/11), len 64, sending broad/
multicast proto=89
IP: s=40.40.40.40 (local), d=224.0.0.6 (Gi 4/11), len 28, sending broad/
multicast proto=2
IP: s=0.0.0.0, d=30.30.30.30, len 100, unroutable
ICMP type=8, code=0
IP: s=0.0.0.0, d=30.30.30.30, len 100, unroutable
ICMP type=8, code=0

```

Table 24-1. debug ip packet Command Example Fields

Field	Description
s=	Lists the source address of the packet and the name of the interface (in parentheses) that received the packet.
d=	Lists the destination address of the packet and the name of the interface (in parentheses) through which the packet is being sent out on the network.
len	Displays the packet's length.
sending rcvd fragment sending broad/multicast proto unroutable	The last part of each line lists the status of the packet.
TCP src=	Displays the source and destination ports, the sequence number, the acknowledgement number, and the window size of the packets in that TCP packets.
UDP src=	Displays the source and destination ports for the UDP packets.
ICMP type=	Displays the ICMP type and code.
IP Fragment	States that it is a fragment and displays the unique number identifying the fragment (Ident) and the offset (in 8-byte units) of this fragment (fragment offset) from the beginning of the original datagram.

Usage Information

Use the count option to stop packets from flooding the user terminal when debugging is turned on.

The access-group option supports only the equal to (eq) operator in TCP ACL rules. Port operators not equal to (neq), greater than (gt), less than (lt), or **range** are not supported in access-group option (Refer to the Example Error Messages below). ARP packets (arp) and Ether-type (ether-type) are also not supported in access-group option. The entire rule is skipped to compose the filter.

The access-group option pertains to:

- IP Protocol Number 0 to 255
- Internet Control Message Protocol* icmp
* but not the ICMP message type (0-255)
- Any Internet Protocol ip
- Transmission Control Protocol* tcp
* but not on the rst, syn, or urg bit
- User Datagram Protocol udp

In the case of ambiguous access control list rules, the debug ip packet access-control command will be disabled. A message appears identifying the error as shown below.

Example (Error Messages)

```

FTOS#debug ip packet access-group test
%Error: port operator GT not supported in access-list debug
%Error: port operator LT not supported in access-list debug
%Error: port operator RANGE not supported in access-list debug
%Error: port operator NEQ not supported in access-list debug

FTOS#00:10:45: %RPM0-P:CP %IPMGR-3-DEBUG IP_PACKET_ACL_AMBIGUOUS_EXP:
Ambiguous rules not supported in access-list debug, access-list debugging is turned
off
FTOS#

```

ip address



Assign a primary and secondary IP address to the interface.

Syntax

ip address *ip-address mask* [secondary]

To delete an IP address from an interface, use the no ip address [*ip-address*] command.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format.
<i>mask</i>	Enter the mask of the IP address in slash prefix format (for example, /24).
<i>secondary</i>	(OPTIONAL) Enter the keyword secondary to designate the IP address as the secondary address.

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

Usage Information

You must be in the INTERFACE mode before you add an IP address to an interface. Assign an IP address to an interface prior to entering the ROUTER OSPF mode.

ip directed-broadcast

C E S

S4810

S4820T

Enables the interface to receive directed broadcast packets.

Syntax

ip directed-broadcast

To disable the interface from receiving directed broadcast packets, enter no ip directed-broadcast.

Defaults

Disabled (that is, the interface does not receive directed broadcast packets)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

ip domain-list

C E S

S4810

S4820T

Configure names to complete unqualified host names.

Syntaxip domain-list *name*

To remove the name, use the no ip domain-list *name* command.

Parameters	<i>name</i> Enter a domain name to be used to complete unqualified names (that is, incomplete domain names that cannot be resolved).
Defaults	Disabled.
Command Modes	CONFIGURATION
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.1.1.0 Introduced on E-Series ExaScale <hr/> Version 7.6.1.0 Introduced on S-Series <hr/> Version 7.5.1.0 Introduced on C-Series <hr/>
Usage Information	<p>Configure the ip domain-list command up to 6 times to configure a list of possible domain names.</p> <p>If both the ip domain-name and ip domain-list commands are configured, the software will try to resolve the name using the ip domain-name command. If the name is not resolved, the software goes through the list of names configured with the ip domain-list command to find a match.</p> <p>Use the following steps to enable dynamic resolution of hosts:</p> <ul style="list-style-type: none"> • specify a domain name server with the ip name-server command. • enable DNS with the ip domain-lookup command. <p>To view current bindings, use the show hosts command. To view DNS related configuration, use the show running-config resolve command.</p>
Related Commands	<hr/> ip domain-name Specify a DNS server. <hr/>

ip domain-lookup



Enable dynamic host-name to address resolution (that is, DNS).

Syntax

ip domain-lookup

To disable DNS lookup, use the no ip domain-lookup.

Defaults

Disabled.

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

Usage Information

To fully enable DNS, also specify one or more domain name servers with the [ip name-server](#) command.

FTOS does not support sending DNS queries over a VLAN. DNS queries are sent out all other interfaces, including the Management port.

To view current bindings, use the [show hosts](#) command.

Related Commands

ip name-server	Specify a DNS server.
show hosts	View current bindings.

ip domain-name

C E S

S4810

S4820T

Configure one domain name for the switch.

Syntax

ip domain-name *name*

To remove the domain name, enter no ip domain-name.

Parameters

<i>name</i>	Enter one domain name to be used to complete unqualified names (that is, incomplete domain names that cannot be resolved).
-------------	--

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series

Usage Information

You can only configure one domain name with the [ip domain-name](#) command. To configure more than one domain name, configure the [ip domain-list](#) command up to 6 times.

Use the following steps to enable dynamic resolution of hosts:

- specify a domain name server with the [ip name-server](#) command.
- enable DNS with the [ip domain-lookup](#) command.

To view current bindings, use the [show hosts](#) command.

Related Commands

ip domain-list	Configure additional names.
--------------------------------	-----------------------------

ip fib download-igp-only

E

Configure the E-Series to download only IGP routes (for example, OSPF) on to line cards. When the command is configured or removed, it clears the routing table (similar to [clear ip route](#) command) and only IGP routes populate the table.

Syntax

ip fib download-igp-only [small-fib]

To return to default setting, use the no ip fib download-igp-only [small-fib] command.

Parameters

small-fib	(OPTIONAL) Enter the keyword <code>small-fib</code> to download a smaller FIB table. This option is useful on line cards with a limited FIB size.
-----------	---

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

ip helper-address

C **E** **S**

S4810

S4820T

Specify the address of a DHCP server so that DHCP broadcast messages can be forwarded when the DHCP server is not on the same subnet as the client.

Syntax

ip helper-address *ip-address* | *default-vrf*

To remove a DHCP server address, enter no ip helper-address.

Parameters	<i>ip-address</i>	Enter an IP address in dotted decimal format (A.B.C.D).
	<i>default-vrf</i>	(Optional) E-Series Only: Enter default-vrf for the DHCP server VRF is using.

Defaults Not configured.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

You can add multiple DHCP servers by entering the [ip helper-address](#) command multiple times. If multiple servers are defined, an incoming request is sent simultaneously to all configured servers and the reply is forwarded to the DHCP client.

FTOS uses standard DHCP ports, that is UDP ports 67 (server) and 68 (client) for DHCP relay services. It listens on port 67 and if it receives a broadcast, the software converts it to unicast, and forwards to it to the DHCP-server with source port=68 and destination port=67.

The server replies with source port=67, destination port=67 and FTOS forwards to the client with source port=67, destination port=68.

ip helper-address hop-count disable

C **E** **S**

S4810

S4820T

Disable the hop-count increment for the DHCP relay agent.

Syntax

ip helper-address hop-count disable

To re-enable the hop-count increment, use the no ip helper-address hop-count disable command.

Defaults

Enabled; the hops field in the DHCP message header is incremented by default

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Added support for S-Series
	Version 7.5.1.0	Added support for C-Series
	Version 6.3.1.0	Introduced for E-Series

Usage Information

This command disables the incrementing of the hops field when boot requests are relayed to a DHCP server through FTOS. If the incoming boot request already has a non-zero hops field, the message will be relayed with the same value for hops. However, the message will be discarded if the hops field exceeds 16, to comply with the relay agent behavior specified in RFC 1542.

Related Commands

ip helper-address	Specify the destination broadcast or host address for DHCP server requests.
show running-config	Display the current configuration and changes from default values.

ip host

C E S

S4810

S4820T

Assign a name and IP address to be used by the host-to-IP address mapping table.

Syntax

`ip host name ip-address`

To remove an IP host, use the `no ip host name [ip-address]` command.

Parameters

<i>name</i>	Enter a text string to associate with one IP address.
<i>ip-address</i>	Enter an IP address, in dotted decimal format, to be mapped to the name.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ip max-frag-count

C E S

S4810

S4820T

Set the maximum number of fragments allowed in one packet for packet re-assembly.

Syntax

ip max-frag-count *count*

To place no limit on the number of fragments allowed, enter no ip max-frag-count.

Parameters

<i>count</i>	Enter a number for the number of fragments allowed for re-assembly. Range: 2 to 256
--------------	--

Defaults

No limit is set on number of fragments allowed.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

To avoid Denial of Service (DOS) attacks, keep the number of fragments allowed for re-assembly low.

ip mtu

E S4810

S4820T

Set the IP MTU (frame size) of the packet transmitted by the RPM for the line card interface. If the packet must be fragmented, FTOS sets the size of the fragmented packets to the size specified in this command.

Syntax

ip mtu *value*

To return to the default IP MTU value, enter no ip mtu.

Parameters

<i>value</i>	Enter the maximum MTU size if the IP packet is fragmented. Default: 1500 bytes Range: 576 to 9234
--------------	---

Defaults

1500 bytes

Command Modes

INTERFACE (Gigabit Ethernet and 10 Gigabit Ethernet interfaces)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

When you enter `no mtu` command, FTOS reduces the `ip mtu` value to 1536 bytes. To return the IP MTU value to the default, enter `no ip mtu`.

You must compensate for Layer 2 header when configuring link MTU on an Ethernet interface or FTOS may not fragment packets. If the packet includes a Layer 2 header, the difference between the link MTU and IP MTU (`ip mtu` command) must be enough bytes to include for the Layer 2 header.

Link MTU and IP MTU considerations for Port Channels and VLANs are as follows.

Port Channels:

All members must have the same link MTU value and the same IP MTU value.

- The Port Channel link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the channel members.

Example: if the members have a link MTU of 2100 and an IP MTU 2000, the Port Channel's MTU values cannot be higher than 2100 for link MTU or 2000 bytes for IP MTU.

VLANs:

- All members of a VLAN must have same IP MTU value.
- Members can have different Link MTU values. Tagged members must have a link MTU 4 bytes higher than untagged members to account for the packet tag.
- The VLAN link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the VLAN members.

Example: The VLAN contains tagged members with Link MTU of 1522 and IP MTU of 1500 and untagged members with Link MTU of 1518 and IP MTU of 1500. The VLAN's Link MTU cannot be higher than 1518 bytes and its IP MTU cannot be higher than 1500 bytes.

Table 24-2. Difference between Link MTU and IP MTU

Layer 2 Overhead	Difference between Link MTU and IP MTU
Ethernet (untagged)	18 bytes
VLAN Tag	22 bytes
Untagged Packet with VLAN-Stack Header	22 bytes
Tagged Packet with VLAN-Stack Header	26 bytes

**Related
Commands**

mtu	Set the link MTU for an Ethernet interface.
---------------------	---

ip name-server

C E S

S4810

S4820T

Enter up to 6 IPv4 addresses of name servers. The order you enter the addresses determines the order of their use.

Syntax

```
ip name-server ipv4-address [ipv4-address2...ipv4-address6]
```

To remove a name server, use the no ip name-server *ip-address* command.

Parameters

<i>ipv4-address</i>	Enter the IPv4 address, in dotted decimal format, of the name server to be used.
<i>ipv4-address2</i> ... <i>ipv4-address6</i>	(OPTIONAL) Enter up five more IPv4 addresses, in dotted decimal format, of name servers to be used. Separate the addresses with a space.

Defaults

No name servers are configured.

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

**Usage
Information**

FTOS does not support sending DNS queries over a VLAN. DNS queries are sent out all other interfaces, including the Management port.

You can separately configure both IPv4 and IPv6 domain name servers.

**Related
Commands**

ipv6 name-server	Configure an IPv6 name server.
----------------------------------	--------------------------------

ip proxy-arp

C E S

Enable Proxy ARP on an interface.

S4810

S4820T

Syntax ip proxy-arp

To disable Proxy ARP, enter no ip proxy-arp.

Defaults Enabled.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

show ip interface	Displays the interface routing status and configuration.
-----------------------------------	--

ip redirects

E

Enable the interface to send ICMP redirect messages.

Syntax ip redirects

To return to default, enter no ip redirects.

Defaults Disabled

Command Modes INTERFACE

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

This command is available for physical interfaces and port-channel interfaces on the E-Series.



Note: This command is not supported on default VLAN ([default vlan-id](#) command).

ip route

C E S

S4810

S4820T

Assign a static route to the switch.

Syntax

```
ip route vrf {vrf instance} destination mask { ip-address | interface [ip-address] }
[distance] [permanent] [tag tag-value]
```

To delete a specific static route, use the `no ip route destination mask { address | interface [ip-address] }` command.

To delete all routes matching a certain route, use the `no ip route destination mask` command.

Parameters

<i>vrf name</i>	(OPTIONAL) E-Series Only: Enter the keyword <code>vrf</code> followed by the VRF Instances name to tie the static route to the VRF instance.
<i>destination</i>	Enter the IP address in dotted decimal format of the destination device.
<i>mask</i>	Enter the mask in slash prefix formation (/x) of the destination device's IP address.
<i>ip-address</i>	Enter the IP address in dotted decimal format of the forwarding router.
<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a loopback interface, enter the keyword <code>loopback</code> followed by a number from zero (0) to 16383. For the null interface, enter the keyword <code>null</code> followed by zero (0). For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>distance</i>	(OPTIONAL) Enter a number as the distance metric assigned to the route. Range: 1 to 255
<i>permanent</i>	(OPTIONAL) Enter the keyword <code>permanent</code> to specify the route is not removed, even if the interface assigned to that route goes down. The route must be up initially to install it in the routing table. If you disable the interface with an IP address associated with the keyword <code>permanent</code> , the route disappears from the routing table.
<i>tag tag-value</i>	(OPTIONAL) Enter the keyword <code>tag</code> followed by a number to assign to the route. Range: 1 to 4294967295

Defaults

Not configured.

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Using the following example of a static route:
 ip route 33.33.33.0 /24 gigabitethernet 0/0 172.31.5.43

- The software installs a next hop that is not on the directly connected subnet but which recursively resolves to a next hop on the interface’s configured subnet. In the example, if gig 0/0 has ip address on subnet 2.2.2.0 and if 172.31.5.43 recursively resolves to 2.2.2.0, FTOS installs the static route.
- When the interface goes down, FTOS withdraws the route.
- When the interface comes up, FTOS re-installs the route.
- When recursive resolution is “broken,” FTOS withdraws the route.
- When recursive resolution is satisfied, FTOS re-installs the route.

Related Commands

show ip route	View the switch routing table.
-------------------------------	--------------------------------

ip source-route

C **E** **S****S4810****S4820T**

Enable FTOS to forward IP packets with source route information in the header.

Syntax

ip source-route

To drop packets with source route information, enter no ip route-source.

Defaults

Enabled.

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale

Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ip unreachable

C E S

S4810

S4820T

Enable the generation of Internet Control Message Protocol (ICMP) unreachable messages.

Syntax ip unreachable

To disable the generation of ICMP messages, enter no ip unreachable.

Defaults Disabled

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced on E-Series

ip vlan-flooding

E

Enable unicast data traffic flooding on VLAN member ports.

Syntax ip vlan-flooding

To disable, use the no ip vlan-flooding command.

Defaults disabled

Command Modes CONFIGURATION


Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series

Usage Information

By default this command is disabled. When enabled, all the Layer 3 unicast routed data traffic going through a VLAN member port is flooded across all the member ports of that VLAN. There might be some ARP table entries which are resolved through ARP packets which had Ethernet MAC SA different from MAC information inside the ARP packet. This unicast data traffic flooding occurs only for those packets which use these ARP entries.

load-balance (C-Series and S-Series)



By default for C-Series and S-Series, FTOS uses an IP 4-tuple (IP SA, IP DA, Source Port, and Destination Port) to distribute IP traffic over members of a Port Channel as well as equal-cost paths. To designate another method to balance traffic over Port Channel members, use the load-balance command.

Syntax

```
load-balance { ip-selection [dest-ip | source-ip]} | { mac [dest-mac | source-dest-mac | source-mac]} | {tcp-udp | ingress-port [enable]}
```

To return to the default setting (IP 4-tuple), use the no version of the command.

Parameters

ip-selection {dest-ip source-ip}	Enter the keywords to distribute IP traffic based on the following criteria: <ul style="list-style-type: none">• dest-ip — Uses destination IP address and destination port fields to hash. The hashing mechanism returns a 3-bit index indicating to which port the packet should be forwarded.• source-ip — Uses source IP address and source port fields to hash. The hashing mechanism returns a 3-bit index indicating to which port the packet should be forwarded.
mac {dest-mac source-dest-mac source-mac}	Enter the keywords to distribute MAC traffic based on the following criteria: <ul style="list-style-type: none">• dest-mac — Uses the destination MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash. The hashing mechanism returns a 3-bit index indicating to which port the packet should be forwarded.• source-dest-mac — Uses the destination and source MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash. The hashing mechanism returns a 3-bit index indicating to which port the packet should be forwarded.• source-mac — Uses the source MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash. The hashing mechanism returns a 3-bit index indicating to which port the packet should be forwarded.
tcp-udp enable	Enter the keywords to distribute traffic based on the following: <ul style="list-style-type: none">• enable — Takes the TCP/UDP source and destination ports into consideration when doing hash computations. (By default, this is enabled)
ingress-port enable	Enter the keywords to distribute traffic based on the following: <ul style="list-style-type: none">• enable — Takes the source port into consideration when doing hash computations. (By default, this is disabled.)

Defaults

IP 4-tuple (IP SA, IP DA, Source Port, Destination Port)

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Added ingress-port parameter for S4820T
Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Added ingress-port parameter for S4810
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Introduced on C-Series

Usage Information

By default, FTOS distributes incoming traffic based on a hash algorithm using the following criteria:

- IP source address
- IP destination address
- TCP/UDP source port
- TCP/UDP destination port

Related Commands

[hash-algorithm ecmp](#)

load-balance (E-Series)

E

By default, for E-Series chassis, FTOS uses an IP 5-tuple to distribute IP traffic over members of a Port Channel as well as equal cost paths. To designate another method to balance traffic over Port Channel members, use the load-balance command.

Syntax

load-balance [ip-selection 3-tuple | ip-selection packet-based] [mac]

To return to the default setting (IP 5-tuple), use one of the following commands:

- no load-balance ip-selection 3-tuple
- no load-balance ip-selection packet-based
- no load-balance mac

Parameters	ip-selection 3-tuple	Enter the keywords ip-selection 3-tuple to distribute IP traffic based on the following criteria: <ul style="list-style-type: none"> • IP source address • IP destination address • IP Protocol type Note: For IPV6, only the first 32 bits (LSB) of IP SA and IP DA are used for hash generation.
	ip-selection packet-based	Enter the keywords ip-selection packet-based to distribute IPV4 traffic based on the IP Identification field in the IPV4 header. This option does <i>not</i> affect IPV6 traffic; that is, IPV6 traffic is not distributed when this command is executed. Note: Hash-based load-balancing on MPLS does not work when packet-based hashing (load-balance ip-selection packet-based) is enabled.
	mac	Enter the keyword mac to distribute traffic based on the following: <ul style="list-style-type: none"> • MAC source address, and • MAC destination address

Defaults IP 5-tuple (IP SA, IP DA, IP Protocol Type, Source Port and Destination Port)

Command Modes CONFIGURATION

Command History	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 6.1.1.0	Introduced for E-Series

Usage Information By default, FTOS distributes incoming traffic based on a hash algorithm using the following criteria:

- IP source address
- IP destination address
- IP Protocol type
- TCP/UDP source port
- TCP/UDP destination port



Note: For IPV6, only the first 32 bits (LSB) of IP Source Address and IP Destination Address are used for hash generation.

The table below lists the load balance command options and how the command combinations effect the distribution of traffic.

Table 24-3. Configurations of the load-balance Command

Configuration	Switched IP Traffic	Routed IP Traffic (IPV4 Only)	Switched Non-IP Traffic
Default (IP 5-tuple)	IP 5-tuple	IP 5-tuple	MAC based
ip-selection 3-tuple	IP 3-tuple	IP 3-tuple	MAC based
mac	MAC based	IP 5-tuple	MAC based

Table 24-3. Configurations of the load-balance Command

Configuration	Switched IP Traffic	Routed IP Traffic (IPv4 Only)	Switched Non-IP Traffic
ip-selection 3-tuple and mac	MAC based	IP 3-tuple	MAC based
ip-selection packet-based	Packet based: IPV4 No distribution: IPV6	Packet based: IPV4	MAC based
ip-selection packet-based and mac	MAC based	Packet based: IPV4	MAC based

Related Commands[ip address](#)

Change the algorithm used to distribute traffic on an E-Series chassis.

management route

C E

S4810

S4820T

Configure a static route that points to the Management interface or a forwarding router.

Syntaxmanagement route { *ipv4-address* | *ipv6-address* } / *mask* { *forwarding-router-address* | managementethernet }**Parameters**

<i>{ ipv4-address ipv6-address } / mask</i>	Enter an IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X), followed by the prefix-length for the IP address of the management interface.
<i>forwarding-router-address</i>	Enter an IPv4 or IPv6 address of a forwarding router.
managementethernet	Enter the keyword managementethernet for the Management interface on the Primary RPM.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv6 management routes.
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

When a static route (or a protocol route) overlaps with Management static route, the static route (or a protocol route) is preferred over the Management Static route. Also, Management static routes and the Management Connected prefix are not reflected in the hardware routing tables. Separate routing tables are maintained for IPv4 and IPv6 management routes. This command manages both tables.

**Related
Commands**

interface ManagementEthernet	Configure the Management port on the system (either the Primary or Standby RPM).
duplex (Management)	Set the mode of the Management interface.
speed (Management interface)	Set the speed for the Management interface.

show arp

C E S

54810

54820T

Display the ARP table.

Syntax

```
show arp [vrf vrf nanometers interface | ip ip-address [mask] | macaddress mac-address [mac-address mask]] [cpu {cp | rp1 | rp2}] [static | dynamic] [summary]
```

Parameters

<i>vrf name</i>	E-Series Only: Show only the ARP cache entries tied to the VRF process.
cpu	(OPTIONAL) Enter the keyword <code>cpu</code> with one of the following keywords to view ARP entries on that CPU: <ul style="list-style-type: none"> • <code>cp</code> - view ARP entries on the control processor. • <code>rp1</code> - view ARP entries on Routing Processor 1. • <code>rp2</code> - view ARP entries on Routing Processor 2.
interface <i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. • For the Management interface, enter the keyword <code>managementethernet</code> followed by the slot/port information. • For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. • For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. • For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
ip <i>ip-address mask</i>	(OPTIONAL) Enter the keyword <code>ip</code> followed by an IP address in the dotted decimal format. Enter the optional IP address mask in the slash prefix format (/x).
macaddress <i>mac-address mask</i>	(OPTIONAL) Enter the keyword <code>macaddress</code> followed by a MAC address in nn:nn:nn:nn:nn:nn format. Enter the optional MAC address mask in nn:nn:nn:nn:nn format also.
static	(OPTIONAL) Enter the keyword <code>static</code> to view entries entered manually.

Command Modes

dynamic	(OPTIONAL) Enter the keyword dynamic to view dynamic entries.
summary	(OPTIONAL) Enter the keyword summary to view a summary of ARP entries.

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Support 4094 VLANs on E-Series ExaScale (prior limit was 2094)
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.8.1.0	Augmented to display local ARP entries learned from private VLANs (PVLANS)
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

The following figure shows two VLANs that are associated with a private VLAN ([Private VLAN \(PVLAN\)](#)), a feature added for C-Series and S-Series in FTOS 7.8.1.0.

Example

FTOS>show arp

Protocol	Address	Age (min)	Hardware Address	Interface	VLAN	CPU
Internet	192.2.1.254	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.253	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.252	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.251	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.250	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.251	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.250	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.249	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.248	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.247	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.246	1	00:00:c0:02:01:02	Gi 9/13	-	CP
Internet	192.2.1.245	1	00:00:c0:02:01:02	Gi 9/13	-	CP

Example (Private VLAN Data)

FTOS#show arp

Protocol	Address	Age (min)	Hardware Address	Interface	VLAN	CPU
Internet	5.5.5.1	-	00:01:e8:43:96:5e	-	Vl 10	pv
Internet	5.5.5.10	-	00:01:e8:44:99:55	-	Vl 10	
Internet	10.1.2.4	1	00:01:e8:d5:9e:e2	Ma 0/0	-	
Internet	10.10.10.4	1	00:01:e8:d5:9e:e2	Ma 0/0	-	
Internet	10.16.127.53	1	00:01:e8:d5:9e:e2	Ma 0/0	-	
Internet	10.16.134.254	20	00:01:e8:d5:9e:e2	Ma 0/0	-	
Internet	133.33.33.4	1	00:01:e8:d5:9e:e2	Ma 0/0	-	

**Example
(show arp cpu
cp)**

```
FTOS#sho arp cpu cp

Protocol      Address          Age (min)  Hardware Address  Interface  VLAN  CPU
-----
Internet     10.1.2.206      0          00:a0:80:00:15:b8  Ma 0/0    -     CP
Internet     182.16.1.20     0          00:30:19:24:2d:70  Gi 8/0    -     CP
Internet     100.10.10.10    0          00:30:19:4f:d3:80  Gi 8/12   -     CP
Internet     10.1.2.209      12         00:a0:80:00:12:6c  Ma 0/0    -     CP
FTOS#
```

Table 24-4. show arp Command Example Fields

Row Heading	Description
Protocol	Displays the protocol type.
Address	Displays the IP address of the ARP entry.
Age(min)	Displays the age in minutes of the ARP entry.
Hardware Address	Displays the MAC address associated with the ARP entry.
Interface	Displays the first two letters of the interfaces type and the slot/port associated with the ARP entry.
VLAN	Displays the VLAN ID, if any, associated with the ARP entry.
CPU	Lists which CPU the entries are stored on.

**Example
(show arp
summary)**

```
FTOS#show arp summary

Total Entries   Static Entries   Dynamic Entries   CPU
-----
83              0                83                CP
FTOS
```

Table 24-5. show arp summary Command Example Fields

Row Heading	Description
Total Entries	Lists the total number of ARP entries in the ARP table.
Static Entries	Lists the total number of configured or static ARP entries.
Dynamic Entries	Lists the total number of learned or dynamic ARP entries.
CPU	Lists which CPU the entries are stored on.

**Related
Commands**

ip local-proxy-arp	Enable/disable Layer 3 communication in secondary VLANs.
switchport mode private-vlan	Set the PVLAN mode of the selected port.

show arp retries

C **E** **S**

S4810

S4820T

Syntax

Display the configured number of ARP retries.

show arp retries

Command Modes EXEC
EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.1.0	Introduced

Related Commands	arp retries	Set the number of ARP retries in case the system does not receive an ARP reply in response to an ARP request.
-------------------------	-----------------------------	---

show hosts

C **E** **S**

S4810

S4820T

View the host table and DNS configuration.

Syntax show hosts

Command Modes EXEC
EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show hosts
Default domain is not set
Name/address lookup uses static mappings
Name servers are not set
Host                Flags      TTL      Type      Address
-----
ks                  (perm, OK) -      IP      2.2.2.2
4200-1              (perm, OK) -      IP      192.68.69.2
1230-3              (perm, OK) -      IP      192.68.99.2
ZZr                 (perm, OK) -      IP      192.71.18.2
Z10-3               (perm, OK) -      IP      192.71.23.1
FTOS#
```



Table 24-6. show hosts Command Example Fields

Field	Description
Default domain...	Displays the domain name (if configured).
Name/address lookup...	States if DNS is enabled on the system. If DNS is enabled, the Name/Address lookup is domain service. If DNS is not enabled, the Name/Address lookup is static mapping.
Name servers are...	Lists the name servers, if configured.
Host	Displays the host name assigned to the IP address.
Flags	Classifies the entry as one of the following: <ul style="list-style-type: none"> • perm - the entry was manually configured and will not time out • temp - the entry was learned and will time out after 72 hours of inactivity. Also included in the flag is an indication of the validity of the route: <ul style="list-style-type: none"> • ok - the entry is valid. • ex - the entry expired. • ?? - the entry is suspect.
TTL	Displays the amount of time until the entry ages out of the cache. For dynamically learnt entries only.
Type	Displays IP as the type of entry.
Address	Displays the IP address(es) assigned to the host.

Related Commands

traceroute	View DNS resolution
ip host	Configure a host.

show ip cam linecard



View CAM entries for a port pipe on a line card.

Syntax

```
show ip cam linecard number port-set pipe-number [ip-address mask [longer-prefixes] |
index index-number | summary | vrf vrf instance]
```

Parameters

<i>number</i>	Enter the number of the line card. Range: 0 to 13 on a E1200/1200i, 0 to 6 on a E600600i, and 0 to 5 on a E300.
<i>pipe-number</i>	Enter the number of the line card's port-pipe. Range: 0 to 1
<i>ip-address mask</i> [<i>longer-prefix</i>]	(OPTIONAL) Enter the IP address and mask of a route to CAM entries for that route only. Enter the keyword <i>longer-prefixes</i> to view routes with a common prefix.
index <i>index-number</i>	(OPTIONAL) Enter the keyword <i>index</i> followed by the CAM index number. Range: depends on CAM size

Command Modes

summary	(OPTIONAL) Enter the keyword summary to view a table listing route prefixes and the total number of routes that can be entered into the CAM.
vrf instance	(OPTIONAL) E-Series Only: Enter the keyword vrf followed by the VRF Instance name to show CAM information as it applies to that VRF instance.

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.2	E-Series ExaScale E600i supported
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip cam linecard 13 port-set 0
```

Index	Destination	EC	CG	V	C	Next-Hop	VIId	Mac-Addr	Port
3276	6.6.6.2	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c1 CP
3277	5.5.5.2	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c1 CP
3278	4.4.4.2	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c1 CP
3279	3.3.3.2	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c1 CP
3280	2.2.2.2	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c1 CP
11144	6.6.6.0	0	0	1	1	0.0.0.0	6	00:00:00:00:00:00	17c5 RP2
11145	5.5.5.0	0	0	1	1	0.0.0.0	5	00:00:00:00:00:00	17c5 RP2
11146	4.4.4.0	0	0	1	1	0.0.0.0	4	00:00:00:00:00:00	17c5 RP2
11147	3.3.3.0	0	0	1	1	0.0.0.0	3	00:00:00:00:00:00	17c5 RP2
11148	2.2.2.0	0	0	1	1	0.0.0.0	2	00:00:00:00:00:00	17c5 RP2
65535	0.0.0.0	0	0	1	1	0.0.0.0	0	00:00:00:00:00:00	17c5 RP2

FTOS#

Table 24-7. show ip cam Command Example Fields

Field	Description
Index	Displays the CAM index number of the entry.
Destination	Displays the destination route of the index.
EC	Displays the number of equal cost multipaths (ECMP) available for the default route for non-Jumbo line cards. Displays 0,1 when ECMP is more than 8, for Jumbo line cards.
CG	Displays 0.
V	Displays a 1 if the entry is valid and a 0 if the entry is for a line card with Catalog number beginning with LC-EF.
C	Displays the CPU bit. 1 indicates that a packet hitting this entry is forwarded to the CP or RP2, depending on Egress port.
Next-Hop	Displays the next hop IP address of the entry.
VIId	Displays the VLAN ID. If the entry is 0, the entry is not part of a VLAN.

Table 24-7. show ip cam Command Example Fields (continued)

Field	Description
Mac Addr	Displays the next-hop router's MAC address.
Port	Displays the egress interface. Use the second half of the entry to determine the interface. For example, in the entry 17cl CP, the CP is the pertinent portion. CP = control processor RP2 = route processor 2 Gi = Gigabit Ethernet interface So = SONET interface Te = 10 Gigabit Ethernet interface

**Example
(show ip cam
summary)**

```
FTOS#show ip cam linecard 4 port-set 0 summary
Total Number of Routes in the CAM is 13
Total Number of Routes which can be entered in CAM is 131072
```

```
Prefix Len Current Use Initial Sz
-----
 32                7    37994
 31                0     1312
 30                0     3932
 29                0     1312
 28                0     1312
 27                0     1312
 26                0     1312
 25                0     1312
 24                6    40610
 23                0     3932
 22                0     2622
 21                0     2622
 20                0     2622
 19                0     2622
 18                0     1312
 17                0     1312
 16                0     3932
 15                0     1312
 14                0     1312
 13                0     1312
 12                0     1312
 11                0     1312
 10                0     1312
  9                0     1312
  8                0     1312
  7                0     1312
  6                0     1312
  5                0     1312
  4                0     1312
  3                0     1312
  2                0     1312
  1                0     1312
  0                0         8
FTOS#
```

Table 24-8. show ip cam summary Command Example Fields

Field	Description
Prefix Length	Displays the prefix-length or mask for the IP address configured on the linecard 0 port pipe 0.
Current Use	Displays the number of routes currently configured for the corresponding prefix or mask on the linecard 0 port pipe 0.
Initial Size	Displays the CAM size allocated by FTOS for the corresponding mask. The CAM size is adjusted by FTOS if the number of routes for the mask exceeds the initial allocation.

show ip cam stack-unit

S **S4810**

Display content-addressable memory (CAM) entries for an S-Series switch.

S4820T

Syntax

```
show ip cam stack-unit 0-7 port-set pipe-number [ip-address mask [longer-prefixes] |
detail | member-info | summary]
```

Parameters

<i>0-7</i>	Enter the stack-unit ID, from 0 to 7.
<i>pipe-number</i>	Enter the number of the Port-Pipe number. S50n, S50V range: 0 to 1; S25N, S25P, S25V range: 0 to 0
<i>ip-address mask</i> [longer-prefix]	(OPTIONAL) Enter the IP address and mask of a route to CAM entries for that route only. Enter the keyword longer-prefixes to view routes with a common prefix.
<i>detail</i>	Enter the keyword detail to display the group index ID used by the ecmp routes in the CAM.
<i>member-info</i>	Enter the keyword member-info to display the group index used by the ecmp, the number of egress ports (members) for the ecmp, and the port details of each member. The detail information under member-info will give the MAC address, VLAN ID and gateway of every member port of the ecmp.
<i>summary</i>	(OPTIONAL) Enter the keyword summary to view a table listing route prefixes and the total number routes which can be entered in to CAM.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 7.7.1.0	Modified: Added support for up to seven stack members.
Version 7.6.1.0	Introduced on S-Series

Example

```
FTOS#show ip cam stack-unit 0 port-set 0 10.10.10.10/32 longer-prefixes
```

```
Destination      EC CG V C  VId      Mac-Addr      Port
```

```
-----
10.10.10.10      0 0 1 1      0 00:00:00:00:00:00  3f01  CP
FTOS#
```

Table 24-9. show ip cam Command Example Fields

Field	Description
Destination	Displays the destination route of the index.
EC	Displays the number of equal cost multipaths (ECMP) available for the default route for non-Jumbo line cards. Displays 0,1 when ECMP is more than 8, for Jumbo line cards.
CG	Displays 0.
V	Displays a 1 if the entry is valid and a 0 otherwise.
C	Displays the CPU bit. 1 indicates that a packet hitting this entry is forwarded to the control processor, depending on Egress port.
V Id	Displays the VLAN ID. If the entry is 0, the entry is not part of a VLAN.
Mac Addr	Displays the next-hop router's MAC address.
Port	Displays the egress interface. Use the second half of the entry to determine the interface. For example, in the entry 17cl CP, the CP is the pertinent portion. CP = control processor Gi = Gigabit Ethernet interface Te = 10 Gigabit Ethernet interface


Example
(show ip cam
stack-unit
ecmp-group detail)

```
FTOS#show ip cam stack-unit 0 po 0 ecmp-group detail
Destination      EC CG V C  Vid      Mac-Addr      Port      ECMP Group-Index
-----
1.1.1.2          0 0 1 0      0 00:01:e8:8a:d6:58  0004 Te 0/3      -
2.1.1.2          0 0 1 0      0 00:01:e8:8a:d6:58  0009 Te 0/8      -
1.1.1.1          0 0 1 1      0 00:00:00:00:00:00  3f01  CP           -
2.1.1.1          0 0 1 1      0 00:00:00:00:00:00  3f01  CP           -
1.1.1.0          0 0 1 1      0 00:00:00:00:00:00  3f01  CP           -
2.1.1.0          0 0 1 1      0 00:00:00:00:00:00  3f01  CP           -
100.1.1.0        1 0 1 0      0 00:01:e8:8a:d6:58  0004 Te 0/3      0
100.1.1.0        1 0 1 0      0 00:01:e8:8a:d6:58  0009 Te 0/8      0
0.0.0.0          0 0 1 1      0 00:00:00:00:00:00  3f01  CP           -
FTOS#
```

Example
(show ip cam
stack-unit
ecmp-group
member-info detail)

```
FTOS#show ip cam stack-unit 0 po 0 ecmp-group member-info detail
Group Index      Member Count      Mac-Addr      Port      Vlan ID      Gateway
-----
0                2                00:01:e8:8a:d6:58  Te 0/3      0            1.1.1.2
                00:01:e8:8a:d6:58  Te 0/8      0            2.1.1.2
FTOS#
```

show ip fib linecard



View all Forwarding Information Base (FIB) entries.

Syntax

show ip fib linecard *slot-number* [*vrf vrf instance* | *ip-address/prefix-list* | summary]

Parameters

<i>vrf instance</i>	(OPTIONAL) E-Series Only: Enter the keyword <i>vrf</i> followed by the VRF Instance name to show the FIB cache entries tied to that VRF instance.
<i>slot-number</i>	Enter the number of the line card slot. C-Series Range: 0 to 7 E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, 0 to 5 on a E300
<i>ip-address mask</i>	(OPTIONAL) Enter the IP address of the network destination to view only information on that destination. You must enter the IP address is dotted decimal format (A.B.C.D). You must enter the mask in slash prefix format (/X).
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <i>longer-prefixes</i> to view all routes with a common prefix.
<i>summary</i>	(OPTIONAL) Enter the keyword <i>summary</i> to view the total number of prefixes in the FIB.

Command Mode

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS>show ip fib linecard 12
```

Port	Destination Vid Index EC	Gateway	First-Hop	Mac-Addr
00:01:e8:00:03:ff	3.0.0.0/8 So 2/8	0 via 100.10.10.10, So 2/8 60260 0	100.10.10.10	
	3.0.0.0/8	0 via 101.10.10.10, So 2/9 11144 0	0.0.0.0	
00:00:00:00:00:00	100.10.10.0/24 CP	0 Direct So 2/8 11144 0	0.0.0.0	
00:00:00:00:00:00	100.10.10.1/32 CP	0 via 127.0.0.1 3276 0	127.0.0.1	
00:01:e8:00:03:ff	100.10.10.10/32 So 2/8	0 via 100.10.10.10, So 2/8 0 0	100.10.10.10	
00:00:00:00:00:00	101.10.10.0/24 RP2	0 Direct So 2/9 11145 0	0.0.0.0	
00:00:00:00:00:00	101.10.10.1/32 CP	0 via 127.0.0.1 3277 0	127.0.0.1	
00:01:e8:01:62:32	101.10.10.10/32 So 2/9	0 via 101.10.10.10, So 2/9 1 0	101.10.10.10	

```
FTOS>
```

Table 24-10. show ip fib linecard Command Example Fields

Field	Description
Destination	Lists the destination IP address.
Gateway	Displays either the word <code>direct</code> and an interface for a directly connected route or the remote IP address to be used to forward the traffic.
First-Hop	Displays the first hop IP address.
Mac-Addr	Displays the MAC address.
Port	Displays the egress-port information.
VId	Displays the VLAN ID. If no VLAN is assigned, zero (0) is listed.
Index	Displays the internal interface number.
EC	Displays the number of ECMP paths.

**Related
Commands**

[clear ip fib linecard](#) Clear FIB entries on a specified line card.

show ip fib stack-unit

S **S4810**

View all Forwarding Information Base (FIB) entries.

S4820T

Syntax

`show ip fib stack-unit 0-7 [ip-address [mask] [longer-prefixes] | summary]`

Parameters

<i>0-7</i>	Enter the S-Series stack unit ID, from 0 to 7.
<i>ip-address mask</i>	(OPTIONAL) Enter the IP address of the network destination to view only information on that destination. Enter the IP address in dotted decimal format (A.B.C.D). You must enter the mask in slash prefix format (/X).
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <code>longer-prefixes</code> to view all routes with a common prefix.
<i>summary</i>	(OPTIONAL) Enter the keyword <code>summary</code> to view the total number of prefixes in the FIB.

Command Mode

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Modified: Added support for up to seven stack members.
Version 7.6.1.0	Introduced on S-Series

Example

```
FTOS#show ip fib stack-unit 0
```

```

          Destination          Gateway          First-Hop          Mac-Addr          Port          Vid          EC
-----
00:00:00:00:00:00 BLK HOLE Direct, Nu 0          0.0.0.0

FTOS>

```

Table 24-11. show ip fib linecard Command Example Fields

Field	Description
Destination	Lists the destination IP address.
Gateway	Displays either the word <code>Direct</code> and an interface for a directly connected route or the remote IP address to be used to forward the traffic.
First-Hop	Displays the first hop IP address.
Mac-Addr	Displays the MAC address.
Port	Displays the egress-port information.
Vid	Displays the VLAN ID. If no VLAN is assigned, zero (0) is listed.
EC	Displays the number of ECMP paths.

Related Commands

[clear ip fib linecard](#) Clear FIB entries on a specified line card.

show ip flow

C **E** **S**

S4810

S4820T

Show how a Layer 3 packet is forwarded when it arrives at a particular interface.

Syntax

```
show ip flow interface [vrf vrf instance] interface { source-ip address destination-ip address } { protocol number [tcp | udp] | icmp } { src-port number destination-port number }
```

Parameters

<i>vrf instance</i>	E-Series Only: Show only the L3 flow as they apply to that VRF process.
<i>interface interface</i>	Enter the keyword <code>interface</code> followed by one of the following interface keywords. <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword <code>FastEthernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. (OPTIONAL) Enter an <code>in</code> or <code>out</code> parameter in conjunction with the optional interface:

source-ip <i>address</i>	Enter the keyword source-ip followed by the IP source address in IP address format.
destination-ip <i>address</i>	Enter the keyword destination-ip followed by the IP destination address in IP address format.
protocol <i>number</i> [tcp udp] icmp	E-Series only: Enter the keyword protocol followed by one of the protocol type keywords: tcp, udp, icmp or protocol <i>number</i>
src-port <i>number</i>	Enter the keyword src-port followed by the source port number.
destination-port <i>number</i>	Enter the keyword destination-port followed by the destination port number.

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.0	Introduced on S4810
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

This command provides egress port information for a given IP flow. This is useful in identifying which interface the packet will follow in the case of Port-channel and Equal Cost Multi Paths. Use this command for routed packets only. For switched packets use the [show port-channel-flow](#) command.

show ip flow does not compute the egress port information when load-balance mac hashing is also configured due to insufficient information (the egress MAC is not available).

S-Series produces the following error message:

```
Message 1 %Error: Unable to read IP route table
```

C-Series produces the message:

```
%Error: FIB cannot compute the egress port with the current trunk hash setting.
```

Example (E-Series)

```
FTOS#show ip flow interface Gi 1/8 189.1.1.1 63.0.0.1 protocol tcp source-port
7898 destination-port 8976

flow: 189.1.1.1 63.0.0.1 protocol 6 7868 8976
Ingress interface: Gi 1/20
Egress interface: Gi 1/14 to 1.7.1.2[CAM hit 103710] unfragmented packet
Gi 1/10 to 1.2.1.2[CAM hit 103710] fragmented packet
```

show ip interface

C E S

S4810

S4820T

View IP-related information on all interfaces.

Syntax

show ip interface [*interface* | brief | linecard *slot-number*] [configuration]

Parameter

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword Loopback followed by a number from 0 to 16383. For the Management interface, enter the keyword ManagementEthernet followed by zero (0). For the Null interface, enter the keyword null followed by zero (0). For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
brief	(OPTIONAL) Enter the keyword brief to view a brief summary of the interfaces and whether an IP address is assigned.
linecard <i>slot-number</i>	(OPTIONAL) Enter the keyword linecard followed by the number of the line card slot. <ul style="list-style-type: none"> C-Series Range: 0-7 E-Series Range: 0 to 13 on a E1200/1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300 Note: This keyword is not available on the S-Series.
configuration	(OPTIONAL) Enter the keyword configuration to display the physical interfaces with non-default configurations only.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.2	Supported on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#show ip int te 0/0
TenGigabitEthernet 0/0 is down, line protocol is down
Internet address is not set
IP MTU is 1500 bytes
Inbound access list is not set
Proxy ARP is enabled
Split Horizon is enabled
Poison Reverse is disabled
ICMP redirects are not sent
ICMP unreachable are not sent

FTOS#

```

Table 24-12. show ip interface Command Example Items

Lines	Description
TenGigabitEthernet 0/0...	Displays the interface's type, slot/port and physical and line protocol status.
Internet address...	States whether an IP address is assigned to the interface. If one is, that address is displayed.
IP MTU is...	Displays IP MTU value.
Inbound access...	Displays the name of the any configured incoming access list. If none is configured, the phrase "not set" is displayed.
Proxy ARP...	States whether proxy ARP is enabled on the interface.
Split horizon...	States whether split horizon for RIP is enabled on the interface.
Poison Reverse...	States whether poison for RIP is enabled on the interface
ICMP redirects...	States if ICMP redirects are sent.
ICMP unreachable...	States if ICMP unreachable messages are sent.

**Example
(show ip
interface brief)**

```

FTOS#show ip int brief
Interface      IP-Address      OK? Method Status      Protocol
GigabitEthernet 1/0      unassigned      NO  Manual administratively down down
GigabitEthernet 1/1      unassigned      NO  Manual administratively down down
GigabitEthernet 1/2      unassigned      YES Manual up          up
GigabitEthernet 1/3      unassigned      YES Manual up          up
GigabitEthernet 1/4      unassigned      YES Manual up          up
GigabitEthernet 1/5      10.10.10.1     YES Manual up          up
GigabitEthernet 1/6      unassigned      NO  Manual administratively down down

```

Table 24-13. show ip interface brief Column Headings

Field	Description
Interface	Displays type of interface and the associated slot and port number.
IP-Address	Displays the IP address for the interface, if configured.
Ok?	Indicates if the hardware is functioning properly.
Method	Displays Manual if the configuration is read from the saved configuration.

Table 24-13. show ip interface brief Column Headings (continued)

Field	Description
Status	States whether the interface is enabled (up) or disabled (administratively down).
Protocol	States whether IP is enabled (up) or disabled (down) on the interface.

show ip management-route

C E

S4810

S4820T

View the IP addresses assigned to the Management interface.

Syntax

show ip management-route [all | connected | summary | static]

Parameters

all	(OPTIONAL) Enter the keyword all to view all IP addresses assigned to all Management interfaces on the switch.
connected	(OPTIONAL) Enter the keyword connected to view only routes directly connected to the Management interface.
summary	(OPTIONAL) Enter the keyword summary to view a table listing the number of active and non-active routes and their sources.
static	(OPTIONAL) Enter the keyword static to view non-active routes also.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip management-route

Destination      Gateway          State
-----
10.1.2.0/24      ManagementEthernet 0/0    Connected
172.16.1.0/24    10.1.2.4        Active

FTOS#
```

show ipv6 management-route

C E S4810
S4820T

Display the IPv6 static routes configured for the management interface.

Syntax show ipv6 management-route [all | connected | summary | static]

Parameters

all	Enter the keyword all to view all IP addresses assigned to all Management interfaces on the switch.
connected	Enter the keyword connected to view only routes directly connected to the Management interface.
summary	Enter the keyword summary to view a table listing the number of active and non-active routes and their sources.
static	Enter the keyword static to view non-active routes also.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Introduced on C- and E-Series
Version 8.3.7.0	Introduced on S4810

Example

```
FTOS#show ipv6 management-route
IPv6 Destination          Gateway          State
-----
2001:34::0/64             ManagementEthernet 0/0    Connected
2001:68::0/64             2001:34::16     Active
FTOS#
```

show ip protocols

C E S
S4810
S4820T

View information on all routing protocols enabled and active on the switch.

Syntax show ip protocols

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Regular evaluation optimization enabled/disabled added to display output
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#show ip protocols
Routing Protocol is "bgp 1"
Cluster Id is set to 20.20.20.3
Router Id is set to 20.20.20.3
Fast-external-fallover enabled
Regular expression evaluation optimization enabled
Capable of ROUTE_REFRESH
For Address Family IPv4 Unicast
  BGP table version is 0, main routing table version 0
  Distance: external 20 internal 200 local 200
  Neighbor(s):
    Address : 20.20.20.2
    Filter-list in : foo
    Route-map in : foo
    Weight : 0
    Address : 5::6
    Weight : 0
FTOS#

```

show ip route

C E S

S4810

S4820T

View information, including how they were learned, about the IP routes on the switch.

Syntax

```
show ip route [vrf [vrf name] hostname] ip-address [mask] [longer-prefixes] | list
prefix-list | protocol [process-id | routing-tag] | all | connected | static | summary]
```

Parameter

<i>vrf name</i>	E-Series Only: Clear only the route entries tied to the VRF process.
<i>ip-address</i>	(OPTIONAL) Specify a name of a device or the IP address of the device to view more detailed information about the route.
<i>mask</i>	(OPTIONAL) Specify the network mask of the route. Use this parameter with the IP address parameter.
longer-prefixes	(OPTIONAL) Enter the keyword longer-prefixes to view all routes with a common prefix.
list <i>prefix-list</i>	(OPTIONAL) Enter the keyword list and the name of a configured prefix list. Refer to show ip route list .
<i>protocol</i>	(OPTIONAL) Enter the name of a routing protocol (bgp, isis, ospf, rip) or the keywords connected or static. bgp, isis, ospf, rip are E-Series-only options. If you enter bgp, you can include the BGP <i>as-number</i> . (E-Series only) If you enter isis, you can include the ISIS <i>routing-tag</i> . (E-Series only) If you enter ospf, you can include the OSPF <i>process-id</i> .
<i>process-id</i>	(OPTIONAL) Specify that only OSPF routes with a certain process ID must be displayed.
<i>routing-tag</i>	(OPTIONAL) Specify that only ISIS routes with a certain routing tag must be displayed.
connected	(OPTIONAL) Enter the keyword connected to view only the directly connected routes.
all	(OPTIONAL) Enter the keyword all to view both active and non-active routes.

static	(OPTIONAL) Enter the keyword static to view only routes configured by the ip route command.
summary	(OPTIONAL) Enter the keyword summary . Refer to show ip route summary .

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.9.1.0	Introduced VRF on the E-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip route all

Codes: C - connected, S - static, R - RIP
       B - BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated
       O - OSPF, IA - OSPF inter area N1 - OSPF NSSA external type 1
       N2 - OSPF NSSA external type 2, E1 - OSPF external type 1
       E2 - OSPF external type 2, i - IS-IS, L1 - IS-IS level-1
       L2 - IS-IS level-2, IA - IS-IS inter area, * - candidate default
       > - non-active route + - summary route

Gateway of last resort is not set

      Destination            Gateway                      Dist/Metric Last Change
      -----
R      3.0.0.0/8             via 100.10.10.10, So 2/8      120/1      00:07:12
                        via 101.10.10.10, So 2/9
C      100.10.10.0/24        Direct, So 2/8                0/0        00:08:54
> R    100.10.10.0/24        Direct, So 2/8                120/0      00:08:54
C      101.10.10.0/24        Direct, So 2/9                0/0        00:09:15
> R    101.10.10.0/24        Direct, So 2/9                120/0      00:09:15
FTOS#
```

**Example
(show ip route
summary & show
ip static route)**

```
FTOS#show ip route summary

Route Source           Active Routes  Non-active Routes
connected              2              0
static                 1              0
Total                  3              0
Total 3 active route(s) using 612 bytes
R1_E600i>show ip route static ?
|                       Pipe through a command
<cr>
R1_E600i>show ip route static

      Destination            Gateway                      Dist/Metric Last Change
      -----
*S    0.0.0.0/0              via 10.10.91.9, Gi 1/2      1/0        3d2h
FTOS>
```

Table 24-14. show ip route all Command Example Fields

Field	Description
(undefined)	Identifies the type of route: <ul style="list-style-type: none"> • C = connected • S = static • R = RIP • B = BGP • IN = internal BGP • EX = external BGP • LO = Locally Originated • O = OSPF • IA = OSPF inter area • N1 = OSPF NSSA external type 1 • N2 = OSPF NSSA external type 2 • E1 = OSPF external type 1 • E2 = OSPF external type 2 • i = IS-IS • L1 = IS-IS level-1 • L2 = IS-IS level-2 • IA = IS-IS inter-area • * = candidate default • > = non-active route • + = summary routes
Destination	Identifies the route's destination IP address.
Gateway	Identifies whether the route is directly connected and on which interface the route is configured.
Dist/Metric	Identifies if the route has a specified distance or metric.
Last Change	Identifies when the route was last changed or configured.

show ip route list

C **E** **S**

Display IP routes in an IP prefix list.

S4810

S4820T

Syntax

show ip route list *prefix-list*

Parameters

<i>prefix-list</i>	Enter the name of a configured prefix list.
--------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

ip prefix-list	Enter the CONFIGURATION-IP PREFIX-LIST mode and configure a prefix list.
show ip prefix-list summary	Display a summary of the configured prefix lists.

Example

```
FTOS#show ip route list test

Codes: C - connected, S - static, R - RIP,
       B - BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated,
       O - OSPF, IA - OSPF inter area, N1 - OSPF NSSA external type 1,
       N2 - OSPF NSSA external type 2, E1 - OSPF external type 1,
       E2 - OSPF external type 2, i - IS-IS, L1 - IS-IS level-1,
       L2 - IS-IS level-2, IA - IS-IS inter area, * - candidate default,
       > - non-active route, + - summary route

Gateway of last resort is not set

          Destination                Gateway                               Dist/Metric  Last Change
          -----                -
R        2.1.0.0/24                via 2.1.4.1, Gi 4/43                 120/2        3d0h
R        2.1.1.0/24                via 2.1.4.1, Gi 4/43                 120/2        3d1h
R        2.1.2.0/24                via 2.1.4.1, Gi 4/43                 120/1        3d0h
R        2.1.3.0/24                via 2.1.4.1, Gi 4/43                 120/1        3d1h
C        2.1.4.0/24                Direct, Gi 4/43                       0/0         3d1h
```

show ip route summary

C **E** **S**

View a table summarizing the IP routes in the switch.

S4810

S4820T

Syntax

show ip route summary

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS>show ip route summary

Route Source      Active Routes  Non-active Routes
```

```

connected      17          0
static         3          0
ospf 100      1368       2
  Intra-area: 762 Inter-area: 1 External-1: 600 External-2: 5
Total          1388       2
Total 1388 active route(s) using 222440 bytes
Total 2 non-active route(s) using 128 bytes
FTOS>

```

Table 24-15. show ip route summary Column Headings

Column Heading	Description
Route Source	Identifies how the route is configured in FTOS.
Active Routes	Identifies the best route if a route is learned from two protocol sources.
Non-active Routes	Identifies the back-up routes when a route is learned by two different protocols. If the best route or active route goes down, the non-active route will become the best route.
ospf 100	If routing protocols (OSPF, RIP) are configured and routes are advertised, then information on those routes is displayed.
Total 1388 active...	Displays the number of active and non-active routes and the memory usage of those routes. If there are no routes configured in the FTOS, this line does not appear.

Related Commands[show ip route](#)

Display information about the routes found in switch.

show ip traffic

C E S

S4810

S4820T

View IP, ICMP, UDP, TCP and ARP traffic statistics.

Syntax

show ip traffic [all | cp | rp1 | rp2]

Note: These options are supported only on the E-Series.**Parameters**

all	(OPTIONAL) Enter the keyword all to view statistics from all processors. If you do not enter a keyword, you also view all statistics from all processors.
cp	(OPTIONAL) Enter the cp to view only statistics from the Control Processor.
rp1	(OPTIONAL) Enter the keyword rp1 to view only the statistics from Route Processor 1.
rp2	(OPTIONAL) Enter the keyword rp2 to view only the statistics from Route Processor 2.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.5.1.0	F10 Monitoring MIB available for ip traffic statistics
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#show ip traffic
Control Processor IP Traffic:

IP statistics:
Rcvd: 23857 total, 23829 local destination
    0 format errors, 0 checksum errors, 0 bad hop count
    0 unknown protocol, 0 not a gateway
    0 security failures, 0 bad options
Frgs: 0 reassembled, 0 timeouts, 0 too big
    0 fragmented, 0 couldn't fragment
Bcast: 28 received, 0 sent; Mcast: 0 received, 0 sent
Sent: 16048 generated, 0 forwarded
    21 encapsulation failed, 0 no route
ICMP statistics:
Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 0 unreachable
    0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
    0 parameter, 0 timestamp, 0 info request, 0 other
Sent: 0 redirects, 0 unreachable, 0 echo, 0 echo reply
    0 mask requests, 0 mask replies, 0 quench, 0 timestamp
    0 info reply, 0 time exceeded, 0 parameter problem
UDP statistics:
Rcvd: 0 total, 0 checksum errors, 0 no port
    0 short packets, 0 bad length, 0 no port broadcasts, 0 socket full
Sent: 0 total, 0 forwarded broadcasts
TCP statistics:
Rcvd: 23829 total, 0 checksum errors, 0 no port
Sent: 16048 total
ARP statistics:
Rcvd: 156 requests, 11 replies
Sent: 21 requests, 10 replies (0 proxy)
Routing Processor1 IP Traffic:

```

Table 24-16. show ip traffic output definitions

Keyword	Definition
unknown protocol...	No receiver for these packets. Counts those packets whose protocol type field is not recognized by FTOS.
not a gateway...	Packets can not be routed; host/network is unreachable.
security failures...	Counts the number of received unicast/multicast packets that could not be forwarded due to: <ul style="list-style-type: none"> route not found for unicast/multicast; ingress interfaces do not belong to the destination multicast group destination IP address belongs to reserved prefixes; host/network unreachable
bad options...	Unrecognized IP option on a received packet.
Frgs:	IP fragments received.

Table 24-16. show ip traffic output definitions

Keyword	Definition
... reassembled	Number of IP fragments that were reassembled.
... timeouts	Number of times a timer expired on a reassembled queue.
... too big	Number of invalid IP fragments received.
... couldn't fragment	Number of packets that could not be fragmented and forwarded.
...encapsulation failed	Counts those packets which could not be forwarded due to ARP resolution failure. FTOS sends an arp request prior to forwarding an IP packet. If a reply is not received, FTOS repeats the request three times. These packets are counted in encapsulation failed.
Rcvd:	
...short packets	The number of bytes in the packet are too small.
...bad length	The length of the packet was not correct.
...no port broadcasts	The incoming broadcast/multicast packet did not have any listener.
...socket full	The applications buffer was full and the incoming packet had to be dropped.

Usage Information

The F10 Monitoring MIB provides access to the statistics described below.

Table 24-17. F10 Monitoring MIB

Command Display	Object	OIDs
IP statistics:		
Bcast:		
Received	f10BcastPktRecv	1.3.6.1.4.1.6027.3.3.5.1.1
Sent	f10BcastPktSent	1.3.6.1.4.1.6027.3.3.5.1.2
Mcast:		
Received	f10McastPktRecv	1.3.6.1.4.1.6027.3.3.5.1.3
Sent	f10McastPktSent	1.3.6.1.4.1.6027.3.3.5.1.4
ARP statistics:		
Rcvd:		
Request	f10ArpReqRecv	1.3.6.1.4.1.6027.3.3.5.2.1
Replies	f10ArpReplyRecv	1.3.6.1.4.1.6027.3.3.5.2.3
Sent:		
Request	f10ArpReqSent	1.3.6.1.4.1.6027.3.3.5.2.2
Replies	f10ArpReplySent	1.3.6.1.4.1.6027.3.3.5.2.4
Proxy	f10ArpProxySent	1.3.6.1.4.1.6027.3.3.5.2.5

show protocol-termination-table

E

Display the IP Packet Termination Table (IPPTT).

Syntaxshow protocol-termination-table linecard *number* port-set *port-pipe-number***Parameters**

linecard <i>number</i>	Enter the keyword linecard followed by slot number of the line card. E-Series Range: 0 to 13 on a E1200/1200i, 0 to 6 on a E600/E600i, and 0 to 5 on a E300
port-set <i>port-pipe-number</i>	Enter the keyword port-set followed by the line card's Port-Pipe number. Range: 0 to 1

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.2	Introduced support for E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 6.4.1.0	Introduced

Example

```

FTOS#show protocol-termination-table linecard 2 port-set 0
Index  Protocol  Src-Port  Dst-Port  Queue  DP  Blk-Hole  VlanCPU  EgPort
-----  -
0      ICMP      any       any       Q0     0   No        -         CP
1      UDP       any       1812     Q7     6   No        -         CP
2      UDP       any       68       Q7     6   No        -         CP
3      UDP       any       67       Q7     6   No        -         CP
4      TCP       any       22       Q7     6   No        -         CP
5      TCP       22       any       Q7     6   No        -         CP
6      TCP       639      any       Q7     6   No        -         RP2
7      TCP       any       639     Q7     6   No        -         RP2
8      TCP       646      any       Q7     6   No        -         RP1
9      TCP       any       646     Q7     6   No        -         RP1
10     UDP       646      any       Q7     6   No        -         RP1
11     UDP       any       646     Q7     6   No        -         RP1
12     TCP       23       any       Q7     6   No        -         CP
13     TCP       any       23       Q7     6   No        -         CP
14     UDP       any       123     Q7     6   No        -         CP
15     TCP       any       21       Q7     6   No        -         CP
16     TCP       any       20       Q7     6   No        -         CP
17     UDP       any       21       Q7     6   No        -         CP
18     UDP       any       20       Q7     6   No        -         CP
19     TCP       21       any       Q7     6   No        -         CP
20     TCP       20       any       Q7     6   No        -         CP
21     UDP       21       any       Q7     6   No        -         CP
22     UDP       20       any       Q7     6   No        -         CP
23     UDP       any       69       Q7     6   No        -         CP
24     UDP       69       any       Q7     6   No        -         CP
25     TCP       any       161     Q7     6   No        -         CP
26     TCP       161      any       Q7     6   No        -         CP
27     TCP       162      any       Q7     6   No        -         CP
28     TCP       any       162     Q7     6   No        -         CP
29     UDP       any       161     Q7     6   No        -         CP
30     UDP       161      any       Q7     6   No        -         CP

```

31	UDP	any	162	Q7	6	No	-	CP
32	UDP	162	any	Q7	6	No	-	CP
33	PIM-SM	any	any	Q6	0	No	-	RP2
34	IGMP	any	any	Q7	6	No	-	RP2
35	OSPF	any	any	Q7	6	No	-	RP1
36	RSVP	any	any	Q7	6	No	-	RP1
FTOS#								

Usage Information

The IPPTT table is used for looking up forwarding information for IP control traffic destined to the router. For the listed control traffic types, IPPTT contains the information for the following:

- Which CPU to send the traffic (CP, RP1, or RP2)
- What QoS parameters to set

Related Commands

show ip cam stack-unit	Display the CAM table
--	-----------------------

show tcp statistics

C **E** **S**

S4810

S4820T

View information on TCP traffic through the switch.

Syntax

show tcp statistics {all | cp | rp1 | rp2}

Parameters

all	Enter the keyword all to view all TCP information.
cp	Enter the keyword cp to view only TCP information from the Control Processor.
rp1	Enter the keyword rp1 to view only TCP statistics from Route Processor 1.
rp2	Enter the keyword rp2 to view only TCP statistics from Route Processor 2.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 6.4.1.0	Introduced

Example

```
FTOS#show tcp stat cp

Control Processor TCP:
Rcvd: 10585 Total, 0 no port
  0 checksum error, 0 bad offset, 0 too short
 329 packets (1263 bytes) in sequence
 17 dup packets (6 bytes)
 0 partially dup packets (0 bytes)
 7 out-of-order packets (0 bytes)
 0 packets ( 0 bytes) with data after window
 0 packets after close
 0 window probe packets, 41 window update packets
 41 dup ack packets, 0 ack packets with unsend data
```

```

10184 ack packets (12439508 bytes)
Sent: 12007 Total, 0 urgent packets
25 control packets (including 24 retransmitted)
11603 data packets (12439677 bytes)
24 data packets (7638 bytes) retransmitted
355 ack only packets (41 delayed)
0 window probe packets, 0 window update packets
7 Connections initiated, 8 connections accepted, 15 connections established
14 Connections closed (including 0 dropped, 0 embryonic dropped)
20 Total rxmt timeout, 0 connections dropped in rxmt timeout
0 Keepalive timeout, 0 keepalive probe, 0 Connections dropped in keepalive
FTOS#

```

Table 24-18. show tcp statistics cp Command Example Fields

Field	Description
Rcvd:	Displays the number and types of TCP packets received by the switch. <ul style="list-style-type: none"> Total = total packets received no port = number of packets received with no designated port.
0 checksum error...	Displays the number of packets received with the following: <ul style="list-style-type: none"> checksum errors bad offset to data too short
329 packets...	Displays the number of packets and bytes received in sequence.
17 dup...	Displays the number of duplicate packets and bytes received.
0 partially...	Displays the number of partially duplicated packets and bytes received.
7 out-of-order...	Displays the number of packets and bytes received out of order.
0 packets with data after window	Displays the number of packets and bytes received that exceed the switch's window size.
0 packets after close	Displays the number of packet received after the TCP connection was closed.
0 window probe packets...	Displays the number of window probe and update packets received.
41 dup ack...	Displays the number of duplicate acknowledgement packets and acknowledgement packets with data received.
10184 ack...	Displays the number of acknowledgement packets and bytes received.
Sent:	Displays the total number of TCP packets sent and the number of urgent packets sent.
25 control packets...	Displays the number of control packets sent and the number retransmitted.
11603 data packets...	Displays the number of data packets sent.
24 data packets retransmitted	Displays the number of data packets resent.
355 ack...	Displays the number of acknowledgement packets sent and the number of packet delayed.
0 window probe...	Displays the number of window probe and update packets sent.
7 Connections initiated...	Displays the number of TCP connections initiated, accepted, and established.
14 Connections closed...	Displays the number of TCP connections closed, dropped.

Table 24-18. show tcp statistics cp Command Example Fields (continued)

Field	Description
20 Total rxmt...	Displays the number of times the switch tried to re-send data and the number of connections dropped during the TCP retransmit timeout period.
0 Keepalive....	Lists the number of keepalive packets in timeout, the number keepalive probes and the number of TCP connections dropped during keepalive.

IPv6 Access Control Lists (IPv6 ACLs)

Overview

IPv6 ACLs and IPv6 Route Map commands are supported on Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

- [IPv6 ACL Commands](#)
- [IPv6 Route Map Commands](#)



Note: For IPv4 ACL commands, refer to [IPv6 Access Control Lists \(IPv6 ACLs\)](#).

Important Points to Remember

- E-Series platforms require IPv6-ExtACL CAM profile to support IPv6 ACLs.
- C-Series and S-Series platforms require manual CAM usage space allotment. Refer to [cam-acl](#) later in this document.
- Egress IPv6 ACL and IPv6 ACL on Loopback interface is not supported.
- Reference to an empty ACL will permit any traffic.
- ACLs are not applied to self-originated traffic (e.g. Control Protocol traffic not affected by IPv6 ACL since the routed bit is not set for Control Protocol traffic and for egress ACLs the routed bit must be set).
- The same access list name can be used for both IPv4 and IPv6 ACLs.
- Both IPv4 and IPv6 ACLs can be applied on an interface at the same time.
- IPv6 ACLs can be applied on physical interfaces and a logical interfaces (Port-channel/VLAN).
- Non-contiguous masks are not supported in source or destination addresses in IPv6 ACL entries.
- Since prefix mask is specified in /x format in IPv6 ACLs, inverse mask is not supported.

IPv6 ACL Commands

The following commands configure IPv6 ACLs:

- `cam-acl`
- `cam-acl-egress`
- `clear counters ipv6 access-group`
- `deny`
- `deny icmp`
- `deny tcp`
- `deny udp`
- `ipv6 access-group`
- `ipv6 control-plane egress-filter`
- `ipv6 access-list`
- `permit`
- `permit icmp`
- `permit tcp`
- `permit udp`
- `remark`
- `resequence access-list`
- `resequence prefix-list ipv6`
- `seq`
- `show cam-acl`
- `show cam-acl-egress`
- `show config`
- `show ipv6 accounting access-list`
- `show running-config acl`
- `test cam-usage`

cam-acl



Allocate space for IPv6 ACLs.

Syntax

`cam-acl {default | l2acl 1-10 ipv4acl 1-10 ipv6acl 0-10 ipv4qos 1-10 l2qos 1-10}`

Parameters

default	Use the default CAM profile settings, and set the CAM as follows. L3 ACL (ipv4acl): 6 L2 ACL(l2acl): 5 IPv6 L3 ACL (ipv6acl): 0 L3 QoS (ipv4qos): 1 L2 QoS (l2qos): 1
<code>l2acl 1-10 ipv4acl 1-10 ipv6acl 0-10 ipv4qos 1-10 l2qos 1-10</code>	Allocate space to support IPv6 ACLs. You must enter all of the profiles and a range. Enter the CAM profile name followed by the amount to be allotted. The total space allocated must equal 13. The ipv6acl range must be a factor of 2.

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.0	Introduced on the E-Series TeraScale
Version 8.2.1.0	Introduced on the S-Series
Version 7.8.1.0	Introduced on the C-Series

Usage Information

You must save the new CAM settings to the startup-config (write-mem or copy run start) then reload the system for the new settings to take effect.

The total amount of space allowed is 16 FP Blocks. System flow requires 3 blocks and these cannot be reallocated.

When configuring space for IPv6 ACLs, the total number of Blocks must equal 13.

Ranges for the CAM profiles are 1-10, except for the ipv6acl profile which is 0-10. The ipv6acl allocation must be a factor of 2 (2, 4, 6, 8, 10).

cam-acl-egress



Allocate space for IPv6 egress ACLs.

Syntax

`cam-acl-egress {default | l2acl 1-4 ipv4acl 1-4 ipv6acl 0-4}`

Parameters

default	Use the default CAM profile settings, and set the CAM as follows. L2 ACL(l2acl): 1 L3 ACL (ipv4acl): 1 IPv6 L3 ACL (ipv6acl): 2
l2acl 1-4 ipv4acl 1- 4 ipv6acl 0-4	Allocate space to support IPv6 ACLs. You must enter all of the profiles and a range for each. Enter the CAM profile name followed by the amount to be allotted. The total space allocated must equal 13. The ipv6acl range must be a factor of 2.

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.0	Introduced on the E-Series TeraScale
Version 8.2.1.0	Introduced on the S-Series
Version 7.8.1.0	Introduced on the C-Series

Usage Information

You must save the new CAM settings to the startup-config (write-mem or copy run start) then reload the system for the new settings to take effect.

The total amount of space allowed is 16 FP Blocks. System flow requires 3 blocks and these cannot be reallocated.

When configuring space for IPv6 ACLs, the total number of blocks must equal 13.

Ranges for the CAM profiles are 1 to 10, except for the ipv6acl profile which is 0-10. The ipv6acl allocation must be a factor of 2 (2, 4, 6, 8, 10).

Example

```
FTOS#
FTOS#configure
FTOS(conf)#cam-acl-egress ?
default          Reset Egress CAM ACL entries to default setting
l2acl            Set L2-ACL entries
FTOS(conf)#cam-acl-egress l2acl ?
<1-4>           Number of FP blocks for l2acl
FTOS(conf)#cam-acl-egress l2acl 1 ?
ipv4acl         Set IPV4-ACL entries
FTOS(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ?
ipv6acl         Set IPV6-ACL entries
FTOS(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ipv6acl ?
<0-4>           Number of FP blocks for IPV6 (multiples of 2)
FTOS(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ipv6acl 2
```

clear counters ipv6 access-group



Erase all counters maintained for the IPv6 access lists.

Syntax clear counters ipv6 access-group [*access-list-name*]

Parameters

<i>access-list-name</i>	(OPTIONAL) Enter the name of a configured access-list, up to 140 characters.
-------------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale Added monitor option

deny

C **E** **S**

Configure a filter that drops IPv6 packets that match the filter criteria.

Syntax deny {*ipv6-protocol-number* | icmp | ipv6 | tcp | udp}

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no deny {*ipv6-protocol-number* | icmp | ipv6 | tcp | udp} command.

Parameters

<i>ip-protocol-number</i>	Enter an IPv6 protocol number. Range: 0 to 255
icmp	Enter the keyword icmp to deny Internet Control Message Protocol version 6.
ipv6	Enter the keyword ipv6 to deny any Internet Protocol version 6.
tcp	Enter the keyword tcp to deny the Transmission Control protocol.
udp	Enter the keyword udp to deny the User Datagram Protocol.

Defaults Not configured.

Command Modes ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale

deny icmp



Syntax

Configure a filter to drop all or specific ICMP messages.

```
deny icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address} [message-type] [count [byte]] | [log] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command.

Parameters

<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ipv6-address</i>	Enter the keyword <code>host</code> followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero.
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>message-type</i>	On the E-Series only , enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to have the information kept in an ACL log file.
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults

Not configured

Command Modes

ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

The following table lists the keywords displayed in the CLI help and their corresponding ICMP Message Type Name.

Table 25-1. ICMP Message Type Keywords

Keyword	ICMP Message Type Name
dest-unreachable	Destination unreachable
echo	Echo request (ping)
echo-reply	Echo reply
inverse-nd-na	Inverse neighbor discovery advertisement
inverse-nd-ns	Inverse neighbor discovery solicitation
log	Log matches against this entry
mobile-advertisement	Mobile prefix advertisement
mobile-solicitation	Mobile prefix solicitation
mrouter-advertisement	Multicast router advertisement
mrouter-solicitation	Multicast router solicitation
mrouter-termination	Multicast router termination
nd-na	Neighbor advertisement
nd-ns	Neighbor solicitation
packet-too-big	Packet is too big
parameter-problem	Parameter problems
redirect	Neighbor redirect
router-advertisement	Neighbor discovery router advertisement
router-renumbering	All routers renumbering
router-solicitation	Neighbor discovery router solicitation
time-exceeded	All time exceeded

deny tcp**Syntax**

Configure a filter that drops TCP packets that match the filter criteria.

```
deny tcp {source address mask | any | host ipv6-address} [operator port [port]] {destination address | any | host ipv6-address} [bit] [operator port [port]] [count [byte]] | [log] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny tcp { source address mask | any | host ipv6-address } { destination address | any | host ipv6-address }` command.

Parameters

<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword <i>any</i> to specify that all routes are subject to the filter.
<i>host ipv6-address</i>	Enter the keyword <i>host</i> followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <i>eq</i> = equal to • <i>neq</i> = not equal to • <i>gt</i> = greater than • <i>lt</i> = less than • <i>range</i> = inclusive range of ports (you must specify two ports for the <i>port</i> command parameter.
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the <i>range</i> logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>bit</i>	Enter a flag or combination of bits: <i>ack</i> : acknowledgement field <i>fin</i> : finish (no more data from the user) <i>psh</i> : push function <i>rst</i> : reset the connection <i>syn</i> : synchronize sequence numbers <i>urg</i> : urgent field
<i>count</i>	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <i>byte</i> to count bytes processed by the filter.

log	(OPTIONAL) Enter the keyword <code>log</code> to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults Not configured.

Command Modes ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (`gt`, `lt`, `range`) may require more than one entry. The range of ports is configured in the CAM based on bitmask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port `lt 1023` takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related Commands

deny	Assign a filter to deny IP traffic.
deny udp	Assign a filter to deny UDP traffic.

deny udp



Syntax

Configure a filter to drop UDP packets meeting the filter criteria.

```
deny udp {source address mask | any | host ipv6-address} [operator port [port]] {destination address | any | host ipv6-address} [operator port [port]] [count [byte]] | [log] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny udp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command.

Parameters

<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ipv6-address</i>	Enter the keyword <code>host</code> followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the <code>range</code> logical operand. Range: 0 to 65535
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults Not configured.

Command Modes ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (gt, lt, range) may require more than one entry. The range of ports is configured in the CAM based on bitmask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 will use 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	00001111110100000	11111111111100000	4000	4031	32
2	00001111111000000	11111111111100000	4032	4095	64
3	00010000000000000	11111000000000000	4096	6143	2048
4	00011000000000000	11111100000000000	6144	7167	1024
5	00011100000000000	11111110000000000	7168	7679	512
6	00011110000000000	11111111000000000	7680	7935	256
7	00011111000000000	11111111100000000	7936	7999	64
8	00011111010000000	11111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	00000000000000000	11111100000000000	0	1023	1024

Total Ports: 1024

Related Commands

deny	Assign a deny filter for IP traffic.
deny tcp	Assign a deny filter for TCP traffic.

ipv6 access-group

C **E** **S**

Assign an IPv6 access-group to an interface.

Syntax

ipv6 access-group *access-list-name* {in | out} [implicit-permit] [vlan *range*]

To delete an IPv6 access-group configuration, use the `no ipv6 access-group access-list-name {in} [implicit-permit] [vlan range]` command.

Parameters	
<i>access-list-name</i>	Enter the name of a configured access list, up to 140 characters.
in out	Enter either the keyword in or out to apply the IPv6 ACL to incoming traffic (ingress) or outgoing traffic (egress).
implicit-permit	(OPTIONAL) Enter the keyword implicit-permit to change the default action of the IPv6 ACL from implicit-deny to implicit-permit (that is, if the traffic does not match the filters in the IPv6 ACL, the traffic is permitted instead of dropped).
vlan range	(OPTIONAL) Enter the keyword vlan followed by the VLAN range in a comma separated format. Range: 1 to 4094

Defaults Disabled

Command Modes INTERFACE

Command History	
Version 8.4.2.1	Introduced on the S-Series
Version 7.8.1.0	Introduced on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced on the E-Series TeraScale

Usage Information You can assign an IPv6 access group to a physical, LAG, or VLAN interface context.

Example

```
FTOS(conf-if-gi-9/0)#ipv6 access-group AclList1 in implicit-permit vlan 10-20

FTOS(conf-if-gi-9/0)#show config
!
interface GigabitEthernet 9/0
 no ip address
 ipv6 access-group AclList1 in implicit-permit Vlan 10-20
 no shutdown
FTOS(conf-if-gi-9/0)#
```

ipv6 access-list

C **E** **S**

Configure an access list based on IPv6 addresses or protocols.

Syntax `ipv6 access-list access-list-name`

To delete an access list, use the `no ipv6 access-list access-list-name` command.

Parameters	
<i>access-list-name</i>	Enter the as the access list name as a string, up to 140 characters.

Defaults All access lists contain an implicit “deny any”; that is, if no match occurs, the packet is dropped.

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced support on the S4810
Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced on the E-Series TeraScale

Usage Information

The number of entries allowed per ACL is hardware-dependent. Refer to your line card documentation for detailed specification on entries allowed per ACL.

Related Commands

show config	View the current configuration.
-----------------------------	---------------------------------

ipv6 control-plane egress-filter

C **E** **S**

Enable egress Layer 3 ACL lookup for IPv6 CPU traffic.

Syntax

ipv6 control-plane egress-filter

Defaults

Not enabled

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.10.0	Introduced support on the S4810

permit

C **E** **S**

Select an IPv6 protocol number, ICMP, IPv6, TCP, or UDP to configure a filter that match the filter criteria.

Syntax

permit {*ipv6-protocol-number* | icmp | ipv6 | tcp | udp}

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no permit {*ipv6-protocol-number* | icmp | ipv6 | tcp | udp} command.

Parameters	<i>ip-protocol-number</i>	Enter an IPv6 protocol number. Range: 0 to 255
	icmp	Enter the keyword icmp to filter Internet Control Message Protocol version 6.
	ipv6	Enter the keyword ipv6 to filter any Internet Protocol version 6.
	tcp	Enter the keyword tcp to filter the Transmission Control protocol.
	udp	Enter the keyword udp to filter the User Datagram Protocol.
Defaults	Not configured.	
Command Modes	ACCESS-LIST	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced support on the S4810

permit icmp

C **E** **S**

Configure a filter to allow all or specific ICMP messages.

Syntax

```
permit icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address} [message-type] [count [byte]] | [log] [monitor]
```

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no permit icmp { *source address mask* | any | host *ipv6-address* } { *destination address* | any | host *ipv6-address* } command.

Parameters	<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
	<i>mask</i>	Enter a network mask in /prefix format (/x).
	any	Enter the keyword any to specify that all routes are subject to the filter.
	host <i>ipv6-address</i>	Enter the keyword host followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
	<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.

<i>message-type</i>	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword log to have the information kept in an ACL log file.
monitor	(OPTIONAL) Enter the keyword monitor to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults Not configured

Command Modes ACCESS-LIST

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced support on the S4810
Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

permit tcp



Configure a filter to pass TCP packets that match the filter criteria.

Syntax

```
permit tcp {source address mask | any | host ipv6-address} [operator port [port]]
{destination address | any | host ipv6-address} [bit] [operator port [port]] [count [byte]] |
[log] [monitor]
```

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or
- Use the no permit tcp { *source address mask* | any | host *ipv6-address* } { *destination address* | any | host *ipv6-address* } command.

Parameters

<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword any to specify that all routes are subject to the filter.
<i>host ipv6-address</i>	Enter the keyword host followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two port for the <i>port</i> parameter.)
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: 23 = Telnet 20 and 21 = FTP 25 = SMTP 169 = SNMP
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>bit</i>	Enter a flag or combination of bits: ack : acknowledgement field fin : finish (no more data from the user) psh : push function rst : reset the connection syn : synchronize sequence numbers urg : urgent field
<i>count</i>	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword log to enter ACL matches in the log.
<i>monitor</i>	(OPTIONAL) Enter the keyword monitor to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults

Not configured.

Command Modes

ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (gt, lt, range) may require more than one entry. The range of ports is configured in the CAM based on bitmask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related Commands

permit	Assign a permit filter for IPv6 packets.
permit udp	Assign a permit filter for UDP packets.

permit udp

C **E** **S**

Syntax

Configure a filter to pass UDP packets meeting the filter criteria.

```
permit udp {source address mask | any | host ipv6-address} [operator port [port]]  
{destination address | any | host ipv6-address} [operator port [port]] [count [byte]] | [log]  
[monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit udp { source address mask | any | host ipv6-address } { destination address | any | host ipv6-address }` command.

Parameters

<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<i>host ipv6-address</i>	Enter the keyword <code>host</code> followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the <code>range</code> logical operand. Range: 0 to 65535
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to enter ACL matches in the log.
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults

Not configured.

Command Modes

ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale Added monitor option

Usage Information

The C-Series cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (gt, lt, range) may require more than one entry. The range of ports is configured in the CAM based on bitmask boundaries; the space required depends on exactly what ports are included in the range.

For example, an ACL rule with TCP port range 4000 - 8000 uses 8 entries in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111110000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

But an ACL rule with TCP port lt 1023 takes only one entry in the CAM:

Rule#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related Commands

permit	Assign a permit filter for IP packets.
permit tcp	Assign a permit filter for TCP packets.

remark

C **E** **S**

Enter a description for an IPv6 ACL entry.

Syntax

remark *remark number* [*description*]

To delete the description, use the no remark *remark number* command (it is not necessary to include the remark description that you are deleting).

Parameters	<i>remark number</i>	Enter the remark number. Note that the same sequence number can be used for the remark and an ACL rule. Range: 0 to 4294967290
	<i>description</i>	Enter a description of up to 80 characters.
Defaults	Not configured	
Command Modes	ACCESS-LIST	
Command History	Version 8.4.2.1	Introduced on the S-Series
	Version 8.2.1.0	Introduced on the E-Series ExaScale
	Version 7.8.1.0	Introduced on the C-Series
	Version 7.4.1.0	Introduced on the E-Series TeraScale
Example	<pre>FTOS(config-ipv6-acl)#remark 10 Remark for Entry # 10 FTOS(config-ipv6-acl)#show config ! ipv6 access-list Acl1 description IPV6 Access-list seq 5 permit ipv6 1111::2222/127 host 3333::1111 log count bytes remark 10 Remark for Entry # 10 seq 10 permit icmp host 3333:: any mobile-advertisement log seq 15 deny tcp any any rst seq 20 permit udp any any gt 100 count !FTOS(config-ipv6-acl)#</pre>	
Usage Information	As shown in the example above, the same sequence number is used for the remark and an ACL rule. The remark will precede the rule in the running-configuration because it is assumed that the remark is for that rule or that group of rules that follow the remark. You can configure up to 4294967290 remarks in a given ACL.	
Related Commands	show config	Display the current ACL configuration.

resequence access-list

C **E** **S**

Re-assign sequence numbers to entries of an existing access-list.

Syntax

```
resequence access-list {ipv4 | ipv6 | mac} {access-list-name StartingSeqNum Step-to-Increment}
```

Parameters

<i>ipv4 ipv6 mac</i>	Enter the keyword ipv4, ipv6 or mac to identify the access list type to resequence.
<i>access-list-name</i>	Enter the name of a configured IP access list, up to 140 characters. Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.

	<i>StartingSeqNum</i>	Enter the starting sequence number to resequence. Range: 0 to 4294967290
	<i>Step-to-Increment</i>	Enter the step to increment the sequence number. Range: 1 to 4294967290
Defaults	No default values or behavior	
Command Modes	EXEC EXEC Privilege	
Command History	Version 8.4.2.0	Introduced on the S-Series
	Version 8.2.1.0	Introduced on the E-Series ExaScale
	Version 7.8.1.0	Introduced on the C-Series
	Version 7.4.1.0	Introduced on the E-Series TeraScale
Usage Information	When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing access-list.	
Related Commands	resequence prefix-list ipv6	Resequence a prefix list

resequence prefix-list ipv6

C **E** **S**

Re-assign sequence numbers to entries of an existing prefix list.

Syntax

resequence prefix-list ipv6 {*prefix-list-name* *StartingSeqNum* *Step-to-increment*}

Parameters

<i>prefix-list-name</i>	Enter the name of configured prefix list, up to 140 characters. Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
<i>StartingSeqNum</i>	Enter the starting sequence number to resequence. Range: 0 – 65535
<i>Step-to-Increment</i>	Enter the step to increment the sequence number. Range: 1 – 65535

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced on the E-Series TeraScale

Usage Information

When all sequence numbers have been exhausted, this feature permits re-assigning new sequence number to entries of an existing prefix list.

Related Commands

resequence access-list	Resequence an access-list
--	---------------------------

seq

C **E** **S**

Assign a sequence number to a deny or permit filter in an IPv6 access list while creating the filter.

Syntax

```
seq sequence-number {deny | permit} {ipv6-protocol-number | icmp | ip | tcp | udp} {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address} [operator port [port]] [count [byte]] | [log] [monitor]
```

To delete a filter, use the no seq *sequence-number* command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290.
deny	Enter the keyword deny to configure a filter to drop packets meeting this condition.
permit	Enter the keyword permit to configure a filter to forward packets meeting this criteria.
<i>ipv6-protocol-number</i>	Enter an IPv6 protocol number. Range: 0 to 255
icmp	Enter the keyword icmp to configure an Internet Control Message Protocol version 6 filter.
ipv6	Enter the keyword ipv6 to configure any Internet Protocol version 6 filter.
tcp	Enter the keyword tcp to configure a Transmission Control protocol filter.
udp	Enter the keyword udp to configure a User Datagram Protocol filter.
<i>source address</i>	Enter the IPv6 address of the network or host from which the packets were sent in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>mask</i>	Enter a network mask in /prefix format (/x).
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ipv6-address</i>	Enter the keyword host followed by the IPv6 address of the host in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero

<i>operator</i>	(OPTIONAL) Enter one of the following logical operands: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535 The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination address</i>	Enter the IPv6 address of the network or host to which the packets are sent in the x:x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zero.
<i>message-type</i>	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type . Range: 0 to 255 for ICMP type; 0 to 255 for ICMP code
<i>count</i>	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword byte to count bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword log to enter ACL matches in the log. Supported on Jumbo-enabled line cards only.
<i>monitor</i>	(OPTIONAL) Enter the keyword monitor to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults Not configured.

Command Modes ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the E-Series TeraScale and S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Added monitor option

Related Commands

deny	Configure a filter to drop packets.
permit	Configure a filter to forward packets.

show cam-acl

C **E** **S**

Show space allocated for IPv6 ACLs.

Syntax

show cam-acl

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced support on the S4810
Version 8.4.2.1	Introduced on the S-Series
Version 8.4.2.0	Introduced on the E-Series TeraScale
Version 7.8.1.0	Introduced on the C-Series

Related Commands

[cam-acl](#) Configure CAM profiles to support IPv6 ACLs

Example (default profile)

```
FTOS#show cam-acl

-- Chassis Cam ACL --
      Current Settings(in block sizes)
L2Acl      :      5
Ipv4Acl    :      6
Ipv6Acl    :      0
Ipv4Qos    :      1
L2Qos      :      1

-- Line card 4 --
      Current Settings(in block sizes)
L2Acl      :      5
Ipv4Acl    :      6
Ipv6Acl    :      0
Ipv4Qos    :      1
L2Qos      :      1
```

Example (manually set profiles)

```
FTOS#show cam-acl
FTOS#show cam-acl

-- Chassis Cam ACL --
      Current Settings(in block sizes)
L2Acl      :      2
Ipv4Acl    :      2
Ipv6Acl    :      4
Ipv4Qos    :      2
L2Qos      :      3

-- Line card 4 --
      Current Settings(in block sizes)
L2Acl      :      2
Ipv4Acl    :      2
Ipv6Acl    :      4
Ipv4Qos    :      2
L2Qos      :      3

FTOS#show cam-acl
```


show cam-acl-egress

C **E** **S**

Show information on FP groups allocated for egress ACLs.

Syntax show cam-acl-egress

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced support on the S4810
Version 8.4.2.1	Introduced on the S-Series
Version 8.4.2.0	Introduced on the E-Series TeraScale
Version 7.8.1.0	Introduced on the C-Series

Related Commands

[cam-acl](#) Configure CAM profiles to support IPv6 ACLs

Example (default profile)

```
FTOS#show cam-acl-egress

-- Chassis Egress Cam ACL --
      Current Settings(in block sizes)
L2Acl      :      1
Ipv4Acl    :      1
Ipv6Acl    :      2

-- Stack unit 0 --
      Current Settings(in block sizes)
L2Acl      :      1
Ipv4Acl    :      1
Ipv6Acl    :      2

FTOS#show cam-acl
```

show config

C **E** **S**

View the current IPv6 ACL configuration.

Syntax show config

Command Modes ACCESS-LIST

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.4.2.0	Introduced on the E-Series TeraScale
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series

Example

```

FTOS(conf-ipv6-acl)#show config
!
ipv6 access-list Acl1
seq 5 permit ipv6 1111::2222/127 host 3333::1111 log count bytes
seq 10 permit icmp host 3333:: any mobile-advertisement log
seq 15 deny tcp any any rst
seq 20 permit udp any any gt 100 count
FTOS(conf-ipv6-acl)#

```

show ipv6 accounting access-list

C **E** **S**

View the IPv6 access-lists created on the E-Series and the sequence of filters.

Syntax

show ipv6 accounting {access-list *access-list-name* | cam_count} interface *interface*

Parameters

<i>access-list-name</i>	Enter the name of the ACL to be displayed, up to 140 characters.
<i>cam_count</i>	List the count of the CAM rules for this ACL.
interface <i>interface</i>	<p>Enter the keyword interface followed by the interface type and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced on the E-Series TeraScale

Example

```

FTOS#show ipv6 accounting access-list
!
Ingress IPv6 access list AclList1 on GigabitEthernet 9/0
Total cam count 15
  seq 10 permit icmp host 3333:: any mobile-advertisement log
  seq 15 deny tcp any any rst
  seq 20 permit udp any any gt 101 count (0 packets)
!
FTOS#

```

Table 25-2. show ip accounting access-lists Command Example Field

Field	Description
“Ingress IPv6...”	Displays the name of the IPv6 ACL, in this example “AclList1”.
“seq 10...”	Displays the filter. If the keywords count or byte were configured in the filter, the number of packets or bytes processed by the filter is displayed at the end of the line.

show running-config acl

C **E** **S**

Display the ACL running configuration.

Syntax

show running-config acl

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Introduced on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Example

```

FTOS#show running-config acl
!
ip access-list extended ext-acl1
!
ip access-list standard std-acl1
!
ipv6 access-list Acl1
description IPV6 Access-list
seq 5 permit ipv6 1111::2222/127 host 3333::1111 log count bytes
remark 10 Remark for Entry # 10
seq 10 permit icmp host 3333:: any mobile-advertisement log
seq 15 deny tcp any any rst
seq 20 permit udp any any gt 100 count
!FTOS#

```

test cam-usage

C **E** **S**

Verify that enough ACL CAM space is available for the IPv6 ACLs you have created.

Syntax	test cam-usage service-policy input <i>input policy name linecard</i> { <i>number</i> all }
Parameters	<i>policy-map name</i> Enter the name of the policy-map to verify.
	<i>number</i> Enter all to get information for all the linecards, or enter the linecard <i>number</i> to get information for a specific card. Range: 0-6 for E-Series, 0-7 for C-Series
Defaults	None
Command Modes	EXEC Privilege
Command History	Version 8.4.2.1 Introduced on the S-Series
	Version 8.2.1.0 Introduced on the E-Series ExaScale
	Version 7.8.1.0 Introduced on C-Series and E-Series TeraScale
Usage Information	<p>This command applies to both IPv4 and IPv6 CAM Profiles, but is best used when verifying QoS optimization for IPv6 ACLs.</p> <p>QoS Optimization for IPv6 ACLs does not impact the CAM usage for applying a policy on a single (or the first of several) interfaces. It is most useful when a policy is applied across multiple interfaces; it can reduce the impact to CAM usage across subsequent interfaces.</p>

**Example
(C-Series)**

The following example shows the output shown when using the test cam-usage command.

```
FTOS#test cam-usage service-policy input LauraMapTest linecard all
```

Linecard	Portpipe	CAM Partition	Available CAM	Estimated CAM per Port	Status
2	1	IPv4Flow	232	0	Allowed
2	1	IPv6Flow	0	0	Allowed
4	0	IPv4Flow	232	0	Allowed
4	0	IPv6Flow	0	0	Allowed

```
FTOS#test cam-usage service-policy input LauraMapTest linecard 4 port-set 0
```

Linecard	Portpipe	CAM Partition	Available CAM	Estimated CAM per Port	Status
4	0	IPv4Flow	232	0	Allowed
4	0	IPv6Flow	0	0	Allowed

```
FTOS#test cam-usage service-policy input LauraMapTest linecard 2 port-set 1
```

Linecard	Portpipe	CAM Partition	Available CAM	Estimated CAM per Port	Status
2	1	IPv4Flow	232	0	Allowed
2	1	IPv6Flow	0	0	Allowed

Table 25-3. Output Explanations: test cam-usage

Term	Explanation
Linecard	Lists the line card or linecards that are checked. Entering all shows the status for linecards in the chassis
Portpipe	Lists the portpipe (port-set) or port pipes (port-sets) that are checked. Entering all shows the status for linecards and port-pipes in the chassis.
CAM Partition	Shows the CAM profile of the CAM
Available CAM	Identifies the amount of CAM space remaining for that profile
Estimated CAM per Port	Estimates the amount of CAM space the listed policy will require.
Status	Indicates whether or not the policy will be allowed in the CAM

IPv6 Route Map Commands

The following commands allow you to configure route maps and their redistribution criteria.

- [match ipv6 address](#)
- [match ipv6 next-hop](#)

- [match ipv6 route-source](#)
- [route-map](#)
- [set ipv6 next-hop](#)
- [show config](#)
- [show route-map](#)

match ipv6 address

C **E** **S**

Configure a filter to match routes based on IPv6 addresses specified in an access list.

Syntax

match ipv6 address *prefix-list-name*

To delete a match, use the no match ipv6 address *prefix-list-name* command.

Parameters

<i>prefix-list-name</i>	Enter the name of IPv6 prefix list, up to 140 characters.
-------------------------	---

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Related Commands

match ipv6 next-hop	Redistribute routes that match the next-hop IP address.
match ipv6 route-source	Redistribute routes that match routes advertised by other routers.

match ipv6 next-hop

C **E** **S**

Configure a filter which matches based on the next-hop IPv6 addresses specified in the IPv6 prefix list.

Syntax

match ipv6 next-hop prefix-list *prefix-list-name*

To delete a match, use the no match ipv6 next-hop prefix-list *prefix-list-name* command.

Parameters

prefix-list <i>prefix-list-name</i>	Enter the keywords prefix-list followed by the name of configured prefix list, up to 140 characters.
-------------------------------------	--

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Related Commands

match ipv6 address	Redistribute routes that match an IP address.
match ipv6 route-source	Redistribute routes that match routes advertised by other routers.

match ipv6 route-source

C **E** **S**

Configure a filter which matches based on the routes advertised in the IPv6 prefix lists.

Syntax

match ipv6 route-source prefix-list *prefix-list-name*

To delete a match, use the no match ipv6 route-source prefix-list *prefix-list-name* command.

Parameters

prefix-list <i>prefix-list-name</i>	Enter the keywords prefix-list followed by the name of configured prefix list, up to 140 characters.
-------------------------------------	--

Defaults

Not configured.

Command Modes

ROUTE-MAP

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Related Commands

match ipv6 address	Redistribute routes that match an IP address.
match ipv6 next-hop	Redistribute routes that match the next-hop IP address.

route-map

C **E** **S**

Designate a IPv6 route map name and enter the ROUTE-MAP mode.

Syntax

route-map *map-name*

To delete a route map, use the `no route-map map-name` command.

Parameters	<i>map-name</i> Enter a text string to name the route map, up to 140 characters.
Defaults	Not configured
Command Modes	ROUTE-MAP
Command History	Version 8.4.2.1 Introduced on the S-Series
	Version 8.2.1.0 Introduced support on the E-Series ExaScale
	Version 7.8.1.0 Introduced support on the C-Series Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
	Version 7.4.1.0 Introduced support on the E-Series TeraScale
Example	<pre>FTOS (conf) #route-map Rmap1 FTOS (config-route-map) #match ? ... ip IP specific information ipv6 IPv6 specific information ...</pre>
Related Commands	show config View the current configuration.

set ipv6 next-hop

C **E** **S**

Configure a filter that specifies IPv6 address as the next hop.

Syntax

`set ipv6 next-hop ipv6-address`

To delete the setting, use the `no set ipv6 next-hop ipv6-address` command.

Parameters	<i>ipv6-address</i> Enter the IPv6 address in the x:x:x::x format. Note: The :: notation specifies successive hexadecimal fields of zeros
Defaults	Not configured.
Command Modes	ROUTE-MAP
Command History	Version 8.4.2.1 Introduced on the S-Series
	Version 8.2.1.0 Introduced support on the E-Series ExaScale
	Version 7.8.1.0 Introduced support on the C-Series
	Version 7.4.1.0 Introduced support on the E-Series TeraScale
Usage Information	The set ipv6 next-hop command is the only way to set an IPv6 Next-Hop.

show config

C **E** **S**

View the current route map configuration.

Syntax show config

Command Modes ROUTE-MAP

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Example

```
FTOS(config-route-map)#show config
!
route-map Rmap1 permit 10
 match ip address v4plist
 match ipv6 address plist1
 match ipv6 next-hop prefix-list plist2
 match ipv6 route-source prefix-list plist3
 set next-hop 1.1.1.1
 set ipv6 next-hop 3333:2222::
```

show route-map

C **E** **S**

View the current route map configurations.

Syntax show route-map

Command Modes EXEC

EXEC Privilege

Command History

Version 8.4.2.1	Introduced on the S-Series
Version 8.2.1.0	Introduced support on the E-Series ExaScale
Version 7.8.1.0	Introduced support on the C-Series
Version 7.4.1.0	Introduced support on the E-Series TeraScale

Example

```
FTOS#show route-map
!
route-map Rmap1, permit, sequence 10
 Match clauses:
 ip address: v4plist
 ipv6 address: plist1
 ipv6 next-hop prefix-lists: plist2
 ipv6 route-source prefix-lists: plist3
 Set clauses:
 next-hop 1.1.1.1
 ipv6 next-hop 3333:2222::
```

**Related
Commands**

route-map	Configure a route map.
---------------------------	------------------------

IPv6 Basics

Overview

IPv6 Basic Commands are supported on Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.



Note: Basic IPv6 basic commands are supported on all platforms. [Table 26-2](#) in [IPv6 Basics](#) of the *FTOS Configuration Guide* for information on the FTOS version and platform that supports IPv6 in each software feature.

Commands

The IPv6 commands in the chapter are:

- [clear ipv6 fib](#)
- [clear ipv6 route](#)
- [clear ipv6 mld_host](#)
- [ipv6 address autoconfig](#)
- [ipv6 address](#)
- [ipv6 control-plane icmp error-rate-limit](#)
- [ipv6 flowlabel-zero](#)
- [ipv6 host](#)
- [ipv6 name-server](#)
- [ipv6 nd dad attempts](#)
- [ipv6 nd prefix](#)
- [ipv6 route](#)
- [ipv6 unicast-routing](#)
- [show ipv6 cam linecard](#)
- [show ipv6 cam stack-unit](#)
- [show ipv6 control-plane icmp](#)
- [show ipv6 fib linecard](#)
- [show ipv6 fib stack-unit](#)
- [show ipv6 flowlabel-zero](#)

- [show ipv6 interface](#)
- [show ipv6 mld_host](#)
- [show ipv6 route](#)
- [trust ipv6-diffserv](#)

clear ipv6 fib

C E S

Clear (refresh) all FIB entries on a linecard.

S4810

S4820T

Syntax clear ipv6 fib linecard *slot*

Parameters

<i>slot</i>	Enter the slot number to clear the FIB for a linecard.
-------------	--

Command Mode

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ipv6 route

C E S

Clear (refresh) all or a specific route from the IPv6 routing table.

S4810

S4820T

Syntax clear ipv6 route { * | *ipv6-address prefix-length* }

Parameters

*	Enter the * to clear (refresh) all routes from the IPv6 routing table.
<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros

Command Mode

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.2.1.0	Introduced on E-Series ExaScale

Version 7.8.1.0	Introduced on C-Series and S-Series
-----------------	-------------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

clear ipv6 mld_host

S4810

Clear the IPv6 MLD host counters and reset the elapsed time.

S4820T

Syntax `clear ipv6 mld_host`

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on the S4820T.
------------------	---------------------------

Version 8.3.12.0	Introduced on the S4810.
------------------	--------------------------

ipv6 address autoconfig

S4810

Configure IPv6 address auto-configuration for the management interface.

S4820T

Syntax `ipv6 address autoconfig`

Use the **no ipv6 address autoconfig** command to disable the address autoconfig operation on the management interface.

Default Disabled

Command Modes INTERFACE (management interface only)

Command History

Version 8.3.19.0	Introduced on the S4820T.
------------------	---------------------------

Version 8.3.12.0	Introduced on the S4810.
------------------	--------------------------

ipv6 address

C **E** **S**

Configure an IPv6 address to an interface.

S4810

S4820T

Syntax `ipv6 address { ipv6-address prefix-length }`

To remove the IPv6 address, use the `no ipv6 address { ipv6-address prefix-length }` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the X:X:X:X format followed by the prefix length in the /X format.
	<i>prefix-length</i>	Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros
Defaults	No default values or behavior	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.4.1.0	Support added on the management Ethernet port.
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.8.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series TeraScale
Example	<pre> FTOS(conf)#interface gigabitethernet 10/0 FTOS(conf-if-gi-10/0)#ipv6 address ? X:X:X:X::X IPv6 address FTOS(conf-if-gi-10/0)#ipv6 address 2002:1:2::3 ? <0-128> Prefix length in bits FTOS(conf-if-gi-10/0)#ipv6 address 2002:1:2::3 /96 ? <cr> FTOS(conf-if-gi-10/0)#ipv6 address 2002:1:2::3 /96 FTOS(conf-if-gi-10/0)#show config ! interface GigabitEthernet 10/0 no ip address ipv6 address 2002:1:2::3 /96 no shutdown FTOS(conf-if-gi-10/0)# </pre>	
Usage Information	FTOS allows multiple IPv6 addresses to be configured on an interface. When the no ipv6 address command is issued without specifying a particular IPv6 address, all IPv6 addresses on that interface are deleted.	

ipv6 control-plane icmp error-rate-limit

S4810

Configure the maximum number of ICMP error packets per second that can be sent per second.

S4820T

Syntax ipv6 control-plane icmp error-rate-limit {1-200}

To restore the default value, use the no ipv6 control-plane icmp error-rate-limit command.

Parameters	<i>pps</i>	Enter the maximum number of error packets to be generated per second. Range: 1 to 200, where 0 disables the rate-limiting.
-------------------	------------	---

Command Modes CONFIGURATION

Default	100 pps
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.12.0 Introduced on the S4810.

ipv6 flowlabel-zero

S4810

Configure system to set the flow label field in the packets to zero.

S4820T

Syntax ipv6 flowlabel-zero

Use the no ipv6 flowlabel-zero command to disable the 0 from being set in the field and allow the field to be filled by protocol operations.

Default Disabled

Command Modes CONFIGURATION

Default 100 pps

Command History	Version 8.3.19.0 Introduced on the S4820.
	Version 8.3.12.0 Introduced on the S4810.

Usage Information If the flowlabel value is already set for BGP or SSH, the system defaults to the already configured value. All packets on the same connection are considered part of the same flow by the system. For new connections, the new flowlabel is set to zero.

ipv6 host

C E S

Assign a name and IPv6 address to be used by the host-to-IP address mapping table.

S4810

S4820T

Syntax ipv6 host *name* *ipv6-address*

Parameters	<i>name</i>	Enter a text string to associate with one IP address.
	<i>ipv6-address</i>	Enter an IPv6 address (X:X:X:X::X) to be mapped to the name.

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced on the C-Series and S-Series
Version 8.4.1.0	Introduced on E-Series TeraScale

ipv6 name-server

C **E** **S**

Enter up to 6 IPv6 addresses of name servers. The order you enter the addresses determines the order of their use.

S4810

S4820T

Syntax `ipv6 name-server ipv6-address [ipv6-address2... ipv6-address6]`

Parameters

<i>ipv6-address</i>	Enter the IPv6 address (X:X:X:X::X) of the name server to be used.
<i>ipv6-address2...</i> <i>ipv6-address6</i>	Enter up five more IP addresses, in dotted decimal format, of name servers to be used. Separate the addresses with a space.

Defaults No name servers are configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced on the C-Series and S-Series
Version 8.4.1.0	Introduced on E-Series TeraScale

Usage Information

You can separately configure both IPv4 and IPv6 domain name servers.

ipv6 nd dad attempts

S4810

Configure the number of neighbor solicitation messages that are sent to perform duplicate address detection (DAD) on the management interface.

S4820T

Syntax `ipv6 nd dad attempts {number of attempts}`

To restore the default value, use the `no ipv6 nd dad attempts` command.

Parameters

<i>number of attempts</i>	Enter the number of attempts to be made to detect a duplicate address Range: 0 to 15. Setting the value to 0 disables DAD on the interface.
---------------------------	---

Default 3 attempts

Command Modes INTERFACE (management interface only)

Command History	Version 8.3.19.0	Introduced on the S4820T.
	Version 8.3.12.0	Introduced on the S4810.

ipv6 nd prefix

C **E** **S**

Specify which IPv6 prefixes are included in Neighbor Advertisements.

S4810

S4820T

Syntax `ipv6 nd prefix { ipv6-prefix | prefix-length | default } [no-advertise] | [no-autoconfig] [no-rtr-address] [off-link] [lifetime { valid | infinite } { preferred | infinite }]`

Parameters

<i>ipv6-prefix</i>	Enter an IPv6 prefix.
<i>prefix-length</i>	Enter the prefix followed by the prefix length. Range: 0-128
default	Enter this keyword to set default parameters for all prefixes.
no-advertise	Enter this keyword to prevent the specified prefix from being advertised.
no-autoconfig	Enter this keyword to disable Stateless Address Autoconfiguration.
no-rtr-address	Enter this keyword to exclude the full router address from router advertisements (the R bit is not set).
off-link	Enter this keyword to advertise the prefix without stating to recipients that the prefix is either on-link or off-link.
<i>valid-lifetime</i> infinite	Enter the amount of time that the prefix is advertised, or enter the maximum value for an unlimited amount of time. Default: 2592000 Range: 0 to 4294967295. The maximum value means that the preferred lifetime does not expire for the valid-life time parameter.
<i>preferred-lifetime</i> infinite	Enter the amount of time that the prefix is preferred, or enter the maximum value for an unlimited amount of time. Default: 604800 Range: 0 to 4294967295. The maximum value indicates the preferred lifetime does not expire.

Command Mode INTERFACE

Command History	Version 8.3.19.0	Introduced on the S4820T
	Version 8.3.7.0	Introduced on the S4810
	Version 8.3.2.0	Introduced on the E-Series TeraScale, C-Series, and S-Series.

Usage Information

By default, all prefixes configured as addresses on the interface are advertised. This command allows control over the individual parameters per prefix; the default keyword can be used to use the default parameters for all prefixes. If a prefix has been configured with lifetime parameter values, the default values cannot be applied using the `ipv6 nd prefix default no-autoconfig` command.

ipv6 route

C E S

S4810

S4820T

Establish a static IPv6 route.

Syntax

```
ipv6 route ipv6-address prefix-length { ipv6-address | interface | interface ipv6-address }
[distance] [tag value] [permanent]
```

To remove the IPv6 route, use the `no ipv6 route ipv6-address prefix-length { ipv6-address | interface | interface ipv6-address } [distance] [tag value] [permanent]` command.

Parameters

<i>ipv6-address</i> <i>prefix-length</i>	Enter the IPv6 address in the X:X:X:X format followed by the prefix length in the /x format. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a loopback interface, enter the keyword <code>loopback</code> followed by a number from zero (0) to 16383. For the null interface, enter the keyword <code>null</code> followed by zero (0). For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN interface, enter the keyword <code>VLAN</code> followed by the vlan number. For a port channel interface, enter the keyword <code>port-channel</code> followed by the port channel number. <p>If you configure a static IPv6 route using an egress interface and enter the ping command to reach the destination IPv6 address, the ping operation may not work. Configure the IPv6 route using a next-hop IPv6 address in order for the ping command to detect the destination address.</p>
<i>ipv6-address</i>	(OPTIONAL) Enter the forwarding router IPv6 address in the X:X:X:X format. Note: The :: notation specifies successive hexadecimal fields of zeros
<i>distance</i>	(OPTIONAL) Enter a number as the metric distance assigned to the route. Range: 1 to 255
<i>tag value</i>	(OPTIONAL) Enter the keyword <code>tag</code> followed by a tag value number. Range: 1 to 4294967295

permanent	(OPTIONAL) Enter the keyword permanent to specify that the route is not to be removed, even if the interface assigned to that route goes down. Note: If you disable the interface with an IPv6 address associated with the keyword permanent , the route disappears from the routing table.
-----------	---

Defaults No default values or behavior

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

Example

```

FTOS(conf)#ipv6 route 44::0 /64 33::1 ?
<1-255>                               Distance metric for this route
permanent                               Permanent route
tag                                       Set tag for this route

FTOS(conf)#ipv6 route 55::0 /64 ?
X:X:X:X::X                               Forwarding router's address
gigabitethernet                           Gigabit Ethernet interface
loopback                                   Loopback interface
null                                       Null interface
port-channel                               Port channel interface
sonet                                       Sonet interface
tenGigabitethernet                         TenGigabit Ethernet interface
vlan                                       VLAN interface

FTOS(conf)#ipv6 route 55::0 /64 gigabitethernet 9/0 ?
<1-255>                               Distance metric for this route
X:X:X:X::X                               Forwarding router's address
permanent                               Permanent route
tag                                       Set tag for this route

FTOS(conf)#ipv6 route 55::0 /64 gigabitethernet 9/0 66::1 ?
<1-255>                               Distance metric for this route
permanent                               Permanent route
tag                                       Set tag for this route
FTOS#

```

Usage Information

When the interface goes down, FTOS withdraws the route. The route is re-installed, by FTOS, when the interface comes back up. When a recursive resolution is “broken,” FTOS withdraws the route. The route is re-installed, by FTOS, when the recursive resolution is satisfied.

After an IPv6 static route interface is created, if an IP address is not assigned to a peer interface, the peer must be manually pinged to resolve the neighbor information.

Related Commands

show ipv6 route	View the IPv6 configured routes.
---------------------------------	----------------------------------

ipv6 unicast-routing

C **E** **S** Enable IPv6 Unicast routing.

S4810

S4820T

Syntax ipv6 unicast-routing

To disable unicast routing, use the no ipv6 unicast-routing command.

Defaults Enabled

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced on S-Series
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Since this command is enabled by default, it does not appear in the running configuration. When unicast routing is disabled, the no ipv6 unicast-routing command is included in the running configuration. Whenever unicast routing is disabled or re-enabled, FTOS generates a syslog message indicating the action.

Disabling unicast routing on an E-Series chassis causes the following behavior:

- static and protocol learnt routes are removed from RTM and from the CAM; packet forwarding to these routes is terminated.
- connected routes and resolved neighbors remain in the CAM and new IPv6 neighbors are still discoverable
- additional protocol adjacencies (OSPFv3 and BGP4) are brought down and no new adjacencies are formed
- the IPv6 address family configuration (under router bgp) is deleted
- IPv6 Multicast traffic continues to flow unhindered

show ipv6 cam linecard

C **E** **S4810** Displays the IPv6 CAM entries for the specified line card.

S4820T

Syntax show ipv6 cam linecard *slot-number* port-set {*0-1*} [summary | index | ipv6 address]

Parameters	<i>slot-number</i>	Enter the line card slot ID number. Range: 0 to 13 on the E1200; 0 on 6 for E600, and 0 to 5 on the E300.
	<i>port-set</i>	Enter the Port Set to
	<i>summary</i>	(OPTIONAL) Enter the keyword <i>summary</i> to display a table listing network prefixes and the total number prefixes which can be entered into the IPv6 CAM.
	<i>index</i>	(OPTIONAL) Enter the index in the IPv6 CAM.
	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x/n format to display networks that have more specific prefixes. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros.

Defaults No default values or behavior.

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The forwarding table displays host route first, then displays route originated by routing protocol including static route.

The egress port section displays the egress port of the forwarding entry which is designated as:

- C for the Control Processor
- 1 for the Route Processor 1
- 2 for the Route Processor 2

If a link-local IPv6 address is statically configured and dynamically learned on a C-Series router, the dynamically-learned IPv6 address is displayed in `show ipv6 cam linecard` output, but the statically-configured IPv6 address may not be displayed. Use the `show ipv6 fib linecard` or `show ipv6 neighbors` commands to display statically-configured addresses of IPv6 neighbors.

Note: If a route has a mask greater than 64, no output will be displayed. Similarly, if there is more than one ECMP object with a destination route that has a mask greater than 64, if the first 64 bits in the destination routes of the ECMP objects are the same, only one route is installed in CAM even though multiple ECMP path entries exist.

Example (show ipv6 cam linecard fib)

```
FTOS#show ipv6 cam linecard 13 fib

Neighbor                               Mac-Addr           Port      VId
-----
```

```

[ 31] 2002:44:1:1::11          00:00:01:1a:1e:d5 Gi 13/2    0

Prefix                          Next-Hop                          Mac-Addr                          Port      VId  EC
-----
[ 3147] 100::/64                [ 0] 2002:44:1:1::11              -                                Gi 0/0    0 1
[ 0] 2002:44:1:24::11          -                                Gi 0/0    0 1
[ 0] 2002:44:1:23::11          -                                Gi 0/0    0 1
[ 0] 2002:44:1:21::11          -                                Gi 0/0    0 1
[ 0] 2002:44:1:20::11          -                                Gi 0/0    0 1
[ 0] 2002:44:1:19::11          -                                Gi 0/0    0 1

FTOS#
FTOS#show ipv6 cam linecard 1 port-set 0
Neighbor                          Mac-Addr                          Port      VId
-----
[ 1768] 500::1                   00:00:00:00:00:00                CP        100
[ 2724] 700::1                   00:00:00:00:00:00                CP         0
[ 3016] fe80::201:e8ff:fe5a:e59e  00:00:00:00:00:00                CP         0
[ 3452] fe80::201:e8ff:fe5a:e21f  00:00:00:00:00:00                CP         0

Prefix                          First-Hop                          Mac-Addr                          Port      VId  EC
-----
[ 4096] 500::/64                  ::                                00:00:00:00:00:00                CP         0
[ 4096] 700::/64                  ::                                00:00:00:00:00:00                CP         0

FTOS#

```

Example
(show ipv6 cam linecard)

show ipv6 cam stack-unit



Displays the IPv6 CAM entries for the specified stack-unit.

Syntax

show ipv6 cam stack-unit *unit-number* port-set {0-1} [summary | index | ipv6 address]

Parameters

<i>unit-number</i>	Enter the stack unit's ID number. Range: 0 to 11
<i>port-set</i>	Enter the Port Set to
<i>summary</i>	(OPTIONAL) Enter the keyword <i>summary</i> to display a table listing network prefixes and the total number prefixes which can be entered into the IPv6 CAM.
<i>index</i>	(OPTIONAL) Enter the index in the IPv6 CAM
<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x/n format to display networks that have more specific prefixes. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros.

Defaults

No default values or behavior.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced the S-Series

Usage Information

On the S4810 and S4820T, First-Hop information is not shown for installed routes in the IPv6 Content Addressable Memory (CAM). However, the same is shown in the Forwarding Information Base (FIB).

Note: If a route has a mask greater than 64, no output will be displayed, no output will be displayed for “show ipv6 cam stack-unit unit-number port-set {0-1} ipv6-address” but an equivalent /64 entry would be listed in the “show ipv6 cam stack-unit unit-number port-set {0-1}” output. Similarly, if there is more than one ECMP object with a destination route that has a mask greater than 64, if the first 64 bits in the destination routes of the ECMP objects are the same, only one route is installed in CAM even though multiple ECMP path entries exist.

Note: On the S4810 and S4820T, the self address will be displayed in the neighbor portion for the “show ipv6 cam stack-unit unit-number port-set” command.

show ipv6 control-plane icmp

S4810

Displays the status of the icmp control-plane setting for the Error Rate limit setting.

S4820T**Syntax** show ipv6 control-plane icmp**Default** 100**Command Mode** EXEC**Command History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.

Related Commands

[ipv6 flowlabel-zero](#) Configure IPv6 address auto-configuration for the management interface.

show ipv6 fib linecard

C E S4810

View all Forwarding Information Base entries.

S4820T**Syntax** show ipv6 fib linecard *slot-number* {summary | *ipv6-address*}**Parameters**

<i>slot-number</i>	Enter the number of the line card slot. E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300
--------------------	---

	summary	(OPTIONAL) Enter the keyword summary to view a summary of entries in IPv6 cam.
	ipv6-address	Enter the IPv6 address in the x:x:x::x/n format to display networks that have more specific prefixes. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros.
Command Mode	EXEC	
	EXEC Privilege	
Command History	Version 8.3.19.0 Introduced on the S4820T	
	Version 8.3.7.0 Introduced on the S4810	
	Version 8.2.1.0 Introduced on E-Series ExaScale	
	Version 7.8.1.0 Introduced on C-Series	
	Version 7.4.1.0 Introduced on E-Series TeraScale	

show ipv6 fib stack-unit

S **S4810**

View all Forwarding Information Base entries.

S4820T

Syntax show ipv6 fib stack-unit *unit-number* [summary | *ipv6-address*]

Parameters

<i>slot-number</i>	Enter the number of the stack unit. Range: 0 to 11
summary	(OPTIONAL) Enter the keyword summary to view a summary of entries in IPv6 cam.
ipv6-address	Enter the IPv6 address in the x:x:x::x/n format to display networks that have more specific prefixes. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros.

Command Mode EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced on S-Series

Usage Information

Host tables are not stored in CAM tables on S-Series platforms. Entries for camIndex will display as zero (0) on the show ipv6 fib stack-unit output for neighbor entries, such as ARP entries.

show ipv6 flowlabel-zero

S4810

Display the flow label zero setting.

S4820T

Syntax show ipv6 flowlabel-zero

Default Disabled

Command Mode EXEC

Command History

Version 8.3.19.0 Introduced on the S4820T.

Version 8.3.12.0 Introduced on the S4810.

Related Commands

[ipv6 nd dad attempts](#) Configure system to set the flow label field in the packets to zero.

show ipv6 interface

C **E** **S**

Display the status of interfaces configured for IPv6.

S4810

S4820T

Syntax show ipv6 interface *interface* [brief] [configured] [gigabitethernet *slot / slot/port*] [linecard *slot-number*] [loopback *interface-number*] [managementethernet *slot/port*] [port-channel *number*] [tengigabitethernet *slot / slot/port*] [fortyGigE *slot / slot/port*][vlan *vlan-id*]

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a Loopback interface, enter the keyword Loopback followed by a number from 0 to 16383.• For the Null interface, enter the keyword null followed by zero (0).• For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.• For a VLAN interface, enter the keyword VLAN.• For a port channel interface, enter the keyword port-channel.
brief	(OPTIONAL) View a summary of IPv6 interfaces.
configured	(OPTIONAL) View information on all IPv6 configured interfaces
gigabitethernet	(OPTIONAL) View information for an IPv6 gigabitethernet interface.

<code>linecard slot-number</code>	(OPTIONAL) View information for a specific IPv6 linecard or S-Series stack-unit Range: 0 to 13 on a E1200, 0 to 6 on a E600, and 0 to 5 on a E300. Range: 0 to 7 for C-Series Range: 0 to 7 for S55 only Range: 0 to 11 for S60, S4810, and S4820T
<code>managementethernet slot/port</code>	(OPTIONAL) View information on an IPv6 Management port. Enter the slot number (0-1) and port number zero (0).
<code>loopback</code>	(OPTIONAL) View information for IPv6 loopback interfaces.
<code>port-channel</code>	(OPTIONAL) View information for IPv6 port channels.
<code>tengigabitethernet</code>	(OPTIONAL) View information for an IPv6 tengigabitethernet interface.
<code>fortyGigE</code>	(OPTIONAL) View information for an IPv6 fortygigabitethernet interface.
<code>vlan</code>	(OPTIONAL) View information for IPv6 VLANs.

Defaults No default values or behavior

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.4.2.1	Introduced on S-Series
Version 8.2.1.0	Introduced on E-Series ExaScale. Support for the <code>managementethernet slot/port</code> parameter was added.
Version 7.8.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The Management port is enabled by default ([no shutdown](#)). If necessary, use the [ipv6 address](#) command to assign an IPv6 address to the Management port.

Example (show ipv6 interface)

```

FTOS#
FTOS#show ipv6 int te 0/5
TenGigabitEthernet 0/5 is up, line protocol is up
  IPv6 is enabled
  Link Local address: fe80::201:e8ff:fe8a:e8f7
  Global Unicast address(es):
    2001::1, subnet is 2001::/64
    2002::1, subnet is 2002::/120
    2003::1, subnet is 2003::/120
    2004::1, subnet is 2004::/32
  Global Anycast address(es):
  Joined Group address(es):
    ff02::1
    ff02::2
    ff02::1:ff00:1
    ff02::1:ff8a:e8f7
  ND MTU is 0

```

```

ICMP redirects are not sent
DAD is enabled, number of DAD attempts: 3
ND reachable time is 0 milliseconds
ND advertised reachable time is 0 milliseconds
ND advertised retransmit interval is 0 milliseconds
ND router advertisements are sent every 200 to 600 seconds
ND router advertisements live for 1800 seconds

```

FTOS#

FTOS#

```

FTOS#show ipv6 int man 0/0
ManagementEthernet 0/0 is up, line protocol is up
  IPv6 is enabled
  Link Local address: fe80::201:e8ff:fe8a:e8f7
  Global Unicast address(es):
    Actual address is 600::1, subnet is 600::/64
    Virtual-IP IPv6 address is not set
  Global Anycast address(es):
  Joined Group address(es):
    ff02::1
    ff02::1:ff00:1
    ff02::1:ff8a:e8f7
  ND MTU is 1500
  ICMP redirects are not sent
  DAD is enabled, number of DAD attempts: 3
  ND reachable time is 31000 milliseconds
  ND base reachable time is 30000 milliseconds
  ND retransmit interval is 1000 milliseconds
  ND hop limit is 64

```

FTOS#

FTOS#show ipv6 interface brief

```

GigabitEthernet 0/0          [up/up]
  fe80::201:e8ff:fe3a:143e
  10::1/64
...
ManagementEthernet 0/0     [up/up]
  fe80::201:e8ff:fe5d:b74c
  fdaa:bbbb:cccc:1004::50/64
...
Vlan 3                      [up/up]
  fe80::201:e8ff:fe3a:19b7
  7::1/64

```

Example
(show ipv6 interface managementethernet)

Example
(show ipv6 interface brief)

show ipv6 mld_host

S4810

Display the IPv6 MLD host counters.

S4820T

Syntax show ipv6 mld_host

Command Modes EXEC

Example MLD Host Traffic Counters
Elapsed time since counters cleared: 0028:33:52

	Received	Sent
Valid MLD Packets	97962	18036

```

Reports                79962                18034
Leaves                 ----                0
MLDv2 Queries         18000                ----
MLDv1 Queries         0                    ----
Errors:
Malformed Packets:   4510

```

Command History

```

Version 8.3.19.0   Introduced on the S4820T.
Version 8.3.12.0   Introduced on the S4810.

```

Usage Information

The following table describes the information in the output example:

Valid MLD Packets	The total number of packets received and sent from the last time the elapsed time was cleared.
Reports	The total number of reports (queries and unsolicited reports generated from joins or leaves) that have been received or sent.
Leaves	The number of Multicast leaves that have been sent.
MLDv1 queries	The number of MLDv1 queries that have been received.
MLDv2 queries	The number of MLDv2 queries that have been received.
Malformed Packets	The number of MLDv1 and MLDv2 packets that do not match the requirement for a valid MLD packet.

show ipv6 route

C **E** **S**

Displays the IPv6 routes.

S4810

S4820T

Syntax

```

show ipv6 route [ipv6-address prefix-length] [hostname] [all] [bgp as number] [connected]
[isis tag] [list prefix-list name] [ospf process-id] [rip] [static] [summary]

```

Parameter

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128. The :: notation specifies successive hexadecimal fields of zeros.
<i>prefix-length</i>	
<i>hostname</i>	(OPTIONAL) View information for this IPv6 routes with Host Name
<i>all</i>	(OPTIONAL) View information for all IPv6 routes
<i>bgp</i>	(OPTIONAL) View information for all IPv6 BGP routes
<i>connected</i>	(OPTIONAL) View only the directly connected IPv6 routes.
<i>isis</i>	(OPTIONAL) View information for all IPv6 IS-IS routes
<i>list</i>	(OPTIONAL) View the IPv6 prefix list
<i>ospf</i>	(OPTIONAL) View information for all IPv6 OSPF routes
<i>rip</i>	(OPTIONAL for E-Series only) View information for all IPv6 RIP routes
<i>static</i>	(OPTIONAL) View only routes configured by the ipv6 route command.
<i>summary</i>	(OPTIONAL) View a brief list of the configured IPv6 routes.

Defaults No default values or behavior

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series TeraScale

Example (E-Series)

```
FTOS#show ipv6 route

Codes: C - connected, L - local, S - static, R - RIP,
       B - BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated,
       O - OSPF, IA - OSPF inter area, N1 - OSPF NSSA external type 1,
       N2 - OSPF NSSA external type 2, E1 - OSPF external type 1,
       E2 - OSPF external type 2, i - IS-IS, L1 - IS-IS level-1,
       L2 - IS-IS level-2, IA - IS-IS inter area, * - candidate default,
Gateway of last resort is not set

      Destination  Dist/Metric,      Gateway,    Last Change
      -----
C     2001::/64 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2002::/120 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2003::/120 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2004::/32 [0/0]
      Direct, Gi 1/1, 00:28:49
L     fe80::/10 [0/0]
      Direct, Nu 0, 00:29:09
```

Example (S-Series)

```
FTOS#show ipv6 route

Codes: C - connected, L - local, S - static, R - RIP,
       B - BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated,
       O - OSPF, IA - OSPF inter area, N1 - OSPF NSSA external type 1,
       N2 - OSPF NSSA external type 2, E1 - OSPF external type 1,
       E2 - OSPF external type 2, i - IS-IS, L1 - IS-IS level-1,
       L2 - IS-IS level-2, IA - IS-IS inter area, * - candidate default,
Gateway of last resort is not set

      Destination  Dist/Metric,      Gateway,    Last Change
      -----
C     2001::/64 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2002::/120 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2003::/120 [0/0]
      Direct, Gi 1/1, 00:28:49
C     2004::/32 [0/0]
      Direct, Gi 1/1, 00:28:49
L     fe80::/10 [0/0]
      Direct, Nu 0, 00:29:09
```

Example
(show ipv6 route summary)

```
FTOS#show ipv6 route summary

Route Source           Active Routes   Non-active Routes
connected              5                0
static                 0                0
Total                  5                0
Total 5 active route(s) using 952 bytes
```

Table 26-1. show ipv6 route Command Example Fields

Field	Description
(undefined)	Identifies the type of route: <ul style="list-style-type: none"> • L = Local • C = connected • S = static • R = RIP • B = BGP • IN = internal BGP • EX = external BGP • LO = Locally Originated • O = OSPF • IA = OSPF inter area • N1 = OSPF NSSA external type 1 • N2 = OSPF NSSA external type 2 • E1 = OSPF external type 1 • E2 = OSPF external type 2 • i = IS-IS • L1 = IS-IS level-1 • L2 = IS-IS level-2 • IA = IS-IS inter-area • * = candidate default • > = non-active route • + = summary routes
Destination	Identifies the route's destination IPv6 address.
Gateway	Identifies whether the route is directly connected and on which interface the route is configured.
Dist/Metric	Identifies if the route has a specified distance or metric.
Last Change	Identifies when the route was last changed or configured.

trust ipv6-diffserv

C **E** **S** Allows the dynamic classification of IPv6 DSCP.

S4810

S4820T

Syntax trust ipv6-diffserv

To remove the definition, use the no trust ipv6-diffserv command.

Defaults This command has no default behavior or values.

Command Modes CONFIGURATION-POLICY-MAP-IN

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.7.0	Introduced on the S4810
Version 8.4.2.1	Introduced on C-Series and S-Series
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

When trust IPv6 diffserv is configured, matched bytes/packets counters are *not* incremented in the show qos statistics command.

Trust diffserv (IPv4) can co-exist with trust ipv6-diffserv in an Input Policy Map. Dynamic classification happens based on the mapping detailed in the following table.

Table 26-2. IPv6 -Diffserv Mapping

IPv6 Service Class Field	Queue ID
111XXXXX	7
110XXXXX	6
101XXXXX	5
100XXXXX	4
011XXXXX	3
010XXXXX	2
001XXXXX	1
000XXXXX	0

IPv6 Border Gateway Protocol (IPv6 BGP)

Overview

IPv6 Border Gateway Protocol (IPv6 BGP) is supported on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S4810**, or **S4820T**.

This chapter includes the following commands:

- [IPv6 BGP Commands](#)
- [IPv6 MBGP Commands](#)

IPv6 BGP Commands

Border Gateway Protocol (BGP) is an external gateway protocol that transmits interdomain routing information within and between Autonomous Systems (AS). BGP version 4 (BGPv4) supports classless interdomain routing and the aggregation of routes and AS paths. Basically, two routers (called neighbors or peers) exchange information including full routing tables and periodically send messages to update those routing tables.

The following commands allow you to configure and enable BGP.

- [aggregate-address](#)
- [bgp always-compare-med](#)
- [bgp bestpath as-path ignore](#)
- [bgp bestpath med confed](#)
- [bgp bestpath med missing-as-best](#)
- [bgp client-to-client reflection](#)
- [bgp cluster-id](#)
- [bgp confederation identifier](#)
- [bgp confederation peers](#)
- [bgp dampening](#)
- [bgp default local-preference](#)

- bgp enforce-first-as
- bgp fast-external-falover
- bgp four-octet-as-support
- bgp graceful-restart
- bgp log-neighbor-changes
- bgp non-deterministic-med
- bgp recursive-bgp-next-hop
- bgp regex-eval-optz-disable
- bgp router-id
- bgp soft-reconfig-backup
- capture bgp-pdu neighbor (ipv6)
- capture bgp-pdu max-buffer-size
- clear ip bgp as-number
- clear ip bgp ipv6-address
- clear ip bgp peer-group
- clear ip bgp ipv6 dampening
- clear ip bgp ipv6 flap-statistics
- clear ip bgp ipv6 unicast soft
- debug ip bgp
- debug ip bgp events
- debug ip bgp ipv6 dampening
- debug ip bgp ipv6 unicast soft-reconfiguration
- debug ip bgp keepalives
- debug ip bgp notifications
- debug ip bgp updates
- default-metric
- description
- distance bgp
- maximum-paths
- neighbor activate
- neighbor advertisement-interval
- neighbor allowas-in
- neighbor default-originate
- neighbor description
- neighbor distribute-list
- neighbor ebgp-multihop
- neighbor fall-over
- neighbor filter-list
- neighbor maximum-prefix
- neighbor X:X:X::X password

- neighbor next-hop-self
- neighbor peer-group (assigning peers)
- neighbor peer-group (creating group)
- neighbor peer-group passive
- neighbor remote-as
- neighbor remove-private-as
- neighbor route-map
- neighbor route-reflector-client
- neighbor send-community
- neighbor shutdown
- neighbor soft-reconfiguration inbound
- neighbor subnet
- neighbor timers
- neighbor update-source
- neighbor weight
- network
- network backdoor
- redistribute
- redistribute isis
- redistribute ospf
- router bgp
- show capture bgp-pdu neighbor
- show config
- show ip bgp ipv6 unicast
- show ip bgp ipv6 unicast cluster-list
- show ip bgp ipv6 unicast community
- show ip bgp ipv6 unicast community-list
- show ip bgp ipv6 unicast dampened-paths
- show ip bgp ipv6 unicast detail
- show ip bgp ipv6 unicast extcommunity-list
- show ip bgp ipv6 unicast filter-list
- show ip bgp ipv6 unicast flap-statistics
- show ip bgp ipv6 unicast inconsistent-as
- show ip bgp ipv6 unicast neighbors
- show ip bgp ipv6 unicast peer-group
- show ip bgp ipv6 unicast summary
- show ip bgp next-hop
- show ip bgp paths
- show ip bgp paths as-path
- show ip bgp paths community

- [show ip bgp paths extcommunity](#)
- [show ip bgp regexp](#)
- [timers bgp](#)

address-family

C E T

S4810

S4820T

Enable the IPv4 multicast or the IPv6 address family.

Syntax

address-family [ipv4 multicast| ipv6unicast]

Parameters

ipv4 multicast	Enter BGPv4 multicast mode.
ipv6 unicast	Enter BGPv6 mode.

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.4.2.1	Introduced on C-Series andS4810.
Version 6.5.1.0	Introduced on E-Series TeraScale

Usage Information

Enter ipv6 unicast to enter the BGP for IPv6 mode (CONF-ROUTER_BGPv6_AF).

aggregate-address

C E S4810

S4820T

Summarize a range of prefixes to minimize the number of entries in the routing table.

Syntax

aggregate-address *ipv6-address prefix-length* [advertise-map *map-name*] [as-set] [attribute-map *map-name*] [summary-only] [suppress-map *map-name*]

Parameters

<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
advertise-map <i>map-name</i>	(OPTIONAL) Enter the keywords advertise-map followed by the name of a configured route map to set filters for advertising an aggregate route.
as-set	(OPTIONAL) Enter the keyword as-set to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.

<code>attribute-map</code> <i>map-name</i>	(OPTIONAL) Enter the keywords <code>attribute-map</code> followed by the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.
<code>summary-only</code>	(OPTIONAL) Enter the keyword <code>summary-only</code> to advertise only the aggregate address. Specific routes will not be advertised.
<code>suppress-map</code> <i>map-name</i>	(OPTIONAL) Enter the keywords <code>suppress-map</code> followed by the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults Not configured.

Command Modes CONFIGURATION-ROUTER-BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.1	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.

Do not add the `as-set` parameter to the aggregate, if routes within the aggregate are constantly changing as the aggregate will flap to keep track of the changes in the AS_PATH.


In route maps used in the `suppress-map` parameter, routes meeting the deny clause are not suppress; in other words, they are allowed. The opposite is true: routes meeting the permit clause are suppressed.

If the route is injected via the `network` command, that route will still appear in the routing table if the `summary-only` parameter is configured in the `aggregate-address` command.

The `summary-only` parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the `neighbor distribute-list` command.

In the `show ip bgp ipv6 unicast` command, aggregates contain an 'a' in the first column and routes suppressed by the aggregate contain an 's' in the first column.

bgp always-compare-med



Allows you to enable comparison of the MULTI_EXIT_DISC (MED) attributes in the paths from different external ASs.

Syntax

`bgp always-compare-med`

To disable comparison of MED, enter `no bgp always-compare-med`.

Defaults Disabled (that is, the software only compares MEDs from neighbors within the same AS).

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Any update without a MED attribute is the least preferred route.

If you enable this command, use the [capture bgp-pdu max-buffer-size](#) * command to recompute the best path.

bgp bestpath as-path ignore

C **E** **S4810**
S4820T

Ignore the AS PATH in BGP best path calculations.

Syntax

bgp bestpath as-path ignore

To return to the default, enter no bgp bestpath as-path ignore.

Defaults

Disabled (that is, the software considers the AS_PATH when choosing a route as best).

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.4.2.1	Introduced on C-Series and S4810.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If you enable this command, use the [capture bgp-pdu max-buffer-size](#) * command to recompute the best path.

bgp bestpath med confed

C **E** **S4810**
S4820T

Enable MULTI_EXIT_DISC (MED) attribute comparison on paths learned from BGP confederations.

Syntax

bgp bestpath med confed

To disable MED comparison on BGP confederation paths, enter `no bgp bestpath med confed`.

Defaults Disabled.

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.4.2.1	Introduced on C-Series and S4810.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The software compares the MEDs only if the path contains no external autonomous system numbers.

If you enable this command, use the `capture bgp-pdu max-buffer-size *` command to recompute the best path.

bgp bestpath med missing-as-best

C **E** **S4810**
S4820T

During path selection, indicate preference to paths with missing MED (MULTI_EXIT_DISC) over those paths with an advertised MED attribute.

Syntax `bgp bestpath med missing-as-best`

To return to the default selection, use the `no bgp bestpath med missing-as-best` command.

Defaults Disabled

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The MED is a 4-byte unsigned integer value and the default behavior is to assume a missing MED as 4294967295. This command causes a missing MED to be treated as 0. During the path selection, paths with a lower MED are preferred over those with a higher MED.

bgp client-to-client reflection

C **E** **S4810**

S4820T

Allows you to enable route reflection between clients in a cluster.

Syntax

bgp client-to-client reflection

To disable client-to-client reflection, enter no bgp client-to-client reflection.

Defaults

Enabled when a route reflector is configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Route reflection to clients is not necessary if all client routers are fully meshed.

Related Commands

bgp cluster-id	Assign ID to a BGP cluster with two or more route reflectors.
neighbor route-reflector-client	Configure a route reflector and clients.

bgp cluster-id

C **E** **S4810**

S4820T

Assign a cluster ID to a BGP cluster with more than one route reflector.

Syntax

bgp cluster-id { *ip-address* | *number* }

To delete a cluster ID, use the no bgp cluster-id { *ip-address* | *number* } command.

Parameters

<i>ip-address</i>	Enter an IP address as the route reflector cluster ID.
<i>number</i>	Enter a route reflector cluster ID as a number from 1 to 4294967295.

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information


When a BGP cluster contains only one route reflector, the cluster ID is the route reflector's router ID. For redundancy, a BGP cluster may contain two or more route reflectors and you assign a cluster ID with the `bgp cluster-id` command. Without a cluster ID, the route reflector cannot recognize route updates from the other route reflectors within the cluster.

The default format for displaying the cluster-id is dotted decimal, but if you enter the cluster-id as an integer, it will be displayed as an integer.

Related Commands

bgp client-to-client reflection	Enable route reflection between route reflector and clients.
neighbor route-reflector-client	Configure a route reflector and clients.
show ip bgp ipv6 unicast cluster-list	View paths with a cluster ID.

bgp confederation identifier



Configure an identifier for a BGP confederation.

Syntax

`bgp confederation identifier as-number`

To delete a BGP confederation identifier, use the `no bgp confederation identifier as-number` command.

Parameters

<i>as-number</i>	Enter the AS number. Range: 1 to 65535
------------------	---

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The autonomous systems configured in this command are visible to the EBGp neighbors. Each autonomous system is fully meshed and contains a few connections to other autonomous systems. The next hop, MED, and local preference information is preserved throughout the confederation.

FTOS accepts confederation EBGp peers without a LOCAL_PREF attribute. The software sends AS_CONFED_SET and accepts AS_CONFED_SET and AS_CONF_SEQ.

bgp confederation peers

C E S4810

S4820T

Specify the Autonomous Systems (ASs) that belong to the BGP confederation.

Syntax

`bgp confederation peers as-number [...as-number]`

To enter no bgp confederation peer.

Parameters

<i>as-number</i>	Enter the AS number. Range: 1 to 65535
<i>...as-number</i>	(OPTIONAL) Enter up to 16 confederation numbers. Range: 1 to 65535.

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The Autonomous Systems configured in this command are visible to the EBGp neighbors. Each Autonomous System is fully meshed and contains a few connections to other Autonomous Systems.

After specifying autonomous systems numbers for the BGP confederation, recycle the peers to update their configuration.

Related Commands

bgp confederation identifier	Configure a confederation ID.
--	-------------------------------

bgp dampening

C E S4810

S4820T

Enable BGP route dampening and configure the dampening parameters.

Syntax

`bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]`

To disable route dampening, use the `no bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]` command.

Parameters

<i>half-life</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half after the half-life period expires. Range: 1 to 45. Default: 15 minutes
<i>reuse</i>	(OPTIONAL) Enter a number as the reuse value, which is compared to the flapping route's Penalty value. If the Penalty value is less than the reuse value, the flapping route is once again advertised (or no longer suppressed). Range: 1 to 20000. Default: 750
<i>suppress</i>	(OPTIONAL) Enter a number as the suppress value, which is compared to the flapping route's Penalty value. If the Penalty value is greater than the suppress value, the flapping route is no longer advertised (that is, it is suppressed). Range: 1 to 20000. Default: 2000
<i>max-suppress-time</i>	(OPTIONAL) Enter the maximum number of minutes a route can be suppressed. The default is four times the half-life value. Range: 1 to 255. Default: 60 minutes.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map. Only match commands in the configured route map are supported.

Defaults

Disabled.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale


Usage Information

If you enter bgp dampening, the default values for *half-life*, *reuse*, *suppress*, and *max-suppress-time* are applied. The parameters are position-dependent, therefore, if you configure one parameter, you must configure the parameters in the order they appear in the command.

Related Commands

show ip bgp ipv6 unicast dampened-paths	View the BGP paths
---	--------------------

bgp default local-preference



Change the default local preference value for routes exchanged between internal BGP peers.

Syntax `bgp default local-preference value`

To return to the default value, enter `no bgp default local-preference`.

Parameters

<i>value</i>	Enter a number to assign to routes as the degree of preference for those routes. When routes are compared, the higher the degree of preference or local preference value, the more the route is preferred. Range: 0 to 4294967295 Default: 100
--------------	--

Defaults

100

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The [bgp default local-preference](#) command setting is applied by all routers within the AS.

bgp enforce-first-as

S4810
 S4820T

Disable (or enable) enforce-first-as check for updates received from EBGp peers.

Syntax

`bgp enforce-first-as`

To turn off the default, use the `no bgp enforce-first-as` command.

Defaults

Enabled

Command Modes

ROUTER BGP

Usage Information

This is enabled by default, that is for all updates received from EBGp peers, BGP ensures that the first AS of the first AS segment is always the AS of the peer. If not, the update is dropped and a counter is incremented. Use the [show ip bgp ipv6 unicast neighbors](#) command to view the “failed enforce-first-as check counter.

If enforce-first-as is disabled, it can be viewed via the [show ip protocols](#) command.

Related Commands

show ip bgp ipv6 unicast neighbors	Display IPv6 routing information exchanged by BGP neighbors.
show ip protocols	View Information on routing protocols.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

bgp fast-external-fallover

C **E** **S4810****S4820T**

Enable the fast external fallover feature, which immediately resets the BGP session if a link to a directly connected external peer fails.

Syntax

bgp fast-external-fallover

To disable fast external fallover, enter no bgp fast-external-fallover.

Defaults

Enabled

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The [bgp fast-external-fallover](#) command appears in the [show config](#) command output.

bgp four-octet-as-support

C **E** **S4810****S4820T**

Enable 4-byte support for the BGP process

Syntax

bgp four-octet-as-support

To disable fast external fallover, enter no bgp four-octet-as-support.

Defaults

Disabled (supports 2-Byte format)

Command Modes

ROUTER BGP

Usage Information

Routers supporting 4-Byte ASNs advertise that function in the OPEN message. The behavior of a 4-Byte router will be slightly different depending on whether it is speaking to a 2-Byte router or a 4-Byte router.

When creating Confederations, all the routers in the Confederation must be 4 or 2 byte identified routers. You cannot mix them.

Where the 2-Byte format is 1-65535, the 4-Byte format is 1-4294967295. Both formats are accepted, and the advertisements will reflect the entered format.

For more information about using the 2 or 4-Byte format, refer to the *FTOS Configuration Guide*.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

bgp graceful-restart

C **E** **S4810**

S4820T

Enable graceful restart on a BGP neighbor, a BGP node, or designate a local router to support graceful restart as a receiver only.

Syntax

`bgp graceful-restart [restart-time seconds] [stale-path-time seconds] [role receiver-only]`

To return to the default, enter the `no bgp graceful-restart` command.

Parameters

<code>neighbor ip-address peer-group-name</code>	Enter the keyword <code>neighbor</code> followed by one of the options listed below: <ul style="list-style-type: none"> <code>ip-address</code> of the neighbor in IP address format of the neighbor <code>peer-group-name</code> of the neighbor peer group.
<code>restart-time seconds</code>	Enter the keyword <code>restart-time</code> followed by the maximum number of seconds needed to restart and bring up all peers. Range: 1 to 3600 seconds Default: 120 seconds
<code>stale-path-time seconds</code>	Enter the keyword <code>stale-path-time</code> followed by the maximum number of seconds to wait before restarting a peer's stale paths. Default: 360 seconds.
<code>role receiver-only</code>	Enter the keyword <code>role receiver-only</code> to designate the local router to support graceful restart as a receiver only.

Defaults

As above

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

This feature is advertised to BGP neighbors through a capability advertisement. In receiver only mode, BGP saves the advertised routes of peers that support this capability when they restart.

bgp log-neighbor-changes

C **E** **S4810**
S4820T

Enable logging of BGP neighbor resets.

Syntax

bgp log-neighbor-changes

To disable logging, enter no bgp log-neighbor-changes.

Defaults

Enabled

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The [bgp log-neighbor-changes](#) command appears in the [show config](#) command output.

Related Commands

show config	View the current configuration
-----------------------------	--------------------------------

bgp non-deterministic-med

C **E** **S4810**
S4820T

Compare MEDs of paths from different Autonomous Systems.

Syntax

bgp non-deterministic-med

To return to the default, enter no bgp non-deterministic-med.

Defaults

Disabled (that is, paths/routes for the same destination but from different ASs will not have their MEDs compared).

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810

Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

In non-deterministic mode, paths are compared in the order in which they arrive. This method can lead to FTOS choosing different best paths from a set of paths, depending on the order in which they are received from the neighbors since MED may or may not get compared between adjacent paths. In deterministic mode (no `bgp non-deterministic-med`), FTOS compares MED between adjacent paths within an AS group since all paths in the AS group are from the same AS.

When you change the path selection from deterministic to non-deterministic, the path selection for existing paths remains deterministic until you enter `capture bgp-pdu max-buffer-size` command to clear existing paths.

bgp recursive-bgp-next-hop

C E S4810
S4820T

Enable next-hop resolution through other routes learned by BGP.

Syntax

`bgp recursive-bgp-next-hop`

To disable next-hop resolution, use the `no bgp recursive-bgp-next-hop` command.

Defaults

Enabled

Command Modes

ROUTER BGP

Usage Information

This command is a *knob* to disable BGP next-hop resolution via BGP learned routes. During the next-hop resolution, only the *first* route that the next-hop resolves through is verified for the route's protocol source and is checked if the route is learned from BGP or not.

The `clear ip bgp` command is required for this command to take effect and to keep the BGP database consistent. Execute the `clear ip bgp` command right after executing this command.

Related Commands

capture bgp-pdu max-buffer-size	Description.
--	--------------

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

bgp regex-eval-optz-disable

C E S4810

S4820T

Disables the Regex Performance engine that optimizes complex regular expression with BGP.

Syntax

bgp regex-eval-optz-disable

To re-enable optimization engine, use the no bgp regex-eval-optz-disable command.

Defaults

Enabled by default

Command Modes

ROUTER BGP (conf-router_bgp)

Usage Information

BGP uses regular expressions (regex) to filter route information. In particular, the use of regular expressions to filter routes based on AS-PATHs and communities is quite common. In a large scale configuration, filtering millions of routes based on regular expressions can be quite CPU intensive, as a regular expression evaluation involves generation and evaluation of complex finite state machines.

BGP policies, containing regular expressions to match as-path and communities, tend to use a lot of CPU processing time, which in turn affects the BGP routing convergence. Additionally, the show bgp commands, which are filtered through regular expressions, use up CPU cycles particularly with large databases. The Regex Engine Performance Enhancement feature optimizes the CPU usage by caching and reusing regular expression evaluation results. This caching and reuse may be at the expensive of RP1 processor memory.

Related Commands

show ip protocols	View information on all routing protocols enabled and active on the E-Series.
-----------------------------------	---

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810.
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

bgp router-id

C E S4810

S4820T

Assign a user-given ID to a BGP router.

Syntax

bgp router-id *ip-address*

To delete a user-assigned IP address, enter no bgp router-id.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format to reset only that BGP neighbor.
-------------------	---

Defaults The router ID is the highest IP address of the Loopback interface or, if no Loopback interfaces are configured, the highest IP address of a physical interface on the router.

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Peering sessions are reset when you change the router ID of a BGP router.

bgp soft-reconfig-backup

C E T

S4810

S4820T

Use this command *only* when route-refresh is *not* negotiated between peers to avoid having a peer re-send BGP updates.

Syntax

bgp soft-reconfig-backup

To return to the default setting, use the no bgp soft-reconfig-backup command.

Defaults

Off

Command Modes

ROUTER BGPV6 ADDRESS FAMILY (conf-router_bgpv6_af)

Usage Information

When soft-reconfiguration is enabled for a neighbor and the clear ip bgp soft in is executed, the update database stored in the router is replayed and updates are reevaluated. With this command, the replay and update process is triggered only if route-refresh request is *not* negotiated with the peer. If the request is indeed negotiated (upon execution of clear ip bgp soft in), then BGP sends a route-refresh request to the neighbor and receives all of the peer's updates.

Related Commands

clear ip bgp ipv6 unicast soft in	Activate inbound policies for IPv6 routes without resetting the BGP TCP session.
---	--

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv4 multicast and IPv6 unicast address families
Version 7.8.1.0	Introduced support on S4810
Version 7.7.1.0	Introduced support on C-Series
Version 7.2.1.0	Introduced on E-Series TeraScale

capture bgp-pdu neighbor (ipv6)

C E S4810

Enable capture of an IPv6 BGP neighbor packet.

S4820T

Syntax

capture bgp-pdu neighbor *ipv6-address* direction { both | rx | tx }

To disable capture of the IPv6 BGP neighbor packet, use the no capture bgp-pdu neighbor *ipv6-address* command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address of the target BGP neighbor.
direction { both rx tx }	Enter the keyword direction and a direction— either rx for inbound, tx for outbound, or both.

Defaults

Not configured.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

capture bgp-pdu max-buffer-size	Enable route reflection between route reflector and clients.
show capture bgp-pdu neighbor	Configure a route reflector and clients.
capture bgp-pdu neighbor	Enable capture of an IPv4 BGP neighbor packet.

capture bgp-pdu max-buffer-size

C E S4810

Set the size of the BGP packet capture buffer. This buffer size pertains to both IPv4 and IPv6 addresses.

S4820T

Syntax

capture bgp-pdu max-buffer-size *100-102400000*

Parameters

<i>100-102400000</i>	Enter a size for the capture buffer.
----------------------	--------------------------------------

Defaults

40960000 bytes

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

capture bgp-pdu neighbor (ipv6)	Enable capture of an IPv6 BGP neighbor packet.
show capture bgp-pdu neighbor	Configure a route reflector and clients.

clear ip bgp * (asterisk)

C E **S4810****S4820T**

Reset all BGP sessions in the specified category on the E-Series. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax

```
clear ip bgp * [ipv4 multicast soft [in | out] | ipv6 unicast soft [in | out] | soft [in | out]]
```

Parameters

*	Enter an asterisk (*) to reset all BGP sessions.
ipv4 multicast soft [in out]	(OPTIONAL) This keyword sequence sets options within the a specified IPv4 address family.
ipv6 unicast soft [in out]	(OPTIONAL) This keyword sequence sets options within the a specified IPv6 address family.
soft	(OPTIONAL) Enter the keyword soft to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration. Note: If you enter <code>clear ip bgp ip6-address soft</code> , both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword in to activate only inbound policies.
out	(OPTIONAL) Enter the keyword out to activate only outbound policies.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp as-number

C E **S4810****S4820T**

Reset BGP sessions on the E-Series. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax

```
clear ip bgp as-number [flap-statistics | ipv4 {multicast {flap-statistics | soft {in | out}} |
unicast {flap-statistics | soft {in | out}} | ipv6 unicast {flap-statistics | soft {in | out}} soft [in
| out]
```

Parameters

<i>as-number</i>	Enter an autonomous system (AS) number to reset neighbors belonging to that AS. If used without a qualifier, the keyword resets all neighbors belonging to that AS. Range: 1 to 65535
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to clear all flap statistics belonging to that AS or a specified address family within that AS.
ipv4	(OPTIONAL) Enter the keyword ipv4 to select options for that address family.
ipv6	(OPTIONAL) Enter the keyword ipv6 to select options for that address family.
unicast	(OPTIONAL) Enter the keyword unicast to select the unicast option within the selected address family.
multicast	(OPTIONAL) Enter the keyword multicast to select the multicast option within the selected address family. Multicast is supported on IPv4 only
soft	(OPTIONAL) Enter the keyword soft to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration. Note: If you enter <code>clear ip bgp <i>ipv6-address</i> soft</code> , both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword in to activate only inbound policies.
out	(OPTIONAL) Enter the keyword out to activate only outbound policies.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp ipv6-address

C **E** **S4810**
S4820T

Reset BGP sessions specific to an IPv6 address on the E-Series. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax

```
clear ip bgp ipv6-address [flap-statistics | ipv4 {multicast {flap-statistics | soft {in | out}} |
unicast {flap-statistics | soft {in | out}} | ipv6 unicast {flap-statistics | soft {in | out}} soft [in
| out]
```

Parameters

<i>ipv6-address</i>	Enter an IPv6 address to reset neighbors belonging to that IP. Used without a qualifier, the keyword resets all neighbors belonging to that IP.
flap-statistics	(OPTIONAL) Enter the keyword <i>flap-statistics</i> to clear all flap statistics belonging to that AS or a specified address family within that IP.
ipv4	(OPTIONAL) Enter the keyword <i>ipv4</i> to select options for that address family.
ipv6	(OPTIONAL) Enter the keyword <i>ipv6</i> to select options for that address family.
unicast	(OPTIONAL) Enter the keyword <i>unicast</i> to select the unicast option within the selected address family.
multicast	(OPTIONAL) Enter the keyword <i>multicast</i> to select the multicast option within the selected address family. Multicast is supported on IPv4 only
soft	(OPTIONAL) Enter the keyword <i>soft</i> to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration. Note: If you enter <i>clear ip bgp ipv6-address soft</i> , both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword <i>in</i> to activate only inbound policies.
out	(OPTIONAL) Enter the keyword <i>out</i> to activate only outbound policies.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp peer-group

C E S4810

Reset a peer-group's BGP sessions.

S4820T

Syntaxclear ip bgp peer-group *peer-group-name***Parameters**

<i>peer-group-name</i>	Enter the peer group name to reset the BGP sessions within that peer group.
------------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp ipv6 dampening

C **E** **S4810**

Clear information on route dampening and return suppressed route to active state.

S4820T

Syntax

clear ip bgp ipv6 unicast dampening [*ipv6-address*]

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
---------------------	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

After you enter this command, the software deletes history routes and returns suppressed routes to active state.

clear ip bgp ipv6 flap-statistics

C **E** **S4810**

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

S4820T

Syntax

clear ip bgp ipv6 unicast flap-statistics [*ipv6-address* | filter-list *as-path-name* | regexp *regular-expression*]

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
---------------------	---

<code>filter-list <i>as-path-name</i></code>	(OPTIONAL) Enter the keyword <code>filter-list</code> followed by the name of a configured AS-PATH list.
<code>regexp <i>regular-expression</i></code>	(OPTIONAL) Enter the keyword <code>regexp</code> followed by regular expressions. Use one or a combination of the following: <ul style="list-style-type: none"> • (period) matches on any single character, including white space * (asterisk) matches on sequences in a pattern (zero or more sequences) + (plus sign) matches on sequences in a pattern (one or more sequences) ? (question mark) matches sequences in a pattern (0 or 1 sequences) [] (brackets) matches a range of single-character patterns. ^ (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.) \$ (dollar sign) matches the end of the output string.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If you enter `clear ip bgp ipv6 flap-statistics` without any parameters, all statistics are cleared.

Related Commands

<code>show ip bgp ipv6 unicast flap-statistics</code>	View BGP flap statistics.
---	---------------------------

clear ip bgp ipv6 unicast soft

C E T

S4810

S4820T

Clear and reapply policies for IPv6 unicast routes without resetting the TCP connection; that is, perform BGP soft reconfiguration.

Syntax

```
clear ip bgp { * | as-number | ipv4-neighbor-addr | ipv6-neighbor-addr | peer-group name }
ipv6 unicast soft [in | out]
```

Parameters

*	Clear and reapply policies for all BGP sessions.
<i>as-number</i>	Clear and reapply policies for all neighbors belonging to the AS. Range: 0-65535 (2-Byte) <i>or</i> 1-4294967295 (4-Byte) <i>or</i> 0.1-65535.65535 (Dotted format)
<i>ipv4-neighbor-addr</i> <i>ipv6-neighbor-addr</i>	Clear and reapply policies for a neighbor.

<i>peer-group name</i>	Clear and reapply policies for all BGP routers in the specified peer group.
<i>ipv6 unicast</i>	Clear and reapply policies for all IPv6 unicast routes.
<i>in</i>	Reapply only inbound policies. Note: If you enter soft , without an in or out option, both inbound and outbound policies are reset.
<i>out</i>	Reapply only outbound policies. Note: If you enter soft , without an in or out option, both inbound and outbound policies are reset.




Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv4 multicast and IPv6 unicast routes
Version 7.8.1.0	Introduced support on S4810
Version 7.7.1.0	Introduced support on C-Series
Version 7.2.1.0	Introduced on the E-Series TeraScale

debug ip bgp



Allows you to view all information on BGP, including BGP events, keepalives, notifications, and updates.

Syntax

`debug ip bgp [ipv6-address | peer-group peer-group-name] [in | out]`

To disable all BGP debugging, enter `no debug ip bgp`.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	Enter the keyword peer-group followed by the name of the peer group.
<i>in</i>	(OPTIONAL) Enter the keyword in to view only information on inbound BGP routes.
<i>out</i>	(OPTIONAL) Enter the keyword out to view only information on outbound BGP routes.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

To view information on both incoming and outgoing routes, do not include the in and out parameters in the debugging command. The in and out parameters cancel each other; for example, if you enter `debug ip bgp in` and then enter `debug ip bgp out`, you will not see information on the incoming routes.

Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

Related Commands

debug ip bgp events	View information about BGP events.
debug ip bgp keepalives	View information about BGP keepalives.
debug ip bgp notifications	View information about BGP notifications.
debug ip bgp updates	View information about BGP updates.

debug ip bgp events

C **E** **S4810**

S4820T

Allows you to view information on local BGP state changes and other BGP events.

Syntax

`debug ip bgp [ipv6-address | peer-group peer-group-name] events [in | out]`

To disable debugging, use the `no debug ip bgp ipv6-address | peer-group peer-group-name] events` command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
peer-group <i>peer-group-name</i>	(OPTIONAL) Enter the keyword peer-group followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword in to view only events on inbound BGP messages.
out	(OPTIONAL) Enter the keyword out to view only events on outbound BGP messages.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Enter the `no debug ip bgp` command to remove all configured debug commands for BGP.

debug ip bgp ipv6 dampening

C E S4810

View information on IPv6 routes being dampened.

S4820T

Syntax

debug ip bgp ipv6 unicast dampening [in | out]

To disable debugging, enter no debug ip bgp ipv6 unicast dampening.

Parameters

in	(OPTIONAL) Enter the keyword in to view only inbound dampened routes.
out	(OPTIONAL) Enter the keyword out to view only outbound dampened routes.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Enter **no debug ip bgp** command to remove all configured debug commands for BGP.

Related Commands

show ip bgp ipv6 unicast dampened-paths	View BGP dampened routes.
---	---------------------------

debug ip bgp ipv6 unicast soft-reconfiguration

C E T

Enable soft-reconfiguration debugging for IPv6 unicast routes.

S4810

S4820T

Syntax

debug ip bgp [*ipv4-address* | *ipv6-address* | *peer-group-name*] ipv6 unicast soft-reconfiguration


To disable debugging, use the no debug ip bgp [*ipv4-address* | *ipv6-address* | *peer-group-name*] ipv6 unicast soft-reconfiguration command.

Parameters

<i>ipv4-address</i> s <i>ipv6-address</i> s	Enter the IP address of the neighbor on which you want to enable soft-reconfiguration debugging.
<i>peer-group-name</i>	Enter the name of the peer group on which you want to enable soft-reconfiguration debugging.
ipv6 unicast	Debug soft reconfiguration for IPv6 unicast routes.

Defaults	Disabled										
Command Modes	EXEC Privilege										
Usage Information	This command turns on BGP soft-reconfiguration inbound debugging for IPv6 unicast routes. If no neighbor is specified, debug is turned on for all neighbors.										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.4.1.0</td> <td>Added support for IPv4 multicast and IPv6 unicast routes</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support on S4810</td> </tr> <tr> <td>Version 7.7.1.0</td> <td>Introduced support on C-Series</td> </tr> <tr> <td>Version 7.2.1.0</td> <td>Introduced on the E-Series TeraScale</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.4.1.0	Added support for IPv4 multicast and IPv6 unicast routes	Version 7.8.1.0	Introduced support on S4810	Version 7.7.1.0	Introduced support on C-Series	Version 7.2.1.0	Introduced on the E-Series TeraScale
Version 8.3.19.0	Introduced on S4820T										
Version 8.4.1.0	Added support for IPv4 multicast and IPv6 unicast routes										
Version 7.8.1.0	Introduced support on S4810										
Version 7.7.1.0	Introduced support on C-Series										
Version 7.2.1.0	Introduced on the E-Series TeraScale										

debug ip bgp keepalives



Allows you to view information about BGP keepalive messages.

Syntax

`debug ip bgp [ipv6-address | peer-group peer-group-name] keepalives [in | out]`

To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] keepalives [in | out]` command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keyword <code>peer-group</code> followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword <code>in</code> to view only inbound keepalive messages.
out	(OPTIONAL) Enter the keyword <code>out</code> to view only outbound keepalive messages.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Enter the `no debug ip bgp` command to remove all configured debug commands for BGP.

debug ip bgp notifications

C E S4810

S4820T

Allows you to view information about BGP notifications received from neighbors.

Syntax

debug ip bgp [*ipv6-address* | peer-group *peer-group-name*] notifications [in | out]

To disable debugging, use the no debug ip bgp [*ip-address* | peer-group *peer-group-name*] notifications [in | out] command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
peer-group <i>peer-group-name</i>	(OPTIONAL) Enter the keyword peer-group followed by the name of the peer group.
in	(OPTIONAL) Enter the keyword in to view BGP notifications received from neighbors.
out	(OPTIONAL) Enter the keyword out to view BGP notifications sent to neighbors.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Enter the [no debug ip bgp](#) command to remove all configured debug commands for BGP.

debug ip bgp updates

C E S4810

S4820T

Allows you to view information about BGP updates.

Syntax

debug ip bgp [*ipv6-address* | peer-group *peer-group-name* | ipv6 unicast [*ipv6-address*]] updates [in | out | prefix-list *prefix-list-name*]

To disable debugging, use the no debug ip bgp [*ip-address* | peer-group *peer-group-name* | ipv6 unicast [*ipv6-address*]] updates [in | out] command.

Parameters	
<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keyword <i>peer-group</i> followed by the name of the peer group.
<i>ipv6 unicast [ipv6-address]</i>	(OPTIONAL) Enter the keyword <i>ipv6 unicast</i> , and, optionally, an <i>ipv6</i> address.
<i>in</i>	(OPTIONAL) Enter the keyword <i>in</i> to view only BGP updates received from neighbors.
<i>out</i>	(OPTIONAL) Enter the keyword <i>out</i> to view only BGP updates sent to neighbors.

Command Modes EXEC Privilege

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information Enter the [no debug ip bgp](#) command to remove all configured debug commands for BGP.

default-metric

C **E** **S4810**
S4820T

Allows you to change the metrics of redistributed routes to locally originated routes. Use this command with the [redistribute](#) command.

Syntax *default-metric number*

To return to the default setting, enter *no default-metric*.

Parameters	
<i>number</i>	Enter a number as the metric to be assigned to routes from other protocols. Range: 1 to 4294967295.

Defaults 0

Command Modes ROUTER BGP

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The [default-metric](#) command in BGP sets the value of the BGP MULTI_EXIT_DISC (MED) attribute for redistributed routes only.

Related Commands

bgp always-compare-med	Enable comparison of all BGP MED attributes.
redistribute	Redistribute routes from other routing protocols into BGP.

description

C **E** **S4810**
S4820T

Enter a description of the BGP routing protocol

Syntax

description { *description* }

To remove the description, use the no description { *description* } command.

Parameters

<i>description</i>	Enter a description to identify the BGP protocol (80 characters maximum).
--------------------	---

Defaults

No default behavior or values

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

router bgp	Enter ROUTER mode on the switch.
----------------------------	----------------------------------

distance bgp

C **E** **S4810**
S4820T

Configure three administrative distances for routes.

Syntax

distance bgp *external-distance internal-distance local-distance*

To return to default values, enter no distance bgp.

Parameters

<i>external-distance</i>	Enter a number to assign to routes learned from a neighbor external to the AS. Range: 1 to 255. Default: 20
--------------------------	---

<i>internal-distance</i>	Enter a number to assign to routes learned from a router within the AS. Range: 1 to 255. Default: 200
<i>local-distance</i>	Enter a number to assign to routes learned from networks listed in the network command. Range: 1 to 255. Default: 200

Defaults

external-distance = 20; *internal-distance* = 200; *local-distance* = 200.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale




Caution: Dell Force10 recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.

Usage Information

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table.

Routes from confederations are treated as internal BGP routes.

maximum-paths



Configure the maximum number of parallel routes (multipath support) BGP supports.

Syntax

maximum-paths { ebgp | ibgp } *number*

To return to the default values, enter no maximum-paths.

Parameters

<i>ebgp</i>	Enter the keyword <i>ebgp</i> to enable multipath support for External BGP routes.
<i>ibgp</i>	Enter the keyword <i>ibgp</i> to enable multipath support for Internal BGP routes.
<i>number</i>	Enter a number as the maximum number of parallel paths. Range: 1 to 16 Default: 1

Defaults

1

Command Modes

ROUTER BGPV6-ADDRESS FAMILY


Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If you enable this command, use the [capture bgp-pdu max-buffer-size](#) command to recompute the best path.

neighbor activate



This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } activate

To disable, use the no neighbor { *ipv6-address* | *peer-group-name* } activate command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Identify a peer group by name.
activate	Enter the keyword activate to enable the identified neighbor or peer group in the new AFI/SAFI.

Defaults

Disabled

Command Modes

ROUTER BGPV6-ADDRESS FAMILY


Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

By default, when a neighbor/peer group configuration is created in the Router BGP context, it is enabled for the IPv6/Unicast AFI/SAFI. By using activate in the new context, the neighbor/peer group is enabled for AFI/SAFI.

neighbor advertisement-interval



Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } advertisement-interval *seconds*

To return to the default value, use the `no neighbor { ipv6-address | peer-group-name } advertisement-interval` command.

Parameters	
<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. Range: 0 to 600 seconds. Default: 5 seconds for internal BGP peers; 30 seconds for external BGP peers.

Defaults *seconds* = 5 seconds (internal peers); *seconds* = 30 seconds (external peers)

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor allowas-in

C **E** **S4810**

S4820T

Set the number of times an AS number can occur in the AS path

Syntax

`neighbor { ip-address | peer-group-name } allowas-in number`

To return to the default value, use the `no neighbor { ip-address | peer-group-name } allowas-in` command.

Parameters	
<i>ip-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>number</i>	Enter a number of times to allow this neighbor ID to use the AS path. Range: 1 to 10.

Defaults Not configured.

Command Modes ROUTER BGP

Related Commands	
bgp four-octet-as-support	Enable 4-Byte support for the BGP process.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor default-originate

C E S4810

S4820T

Inject the default route to a BGP peer or neighbor.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } default-originate [route-map *map-name*]

To remove a default route, use the no neighbor { *ipv6-address* | *peer-group-name* } default-originate [route-map *map-name*] command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the default route of all routers in that peer group.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If you apply a route map to a BGP peer or neighbor with the [neighbor default-originate](#) command configured, the software does not apply the set filters in the route map to that BGP peer or neighbor.

neighbor description

C E S4810

S4820T

Assign a character string describing the neighbor or group of neighbors (peer group).


Syntax

neighbor { *ipv6-address* | *peer-group-name* } description *text*

To delete a description, use the no neighbor { *ipv6-address* | *peer-group-name* } description *text* command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group.
	<i>text</i>	Enter a continuous text string up to 80 characters.
	Defaults	Not configured.
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor distribute-list



Distribute BGP information via an established prefix list.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } distribute-list *prefix-list-name* { in | out }

To delete a neighbor distribution list, use the no neighbor { *ipv6-address* | *peer-group-name* } distribute-list *prefix-list-name* { in | out } command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group.
	<i>prefix-list-name</i>	Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
	in	Enter the keyword in to distribute only inbound traffic.
	out	Enter the keyword out to distribute only outbound traffic.
Defaults	Not configured.	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	Other BGP filtering commands include: neighbor filter-list and neighbor route-map .	

**Related
Commands**

neighbor filter-list	Assign a AS-PATH list to a neighbor or peer group.
neighbor route-map	Assign a route map to a neighbor or peer group.

neighbor ebgp-multihop

C **E** **S4810**
S4820T

Attempt and accept BGP connections to external peers on networks that are not directly connected.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } ebgp-multihop [*tvl*]

To disallow and disconnect connections, use the no neighbor { *ipv6-address* | *peer-group-name* } ebgp-multihop [*tvl*] command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>tvl</i>	(OPTIONAL) Enter the number of hops as the Time to Live (ttl) value. Range: 1 to 255. Default: 255

Defaults

Disabled.

Command Modes

ROUTER BGP

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

**Usage
Information**

To prevent loops, the [neighbor ebgp-multihop](#) command will not install default routes of the multihop peer. Networks not directly connected are not considered valid for best path selection.

neighbor fall-over

C **E** **S4810**
S4820T

Enable or disable fast fall-over for BGP neighbors.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } fall-over

To disable, use the no neighbor { *ipv6-address* | *peer-group-name* } fall-over command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group.
Defaults	Disabled	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	When fall-over is enabled, BGP keeps track of IP or IPv6 reachability to the peer remote address and the peer local address. Whenever either address becomes unreachable (i.e, no active route exists in the routing table for peer IP or IPv6 destination/local address), BGP brings down the session with the peer.	
Related Commands	show ip bgp ipv6 unicast neighbors	Display IPv6 routing information exchanged by BGP neighbors.

neighbor filter-list

C **E** **S4810**

S4820T

Configure a BGP filter based on the AS-PATH attribute.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } filter-list *as-path-name* { in | out }

To delete a BGP filter, use the no neighbor { *ipv6-address* | *peer-group-name* } filter-list *as-path-name* { in | out } command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
	<i>as-path-name</i>	Enter the name of an established AS-PATH access list. If the AS-PATH access list is not configured, the default is permit (to allow routes). (16 characters maximum)
	in	Enter the keyword in to filter inbound BGP routes.
	out	Enter the keyword out to filter outbound BGP routes.
	Defaults	Not configured.
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor maximum-prefix

C **E** **S4810**

Control the number of network prefixes received.

S4820T**Syntax**

```
neighbor { ipv6-address | peer-group-name } maximum-prefix maximum [ threshold ]
[ warning-only ]
```

To return to the default values, use the `no neighbor { ipv6-address | peer-group-name } maximum-prefix maximum [threshold] [warning-only]` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. Range: 1 to 4294967295.
<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the <i>maximum</i> value. When the number of prefixes reaches this percentage of the <i>maximum</i> value, the E-Series software sends a message. Range: 1 to 100 percent. Default: 75
<i>warning-only</i>	(OPTIONAL) Enter the keyword <code>warning-only</code> to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults*threshold* = 75**Command Modes**

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If the [neighbor maximum-prefix](#) is configured and the neighbor receives more prefixes than allowed by the [neighbor maximum-prefix](#) command configuration, the neighbor goes down and the [show ip bgp ipv6 unicast summary](#) command displays (prfxd) in the State/PfxRcd column for that neighbor. The neighbor remains down until you enter the [capture bgp-pdu max-buffer-size](#) command for the neighbor or the peer group to which the neighbor belongs or you enter [neighbor shutdown](#) and [neighbor no shutdown](#) commands.

Related Commands

show ip bgp ipv6 unicast summary	Displays the current BGP configuration.
--	---

neighbor X:X:X::X password

C **E** **T**

Enable TCP MD5 Authentication for an IPv6 BGP peer session.

S4810

S4820T

Syntax

neighbor x:x:x::x password {7 <encrypt-pass> | <clear-pass>}

To return to the default setting, use the no neighbor x:x:x::x password command.

Parameters

<i>encrypt-pass</i>	Enter the encrypted password.
<i>clear-pass</i>	Enter the clear text password.

Defaults

Disabled.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series TeraScale

Usage Information

The TCP session is authentication and hence prevents the data from being compromised.

neighbor next-hop-self

C **E** **S4810**

S4820T

Allows you to configure the router as the next hop for a BGP neighbor. (This command is used for IBGP).

Syntax

neighbor { *ipv6-address* | *peer-group-name* } next-hop-self

To return to the default setting, use the no neighbor { *ipv6-address* | *peer-group-name* } next-hop-self command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.
Defaults	Disabled.	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	If the set ipv6 next-hop command in the ROUTE-MAP mode is configured, its configuration takes precedence over the neighbor next-hop-self command.	

neighbor peer-group (assigning peers)

C **E** **S4810**
S4820T

Allows you to assign one peer to a existing peer group.

Syntax

`neighbor ipv6-address peer-group peer-group-name`

To delete a peer from a peer group, use the `no neighbor ipv6-address peer-group peer-group-name` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group <i>peer-group-name</i></i>	Enter the keyword peer-group followed by the name of a configured peer group. (maximum 16 characters)
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	You can assign up to 64 peers to one peer group.	

When you add a peer to a peer group, it inherits all the peer group's configured parameters. A peer cannot become part of a peer group if any of the following commands are configured on the peer:

- [neighbor advertisement-interval](#)
- [neighbor distribute-list out](#)
- [neighbor filter-list out](#)
- [neighbor next-hop-self](#)
- [neighbor route-map out](#)
- [neighbor route-reflector-client](#)
- [neighbor send-community](#)

A neighbor may keep its configuration after it was added to a peer group if the neighbor's configuration is more specific than the peer group's, and the neighbor's configuration does not affect outgoing updates.

A peer group must exist before you add a peer to it. If the peer group is disabled (shutdown) the peers within the group are also disabled (shutdown).

Related Commands

capture bgp-pdu max-buffer-size	Resets BGP sessions.
neighbor peer-group (creating group)	Create a peer group.
show ip bgp ipv6 unicast peer-group	View BGP peers.
show ip bgp ipv6 unicast neighbors	View BGP neighbors configurations.

neighbor peer-group (creating group)

C **E** **S4810**

Allows you to create a peer group and assign it a name.

S4820T

Syntax

`neighbor peer-group-name peer-group`

To delete a peer group, use the `no neighbor peer-group-name peer-group` command.

Parameters

<i>peer-group-name</i>	Enter a text string up to 16 characters long as the name of the peer group.
------------------------	---

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

When a peer group is created, it is disabled (shut mode).

Related Commands

neighbor peer-group (assigning peers)	Assign routers to a peer group.
neighbor remote-as	Assign a indirectly connected AS to a neighbor or peer group.
neighbor shutdown	Disable a peer or peer group.

neighbor peer-group passive

C **E** **S4810**
S4820T

Enable passive peering on a BGP peer group, that is, the peer group does not send an OPEN message, but will respond to one.

Syntax

neighbor *peer-group-name* peer-group passive

To delete a passive peer-group, use the no neighbor *peer-group-name* peer-group passive command.

Parameters

<i>peer-group-name</i>	Enter a text string up to 16 characters long as the name of the peer group.
------------------------	---

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

After you configure a peer group as passive, you must assign it a subnet using the [neighbor subnet](#) command.

Related Commands

neighbor subnet	Assign a subnet to a dynamically-configured BGP neighbor.
---------------------------------	---

neighbor remote-as

C **E** **S4810**
S4820T

Create and specify the remote peer to the BGP neighbor.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } remote-as *number*

To delete a remote AS entry, use the no neighbor { *ipv6-address* | *peer-group-name* } remote-as *number* command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to enter the remote AS into routing tables of all routers within the peer group.
	<i>number</i>	Enter a number of the AS. Range: 1 to 65535.
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	<p>If the <i>number</i> parameter is the same as the AS number used in the router bgp command, the remote AS entry in the neighbor is considered an internal BGP peer entry.</p> <p>This command creates a peer and the newly created peer is disabled (shutdown).</p>	
Related Commands	router bgp	Enter the ROUTER BGP mode and configure routes in an AS.

neighbor remove-private-as

C **E** **S4810**

S4820T

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } remove-private-as

To return to the default, use the no neighbor { *ipv6-address* | *peer-group-name* } remove-private-as command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to remove the private AS numbers
Defaults	Disabled (that is, private AS number are not removed).	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810

Version 8.2.1.0	Introduced on E-Series ExaScale
-----------------	---------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

Usage Information

Applies to EBGP neighbors only.

If the AS-PATH contains both public and private AS number or contains AS numbers of an EBGP neighbor, the private AS numbers are not removed.

If a confederation contains private AS numbers in its AS-PATH, the software removes the private AS numbers only if they follow the confederation numbers in the AS path.

Private AS numbers are 64512 to 65535.

neighbor route-map

C **E** **S4810**

S4820T

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } route-map *map-name* { in | out }

To remove the route map, use the no neighbor { *ipv6-address* | *peer-group-name* } route-map *map-name* { in | out } command.

Parameters

ipv6-address

Enter the IPv6 address in the x:x:x:x format.
The :: notation specifies successive hexadecimal fields of zeros.

peer-group-name

Enter the name of the peer group.

map-name

Enter the name of an established route map.
If the Route map is not configured, the default is deny (to drop all routes).

in

Enter the keyword in to filter inbound routes.

out

Enter the keyword out to filter outbound routes.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.4.2.1	Introduced on C-Series and S4810
-----------------	----------------------------------

Version 8.2.1.0	Introduced on E-Series ExaScale
-----------------	---------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

Usage Information

When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

neighbor route-reflector-client

C E S4810

S4820T

Configure a neighbor as a member of a route reflector cluster.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } route-reflector-client

To indicate that the neighbor is not a route reflector client or to delete a route reflector configuration, use the no neighbor { *ipv6-address* | *peer-group-name* } route-reflector-client command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The first time you enter this command it configures the neighbor as a route reflector and members of the route-reflector cluster. Internal BGP (IBGP) speakers do not need to be fully meshed if you configure a route reflector.

When all clients of a route reflector are disabled, the neighbor is no longer a route reflector.

neighbor send-community

C E S4810

S4820T

Send a COMMUNITY attribute to a BGP neighbor or peer group. A COMMUNITY attribute indicates that all routes with that attribute belong to the same community grouping.


Syntax

neighbor { *ipv6-address* | *peer-group-name* } send-community

To disable sending a COMMUNITY attribute, use the `no neighbor { ipv6-address | peer-group-name } send-community` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to send a COMMUNITY attribute to all routers within the peer group.
Defaults	Not configured and COMMUNITY attributes are not sent to neighbors.	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810.
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor shutdown



Disable a BGP neighbor or peer group.

Syntax

`neighbor { ipv6-address | peer-group-name } shutdown`

To enable a disabled neighbor or peer group, use the `no neighbor { ipv6-address | peer-group-name } shutdown` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to disable or enable all routers within the peer group.
Defaults	Enabled (that is, BGP neighbors and peer groups are disabled.)	
Command Modes	ROUTER BGP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810.
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	Peers that are enabled within a peer group are disabled when their peer group is disabled.	

The [neighbor shutdown](#) command terminates all BGP sessions on the BGP neighbor or BGP peer group. Use this command with caution as it terminates the specified BGP sessions. When a neighbor or peer group is shutdown, use the [show ip bgp ipv6 unicast summary](#) command to confirm its status.

Related Commands

show ip bgp ipv6 unicast summary	Display the current BGP configuration.
show ip bgp ipv6 unicast neighbors	Display IPv6 routing information exchanged by BGP neighbors.

neighbor soft-reconfiguration inbound

C E T

S4810

S4820T

Enable a BGP soft-reconfiguration and start storing updates for inbound IPv6 unicast routes.

Syntax

neighbor { *ipv4-address* | *ipv6-address* | *peer-group-name* } soft-reconfiguration inbound

Parameters

<i>ipv4-address</i> <i>ipv6-address</i>	Enter the IP address of the neighbor for which you want to start storing inbound routing updates.
<i>peer-group-name</i>	Enter the name of the peer group for which you want to start storing inbound routing updates.

Defaults

Disabled

Command Modes

ROUTER BGPv6 ADDRESS FAMILY (conf-router_bgpv6_af)

Usage Information

This command enables soft-reconfiguration for the specified BGP neighbor. BGP will store all updates for inbound IPv6 unicast routes received by the neighbor but will not reset the peer-session.



Caution: Inbound update storage is a memory-intensive operation. The entire BGP update database from the neighbor is stored in memory *regardless* of the inbound policy results applied on the neighbor.

Related Commands

show ip bgp ipv6 unicast neighbors	Display IPv6 routing information exchanged by BGP neighbors.
--	--

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv4 multicast and IPv4 unicast address families
Version 7.8.1.0	Introduced support on S4810
Version 7.7.1.0	Introduced support on C-Series
Version 7.4.1.0	Introduced

neighbor subnet

C E S4810

Enable passive peering so that the members of the peer group are dynamic

S4820T

Syntax

`neighbor peer-group-name subnet subnet-number mask`

To remove passive peering, use the `no neighbor peer-group-name subnet subnet-number mask` command.

Parameters

<i>subnet-number</i>	Enter a subnet number in dotted decimal format (A.B.C.D.) as the allowable range of addresses included in the Peer group. To allow all addresses, enter 0::0/0.
<i>mask</i>	Enter a prefix mask in / prefix-length format (/x).

Defaults

Not configured.

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor timers

C E S4810

Set keepalive and hold time timers for a BGP neighbor or a peer group.

S4820T

Syntax

`neighbor { ipv6-address | peer-group-name } timers keepalive holdtime`

To return to the default values, use the `no neighbor { ipv6-address | peer-group-name } timers` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the timers for all routers within the peer group.
<i>keepalive</i>	Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. Range: 1 to 65535 Default: 60 seconds
<i>holdtime</i>	Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. Range: 3 to 65535 Default: 180 seconds

Defaults *keepalive* = 60 seconds; *holdtime* = 180 seconds.

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale


Usage Information

Timer values configured with the [neighbor timers](#) command override the timer values configured with the [timers bgp](#) command.

When two neighbors, configured with different *keepalive* and *holdtime* values, negotiate for new values, the resulting values will be as follows:

- the lower of the *holdtime* values is the new *holdtime* value, and
- whichever is the lower value; one-third of the new *holdtime* value, or the configured *keepalive* value is the new *keepalive* value.

neighbor update-source



Enable the E-Series software to use Loopback interfaces for TCP connections for BGP sessions.

Syntax

`neighbor { ipv6-address | peer-group-name } update-source loopback interface`

To use the closest interface, use the `no neighbor { ipv6-address | peer-group-name } update-source loopback interface` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>loopback interface</i>	Enter the keyword <code>loopback</code> followed by a number of the loopback interface. Range: 0 to 16383.

Defaults Not configured.

Command Modes ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

Loopback interfaces are up constantly and the BGP session may need one interface constantly up to stabilize the session. The [neighbor update-source](#) command is not necessary for directly connected internal BGP sessions.

neighbor weight

C E S4810
S4820T

Assign a weight to the neighbor connection, which is used to determine the best path.

Syntax

```
neighbor { ipv6-address | peer-group-name } weight weight
```

To remove a weight value, use the `no neighbor { ipv6-address | peer-group-name } weight weight` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>weight</i>	Enter a number as the weight. Range: 0 to 65535 Default: 0

Defaults

0

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

In the FTOS best path selection process, the path with the highest weight value is preferred.



Note: Reset the neighbor connection ([capture bgp-pdu max-buffer-size](#) * command) to apply the weight to the connection and recompute the best path.

network

C E S4810
S4820T

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

```
network ipv6-address prefix-length [route-map map-name]
```

To remove a network, use the `no network ip-address mask [route-map map-name]` command.

Parameters	<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
	<i>mask</i>	Enter the mask of the IP address in the slash prefix length format (for example, /24). The mask appears in command outputs in dotted decimal format (A.B.C.D).
	<code>route-map <i>map-name</i></code>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ipv6 address • match ipv6 next-hop • match ipv6 route-source • set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).
Defaults	Not configured.	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	The E-Series software resolves the network address configured by the network command with the routes in the main routing table to ensure that the networks are reachable via non-BGP routes and non-default routes.	
Related Commands	redistribute	Redistribute routes into BGP.

network backdoor

C **E** **S4810**
S4820T

Specify this IGP route as the preferred route.

Syntax

`network ipv6-address prefix-length backdoor`

To remove a network, use the `no network ipv6-address prefix-length backdoor` command.

Parameters	<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
-------------------	-----------------------------------	---


Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information Though FTOS does not generate a route due to backdoor config, there is an option for injecting/sourcing a local route in presence of network backdoor config on a learned route.

redistribute



Redistribute routes into BGP.

Syntax

redistribute { connected | static } [route-map *map-name*]

To disable redistribution, use the no redistribute { connected | static } command.


Parameters	connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
	static	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
	route-map <i>map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ipv6 address • match ipv6 next-hop • match ipv6 route-source • set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 8.2.1.0	Introduced on E-Series ExaScale
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	<p>If you do not configure default-metric command, in addition to the redistribute command, or there is no route map to set the metric, the metric for redistributed static and connected is “0”.</p> <p>To redistribute the default route (0::0/0) configure the neighbor default-originate command.</p>	
Related Commands	neighbor default-originate	Inject the default route.

redistribute isis



Redistribute IS-IS routes into BGP.

Syntax

```
redistribute isis [level-1 | level-1-2 | level-2] [metric metric-value | metric-type {external | internal}] [route-map map-name]
```

To stop redistribution of IS-IS routes, use the no redistribute isis command.

Parameters

level-1 level-1-2 level-2]	(OPTIONAL) Enter the type (level) of routes to redistribute.
metric	(OPTIONAL) Assign metric to an interface for use with IPv6 information
metric-type	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. You must specify one of the following: <ul style="list-style-type: none"> external internal (Default)
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> match ipv6 address match ipv6 next-hop match ipv6 route-source set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

redistribute ospf

C **E** **S4810**

Redistribute OSPFv3 routes into BGP.

S4820T**Syntax**

```
redistribute ospf process-id [[match external {1 | 2}] [match internal]] [route-map map-name]
```

To stop redistribution of OSPF routes, use the `no redistribute ospf process-id` command.

Parameters

<i>process-id</i>	Enter the number of the OSPFv3 process. Range: 1 to 65535
match external {1 2}	(OPTIONAL) Enter the keywords match external to redistribute OSPF external routes. You can specify 1 or 2 to redistribute those routes only.
match internal	(OPTIONAL) Enter the keywords match internal to redistribute OSPFv3 internal routes only.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ipv6 address • match ipv6 next-hop • match ipv6 route-source • set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

When you enter `redistribute ospf process-id` command without any other parameters, FTOS redistributes all OSPF internal routes, external type 1 routes, and external type 2 routes.

router bgp

C **E** **S4810**

S4820T

Enter ROUTER BGP mode to configure and enable BGP.

Syntax

`router bgp as-number`

To disable BGP, use the `no router bgp as-number` command.

Parameters

<i>as-number</i>	Enter the AS number. Range: 1 to 65535.
------------------	--

Defaults

Not enabled.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show capture bgp-pdu neighbor

C **E** **S4810**

S4820T

Display BGP packet capture information for an IPv6 address on the E-Series.

Syntax

`show capture bgp-pdu neighbor ipv6-address`

Parameters

<i>ipv6-address</i>	Enter the IPv6 address (X:X:X:X::X) of a BGP neighbor.
---------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

capture bgp-pdu neighbor (ipv6)	Enable capture of an IPv6 BGP neighbor packet.
capture bgp-pdu max-buffer-size	Specify a size for the capture buffer.

show config

C E **S4810**

S4820T

View the current ROUTER BGP configuration.

Syntax

show config

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Example

```
FTOS(conf-router_bgp)#show conf
!
router bgp 18508
 neighbor RR-CLIENT peer-group
 neighbor RR-CLIENT remote-as 18508
 neighbor RR-CLIENT no shutdown
 neighbor RR-CLIENT-PASSIV peer-group passive
 neighbor RR-CLIENT-PASSIV remote-as 18508
 neighbor RR-CLIENT-PASSIV subnet 9000::9:0/120
 neighbor RR-CLIENT-PASSIV no shutdown
 neighbor 1109::33 remote-as 18508
 neighbor 1109::33 update-source Loopback 101
 neighbor 1109::33 no shutdown
 neighbor 2222::220 remote-as 18508
 neighbor 2222::220 route-reflector-client
 neighbor 2222::220 update-source Loopback 100
 neighbor 2222::220 no shutdown
 neighbor 4000::33 remote-as 18508
 neighbor 4000::33 no shutdown
 neighbor 4000::60 remote-as 18508
 neighbor 4000::60 no shutdown
 neighbor 9000::1:2 remote-as 640
 no neighbor 9000::1:2 activate
 neighbor 9000::1:2 no shutdown

!
FTOS#
```

show ip bgp ipv6 unicast

C E **S4810**

S4820T

View the current BGP routing table for the E-Series.

Syntax

show ip bgp ipv6 unicast [*network* [*network-mask*] [*longer-prefixes*]]

Parameters

<i>network</i>	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
<i>network-mask</i>	(OPTIONAL) Enter the network mask (in slash prefix format) of the BGP network address.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <i>longer-prefixes</i> to view all routes with a common prefix.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

When you enable `bgp non-deterministic-med` command, the `show ip bgp` command output for a BGP route does not list the INACTIVE reason.

show ip bgp ipv6 unicast cluster-list

C **E** **S4810**

View BGP neighbors in a specific cluster.

S4820T

Syntax

`show ip bgp ipv6 unicast cluster-list [cluster-id]`

Parameters

<i>cluster-id</i>	(OPTIONAL) Enter the cluster id in dotted decimal format.
-------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast community

C **E** **S4810**

View information on all routes with Community attributes or view specific BGP community groups.

S4820T

Syntax

`show ip bgp ipv6 unicast community [community-number] [local-as] [no-export] [no-advertise]`

Parameters

<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
<i>local-AS</i>	Enter the keywords <code>local-AS</code> to view all routes with the COMMUNITY attribute of <code>NO_EXPORT_SUBCONFED</code> . All routes with the <code>NO_EXPORT_SUBCONFED</code> (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.

no-advertise	Enter the keywords <code>no-advertise</code> to view all routes containing the well-known community attribute of <code>NO_ADVERTISE</code> . All routes with the <code>NO_ADVERTISE</code> (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
no-export	Enter the keywords <code>no-export</code> to view all routes containing the well-known community attribute of <code>NO_EXPORT</code> . All routes with the <code>NO_EXPORT</code> (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.

Command Modes

EXEC

EXEC Privilege


Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

To view the total number of COMMUNITY attributes found, use the [show ip bgp ipv6 unicast](#) summary command. The text line above the route table states the number of COMMUNITY attributes found.

show ip bgp ipv6 unicast community-list



View routes that are affected by a specific community list.

Syntax

`show ip bgp ipv6 unicast community-list community-list-name [exact-match]`

Parameters

<i>community-list-name</i>	Enter the name of a configured IP community list.
exact-match	(OPTIONAL) Enter <code>exact-match</code> to display only for an exact match of the communities.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast dampened-paths

C **E** **S4810**

View BGP routes that are dampened (non-active).

S4820T

Syntax

show ip bgp ipv6 unicast dampened-paths

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast detail

C **E** **S4810**

Display BGP internal information for IPv6 Unicast address family.

S4820T

Syntax

show ip bgp ipv6 unicast detail

Defaults

none

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast extcommunity-list

C **E** **S4810**

View information on all routes with Extended Community attributes.

S4820T

Syntax

show ip bgp ipv6 unicast extcommunity-list [*list name*]

Parameters

<i>list name</i>	Enter the extended community list name you wish to view.
------------------	--

Command Modes

EXEC

EXEC Privilege

Usage Information

To view the total number of COMMUNITY attributes found, use the [show ip bgp ipv6 unicast](#) summary command. The text line above the route table states the number of COMMUNITY attributes found.

The [show ip bgp ipv6 unicast community](#) command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the [show ip bgp ipv6 unicast](#) command output.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast filter-list

C **E** **S4810**

View the routes that match the filter lists.

S4820T

Syntax

show ip bgp ipv6 unicast filter-list *as-path-name*

Parameters

<i>as-path-name</i>	Enter the name of an AS-PATH.
---------------------	-------------------------------

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast flap-statistics

C **E** **S4810**

View flap statistics on BGP routes.

S4820T

Syntax

show ip bgp ipv6 unicast flap-statistics [*ipv6-address prefix-length*] [*filter-list as-path-name*] [*regex regular-expression*]

Parameters

<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>filter-list as-path-name</i>	(OPTIONAL) Enter the keyword <i>filter-list</i> followed by the name of a configured AS-PATH ACL.
<i>regex regular-expression</i>	Enter a regular expression then use one or a combination of the following characters to match: <ul style="list-style-type: none"> . = (period) any single character (including a white space) * = (asterisk) the sequences in a pattern (0 or more sequences) + = (plus) the sequences in a pattern (1 or more sequences) ? = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. [] = (brackets) a range of single-character patterns. ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. \$ = (dollar sign) the end of the output string.

Command Modes


EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast inconsistent-as



View routes with inconsistent originating Autonomous System (AS) numbers, that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax

show ip bgp ipv6 unicast inconsistent-as

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast neighbors

C E S4810

S4820T

Displays information on IPv6 unicast routes exchanged by BGP neighbors.

Syntax

```
show ip bgp ipv6 unicast neighbors [ipv4-neighbor-addr | ipv6-neighbor-addr]  
[advertised-routes | dampened-routes | detail | flap-statistics | routes | received-routes  
[network [network-mask]] | denied-routes [network [network-mask]]]
```

Parameters

ipv6 unicast	Enter the ipv6 unicast keywords to view information only related to IPv6 unicast routes.
<i>ipv4-neighbor-addr</i> <i>ipv6-neighbor-addr</i>	(OPTIONAL) Enter the IP address of the neighbor to view only BGP route information exchanged with that neighbor.
advertised-routes	(OPTIONAL) Enter the keywords advertised-routes to view only the routes the neighbor sent.
dampened-routes	(OPTIONAL) Enter the keyword dampened-routes to view information on dampened routes from the BGP neighbor.
detail	(OPTIONAL) Enter the keyword detail to view neighbor-specific internal information for the IPv4 Unicast address family.
flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to view flap statistics on the neighbor's routes.
routes	(OPTIONAL) Enter the keywords routes to view only the neighbor's feasible routes.
received-routes [<i>network</i> [<i>network-mask</i>]]	(OPTIONAL) Enter the keywords received-routes followed by either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information received from neighbors. Note: neighbor soft-reconfiguration inbound must be configured prior to viewing all the information received from the neighbors.
denied-routes [<i>network</i> [<i>network-mask</i>]]	(OPTIONAL) Enter the keywords denied-routes followed by either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information on routes denied via neighbor inbound filters.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv4 multicast and IPv6 unicast address families
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S4810
Version 7.7.1.0	Introduced on C-Series
Version 7.5.1.0	Added detail option and output now displays default MED value
Version 7.2.1.0	Added received and denied route options
Version 6.3.10	The output is changed to display the total number of advertised prefixes

Example
(show ip bgp ipv6 unicast neighbors)

```

FTOS#show ip bgp ipv6 unicast neighbors

BGP neighbor is 5ffe:10::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3
BGP state ESTABLISHED, in this state for 00:00:32
Last read 00:00:32, last write 00:00:32
Hold time is 180, keepalive interval is 60 seconds
Received 1404 messages, 0 in queue
  3 opens, 1 notifications, 1394 updates
  6 keepalives, 0 route refresh requests
Sent 48 messages, 0 in queue
  3 opens, 2 notifications, 0 updates
  43 keepalives, 0 route refresh requests
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

Capabilities advertised to neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes

Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer
Connections established 3; dropped 2
Last reset 00:00:39, due to Closed by neighbor

Notification History
  'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:10::4, Local port: 179
Foreign host: 5ffe:10::3, Foreign port: 35470

Notification History
  'Connection Reset' Sent : 1 Recv: 0

BGP neighbor is 5ffe:11::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3
BGP state ESTABLISHED, in this state for 00:00:28
Last read 00:00:28, last write 00:00:28
Hold time is 180, keepalive interval is 60 seconds
Received 27 messages, 3 notifications, 0 in queue
Sent 0 messages, 0 notifications, 0 in queue
Received 8 updates, Sent 0 updates
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)
Capabilities advertised to neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

```



```

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes

Prefix advertised 0, rejected 0, withdrawn 0
Connections established 3; dropped 2
Last reset 00:00:41, due to Closed by neighbor

Notification History
'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:11::4, Local port: 179

```

Table 27-1. Command Example fields: show ip bgp ipv6 unicast neighbors

Lines beginning with	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information: <ul style="list-style-type: none"> last read is the time (hours:minutes:seconds) the router read a message from its neighbor hold time is the number of seconds configured between messages from its neighbor keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive.
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Soft reconfiguration	This line indicates that soft reconfiguration inbound is configured.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(List of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL or Prefix list configured for the policy.
For address family:	Displays IPv6 Unicast as the address family.
BGP table version	Displays the which version of the primary BGP routing table the router and the neighbor are using.

Table 27-1. Command Example fields: show ip bgp ipv6 unicast neighbors

Lines beginning with	Description
Prefixes accepted	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.
Prefixes advertised	Displays the number of network prefixes advertised, the number rejected and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word never is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

**Related
Commands**[show ip bgp ipv6 unicast](#)

View the current BGP routing table.

show ip bgp ipv6 unicast peer-group

C E S4810

S4820T

Allows you to view information on the BGP peers in a peer group.

Syntaxshow ip bgp ipv6 unicast peer-group [*peer-group-name* [summary]]**Parameters**

<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
detail	(OPTIONAL) Enter the keyword detail to view peer-group-specific information for the IPv6 address family.
summary	(OPTIONAL) Enter the keyword summary to view status information of the peers in that peer group. The output is the same as that found in show ip bgp ipv6 unicast summary command

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810

Version 8.2.1.0 Introduced on E-Series ExaScale

Version 7.4.1.0 Introduced on E-Series TeraScale

Example

```
FTOS#show ip bgp peer-group

Peer-group RR-CLIENT, remote AS 18508
  BGP version 4
  Minimum time between advertisement runs is 5 seconds

For address family: IPv4 Unicast
BGP neighbor is RR-CLIENT, peer-group internal,
Number of peers in this group 1
Peer-group members (* - outbound optimized):
  9000::4:

Peer-group RR-CLIENT-PASSIV, remote AS 18508
  BGP version 4
  Minimum time between advertisement runs is 5 seconds

For address family: IPv4 Unicast
BGP neighbor is RR-CLIENT-PASSIV, peer-group internal,
Number of peers in this group 1
Peer-group members (* - outbound optimized):
  9000::9:2*
FTOS#
```

show ip bgp ipv6 unicast summary

Allows you to view the status of all BGP connections.



Syntax

show ip bgp ipv6 unicast summary

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.4.2.1 Introduced on C-Series and S4810

Version 8.2.1.0 Introduced on E-Series ExaScale

Version 7.4.1.0 Introduced on E-Series TeraScale

Example

```
FTOS# show ip bgp summary
BGP router identifier 55.55.55.55, local AS number 18508
BGP table version is 0, main routing table version 0
6 BGP path attribute entrie(s) using 392 bytes of memory
6 BGP AS-PATH entrie(s) using 294 bytes of memory
6 BGP community entrie(s) using 234 bytes of memory
```

Neighbor	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/Pfx
1109::33	18508	0	0	0	0	0	never	Active
2222::220	18508	0	0	0	0	0	never	Active
4000::33	18508	0	0	0	0	0	never	Active
4000::60	18508	0	0	0	0	0	never	Active

```

9000::4:2      18508      0      0      0      0      0 never      Active
9000::5:2      1      35      32      0      0      0 00:16:42      0
9000::6:2      2      35      32      0      0      0 00:16:39      0
9000::7:2      3      35      32      0      0      0 00:16:41      0
9000::8:2      18508      35      32      0      0      0 00:16:42      0
9000::9:2      18508      44      19      0      0      0 00:16:41      0
9000::a:2      18508      35      32      0      0      0 00:16:43      0
9000::b:14     18508      29      29      0      0      0 00:13:01      0
FTOS#

```

show ip bgp next-hop

C **E** **S4810**

S4820T

View all next hops (via learned routes only) with current reachability and flap status. This command only displays one path, even if the next hop is reachable by multiple paths.

Syntax show ip bgp next-hop [local-routes]

Parameters

local-routes	(OPTIONAL) Show next-hop information for local routes
--------------	---

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.4.2.1	Introduced on C-Series and S4810
-----------------	----------------------------------

Version 8.2.1.0	Introduced on E-Series ExaScale
-----------------	---------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

Example

```

FTOS#show ip bgp next-hop
Next-hop      Via                               RefCount  Cost  Flaps  Time Elapsed
9000::5:2     9000::5:2, Gi 8/38              2         0    0 00:23:22
9000::6:2     9000::6:2, Gi 8/38              2         0    0 00:23:22
9000::7:2     9000::7:2, Gi 8/38              2         0    0 00:23:22
9000::8:2     9000::8:2, Gi 8/38              2         0    0 00:23:22
9000::9:2     9000::9:2, Gi 8/38             6000        0    0 00:23:16
9000::a:2     9000::a:2, Gi 8/38              2         0    0 00:23:22
FTOS#

```

show ip bgp paths

C **E** **S4810**

S4820T

View all the BGP path attributes in the BGP database.

Syntax show ip bgp paths [regexp *regular-expression*]

Parameters

regex *regular-expression*

Enter a regular expression then use one or a combination of the following characters to match:

- . = (period) any single character (including a white space)
- * = (asterisk) the sequences in a pattern (0 or more sequences)
- + = (plus) the sequences in a pattern (1 or more sequences)
- ? = (question mark) sequences in a pattern (either 0 or 1 sequences). **You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.**
- [] = (brackets) a range of single-character patterns.
- ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.4.2.1 Introduced on C-Series and S4810

Version 8.2.1.0 Introduced on E-Series ExaScale

Version 7.4.1.0 Introduced on E-Series TeraScale

show ip bgp paths as-path

C **E** **S4810**

View all unique AS-PATHs in the BGP database

S4820T

Syntax

show ip bgp paths as-path

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.4.2.1 Introduced on C-Series and S4810

Version 8.2.1.0 Introduced on E-Series ExaScale

Version 7.4.1.0 Introduced on E-Series TeraScale

show ip bgp paths community

C **E** **S4810**

View all unique COMMUNITY numbers in the BGP database.

S4820T

Syntax

show ip bgp paths community

Command Modes EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp paths extcommunity

C **E** **S4810**

View all unique Extended community information in the BGP database.

S4820T

Syntax show ip bgp paths extcommunity

Command Modes EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp regexp

C **E** **S4810**

Allows you to view the subset of BGP routing table matching the regular expressions specified.

S4820T

Syntax show ip bgp regexp *regular-expression* [*character*]

Parameters

regular-expression [*character*]

Enter a regular expression then use one or a combination of the following characters to match:

- `.` = (period) any single character (including a white space)
- `*` = (asterisk) the sequences in a pattern (0 or more sequences)
- `+` = (plus) the sequences in a pattern (1 or more sequences)
- `?` = (question mark) sequences in a pattern (either 0 or 1 sequences). **You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.**
- `[]` = (brackets) a range of single-character patterns.
- `^` = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- `$` = (dollar sign) the end of the output string.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

timers bgp

C **E** **S4810**

S4820T

Allows you to adjust the BGP network timers for all neighbors.

Syntax

`timers bgp keepalive holdtimer`

To return to the default values, use the `no timers bgp` command.

Parameters

<i>keepalive</i>	Enter the time interval in seconds between which the E-Series sends keepalive messages. Range: 1 to 65535 Default: 60 seconds
<i>holdtimer</i>	Enter the time interval in seconds which the E-Series waits since the last keepalive message before declaring a BGP peer dead. Range: 3 to 65535 Default: 180 seconds

Defaults

keepalive = 60 seconds; *holdtimer* = 180 seconds

Command Modes

ROUTER BGP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 8.2.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

neighbor timers	Adjust BGP timers for a specific peer or peer group.
---------------------------------	--

IPv6 MBGP Commands

Multiprotocol BGP (MBGP) is an enhanced BGP that enables multicast routing policy throughout the Internet and connecting multicast topologies between BGP and autonomous systems (AS). FTOS MBGP is implemented as per IETF RFC 1858. The MBGP commands are:

- `address family`
- `aggregate-address`
- `bgp dampening`
- `clear ip bgp ipv6 unicast`
- `clear ip bgp ipv6 unicast dampening`
- `clear ip bgp ipv6 unicast flap-statistics`
- `debug ip bgp ipv6 unicast dampening`
- `debug ip bgp ipv6 unicast peer-group updates`
- `debug ip bgp ipv6 unicast updates`
- `distance bgp`
- `neighbor activate`
- `neighbor advertisement-interval`
- `neighbor default-originate`
- `neighbor distribute-list`
- `neighbor filter-list`
- `neighbor maximum-prefix`
- `neighbor next-hop-self`
- `neighbor remove-private-as`
- `neighbor route-map`
- `neighbor route-reflector-client`
- `network`
- `redistribute`
- `show ip bgp ipv6 unicast`
- `show ip bgp ipv6 unicast cluster-list`
- `show ip bgp ipv6 unicast community`
- `show ip bgp ipv6 unicast community-list`
- `show ip bgp ipv6 unicast dampened-paths`
- `show ip bgp ipv6 unicast detail`
- `show ip bgp ipv6 unicast filter-list`
- `show ip bgp ipv6 unicast flap-statistics`
- `show ip bgp ipv6 unicast inconsistent-as`
- `show ip bgp ipv6 unicast neighbors`
- `show ip bgp ipv6 unicast peer-group`
- `show ip bgp ipv6 unicast summary`

address family

C **E** **S4810**

S4820T

This command changes the context to SAFI (Subsequent Address Family Identifier).

Syntax

address family ipv6 unicast

To remove SAFI context, use the no address family ipv6 unicast command.

Parameters

ipv6	Enter the keyword ipv6 to specify the address family as IPv6.
unicast	Enter the keyword unicast to specify multicast as SAFI.

Defaults

IPv6 Unicast

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

All subsequent commands will apply to this address family once this command is executed. You can exit from this AFI/SAFI to the IPv6 Unicast (the default) family by entering exit and returning to the Router BGP context.

aggregate-address

C **E** **S4810**

S4820T

Summarize a range of prefixes to minimize the number of entries in the routing table.

Syntax

aggregate-address *ipv6-address prefix-length* [advertise-map *map-name*] [as-set] [attribute-map *map-name*] [summary-only] [suppress-map *map-name*]

Parameters

<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
advertise-map <i>map-name</i>	(OPTIONAL) Enter the keywords advertise-map followed by the name of a configured route map to set filters for advertising an aggregate route.
as-set	(OPTIONAL) Enter the keyword as-set to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.
attribute-map <i>map-name</i>	(OPTIONAL) Enter the keywords attribute-map followed by the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.

summary-only	(OPTIONAL) Enter the keyword summary-only to advertise only the aggregate address. Specific routes will not be advertised.
suppress-map <i>map-name</i>	(OPTIONAL) Enter the keywords suppress-map followed by the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.


Do not add the as-set parameter to the aggregate. If routes within the aggregate are constantly changing, the aggregate will flap to keep track of the changes in the AS_PATH.

In route maps used in the suppress-map parameter, routes meeting the deny clause are not suppress; in other words, they are allowed. The opposite is true: routes meeting the permit clause are suppressed.

If the route is injected via the [network](#) command, that route will still appear in the routing table if the summary-only parameter is configured in the [aggregate-address](#) command.

The summary-only parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the [neighbor distribute-list](#) command.

bgp dampening



Enable MBGP route dampening.

Syntax

bgp dampening [*half-life time*] [route-map *map-name*]

To disable route dampening, use the no bgp dampening [*half-life time*] [route-map *map-name*] command.

Parameters	<i>half-life time</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half, after the half-life period expires. Range: 1 to 45. Default: 15 minutes
	<i>route-map map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map. Only match commands in the configured route map are supported.
Defaults	Disabled.	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp ipv6 unicast

C **E** **S4810**

Reset MBGP sessions.

S4820T

Syntax clear ip bgp ipv6 unicast * *ipv6-address prefix-length* [dampening | flap-statistics] peer-group]

Parameters	*	Enter the character * to clear all peers.
	<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
	dampening	(OPTIONAL) Enter the keyword dampening to clear route flap dampening information.
	flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to reset the flap statistics on all prefixes from that neighbor.
	peer-group	(OPTIONAL) Enter the keyword peer-group to clear all members of a peer-group.

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.0	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced

clear ip bgp ipv6 unicast dampening

C E S4810

Clear information on route dampening.

S4820T

Syntax

clear ip bgp dampening ipv6 unicast [*network network-mask*]

Parameters

<i>network</i>	(OPTIONAL) Enter the IPv6 network address in x:x:x::x format.
<i>network-mask</i>	If you enter the network address, then enter the network mask, from 0 to 128.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

clear ip bgp ipv6 unicast flap-statistics

C E S4810

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

S4820T

Syntax

clear ip bgp ipv6 unicast flap-statistics [*network* | filter-list *list* | regexp *regexp*]

Parameters

<i>network</i>	(OPTIONAL) Enter the IPv6 network address in x:x:x::x format to clear flap statistics.
filter-list <i>list</i>	(OPTIONAL) Enter the keyword filter-list followed by the name of a configured AS-PATH list (max 16 characters).
regexp <i>regexp</i>	(OPTIONAL) Enter the keyword regexp followed by regular expressions. Use one or a combination of the following: <ul style="list-style-type: none">· (period) matches on any single character, including white space* (asterisk) matches on sequences in a pattern (zero or more sequences)+ (plus sign) matches on sequences in a pattern (one or more sequences)? (question mark) matches sequences in a pattern (0 or 1 sequences)[] (brackets) matches a range of single-character patterns.^ (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.)\$ (dollar sign) matches the end of the output string.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.0	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced

debug ip bgp ipv6 unicast dampening

C **E** **S4810**

View information on routes being dampened.

S4820T

Syntax

debug ip bgp ipv6 unicast dampening

To disable debugging, enter no debug ip bgp ipv6 unicast dampening

Parameters

dampening	Enter the keyword dampening to clear route flap dampening information.
-----------	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

debug ip bgp ipv6 unicast peer-group updates

C **E** **S4810**

View information about BGP peer-group updates.

S4820T

Syntax

debug ip bgp ipv6 unicast peer-group *peer-group-name* updates [in | out]

To disable debugging, enter no debug ip bgp ipv6 unicast peer-group *peer-group-name* updates [in | out] command.

Parameters

peer-group <i>peer-group-name</i>	Enter the keyword peer-group followed by the name of the peer-group.
updates	Enter the keyword updates to view BGP update information.
in	(OPTIONAL) Enter the keyword in to view only BGP updates received from neighbors.
out	(OPTIONAL) Enter the keyword out to view only BGP updates sent to neighbors.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810.
Version 7.4.1.0	Introduced on E-Series TeraScale

debug ip bgp ipv6 unicast updates

C E S4810

View information about BGP updates.

S4820T

Syntax

debug ip bgp ipv6 unicast *ipv6-address prefix-length* updates [in | out]

To disable debugging, enter no debug ip bgp ipv6 unicast *ipv6-address prefix-length* updates [in | out] command.

Parameters

<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
updates	Enter the keyword updates to view BGP update information.
in	(OPTIONAL) Enter the keyword in to view only BGP updates received from neighbors.
out	(OPTIONAL) Enter the keyword out to view only BGP updates sent to neighbors.

Defaults

Disabled.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

distance bgp

C E S4810

Define an administrative distance for routes.

S4820T

Syntax

distance bgp *external-distance internal-distance local-distance*

To return to default values, enter no distance bgp.

Parameters

<i>external-distance</i>	Enter a number to assign to routes learned from a neighbor external to the AS. Range: 1 to 255. Default: 20
--------------------------	---

<i>internal-distance</i>	Enter a number to assign to routes learned from a router within the AS. Range: 1 to 255. Default: 200
<i>local-distance</i>	Enter a number to assign to routes learned from networks listed in the network command. Range: 1 to 255. Default: 200

Defaults

external-distance = 20; *internal-distance* = 200; *local-distance* = 200.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale




Caution: Dell Force10 recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.

Usage Information

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table. Routes from confederations are treated as internal BGP routes.

neighbor activate



This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI.

Syntax

neighbor [*ipv6-address* | *peer-group-name*] activate

To disable, use the no neighbor [*ipv6-address* | *peer-group-name*] activate command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group
activate	Enter the keyword activate to enable the neighbor/peer group in the new AFI/SAFI.

Defaults

Disabled

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced on E-Series TeraScale
Usage Information	By default, when a neighbor/peer group configuration is created in the Router BGP context, it is enabled for the IPv6/Unicast AFI/SAFI. By using activate in the new context, the neighbor/peer group is enabled for AFI/SAFI.	
Related Commands	address family	Changes the context to SAFI

neighbor advertisement-interval

C **E** **S4810**
S4820T

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } advertisement-interval *seconds*

To return to the default value, use the no neighbor { *ipv6-address* | *peer-group-name* } advertisement-interval command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. Range: 0 to 600 seconds. Default: 5 seconds for internal BGP peers; 30 seconds for external BGP peers.

Defaults

seconds = 5 seconds (internal peers); *seconds* = 30 seconds (external peers)

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810.
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor default-originate

C **E** **S4810**
S4820T

Inject the default route to a BGP peer or neighbor.

Syntax

neighbor { *ipv6-address* | *peer-group-name* } default-originate [route-map *map-name*]

To remove a default route, use the `no neighbor { ipv6-address | peer-group-name } default-originate` command.

Parameters	<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to set the default route of all routers in that peer group.
	route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor distribute-list

C **E** **S4810**

Distribute BGP information via an established prefix list.

S4820T

Syntax

`neighbor [ipv6-address | peer-group-name] distribute-list prefix-list-name [in | out]`

To delete a neighbor distribution list, use the `no neighbor [ipv6-address | peer-group-name] distribute-list prefix-list-name [in | out]` command.

Parameters	<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group to apply the distribute list filter to all routers in the peer group.
	<i>prefix-list-name</i>	Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
	in	Enter the keyword in to distribute only inbound traffic.
	out	Enter the keyword out to distribute only outbound traffic.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.4.2.1	Introduced on C-Series and S4810.
-----------------	-----------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

Usage Information

Other BGP filtering commands include: [neighbor filter-list](#) and [neighbor route-map](#).

Related Commands

neighbor filter-list	Assign a AS-PATH list to a neighbor or peer group.
--------------------------------------	--

neighbor route-map	Assign a route map to a neighbor or peer group.
------------------------------------	---

neighbor filter-list

C **E** **S4810**

Configure a BGP filter based on the AS-PATH attribute.

S4820T

Syntax

neighbor [*ipv6-address* | *peer-group-name*] filter-list aspath *access-list-name* [in | out]

To delete a BGP filter, use the no neighbor [*ipv6-address* | *peer-group-name*] filter-list aspath *access-list-name* [in | out] command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
<i>access-list-name</i>	Enter the name of an established AS-PATH access list. If the AS-PATH access list is not configured, the default is permit (to allow routes).
in	Enter the keyword in to filter inbound BGP routes.
out	Enter the keyword out to filter outbound BGP routes.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.4.2.1	Introduced on C-Series and S4810
-----------------	----------------------------------

Version 7.4.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

neighbor maximum-prefix

C **E** **S4810**

Control the number of network prefixes received.

S4820T

Syntax

neighbor *ipv6-address* | *peer-group-name* maximum-prefix *maximum* [*threshold*] [warning-only]

To return to the default values, use the `no neighbor ipv6-address | peer-group-name maximum-prefix maximum` command.

Parameters	
<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.
<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. Range: 1 to 4294967295.
<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the <i>maximum</i> value. When the number of prefixes reaches this percentage of the <i>maximum</i> value, the E-Series software sends a message. Range: 1 to 100 percent. Default: 75
<i>warning-only</i>	(OPTIONAL) Enter the keyword <code>warning-only</code> to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults `threshold = 75`

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor next-hop-self

C **E** **S4810**

S4820T

Allows you to configure the router as the next hop for a BGP neighbor.

Syntax

`neighbor ipv6-address | peer-group-name next-hop-self`

To return to the default setting, use the `no neighbor ipv6-address | peer-group-name next-hop-self` command.

Parameters	
<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If the [set ipv6 next-hop](#) command in the ROUTE-MAP mode is configured, its configuration takes precedence over the [neighbor next-hop-self](#) command.

neighbor remove-private-as

C **E** **S4810**

S4820T

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax

neighbor *ipv6-address* | *peer-group-name* remove-private-as

To return to the default, use the no neighbor *ipv6-address* | *peer-group-name* remove-private-as command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group to remove the private AS numbers

Defaults

Disabled (that is, private AS number are not removed).

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

neighbor route-map

C **E** **S4810**

S4820T

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax

neighbor *ipv6-address* | *peer-group-name* route-map *map-name* [in | out]

To remove the route map, use the no neighbor [*ipv6-address* | *peer-group-name*] route-map *map-name* [in | out] command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.

<i>map-name</i>	Enter the name of an established route map. If the Route map is not configured, the default is deny (to drop all routes).
<i>in</i>	Enter the keyword <i>in</i> to filter inbound routes.
<i>out</i>	Enter the keyword <i>out</i> to filter outbound routes.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History


Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

neighbor route-reflector-client



Configure a neighbor as a member of a route reflector cluster.

Syntax

`neighbor ipv6-address | peer-group-name route-reflector-client`

To indicate that the neighbor is not a route reflector client or to delete a route reflector configuration, use the `no neighbor ipv6-address | peer-group-name route-reflector-client` command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x::x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The first time you enter this command it configures the neighbor as a route reflector and members of the route-reflector cluster. Internal BGP (IBGP) speakers do not need to be fully meshed if you configure a route reflector.

When all clients of a route reflector are disabled, the neighbor is no longer a route reflector.

network

C E S4810 S4820T

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

`network ipv6-address [route-map map-name]`

To remove a network, use the `no network ipv6-address [route-map map-name]` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zeros.
<i>route-map map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> match ipv6 address match ipv6 next-hop match ipv6 route-source set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

The E-Series software resolves the network address configured by the [network](#) command with the routes in the main routing table to ensure that the networks are reachable via non-BGP routes and non-default routes.

Related Commands

redistribute	Redistribute routes into BGP.
------------------------------	-------------------------------

redistribute

C E S4810

S4820T

Redistribute routes into BGP.

Syntax

redistribute [connected | static] [route-map *map-name*]

To disable redistribution, use the no redistribution [connected | static] [route-map *map-name*] command.

Parameters

connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
static	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> match ipv6 address match ipv6 next-hop match ipv6 route-source set ipv6 next-hop If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

If you do not configure [default-metric](#) command, in addition to the [redistribute](#) command, or there is no route map to set the metric, the metric for redistributed static and connected is “0”.

To redistribute the default route (0::0/0) configure the [neighbor default-originate](#) command.

Related Commands

neighbor default-originate	Inject the default route.
--	---------------------------

show ip bgp ipv6 unicast

C E S4810

S4820T

View the current MBGP routing table for the E-Series.

Syntax

show ip bgp ipv6 unicast [*network* [*network-mask*] [*length*]]

Parameters

<i>network</i>	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
<i>network-mask</i>	(OPTIONAL) Enter the network mask (in slash prefix format) of the BGP network address.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keyword <i>longer-prefixes</i> to view all routes with a common prefix.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Example

```
FTOS#show ip bgp ipv6 unicast
BGP table version is 8, local router ID is 5.5.10.4
Status codes: s suppressed, S stale, d damped, h history, * valid, > best Path
source: I - internal, a - aggregate, c - confed-external, r - redistributed, n
- network Origin codes: i - IGP, e - EGP, ? - incomplete
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
h	dead:1::/100	5ffe:10::3	0			0 1 i
h		5ffe:11::3	0			0 1 i
*>	dead:2::/100	5ffe:10::3	0			0 1 i
*		5ffe:11::3	0			0 1 i
*>	dead:3::/100	5ffe:10::3	0			0 1 i
*		5ffe:11::3	0			0 1 i
h	dead:4::/100	5ffe:10::3	0			0 1 i
h		5ffe:11::3	0			0 1 i

```
FTOS#show ip bgp ipv6 unicast dead:3::/100
```

```
BGP routing table entry for dead:3::/100, version 3
Paths: (2 available, table Default-MBGP-Routing-Table.)
Not advertised to any peer
```

```
Received from :
```

```
5ffe:10::3 (5.5.5.3) Best
AS_PATH : 1
```

```
Next-Hop : 5ffe:10::3, Cost : 0
Origin IGP, Metric 0, LocalPref 100, Weight 0, external
```

```
5ffe:11::3 (5.5.5.3)
AS_PATH : 1
```

```
Next-Hop : 5ffe:11::3, Cost : 0
Origin IGP, Metric 0, LocalPref 100, Weight 0, external
Inactive reason: Peer IP address
```

```
FTOS#
```

Table 27-2. show ip bgp Command Example Fields

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0::0/0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight
Path	Lists all the ASs the route passed through to reach the destination network.

**Related
Commands**

show ip bgp ipv6 unicast community	View BGP communities.
--	-----------------------

show ip bgp ipv6 unicast cluster-list

C E S4810

View BGP neighbors in a specific cluster.

S4820T

Syntaxshow ip bgp ipv6 unicast cluster-list [*cluster-id*]**Parameters**

<i>cluster-id</i>	(OPTIONAL) Enter the cluster id in dotted decimal format.
-------------------	---

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast community

C E S4810

View information on all routes with Community attributes or view specific BGP community groups.

S4820T

Syntaxshow ip bgp ipv6 unicast community [*community-number*] [local-as] [no-export] [no-advertise]

Parameters		
	<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
	local-AS	Enter the keywords <code>local-AS</code> to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
	no-advertise	Enter the keywords <code>no-advertise</code> to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
	no-export	Enter the keywords <code>no-export</code> to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.

Command Modes

EXEC

EXEC Privilege

Command History		
	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced on E-Series TeraScale

Usage Information

To view the total number of COMMUNITY attributes found, use the [show ip bgp ipv6 unicast](#) summary command. The text line above the route table states the number of COMMUNITY attributes found.

show ip bgp ipv6 unicast community-list

C **E** **S4810**

S4820T

View routes that are affected by a specific community list.

Syntax `show ip bgp ipv6 unicast community-list community-list-name`

Parameters		
	<i>community-list-name</i>	Enter the name of a configured IP community list.

Command Modes

EXEC

EXEC Privilege

Command History		
	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast dampened-paths

C **E** **S4810**

View BGP routes that are dampened (non-active).

S4820T

Syntax

show ip bgp ipv6 unicast dampened-paths

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast detail

C **E** **S4810**

Display detailed BGP information.

S4820T

Syntax

show ip bgp ipv6 unicast detail

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Example

```
R2_Training#show ip bgp ipv6 unicast detail
```

```
Detail information for BGP Node
bgpNdP 0x41a17000 : NdTmrP 0x41a17000 : NdKATmrP 0x41a17014 : NdTics 327741 :
NhLocAS 1 : NdState 2 : NdRPMPrim 1 : NdListSoc 13
NdAuto 1 : NdEqCost 1 : NdSync 0 : NdDefOrg 0
NdV6ListSoc 14 NdDefDid 0 : NdConfedId 0 : NdMedConfed 0 : NdMedMissVal -1 :
NdIgnrI11Id 0 : NdRRC2C 1 : NdClstId 33686273 : NdPaTblP 0x41a19088
NdASPTblP 0x41a19090 : NdCommTblP 0x41a19098 : NhOptTransTblP 0x41a190a0 :
NdRRClSTblP 0x41a190a8
NdPktPA 0 : NdLocCBP 0x41a6f000 : NdTmpPAP 0x419efc80 : NdTmpASPAP 0x41a25000 :
NdTmpCommP 0x41a25800
NdTmpRRClP 0x41a4b000 : NdTmpOptP 0x41a4b800 : NdTmpNHP : NdOrigPAP 0
NdOrgNHP 0 : NdModPathP 0x419efcc0 : NdModASPAP 0x41a4c000 : NdModCommP
0x41a4c800
NdModOptP 0x41a4d000 : NdModNHP : NdComSortBufP 0x41a19110 : NdComSortHdP
0x41a19d04 : NdUpdAFMsk 0 : AFRstSe
t 0x41a1a298 : NHopDfrdHdP 0x41a1a3e0 : NumNhDfrd 0 : CfgHdrAFMsk 1
AFChkNetTmrP 0x41ee705c : AFRtDamp 0 : AlwysCmpMed 0 : LocrHld 10 : LocrRem 10
: softReconfig 0x41a1a58c
```

```

DefMet 0 : AutoSumm 1 : NhopsP 0x41a0d100 : Starts 0 : Stops 0 : Opens 0
Closes 0 : Fails 0 : FataIs 0 : ConnExps 0 : HldExps 0 : KeepExps 0
RxOpens 0 : RxKeeps 0 : RxUpds 0 : RxNotifs 0 : TxUpds 0 : TxNotifs 0
BadEvts 0 : SynFails 0 : RxeCodeP 0x41a1b6b8 : RxHdrCodeP 0x41a1b6d4 :
RxOpCodeP 0x41a1b6e4
RxUpdCodeP 0x41a1b704 : TxEcodeP 0x41a1b734 : TxHdrCodeP 0x41a1b750 :
TxOpCodeP 0x41a1b760
TxUpdCodeP 0x41a1b780 : TrEvt 0 : LocPref 100 : tmpPathP 0x41a1b7b8 :
LogNbrChgs 1
RecursiveNH 1 : PgCfgId 0 : KeepAlive 0 : HldTime 0 : DioHdl 0 : AggrValTmrP
0x41ee7024
UpdNetTmrP 0 : RedistTmrP 0x41ee7094 : PeerChgTmrP 0 : CleanRibTmrP 0x41ee7104
PeerUpdTmrP 0x41ee70cc : DfrdNHTmrP 0x41ee7174 : DfrdRtselTmrP 0x41ee713c :
FastExtFallover 1 : FastIntFallove
r 0 : EnforcelstAS 1
PeerIdBitsP 0x41967120 : softOutSz 16 : RibUpdCtxCBP 0
UpdPeerCtxCBP 0 : UpdPeerCtxAFI 0 : TcpioCtxCB 0 : RedistBlk 1
NextCBPurg 1101119536 : NumPeerToPurge 0 : PeerIBGPCnt 0 : NonDet 0 :
DfrdPathSel 0
BGPRst 0 : NumGrCfg 1 : DfrdTmestmp 0 : SnmpTrps 0 : IgnrBestPthASP 0
RstOn 1 : RstMod 1 : RstRole 2 : AFFalgs 7 : RstInt 120 : MaxeorExtInt 361
FixedPartCrt 1 : VarParCrt 1
Packet Capture max allowed length 40960000 : current length 0

Peer Grp List

Nbr List

Confed Peer List

Address Family specific Information
AFIndex 2
NdSpFlag 0x41a190b2 : AFRttP 0x41a0de00 : NdRTMMkrP 0x41a19d68 : NdRTMAFTblVer
0 : NdRibCtxAddr 1101110720
NdRibCtxAddrLen 255 : NdAFPrefix 0 : NdAfNLRIP 0 : NdAFNLRILen 0 : NdAFWPtrP 0
NdAFWLen 0 : NdAfNH : NdAFRedRttP 0x41a4e000 : NdRecCtxAdd 1101110900
NdRedCtxAddrLen 255 : NdAfRedMkrP 0x41a19ec8 : AFAggRttP 0x41a4e200 :
AfAggCtxAddr 1101111060 : AfAggCtxAddrLen 255
AfNumAggrPfx 0 : AfNumAggrASSet 0 : AfNumSuppmap 0 : AfNumAggrValidPfx 0 :
AfMPathRttP 0x41a4e300
MpathCtxAddr 1101111172 : MpathCtxAddrLen 255 : AfEorSet 0x41a1a198 :
NumDfrdPfx 0
AfActPeerHd 0x41a1a3cc : AfExtDist 1101112320 : AfIntDist 200 : AfLocDist 200
AfNumRRc 0 : AfRR 0 : AfNetRttP 0x41a0df00 : AfNetCtxAddr 1101112424 :
AfNetCtxAddrLen 255
AfNwCtxAddr 1101112475 : AfNwCtxAddrLen 255 : AfNetBKDRttP 0x41a4e100 :
AfNetBKDRCnt 0 : AfDampHLife 0
AfDampReuse 0 : AfDampSupp 0 : AfDampMaxHld 0 : AfDampCeiling 0 : AfDampRmapP
0x41a1a548
AfNumDamped 0 : AfNumHist 0 : AfNumTotalHist 0 : AfDfrdRtLstP 0x41a1b624 :
AfDfrdNodeCnt 0 : softRecfgAf 0x41a1b5dc : softRecfgCfAf 0x41a1b5f8
AfCfgCnt 0 : AfRedistCfg 0 : IBGP_Mpath 0 : EBGp_Mpath 0 : DebugInPfList :
DebugOutPfList

```

show ip bgp ipv6 unicast filter-list


C **E** **54810**

54820T

View the routes that match the filter lists.

Syntax	show ip bgp ipv6 unicast filter-list <i>as-path-name</i>	
Parameters	<i>as-path-name</i>	Enter the name of an AS-PATH.
Command Modes	EXEC EXEC Privilege	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.2.1	Introduced on C-Series and S4810
	Version 7.4.1.0	Introduced on E-Series TeraScale

show ip bgp ipv6 unicast flap-statistics



View flap statistics on BGP routes.

Syntax

show ip bgp ipv6 unicast flap-statistics [*ipv6-address prefix-length*] [*filter-list as-path-name*] [*regex regular-expression*]

Parameters

<i>ipv6-address prefix-length</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>filter-list as-path-name</i>	(OPTIONAL) Enter the keyword filter-list followed by the name of a configured AS-PATH ACL.
<i>regex regular-expression</i>	Enter a regular expression then use one or a combination of the following characters to match: <ul style="list-style-type: none"> • . = (period) any single character (including a white space) • * = (asterisk) the sequences in a pattern (0 or more sequences) • + = (plus) the sequences in a pattern (1 or more sequences) • ? = (question mark) sequences in a pattern (either 0 or 1 sequences). You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression. • [] = (brackets) a range of single-character patterns. • ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified. • \$ = (dollar sign) the end of the output string.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.4.2.1 Introduced on C-Series and S4810

Version 7.4.1.0 Introduced on E-Series TeraScale

Example

```
FTOS#show ip bgp ipv6 unicast flap-statistics
BGP table version is 8, local router ID is 5.5.10.4
Status codes: s suppressed, S stale, d damped, h history, * valid, > best Path
source: I - internal, a - aggregate, c - confed-external, r - redistributed, n
- network Origin codes: i - IGP, e - EGP, ? - incomplete

      Network                From                Flaps Duration Reuse      Path
h  dead:1::/100             5ffe:10::3         1    00:03:20    1 i
h  dead:1::/100             5ffe:11::3         1    00:03:20    1 i
h  dead:4::/100             5ffe:10::3         1    00:04:39    1 i
h  dead:4::/100             5ffe:11::3         1    00:04:39    1 i

FTOS#
```

show ip bgp ipv6 unicast inconsistent-as

C **E** **S4810**

S4820T

View routes with inconsistent originating Autonomous System (AS) numbers, that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax

show ip bgp ipv6 unicast inconsistent-as

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.4.2.1 Introduced on C-Series and S4810

Version 7.4.1.0 Introduced on E-Series TeraScale

show ip bgp ipv6 unicast neighbors

C **E** **S4810**

S4820T

Allows you to view the information exchanged by BGP neighbors.

Syntax

show ip bgp ipv6 unicast neighbors [*ipv6-address prefix-length*] [*advertised-routes* | *dampened-routes* | *detail* | *flap-statistics* | *routes*]]

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format.
<i>prefix-length</i>	Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros.
<i>advertised-routes</i>	(OPTIONAL) Enter the keywords <i>advertised-routes</i> to view only the routes the neighbor sent.
<i>dampened-routes</i>	(OPTIONAL) Enter the keyword <i>dampened-routes</i> to view information on dampened routes from the BGP neighbor.

flap-statistics	(OPTIONAL) Enter the keyword flap-statistics to view flap statistics on the neighbor's routes.
detail	(OPTIONAL) Display detailed neighbor information.
routes	(OPTIONAL) Enter the keywords routes to view only the neighbor's feasible routes.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.5.1.0	Modified: Added detail option; added information to output.
Version 7.4.1.0	Introduced on E-Series TeraScale

Example

```

FTOS#show ip bgp ipv6 unicast neighbors

BGP neighbor is 5ffe:10::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3
BGP state ESTABLISHED, in this state for 00:00:32
Last read 00:00:32, last write 00:00:32
Hold time is 180, keepalive interval is 60 seconds
Received 1404 messages, 0 in queue
  3 opens, 1 notifications, 1394 updates
  6 keepalives, 0 route refresh requests
Sent 48 messages, 0 in queue
  3 opens, 2 notifications, 0 updates
  43 keepalives, 0 route refresh requests
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

Capabilities advertised to neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes
Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer

Connections established 3; dropped 2
Last reset 00:00:39, due to Closed by neighbor

Notification History
'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:10::4, Local port: 179
Foreign host: 5ffe:10::3, Foreign port: 35470

BGP neighbor is 5ffe:11::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3

```



```

BGP state ESTABLISHED, in this state for 00:00:28
Last read 00:00:28, last write 00:00:28
Hold time is 180, keepalive interval is 60 seconds
Received 27 messages, 3 notifications, 0 in queue
Sent 0 messages, 0 notifications, 0 in queue
Received 8 updates, Sent 0 updates
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

Capabilities advertised to neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes
Prefix advertised 0, rejected 0, withdrawn 0

Connections established 3; dropped 2
Last reset 00:00:41, due to Closed by neighbor

Notification History
  'OPEN error/Bad AS' Sent : 0  Recv: 1

Local host: 5ffe:11::4, Local port: 179
Foreign host: 5ffe:11::3, Foreign port: 36800

```

FTOS#

Table 27-3. show ip bgp neighbors Command Fields

Lines beginning with	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information: <ul style="list-style-type: none"> last read is the time (hours:minutes:seconds) the router read a message from its neighbor hold time is the number of seconds configured between messages from its neighbor keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive.
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages) and the number of messages waiting in a queue for processing.

Table 27-3. show ip bgp neighbors Command Fields (continued)

Lines beginning with	Description
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages) and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(list of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL or Prefix list configured for the policy.
For address family:	Displays IPv6 Unicast as the address family.
BGP table version	Displays the which version of the primary BGP routing table the router and the neighbor are using.
accepted prefixes	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.
Prefix advertised	Displays the number of network prefixes advertised, the number rejected and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word never is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Related Commands

show ip bgp ipv6 unicast	View the current BGP routing table.
--	-------------------------------------

show ip bgp ipv6 unicast peer-group

C **E** **54810**

Allows you to view information on the BGP peers in a peer group.

54820T

Syntax

show ip bgp ipv6 unicast peer-group [*peer-group-name* [summary]]

Parameters

<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
summary	(OPTIONAL) Enter the keyword summary to view status information of the peers in that peer group. The output is the same as that found in show ip bgp ipv6 unicast summary command

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Related Commands

neighbor peer-group (assigning peers)	Assign peer to a peer-group.
neighbor peer-group (creating group)	Create a peer group.

show ip bgp ipv6 unicast summary

C **E** **S4810**

Allows you to view the status of all BGP connections.

S4820T

Syntax

show ip bgp ipv6 unicast summary

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced on C-Series and S4810
Version 7.4.1.0	Introduced on E-Series TeraScale

Example

```
FTOS#show ip bgp ipv6 unicast summary
BGP router identifier 5.5.10.4, local AS number 100
BGP table version is 12, main routing table version 12
2 network entrie(s) and 4 paths using 536 bytes of memory
1 BGP path attribute entrie(s) using 112 bytes of memory
1 BGP AS-PATH entrie(s) using 39 bytes of memory
Dampening enabled. 0 history paths, 0 dampened paths, 0 penalized paths

Neighbor          AS      MsgRcvd  MsgSent    TblVer  InQ   OutQ  Up/Down   State/Pfx
-----
5ffe:10::3        1         28        0          12     0     0 00:01:01    2
5ffe:11::3        1         27        0          12     0     0 00:00:55    2
FTOS#
```

Table 27-4. show ip bgp summary Command Fields

Field	Description
BGP router identifier	Displays the local router ID and the AS number.
BGP table version	Displays the BGP table version and the main routing table version.
network entries	Displays the number of network entries and route paths and the amount of memory used to process those entries.
BGP path attribute entries	Displays the number of BGP path attributes and the amount of memory used to process them.

Table 27-4. show ip bgp summary Command Fields

Field	Description
BGP AS-PATH entries	Displays the number of BGP AS_PATH attributes processed and the amount of memory used to process them.
BGP community entries	Displays the number of BGP COMMUNITY attributes processed and the amount of memory used to process them. The show ip bgp ipv6 unicast community command provides more details on the COMMUNITY attributes.
Dampening enabled	Displayed only when dampening is enabled. Displays the number of paths designated as history, dampened, or penalized.
Neighbor	Displays the BGP neighbor address.
AS	Displays the AS number of the neighbor.
MsgRcvd	Displays the number of BGP messages that neighbor received.
MsgSent	Displays the number of BGP messages that neighbor sent.
TblVer	Displays the version of the BGP table that was sent to that neighbor.
InQ	Displays the number of messages from that neighbor waiting to be processed.
OutQ	Displays the number of messages waiting to be sent to that neighbor. If a number appears in parentheses, the number represents the number of messages waiting to be sent to the peer group.
Up/Down	Displays the amount of time (in hours:minutes:seconds) that the neighbor is in the Established stage. If the neighbor has never moved into the Established stage, the word never is displayed.
State/Pfx	If the neighbor is in Established stage, the number of network prefixes received. If a maximum limit was configured with the neighbor maximum-prefix command, (prfxd) appears in this column. If the neighbor is not in Established stage, the current stage is displayed (Idle, Connect, Active, OpenSent, OpenConfirm) When the peer is transitioning between states and clearing the routes received, the phrase (Purging) may appear in this column. If the neighbor is disabled, the phrase (Admin shut) appears in this column.

iSCSI Optimization

Overview

Internet Small Computer System Interface (iSCSI) optimization enables quality-of-service (QoS) treatment for iSCSI storage traffic on an **S4810** or **S4820T**.

The following FTOS commands are used to configure and verify the iSCSI Optimization feature:

- [advertise dcbx-app-tlv](#)
- [iscsi aging time](#)
- [iscsi cos](#)
- [iscsi enable](#)
- [iscsi priority-bits](#)
- [iscsi profile-compellant](#)
- [iscsi target port](#)
- [show iscsi](#)
- [show iscsi session](#)
- [show iscsi session detailed](#)
- [show run iscsi](#)

advertise dcbx-app-tlv

S4810

Configure DCBX to send iSCSI TLV advertisements.

S4820T

Syntax advertise dcbx-app-tlv iscsi

To disable DCBX iSCSI TLV advertisements, use the no advertise dcbx-app-tlv iscsi command.

Defaults Enabled.

Command Modes PROTOCOL LLDP

Command History

Version 8.3.19.0	Introduced on the S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

You can configure iSCSI TLVs to be sent either globally or on a specified interface. The interface configuration takes priority over global configuration.

iscsi aging time

S4810

Set the aging time for iSCSI sessions.

S4820T

Syntax

iscsi aging time *time*

To remove the iSCSI session aging time, use the no iscsi aging time command.

Parameters

<i>time</i>	Enter the aging time for the iSCSI session. Range: 5 to 43,200 minutes.
-------------	--

Defaults

10 minutes.

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

iscsi cos

S4810

Set the QoS policy that will be applied to the iSCSI flows.

S4820T

Syntax

iscsi cos {enable | disable / dot1p *vlan-priority-value* [remark] / dscp *dscp-value* [remark]}

To disable the QoS policy, use the no iscsi cos dscp command.

Parameters

enable	Enter the keyword enable to allow the application of preferential QoS treatment to iSCSI traffic so that the iSCSI packets are scheduled in the switch with a dot1p priority 4 regardless of the VLAN priority tag in the packet. Default: iSCSI packets are handled with dotp1 priority 4 without remark.
disable	Enter the keyword disable to disable the application of preferential QoS treatment to iSCSI frames.
dot1p <i>vlan-priority-value</i>	Enter the dot1p value of the VLAN priority tag assigned to the incoming packets in an iSCSI session. Range: 0 to 7. Default: The dot1p value in ingress iSCSI frames is not changed and is used in iSCSI TLV advertisements if you did not enter the iscsi priority-bits command.

<code>dscp <i>dscp-value</i></code>	Enter the DSCP value assigned to the incoming packets in an iSCSI session. The valid range is 0 to 63. Default: The DSCP value in ingress packets is not changed.
<code>remark</code>	Marks the incoming iSCSI packets with the configured dot1p or DSCP value when they egress to the switch. Default: The dot1p and DSCP values in egress packets are not changed.

Defaults See above.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

By default, iSCSI flows are assigned to dot1p priority 4. Dell Force10 recommends changing the dot1p priority-queue setting to 0 (zero).

iscsi enable

S4810

Globally enable iSCSI optimization.

S4820T

Syntax `iscsi enable`

To disable iSCSI optimization, use the `no iscsi` command.

Parameters

<code>enable</code>	Enter the keyword <code>enable</code> to enable the iSCSI optimization feature.
---------------------	---

Defaults Enabled.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

iscsi priority-bits

S4810

Configure the priority bitmap to be advertised in iSCSI application TLVs.

S4820T

Syntax `iscsi priority-bits`

To remove the configured priority bitmap, use the `no iscsi priority-bits` command.

Defaults	4 (0x10 in the bitmap)
Command Modes	PROTOCOL LLDP (only on global, not on interface)
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.12.0 Introduced on the S4810.
	Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module

iscsi profile-compellent

S4810

Configure the auto-detection of Compellent arrays on a port.

S4820T

Syntax	iscsi profile-compellent
Defaults	Compellent disk arrays are not detected.
Command Modes	INTERFACE
Command History	Version 8.3.19.0 Introduced on the S4820T.
	Version 8.3.12.0 Introduced on the S4810.
	Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module

iscsi target port

S4810

Configure the iSCSI target ports and optionally, the IP addresses on which iSCSI communication will be monitored.

S4820T

Syntax	iscsi target port [<i>tcp-port-2...tcp-port-16</i>]ip-address [<i>ip-address</i>]
	To remove the configured iSCSI target ports or IP addresses, use the <code>no iscsi target port</code> command.
Parameters	<i>tcp-port-2...tcp-port-16</i> Enter the tcp-port number of the iSCSI target ports. The <i>tcp-port-n</i> is the TCP port number or a list of TCP port numbers on which the iSCSI target listens to requests. Separate port numbers with a comma. Default: 860, 3260.
	<i>ip-address</i> (Optional) Enter the ip-address that the iSCSI will monitor. The ip-address specifies the IP address of the iSCSI target.
Defaults	860, 3260.
Command Modes	CONFIGURATION

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Usage Information

You can configure up to 16 target TCP ports on the switch in one command or multiple commands.

When you use the `no iscsi target port` command and the TCP port to be deleted is one bound to a specific IP address, the IP address value must be included in the command.

show iscsi

S4810

Display the currently configured iSCSI settings.

S4820T

Syntax `show iscsi`

Command Mode EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810. Support added for cam modification.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS#show iscsi
iSCSI is enabled
iSCSI session monitoring is disabled
iSCSI COS : dot1p is 4 no-remark
Session aging time: 10
Maximum number of connections is 256
-----
iSCSI Targets and TCP Ports:
-----
TCP Port      Target IP Address
3260
860
```

Related Commands

show iscsi session	Display information on active iSCSI sessions on the switch.
show iscsi session detailed	Display detailed information on active iSCSI sessions on the switch.
show run iscsi	show run iscsi

show iscsi session

S4810

Display information on active iSCSI sessions on the switch.

S4820T

Syntax `show iscsi session`

Command Mode

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show iscsi session
Session 0:
-----
Target: iqn.2001-05.com.equallogic:0-8a0906-0e70c2002-10a0018426a48c94-iom010
Initiator: iqn.1991-05.com.microsoft:win-x918v27yajg
ISID: 400001370000

Session 1:
-----
Target: iqn.2001-05.com.equallogic:0-8a0906-0f60c2002-0360018428d48c94-iom011
Initiator: iqn.1991-05.com.microsoft:win-x918v27yajg
ISID: 400001370000.
```

Related Commands

show iscsi	Display the currently configured iSCSI settings.
show iscsi session detailed	Display detailed information on active iSCSI sessions on the switch.
show run iscsi	show run iscsi

show iscsi session detailed

S4810

Display detailed information on active iSCSI sessions on the switch.

S4820T**Syntax**show iscsi session detailed [session *isid*]**Parameters**

<i>isid</i>	Enter the session's iSCSi ID to display detailed information on specified iSCSi session.
-------------	--

Command Mode

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Example

```
FTOS# show iscsi session detailed
Session 0 :
-----
Target: iqn.2010-11.com.ixia:ixload:iscsi-TG1
Initiator: iqn.2010-11.com.ixia:ixload:initiator-iscsi-2c
Up Time: 00:00:01:28 (DD:HH:MM:SS)
```

```

Time for aging out:00:00:09:34 (DD:HH:MM:SS)
ISID:806978696102
Initiator      Initiator      Target      Target      Connection
IP Address     TCP Port      IP Address  TCPPort     ID
10.10.0.44     33345        10.10.0.101 3260        0
Session 1      :
-----
Target:iqn.2010-11.com.ixia.ixload:iscsi-TG1
Initiator:iqn.2010-11.com.ixia.ixload:initiator-iscsi-35
Up Time:00:00:01:22 (DD:HH:MM:SS)
Time for aging out:00:00:09:31 (DD:HH:MM:SS)
ISID:806978696102
Initiator      Initiator      Target      Target      Connection
IP Address     TCP Port      IP Address  TCPPort     ID
10.10.0.53     33432        10.10.0.101 3260        0

```

**Related
Commands**

show iscsi	Display the currently configured iSCSI settings.
show iscsi session	Display information on active iSCSI sessions on the switch.
show run iscsi	show run iscsi

show run iscsi

S4810

Display all globally-configured non-default iSCSI settings in the current FTOS session.

S4820T

Syntax show run iscsi

Command Mode EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

**Related
Commands**

show iscsi	Display the currently configured iSCSI settings.
show iscsi session	Display information on active iSCSI sessions on the switch.
show iscsi session detailed	Display detailed information on active iSCSI sessions on the switch.

Intermediate System to Intermediate System (IS-IS)

Overview

Intermediate System to Intermediate System Protocol (IS-IS) for IPv4 and IPv6 is supported on supported on platforms [E](#), [S4810](#), and [S4820T](#).

IS-IS is an interior gateway protocol that uses a shortest-path-first algorithm. IS-IS facilitates the communication between open systems, supporting routers passing both IP and OSI traffic.

A router is considered an *intermediate system*. Networks are partitioned into manageable routing domains, called areas. Intermediate systems send, receive, and forward packets to other routers within their area (Level 1 and Level 1-2 devices). Only Level 1-2 and Level 2 devices communicate with other areas.

IS-IS protocol standards are listed in the Standard Compliance chapter in the *FTOS Configuration Guide*.



Note: The fundamental mechanisms of IS-IS are the same between IPv4 and IPv6. Where there are differences between the two versions, they are identified and clarified in this chapter. Except where identified, the information in this chapter applies to both protocol versions.

Commands

The following are the FTOS commands to enable IS-IS.

- [adjacency-check](#)
- [advertise](#)
- [area-password](#)
- [clear config](#)
- [clear isis](#)
- [clns host](#)
- [debug isis](#)
- [debug isis adj-packets](#)
- [debug isis local-updates](#)
- [debug isis snp-packets](#)
- [debug isis spf-triggers](#)

- debug isis update-packets
- default-information originate
- description
- distance
- distribute-list in
- distribute-list out
- distribute-list redistributed-override
- domain-password
- graceful-restart ietf
- graceful-restart interval
- graceful-restart t1
- graceful-restart t2
- graceful-restart t3
- graceful-restart restart-wait
- hello padding
- hostname dynamic
- ignore-lsp-errors
- ip router isis
- ipv6 router isis
- isis circuit-type
- isis csnp-interval
- isis hello-interval
- isis hello-multiplier
- isis hello padding
- isis ipv6 metric
- isis metric
- isis network point-to-point
- isis password
- isis priority
- is-type
- log-adjacency-changes
- lsp-gen-interval
- lsp-mtu
- lsp-refresh-interval
- max-area-addresses
- max-lsp-lifetime
- maximum-paths
- metric-style
- multi-topology
- net
- passive-interface
- redistribute
- redistribute bgp
- redistribute ospf
- router isis
- set-overload-bit

- [show config](#)
- [show isis database](#)
- [show isis graceful-restart detail](#)
- [show isis hostname](#)
- [show isis interface](#)
- [show isis neighbors](#)
- [show isis protocol](#)
- [show isis traffic](#)
- [spf-interval](#)

adjacency-check

E **S4810**

Verify that the “protocols supported” field of the IS-IS neighbor contains matching values to this router.

S4820T

Syntax **adjacency-check**

To disable adjacency check, use the **no adjacency-check** command.

Defaults Enabled

Command Modes ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced on E-Series

Usage Information

Use this command to perform protocol-support consistency checks on hello packets. The adjacency-check is enabled by default.

advertise

E **S4810**

Leak routes between levels (distribute IP prefixes between Level 1 and Level 2 and vice versa).

S4820T

Syntax **advertise** { **level1-into-level2** | **level2-into-level1** } *prefix-list-name*

To return to the default, use the **no advertise** { **level1-into-level2** | **level2-into-level1** } [*prefix-list-name*] command.

Parameters	level1-into-level2	Enter the keyword level1-into-level2 to advertise Level 1 routes into Level 2 LSPs. This is the default.
	level2-into-level1	Enter the keyword level2-into-level1 to advertise Level 2 inter-area routes into Level 1 LSPs. Described in RFC 2966.
	<i>prefix-list-name</i>	Enter the name of a configured IP prefix list. Routes meeting the criteria of the IP Prefix list are leaked.
Defaults	level1-into-level2 (Level 1 to Level 2 leaking enabled.)	
Command Modes	ROUTER ISIS (<i>for IPv4</i>)	
	CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (<i>for IPv6</i>)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 7.5.1.0	Introduced IPv6 ISIS support
	Version 6.3.1.0	Introduced
Usage Information	You cannot disable leaking from one level to another, <i>however</i> , you can regulate the rate flow from one level to another via an IP Prefix list. If the IP Prefix list is not configured, all routes are leaked.	
	Additional information can be found in IETF RFC 2966, <i>Domain-wide Prefix Distribution with Two-Level IS-IS</i> .	

area-password

E **S4810** Configure a Hash Message Authentication Code (HMAC) authentication password for an area.

S4820T

Syntax **area-password** [**hmac-md5** | *encryption-type*] *password*

To delete a password, enter **no area-password**.

Parameters

hmac-md5	(OPTIONAL) Enter the keyword hmac-md5 to encrypt the password.
<i>encryption-type</i>	(OPTIONAL) Enter 7 to encrypt the password using DES.
<i>password</i>	Enter a 1—16-character length alphanumeric string to prevent unauthorized access or incorrect routing information corrupting the link state database. The password is processed as plain text which only provides limited security.

Defaults Not configured.

Command Modes ROUTER ISIS

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

Usage Information Use the [area-password](#) command on routers within an area to prevent the link state database from receiving incorrect routing information from unauthorized routers.

The password configured is injected into Level 1 LSPs, CSNPs, and PSNPs.

Related Commands	domain-password	Allows you to set the authentication password for a routing domain.
	isis password	Allows you to configure an authentication password for an interface.

clear config

E **S4810**
S4820T

Clear IS-IS configurations that display under the `router isis` heading of the [show running-config](#) command output.

Syntax **clear config**

Command Modes ROUTER ISIS

Usage Information Use caution when you enter this command. Back up your configuration prior to using this command or your IS-IS configuration will be erased.

Related Commands	copy	Use this command to save the current configuration to another location.
-------------------------	----------------------	---

clear isis

E **S4810**
S4820T

Restart the IS-IS process. All IS-IS data is cleared.

Syntax **clear isis** [*tag*] { * | **database** | **traffic** }

Parameters	<i>tag</i>	(Optional) Enter an alphanumeric string to specify the IS-IS routing tag area.
	*	Enter the keyword * to clear all IS-IS information and restarts the IS-IS process. This command removes IS-IS neighbor information and IS-IS LSP database information and the full SPF calculation will be done.
	database	Clears IS-IS LSP database information.
	traffic	Clears IS-IS counters.

Command Modes EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

clns host

E **S4810**

S4820T

Define a name-to-network service mapping point (NSAP) mapping that can then be used with commands that require NSAPs and system IDs.

Syntax **clns host** *name nsap*

Parameters

<i>name</i>	Enter an alphanumeric string to identify the name-to-NSAP mapping.
<i>nsap</i>	Enter a specific NSAP address that will be associated with the <i>name</i> parameter.

Defaults Not configured.

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Related Commands

hostname dynamic	Enables dynamic learning of hostnames from routers in the domain and allows the routers to advertise the hostnames in LSPs.
----------------------------------	---

Usage Information

Use this command to configure a shortcut name that can used instead of entering a long string of numbers associated with an NSAP address.

debug isis

E **S4810**

S4820T

Enable debugging for all IS-IS operations.

Syntax **debug isis**

To disable debugging of IS-IS, enter **no debug isis**.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

Entering **debug isis** enables all debugging parameters.

Use this command to display all debugging information in one output. To turn off debugging, you normally enter separate **no** forms of each command. Enter the **no debug isis** command to disable all debug messages for IS-IS at once.

debug isis adj-packets

E **S4810**

Enable debugging on adjacency-related activity such as hello packets that are sent and received on IS-IS adjacencies.

S4820T

Syntax **debug isis adj-packets** [*interface*]

To turn off debugging, use the **no debug isis adj-packets** [*interface*] command.

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none">For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

debug isis local-updates

E **S4810**

Enables debugging on a specific interface and provides diagnostic information to debug IS-IS local update packets.

S4820T

Syntax **debug isis local-updates** [*interface*]

To turn off debugging, enter the **no debug isis local-updates** [*interface*] command.

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 6.3.1.0	Introduced

debug isis snp-packets

E **S4810****S4820T**

Enable debugging on a specific interface and provides diagnostic information to debug IS-IS complete sequence number PDU (CSNP) and partial sequence number PDU (PSNP) packets.

Syntax**debug isis snp-packets** [*interface*]

To turn off debugging, enter the **no debug isis snp-packets** [*interface*] command.

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on S4810
------------------	---------------------

Version 6.3.1.0	Introduced
-----------------	------------

debug isis spf-triggers

E **S4810**

Enable debugging on the events that triggered IS-IS shortest path first (SPF) events for debugging purposes.

S4820T

Syntax **debug isis spf-triggers**

To turn off debugging, enter **no debug isis spf-triggers**.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on S4810
------------------	---------------------

Version 6.3.1.0	Introduced
-----------------	------------

debug isis update-packets

E **S4810**

Enable debugging on Link State PDUs (LSPs) that are detected by a router.

S4820T

Syntax **debug isis update-packets** [*interface*]

To turn off debugging, enter the **no debug isis update-packets** [*interface*] command.

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none">• For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.• For a SONET interface, enter the keyword sonet followed by the slot/port information.• For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.• For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on S4810
------------------	---------------------

Version 6.3.1.0	Introduced
-----------------	------------

default-information originate

E **S4810**

S4820T

Generate a default route into an IS-IS routing domain and controls the distribution of default information.

Syntax **default-information originate** [**always**] [**metric** *metric*] [**route-map** *map-name*]

To disable the generation of a default route into the specified IS-IS routing domain, enter the **no default-information originate** [**always**] [**metric** *metric*] [**route-map** *map-name*] command.

Parameters

always	(OPTIONAL) Enter the keyword always to have the default route always advertised
metric <i>metric</i>	(OPTIONAL) Enter the keyword metric followed by a number to assign to the route. Range: 0 to 16777215
route-map <i>map-name</i>	(OPTIONAL) A default route will be generated by the routing process if the route map is satisfied.

Defaults Not configured.

Command Modes

ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Usage Information

When you use this command to redistribute routes into a routing domain, the router becomes an autonomous system (AS) boundary router. An AS boundary router does not always generate a default route into a routing domain. The router still requires its own default route before it can generate one.

How a metric value assigned to a default route is advertised depends on how on the configuration of the [metric-style](#) command. If the [metric-style](#) is set for narrow mode and the metric value in the [default-information originate](#) command is set to a number higher than 63, the metric value advertised in LSPs will be 63. If the [metric-style](#) is set for wide mode, their the metric value in the [default-information originate](#) command is advertised.

Related Commands

redistribute	Redistribute routes from one routing domain to another routing domain.
isis metric	Configure a metric for an interface
metric-style	Set the metric style for the router.
show isis database	Display the IS-IS link state database.

description

C E S

Enter a description of the IS-IS routing protocol

S4810

S4820T

Syntax `description { description }`

To remove the description, use the **no description** { description } command.

Parameters

<i>description</i>	Enter a description to identify the IS-IS protocol (80 characters maximum).
--------------------	---

Defaults

No default behavior or values

Command Modes

ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
pre-7.7.1.0	Introduced

Related Commands

router isis	Enter ROUTER mode on the switch.
-----------------------------	----------------------------------

distance

E S4810

Define the administrative distance for learned routes.

S4820T

Syntax `distance weight [ip-address mask [prefix-list]]`

To return to the default values, enter the **no distance weight** command.

Parameters

<i>weight</i>	The administrative distance value indicates the reliability of a routing information source. Range: 1 to 255. (A higher relative value indicates lower reliability. Routes with smaller values are given preference.) Default: 115
<i>ip-address mask</i>	(OPTIONAL) Enter an IP address in dotted decimal format and enter a mask in either dotted decimal or /prefix format.
<i>prefix-list</i>	(OPTIONAL) Enter the name of a prefix list name.

Defaults

weight = 115

Command Modes

ROUTER ISIS (for IPv4)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (for IPv6)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 6.3.1.0	Introduced

Usage Information

The administrative distance indicates the trust value of incoming packets. A low administrative distance indicates a high trust rate. A high value indicates a lower trust rate. For example, a weight of 255 is interpreted that the routing information source is not trustworthy and should be ignored.

distribute-list in

E **S4810****S4820T**

Filter network prefixes received in updates.

Syntax

distribute-list *prefix-list-name* **in** [*interface*]

To return to the default values, enter the **no distribute-list** *prefix-list-name* **in** [*interface*] command.

Parameters

<i>prefix-list-name</i>	Specify the prefix list to filter prefixes in routing updates.
<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.

Defaults

Not configured.

Command Modes

ROUTER ISIS (*for IPv6*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Related Commands

distribute-list out	Suppress networks from being advertised in updates.
redistribute	Redistributes routes from one routing domain to another routing domain.

distribute-list out

E **S4810**

Suppress network prefixes from being advertised in outbound updates.

S4820T

Syntax `distribute-list prefix-list-name out [connected | bgp as number | ospf process-id | rip | static]`

To return to the default values, enter the `no distribute-list prefix-list-name out [bgp as number connected | ospf process-id | rip | static]` command.

Parameters

<code>prefix-list-name</code>	Specify the prefix list to filter prefixes in routing updates.
<code>connected</code>	(OPTIONAL) Enter the keyword connected for directly connected routing process.
<code>ospf process-id</code>	(OPTIONAL) Enter the keyword ospf followed by the OSPF process-ID number. Range: 1 to 65535
<code>bgp as number</code>	(OPTIONAL) Enter the BGP followed by the AS Number. Range: 1 to 65535
<code>rip</code>	(OPTIONAL) Enter the keyword rip for RIP routes.
<code>static</code>	(OPTIONAL) Enter the keyword static for user-configured routing process.

Defaults Not configured.

Command Modes

ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Usage Information

You can assign a name to a routing process so a prefix list will be applied to only the routes derived from the specified routing process.

Related Commands

distribute-list in	Filters networks received in updates.
redistribute	Redistributes routes from one routing domain to another routing domain.

distribute-list redistributed-override

E **S4810**

Suppress flapping of routes when the same route is redistributed into IS-IS from multiple routers in the network.

S4820T

Syntax `distribute-list redistributed-override in`

To return to the default, use the `no distribute-list redistributed-override in` command.

Defaults	No default behavior or values								
Command Modes	ROUTER ISIS (<i>for IPv4</i>) CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (<i>for IPv6</i>)								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced IPv6 ISIS support</td> </tr> <tr> <td>Version 6.3.1.0</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810	Version 7.8.1.0	Introduced IPv6 ISIS support	Version 6.3.1.0	Introduced
Version 8.3.19.0	Introduced on S4820T								
Version 8.3.12.0	Introduced on S4810								
Version 7.8.1.0	Introduced IPv6 ISIS support								
Version 6.3.1.0	Introduced								
Usage Information	When the command is executed, IS-IS will not download the route to the routing table if the same route was redistributed into IS-IS routing protocol on the same router.								

domain-password

E **S4810**

Set the authentication password for a routing domain.

S4820T

Syntax **domain-password** [**hmac-md5** | *encryption-type*] *password*

To disable the password, enter **no domain-password**.

Parameters	<table border="1"> <tr> <td>hmac-md5</td> <td>(OPTIONAL) Enter the keyword hmac-md5 to encrypt the password using MD5.</td> </tr> <tr> <td><i>encryption-type</i></td> <td>(OPTIONAL) Enter 7 to encrypt the password using DES.</td> </tr> <tr> <td><i>password</i></td> <td>Enter an alphanumeric string up to 16 characters long. If you do not specify an encryption type or hmac-md5 keywords, the password is processed as plain text which provides limited security.</td> </tr> </table>	hmac-md5	(OPTIONAL) Enter the keyword hmac-md5 to encrypt the password using MD5.	<i>encryption-type</i>	(OPTIONAL) Enter 7 to encrypt the password using DES.	<i>password</i>	Enter an alphanumeric string up to 16 characters long. If you do not specify an encryption type or hmac-md5 keywords, the password is processed as plain text which provides limited security.
hmac-md5	(OPTIONAL) Enter the keyword hmac-md5 to encrypt the password using MD5.						
<i>encryption-type</i>	(OPTIONAL) Enter 7 to encrypt the password using DES.						
<i>password</i>	Enter an alphanumeric string up to 16 characters long. If you do not specify an encryption type or hmac-md5 keywords, the password is processed as plain text which provides limited security.						

Defaults No default password.

Command Modes ROUTER ISIS

Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 6.3.1.0</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810	Version 6.3.1.0	Introduced
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.12.0	Introduced on S4810						
Version 6.3.1.0	Introduced						

Usage Information The domain password is inserted in Level 2 link state PDUs (LSPs), complete sequence number PDUs (CSNPs), and partial sequence number PDUs (PSNPs).

Related Commands	<table border="1"> <tr> <td>area-password</td> <td>Configure an IS-IS area authentication password.</td> </tr> <tr> <td>isis password</td> <td>Configure the authentication password for an interface.</td> </tr> </table>	area-password	Configure an IS-IS area authentication password.	isis password	Configure the authentication password for an interface.
area-password	Configure an IS-IS area authentication password.				
isis password	Configure the authentication password for an interface.				

graceful-restart ietf

E **S4810** Enable Graceful Restart on an IS-IS router.
S4820T

Syntax **graceful-restart ietf**

To return to the default, use the **no graceful-restart ietf** command.

Parameters

ietf	Enter ietf to enable Graceful Restart on the IS-IS router.
-------------	---

Defaults Default is Graceful Restart disabled.

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

Usage Information A Restart TLV included in every Graceful Restart enabled router's HELLO PDUs. This enables the (re)starting as well as the existing ISIS peers to detect the GR capability of the routers on the connected network. A flag in the Restart TLV contains Restart Request (RR), Restart Acknowledge (RA) and Suppress Adjacency Advertisement (SA) bit flags.

The ISIS Graceful Restart enabled router can co-exist in mixed topologies where some routers are Graceful Restart enabled and others are not. For neighbors that are not Graceful Restart enabled, the restarting router brings up the adjacency per the usual methods.

graceful-restart interval

E **S4810** Set the Graceful Restart grace period, the time during which all Graceful Restart attempts are prevented.
S4820T

Syntax **graceful-restart interval** *minutes*

To return to the default, use the **no graceful-restart interval** command.

Parameters

<i>minutes</i>	Range: 1-20 minutes Default: 5 minutes
----------------	---

Defaults 5 minutes

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

graceful-restart t1

E **S4810**

S4820T

Set the Graceful Restart wait time before unacknowledged restart requests are generated. This is the interval before the system sends a Restart Request (an IIH with RR bit set in Restart TLV) until the CSNP is received from the helping router.

Syntax **graceful-restart t1 {interval *seconds* | retry-times *value*}**

To return to the default, use the **no graceful-restart t1** command.

Parameters

interval	Enter the keyword interval to set the wait time. Range: 5-120 seconds Default: 5 seconds
retry-times	Enter the keyword retry-times to set the number of times the request interval is extended until a CSNP is received from the helping router. Range: 1-10 attempts Default: 1

Defaults above

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

graceful-restart t2

E **S4810**

S4820T

Configure the wait time for the Graceful Restart timer T2 that a restarting router uses as the wait time for each database to synchronize.

Syntax **graceful-restart t2 {level-1 | level-2} *seconds***

To return to the default, use the **no graceful-restart t2** command.

Parameters

level-1, level-2	Enter the keyword level-1 or level-2 to identify the database instance type to which the wait interval applies.
<i>seconds</i>	Range: 5-120 seconds Default: 30 seconds

Defaults 30 seconds

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

graceful-restart t3

E **S4810**

Configure the overall wait time before Graceful Restart is completed.

S4820T

Syntax `graceful-restart t3 {adjacency | manual} seconds`

To return to the default, use the **no graceful-restart t3** command.

Parameters

adjacency	Enter the keyword adjacency so that the restarting router receives the remaining time value from its peer and adjusts its T3 value accordingly if user has configured this option.
manual	Enter the keyword manual to specify a time value that the restarting router uses. Range: 50-120 seconds default: 30 seconds

Defaults manual, 30 seconds

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

Usage Information

The running router sets remaining time value to the current adjacency hold time. This can be overridden by implementing this command.

Override the default restart-wait time by entering the **no graceful-restart restart-wait** command. When restart-wait is disabled, the current adjacency hold time is used.

Be sure to set the t3 timer to adjacency on the restarting router when implementing this command. The restarting router gets the remaining time value from its peer and adjusts its T3 value accordingly only when you have configured **graceful-restart t3 adjacency**.

Related Commands

graceful-restart restart-wait	Enable the Graceful Restart maximum wait time before a restarting peer comes up.
---	--

graceful-restart restart-wait

E **S4810**

Enable the Graceful Restart maximum wait time before a restarting peer comes up.

S4820T

Be sure to set the t3 timer to adjacency on the restarting router when implementing this command.

Syntax `graceful-restart restart-wait seconds`

To return to the default, use the **no graceful-restart restart-wait** command.

Parameters	seconds	Range: 5-300 seconds Default: 30 seconds
Defaults	30 seconds	
Command Modes	ROUTER ISIS	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.3.1.0	Introduced on the E-Series
Related Commands	graceful-restart t3	Configure the overall wait time before Graceful Restart is completed.

hello padding

E **S4810**

S4820T

Use to turn ON or OFF padding for LAN and point-to-point hello PDUs or to selectively turn padding ON or OFF for LAN or point-to-point hello PDUs.

Syntax **hello padding [multi-point | point-to-point]**

To return to default, use **no hello padding [multi-point | point-to-point]**.

Parameters	multi-point	(OPTIONAL) Enter the keyword multi-point to pad only LAN hello PDUs.
	point-to-point	(OPTIONAL) Enter the keyword point-to-point to pad only point-to-point PDUs.
Defaults	Both LAN and point-to-point hello PDUs are padded.	
Command Modes	ROUTER ISIS	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
Usage Information	IS-IS hellos are padded to the full maximum transmission unit (MTU) size. Padding IS-IS Hellos (IHS) to the full MTU provides early error detection of large frame transmission problems or mismatched MTUs on adjacent interfaces.	
Related Commands	isis hello padding	Turn ON or OFF hello padding on an interface basis.

hostname dynamic

E **S4810**

S4820T

Enables dynamic learning of hostnames from routers in the domain and allows the routers to advertise the hostname in LSPs.

Syntax	hostname dynamic				
	To disable this command, enter no hostname dynamic .				
Defaults	Enabled.				
Command Modes	ROUTER ISIS				
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810
Version 8.3.19.0	Introduced on S4820T				
Version 8.3.12.0	Introduced on S4810				
Usage Information	Use this command to build name-to-systemID mapping tables through the protocol. All show commands that display systems also display the hostname.				
Related Commands	<table border="1"> <tr> <td>clns host</td> <td>Define a name-to-NSAP mapping.</td> </tr> </table>	clns host	Define a name-to-NSAP mapping.		
clns host	Define a name-to-NSAP mapping.				

ignore-lsp-errors

E **S4810** Ignore LSPs with bad checksums instead of purging those LSPs.
S4820T

Syntax	ignore-lsp-errors				
	To return to the default values, enter no ignore-lsp-errors .				
Defaults	In IS-IS, the default deletes LSPs with internal checksum errors (no ignore-lsp-errors).				
Command Modes	ROUTER ISIS				
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810
Version 8.3.19.0	Introduced on S4820T				
Version 8.3.12.0	Introduced on S4810				
Usage Information	IS-IS normally purges LSPs with an incorrect data link checksum, causing the LSP source to regenerate the message. A cycle of purging and regenerating LSPs can occur when a network link continues to deliver accurate LSPs even though there is a link causing data corruption. This could cause disruption to your system operation.				

ip router isis

E **S4810** Configure IS-IS routing processes on an interface and attach an area tag name to the routing process.
S4820T

Syntax **ip router isis** [*tag*]

To disable IS-IS on an interface, enter the **no ip router isis** [*tag*] command.

Parameters	<i>tag</i> (OPTIONAL) The tag you specify identifies a specific area routing process. If you do not specify a tag, a null tag is assigned.						
Defaults	No processes are configured.						
Command Modes	INTERFACE						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810	Version 7.5.1.0	Introduced
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.12.0	Introduced on S4810						
Version 7.5.1.0	Introduced						
Usage Information	You must use the net command to assign a network entity title to enable IS-IS.						
Related Commands	<table border="1"> <tr> <td>net</td> <td>Configures an IS-IS network entity title (NET) for the routing process.</td> </tr> <tr> <td>router isis</td> <td>Enables the IS-IS routing protocol.</td> </tr> </table>	net	Configures an IS-IS network entity title (NET) for the routing process.	router isis	Enables the IS-IS routing protocol.		
net	Configures an IS-IS network entity title (NET) for the routing process.						
router isis	Enables the IS-IS routing protocol.						

ipv6 router isis

E **S4810**

Enable the IPv6 IS-IS routing protocol and specify an IPv6 IS-IS process.

S4820T

Syntax **ipv6 router isis** [*tag*]

To disable IS-IS routing, enter **no router isis** [*tag*].

Parameters	<i>tag</i> (OPTIONAL) This is a unique name for a routing process. A null tag is assumed if the tag option is not specified. The tag name must be unique for all IP router processes for a given router.						
Defaults	Not configured.						
Command Modes	ROUTER ISIS						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810	Version 7.5.1.0	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.12.0	Introduced on S4810						
Version 7.5.1.0	Introduced on E-Series						
Usage Information	<p>You must configure a network entity title (the net command) to specify the area address and the router system ID.</p> <p>You must enable routing on one or more interfaces to establish adjacencies and establish dynamic routing.</p> <p>Only one IS-IS routing process can be configured to perform Level 2 routing. A level-1-2 designation performs Level 1 and Level 2 routing at the same time.</p>						
Related Commands	<table border="1"> <tr> <td>net</td> <td>Configure an IS-IS network entity title (NET) for a routing process.</td> </tr> <tr> <td>is-type</td> <td>Assign a type for a given area.</td> </tr> </table>	net	Configure an IS-IS network entity title (NET) for a routing process.	is-type	Assign a type for a given area.		
net	Configure an IS-IS network entity title (NET) for a routing process.						
is-type	Assign a type for a given area.						

isis circuit-type

E **S4810**

Configure the adjacency type on interfaces.

S4820T

Syntax **isis circuit-type** { **level-1** | **level-1-2** | **level-2-only** }

To return to the default values, enter **no isis circuit-type**.

Parameters

level-1	You can form a Level 1 adjacency if there is at least one common area address between this system and neighbors. You cannot form Level 2 adjacencies on this interface.
level-1-2	You can form a Level 1 and Level 2 adjacencies when the neighbor is also configured as Level-1-2 and there is at least one common area, if not, then a Level 2 adjacency is established. This is the default.
level-2-only	You can form a Level 2 adjacencies when other Level 2 or Level 1-2 routers and their interfaces are configured for Level 1-2 or Level 2. Level 1 adjacencies cannot be established on this interface.

Defaults level-1-2

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

Because the default establishes Level 1 and Level 2 adjacencies, you do not need to configure this command. Routers in an IS-IS system should be configured as a Level 1-only, Level 1-2, or Level 2-only system.

Only configure interfaces as Level 1 or Level 2 on routers that are between areas (for example, a Level 1-2 router) to prevent the software from sending unused hello packets and wasting bandwidth.

isis csnp-interval

E **S4810**

Configure the IS-IS complete sequence number PDU (CSNP) interval on an interface.

S4820T

Syntax **isis csnp-interval** *seconds* [**level-1** | **level-2**]

To return to the default values, enter the **no isis csnp-interval** [*seconds*] [**level-1** | **level-2**] command.

Parameters	<i>seconds</i>	Interval of transmission time between CSNPs on multi-access networks for the designated intermediate system. Range: 0 to 65535 Default: 10
	level-1	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 1.
	level-2	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 2.

Defaults *seconds* = 10; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

The default values of this command are typically satisfactory transmission times for a specific interface on a designated intermediate system. To maintain database synchronization, the designated routers send CSNPs.

Level 1 and Level 2 CSNP intervals can be configured independently.

isis hello-interval

E **S4810** Specify the length of time between hello packets sent.
S4820T

Syntax **isis hello-interval** *seconds* [**level-1** | **level-2**]

To return to the default values, enter the **no isis hello-interval** [*seconds*] [**level-1** | **level-2**] command.

Parameters	<i>seconds</i>	Allows you to set the length of time between hello packet transmissions. Range: 1 to 65535 Default: 10
	level-1	(OPTIONAL) Select this value to configure the hello interval for Level 1. This is the default.
	level-2	(OPTIONAL) Select this value to configure the hello interval for Level 2.

Defaults *seconds* = 10; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

Hello packets are held for a length of three times the value of the hello interval. Use a high hello interval seconds to conserve bandwidth and CPU usage. Use a low hello interval seconds for faster convergence (but uses more bandwidth and CPU resources).

Related Commands

isis hello-multiplier	Specifies the number of IS-IS hello packets a neighbor must miss before the router should declare the adjacency as down.
---------------------------------------	--

isis hello-multiplier

E **S4810**

Specify the number of IS-IS hello packets a neighbor must miss before the router declares the adjacency down.

S4820T

Syntax

isis hello-multiplier *multiplier* [**level-1** | **level-2**]

To return to the default values, enter **no isis hello-multiplier** [*multiplier*] [**level-1** | **level-2**].

Parameters

<i>multiplier</i>	Specifies an integer that sets the multiplier for hello holding time. Never configure a hello-multiplier lower than the default (3). Range: 3 to 1000 Default: 3
level-1	(OPTIONAL) Select this value to configure the hello multiplier independently for Level 1 adjacencies. This is the default.
level-2	(OPTIONAL) Select this value to configure the hello multiplier independently for Level 2 adjacencies.

Defaults

multiplier =3; **level-1** (if not otherwise specified)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

The holdtime (the product of the hello-multiplier multiplied by the hello-interval) determines how long a neighbor waits for a hello packet before declaring the neighbor is down so routes can be recalculated.

Related Commands

isis hello-interval	Specify the length of time between hello packets.
-------------------------------------	---

isis hello padding

E **S4810**

Turn ON or OFF padding of hello PDUs from the interface mode.

S4820T

Syntax

isis hello padding

To return to the default, use the **no isis hello padding**.

Defaults	Padding of hello PDUs is enabled (ON).	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
Usage Information	Hello PDUs are “padded” only when both the global and interface padding options are ON. Turning either one OFF will disable padding for the corresponding interface(s).	
Related Commands	hello padding	Turn ON or OFF padding for LAN and point-to-point hello PDUs.

isis ipv6 metric

E **S4810**

Assign metric to an interface for use with IPv6 information.

S4820T

Syntax **isis ipv6 metric** *default-metric* [**level-1** | **level-2**]

To return to the default values, enter **no ipv6 isis metric** [*default-metric*] [**level-1** | **level-2**] command.

Parameters	default-metric	Metric assigned to the link and used to calculate the cost from each other router via the links in the network to other destinations. You can configure this metric for Level 1 or Level 2 routing. Range:0 to 16777215 Default: 10
	level-1	(OPTIONAL) Enter level-1 to configure the shortest path first (SPF) calculation for Level 1 (intra-area) routing. This is the default.
	level-2	(OPTIONAL) Enter level-2 to configure the SPF calculation for Level 2 (inter-area) routing.

Defaults *default-metric* = 10; **level-1** (if not otherwise specified)

Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 7.5.1.0	Introduced on E-Series
Usage Information	Dell Force10 recommends configuring metrics on all interfaces. Without configuring this command, the IS-IS metrics are similar to hop-count metrics.	

isis metric

E **S4810**

Assign a metric to an interface.

S4820T

Syntax **isis metric** *default-metric* [**level-1** | **level-2**]

To return to the default values, enter **no isis metric** [*default-metric*] [**level-1** | **level-2**].

Parameters

<i>default-metric</i>	Metric assigned to the link and used to calculate the cost from each other router via the links in the network to other destinations. You can configure this metric for Level 1 or Level 2 routing. Range: 0 to 63 for narrow and transition metric styles; 0 to 16777215 for wide metric styles. Default: 10
level-1	(OPTIONAL) Enter level-1 to configure the shortest path first (SPF) calculation for Level 1 (intra-area) routing. This is the default.
level-2	(OPTIONAL) Enter level-2 to configure the SPF calculation for Level 2 (inter-area) routing.

Defaults *default-metric* = 10; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

Dell Force10 recommends configuring metrics on all interfaces. Without configuring this command, the IS-IS metrics are similar to hop-count metrics.

isis network point-to-point

E **S4810**

Enable the software to treat a broadcast interface as a point-to-point interface.

S4820T

Syntax **isis network point-to-point**

To disable the feature, enter **no isis network point-to-point**.

Defaults Not enabled.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

isis password

E **S4810**

Configure an authentication password for an interface.

S4820T

Syntax `isis password [hmac-md5] password [level-1 | level-2]`

To delete a password, enter the **no isis password** [*password*] [**level-1** | **level-2**] command.

Parameters

<i>encryption-type</i>	(OPTIONAL) Enter 7 to encrypt the password using DES.
hmac-md5	(OPTIONAL) Enter the keyword hmac-md5 to encrypt the password using MD5.
<i>password</i>	Assign the interface authentication password.
level-1	(OPTIONAL) Independently configures the authentication password for Level 1. The router acts as a station router for Level 1 routing. This is the default.
level-2	(OPTIONAL) Independently configures the authentication password for Level 2. The router acts as an area router for Level 2 routing.

Defaults No default password. **level-1** (if not otherwise specified)

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

To protect your network from unauthorized access, use this command to prevent unauthorized routers from forming adjacencies.

You can assign different passwords for different routing levels by using the **level-1** and **level-2** keywords.

The **no** form of this command disables the password for Level 1 or Level 2 routing, using the respective keywords **level-1** or **level-2**.

This password provides limited security as it is processed as plain text.

isis priority

E **S4810**

Set priority of the designated router you select.

S4820T

Syntax `isis priority value [level-1 | level-2]`

To return to the default values, enter the **no isis priority** [*value*] [**level-1** | **level-2**] command.

Parameters	<i>value</i>	This value sets the router priority. The higher the value, the higher the priority. Range: 0 to 127 Default: 64
	level-1	(OPTIONAL) Specify the priority for Level 1. This is the default.
	level-2	(OPTIONAL) Specify the priority for Level 2.

Defaults *value* = 64; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

Usage Information You can configure priorities independently for Level 1 and Level 2. Priorities determine which router on a LAN will be the designated router. Priorities are advertised within hellos. The router with the highest priority will become the designated intermediate system (DIS).

Routers with a priority of 0 cannot be a designated router. Setting the priority to 0 lowers the chance of this system becoming the DIS, but does not prevent it. If all the routers have priority 0, one with highest MAC address will become DIS even though its priority is 0.

is-type



Configure IS-IS operating level for a router.

Syntax **is-type** { **level-1** | **level-1-2** | **level-2-only** }

To return to the default values, enter **no is-type**.

Parameters	level-1	Allows a router to act as a Level 1 router.
	level-1-2	Allows a router to act as both a Level 1 and Level 2 router. This is the default.
	level-2-only	Allows a router to act as a Level 2 router.

Defaults **level-1-2**

Command Modes ROUTER ISIS

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

Usage Information The IS-IS protocol automatically determines area boundaries and are able to keep Level 1 and Level 2 routing separate. Poorly planned use of this feature may cause configuration errors, such as accidental area partitioning.

If you are configuring only one area in your network, you do not need to run both Level 1 and Level 2 routing algorithms. The IS type can be configured as Level 1.

log-adjacency-changes

E **S4810**

Generate a log messages for adjacency state changes.

S4820T

Syntax **log-adjacency-changes**

To disable this function, enter **no log-adjacency-changes**.

Defaults Adjacency changes are not logged.

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.12.0 Introduced on S4810

Usage Information

This command enables you to monitor adjacency state changes, which is useful when you monitor large networks. Messages are logged in the system error message facility.

lsp-gen-interval

E **S4810**

Set the minimum interval between successive generations of link-state packets (LSPs).

S4820T

Syntax **lsp-gen-interval** [**level-1** | **level-2**] *interval seconds* [*initial_wait_interval seconds* [*second_wait_interval seconds*]]

To restore default values, use the **no lsp-gen-interval** [**level-1** | **level-2**] *interval seconds* [*initial_wait_interval seconds* [*second_wait_interval seconds*]] command.

Parameters

level-1	(OPTIONAL) Enter the keyword level-1 to apply the configuration to generation of Level-1 LSPs.
level-2	(OPTIONAL) Enter the keyword level-2 to apply the configuration to generation of Level-2 LSPs.
<i>interval seconds</i>	Enter the maximum number of seconds between LSP generations. Range: 0 to 120 seconds Default: 5 seconds

<i>initial_wait_interval</i> <i>seconds</i>	(OPTIONAL) Enter the initial wait time, in seconds, before running the first LSP generation. Range: 0 to 120 seconds Default: 1 second
<i>second_wait_interval</i> <i>seconds</i>	(OPTIONAL) Enter the wait interval, in seconds, between the first and second LSP generation. Range: 0 to 120 seconds Default: 5 seconds

Defaults Defaults as above

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Expanded to support LSP Throttling Enhancement

Usage Information

LSP throttling slows down the frequency at which LSPs are generated during network instability. Even though throttling LSP generations slows down network convergence, no throttling can result in a network not functioning as expected. If network topology is unstable, throttling slows down the scheduling of LSP generations until the topology regains its stability.

The first generation is controlled by the initial wait interval and the second generation is controlled by the second wait interval. Each subsequent wait interval is twice as long as the previous one until the wait interval reaches the maximum wait time specified (*interval seconds*). Once the network calms down and there are no triggers for two times the maximum interval, fast behavior is restored (the initial wait time).

Isp-mtu



Set the maximum transmission unit (MTU) of IS-IS link-state packets (LSPs). This command only limits the size of LSPs generated by this router.

Syntax **isp-mtu** *size*

To return to the default values, enter **no isp-mtu**.

Parameters

<i>size</i>	The maximum LSP size, in bytes. Range: 128 to 1497 for non-jumbo mode; 128 to 9195 for jumbo mode. Default: 1497
-------------	--

Defaults 1497 bytes

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Expanded to support LSP Throttling Enhancement

Usage Information

The link MTU and the LSP MTU size must be the same.

Since each device can generate a maximum of 255 LSPs, consider carefully whether the [lsp-mtu](#) command should be configured.

lsp-refresh-interval

E **S4810**

S4820T

Set the link state PDU (LSP) refresh interval. LSPs must be refreshed before they expire. When the LSPs are not refreshed after a refresh interval, they are kept in a database until their [max-lsp-lifetime](#) reaches zero and then LSPs will be purged.

Syntax

lsp-refresh-interval *seconds*

To restore the default refresh interval, enter **no lsp-refresh-interval**.

Parameters

seconds

The LSP refresh interval, in seconds. This value has to be less than the seconds value specified with the [max-lsp-lifetime](#) command.

Range: 1 to 65535 seconds.

Default: 900

Defaults

900 seconds

Command Modes

ROUTER ISIS

Command History

Version 8.3.19.0

Introduced on S4820T

Version 8.3.12.0

Introduced on S4810

Version 7.5.1.0

Expanded to support LSP Throttling Enhancement

Usage Information

The refresh interval determines the rate at which route topology information is transmitted preventing the information from becoming obsolete.

The refresh interval must be less than the LSP lifetime specified with the [max-lsp-lifetime](#) command. A low value reduces the amount of time that undetected link state database corruption can persist at the cost of increased link utilization. A higher value reduces the link utilization caused by the flooding of refreshed packets.

Related Commands

[max-lsp-lifetime](#)

Sets the maximum interval that LSPs persist without being refreshed

max-area-addresses

E **S4810**

S4820T

Configure manual area addresses.

Syntax

max-area-addresses *number*

To return to the default values, enter **no max-area-addresses**.

Parameters	number	Set the maximum number of manual area addresses. Range: 3 to 6. Default: 3
Defaults	3 addresses	
Command Modes	ROUTER ISIS	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 7.5.1.0	Expanded to support LSP Throttling Enhancement
Usage Information	Use this command to configure the number of area addresses on router. This value should be consistent with routers in the same area, or else, the router will form only Level 2 adjacencies. The value should be same among all the routers to form Level 1 adjacencies.	

max-lsp-lifetime

E **S4810**

Set the maximum time that link-state packets (LSPs) exist without being refreshed.

S4820T

Syntax **max-lsp-lifetime** *seconds*

To restore the default time, enter **no max-lsp-lifetime**.

Parameters	<i>seconds</i>	The maximum lifetime of LSP in seconds. This value must be greater than the lsp-refresh-interval . The higher the value the longer the LSPs are kept. Range: 1 to 65535 Default: 1200
Defaults	1200 seconds	
Command Modes	ROUTER ISIS	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
Usage Information	Change the maximum LSP lifetime with this command. The maximum LSP lifetime must always be greater than the LSP refresh interval.	
	The <i>seconds</i> parameter enables the router to keep LSPs for the specified length of time. If the value is higher, the overhead is reduced on slower-speed links.	
Related Commands	lsp-refresh-interval	Use this command to set the link-state packet (LSP) refresh interval.

maximum-paths

E **S4810**

Allows you to configure the maximum number of equal cost paths allowed in a routing table.

S4820T

Syntax **maximum-paths** *number*

To return to the default values, enter **no maximum-paths**.

Parameters

<i>number</i>	Enter a number as the maximum number of parallel paths an IP routing installs in a routing table. Range: 1 to 16. Default: 4
---------------	--

Defaults 4

Command Mode

ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.8.1.0	Introduced multi-topology ISIS support
Version 6.3.1.0	Introduced

metric-style

E **S4810**

Configure a router to generate and accept old-style, new-style, or both styles of type, length, and values (TLV).

S4820T

Syntax **metric-style** { **narrow** [**transition**] | **transition** | **wide** [**transition**] } [**level-1** | **level-2**]

To return to the default values, enter the **no metric-style** { **narrow** [**transition**] | **transition** | **wide** [**transition**] } [**level-1** | **level-2**] command.

Parameters

narrow	Allows you to configure the E-Series to generate and accept old-style TLVs. Metric range: 0 to 63
transition	Allows you to configure the E-Series to generate both old-style and new-style TLVs. Metric range: 0 to 63
wide	Allows you to configure the E-Series to generate and accept only new-style TLVs. Metric range: 0 to 16777215
level-1	Enables the metric style on Level 1.
level-2	Enables the metric style on Level 2.

Defaults **narrow**; if no Level is specified, Level-1 and Level-2 are configured.

Command Modes

ROUTER ISIS

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
Usage Information	If you enter the metric-style wide command, the FTOS generates and accepts only new-style TLVs. The router uses less memory and other resources rather than generating both old-style and new-style TLVs.	
	The new-style TLVs have wider metric fields than old-style TLVs.	
Related Commands	isis metric	Use this command to configure a metric for an interface.

multi-topology

E **S4810**

S4820T

Enables Multi-Topology IS-IS. It also allows enabling/disabling of old and new style TLVs for IP prefix information in the LSPs.

Syntax **multi-topology [transition]**

To return to a single topology configuration, enter **no multi-topology [transition]**.

Parameters

transition

Defaults Disabled

Command Mode CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 7.8.1.0	Introduced

net

E **S4810**

S4820T

Use this mandatory command to configure an IS-IS network entity title (NET) for a routing process. If a NET is not configured, the IS-IS process will not start.

Syntax **net network-entity-title**

To remove a net, enter **no net network-entity-title**.

Parameters

<i>network-entity-title</i>	Specify the area address and system ID for an IS-IS routing process. The first 1 to 13 bytes identify the area address. The next 6 bytes identify the system ID. The last 1 byte is the selector byte, always identified as zero zero (00). This argument can be applied to an address or a name.
-----------------------------	---

Defaults Not configured.

Command Modes ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

passive-interface

E **S4810****S4820T**

Suppress routing updates on an interface. This command stops the router from sending updates on that interface.

Syntax**passive-interface** *interface*

To delete a passive interface configuration, enter the **no passive-interface** *interface* command.

Parameters*interface*

Enter the following keywords and slot/port or number information:

- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For Loopback interface, enter the keyword **loopback** followed by a number from zero (0) to 16383.
- For a Port Channel interface, enter the keyword **port-channel** followed by a number:
C-Series and **S-Series** Range: 1-128
E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
- For a SONET interface, enter the keyword **sonet** followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword **TenGigabitEthernet** followed by the slot/port information.
- For a VLAN, enter the keyword **vlan** followed by a number from 1 to 4094.

Defaults

Not configured.

Command Modes

ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

Although the passive interface will neither send nor receive routing updates, the network on that interface will still be included in IS-IS updates sent via other interfaces

redistribute

E **S4810****S4820T**

Redistribute routes from one routing domain to another routing domain.

Syntax

redistribute { **static** | **connected** | **rip** } [**level-1** | **level-1-2** | **level-2**] [**metric** *metric-value*] [**metric-type** { **external** | **internal** }] [**route-map** *map-name*]

To end redistribution or disable any of the specified keywords, enter the **no redistribute {static | connected | rip} [metric *metric-value*] [metric-type {external | internal}] [level-1 | level-1-2 | level-2] [route-map *map-name*]** command.

Parameters

connected	Enter the keyword connected redistribute active routes into IS-IS.
rip	Enter the keyword rip to redistribute RIP routes into IS-IS.
static	Enter the keyword static to redistribute user-configured routes into IS-IS.
metric <i>metric-value</i>	(OPTIONAL) Assign a value to the redistributed route. Range: 0 to 16777215 Default: 0. You should use a value that is consistent with the destination protocol.
metric-type {external internal}	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. You must specify one of the following: <ul style="list-style-type: none"> • external • internal
level-1	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 1 routes.
level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level-1-2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes. This is the default.
route-map <i>map-name</i>	(OPTIONAL) If the route-map argument is not entered, all routes are redistributed. If a <i>map-name</i> value is not specified, then no routers are imported.

Defaults

metric *metric-value* = 0; metric-type= internal; level-2

Command Modes

ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Usage Information

To redistribute a default route (0.0.0.0/0), configure the [default-information originate](#) command.

Changing or disabling a keyword in this command will not affect the state of the other command keywords.

When an LSP with an internal metric is received, the FTOS considers the route cost taking into consideration the advertised cost to reach the destination.

Redistributed routing information is filtered with the [distribute-list out](#) command to ensure that the routes are properly are passed to the receiving routing protocol.

How a metric value assigned to a redistributed route is advertised depends on how on the configuration of the [metric-style](#) command. If the [metric-style](#) command is set for narrow or transition mode and the metric value in the [redistribute](#) command is set to a number higher than 63, the metric value advertised in LSPs will be 63. If the [metric-style](#) command is set for wide mode, an the metric value in the [redistribute](#) command is advertised.

Related Commands

default-information originate	Generate a default route for the IS-IS domain.
distribute-list out	Suppress networks from being advertised in updates. Redistributed routing information is filtered by this command.

redistribute bgp

E **S4810**

Redistribute routing information from a BGP process. (new command in Release 6.3.1)

S4820T

Syntax

redistribute bgp *AS number* [**level-1** | **level-1-2** | **level-2**] [**metric** *metric-value*] [**metric-type** {**external** | **internal**}] [**route-map** *map-name*]

To return to the default values, enter the **no redistribute bgp** command with the appropriate parameters.

Parameters

<i>AS number</i>	Enter a number that corresponds to the Autonomous System number. Range: 1 to 65355
level-1	(OPTIONAL) Routes are independently redistributed into IS-IS Level 1 routes only
level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS Level 1 and Level 2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes only. This is the default.
metric <i>metric-value</i>	(OPTIONAL) The value used for the redistributed route. You should use a metric value that is consistent with the destination protocol. Range: 0 to 16777215 Default: 0.
metric-type { external internal }	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. The two options are: <ul style="list-style-type: none"> external internal
route-map <i>map-name</i>	<i>map-name</i> is an identifier for a configured route map. The route map should filter imported routes from the source routing protocol to the current routing protocol. If you do not specify a <i>map-name</i> , all routes are redistributed. If you specify a keyword, but fail to list route map tags, no routes will be imported.

Defaults

IS-IS Level 2 routes only

Command Modes

ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Example **Figure 29-1. redistribute bgp Command Example**

```
FTOS(conf)#router is
FTOS(conf-router_isis)#redistribute bgp 1 level-1 metric 32 metric-type external
route-map rmap-isis-to-bgp
FTOS(conf-router_bgp)#show running-config isis
!
router isis
redistribute bgp 1 level-1 metric 32 metric-type external route-map
rmap-isis-to-bgp
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Usage Information

BGP to IS-IS redistribution supports “match” options using route maps. The metric value, level, and metric-type of redistributed routes can be set by the redistribution command. More advanced “set” options can be performed using route maps.

redistribute ospf

E **S4810**

Redistribute routing information from an OSPF process.

S4820T

Syntax

redistribute ospf *process-id* [**level-1** | **level-1-2** | **level-2**] [**match** {**internal** | **external**}] [**metric** *metric-value*] [**metric-type** {**external** | **internal**}] [**route-map** *map-name*]

To return to the default values, enter the **no redistribute ospf** *process-id* [**level-1** | **level-1-2** | **level-2**] [**match** {**internal** | **external**}] [**metric** *metric-value*][**metric-type** {**external** | **internal**}] [**route-map** *map-name*] command.

Parameters

<i>process-id</i>	Enter a number that corresponds to the OSPF process ID to be redistributed. Range: 1 to 65355
metric <i>metric-value</i>	(OPTIONAL) The value used for the redistributed route. You should use a metric value that is consistent with the destination protocol. Range: 0 to 16777215 Default: 0.
metric-type { external internal }	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. The two options are: <ul style="list-style-type: none">externalinternal
level-1	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 1 routes.
level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level-1-2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes. This is the default.

match (external internal)	(OPTIONAL) The command used for OSPF to route and redistribute into other routing domains. The values are <ul style="list-style-type: none"> • internal • external
route-map map-name	<i>map-name</i> is an identifier for a configured route map. The route map should filter imported routes from the source routing protocol to the current routing protocol. If you do not specify a <i>map-name</i> , all routes are redistributed. If you specify a keyword, but fail to list route map tags, no routes will be imported.

Defaults As above

Command Modes ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.5.1.0	Introduced IPv6 ISIS support
Version 6.3.1.0	Introduced

Usage Information

How a metric value assigned to a redistributed route is advertised depends on how on the configuration of the [metric-style](#) command. If the [metric-style](#) command is set for narrow mode and the metric value in the [redistribute ospf](#) command is set to a number higher than 63, the metric value advertised in LSPs will be 63. If the [metric-style](#) command is set for wide mode, an the metric value in the [redistribute ospf](#) command is advertised.

router isis



Allows you to enable the IS-IS routing protocol and to specify an IP IS-IS process.

Syntax

router isis [*tag*]

To disable IS-IS routing, enter **no router isis** [*tag*].

Parameters

<i>tag</i>	(OPTIONAL) This is a unique name for a routing process. A null tag is assumed if the tag option is not specified. The tag name must be unique for all IP router processes for a given router.
------------	---

Defaults

Not configured.

Command Modes

ROUTER ISIS

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Usage Information

You must configure a network entity title (the [net](#) command) to specify the area address and the router system ID.

You must enable routing on one or more interfaces to establish adjacencies and establish dynamic routing.

Only one IS-IS routing process can be configured to perform Level 2 routing. A **level-1-2** designation performs Level 1 and Level 2 routing at the same time.

Related Commands

ip router isis	Configure IS-IS routing processes for IP on interfaces and attach an area designator to the routing process.
net	Configure an IS-IS network entity title (NET) for a routing process.
is-type	Assign a type for a given area.

set-overload-bit

E **S4810**

Configure the router to set the overload bit in its non-pseudonode LSPs. This prevents other routers from using it as an intermediate hop in their shortest path first (SPF) calculations.

S4820T

Syntax **set-overload-bit**

To return to the default values, enter **no set-overload-bit**.

Defaults Not set.

Command Mode ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Usage Information

Set the overload bit when a router experiences problems, such as a memory shortage due to an incomplete link state database which can result in an incomplete or inaccurate routing table. If you set the overload bit in its LSPs, other routers ignore the unreliable router in their SPF calculations until the router has recovered.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.8.1.0	Introduced multi-topology ISIS support
Version 6.3.1.0	Introduced

show config

E **S4810**

Display the changes you made to the IS-IS configuration. Default values are not shown.

S4820T

Syntax **show config**

Command Modes ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Examples **Figure 29-2. Command Example: show config (router-isis mode)**

```

FTOS(conf-router_isis)#show config
!
router isis
  clns host ISIS 49.0000.0001.F100.E120.0013.00
  log-adjacency-changes
  net 49.0000.0001.F100.E120.0013.00
  !
  address-family ipv6 unicast
  maximum-paths 16
  multi-topology transition ← Identifies that Multi-Topology
                             IS-IS is enabled in transition
  set-overload-bit mode
  spf-interval level-1 100 15 20
  spf-interval level-2 120 20 25
  exit-address-family

```

Figure 29-3. Command Example: show config (address-family-ipv6 mode)

```

FTOS(conf-router_isis-af_ipv6)#show conf
!
address-family ipv6 unicast
maximum-paths 16
multi-topology transition ← Identifies that Multi-Topology
                             IS-IS is enabled in transition
set-overload-bit mode
spf-interval level-1 100 15 20
spf-interval level-2 120 20 25
exit-address-family

```

show isis database

E **S4810**

Display the IS-IS link state database.

S4820T**Syntax****show isis database [level-1 | level-2] [local] [detail | summary] [/spid]****Parameters**

level-1	(OPTIONAL) Displays the Level 1 IS-IS link-state database.
level-2	(OPTIONAL) Displays the Level 2 IS-IS link-state database.
local	(OPTIONAL) Displays local link-state database information.
detail	(OPTIONAL) Detailed link-state database information of each LSP displays when specified. If not specified, a summary displays.
summary	(OPTIONAL) Summary of link-state database information displays when specified.
<i>spid</i>	(OPTIONAL) Display only the specified LSP.

Command Modes

EXEC

EXEC Privilege

Example Figure 29-4. Command Example: show isis database

```

FTOS#show isis database

IS-IS Level-1 Link State Database
LSPID          LSP Seq Num  LSP Checksum  LSP Holdtime  ATT/P/OL
ISIS.00-00     * 0x00000006  0xCF43        580            0/0/0

IS-IS Level-2 Link State Database
LSPID          LSP Seq Num  LSP Checksum  LSP Holdtime  ATT/P/OL
ISIS.00-00     * 0x00000006  0xCF43        580            0/0/0
!
FTOS#show isis database detail ISIS.00-00

IS-IS Level-1 Link State Database
LSPID          LSP Seq Num  LSP Checksum  LSP Holdtime  ATT/P/OL
ISIS.00-00     * 0x0000002B  0x853B        1075           0/0/0
Area Address: 49.0000.0001
NLPID:         0xCC 0x8E
IP Address:    10.1.1.1
IPv6 Address: 1011::1
Topology:      IPv4 (0x00) IPv6 (0x8002)
Metric: 10     IS OSPF.00
Metric: 10     IS (MT-IPv6) OSPF.00
Metric: 10     IP 15.1.1.0 255.255.255.0
Metric: 10     IPv6 (MT-IPv6) 1511::/64
Metric: 10     IPv6 (MT-IPv6) 2511::/64
Metric: 10     IPv6 (MT-IPv6) 1011::/64
Metric: 10     IPv6 1511::/64
Metric: 10     IP 10.1.1.0 255.255.255.0
Hostname:      ISIS

IS-IS Level-2 Link State Database
LSPID          LSP Seq Num  LSP Checksum  LSP Holdtime  ATT/P/OL
ISIS.00-00     * 0x0000002D  0xB2CD        1075           0/0/0
Area Address: 49.0000.0001
NLPID:         0xCC 0x8E
IP Address:    10.1.1.1
IPv6 Address: 1011::1
Topology:      IPv4 (0x00) IPv6 (0x8002)
Metric: 10     IS OSPF.00
Metric: 10     IS (MT-IPv6) OSPF.00
Metric: 10     IP 10.1.1.0 255.255.255.0
Metric: 10     IP 15.1.1.0 255.255.255.0
Metric: 20     IP 10.3.3.0 255.255.255.0
Metric: 10     IPv6 (MT-IPv6) 1011::/64
Metric: 10     IPv6 (MT-IPv6) 1511::/64
Metric: 10     IPv6 (MT-IPv6) 2511::/64
Metric: 20     IPv6 (MT-IPv6) 1033::/64
Metric: 10     IPv6 2511::/64
Metric: 20     IPv6 1033::/64
Hostname:      ISIS
FTOS#

```

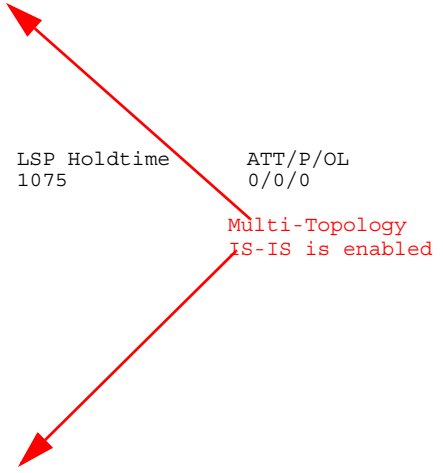


Table 29-1. Command Example Fields

Field	Description
IS-IS Level-1/Level-2 Link State Database	Displays the IS-IS link state database for Level 1 or Level 2.
LSPID	Displays the LSP identifier. The first six octets are the System ID of the originating router. The next octet is the pseudonode ID. If this byte is not zero, then the LSP describes system links. If this byte is zero (0), then the LSP describes the state of the originating router. The designated router for a LAN creates and floods a pseudonode LSP and describes the attached systems. The last octet is the LSP number. An LSP will be divided into multiple LSP fragments if there is more data than cannot fit in a single LSP. Each fragment has a unique LSP number. An * after the LSPID indicates that an LSP was originated by the system where this command was issued.
LSP Seq Num	This value is the sequence number for the LSP that allows other systems to determine if they have received the latest information from the source.
LSP Checksum	This is the checksum of the entire LSP packet.
LSP Holdtime	This value is the amount of time, in seconds, that the LSP remains valid. A zero holdtime indicates that this is a purged LSP and is being removed from the link state database. A value between brackets indicates the duration that the purged LSP stays in the database before being removed.
ATT	This value represents the Attach bit. This indicates that the router is a Level 2 router and can reach other areas. Level 1-only routers and Level 1-2 routers that have lost connection to other Level 2 routers use the Attach bit to find the closest Level 2 router. They point a default route to the closest Level 2 router.
P	This value represents the P bit. This bit will always set be zero as Dell Force10 does not support area partition repair.
OL	This value represents the overload bit, determining congestion. If the overload bit is set, other routers will not use this system as a transit router when calculating routes.

show isis graceful-restart detail

E **S4810** Display detailed IS-IS Graceful Restart related settings.

S4820T

Syntax show isis graceful-restart detail

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.3.1.0	Introduced on the E-Series

Example Figure 29-5. Command Example: show isis graceful-restart detail

```
FTOS#show isis graceful-restart detail
Configured Timer Value
=====
Graceful Restart          : Enabled
T3 Timer                  : Manual
T3 Timeout Value         : 30
T2 Timeout Value         : 30 (level-1), 30 (level-2)
T1 Timeout Value         : 5, retry count: 1
Adjacency wait time      : 30

Operational Timer Value
=====
Current Mode/State       : Normal/RUNNING
T3 Time left             : 0
T2 Time left             : 0 (level-1), 0 (level-2)
Restart ACK rcv count    : 0 (level-1), 0 (level-2)
Restart Req rcv count    : 0 (level-1), 0 (level-2)
Suppress Adj rcv count   : 0 (level-1), 0 (level-2)
Restart CSNP rcv count   : 0 (level-1), 0 (level-2)
Database Sync count      : 0 (level-1), 0 (level-2)

FTOS#
```

show isis hostname

E **S4810** Display IS-IS host names configured or learned on the E-Series.
S4820T

Syntax **show isis hostname**

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Example Figure 29-6. Command Example: show isis hostname

```
FTOS#show isis hostname
System Id      Dynamic Name  Static Name
*F100.E120.0013 Force10    ISIS
FTOS#
```

show isis interface

E **S4810** Display detailed IS-IS interface status and configuration information.
S4820T

Syntax **show isis interface** [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interface, enter the keyword loopback followed by a number from zero (0) to 16383. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Example**Figure 29-7. Command Example: show isis interface (Partial)**

```

FTOS>show isis int
GigabitEthernet 0/7 is up, line protocol is up
  MTU 1497, Encapsulation SAP
  Routing Protocol: IS-IS
    Circuit Type: Level-1-2
    Interface Index 37847070, Local circuit ID 1
    Level-1 Metric: 10, Priority: 64, Circuit ID: systest-3.01
      Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
    Number of active level-1 adjacencies: 1
    Level-2 Metric: 10, Priority: 64, Circuit ID: systest-3.01
      Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
    Number of active level-2 adjacencies: 1
    Next IS-IS LAN Level-1 Hello in 2 seconds
    Next IS-IS LAN Level-2 Hello in 1 seconds
    LSP Interval: 33
GigabitEthernet 0/8 is up, line protocol is up
  MTU 1497, Encapsulation SAP
  Routing Protocol: IS-IS
    Circuit Type: Level-1-2
    Interface Index 38371358, Local circuit ID 2
    Level-1 Metric: 10, Priority: 64, Circuit ID: systest-3.02
      Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
    Number of active level-1 adjacencies: 1
    Level-2 Metric: 10, Priority: 64, Circuit ID: systest-3.02
      Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
--More--

```

show isis neighbors

E **S4810**

Display information about neighboring (adjacent) routers.

S4820T**Syntax** **show isis neighbors** [**level-1** | **level-2**] [**detail**] [*interface*]

Parameters

level-1	(OPTIONAL) Displays information about Level 1 IS-IS neighbors.
level-2	(OPTIONAL) Displays information about Level 2 IS-IS neighbors.
detail	(OPTIONAL) Displays detailed information about neighbors.
interface	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.

Command Modes

EXEC
EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Example Figure 29-8. Command Example: show isis neighbors

```

FTOS#show isis neighbors
System Id      Interface State  Type      Priority Uptime      Circuit Id
TEST Gi 7/1   Up             L1L2 (M)  127      09:28:01    TEST.02
!
FTOS#show isis neighbors detail
System Id      Interface State  Type      Priority Uptime      Circuit Id
TEST Gi 7/1   Up             L1L2 (M)  127      09:28:04    TEST.02 Area Address(es) :
49.0000.0001
  IP Address(es): 25.1.1.3*
  MAC Address: 0000.0000.0000
  Hold Time: 28
  Link Local Address: fe80::201:e8ff:fe00:492c
  Topology: IPv4 IPv6 , Common (IPv4 IPv6 )
  Adjacency being used for MTs: IPv4 IPv6
FTOS#
  
```

Table 29-2. show isis neighbors Command Example Fields

Field	Description
System Id	The value that identifies a system in an area.
Interface	The interface, slot, and port in which the router was discovered.
State	The value providing status about the adjacency state. The range is Up and Init.
Type	This value displays the adjacency type (Layer 2, Layer 2 or both).
Priority	IS-IS priority advertised by the neighbor. The neighbor with highest priority becomes the designated router for the interface.
Uptime	Displays the interfaces uptime.
Circuit Id	The neighbor’s interpretation of the designated router for the interface.

Usage Information

Use this command to confirm that the neighbor adjacencies are operating correctly. If you suspect that they are not, you can verify the specified area addresses of the routers by using the [show isis neighbors](#) command.

show isis protocol

E **S4810**

Display IS-IS routing information.

S4820T**Syntax****show isis protocol****Command Modes**

EXEC

EXEC Privilege

Command History

 Version 8.3.19.0 Introduced on S4820T

 Version 8.3.12.0 Introduced on S4810


Example**Figure 29-9. Command Example: show isis protocol**

```

FTOS#show isis protocol
IS-IS Router: <Null Tag>
  System Id: F100.E120.0013  IS-Type: level-1-2
  Manual area address(es):
    49.0000.0001
  Routing for area address(es):
    49.0000.0001
    Interfaces supported by IS-IS:
    GigabitEthernet 1/0 - IP - IPv6
    GigabitEthernet 1/1 - IP - IPv6
    GigabitEthernet 1/10 - IP - IPv6
    Loopback 0 - IP - IPv6
  Redistributing:
  Distance: 115
  Generate narrow metrics: level-1-2
  Accept narrow metrics:  level-1-2
  Generate wide metrics:  none
  Accept wide metrics:    none
  Multi Topology Routing is enabled in transition mode.
FTOS#

```

Identifies that MT IS-IS is enabled.



show isis traffic

E **S4810**

This command enables you to display IS-IS traffic interface information.

S4820T**Syntax****show isis traffic** [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none">For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Example

Figure 29-10. Command Example: show isis traffic

```
FTOS#sho is traffic
IS-IS: Level-1 Hellos (sent/rcvd) : 0/721
IS-IS: Level-2 Hellos (sent/rcvd) : 900/943
IS-IS: PTP Hellos (sent/rcvd) : 0/0
IS-IS: Level-1 LSPs sourced (new/refresh) : 0/0
IS-IS: Level-2 LSPs sourced (new/refresh) : 1/3
IS-IS: Level-1 LSPs flooded (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs flooded (sent/rcvd) : 5934/5217
IS-IS: Level-1 LSPs CSNPs (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs CSNPs (sent/rcvd) : 472/238
IS-IS: Level-1 LSPs PSNPs (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs PSNPs (sent/rcvd) : 10/337
IS-IS: Level-1 DR Elections : 4
IS-IS: Level-2 DR Elections : 4
IS-IS: Level-1 SPF Calculations : 0
IS-IS: Level-2 SPF Calculations : 389
IS-IS: LSP checksum errors received : 0
IS-IS: LSP authentication failures : 0
FTOS#
```

Table 29-3. Command Example Fields

Item	Description
Level-1/Level-2 Hellos (sent/rcvd)	Displays the number of Hello packets sent and received.
PTP Hellos (sent/rcvd)	Displays the number of point-to-point Hellos sent and received.
Level-1/Level-2 LSPs sourced (new/refresh)	Displays the number of new and refreshed LSPs.
Level-1/Level-2 LSPs flooded (sent/rcvd)	Displays the number of flooded LSPs sent and received.
Level-1/Level-2 LSPs CSNPs (sent/rcvd)	Displays the number of CSNP LSPs sent and received.
Level-1/Level-2 LSPs PSNPs (sent/rcvd)	Displays the number of PSNP LSPs sent and received.

Table 29-3. Command Example Fields (continued)

Item	Description
Level-1/Level-2 DR Elections	Displays the number of times designated router elections ran.
Level-1/Level-2 SPF Calculations	Displays the number of shortest path first calculations.
LSP checksum errors received	Displays the number of checksum errors LSPs received.
LSP authentication failures	Displays the number of LSP authentication failures.

spf-interval

E **S4810**

S4820T

Specify the minimum interval between Shortest Path First (SPF) calculations.

Syntax **spf-interval [level-1 | level-2] interval seconds [initial_wait_interval seconds [second_wait_interval seconds]]**

To restore default values, use the **no spf-interval [level-1 | level-2] interval seconds [initial_wait_interval seconds [second_wait_interval seconds]]** command.

Parameters

level-1	(OPTIONAL) Enter the keyword level-1 to apply the configuration to Level-1 SPF calculations.
level-2	(OPTIONAL) Enter the keyword level-2 to apply the configuration to Level-2 SPF calculations.
<i>interval seconds</i>	Enter the maximum number of seconds between SPF calculations. Range: 0 to 120 seconds Default: 10 seconds
<i>initial_wait_interval seconds</i>	(OPTIONAL) Enter the initial wait time, in seconds, before running the first SPF calculations. Range: 0 to 120 seconds Default: 5 second
<i>second_wait_interval seconds</i>	(OPTIONAL) Enter the wait interval, in seconds, between the first and second SPF calculations. Range: 0 to 120 seconds Default: 5 seconds

Defaults Defaults as above

Command Modes ROUTER ISIS (*for IPv4*)

CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 7.8.1.0	Introduced to support multi-topology ISIS
Version 7.5.1.0	Expanded to support SPF Throttling Enhancement

**Usage
Information**

This command **spf-interval** in CONFIG-ROUTER-ISIS-AF-IPV6 mode is used for IPv6 Multi-Topology route computation only. If using single topology mode, use the **spf-interval** command in CONFIG-ROUTER-ISIS mode for both IPv4 and IPv6 route computations.

SPF throttling slows down the frequency at which route calculation are performed during network instability. Even though throttling route calculations slows down network convergence, not throttling can result in a network not functioning as expected. If network topology is unstable, throttling slows down the scheduling of route calculations until the topology regains its stability.

The first route calculation is controlled by the initial wait interval and the second calculation is controlled by the second wait interval. Each subsequent wait interval is twice as long as the previous one until the wait interval reaches the maximum wait time specified (*interval seconds*). Once the network calms down and there are no triggers for two times the maximum interval, fast behavior is restored (the initial wait time).

Link Aggregation Control Protocol (LACP)

Overview

This chapter contains commands for Dell Force10's implementation of Link Aggregation Control Protocol (LACP) for the creation of dynamic link aggregation groups (LAGs — called *port-channels* in FTOS parlance). For static LAG commands, the section [Port Channel Commands](#) in the Interfaces chapter), based on the standards specified in the IEEE 802.3 Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications.

Commands in this chapter generally are supported by FTOS on all Dell Force10 systems as indicated by the characters that appear below each command heading: **E** E-Series, **C** C-Series, **S** S-Series, **S4810** or **S4820T**.

Commands

Use the following commands for LACP:

- [clear lacp counters](#)
- [debug lacp](#)
- [lacp long-timeout](#)
- [lacp port-priority](#)
- [lacp system-priority](#)
- [port-channel mode](#)
- [port-channel-protocol lacp](#)
- [show lacp](#)

In addition, an FTOS option provides hitless dynamic LACP states (no noticeable impact to dynamic LACP states after an RPM failover) on E-Series. Refer to [redundancy protocol](#) in the High Availability chapter.

clear lacp counters

C E S

S4810

S4820T

Clear Port Channel counters.

Syntax

clear lacp *port-channel-number* counters

Parameters

<i>port-channel-number</i>	Enter a port-channel number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
----------------------------	---

Defaults

Without a Port Channel specified, the command clears all Port Channel counters.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced on E-Series

Related Commands

show lacp	Display the lacp configuration
---------------------------	--------------------------------

debug lacp

C E S

S4810

S4820T

Debug LACP (configuration, events etc.)

Syntax

debug lacp [config | events | pdu [in | out | [*interface* [in | out]]]]

To disable LACP debugging, use the no debug lacp [config | events | pdu [in | out | [*interface* [in | out]]]] command.

Parameters

config	(OPTIONAL) Enter the keyword config to debug the LACP configuration.
events	(OPTIONAL) Enter the keyword events to debug LACP event information.
pdu in out	(OPTIONAL) Enter the keyword pdu to debug LACP Protocol Data Unit information. Optionally, enter an in or out parameter to: <ul style="list-style-type: none"> Receive enter in Transmit enter out

<i>interface in out</i>	<p>(OPTIONAL) Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. <p>Optionally, enter an in or out parameter:</p> <ul style="list-style-type: none"> Receive enter in Transmit enter out
---------------------------	---

Defaults This command has no default values or behavior

Command Modes EXEC
EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.2.1.1	Introduced on E-Series

lacp long-timeout

C **E** **S4810**
S4820T

Configure a long timeout period (30 seconds) for an LACP session.

Syntax lacp long-timeout

To reset the timeout period to a short timeout (1 second), use the `no lacp long-timeout` command.

Defaults 1 second

Command Modes INTERFACE (conf-if-po-number)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
Version 7.5.1.0	Introduced on E-Series

Usage Information

This command applies to dynamic port-channel interfaces only. When applied on a static port-channel, the command has no effect.

Related Commands

show lacp	Display the lacp configuration
---------------------------	--------------------------------

lacp port-priority

C E S

S4810

S4820T

Configure the port priority to influence which ports will be put in standby mode when there is a hardware limitation that prevents all compatible ports from aggregating.

Syntax

lacp port-priority *priority-value*

To return to the default setting, use the no lacp port-priority *priority-value* command.

Parameters

<i>priority-value</i>	Enter the port-priority value. The higher the value number the lower the priority. Range: 1 to 65535 Default: 32768
-----------------------	---

Defaults

32768

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced on E-Series

lacp system-priority

C E S

S4810

S4820T

Configure the LACP system priority.

Syntax

lacp system-priority *priority-value*

Parameters	<i>priority-value</i>	Enter the system-priority value. The higher the value, the lower the priority. Range: 1 to 65535 Default: 32768
Defaults	32768	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.2.1.1	Introduced on E-Series

port-channel mode

C **E** **S**

Configure the LACP port channel mode.

Syntax

port-channel *number* mode [active] [passive] [off]

Parameters	<i>number</i>	Enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
	active	Enter the keyword active to set the mode to the active state.*
	passive	Enter the keyword passive to set the mode to the passive state.*
	off	Enter the keyword off to set the mode to the off state.*

* The LACP modes are defined in the table below.

Defaults

off

Command Modes

INTERFACE

Command History

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Usage Information

The LACP modes are defined in the following table.

Table 30-1. LACP Modes

Mode	Function
active	An interface is in an active negotiating state in this mode. LACP runs on any link configured in the active state and also automatically initiates negotiation with other ports by initiating LACP packets.
passive	An interface is not in an active negotiating state in this mode. LACP runs on any link configured in the passive state. Ports in a passive state respond to negotiation requests from other ports that are in active states. Ports in a passive state respond to LACP packets.
off	An interface can not be part of a dynamic port channel in the off mode. LACP will not run on a port configured in the off mode.

port-channel-protocol lacp

C **E** **S**

Enable LACP on any LAN port.

S4810

S4820T

Syntax

port-channel-protocol lacp

To disable LACP on a LAN port, use the no port-channel-protocol lacp command.

Command Modes

INTERFACE

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 6.2.1.1 Introduced

Related Commands

[show lacp](#) Display the LACP information.

[show interfaces port-channel](#) Display information on configured Port Channel groups.

show lacp

C **E** **S**

Display the LACP matrix.

S4810

S4820T

Syntax

show lacp *port-channel-number* [sys-id | counters]

Parameters

<i>port-channel-number</i>	Enter a port-channel number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.
sys-id	(OPTIONAL) Enter the keyword sys-id and the value that identifies a system.
counters	(OPTIONAL) Enter the keyword counters to display the LACP counters.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced n S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Example (show lacp port-channel-number)

```
FTOS#show lacp 1
Port-channel 1 admin up, oper up, mode lacp
Actor System ID: Priority 32768, Address 0001.e800.a12b
Partner System ID: Priority 32768, Address 0001.e801.45a5
Actor Admin Key 1, Oper Key 1, Partner Oper Key 1
LACP LAG 1 is an aggregatable link

A - Active LACP, B - Passive LACP, C - Short Timeout, D - Long Timeout
E - Aggregatable Link, F - Individual Link, G - IN_SYNC, H - OUT_OF_SYNC
I - Collection enabled, J - Collection disabled, K - Distribution enabled L -
Distribution disabled,
M - Partner Defaulted, N - Partner Non-defaulted, O - Receiver is in expired
state,
P - Receiver is not in expired state

Port Gi 10/6 is enabled, LACP is enabled and mode is lacp
Actor Admin: State ACEHJLMP Key 1 Priority 128
Oper: State ACEGIKNP Key 1 Priority 128
Partner Admin: State BDFHJLMP Key 0 Priority 0
Oper: State BCEGIKNP Key 1 Priority 128
FTOS#
```

Example (show lacp sys-id)

```
FTOS#show lacp 1 sys-id
Actor System ID: Priority 32768, Address 0001.e800.a12b
Partner System ID: Priority 32768, Address 0001.e801.45a5
FTOS#
```

Example (show lacp counter)

```
FTOS#show lacp 1 counters
-----
Port      Xmit      LACP PDU      Marker PDU      Unknown  Illegal
          Recv      Xmit      Recv      Pkts Rx  Pkts Rx
-----
Gi 10/6   200        200          0          0          0          0
FTOS#
```

**Related
Commands**

[clear lacp counters](#)

Clear the LACP counters.

[show interfaces port-channel](#)

Display information on configured Port Channel groups.

Layer 2

Overview

This chapter describes commands to configure Layer 2 features. It contains the following sections:

- [MAC Addressing Commands](#)
- [Virtual LAN \(VLAN\) Commands](#)
- [Far-End Failure Detection \(FEFD\)](#)

Some MAC addressing commands are supported only on the E-Series, some on all three Dell Force10 platforms, and some on two Dell Force10 platforms.

The VLAN commands are supported on the Dell Force10 platforms as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**

MAC Addressing Commands

The following commands are related to configuring, managing, and viewing MAC addresses:

- `clear mac-address-table`
- `mac accounting destination`
- `mac-address-table aging-time`
- `mac-address-table static`
- `mac-address-table station-move threshold`
- `mac-address-table station-move time-interval`
- `mac-address-table station-move refresh-arp`
- `mac cam fib-partition`
- `mac learning-limit`
- `mac learning-limit learn-limit-violation`
- `mac learning-limit mac-address-sticky`
- `mac learning-limit station-move-violation`
- `mac learning-limit reset`

- [show cam mac linecard \(count\)](#)
- [show cam maccheck linecard](#)
- [show cam mac linecard \(dynamic or static\)](#)
- [show cam mac stack-unit](#)
- [show mac-address-table](#)
- [show mac-address-table aging-time](#)
- [show mac accounting destination](#)
- [show mac cam](#)
- [show mac learning-limit](#)

clear mac-address-table

C E S

54810

54820T

Clear the MAC address table of all MAC address learned dynamically.

Syntax

```
clear mac-address-table {dynamic | sticky} {address mac-address | all | interface
interface | vlan vlan-id}
```

Parameters

dynamic	Enter the keyword dynamic to specify dynamically-learned MAC addresses.
sticky	Enter the keyword sticky to specify sticky MAC addresses.
address <i>mac-address</i>	Enter the keyword address followed by a MAC address in nn:nn:nn:nn:nn:nn format.
all	Enter the keyword all to delete all MAC address entries in the MAC address table.
interface <i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. • For a SONET interface, enter the keyword sonet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
vlan <i>vlan-id</i>	Enter the keyword vlan followed by a VLAN ID number from 1 to 4094.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Added support for sticky MAC addresses.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

mac accounting destination

E

Configure a destination counter for Layer 2 traffic.

Syntaxmac accounting destination { *mac-address* vlan *vlan-id* | vlan } [bytes | packets]

To delete a destination counter, enter no mac accounting destination.

Parameters

<i>mac-address</i>	Enter the MAC address in the nn:nn:nn:nn:nn:nn format to count Layer 2 packets or bytes sent to that MAC address.
vlan <i>vlan-id</i>	Enter the keyword vlan followed by the VLAN ID to count Layer 2 packets or bytes sent to the VLAN. Range: 1 to 4094.
bytes	(OPTIONAL) Enter the keyword bytes to count only bytes
packets	(OPTIONAL) Enter the keyword packets to count only packets.

Defaults

Not configured.

Command Modes

INTERFACE (available on physical interfaces only)

Command History

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

Usage InformationYou must place the interface in Layer 2 mode (using the [switchport](#) command) prior to configuring the [mac accounting destination](#) command.

mac-address-table aging-time

C **E** **S****S4810****S4820T**

Specify an aging time for MAC addresses to be removed from the MAC Address Table.

Syntaxmac-address-table aging-time *seconds*

Parameters	<i>seconds</i>	Enter either zero (0) or a number as the number of seconds before MAC addresses are relearned. To disable aging of the MAC address table, enter 0. E-Series Range from CONFIGURATION mode: 10 - 1000000 E-Series Range from INTERFACE VLAN mode: 1 - 1000000 C-Series and S-Series Range: 10 - 1000000 Default: 1800 seconds
Defaults	1800 seconds	
Command Modes	CONFIGURATION	
	INTERFACE VLAN (E-Series only)	
Command History	Version 8.3.19.0	Introduced on S4820T.
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	On the E-Series, available in INTERFACE VLAN context and reduced minimum aging time in INTERFACE VLAN context from 10 seconds to 1 second.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	mac learning-limit	Set the MAC address learning limits for a selected interface.
	show mac-address-table aging-time	Display the MAC aging time.

mac-address-table static

C E S

S4810

S4820T

Associate specific MAC or hardware addresses to an interface and VLANs.

Syntax


`mac-address-table static mac-address output interface vlan vlan-id`

To remove a MAC address, use the `no mac-address-table static mac-address output interface vlan vlan-id` command.

Parameters	<i>mac-address</i>	Enter the 48-bit hexadecimal address in nn:nn:nn:nn:nn:nn format.
	<i>output interface</i>	Enter the keyword <i>output</i> followed by one of the following interfaces: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <i>GigabitEthernet</i> followed by the slot/port information. For a Port Channel interface, enter the keyword <i>port-channel</i> followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <i>sonet</i> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <i>TenGigabitEthernet</i> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <i>fortyGigE</i> followed by the slot/port information.
	<i>vlan vlan-id</i>	Enter the keyword <i>vlan</i> followed by a VLAN ID. Range: 1 to 4094.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T.
	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	show mac-address-table	Displays the MAC address table.

mac-address-table station-move threshold





Change the frequency with which the MAC address station-move trap is sent after a MAC address changes in a VLAN. A trap is sent if a station move is detected above a threshold number of times in a given interval.

Syntax [no] *mac-address-table station-move threshold number interval count*

Parameters	<i>threshold number</i>	Enter the keyword <i>threshold</i> followed by the number of times MAC addresses in VLANs can change before an SNMP trap is sent. Range: 1 to 10
	<i>interval seconds</i>	Enter the keyword <i>interval</i> followed by the number of seconds. Range: 5 to 60

Defaults	Not configured.								
Command Modes	CONFIGURATION								
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T.</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T.	Version 8.3.7.0	Introduced on S4810	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T.								
Version 8.3.7.0	Introduced on S4810								
Version 7.5.1.0	Introduced on C-Series								
pre-Version 6.2.1.1	Introduced on E-Series								
Usage Information	For information on the specific trap sent and the corresponding Syslog refer to Chapter 60, SNMP Traps .								

mac-address-table station-move time-interval

E	Reduce the amount of time FTOS takes to detect aged entries and station moves.		
Syntax	[no] mac-address-table station-move time-interval <i>number</i>		
Parameters	<table border="1"> <tr> <td>time-interval <i>number</i></td> <td>Select the interval of the successive scans of the MAC address table that are used to detect a aged entries and station moves. Range: 500 to 5000ms</td> </tr> </table>	time-interval <i>number</i>	Select the interval of the successive scans of the MAC address table that are used to detect a aged entries and station moves. Range: 500 to 5000ms
time-interval <i>number</i>	Select the interval of the successive scans of the MAC address table that are used to detect a aged entries and station moves. Range: 500 to 5000ms		
Defaults	5000ms		
Command Modes	CONFIGURATION		
Command History	<table border="1"> <tr> <td>Version 7.8.1.0</td> <td>Introduced on E-Series</td> </tr> </table>	Version 7.8.1.0	Introduced on E-Series
Version 7.8.1.0	Introduced on E-Series		
Usage Information	FTOS takes 4 to 5 seconds to detect aged entries and station moves because the MAC address table scanning routine runs every 5000 ms by default. To achieve faster detection, reduce the scanning interval.		

mac-address-table station-move refresh-arp

C E S	Ensure that ARP refreshes the egress interface when a station move occurs due to a topology change.
S4810	
S4820T	
Syntax	[no] mac-address-table station-move refresh-arp
Defaults	No default values or behavior
Command Modes	CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

Refer to the “NIC Teaming” section of the Layer 2 chapter in the *FTOS Configuration Guide* for details on using this command.

mac cam fib-partition

E

Reapportion the amount of Content Addressable Memory (CAM) available for MAC address learning (FIB) versus the amount available for MAC ACLs on a line card.

Syntax

`mac cam fib-partition { 25 | 50 | 75 | 100 } slot-number`

To return to the default setting, enter `no mac cam fib-partition`.

Parameters

25	Enter the keyword 25 to set aside 25% of the CAM for MAC address learning.
50	Enter the keyword 50 to set aside 50% of the CAM for MAC address learning.
75	Enter the keyword 75 to set aside 75% of the CAM for MAC address learning.
100	Enter the keyword 100 to set aside 100% of the MAC CAM for MAC address learning. With this configuration, no MAC ACLs are processed.
<i>slot-number</i>	Enter the line card slot number. Range: 0 to 13 for the E1200 0 to 6 for the E600 0 to 5 for the E300

Defaults

75 (75% of the MAC CAM for MAC address learning)

Command Modes

CONFIGURATION

Usage Information

After setting the CAM partition size, the line card resets.

Related Commands

<code>show mac cam</code>	Display the current MAC CAM partition values.
---------------------------	---

mac learning-limit

C E S

S4810 S4820T

Z

Limit the maximum number of MAC addresses (static + dynamic) learned on a selected interface.

Syntax

```
mac learning-limit address_limit [vlan vlan-id] [dynamic] [station-move]
```

Parameters

<i>address_limit</i>	Enter the maximum number of MAC addresses that can be learned on the interface. Range: 1 to 1000000
vlan <i>vlan-id</i>	E-Series only: Enter the keyword followed by the VLAN ID. Range: 1 to 4094
dynamic	(OPTIONAL) Enter the keyword dynamic to allow aging of MACs even though a learning limit is configured.
station-move	(OPTIONAL) Enter the keyword station-move to allow a station move on learned MAC addresses.

Defaults

On C-Series, the default behavior is **no-station-move** + static.

On E-Series, the default behavior is **station-move** + static.

On S-Series, the default behavior is dynamic.

“Static” means manually entered addresses, which do not age.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Deprecated parameter <i>no-station-move</i> (replaced by mac-learning-limit mac-address-sticky command).
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Added vlan option on E-Series.
Version 8.2.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series; added station-move option
Version 6.5.1.0	Added support for MAC Learning-Limit on LAG

Usage Information

This command and its options are supported on physical interfaces, static LAGs, LACP LAGs, and VLANs.

If the vlan option is not specified, then the MAC address counters is not VLAN-based. That is, the sum of the addresses learned on all VLANs (not having any learning limit configuration) is counted against the MAC learning limit.

MAC Learning Limit violation logs and actions are not available on a per-VLAN basis.

With the keyword `no-station-move` option, MAC addresses learned through this feature on the selected interface will persist on a per-VLAN basis, even if received on another interface. Enabling or disabling this option has no effect on already learned MAC addresses.

Once the MAC address learning limit is reached, the MAC addresses do not age out unless you add the `dynamic` option. To clear statistics on MAC address learning, use the [clear counters](#) command with the `learning-limit` parameter.



Note: If you configure this command on an interface in a routed VLAN, and once the MAC addresses learned reaches the limit set in the [mac learning-limit](#) command, IP protocols are affected. For example, VRRP sets multiple VRRP Masters, and OSPF may not come up.

When a channel member is added to a port-channel and there is not enough ACL CAM space, then the MAC limit functionality on that port-channel is undefined. When this occurs, un-configure the existing configuration first and then reapply the limit with a lower value.

Related Commands

clear counters	Clear counters used in the <code>show interface</code> command
clear mac-address-table	Clear the MAC address table of all MAC address learned dynamically.
show mac learning-limit	Display MAC learning-limit configuration.

mac learning-limit learn-limit-violation

C E S

S4810 S4820T

Z

Configure an action for a MAC address learning-limit violation.

Syntax

`mac learning-limit learn-limit-violation {log | shutdown}`

To return to the default, use the `no mac learning-limit learn-limit-violation {log | shutdown}` command.

Parameters

<code>log</code>	Enter the keyword <code>log</code> to generate a syslog message on a learning-limit violation.
<code>shutdown</code>	Enter the keyword <code>shutdown</code> to shut down the port on a learning-limit violation.

Defaults

No default behavior or values

Command Modes

INTERFACE (*conf-if-interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced on S4810

Version 8.2.1.0	Introduced on S-Series
Version 7.8.1.0	Introduced on C-Series
Version 7.5.1.0	Introduced on E-Series

Usage Information

This is supported on physical interfaces, static LAGs, and LACP LAGs.

Related Commands

[show mac learning-limit](#) Display details of the mac learning-limit

mac learning-limit mac-address-sticky

S4810

S4820T

Maintain the dynamically-learned mac addresses as sticky MAC addresses on the selected port.

Syntax

mac learning-limit *mac-address-sticky*

Use the 'no' form of this command to convert the sticky MAC addresses to dynamic MAC addresses.

Parameters

mac-address-sticky Configures the dynamic MAC addresses as sticky on an interface.

Defaults

No default behavior or values.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810

Usage Information

If mac-learning-limit is configured and the sticky MAC feature is enabled, dynamically-learned MAC addresses are converted to sticky for that port. Any new MAC address that is learned also becomes sticky for that port.

Related Commands

[show mac learning-limit](#) Display details of the mac learning-limit

mac learning-limit station-move-violation

C E S

S4810

S4820T

Specify the actions for a station move violation.

Syntax

mac learning-limit station-move-violation { log | shutdown-both | shutdown-offending | shutdown-original }

To disable a configuration, use the no mac learning-limit station-move-violation command, followed by the configured keyword.

Parameters	log	Enter the keyword <code>log</code> to generate a syslog message on a station move violation.
	shutdown-both	Enter the keyword <code>shutdown</code> to shut down both the original and offending interface and generate a syslog message.
	shutdown-offending	Enter the keyword <code>shutdown-offending</code> to shut down the offending interface and generate a syslog message.
	shutdown-original	Enter the keyword <code>shutdown-original</code> to shut down the original interface and generate a syslog message.
Defaults	No default behavior or values	
Command Modes	INTERFACE (conf-if- <i>interface-slot/port</i>)	
Command History	Version 8.3.19.0	Introduced on S4820T.
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Introduced on S-Series
	Version 7.8.1.0	Introduced on C-Series
	Version 7.5.1.0	Introduced on E-Series
Usage Information	This is supported on physical interfaces, static LAGs, and LACP LAGs.	
Related Commands	show mac learning-limit	Display details of the mac learning-limit

mac learning-limit reset

C **E** **S**

Reset the MAC address learning-limit error-disabled state.

S4810

S4820T

Syntax mac learning-limit reset

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Introduced on S-Series
	Version 7.7.1.0	Introduced on C-Series
	Version 7.5.1.0	Introduced on E-Series

show cam mac linecard (count)

E **S4810**

S4820T

Display the CAM size and the portions allocated for MAC addresses and for MAC ACLs.

Syntax `show cam mac linecard slot port-set port-pipe count [vlan vlan-id] [interface interface]`

Parameters

linecard <i>slot</i>	(REQUIRED) Enter the keyword <code>linecard</code> followed by a slot number to select the linecard for which to gather information. E-Series range: 0 to 6.
port-set <i>port-pipe</i>	(REQUIRED) Enter the keyword <code>port-set</code> followed by a Port-Pipe number to select the Port-Pipe for which to gather information. E-Series range: 0 or 1
count	(REQUIRED) Enter the keyword <code>count</code> to display CAM usage by interface type.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> followed by the interface type, slot and port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> followed by the VLAN ID to display the MAC address assigned to the VLAN. Range: 1 to 4094.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
pre-Version 6.2.1.1	Introduced on E-Series

show cam maccheck linecard

C

Display the results of the BCMI2 check command.

Syntax `show cam maccheck linecard slot port-set port-pipe`

Parameters

linecard <i>slot</i>	(REQUIRED) Enter the keyword linecard followed by a slot number to select the linecard for which to gather information. C300 range: 0 to 7; C150 range: 0 to 4
port-set <i>port-pipe</i>	(REQUIRED) Enter the keyword port-set followed by a Port-Pipe number to select the Port-Pipe for which to gather information. Range: 0 or 1

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.6.1.0 Introduced on C-Series

Example

```
FTOS#show cam maccheck linecard 2 port-set 0
Dumping entries. From 0 to 16383.
Progress . marks 100 memory table entries.
.....Index 5576 (0x15c8) has valid entries
(H: 2b9, E: 0)

<MAC ADDR=0xfffffffffff, VLAN_ID=0xfff, PRI=0, CPU=0, DST_DISCARD=0, SRC_DISCARD=0, SCP=0, TGID_LO=0, PORT_TGID=0, TGID_PORT=0, T=0, TGID_HI=0, L2MC_PTR=0, MODULE_ID=0, REMOTE_TRUNK=0, L3=0, MAC_BLOCK_INDEX=0, STATIC_BIT=1, RPE=0, MIRROR=0, VALID=1, EVEN_PARITY=0, HITDA=0, HITS_A=0>
.....Index 6592 (0x19c0) has valid entries (H: 338, E: 0)

<MAC ADDR=0xa0000000, VLAN_ID=0xffe, PRI=0, CPU=0, DST_DISCARD=0, SRC_DISCARD=0, SCP=0, TGID_LO=0, PORT_TGID=0, TGID_PORT=0, T=0, TGID_HI=0, L2MC_PTR=0, MODULE_ID=0x10, REMOTE_TRUNK=0, L3=0, MAC_BLOCK_INDEX=0, STATIC_BIT=0, RPE=0, MIRROR=0, VALID=1, EVEN_PARITY=1, HITDA=1, HITS_A=1>

!-----output truncated-----!
```

Usage Information

Use this command to check various flags associated with each MAC address in the CAM.

The example above shows information for two MAC addresses. The second entry is for MAC address 00:00:a0:00:00:00 (leading 0s are not shown), which is shown as learned on VLAN ID 4094 (0xffff), as shown below in the example for **show mac-address-table** and the example for **show cam mac linecard**. Above, "STATIC_BIT=0" means that the address is dynamically learned.

When an entry is listed as STATIC_BIT=1, its HIT_SA is 0, which signifies that this address is not getting continuously learned through traffic. The HIT_DA is set when a new learn happens, and after the first age sweep, it gets reset.

Example (show mac-address-table)

```
FTOS#show mac-address-table
VlanId      Mac Address                Type      Interface      State
4094       00:00:a0:00:00:00         Dynamic  Gi 2/0         Active

!-----output truncated-----!
```

Example
(show cam mac linecard)


```

FTOS#show cam mac linecard 2 port-set 0
VlanId      Mac Address      Region      Interface
0           ff:ff:ff:ff:ff:ff    STATIC     00001
4094       00:00:a0:00:00:00    DYNAMIC    Gi 2/0
!-----output truncated-----!

```

show cam mac linecard (dynamic or static)






Display the CAM size and the portions allocated for MAC addresses and for MAC ACLs.

Syntax

```

show cam mac linecard slot port-set port-pipe [address mac_addr | dynamic | interface
interface | static | vlan vlan-id]

```

Parameters

<i>linecard slot</i>	(REQUIRED) Enter the keyword linecard followed by a slot number to select the linecard for which to gather information. C-Series Range: 0 to 4 (C150); 0 to 8 (C300) E-Series Range: 0 to 6
<i>port-set port-pipe</i>	(REQUIRED) Enter the keyword port-set followed by a Port-Pipe number to select the Port-Pipe for which to gather information. Range: 0 or 1
<i>address mac-addr</i>	(OPTIONAL) Enter the keyword address followed by a MAC address in the nn:nn:nn:nn:nn:nn format to display information on that MAC address.
<i>dynamic</i>	(OPTIONAL) Enter the keyword dynamic to display only those MAC addresses learned dynamically by the switch.
<i>interface interface</i>	(OPTIONAL) Enter the keyword interface followed by the interface type, slot and port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
<i>static</i>	(OPTIONAL) Enter the keyword static to display only those MAC address specifically configured on the switch.
<i>vlan vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by the VLAN ID to display the MAC address assigned to the VLAN. Range: 1 to 4094.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show cam mac linecard 1 port-set 0
Port - (TableID) assignments:
00(01) 01(01) 02(01) 03(01) 04(01) 05(01) 06(01) 07(01) 08(01) 09(01)
10(01) 11(01)
12(01) 13(01) 14(01) 15(01) 16(01) 17(01) 18(01) 19(01) 20(01) 21(01)
22(01) 23(01)
Index Table ID VlanId Mac Address Region Interface
0 1 0 00:01:e8:0d:b7:3b LOCAL_DA 1e000
1 1 0 00:01:e8:0d:b7:3a LOCAL_DA 1e000
101 0 0 00:01:e8:00:04:00 SYSTEM_STATIC
01c05
102 0 0 01:80:00:00:00:00 SYSTEM_STATIC
01c05
103 0 0 01:00:0c:cc:cc:cc SYSTEM_STATIC
01c01
104 0 0 01:80:c2:00:00:02 SYSTEM_STATIC
01c02
105 0 0 01:80:c2:00:00:0e SYSTEM_STATIC
01c01
106 0 0 00:01:e8:0d:b7:68 SYSTEM_STATIC DROP
107 0 0 00:01:e8:0d:b7:67 SYSTEM_STATIC DROP
108 0 0 00:01:e8:0d:b7:66 SYSTEM_STATIC DROP
109 0 0 00:01:e8:0d:b7:65 SYSTEM_STATIC DROP
110 0 0 00:01:e8:0d:b7:64 SYSTEM_STATIC DROP
111 0 0 00:01:e8:0d:b7:63 SYSTEM_STATIC DROP
112 0 0 00:01:e8:0d:b7:62 SYSTEM_STATIC DROP
113 0 0 00:01:e8:0d:b7:61 SYSTEM_STATIC DROP
114 0 0 00:01:e8:0d:b7:60 SYSTEM_STATIC DROP
115 0 0 00:01:e8:0d:b7:5f SYSTEM_STATIC DROP
116 0 0 00:01:e8:0d:b7:5e SYSTEM_STATIC DROP
117 0 0 00:01:e8:0d:b7:5d SYSTEM_STATIC DROP
FTOS#
```

show cam mac stack-unit



Display the Content Addressable Memory (CAM) size and the portions allocated for MAC addresses and for MAC ACLs.

Syntax

```
show cam mac stack-unit unit_number port-set port-pipe count [vlan vlan-id] [interface interface]
```

Parameters

stack-unit <i>unit_number</i>	(REQUIRED) Enter the keyword <code>linecard</code> followed by a stack member number to select the linecard for which to gather information. S-Series Range: 0 to 1
port-set <i>port-pipe</i>	(REQUIRED) Enter the keyword <code>port-set</code> followed by a Port-Pipe number to select the Port-Pipe for which to gather information. S-Series Range: 0 or 1
address <i>mac-addr</i>	(OPTIONAL) Enter the keyword <code>address</code> followed by a MAC address in the <code>nn:nn:nn:nn:nn:nn</code> format to display information on that MAC address.
dynamic	(OPTIONAL) Enter the keyword <code>dynamic</code> to display only those MAC addresses learned dynamically by the switch.
static	(OPTIONAL) Enter the keyword <code>static</code> to display only those MAC address specifically configured on the switch.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> followed by the interface type, slot and port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: S-Series Range: 1 to 128 For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> followed by the VLAN ID to display the MAC address assigned to the VLAN. Range: 1 to 4094.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 7.6.1.0	This version of the command introduced for S-Series

show mac-address-table

C **E** **S**

Display the MAC address table.

S4810**S4820T****Syntax**

```
show mac-address-table [dynamic | static] [address mac-address | interface interface |
vlan vlan-id] [count [vlan vlan-id] [interface interface-type [slot [/port]]]]
```

Parameters

dynamic	(OPTIONAL) Enter the keyword dynamic to display only those MAC addresses learned dynamically by the switch. Optionally, you can also add one of these combinations: address/mac-address , interface/interface , or vlan vlan-id .
static	(OPTIONAL) Enter the keyword static to display only those MAC address specifically configured on the switch. Optionally, you can also add one of these combinations: address/mac-address , interface/interface , or vlan vlan-id .
address <i>mac-address</i>	(OPTIONAL) Enter the keyword address followed by a MAC address in the nn:nn:nn:nn:nn:nn format to display information on that MAC address.
interface <i>interface</i>	(OPTIONAL) Enter the keyword interface followed by the interface type, slot and port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
interface <i>interface-type</i>	(OPTIONAL) Instead of entering the keyword interface followed by the interface type, slot and port information, as above, you can enter the interface type, followed by just a slot number.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by the VLAN ID to display the MAC address assigned to the VLAN. Range: 1 to 4094.
count	(OPTIONAL) Enter the keyword count , followed optionally, by an interface or VLAN ID, to display total or interface-specific static addresses, dynamic addresses, and MAC addresses in use.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Updated output
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```

FTOS#show mac-address-table
VlanId  Mac Address          Type   Interface  State
999      00:00:00:00:00:19        Sticky Gi 0/1    Active
999      00:00:00:00:00:29        Dynamic Gi 0/2    Active
FTOS#

```

Table 31-1. show mac-address-table Information

Column Heading	Description
VlanId	Displays the VLAN ID number.
Mac Address	Displays the MAC address in nn:nn:nn:nn:nn:nn format.
Type	Lists whether the MAC address was manually configured (Static), learned dynamically (Dynamic), or associated with a specific port (Sticky).
Interface	Displays the interface type and slot/port information. The following abbreviations describe the interface types: <ul style="list-style-type: none"> • gi — Gigabit Ethernet followed by a slot/port. • po — Port Channel followed by a number. Range: 1 to 255 for TeraScale • so — Sonet followed by a slot/port. • te — 10-Gigabit Ethernet followed by a slot/port.
State	Lists if the MAC address is in use (Active) or not in use (Inactive).

**Example
(show
mac-address-table
count)**

```

FTOS# show mac-address-table count
MAC Entries for all vlans :
Dynamic Address Count :           110
Static Address (User-defined) Count : 0
Sticky Address Count :           0
Total Synced Mac from Peer(N) :   100
Total MAC Addresses in Use:       110
FTOS#

```

Table 31-2. show mac-address-table count Information

Line Beginning with	Description
MAC Entries...	Displays the number of MAC entries learnt per VLAN.
Dynamic Address...	Lists the number of dynamically learned MAC addresses.
Static Address...	Lists the number of user-defined MAC addresses.
Total MAC...	Lists the total number of MAC addresses used by the switch.

**Related
Commands**

show mac-address-table aging-time	Display MAC aging time.
---	-------------------------

show mac-address-table aging-time

C E S

Display the aging times assigned to the MAC addresses on the switch.

S4810

S4820T

Syntax show mac-address-table aging-time [vlan *vlan-id*]

Parameters

vlan <i>vlan-id</i>	On the E-Series, enter the keyword <i>vlan</i> followed by the VLAN ID to display the MAC address aging time for MAC addresses on the VLAN. Range: 1 to 4094.
---------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
8.3.7.0	Introduced on S4810
Version 8.3.1.0	Added the <i>vlan</i> option on the E-Series.
Version 7.7.1.0	Introduced on C-Series and S-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show mac-address-table aging-time
Mac-address-table aging time : 1800

FTOS#
```

Related Commands

show mac-address-table	Display the current MAC address configuration.
--	--

show mac accounting destination

E S4810

Display destination counters for Layer 2 traffic (available on physical interfaces only).

S4820T

Syntax show mac accounting destination [*mac-address* vlan *vlan-id*] [interface *interface* [*mac-address* vlan *vlan-id*] [vlan *vlan-id*]] [vlan *vlan-id*]

Parameters

<i>mac-address</i>	(OPTIONAL) Enter the MAC address in the nn:nn:nn:nn:nn:nn format to display information on that MAC address.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> followed by the interface type, slot and port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> followed by the VLAN ID to display the MAC address assigned to that VLAN. Range: 1 to 4094.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

MAC Accounting information can be accessed using SNMP via the Force10 Monitor MIB. For more information on enabling SNMP, refer to Chapter 3 of the *FTOS Configuration Guide*.



Note: Currently, the Force10 MONITOR MIB does not return the MAC addresses in an increasing order via SNMP. As a workaround, you can use the `-C c` option in `snmpwalk` or `snmpbulkwalk` to access the Force10 MONITOR MIB. For example:

```
% snmpwalk -C c -v 2c -c public 133.33.33.131 enterprise.6027.3.3.3
```

Example

```
FTOS#sh mac accounting destination interface gigabitethernet 2/1
Destination          Out Port  VLAN  Packets  Bytes
00:44:00:00:00:02    Te  11/0  1000    10000    5120000
00:44:00:00:00:01    Te  11/0  1000    10000    5120000
00:22:00:00:00:00    Te  11/0  1000    10000    5120000
00:44:00:00:00:02    Te  11/0  2000    10000    5120000
00:44:00:00:00:01    Te  11/0  2000    10000    5120000

FTOS#
```

Related Commands

show mac accounting access-list	Display MAC access list configurations and counters (if configured).
---	--

show mac cam

E

Display the CAM size and the portions allocated for MAC addresses and for MAC ACLs.

Syntax show mac cam

Command Modes EXEC

EXEC Privilege

Command History

pre-Version 6.2.1.1	Introduced on E-Series
------------------------	------------------------

Example

```
FTOS#show mac cam
Slot  Type      MAC CAM Size  MAC FIB Entries  MAC ACL Entries
  0    E24PD      64K entries   48K (75%)        8K (25%)
  2    E24PD2    128K entries  64K (50%)        32K (50%)
 11    EX2YD      64K entries   16K (25%)        24K (75%)
Note: All CAM entries are per portpipe.
FTOS#
```

Table 31-3. show mac cam Information

Field	Description
Slot	Lists the active line card slots.
Type	Lists the type of line card present in the slot.
MAC CAM Size	Displays the total CAM size available. Note: A portion of the MAC CAM is used for system operations, therefore adding the MAC FIB and MAC ACL will be less than the MAC CAM.
MAC FIB Entries	Displays the amount and percentage of CAM available for MAC addresses.
MAC ACL Entries	Displays the amount and percentage of CAM available for MAC ACLs.

show mac learning-limit

C E S4810

Display MAC address learning limits set for various interfaces.

S4820T

Syntax show mac learning-limit [violate-action] [detail] [interface *interface* [vlan *vlan-id*]]

Parameters

violate-action	(OPTIONALY) Enter the keyword <i>violate-action</i> to display the MAC learning limit violation status.
detail	(OPTIONAL) Enter the keyword <i>detail</i> to display the MAC learning limit in detail.

<code>interface <i>interface</i></code>	(OPTIONAL) Enter the keyword <code>interface</code> with the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For SONET interfaces, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series Range: 1 to 128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale.
<code>vlan <i>vlan-id</i></code>	On the E-Series, enter the keyword <code>vlan</code> followed by the VLAN ID. Range: 1-4094

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Added <code>vlan</code> option on E-Series.
Version 7.7.1.0	Introduced on C-Series
Version 7.5.1.0	Added support for <code>violate-action</code> and <code>detail</code> options
Version 6.5.1.0	Added support for Port Channel

Example (E-Series)

E-Series output:

```

FTOS#show mac learning-limit
Interface      Vlan      Learning      Dynamic      Static
Unknown SA
Slot/port     Id        Limit         MAC count    MAC count
Drops
Gi 5/84       2         2             0            0
0
Gi 5/84       *         5             0            0
0
Gi 5/85       3         3             0            0
0
Gi 5/85       *         10            0            0
0
FTOS#show mac learning-limit interface gig 5/84
Interface      Vlan      Learning      Dynamic      Static
Unknown SA
Slot/port     Id        Limit         MAC count    MAC count
Drops

```

```

Gi 5/84      2      2      0      0
0
Gi 5/84      *      5      0      0
0
FTOS#show mac learning-limit interface gig 5/84 vlan 2
Interface      Vlan      Learning      Dynamic      Static
Unknown SA
Slot/port      Id      Limit      MAC count      MAC count
Drops
Gi 5/84      2      2      0      0
0

```

**Example
(C-Series &
S-Series)**

C-Series/S-Series output:

```

FTOS#show mac learning-limit
Interface      Learning      Dynamic      Static
Unknown SA
Slot/port      Limit      MAC count      MAC count      Drops
Gi 1/0      10      0      0      0
0
Gi 1/1      5      0      0      0
0
FTOS#show mac learning-limit interface gig 1/0
Interface      Learning      Dynamic      Static
Unknown SA
Slot/port      Limit      MAC count      MAC count      Drops
Gi 1/0      10      0      0      0
0

```

Virtual LAN (VLAN) Commands

The following commands configure and monitor Virtual LANs (VLANs). VLANs are a virtual interface and use many of the same commands as physical interfaces.

You can configure an IP address and Layer 3 protocols on a VLAN called Inter-VLAN routing. FTP, TFTP, ACLs and SNMP are not supported on a VLAN.

Occasionally, while sending broadcast traffic over multiple Layer 3 VLANs, the VRRP state of a VLAN interface may continually switch between Master and Backup.

- [description](#)
- [default vlan-id](#)
- [default-vlan disable](#)
- [enable vlan-counters](#)
- [name](#)
- [show config](#)
- [show vlan](#)

- [tagged](#)
- [track ip](#)
- [untagged](#)

Refer also to [VLAN Stacking](#) and VLAN-related commands, such as [portmode hybrid](#), in the [Interfaces](#) chapter.

description

C **E** **S**

Add a description about the selected VLAN.

Syntax

`description description`

To remove the description from the VLAN, use the `no description` command.

Parameters

<i>description</i>	Enter a text string description to identify the VLAN (80 characters maximum).
--------------------	---

Defaults

No default behavior or values

Command Modes

INTERFACE VLAN

Command History

Version 7.6.1.0	Introduced on C-Series and S-Series
Version 6.3.1.0	Introduced on E-Series

Related Commands

show vlan	Display VLAN configuration.
---------------------------	-----------------------------

default vlan-id

C **E** **S**

S4810

S4820T

Specify a VLAN as the Default VLAN.

Syntax

`default vlan-id vlan-id`

To remove the default VLAN status from a VLAN and VLAN 1 does not exist, use the `no default vlan-id vlan-id` syntax.

Parameters

<i>vlan-id</i>	Enter the VLAN ID number of the VLAN to become the new Default VLAN. Range: 1 to 4094. Default: 1
----------------	---

Defaults

The Default VLAN is VLAN 1.

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T.
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Usage Information	To return VLAN 1 as the Default VLAN, use this command syntax (default-vlan-id 1).	
	The Default VLAN contains only untagged interfaces.	
Related Commands	interface vlan Configure a VLAN.	

default-vlan disable

C **E** **S**

S4810

S4820T

Disable the default VLAN so that all switchports are placed in the Null VLAN until they are explicitly configured as a member of another VLAN.

Defaults

The default VLAN is enabled.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced no S4810
Version 8.3.1.0	Introduced

Usage Information

no default vlan disable is not listed in the running-configuration, but when the default VLAN is disabled, default-vlan disable is listed in the running-configuration.

enable vlan-counters

E **X**

Display VLAN counters for ingress and/or egress hardware. You must be in restricted mode to use this command.

Syntax

enable vlan-output-counters [ingress | egress | all]

To return to the default (disabled), use the no enable vlan-output-counters command.

Defaults

Disabled — VLAN counters are disabled in hardware (all linecards/port-pipes) by default.

Command Modes

CONFIGURATION

Command History

Version 8.1.1.2	Introduced on E-Series ExaScale E600i
Version 8.1.1.0	Introduced on E-Series ExaScale E1200i

Example

```

FTOS(conf)#enable vlan-output-counters
FTOS(conf)#exit
FTOS#show interface vlan 101
Vlan 101 is down, line protocol is down
Address is 00:01:e8:26:e0:5b, Current address is
00:01:e8:26:e0:5b
Interface index is 1107787877
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 1000 Mbit
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 01:12:44
Queueing strategy: fifo
Input Statistics:
    0 packets, 0 bytes
Output Statistics:
    0 packets, 0 bytes
Time since last interface status change: 01:12:44
FTOS#

```

```

FTOS#show interfaces vlan 1
Vlan 1 is down, line protocol is down
Address is 00:01:e8:13:a5:aa, Current address is
00:01:e8:13:a5:aa
Interface index is 1107787777
Internet address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 1000 Mbit
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 01:36:01
Queueing strategy: fifo
Input Statistics:
    100000 packets, 10000000 bytes
Output Statistics:
    200000 packets, 20800000 bytes
Time since last interface status change: 01:36:01
FTOS#

```

Usage Information

FTOS supports a command to enable viewing of the VLAN input/output counters. This command also applies to SNMP requests. If the command is not enabled, IFM returns zero values for VLAN output counters.

SNMP counters differ from show interface counters as SNMP counters must maintain history. At any point, the value of SNMP counters reflect the amount of traffic being carried on the VLAN.

VLAN output counters may show higher than expected values because source-suppression drops are counted.

During an RPM failover event, all SNMP counters remain intact. The counters will sync over to the secondary RPM.

name

C E S

S4810

S4820T

Assign a name to the VLAN.

Syntax

name *vlan-name*

To remove the name from the VLAN, enter no name.

Parameters

<i>vlan-name</i>	Enter up to 32 characters as the name of the VLAN.
------------------	--

Defaults

Not configured.

Command Modes

INTERFACE VLAN

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

To display information about a named VLAN, enter the [show vlan](#) command with the name parameter or the [show interfaces description](#) command.

Related Commands

description	Assign a descriptive text string to the interface.
interface vlan	Configure a VLAN.
show vlan	Display the current VLAN configurations on the switch.

show config

C E S

S4810

S4820T

Display the current configuration of the selected VLAN.

Syntax

show config

Command Modes

INTERFACE VLAN

Example

```
FTOS(conf-if-vl-100)#show config
!
```

```
interface Vlan 100
  no ip address
  no shutdown
FTOS(conf-if-vl-100)#
```

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

show vlan

C E S

S4810

S4820T

Display the current VLAN configurations on the switch.

Syntax

show vlan [brief | id *vlan-id* | name *vlan-name*]

Parameters

brief	(OPTIONAL) Enter the keyword brief to display the following information: <ul style="list-style-type: none"> • VLAN ID • VLAN name (left blank if none is configured.) • Spanning Tree Group ID • MAC address aging time • IP address
id <i>vlan-id</i>	(OPTIONAL) Enter the keyword id followed by a number from 1 to 4094. Only information on the VLAN specified is displayed.
name <i>vlan-name</i>	(OPTIONAL) Enter the keyword name followed by the name configured for the VLAN. Only information on the VLAN named is displayed.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Augmented to display PVLAN data for C-Series and S-Series; revised output to include Description field to display user-entered VLAN description
Version 7.6.1.0	Introduced on S-Series; revised output to display Native VLAN
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show vlan
```

Codes: * - Default VLAN, G - GVRP VLANs, P - Primary, C - Community, I - Isolated
 Q: U - Untagged, T - Tagged
 x - Dot1x untagged, X - Dot1x tagged
 G - GVRP tagged, M - Vlan-stack

NUM	Status	Description	Q	Ports
* 1	Inactive			
2	Active		U Po1 (Gi 13/0) T Po20 (Gi 13/6), Gi 13/25 T Gi 13/7	
3	Active		T Po20 (Gi 13/6) T Gi 13/7 U Gi 13/1	
4	Active		U Po2 (Gi 13/2) T Po20 (Gi 13/6) T Gi 13/7	
5	Active		T Po20 (Gi 13/6) T Gi 13/7 U Gi 13/3	
6	Active		U Po3 (Gi 13/4) T Po20 (Gi 13/6) T Gi 13/7	
7	Active		T Po20 (Gi 13/6) T Gi 13/7 U Gi 13/5	
P 100	Active			T Po1 (Gi 0/1) T Gi 0/2
C 101	Inactive			T Gi 0/3
I 102	Inactive			T Gi 0/4
FTOS#				

Table 31-4. show vlan Information

Column Heading	Description
(Column 1 — no heading)	asterisk symbol (*) = Default VLAN G = GVRP VLAN P = primary VLAN C = community VLAN I = isolated VLAN
NUM	Displays existing VLAN IDs.
Status	Displays the word <i>Inactive</i> for inactive VLANs and the word <i>Active</i> for active VLANs.
Q	Displays G for GVRP tagged, M for member of a VLAN-Stack VLAN, T for tagged interface, U (for untagged interface), x (uncapitalized x) for Dot1x untagged, or X (capitalized X) for Dot1x tagged.
Ports	Displays the type, slot, and port information. For the type, Po = port channel, Gi = gigabit ethernet, and Te = ten gigabit ethernet.

**Example
(show vlan id)**

```

FTOS# show vlan id 40

Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
  x - Dot1x untagged, X - Dot1x tagged
  G - GVRP tagged, M - Vlan-stack

      NUM      Status      Description                               Q Ports
      40      Active                               M Gi 13/47
FTOS#show vlan id 41

Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
  x - Dot1x untagged, X - Dot1x tagged
  G - GVRP tagged, M - Vlan-stack

      NUM      Status      Description                               Q Ports
      41      Active                               T Gi 13/47

FTOS#show vlan id 42

Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
  x - Dot1x untagged, X - Dot1x tagged
  G - GVRP tagged, M - Vlan-stack

      NUM      Status      Description                               Q Ports
      42      Active                               U Gi 13/47
FTOS#

```

**Example
(show vlan brief)**

```

FTOS#show vlan br
VLAN Name                               STG  MAC Aging IP Address
-----
1                                           0    1800    unassigned
2                                           0    1800    2.2.2.2/24
3                                           0    1800    3.3.3.2/24
FTOS#

```

**Example
(Using VLAN
Name)**

```

FTOS(conf)#interface vlan 222
FTOS(conf-if-vl-222)#name test
FTOS(conf-if-vl-222)#do show vlan name test

Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
  x - Dot1x untagged, X - Dot1x tagged
  G - GVRP tagged, M - Vlan-stack

      NUM      Status      Description                               Q Ports
      222     Inactive                               U Gi 1/22
FTOS(conf-if-vl-222)#
FTOS#

```

Related Commands

vlan-stack compatible	Enable the Stackable VLAN feature on the selected VLAN.
interface vlan	Configure a VLAN.

tagged

C E S

S4810

S4820T

Syntax

Add a Layer 2 interface to a VLAN as a tagged interface.

`tagged interface`

To remove a tagged interface from a VLAN, use no `tagged interface` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information.For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
------------------	--

Defaults

All interfaces in Layer 2 mode are untagged.

Command Modes

INTERFACE VLAN

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

When you use the no `tagged` command, the interface is automatically placed in the Default VLAN as an untagged interface unless the interface is a member of another VLAN. If the interface belongs to several VLANs, you must remove it from all VLANs to change it to an untagged interface.

Tagged interfaces can belong to multiple VLANs, while untagged interfaces can only belong to one VLAN at a time.

Related Commands

interface vlan	Configure a VLAN.
untagged	Specify which interfaces in a VLAN are untagged.

track ip

C E S

S4810

S4820T

Track the Layer 3 operational state of a Layer 3 VLAN, using a subset of the VLAN member interfaces.

Syntax

track ip *interface*

To remove the tracking feature from the VLAN, use the no track ip *interface* command.

Parameters

interface

Enter the following keywords and slot/port or number information:

- For a 1-Gigabit Ethernet interface, enter the keyword `GigabitEthernet` followed by the slot/port information.
- For a Port Channel interface, enter the keyword `port-channel` followed by a number:
C-Series and **S-Series** Range: 1 to 128
E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale.
- For a SONET interface, enter the keyword `sonet` followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword `fortyGigE` followed by the slot/port information.

Defaults

Not configured

Command Modes

INTERFACE VLAN

Command History

Version 8.3.19.0 Introduced on S4820T.

Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale.

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

pre-Version 6.2.1.1 Introduced on E-Series

Usage Information

When this command is configured, the VLAN is operationally UP if any of the interfaces specified in the track ip command are operationally UP, and the VLAN is operationally DOWN if none of the tracking interfaces are operationally UP.

If the track ip command is not configured, the VLAN's Layer 3 operational state depends on all the members of the VLAN.

The Layer 2 state of the VLAN, and hence the Layer 2 traffic is not affected by the track ip command configuration.

Related Commands

[interface vlan](#) Configure a VLAN.

[tagged](#) Specify which interfaces in a VLAN are tagged.

untagged

C E S

S4810

S4820T

Add a Layer 2 interface to a VLAN as an untagged interface.

Syntax

untagged *interface*

To remove an untagged interface from a VLAN, use the no untagged *interface* command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
------------------	--

Defaults

All interfaces in Layer 2 mode are untagged.

Command Modes

INTERFACE VLAN

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

Untagged interfaces can only belong to one VLAN.

In the Default VLAN, you cannot use the no untagged *interface* command. To remove an untagged interface from all VLANs, including the Default VLAN, enter the INTERFACE mode and use the [no switchport](#) command.

Related Commands

interface vlan	Configure a VLAN.
tagged	Specify which interfaces in a VLAN are tagged.

Far-End Failure Detection (FEFD)

Overview

FTOS supports Far-End Failure Detection (FEFD) on the Ethernet interfaces of the following platforms as indicated by the characters that appear under each of the command headings: E-Series **E**, S4810 **S4810**

The FEFD feature detects and reports far-end link failures.

- FEFD is not supported on the Management interface.
- During an RPM failover, FEFD is operationally disabled for approximately 8-10 seconds.
- By default, FEFD is disabled.

Commands

The FEFD commands are:

- `debug fefd`
- `fefd`
- `fefd reset`
- `fefd reset`
- `fefd reset`
- `fefd reset`
- `fefd reset`
- `fefd mode`
- `fefd reset`
- `show fefd`

debug fefd

E **S4810**

S4820T

Enable debugging of FEFD.

Syntax

debug fefd { **events** | **packets** } [*interface*]

To disable debugging of FEFD, use the **no debug fefd** { **events** | **packets** } [*interface*] command.

Parameters

events

Enter the keyword **events** to enable debugging of FEFD state changes.

- packets** Enter the keyword **packets** to enable debugging of FEFD to view information on packets sent and received.
- interface** (OPTIONAL) Enter the following keywords and slot/port or number information:
- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
 - For a SONET interface, enter the keyword **sonet** followed by the slot/port information.
 - For a 10-Gigabit Ethernet interface, enter the keyword **TenGigabitEthernet** followed by the slot/port information.
 - For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
 - For a 40-Gigabit Ethernet interface, enter the keyword **fortyGigE** followed by the slot/port information.

Command Modes EXEC Privilege

Related Commands

fehd	Enable Far-End Failure Detection on an interface.
fehd reset	Enable FEFD globally on the system.

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810.
	Legacy E-Series command

fehd



Enable Far-End Failure Detection on an interface.

Syntax

fehd

To disable FEFD on an interface, enter **no fehd**.

Defaults

Disabled.

Command Modes

INTERFACE

Usage Information

When you enter **no fehd** for an interface and **fehd-global**, FEFD is enabled on the interface because the **no fehd** command is not retained in the configuration file. To keep the interface FEFD disabled when the global configuration changes, use the [fehd reset](#) command.

Related Commands

fehd disable	Disable Far-End Failure Detection on an interface.
fehd reset	Enable FEFD globally on the system.
fehd mode	Change the FEFD mode on an interface.

Command History

Version 8.3.19.0	Introduced on S4820T.
------------------	-----------------------

 Version 8.3.12.0 Introduced on S4810.

 Legacy E-Series command

fefd disable

 E **S4810**
S4820T

Disable FEFD on an interface only. This command overrides the [fefd reset](#) command for the interface.

Syntax

fefd disable

To re-enable FEFD on an interface, enter **no fefd disable**.

Default

Not configured.

Command Modes

INTERFACE

Related Commands

fefd disable	Disable Far-End Failure Detection on an interface.
------------------------------	--

fefd reset	Enable FEFD globally on the system.
----------------------------	-------------------------------------

Command History

 Version 8.3.19.0 Introduced on S4820T.

 Version 8.3.12.0 Introduced on S4810.

 Legacy E-Series command

fefd-global

 E **S4810**
S4820T

Enable FEFD globally on the system.

Syntax

fefd-global [mode {normal | aggressive}]

To disable FEFD globally, use the **no fefd-global [mode {normal | aggressive}]** command syntax.

Parameters

normal (OPTIONAL) Enter the keywords **mode normal** to change the link state to “unknown” when a far-end failure is detected by the software on that interface. When the interface is placed in “unknown” state, the software brings down the line protocol.

Default: Normal mode

aggressive (OPTIONAL) Enter the keyword **mode aggressive** to change the link state to “error-disabled” when a far-end failure is detected by the software on that interface. When an interface is placed in “error-disabled” state, you must enter the [fefd reset](#) command to reset the interface state.

Defaults

Disabled.

Command Modes

CONFIGURATION

Related Commands

fefd	Enable Far-End Failure Detection.
fefd-global interval	Configure an interval between FEFD control packets.
show fefd	

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810.
	Legacy E-Series command

Usage Information

If you enter only the **fefd-global** syntax, the mode is normal and the default interval is 15 seconds.

If you disable FEFD globally (**no fefd-global**), the system does not remove the FEFD interface configuration.

fefd-global interval

E **S4810**

Configure an interval between FEFD control packets.

S4820T**Syntax****fefd-global interval** *seconds*

To return to the default value, enter **no fefd-global interval**.

Parameters

<i>seconds</i>	Enter a number as the time between FEFD control packets. Range: 3 to 300 seconds Default: 15 seconds
----------------	--

Defaults

15 seconds

Command Modes

CONFIGURATION

Related Commands

fefd	Enable Far-End Failure Detection.
fefd-global	Enable FEFD globally on the system.

Command History

Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810.
	Legacy E-Series command

fefd interval

E **S4810**

S4820T

Set an interval between control packets.

Syntax

fefd interval *seconds*

To return to the default value, enter **no fefd interval**.

Parameters

seconds Enter a number as the time between FEFD control packets.
Range: 3 to 300 seconds
Default: 15 seconds

Defaults

15 seconds

Command Modes

INTERFACE

Related Commands

fefd	Enable Far-End Failure Detection.
----------------------	-----------------------------------

Command History

Version 8.3.19.0	Introduced on S4820T.
------------------	-----------------------

Version 8.3.12.0	Introduced on S4810.
------------------	----------------------

Legacy E-Series command

fefd mode

E **S4810**

S4820T

Change the FEFD mode on an interface.

Syntax

fefd mode {**normal** | **aggressive**}]

To return the FEFD mode to the default of normal, enter **no fefd mode**.

Parameters

normal (OPTIONAL) Enter the keyword **normal** to change the link state to “unknown” when a far-end failure is detected by the software on that interface. When the interface is placed in “unknown” state, the software brings down the line protocol.

aggressive (OPTIONAL) Enter the keyword **aggressive** to change the link state to “error-disabled” when a far-end failure is detected by the software on that interface. When an interface is placed in “error-disabled” state, you must enter the [fefd reset](#) command to reset the interface state.

Defaults

normal

Command Modes

INTERFACE

Related Commands

fefd	Enable Far-End Failure Detection.
----------------------	-----------------------------------

Command History

Version 8.3.19.0 Introduced on S4820T.

Version 8.3.12.0 Introduced on S4810.

Legacy E-Series command

fefd reset

E **S4810**

S4820T

Reset all interfaces or a single interface that was in “error-disabled” mode.

Syntax

fefd reset [*interface*]

Parameters

interface

(OPTIONAL) Enter the following keywords and slot/port or number information:

- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For a SONET interface, enter the keyword **sonet** followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword **TenGigabitEthernet** followed by the slot/port information.
- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword **fortyGigE** followed by the slot/port information.

Defaults

Not configured.

Command Modes

EXEC Privilege

Related Commands

[fefd](#)

Enable Far-End Failure Detection.

Command History

Version 8.3.19.0 Introduced on S4820T.

Version 8.3.12.0 Introduced on S4810.

Legacy E-Series command

show fefd

E **S4810**

S4820T

View FEFD status globally or on a specific interface.

Syntax

show fefd [*interface*]

Parameters*interface*

(OPTIONAL) Enter the following keywords and slot/port or number information:

- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For a SONET interface, enter the keyword **sonet** followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword **TenGigabitEthernet** followed by the slot/port information.
- For a 1-Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword **fortyGigE** followed by the slot/port information.

Command Modes

EXEC

EXEC Privilege

Example

```
FTOS#sh fefd
FEFD is globally 'ON', interval is 10 seconds, mode is 'Aggressive'.
```

INTERFACE	MODE	INTERVAL (second)	STATE
Gi 5/0	Aggressive	10	Admin Shutdown
Gi 5/1	Aggressive	10	Admin Shutdown
Gi 5/2	Aggressive	10	Admin Shutdown
Gi 5/3	Aggressive	10	Admin Shutdown
Gi 5/4	Aggressive	10	Admin Shutdown
Gi 5/5	Aggressive	10	Admin Shutdown
Gi 5/6	Aggressive	10	Admin Shutdown
Gi 5/7	Aggressive	10	Admin Shutdown
Gi 5/8	Aggressive	10	Admin Shutdown
Gi 5/9	Aggressive	10	Admin Shutdown
Gi 5/10	NA	NA	Locally disabled
Gi 5/11	Aggressive	10	Err-disabled

```
FTOS#
```

Table 31-5. Description of show fefd display

Field	Description
Interface	Displays the interfaces type and number.
Mode	Displays the mode (aggressive or normal) or NA if the interface contains fefd reset in its configuration.
Interval	Displays the interval between FEFD packets.
State	Displays the state of the interface and can be one of the following: <ul style="list-style-type: none"> • bi-directional (interface is up and connected and ing neighbor's echoes) • err-disabled (only found when the FEFD mode is aggressive and when the interface has not n its neighbor's echoes for 3 times the message interval. To reset an interface in this state, use the fefd reset command.) • unknown (only found when FEFD mode is normal) • locally disabled (interface contains the fefd reset command in its configuration) • Admin Shutdown (interface is disabled with the shutdown command)
Related Commands	
fefd	Enable Far-End Failure Detection.
fefd disable	Disable FEFD on an interface only.

**Command
History**

fefd-global	Enable FEFD globally on the system.
fefd reset	Reset all interfaces or a single interface that was in “error-disabled” mode.
Version 8.3.19.0	Introduced on S4820T.
Version 8.3.12.0	Introduced on S4810.
	Legacy E-Series command

Link Layer Discovery Protocol (LLDP)

Overview

Link Layer Discovery Protocol (LLDP) advertises connectivity and management from the local station to the adjacent stations on an IEEE 802 LAN. LLDP facilitates multi-vendor interoperability by using standard management tools to discover and make available a physical topology for network management. The FTOS implementation of LLDP is based on IEEE standard 801.1ab.

The basic LLDP commands are supported by FTOS on all Dell Force10 systems, as indicated by the characters that appear below each command heading: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

This chapter contains the following commands, in addition to the commands in the related section — LLDP-MED Commands.

- [advertise dot1-tlv](#)
- [advertise dot3-tlv](#)
- [advertise management-tlv](#)
- [clear lldp counters](#)
- [clear lldp neighbors](#)
- [debug lldp interface](#)
- [disable](#)
- [hello](#)
- [mode](#)
- [multiplier](#)
- [protocol lldp \(Configuration\)](#)
- [protocol lldp \(Interface\)](#)
- [show lldp neighbors](#)
- [show lldp statistics](#)
- [show running-config lldp](#)

The starting point for using LLDP is invoking LLDP with the protocol `lldp` command in either the CONFIGURATION or INTERFACE mode.

The information distributed by LLDP is stored by its recipients in a standard Management Information Base (MIB). The information can be accessed by a network management system through a management protocol such as SNMP.

the Link Layer Discovery Protocol chapter of the *FTOS Configuration Guide* for details on implementing LLDP/LLDP-MED.

advertise dot1-tlv

C E S

S4810

S4820T

Advertise dot1 TLVs (Type, Length, Value).

Syntax

```
advertise dot1-tlv {port-protocol-vlan-id | port-vlan-id | vlan-name }
```

To remove advertised dot1-tlv, use the `no advertise dot1-tlv {port-protocol-vlan-id | port-vlan-id | vlan-name }` command.

Parameters

port-protocol-vlan-id	Enter the keyword port-protocol-vlan-id to advertise the port protocol VLAN identification TLV.
port-vlan-id	Enter the keyword port-vlan-id to advertise the port VLAN identification TLV.
vlan-name	Enter the keyword vlan-name to advertise the vlan-name TLV. This keyword is only supported on C-Series and S-Series.

Defaults

Disabled

Command Modes

CONFIGURATION (conf-`lldp`) and INTERFACE (conf-if-`interface-lldp`)

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0.	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series, added vlan-name option.
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Related Commands

protocol lldp (Configuration)	Enable LLDP globally.
debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show running-config lldp	Display the LLDP running configuration

advertise dot3-tlv

C E S

Advertise dot3 TLVs (Type, Length, Value).

S4810

S4820T

Syntax advertise dot3-tlv { max-frame-size }

To remove advertised dot3-tlv, use the no advertise dot3-tlv { max-frame-size } command.

Parameters

max-frame-size	Enter the keyword max-frame-size to advertise the dot3 maximum frame size.
----------------	--

Defaults No default values or behavior

Command Modes

CONFIGURATION (conf-lldp) and INTERFACE (conf-if-interface-lldp)

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

advertise management-tlv

C E S

Advertise management TLVs (Type, Length, Value).

S4810

S4820T

Syntax advertise management -tlv { system-capabilities | system-description | system-name }

To remove advertised management TLVs, use the no advertise management -tlv { system-capabilities | system-description | system-name } command.

Parameters

system-capabilities	Enter the keyword system-capabilities to advertise the system capabilities TLVs.
system-description	Enter the keyword system-description to advertise the system description TLVs.
system-name	Enter the keyword system-description to advertise the system description TLVs.

Defaults No default values or behavior

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

All three command options — system-capabilities, system-description, and system-name } — can be invoked individually or together, in any sequence.

clear lldp counters

C E S

S4810

S4820T

Clear LLDP transmitting and receiving counters for all physical interfaces or a specific physical interface.

Syntax

clear lldp counters *interface*

Parameters*interface*

Enter the following keywords and slot/port or number information:

- For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.
- For a 1-Gigabit Ethernet interface, enter the keyword gigabitEthernet followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword tenGigabitEthernet followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

clear lldp neighbors

C E S

S4810

S4820T

Clear LLDP neighbor information for all interfaces or a specific interfaces.

Syntax clear lldp neighbors { *interface* }

Parameters	<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.• For a 1-Gigabit Ethernet interface, enter the keyword gigabitEthernet followed by the slot/port information.• For a 10-Gigabit Ethernet interface, enter the keyword tenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
-------------------	------------------	--

Defaults No default values or behavior

Command Modes EXEC Privilege

Command History	Version 8.3.19.0.	Introduced on S4820T
	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	Version 7.4.1.0	Introduced on E-Series

debug lldp interface

C E S

S4810

S4820T

Enable LLDP debugging to display timer events, neighbor additions or deletions, and other information about incoming and outgoing packets.

Syntax debug lldp interface { *interface* | all } { events | packet { brief | detail } { tx | rx | both } }

To disable debugging, use the no debug lldp interface { *interface* | all } { events } { packet { brief | detail } { tx | rx | both } } command.

Parameters	<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.• For a 1-Gigabit Ethernet interface, enter the keyword gigabitEthernet followed by the slot/port information.• For a 10-Gigabit Ethernet interface, enter the keyword tenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. Note: The FastEthernet option is not supported on S-Series.
	all	(OPTIONAL) Enter the keyword all to display information on all interfaces.
	events	(OPTIONAL) Enter the keyword events to display major events such as timer events.

packet	(OPTIONAL) Enter the keyword packet to display information regarding packets coming in or going out.
brief	(OPTIONAL) Enter the keyword brief to display brief packet information.
detail	(OPTIONAL) Enter the keyword detail to display detailed packet information.
tx	(OPTIONAL) Enter the keyword tx to display transmit only packet information.
rx	(OPTIONAL) Enter the keyword rx to display receive only packet information.
both	(OPTIONAL) Enter the keyword both to display both receive and transmit packet information.

Defaults No default values or behavior

Command Modes EXEC Privilege

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

disable

C **E** **S**

S4810

S4820T

Enable or disable LLDP.

Syntax

disable

To enable LLDP, use the no disable

Defaults Enabled, that is no disable

Command Modes CONFIGURATION (conf-lldp) and INTERFACE (conf-if-interface-lldp)

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

**Related
Commands**

protocol lldp (Configuration)	Enable LLDP globally.
debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show running-config lldp	Display the LLDP running configuration

hello

C **E** **S****S4810****S4820T**

Configure the rate at which the LLDP control packets are sent to its peer.

Syntax

hello *seconds*

To revert to the default, use the no hello *seconds* command.

Parameters

<i>seconds</i>	Enter the rate, in seconds, at which the control packets are sent to its peer. Rate: 5 to 180 seconds Default: 30 seconds
----------------	---

Defaults

30 seconds

Command Modes

CONFIGURATION (conf-lldp) and INTERFACE (conf-if-*interface*-lldp)

**Command
History**

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

mode

C **E** **S****S4810****S4820T**

Set LLDP to receive or transmit.

Syntax

mode {tx | rx}

To return to the default, use the no mode {tx | rx} command.

Parameters

tx	Enter the keyword tx to set the mode to transmit.
rx	Enter the keyword rx to set the mode to receive.

Defaults	Both transmit and receive
Command Modes	CONFIGURATION (conf-lldp) and INTERFACE (conf-if- <i>interface</i> -lldp)
Command History	Version 8.3.19.0. Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.7.1.0 Introduced on S-Series
	Version 7.6.1.0 Introduced on C-Series
	Version 7.4.1.0 Introduced on E-Series
Related Commands	protocol lldp (Configuration) Enable LLDP globally.
	show lldp neighbors Display the LLDP neighbors

multiplier

C **E** **S**

S4810

S4820T

Set the number of consecutive misses before LLDP declares the interface dead.

Syntax

multiplier *integer*

To return to the default, use the no multiplier *integer* command.

Parameters	<i>integer</i> Enter the number of consecutive misses before the LLDP declares the interface dead. Range: 2 - 10
Defaults	4 x hello
Command Modes	CONFIGURATION (conf-lldp) and INTERFACE (conf-if- <i>interface</i> -lldp)
Command History	Version 8.3.19.0. Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.7.1.0 Introduced on S-Series
	Version 7.6.1.0 Introduced on C-Series
	Version 7.4.1.0 Introduced on E-Series

protocol lldp (Configuration)

C **E** **S**

S4810

S4820T

Enable LLDP globally on the switch.

Syntax protocol lldp

To disable LLDP globally on the chassis, use the no protocol lldp command.

Defaults Disabled

Command Modes CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

protocol lldp (Interface)

C **E** **S**

Enter the LLDP protocol in the INTERFACE mode.

Syntax [no] protocol lldp

To return to the global LLDP configuration mode, use the no protocol lldp command from the Interface mode.

Defaults LLDP is not enabled on the interface.

Command Modes INTERFACE (conf-if-*interface*-lldp)

Command History

Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

LLDP must be enabled globally from CONFIGURATION mode, before it can be configured on an interface. This command places you in LLDP mode on the interface; it does not enable the protocol.

When you enter the LLDP protocol in the Interface context, it overrides global configurations. When you execute the no protocol lldp from the INTERFACE mode, interfaces will begin to inherit the configuration from the global LLDP CONFIGURATION mode.

show lldp neighbors

C **E** **S**

Display LLDP neighbor information for all interfaces or a specified interface.

S4810

S4820T

Syntax show lldp neighbors [*interface*] [detail]

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword gigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword tenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
detail	(OPTIONAL) Enter the keyword detail to display all the TLV information, timers, and LLDP tx and rx counters.

Defaults No default values or behavior

Command Modes EXEC Privilege

Command History

Version 8.3.19.0.	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
R1(conf-if-gi-1/31)#do show lldp neighbors
  Loc PortID  Rem Host Name      Rem Port Id      Rem Chassis Id
  -----
  Gi 1/21    R2                 GigabitEthernet 2/11  00:01:e8:06:95:3e
  Gi 1/31    R3                 GigabitEthernet 3/11  00:01:e8:09:c2:4a
```

Usage Information

Omitting the keyword detail displays only the remote chassis ID, Port ID, and Dead Interval.

show lldp statistics

C **E** **S**

Display the LLDP statistical information.

S4810

S4820T

Syntax show lldp statistics

Defaults No default values or behavior

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS#show lldp statistics
Total number of neighbors:    300
Last table change time      : Mon Oct 02 16:00:52 2006
Number of Table Inserts     : 1621
Number of Table Deletes     : 200
Number of Table Drops       : 0
Number of Table Age Outs    : 400
FTOS#
```

show running-config lldp

C **E** **S**

Display the current global LLDP configuration.

Syntax

show running-config lldp

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Command History

Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS#show running-config lldp
!
protocol lldp
advertise dot1-tlv port-protocol-vlan-id port-vlan-id
advertise dot3-tlv max-frame-size
advertise management-tlv system-capabilities system-description
hello 15
multiplier 3
no disable
FTOS#
```

LLDP-MED Commands

The LLDP-MED commands in this section are:

- [advertise med guest-voice](#)
- [advertise med guest-voice-signaling](#)
- [advertise med location-identification](#)
- [advertise med power-via-mdi](#)

- [advertise med softphone-voice](#)
- [advertise med streaming-video](#)
- [advertise med video-conferencing](#)
- [advertise med video-signaling](#)
- [advertise med voice](#)
- [advertise med voice-signaling](#)

FTOS LLDP-MED (Media Endpoint Discovery) commands are an extension of the set of LLDP TLV advertisement commands. The C-Series and S-Series support all commands, as indicated by these symbols underneath the command headings: **C**

S

The E-Series generally supports the commands, too, as indicated by the **E** symbol under command headings. However, LLDP-MED commands are more useful on the C-Series and the S50V model of the S-Series, because they support Power over Ethernet (PoE) devices.

As defined by ANSI/TIA-1057, LLDP-MED provides organizationally specific TLVs (Type Length Value), so that endpoint devices and network connectivity devices can advertise their characteristics and configuration information. The Organizational Unique Identifier (OUI) for the Telecommunications Industry Association (TIA) is 00-12-BB.

- **LLDP-MED Endpoint Device** — any device that is on an IEEE 802 LAN network edge, can communicate using IP, and uses the LLDP-MED framework.
- **LLDP-MED Network Connectivity Device** — any device that provides access to an IEEE 802 LAN to an LLDP-MED endpoint device, and supports IEEE 802.1AB (LLDP) and TIA-1057 (LLDP-MED). The Dell Force10 system is an LLDP-MED network connectivity device.

With regard to connected endpoint devices, LLDP-MED provides network connectivity devices with the ability to:

- manage inventory
- manage Power over Ethernet (POE)
- identify physical location
- identify network policy

advertise med guest-voice

C **E** **S**

S4810

S4820T

Syntax

Configure the system to advertise a separate limited voice service for a guest user with their own IP telephony handset or other appliances that support interactive voice services.

```
advertise med guest-voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }
```

To return to the default, use the `no advertise med guest-voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }` command.

Parameters	<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
	<i>layer2_priority</i>	Enter the Layer 2 priority. Range: 0 to 7
	<i>DSCP_value</i>	Enter the DSCP value. Range: 0 to 63
	<i>priority-tagged number</i>	Enter the keyword <code>priority-tagged</code> followed the Layer 2 priority. Range: 0 to 7
Defaults	Unconfigured	
Command Modes	CONFIGURATION (conf-lldp)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series and E-Series
Related Commands	protocol lldp (Configuration)	Enable LLDP globally.
	debug lldp interface	Debug LLDP.
	show lldp neighbors	Display the LLDP neighbors.
	show running-config lldp	Display the LLDP running configuration.

advertise med guest-voice-signaling

C E S

S4810

S4820T

Configure the system to advertise a separate limited voice service for a guest user when the guest voice control packets use a separate network policy than the voice data.

Syntax

`advertise med guest-voice-signaling { vlan-id layer2_priority DSCP_value } | { priority-tagged number }`

To return to the default, use the `no advertise med guest-voice-signaling { vlan-id layer2_priority DSCP_value } | { priority-tagged number }` command.

Parameters	<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
	<i>layer2_priority</i>	Enter the Layer 2 priority. Range: 0 to 7

	<i>DSCP_value</i>	Enter the DSCP value. Range: 0 to 63
	priority-tagged <i>number</i>	Enter the keyword priority-tagged followed the Layer 2 priority. Range: 0 to 7
Defaults	unconfigured	
Command Modes	CONFIGURATION (conf-lldp)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series and E-Series
Related Commands	debug lldp interface	Debug LLDP
	show lldp neighbors	Display the LLDP neighbors
	show running-config lldp	Display the LLDP running configuration

advertise med location-identification

C **E** **S**

S4810

S4820T

Configure the system to advertise a location identifier.

Syntax

advertise med location-identification { coordinate-based *value* | civic-based *value* | ecs-elin *value* }

To return to the default, use the no advertise med location-identification { coordinate-based *value* | civic-based *value* | ecs-elin *value* } command.

Parameters

coordinate-based <i>value</i>	Enter the keyword coordinate-based followed by the coordinated based location in hexadecimal value of 16 bytes.
civic-based <i>value</i>	Enter the keyword civic-based followed by the civic based location in hexadecimal format. Range: 6 to 255 bytes
ecs-elin <i>value</i>	Enter the keyword ecs-elin followed by the Emergency Call Service (ecs) Emergency Location Identification Number (elin) numeric location string. Range: 10 to 25 characters

Defaults

unconfigured


Command Modes

CONFIGURATION (conf-lldp)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series and E-Series
Usage Information	ECS — Emergency Call Service such as defined by TIA or National Emergency Numbering Association (NENA)	
	ELIN — Emergency Location Identification Number, a valid North America Numbering Plan format telephone number supplied for ECS purposes.	
Related Commands	debug lldp interface	Debug LLDP
	show lldp neighbors	Display the LLDP neighbors
	show running-config lldp	Display the LLDP running configuration

advertise med power-via-mdi





Configure the system to advertise the Extended Power via MDI TLV.

Syntax

advertise med power-via-mdi

To return to the default, use the no advertise med power-via-mdi command.

Defaults

unconfigured

Command Modes

CONFIGURATION (conf-lldp)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
Usage Information	Advertise the Extended Power via MDI on all ports that are connected to an 802.3af powered, LLDP-MED endpoint device.	
Related Commands	debug lldp interface	Debug LLDP
	show lldp neighbors	Display the LLDP neighbors
	show running-config lldp	Display the LLDP running configuration

advertise med softphone-voice

C E S

S4810

S4820T

Configure the system to advertise softphone to enable IP telephony on a computer so that the computer can be used as a phone.

Syntax

```
advertise med softphone-voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }
```

To return to the default, use the `no advertise med softphone-voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
<i>priority-tagged number</i>	Enter the keyword <code>priority-tagged</code> followed the Layer 2 priority. Range: 0 to 7

Defaults

unconfigured

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series and E-Series

Related Commands

debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show lldp neighbors	Display the LLDP running configuration

advertise med streaming-video

C E S

S4810

S4820T

Configure the system to advertise streaming video services for broadcast or multicast-based video. This does not include video applications that rely on TCP buffering.

Syntax

```
advertise med streaming-video { vlan-id layer2_priority DSCP_value } | { priority-tagged number }
```

To return to the default, use the `no advertise med streaming-video { vlan-id layer2_priority DSCP_value } | { priority-tagged number }` command.

Parameters	<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
	<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
	<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
	<i>priority-tagged number</i>	Enter the keyword priority-tagged followed the Layer 2 priority. Range: 0 to 7
Defaults	unconfigured	
Command Modes	CONFIGURATION (conf-lldp)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series and E-Series
Related Commands	debug lldp interface	Debug LLDP
	show lldp neighbors	Display the LLDP neighbors
	show lldp neighbors	Display the LLDP running configuration

advertise med video-conferencing

C E S

S4810

S4820T

Configure the system to advertise dedicated video conferencing and other similar appliances that support real-time interactive video.

Syntax

advertise med video-conferencing { *vlan-id layer2_priority DSCP_value* } | { *priority-tagged number* }

To return to the default, use the no advertise med video-conferencing { *vlan-id layer2_priority DSCP_value* } | { *priority-tagged number* } command.

Parameters	<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
	<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
	<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
	<i>priority-tagged number</i>	Enter the keyword priority-tagged followed the Layer 2 priority. Range: 0 to 7
Defaults	unconfigured	

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series and E-Series

Related Commands

debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show running-config lldp	Display the LLDP running configuration

advertise med video-signaling

C E S

S4810

S4820T

Configure the system to advertise video control packets that use a separate network policy than video data.

Syntax

advertise med video-signaling { *vlan-id* *layer2_priority* *DSCP_value* } | { priority-tagged *number* }

To return to the default, use the no advertise med video-signaling { *vlan-id* *layer2_priority* *DSCP_value* } | { priority-tagged *number* } command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
priority-tagged <i>number</i>	Enter the keyword priority-tagged followed the Layer 2 priority. Range: 0 to 7

Defaults

unconfigured

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series and E-Series

Related Commands

debug lldp interface	Debug LLDP
--------------------------------------	------------

show lldp neighbors	Display the LLDP neighbors
show lldp neighbors	Display the LLDP running configuration

advertise med voice

C E S

S4810

S4820T

Configure the system to advertise a dedicated IP telephony handset or other appliances supporting interactive voice services.

Syntax

`advertise med voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }`

To return to the default, use the `no advertise med voice { vlan-id layer2_priority DSCP_value } | { priority-tagged number }` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
<i>priority-tagged number</i>	Enter the keyword <code>priority-tagged</code> followed the Layer 2 priority. Range: 0 to 7

Defaults

unconfigured

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series and E-Series

Related Commands

debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show running-config lldp	Display the LLDP running configuration

advertise med voice-signaling

C E S

Configure the system to advertise when voice control packets use a separate network policy than voice data.

Syntax

`advertise med voice-signaling { vlan-id layer2_priority DSCP_value } | { priority-tagged number }`

To return to the default, use the `no advertise med voice-signaling {vlan-id layer2_priority DSCP_value} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. Range: 1 to 4094
<i>layer2_priority</i>	Enter the Layer 2 priority (C-Series and E-Series only). Range: 0 to 7
<i>DSCP_value</i>	Enter the DSCP value (C-Series and E-Series only). Range: 0 to 63
<i>priority-tagged number</i>	Enter the keyword <code>priority-tagged</code> followed the Layer 2 priority. Range: 0 to 7

Defaults

unconfigured

Command Modes

CONFIGURATION (conf-lldp)

Command History

Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series and E-Series

Related Commands

debug lldp interface	Debug LLDP
show lldp neighbors	Display the LLDP neighbors
show lldp neighbors	Display the LLDP running configuration

Multicast Source Discovery Protocol (MSDP)

Overview

MSDP (*Multicast Source Discovery Protocol*) connects multiple PIM Sparse-Mode (PIM-SM) domains together. MSDP peers connect using TCP port 639. Peers send keepalives every 60 seconds. A peer connection is reset after 75 seconds if no MSDP packets are received. MSDP connections are parallel with MBGP connections.

FTOS supports MSDP commands on the Dell Force10 platforms indicated by the characters that appear under each of the command headings: **E** E-Series, **S4810**, **S4820T**, or **Z** Z-Series.

Commands

The commands are:

- `clear ip msdp peer`
- `clear ip msdp sa-cache`
- `debug ip msdp`
- `ip msdp cache-rejected-sa`
- `ip msdp default-peer`
- `ip msdp log-adjacency-changes`
- `ip msdp mesh-group`
- `ip msdp originator-id`
- `ip msdp peer`
- `ip msdp redistribute`
- `ip msdp sa-filter`
- `ip msdp sa-limit`
- `ip msdp shutdown`
- `ip multicast-msdp`
- `show ip msdp`
- `show ip msdp sa-cache rejected-sa`

clear ip msdp peer

E

Reset the TCP connection to the peer and clear all the peer statistics.

Syntax clear ip msdp peer { *peer address* }

Parameters	<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
-------------------	---------------------	--

Defaults Not configured

Command Modes EXEC Privilege

Command History	Version 6.2.1.1	Introduced
------------------------	-----------------	------------

clear ip msdp sa-cache

E

Clears the entire source-active cache, the source-active entries of a particular multicast group, rejected, or local source-active entries.

Syntax clear ip msdp sa-cache [*group-address* | *rejected-sa* | *local*]

Parameters	<i>group-address</i>	Enter the group IP address in dotted decimal format (A.B.C.D.)
	<i>rejected-sa</i>	Enter this keyword to clear the cache source-active entries that are rejected because the RPF check failed, an SA filter or limit is configured, the RP or MSDP peer is unreachable, or because of a format error.
	<i>local</i>	Enter this keyword to clear out local PIM advertised entries. It applies the redistribute filter (if present) while adding the local PIM SA entries to the SA cache.

Defaults Without any options, this command clears the entire source-active cache.

Command Modes EXEC Privilege

Command History	Version 7.8.1.0	Added local option.
	Version 7.7.1.0	Added rejected-sa option.
	Version 6.2.1.1	Introduced

debug ip msdp

E

S4810

Turn on MSDP debugging.

S4820T

Syntax debug ip msdp { event *peer address* | packet *peer address* | pim }

To turn debugging off, use the `no debug ip msdp { event peer address | packet peer address | pim }` command.

Parameters	<i>event peer address</i>	Enter the keyword event followed by the peer address in a dotted decimal format (A.B.C.D.).
	<i>packet peer address</i>	Enter the keyword packet followed by the peer address in a dotted decimal format (A.B.C.D.).
	<i>pim</i>	Enter the keyword pim to debug advertisement from PIM.
Defaults	Not configured	
Command Modes	EXEC Privilege	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 6.2.1.1	Introduced

ip msdp cache-rejected-sa

E **S4810**

Enable a MSDP cache for the rejected source-active entries.

S4820T

Syntax ip msdp cache-rejected-sa { *number* }

To clear the MSDP rejected source-active entries, use the `no ip msdp cache-rejected-sa { number }` command followed by the `ip msdp cache-rejected-sa { number }` command.

Parameters	<i>number</i>	Enter the number of rejected SA entries to cache. Range: 0 to 32766
	Defaults No default values or behavior	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.4.1.0	Introduced
Related Commands	show ip msdp sa-cache rejected-sa	Description.

ip msdp default-peer

E **S4810**

Define a default peer from which to accept all Source-Active (SA) messages.

S4820T

Syntax

ip msdp default-peer *peer address* [*list name*]

To remove the default peer, use the no ip msdp default-peer { *peer address*} *list name* command.

Parameters

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
<i>list name</i>	Enter this keyword and specify a standard access list that contains the RP address that should be treated as the default peer. If no access list is specified, then all SAs from the peer are accepted.

Defaults

Not configured

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Added the list option, and removed the prefix-list option.
Version 6.2.1.1	Introduced

Usage Information

If a list is not specified, all SA messages received from the default peer are accepted. You can enter multiple default peer commands.

ip msdp log-adjacency-changes

E **S4810**

Enable logging of MSDP adjacency changes.

S4820T

Syntax

ip msdp log-adjacency-changes

To disable logging, use the no ip msdp log-adjacency-changes command.

Defaults

Not configured

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 6.2.1.1	Introduced

ip msdp mesh-group

E **S4810**

Configure a peer to be a member of a mesh group.

S4820T

Syntax ip msdp mesh-group { *name* } { *peer address* }

To remove the peer from a mesh group, use the no ip msdp mesh-group { *name* } { *peer address* } command.

Parameters

<i>name</i>	Enter a string of up to 16 characters long for as the mesh group name.
-------------	--

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
---------------------	--

Defaults Not configured

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 6.2.1.1	Introduced
-----------------	------------

Usage Information

A MSDP mesh group is a mechanism for reducing SA flooding, typically in an intra-domain setting. When some subset of a domain's MSDP speakers are fully meshed, they can be configured into a mesh-group. If member *X* of a mesh-group receives a SA message from an MSDP peer that is also a member of the mesh-group, member *X* accepts the SA message and forwards it to all of its peers that are not part of the mesh-group. However, member *X* can not forward the SA message to other members of the mesh-group.

ip msdp originator-id

E **S4810**

Configure the MSDP Originator ID.

S4820T

Syntax ip msdp originator-id { *interface* }

To remove the originator-id, use the no ip msdp originator-id { *interface* } command.

Parameters	<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword <code>FastEthernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Loopback interface, enter the keyword <code>loopback</code> followed by a number from 0 to 16383. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. 								
Defaults		Not configured								
Command Modes		CONFIGURATION								
Command History		<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.5.1.0</td> <td>Added support for 4-port 40G line cards on ExaScale.</td> </tr> <tr> <td>Version 6.2.1.1</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.	Version 6.2.1.1	Introduced
Version 8.3.19.0	Introduced on S4820T									
Version 8.3.7.0	Introduced on S4810									
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.									
Version 6.2.1.1	Introduced									

ip msdp peer

E **S4810**

S4820T

Configure an MSDP peer.

Syntax

`ip msdp peer peer address [connect-source] [description] [sa-limit number]`

To remove the MSDP peer, use the `no ip msdp peer peer address [connect-source interface] [description name] [sa-limit number]` command.

Parameters

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
<i>connect-source interface</i>	(OPTIONAL) Enter the keyword connect-source followed by one of the interfaces and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383. For a Port Channel interface, enter the keyword port-channel followed by a number: E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
<i>description name</i>	(OPTIONAL) Enter the keyword description followed by a description name (max 80 characters) to designate a description for the MSDP peer.
<i>sa-limit number</i>	(OPTIONAL) Enter the maximum number of SA entries in SA-cache. Range: 1 to 500000 Default: 500000

Defaults

As above

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 7.5.1.0	Added option for SA upper limit and description option
Version 6.2.1.1	Introduced

Usage Information

The connect-source option is used to supply a source IP address for the TCP connection. When an interface is specified using the connect-source option, the primary configured address on the interface is used.

If the total number of SA messages received from the peer is already larger than the limit when this command is applied, those SA messages will continue to be accepted. To enforce the limit in such situation, use command `clear ip msdp peer` command to reset the peer.

Related Commands

ip msdp sa-limit	Configure the MSDP SA Limit
clear ip msdp peer	Clear the MSDP peer.
show ip msdp	Display the MSDP information

ip msdp redistribute

E **S4810**

S4820T

Filter local PIM SA entries in the SA cache. SAs which are denied by the ACL will time out and not be refreshed. Until they time out, they will continue to reside in the MSDP SA cache.

Syntax ip msdp redistribute [list *acl-name*]

Parameters	list <i>acl-name</i>	Enter the name of an extended ACL that contains permitted SAs. If you do not use this option, all local entries are blocked.
-------------------	----------------------	--

Defaults Not configured

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced

Usage Information Modifications to the ACL will not have an immediate affect on the sa-cache.

To apply the redistribute filter to entries already present in the SA cache, use clear ip msdp sa-cache local.

ip msdp sa-filter

E **S4810**

S4820T

Permit or deny MSDP source active (SA) messages based on multicast source and/or group from the specified peer.

Syntax ip msdp sa-filter {in | out} *peer-address* list [*access-list name*]

Remove this configuration using the command no ip msdp sa-filter {in | out} *peer address* list [*access-list name*]

Parameters	in	Enter the keyword in to enable incoming SA filtering.
	out	Enter the keyword out to enable outgoing SA filtering.
	<i>peer-address</i>	Enter the peer address of the MSDP peer in a dotted decimal format (A.B.C.D.)
	<i>access-list name</i>	(OPTIONAL) Enter the IP extended access list name that defines from which peers SAs are to be permitted or denied.

Defaults Not configured

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on E-Series

ip msdp sa-limit

E **S4810**

Configure the upper limit of SA (Source-Active) entries in SA-cache.

S4820T**Syntax**ip msdp sa-limit *number*To return to the default, use the no ip msdp sa-limit *number* command.**Parameters**

<i>number</i>	Enter the maximum number of SA entries in SA-cache. Range 0 to 40000
---------------	---

Defaults

Default 50000

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.5.1.0	Introduced

Usage Information

FTOS counts the SA messages originated by itself and those received from the MSDP peers. When the total SA messages reach this limit, the subsequent SA messages are dropped (even if they pass RPF checking and policy checking). If the total number of SA messages is already larger than the limit when this command is applied, those SA messages that are already in FTOS will continue to be accepted. To enforce the limit in such situation, use the clear ip msdp sa-cache command.

Related Commands

ip msdp peer	Configure the MSDP peer
clear ip msdp peer	Clear the MSDP peer.
show ip msdp	Display the MSDP information

ip msdp shutdown

E **S4810**

Administratively shut down a configured MSDP peer.

S4820T**Syntax**ip msdp shutdown {*peer address*}**Parameters**

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
---------------------	--

Defaults	Not configured						
Command Modes	CONFIGURATION						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 6.2.1.1</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 6.2.1.1	Introduced
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.7.0	Introduced on S4810						
Version 6.2.1.1	Introduced						

ip multicast-msdp

E **S4810** Enable MSDP.
S4820T

Syntax	ip multicast-msdp						
	To exit MSDP, use the no ip multicast-msdp command.						
Defaults	Not configured						
Command Modes	CONFIGURATION						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 6.2.1.1</td> <td>Introduced</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 6.2.1.1	Introduced
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.7.0	Introduced on S4810						
Version 6.2.1.1	Introduced						

show ip msdp

E **S4810** Display the MSDP peer status, SA cache, or peer summary.
S4820T

Syntax	show ip msdp {peer <i>peer address</i> sa-cache summary}	
Parameters	<i>peer peer address</i>	Enter the keyword <i>peer</i> followed by the peer address in a dotted decimal format (A.B.C.D.)
	sa-cache	Enter the keyword <i>sa-cache</i> to display the Source-Active cache.
	summary	Enter the keyword <i>summary</i> to display a MSDP peer summary.
Defaults	Not configured	
Command Modes	EXEC	
	EXEC Privilege	

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 6.2.1.1	Introduced

Example (show ip msdp peer)

```
FTOS#show ip msdp peer 100.1.1.1

Peer Addr: 100.1.1.1
  Local Addr: 100.1.1.2(639)  Connect Source: none
  State: Established Up/Down Time: 00:00:08
  Timers: KeepAlive 60 sec, Hold time 75 sec
  SourceActive packet count (in/out): 0/0
  SAs learned from this peer: 0
  SA Filtering:
  Input (S,G) filter: none
  Output (S,G) filter: none
FTOS#
```

Example (show ip msdp sa-cache)

```
FTOS#show ip msdp sa-cache
MSDP Source-Active Cache - 1 entries
GroupAddr      SourceAddr      RPAAddr          LearnedFrom      Expire UpTime
224.1.1.1      172.21.220.10  172.21.3.254    172.21.3.254    102 00:02:52
FTOS#
```

Example (show ip msdp summary)

```
FTOS#show ip msdp summary
Peer Addr Local Addr State      Source SA Up/Down      Description
72.30.1.2 72.30.1.1 Established none    0 00:00:03 peer1
72.30.2.2 72.30.2.1 Established none    0 00:00:03 peer2
72.30.3.2 72.30.3.1 Established none    0 00:00:02 test-peer-3
FTOS#
```

show ip msdp sa-cache rejected-sa

E

Display the rejected SAs in the SA cache.

Syntax

show ip msdp sa-cache rejected-sa

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.4.1.0	Introduced
-----------------	------------

Example

```
FTOS#sh ip msdp sa-cache rejected-sa
MSDP Rejected SA Cache 200 rejected SAs received, cache-size 1000
UpTime      GroupAddr      SourceAddr      RPAAddr          LearnedFrom      Reason
00:00:13    225.1.2.1      10.1.1.3        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.2      10.1.1.4        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.3      10.1.1.3        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.4      10.1.1.4        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.5      10.1.1.3        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.6      10.1.1.4        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.7      10.1.1.3        110.1.1.1        13.1.1.2        Rpf-Fail
00:00:13    225.1.2.8      10.1.1.4        110.1.1.1        13.1.1.2        Rpf-Fail
```

00:00:13	225.1.2.9	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.10	10.1.1.4	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.11	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.11	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.12	10.1.1.4	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.13	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.14	10.1.1.4	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.15	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.16	10.1.1.4	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.17	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.18	10.1.1.4	110.1.1.1	13.1.1.2	Rpf-Fail
00:00:13	225.1.2.19	10.1.1.3	110.1.1.1	13.1.1.2	Rpf-Fail
FTOS#					

Multiple Spanning Tree Protocol (MSTP)

Overview

Multiple Spanning Tree Protocol (MSTP), as implemented by FTOS, conforms to IEEE 802.1s.

MSTP is supported by FTOS on all Dell Force10 systems as indicated by the characters that appear below each command heading: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

The following commands configure and monitor MSTP:

- `debug spanning-tree mstp`
- `disable`
- `forward-delay`
- `hello-time`
- `max-age`
- `max-hops`
- `msti`
- `name`
- `protocol spanning-tree mstp`
- `revision`
- `show config`
- `show spanning-tree mst configuration`
- `show spanning-tree msti`
- `spanning-tree`
- `spanning-tree msti`
- `spanning-tree mstp`
- `tc-flush-standard`

debug spanning-tree mstp

C E S

S4810

S4820T

Enable debugging of Multiple Spanning Tree Protocol and view information on the protocol.

Syntax

```
debug spanning-tree mstp [all | bpdu interface { in | out } | events]
```

To disable debugging, enter no debug spanning-tree mstp.

Parameters

all	(OPTIONAL) Enter the keyword all to debug all spanning tree operations.
bpdu <i>interface</i> { in out }	<p>(OPTIONAL) Enter the keyword bpdu to debug Bridge Protocol Data Units.</p> <p>(OPTIONAL) Enter the interface keyword along with the type slot/port of the interface you want displayed. Type slot/port options are the following:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. <p>Optionally, enter an in or out parameter in conjunction with the optional interface:</p> <ul style="list-style-type: none"> For Receive, enter in For Transmit, enter out
events	(OPTIONAL) Enter the keyword events to debug MSTP events.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#debug spanning-tree mstp bpdu gigabitethernet 2/0 ?
in Receive (in)
out Transmit (out)
```

description

C E S

S4810

S4820T

Enter a description of the Multiple Spanning Tree

Syntax

description { *description* }

To remove the description, use the no description { *description* } command.

Parameters

<i>description</i>	Enter a description to identify the Multiple Spanning Tree (80 characters maximum).
--------------------	---

Defaults

No default behavior or values

Command Modes

SPANNING TREE (The prompt is “config-mstp”.)

Command History

pre-7.7.1.0	Introduced
-------------	------------

Related Commands

protocol spanning-tree mstp	Enter Multiple SPANNING TREE mode on the switch.
---	--

disable

C E S

S4810

S4820T

Globally disable Multiple Spanning Tree Protocol on the switch.

Syntax

disable

To enable Multiple Spanning Tree Protocol, enter no disable.

Defaults

Multiple Spanning Tree Protocol is disabled

Command Modes

MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Related Commands

protocol spanning-tree mstp	Enter MULTIPLE SPANNING TREE mode.
---	------------------------------------

forward-delay

C E S

S4810

S4820T

The amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.

Syntax forward-delay *seconds*

To return to the default setting, enter no forward-delay.

Parameters

<i>seconds</i>	Enter the number of seconds the interface waits in the Blocking State and the Learning State before transiting to the Forwarding State. Range: 4 to 30 Default: 15 seconds.
----------------	---

Defaults 15 seconds

Command Modes MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Related Commands

max-age	Change the wait time before MSTP refreshes protocol configuration information.
hello-time	Change the time interval between BPDUs.

hello-time

C E S

S4810

S4820T

Set the time interval between generation of Multiple Spanning Tree Bridge Protocol Data Units (BPDUs).

Syntax hello-time *seconds*

To return to the default value, enter no hello-time.

Parameters

<i>seconds</i>	Enter a number as the time interval between transmission of BPDUs. Range: 1 to 10. Default: 2 seconds.
----------------	--

Defaults 2 seconds

Command Modes MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Related Commands

forward-delay	The amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.
max-age	Change the wait time before MSTP refreshes protocol configuration information.

max-age

C E S

S4810

S4820T

Set the time interval for the Multiple Spanning Tree bridge to maintain configuration information before refreshing that information.

Syntax

`max-age seconds`

To return to the default values, enter no max-age.

Parameters

<i>max-age</i>	Enter a number of seconds the FTOS waits before refreshing configuration information. Range: 6 to 40 Default: 20 seconds.
----------------	---

Defaults

20 seconds

Command Modes

MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Related Commands

forward-delay	The amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.
hello-time	Change the time interval between BPDUs.

max-hops

C E S

Configure the maximum hop count.

Syntax max-hops *number*

To return to the default values, enter no max-hops.

Parameters	<i>range</i>	Enter a number for the maximum hop count. Range: 1 to 40 Default: 20
-------------------	--------------	--

Defaults 20 hops

Command Modes MULTIPLE SPANNING TREE

Command History	Version 7.6.1.0	Added support for S-Series
	Version 7.5.1.0	Added support for C-Series
	Version 6.5.1.0	Introduced

Usage Information

The max-hops is a configuration command that applies to both the IST and all MST instances in the MSTP region. The BPDUs sent out by the root switch set the remaining-hops parameter to the configured value of max-hops. When a switch receives the BPDU, it decrements the received value of the remaining hops and uses the resulting value as remaining-hops in the BPDUs. If the remaining-hops reaches zero, the switch discards the BPDU and ages out any information that it holds for the port.

msti

C E S

S4810

S4820T

Configure Multiple Spanning Tree instance, bridge priority, and one or multiple VLANs mapped to the MST instance.

Syntax msti *instance* {vlan *range* | bridge-priority *priority*}

To disable mapping or bridge priority no msti *instance* {vlan *range* | bridge-priority *priority*}

Parameters	msti <i>instance</i>	Enter the Multiple Spanning Tree Protocol Instance Range: zero (0) to 63
	vlan <i>range</i>	Enter the keyword vlan followed by the identifier range value. Range: 1 to 4094
	bridge-priority <i>priority</i>	Enter the keyword bridge-priority followed by a value in increments of 4096 as the bridge priority. Range: zero (0) to 61440 Valid priority values are: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, and 61440. All other values are rejected.

Defaults default bridge-priority is 32768

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

By default, all VLANs are mapped to MST instance zero (0) unless you use the `vlan range` command to map it to a non-zero instance.

name

C **E** **S**

S4810

S4820T

The name you assign to the Multiple Spanning Tree region.

Syntax

`name region-name`

To remove the region name, enter `no name`

Parameters

<i>region-name</i>	Enter the MST region name. Range: 32 character limit
--------------------	---

Defaults

no default name

Command Modes

MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Usage Information

For two MSTP switches to be within the same MSTP region, the switches must share the same region name (including matching case).

Related Commands

msti	Map the VLAN(s) to an MST instance
revision	Assign revision number to the MST configuration.

protocol spanning-tree mstp

C E S

S4810

S4820T

Enter the MULTIPLE SPANNING TREE mode to enable and configure the Multiple Spanning Tree group.

Syntax protocol spanning-tree mstp

To disable the Multiple Spanning Tree group, enter no protocol spanning-tree mstp command.

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS(config)#protocol spanning-tree mstp
FTOS(config-mstp)#no disable
```

Usage Information

MSTP is not enabled when you enter the MULTIPLE SPANNING TREE mode. To enable MSTP globally on the switch, enter [no disable](#) while in MULTIPLE SPANNING TREE mode.

Refer to the *FTOS Configuration Guide* for more information on Multiple Spanning Tree Protocol.

Related Commands

disable	Disable Multiple Spanning Tree.
-------------------------	---------------------------------

Defaults Disable.

Command Modes MULTIPLE SPANNING TREE

Usage Information

Refer to the *FTOS Configuration Guide* for more information on Multiple Spanning Tree Protocol.

revision

C E S

S4810

S4820T

The revision number for the Multiple Spanning Tree configuration

Syntax

`revision range`

To return to the default values, enter no revision.

Parameters

<i>range</i>	Enter the revision number for the MST configuration. Range: 0 to 65535 Default: 0
--------------	---

Defaults

0

Command Modes

MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Usage Information

For two MSTP switches to be within the same MST region, the switches must share the same revision number.

Related Commands

msti	Map the VLAN(s) to an MST instance
name	Assign the region name to the MST region.

show config

C E S

S4810

S4820T

View the current configuration for the mode. Only non-default values are shown.

Syntax

`show config`

Command Modes

MULTIPLE SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series

Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced on E-Series

Example

```
FTOS(conf-mstp)#show config
!
protocol spanning-tree mstp
no disable
name CustomerSvc
revision 2
MSTI 10 VLAN 101-105
max-hops 5
FTOS(conf-mstp)#
```

show spanning-tree mst configuration

C **E** **S**

S4810

S4820T

View the Multiple Spanning Tree configuration.

Syntax

show spanning-tree mst configuration

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show spanning-tree mst configuration
MST region name: CustomerSvc
Revision: 2
MSTI    VID
  10    101-105
FTOS#
```

Usage Information

You must enable Multiple Spanning Tree Protocol prior to using this command.

show spanning-tree msti

C E S

View the Multiple Spanning Tree instance.

S4810

S4820T

Syntax

show spanning-tree msti [*instance-number*] [brief]] [guard]

Parameters

<i>instance-number</i>	[Optional] Enter the Multiple Spanning Tree Instance number Range: 0 to 63
brief	[Optional] Enter the keyword brief to view a synopsis of the MST instance.
guard	[Optional] Enter the keyword guard to display the type of guard enabled on an MSTP interface and the current port state.

Command Modes

EXEC

EXEC Privilege

Usage Information

You must enable Multiple Spanning Tree Protocol prior to using this command.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Support for the optional guard keyword was added on the C-Series, S-Series, and E-Series TeraScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.4.1.0	Expanded to display port error disable state (EDS) caused by loopback BPDU inconsistency (Refer to the following example.)

Example

```
FTOS#show spanning-tree msti 10
MSTI 10 VLANs mapped 101-105

Bridge Identifier has priority 32768, Address 0001.e802.3506
Configured hello time 2, max age 20, forward delay 15, max hops 5
Current root has priority 16384, Address 0001.e800.0a5c
Number of topology changes 0, last change occurred 3058087

Port 82 (GigabitEthernet 2/0) is designated Forwarding
Port path cost 0, Port priority 128, Port Identifier 128.82
Designated root has priority 16384, address 0001.e800.0a:5c
Designated bridge has priority 32768, address 0001.e802.35:06
Designated port id is 128.82, designated path cost
Number of transitions to forwarding state 1
BPDU (Mrecords): sent 1109, received 0
The port is not in the portfast mode

Port 88 (GigabitEthernet 2/6) is root Forwarding
Port path cost 0, Port priority 128, Port Identifier 128.88
Designated root has priority 16384, address 0001.e800.0a:5c
Designated bridge has priority 16384, address 0001.e800.0a:5c
Designated port id is 128.88, designated path cost
Number of transitions to forwarding state 4
```

Example
(show
spanning-tree msti
with EDS and LBK)

```
BPDU (Mrecords): sent 19, received 1103
The port is not in the portfast mode
```

```
Port 89 (GigabitEthernet 2/7) is alternate Discarding
Port path cost 0, Port priority 128, Port Identifier 128.89
Designated root has priority 16384, address 0001.e800.0a:5c
Designated bridge has priority 16384, address 0001.e800.0a:5c
Designated port id is 128.89, designated path cost
Number of transitions to forwarding state 3
BPDU (Mrecords): sent 7, received 1103
The port is not in the portfast mode
```

```
FTOS#show spanning-tree msti 0 brief
MSTI 0 VLANs mapped 1-4094
```

```
Executing IEEE compatible Spanning Tree Protocol
Root ID Priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15, max hops 20
Bridge ID Priority 32768, Address 0001.e801.6aa8
We are the root of MSTI 0 (CIST)
Configured hello time 2, max age 20, forward delay 15, max hops 20
CIST regional root ID Priority 32768, Address 0001.e801.6aa8
CIST external path cost 0
```

Interface Name	PortID	Prio	Cost	Sts	Cost	Designated Bridge ID	PortID
Gi 0/0	128.257	128	20000	EDS	0	32768 0001.e801.6aa8	128.257

Interface Name	Role	PortID	Prio	Cost	Sts	Cost	Link-type	Edge	Boundary
Gi 0/0	ErrDis	128.257	128	20000	EDS	0	P2P	No	No

```
FTOS#show spanning-tree msti 0
MSTI 0 VLANs mapped 1-4094
```

```
Root Identifier has priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15, max hops 20
Bridge Identifier has priority 32768, Address 0001.e801.6aa8
Configured hello time 2, max age 20, forward delay 15, max hops 20
We are the root of MSTI 0 (CIST)
Current root has priority 32768, Address 0001.e801.6aa8
CIST regional root ID Priority 32768, Address 0001.e801.6aa8
CIST external path cost 0
Number of topology changes 1, last change occurred 00:00:15 ago on Gi 0/0
```

```
Port 257 (GigabitEthernet 0/0) is LBK_INC Discarding
Port path cost 20000, Port priority 128, Port Identifier 128.257
Designated root has priority 32768, address 0001.e801.6aa8
Designated bridge has priority 32768, address 0001.e801.6aa8
Designated port id is 128.257, designated path cost 0
Number of transitions to forwarding state 1
BPDU (MRecords): sent 21, received 9
The port is not in the Edge port mode
```

Example
(show
spanning-tree msti
guard)

```
FTOS#show spanning-tree msti 5 guard
Interface
Name Instance Sts Guard type
-----
Gi 0/1 5 INCON(Root) Rootguard
Gi 0/2 5 FWD Loopguard
Gi 0/3 5 EDS(Shut) Bpduguard
```

Table 34-1. show spanning-tree msti guard Command Information

Field	Description
Interface Name	MSTP interface
Instance	MSTP instance
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut)
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard)

spanning-tree

C E S

Enable Multiple Spanning Tree Protocol on the interface.

S4810

S4820T

Syntax

spanning-tree

To disable the Multiple Spanning Tree Protocol on the interface, use no spanning-tree

Parameters

spanning-tree	Enter the keyword spanning-tree to enable the MSTP on the interface. Default: Enable
---------------	---

Defaults

Enable

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
pre-Version 6.2.1.0	Introduced on E-Series

spanning-tree msti

C E S

Configure Multiple Spanning Tree instance cost and priority for an interface.

S4810

S4820T

Syntax

spanning-tree msti *instance* {cost *cost* | priority *priority*}

Parameters

<i>msti instance</i>	Enter the keyword <i>msti</i> and the MST Instance number. Range: zero (0) to 63
<i>cost cost</i>	(OPTIONAL) Enter the keyword <i>cost</i> followed by the port cost value. Range: 1 to 200000 Defaults: <ul style="list-style-type: none"> • 100 Mb/s Ethernet interface = 200000 • 1-Gigabit Ethernet interface = 20000 • 10-Gigabit Ethernet interface = 2000 • Port Channel interface with one 100 Mb/s Ethernet = 200000 • Port Channel interface with one 1-Gigabit Ethernet = 20000 • Port Channel interface with one 10-Gigabit Ethernet = 2000 • Port Channel with two 1-Gigabit Ethernet = 18000 • Port Channel with two 10-Gigabit Ethernet = 1800 • Port Channel with two 100-Mbps Ethernet = 180000
<i>priority priority</i>	Enter keyword <i>priority</i> followed by a value in increments of 16 as the priority. Range: 0 to 240. Default: 128

Defaults

cost = depends on the interface type; *priority* = 128

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced on E-Series

spanning-tree mstp

C E S

S4810

S4820T

Configures a Layer 2 MSTP interface as an edge port with (optionally) a Bridge Protocol Data Unit (BPDU) guard, or enables the root guard or loop guard feature on the interface.

Syntax

spanning-tree mstp {edge-port [bpduguard [shutdown-on-violation]] | loopguard | rootguard}

Parameters

<i>edge-port</i>	Enter the keyword <i>edge-port</i> to configure the interface as a Multiple Spanning Tree edge port.
<i>bpduguard</i>	(OPTIONAL) Enter the keyword <i>portfast</i> to enable Portfast to move the interface into forwarding mode immediately after the root fails. Enter the keyword <i>bpduguard</i> to disable the port when it receives a BPDU.
<i>shutdown-on-violation</i>	(OPTIONAL) Enter the keyword <i>shutdown-on-violation</i> to hardware disable an interface when a BPDU is received and the port is disabled.

loopguard	(C-, S-, and E-Series TeraScale only) Enter the keyword loopguard to enable STP loop guard on an MSTP port or port-channel interface.
rootguard	(C-, S-, and E-Series TeraScale only) Enter the keyword rootguard to enable root guard on an MSTP port or port-channel interface.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced the loopguard and rootguard options on the E-Series TeraScale, C-Series, and S-Series.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced hardware shutdown-on-violation option
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.1.1.0	Support for BPDU guard added

Usage Information

On an MSTP switch, a port configured as an edge port will immediately transition to the forwarding state. Only ports connected to end-hosts should be configured as an edge port. Consider an edge port similar to a port with spanning-tree portfast enabled.

If shutdown-on-violation is not enabled, BPDUs will still be sent to the RPM CPU.

Root guard and loop guard cannot be enabled at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message is displayed:

```
% Error: RootGuard is configured. Cannot configure LoopGuard.
```

When used in an MSTP network, if root guard blocks a boundary port in the CIST, the port is also blocked in all other MST instances.

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an err-disabled blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a loop-inconsistent blocking state and no traffic is forwarded on the port.

tc-flush-standard

C E S

S4810

S4820T

Enable the MAC address flushing upon receiving every topology change notification.

Syntax

tc-flush-standard

To disable, use the no tc-flush-standard command.

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Added support for S-Series
Version 7.5.1.0	Added support for C-Series
Version 6.5.1.0	Introduced

Usage Information

By default FTOS implements an optimized flush mechanism for MSTP. This helps in flushing the MAC addresses only when necessary (and less often) allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, this *knob* command can be turned on to enable flushing MAC addresses upon receiving every topology change notification.

Multicast

Overview

The multicast commands are supported by FTOS on all Dell Force10 platforms as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

This chapter contains the following sections:

- [IPv4 Multicast Commands](#)
- [IPv6 Multicast Commands](#)

IPv4 Multicast Commands

The IPv4 Multicast commands are:

- [clear ip mroute](#)
- [clear ip mroute snooping](#)
- [ip mroute](#)
- [ip multicast-lag-hashing](#)
- [ip multicast-limit](#)
- [ip multicast-limit](#)
- [mac-flood-list](#)
- [mtrace](#)
- [queue backplane multicast](#)
- [restrict-flooding](#)
- [show ip mroute](#)
- [show ip rpf](#)
- [show queue backplane multicast](#)

clear ip mroute

C E S

S4810

S4820T

Clear learned multicast routes on the multicast forwarding table. To clear the PIM tree information base, use [clear ip pim tib](#) command.

Syntax `clear ip mroute { group-address [source-address] | * }`

Parameters

<i>group-address</i> [<i>source-address</i>]	Enter multicast group address and source address (if desired), in dotted decimal format, to clear information on a specific group.
*	Enter * to clear all multicast routes.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series E-Series legacy command

Related Commands

show ip pim tib	Show the PIM Tree Information Base.
---------------------------------	-------------------------------------

clear ip mroute snooping

E X

Clear the multicast routes learned through PIM-SM snooping from the IPv4 multicast snooping table. To clear tree information learned through PIM-SM snooping from the PIM tree information base, use [clear ip pim snooping tib](#) command.

Syntax `clear ip mroute snooping { vlan vlan-id [group-address [source-address] | * }`

Parameters

<i>vlan</i> <i>vlan-id</i>	Enter a VLAN ID to clear information learned through PIM-SM snooping about a specified VLAN. Valid VLAN IDs: 1 to 4094.
<i>group-address</i> [<i>source-address</i>]	(OPTIONAL) Enter a group address and, optionally, a source address in dotted decimal format, to clear information learned through PIM-SM snooping about a specified multicast group and source.
*	Enter * to clear all multicast routes learned through PIM-SM snooping.

Command Modes

EXEC Privilege

Command History

Version 8.4.1.1	Introduced on E-Series ExaScale
-----------------	---------------------------------

Related Commands

show ip pim snooping tib	Display the information from the PIM tree information base learned through PIM snooping.
show ip pim tib	Show the PIM Tree Information Base.

ip mroute

C E S

S4810

S4820T

Assign a static mroute.

Syntax

```
ip mroute destination mask { ip-address | null 0 } { { bgp | ospf } process-id | isis | rip | static }  
{ ip-address | tag | null 0 } [distance]
```

To delete a specific static mroute, use the command `ip mroute destination mask { ip-address | null 0 } { { bgp | ospf } process-id | isis | rip | static } { ip-address | tag | null 0 } [distance]`.

To delete all mroutes matching a certain mroute, use the `no ip mroute destination mask` command.

Parameters

<i>destination</i>	Enter the IP address in dotted decimal format of the destination device.
<i>mask</i>	Enter the mask in slash prefix formation (/x) or in dotted decimal format.
null 0	(OPTIONAL) Enter the null followed by zero (0).
[<i>protocol</i> [<i>process-id</i> <i>tag</i>] <i>ip-address</i>]	(OPTIONAL) Enter one of the routing protocols: <ul style="list-style-type: none">• Enter the BGP as-number followed by the IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor. Range:1-65535• Enter the OSPF process identification number followed by the IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor. Range: 1-65535• Enter the IS-IS alphanumeric tag string followed by the IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor.• Enter the RIP IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor.
static <i>ip-address</i>	(OPTIONAL) Enter the Static IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor.
<i>ip-address</i>	(OPTIONAL) Enter the IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor.
<i>distance</i>	(OPTIONAL) Enter a number as the distance metric assigned to the mroute. Range: 0 to 255

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

 Version 8.3.7.0 Introduced on S4810

 E-Series legacy command

**Related
Commands**

[show ip mroute](#) View the E-Series routing table.

ip multicast-lag-hashing

E Distribute multicast traffic among Port Channel members in a round-robin fashion.

Syntax ip multicast-lag-hashing

To revert to the default, enter no ip multicast-lag-hashing.

Defaults Disabled

Command Modes CONFIGURATION

**Command
History**

 Version 6.3.1.0 Introduced for E-Series

**Usage
Information**

By default, one Port Channel member is chosen to forward multicast traffic. With this feature turned on, multicast traffic will be distributed among the Port Channel members in a round-robin fashion. This feature applies to the routed multicast traffic. If IGMP Snooping is turned on, this feature also applies to switched multicast traffic.

**Related
Commands**

[ip multicast-limit](#) Enable IP multicast forwarding.

ip multicast-limit

C **E** **S**

Use this feature to limit the number of multicast entries on the system.

S4810

S4820T

Syntax ip multicast-limit *limit*

Parameters

<i>limit</i>	Enter the desired maximum number of multicast entries on the system. E-Series Range: 1 to 50000 E-Series Default: 15000 C-Series Range: 1 to 10000 C-Series Default: 4000 S-Series Range: 1 to 2000 S-Series Default: 400
--------------	---

Defaults As above

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series
	Version 7.6.1.0	Introduced on E-Series

Usage Information

This feature allows the user to limit the number of multicast entries on the system. This number is the sum total of all the multicast entries on all line cards in the system. On each line card, the multicast module will only install the maximum possible number of entries, depending on the configured CAM profile.

The IN-L3-McastFib CAM partition is used to store multicast routes and is a separate hardware limit that exists per port-pipe. Any software-configured limit might be superseded by this hardware space limitation. The opposite is also true, the CAM partition might not be exhausted at the time the system-wide route limit set by the `ip multicast-limit` is reached.

Related Commands

show ip igmp groups	View the IGMP groups.
-------------------------------------	-----------------------

ip multicast-routing

C E S

S4810

S4820T

Enable IP multicast forwarding.

Syntax

`ip multicast-routing`

To disable multicast forwarding, enter `no ip multicast-routing`.

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
E-Series legacy command	

Usage Information

You must enter this command to enable multicast on the E-Series.

After you enable multicast, you can enable IGMP and PIM on an interface. In the INTERFACE mode, enter the [ip pim sparse-mode](#) command to enable IGMP and PIM on the interface.

Related Commands

ip pim sparse-mode	Enable IGMP and PIM on an interface.
------------------------------------	--------------------------------------

mac-flood-list

E

Provide an exception to the restrict-flood configuration so that multicast frames within a specified MAC address range to be flooded on all ports in a VLAN.

Syntax

mac-flood-list *mac-address mask* vlan *vlan-list* [*min-speed speed*]

Parameters

<i>mac-address</i>	Enter a multicast MAC address in hexadecimal format.
<i>mac-mask</i>	Enter the MAC Address mask.
vlan <i>vlan-list</i>	Enter the VLAN(s) in which flooding will be restricted. Separate values by commas — no spaces (1,2,3) or indicate a list of values separated by a hyphen (1-3). Range: 1 to 4094
min-speed <i>min-speed</i>	(OPTIONAL) Enter the minimum link speed that ports must have to receive the specified flooded multicast traffic.

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 7.7.1.0	Introduced on E-Series
-----------------	------------------------

Usage Information

When the mac-flood-list with the min-speed option is used in combination with the restrict-flood command, mac-flood-list command has higher priority than the restrict-flood command.

Therefore, all multicast frames matching the mac-address range specified using the mac-flood-list command are flooded according to the mac-flood-list command. Only the multicast frames not matching the mac-address range specified using the mac-flood-list command are flooded according to the restrict-flood command.

Related Commands

restrict-flooding	Prevent Layer 2 multicast traffic from being forwarded on ports below a specified speed.
-----------------------------------	--

mtrace

E

Trace a multicast route from the source to the receiver.

Syntax

mtrace { *source-address/hostname* } { *destination-address/hostname* } { *group-address* }

Parameters

<i>source-address/hostname</i>	Enter the source IP address in dotted decimal format (A.B.C.D).
<i>destination-address/hostname</i>	Enter the destination (receiver) IP address in dotted decimal format (A.B.C.D).
<i>group-address</i>	Enter the multicast group address in dotted decimal format (A.B.C.D).

Command Modes

EXEC Privilege

Command History	Version 7.5.1.0	Expanded to support originator
	Version 7.4.1.0	Expanded to support intermediate (transit) router
	E-Series legacy command	

Usage Information

Mtrace is an IGMP protocol based on the Multicast trace route facility and implemented according to the IETF draft “A *trace route* facility for IP Multicast” (draft-fenner-traceroute-ipm-01.txt). FTOS supports the Mtrace client and transmit functionality.

As an Mtrace client, FTOS transmits Mtrace queries, receives, parses and prints out the details in the response packet received.

As an Mtrace transit or intermediate router, FTOS returns the response to Mtrace queries. Upon receiving the Mtrace request, FTOS computes the RPF neighbor for the source, fills in the request and the forwards the request to the RPF neighbor. While computing the RPF neighbor, the static mroute and mBGP route is preferred over the unicast route.

queue backplane multicast



Reallocate the amount of bandwidth dedicated to multicast traffic.

Syntax

queue backplane multicast bandwidth-percentage *percentage*

Parameters

<i>percentage</i>	Enter the percentage of backplane bandwidth to be dedicated to multicast traffic. Range: 5-95
-------------------	--

Defaults

80% of the scheduler weight is for unicast traffic and 20% is for multicast traffic by default.

Command Modes

CONFIGURATION

Command History

Version 7.7.1.0	Introduced on E-Series
-----------------	------------------------

Example

```
FTOS(conf)#queue backplane multicast bandwidth-percent 30
FTOS(conf)#exit
FTOS#00:14:04: %RPM0-P:CP %SYS-5-CONFIG_I: Configured from console by console
show run | grep bandwidth
queue backplane multicast bandwidth-percent 30
FTOS#
```

Related Commands

show queue backplane multicast	Display the backplane bandwidth configuration about how much bandwidth is dedicated to multicast versus unicast.
--	--

restrict-flooding

E T

Prevent Layer 2 multicast traffic from being flooded on ports below a specified link speed.

Syntax

restrict-flooding multicast min-speed *speed*

Parameters

min-speed <i>min-speed</i>	Enter the minimum link speed that a port must have to receive flooded multicast traffic. Range: 1000
----------------------------	---

Defaults

None

Command Modes

INTERFACE VLAN

Command History

Version 7.7.1.0	Introduced on E-Series TeraScale
-----------------	----------------------------------

Usage Information

This command restricts flooding for all unknown multicast traffic on ports below a certain speed. If you want some multicast traffic to be flooded on slower ports, use the command `mac-flood-list` without the `min-speed` option, in combination with `restrict-flooding`. With `mac-flood-list` you specify the traffic you want to be flooded using a MAC address range.

You may not use unicast MAC addresses when specifying MAC address ranges, and do not overlap MAC addresses ranges, when creating multiple `mac-flood-list` entries for the same VLAN. Restricted Layer 2 Flooding is not compatible with MAC accounting or VMANs.

Related Commands

mac-flood-list	Flood multicast frames with specified MAC addresses to all ports in a VLAN.
--------------------------------	---

show ip mroute

C E S

View the Multicast Routing Table.

S4810

S4820T

Syntax

show ip mroute [*static* | *group-address* [*source-address*] | *active* [*rate*] | *count* | *snooping* [*vlan* *vlan-id*] [*group-address* [*source-address*]] | *summary*]

Parameters

<i>static</i>	(OPTIONAL) Enter the keyword <code>static</code> to view static multicast routes.
<i>group-address</i> [<i>source-address</i>]	(OPTIONAL) Enter the multicast <code>group-address</code> to view only routes associated with that group. Enter the <code>source-address</code> to view routes with that <code>group-address</code> and <code>source-address</code> .

active [<i>rate</i>]	(OPTIONAL) Enter the keyword active to view only active multicast routes. Enter a rate to view active routes over the specified rate. Range: 0 to 10000000
count	(OPTIONAL) Enter the keyword count to view the number of multicast routes and packets on the E-Series.
snooping [vlan <i>vlan-id</i>] [<i>group-address</i>] [<i>source-address</i>]]	(OPTIONAL) E-Series ExaScale, S4810, and S4820T only: Enter the keyword snooping to display information on the multicast routes discovered by PIM-SM snooping. Enter a VLAN ID to limit the information displayed to the multicast routes discovered by PIM-SM snooping on a specified VLAN. Valid VLAN IDs: 1 to 4094. Enter a multicast group address and, optionally, a source multicast address in dotted decimal format (A.B.C.D) to limit the information displayed to the multicast routes discovered by PIM-SM snooping for a specified multicast group and source.
summary	(OPTIONAL) Enter the keyword summary to view routes in a tabular format.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.1	Support for the snooping keyword and optional vlan <i>vlan-id</i> , <i>group-address</i> , and <i>source-address</i> parameters were added on E-Series ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
E-Series legacy command	

Example (show ip mroute static)

```
FTOS#show ip mroute static
Mroute: 23.23.23.0/24, interface: Lo 2
Protocol: static, distance: 0, route-map: none, last change: 00:00:23
```

Example (show ip mroute snooping)

```
FTOS#show ip mroute snooping
IPv4 Multicast Snooping Table

(*, 224.0.0.0), uptime 17:46:23
  Incoming vlan: Vlan 2
  Outgoing interface list:
    GigabitEthernet 4/13

(*, 225.1.2.1), uptime 00:04:16
  Incoming vlan: Vlan 2
  Outgoing interface list:
    GigabitEthernet 4/11
    GigabitEthernet 4/13

(165.87.1.7, 225.1.2.1), uptime 00:03:17
  Incoming vlan: Vlan 2
  Outgoing interface list:
```

**Example
(show ip mroute)**

```

GigabitEthernet 4/11
GigabitEthernet 4/13
GigabitEthernet 4/20

FTOS#show ip mroute

IP Multicast Routing Table

(*, 224.10.10.1), uptime 00:05:12
  Incoming interface: GigabitEthernet 3/12
  Outgoing interface list:
    GigabitEthernet 3/13

(1.13.1.100, 224.10.10.1), uptime 00:04:03
  Incoming interface: GigabitEthernet 3/4
  Outgoing interface list:
    GigabitEthernet 3/12
    GigabitEthernet 3/13

(*, 224.20.20.1), uptime 00:05:12
  Incoming interface: GigabitEthernet 3/12
  Outgoing interface list:
    GigabitEthernet 3/4

```

Table 35-1. show ip mroute Command Example Fields

Field	Description
(S,G)	Displays the forwarding entry in the multicast route table.
uptime	Displays the amount of time the entry has been in the multicast forwarding table.
Incoming interface	Displays the reverse path forwarding (RPF) information towards the source for (S,G) entries and the RP for (*,G) entries.
Outgoing interface list:	Lists the interfaces that meet one of the following: <ul style="list-style-type: none"> • a directly connected member of the Group • statically configured member of the Group • received a (*,G) or (S,G) Join message

show ip rpf

C E S

S4810

S4820T

View reverse path forwarding.

Syntax

show ip rpf

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

E-Series legacy command

Usage Information

Static mroutes are used by network administrators to control the reach-ability of the multicast sources. If a PIM registered multicast source is reachable via static mroute as well as unicast route, the distance of each route is examined and the route with shorter distance is the one the PIM selects for reach-ability.

Note: The default distance of mroutes is zero (0) and is CLI configurable on a per route basis.

Example

```
FTOS#show ip rpf
RPF information for 10.10.10.9
RPF interface: Gi 3/4
RPF neighbor: 165.87.31.4
RPF route/mask: 10.10.10.9/255.255.255.255
RPF type: unicast
```

show queue backplane multicast

E

Display the backplane bandwidth configuration about how much bandwidth is dedicated to multicast versus unicast.

Syntax

show queue backplane multicast bandwidth-percentage

Defaults

None

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.7.1.0

Introduced on E-Series

Example

```
FTOS#show queue backplane multicast bandwidth-percent
Configured multicast bandwidth percentage is 80
```

Related Commands

[queue backplane multicast](#)

Reallocate the amount of bandwidth dedicated to multicast traffic.

IPv6 Multicast Commands

IPv6 Multicast commands are:

- [clear ipv6 mroute](#)
- [debug ipv6 mld_host](#)
- [ipv6 multicast-limit](#)
- [ip multicast-limit](#)
- [show ipv6 mroute](#)
- [show ipv6 mroute mld](#)
- [show ipv6 mroute summary](#)

clear ipv6 mroute

E

Clear learned multicast routes on the multicast forwarding table. To clear the PIM tib, use [clear ip pim tib](#) command.

Syntax

```
clear ipv6 mroute { group-address [source-address] | * }
```

Parameters

<i>group-address</i> [<i>source-address</i>]	Enter multicast group address and source address (if desired) to clear information on a specific group. Enter the addresses in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero.
*	Enter * to clear all multicast routes.

Defaults

No default behavior or values

Command Modes

EXEC Privilege

Command History

Version 7.4.1.0	Introduced
-----------------	------------

Related Commands

show ipv6 pim tib	Display the IPv6 PIM Tree Information Base.
-----------------------------------	---

debug ipv6 mld_host

S4810

Enable the collection of debug information for MLD host transactions.

S4820T

Syntax

```
[no] debug ipv6 mld_host [int-count | interface type] [slot/port-range]
```

Use the no debug ipv6 mld_host command to discontinue collection of debug information for the MLD host transactions.

Parameters

int-count	Enter the keyword count to indicate the number of required debug messages.
interface type	Enter the following keywords and slot/port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword gigabitethernet followed by the slot/port information. For a 10G Ethernet interface, enter the keyword tengigabitethernet followed by the slot/port information. For a 40G interface, enter the keyword fortyGigE followed by the slot/port information. For a management interface enter the keyword managementinterface followed by the slot/port information. For a port-channel interface, enter the keyword port-channel followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by the slot/port information.

Default

Disabled

Command Modes

EXEC

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on the S4810.

Usage Information Use the `debug ipv6 mld_host` command to debug the MLD protocol for all ports or for specified ports. Displayed information includes when a query is received, when a report is sent, when a mcast joins or leaves a group, and some reasons why a MLD query is rejected.

ipv6 multicast-limit

E Limit the number of multicast entries on the system.

Syntax `ipv6 multicast-limit limit`

Parameters	<i>limit</i>	Enter the desired maximum number of multicast entries on the system. Range: 1 to 50000 Default: 15000
-------------------	--------------	---

Defaults 15000 routes

Command Modes CONFIGURATION

Command History	Version 8.3.1.0	Introduced
------------------------	-----------------	------------

Usage Information The maximum number of multicast entries allowed on each line card is determined by the CAM profile. Multicast routes are stored in the IN-V6-McastFib CAM region, which has a fixed number of entries. Any limit configured via the CLI is superseded by this hardware limit. The opposite is also true; the CAM might not be exhausted at the time the CLI-configured route limit is reached.

ipv6 multicast-routing

E Enable IPv6 multicast forwarding.

Syntax `ipv6 multicast-routing`

To disable multicast forwarding, enter `no ipv6 multicast-routing`.

Defaults Disabled

Command Modes CONFIGURATION

Command History	E-Series legacy command
------------------------	-------------------------

Related Commands	ipv6 pim sparse-mode Enable IPv6 PIM sparse mode on the interface.
-------------------------	--

show ipv6 mroute

E

View IPv6 multicast routes.

Syntax

```
show ipv6 mroute [group-address [source-address]] [active rate] [count group-address
[source source-address]]
```

Parameters

<i>group-address</i> [<i>source-address</i>]	(OPTIONAL) Enter the IPv6 multicast group-address to view only routes associated with that group. Optionally, enter the IPv6 source-address to view routes with that group-address and source-address.
<i>active</i> [<i>rate</i>]	(OPTIONAL) Enter the keyword active to view active multicast sources. Enter a rate to view active routes over the specified rate. Range: 0 to 10000000 packets/second
<i>count group-address</i> [<i>source source-address</i>]	(OPTIONAL) Enter the keyword count to view the number of IPv6 multicast routes and packets on the E-Series. Optionally, enter the IPv6 source-address count information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.4.1.0	Introduced
-----------------	------------

Example

```
FTOS#show ipv6 mroute
IP Multicast Routing Table
(165:87:32::30, ff05:100::1), uptime 00:01:11
  Incoming interface: Vlan 200
  Outgoing interface list:
    GigabitEthernet 2/14

(165:87:37::30, ff05:200::1), uptime 00:01:04
  Incoming interface: Port-channel 200
  Outgoing interface list:
    Vlan 200

(165:87:31::30, ff05:300::1), uptime 00:01:19
  Incoming interface: GigabitEthernet 2/14
  Outgoing interface list:
    Port-channel 200

(165:87:32::30, ff05:1100::1), uptime 00:01:08
  Incoming interface: Vlan 200
  Outgoing interface list:
    GigabitEthernet 2/14

(165:87:37::30, ff05:2200::1), uptime 00:01:01
  Incoming interface: Port-channel 200
  Outgoing interface list:
    Vlan 200
```

FTOS#

Example (show ipv6 mroute active)

```
FTOS#show ipv6 mroute active 10
Active Multicast Sources - sending >= 10 pps
```

```

Group: ff05:300::1
  Source: 165:87:31::30
  Rate: 100 pps

Group: ff05:3300::1
  Source: 165:87:31::30
  Rate: 100 pps

Group: ff3e:300::4000:1
  Source: 165:87:31::20
  Rate: 100 pps

Group: ff3e:3300::4000:1
  Source: 165:87:31::20
  Rate: 100 pps

FTOS#
FTOS#show ipv6 mroute count group ff05:3300::1

IP Multicast Statistics
1 routes using 648 bytes of memory
1 groups, 1.00 average sources per group
Forwarding Counts: Pkt Count/Pkts per second

Group: ff05:3300::1, Source count: 1
  Source: 165:87:31::30, Forwarding: 3997/0
FTOS#

```

Example
(show ipv6
mroute count
group)

```

FTOS#show ipv6 mroute count source 165:87:31::30

IP Multicast Statistics
2 routes using 1296 bytes of memory
2 groups, 1.00 average sources per group
Forwarding Counts: Pkt Count/Pkts per second

Group: ff05:300::1, Source count: 1
  Source: 165:87:31::30, Forwarding: 3993/0

Group: ff05:3300::1, Source count: 1
  Source: 165:87:31::30, Forwarding: 3997/0

FTOS#

```

Example
(show ipv6
mroute count
source)

show ipv6 mroute mld

E

Display the Multicast MLD information.

Syntax

```
show ipv6 mroute [mld [group-address | all | vlan vlan-id]]
```

Parameters

mld	(OPTIONAL) Enter the keyword mld to display Multicast MLD information.
group-address	(OPTIONAL) Enter the multicast group address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero.

all	(OPTIONAL) Enter the keyword all to view all the MLD information.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by the VLAN ID to view MLD VLAN information.

Defaults No default values or behavior

Command Modes EXEC
EXEC Privilege

Command History Version 7.4.1.0 Introduced

Example

```
FTOS#show ipv6 mroute mld all

MLD SNOOPING MRTM Table

(*, ff05:100::1), uptime 00:04:21
  Incoming vlan: Vlan 200
  Outgoing interface list:
    GigabitEthernet 2/15
    GigabitEthernet 2/16

(*, ff05:200::1), uptime 00:04:15
  Incoming vlan: Vlan 200
  Outgoing interface list:
    GigabitEthernet 2/15
    GigabitEthernet 2/16

(*, ff05:1100::1), uptime 00:04:18
  Incoming vlan: Vlan 200
  Outgoing interface list:
    GigabitEthernet 2/15
    GigabitEthernet 2/16

FTOS#
```

show ipv6 mroute summary

E Display a summary of the Multicast routing table.

Syntax show ipv6 mroute summary

Defaults No default values or behavior

Command Modes EXEC
EXEC Privilege

Command History Version 7.4.1.0 Introduced

Example

```
FTOS#show ipv6 mroute summary

IP Multicast Routing Table
12 groups, 12 routes
```



```
(165:87:32::30, ff05:100::1), 00:00:24  
(165:87:37::30, ff05:200::1), 00:00:24  
(165:87:31::30, ff05:300::1), 00:00:24  
(165:87:32::30, ff05:1100::1), 00:00:21  
(165:87:37::30, ff05:2200::1), 00:00:21  
(165:87:31::30, ff05:3300::1), 00:00:21  
(165:87:32::20, ff3e:100::4000:1), 00:00:41  
FTOS#
```


Neighbor Discovery Protocol (NDP)

Network Discovery Protocol for IPv6 is supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Overview

Neighbor Discovery Protocol for IPv6 is defined in RFC 2461 as part of the Stateless Address Autoconfiguration protocol. It replaces the Address Resolution Protocol used with IPv4. It defines mechanisms for solving the following problems:

- Router discovery: Hosts can locate routers residing on a link.
- Prefix discovery: Hosts can discover address prefixes for the link.
- Parameter discovery
- Address autoconfiguration — configuration of addresses for an interface
- Address resolution — mapping from IP address to link-layer address
- Next-hop determination
- Neighbor Unreachability Detection (NUD): Determine that a neighbor is no longer reachable on the link.
- Duplicate Address Detection (DAD): Allow a node to check whether a proposed address is already in use.
- Redirect: The router can inform a node about a better first-hop.

NDP makes use of the following five ICMPv6 packet types in its implementation:

- Router Solicitation
- Router Advertisement
- Neighbor Solicitation
- Neighbor Advertisement
- Redirect

Commands

The Neighbor Discovery Protocol (NDP) commands in this chapter are:

- `clear ipv6 neighbors`

- [ipv6 nd managed-config-flag](#)
- [ipv6 nd max-ra-interval](#)
- [ipv6 nd mtu](#)
- [ipv6 nd other-config-flag](#)
- [ipv6 nd prefix](#)
- [ipv6 nd ra-lifetime](#)
- [ipv6 nd reachable-time](#)
- [ipv6 nd suppress-ra](#)
- [ipv6 neighbor](#)
- [show ipv6 neighbors](#)

clear ipv6 neighbors

E **S4810**

S4820T

Delete all entries in the IPv6 neighbor discovery cache, or neighbors of a specific interface. Static entries will not be removed using this command.

Syntax

clear ipv6 neighbors [*ipv6-address*] [*interface*]

Parameters

<i>ipv6-address</i>	Enter the IPv6 address of the neighbor in the x:x:x::x format to remove a specific IPv6 neighbor. The :: notation specifies successive hexadecimal fields of zero.
interface <i>interface</i>	To remove all neighbor entries learned on a specific interface, enter the keyword interface followed by the interface type and slot/port or number information of the interface: <ul style="list-style-type: none"> • For a Fast Ethernet interface, enter the keyword fastEthernet followed by the slot/port information. • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a Port Channel interface, enter the keyword port-channel followed by a number: E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. • For a VLAN, enter the keyword vlan followed by the VLAN ID. The range is from 1 to 4094.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

ipv6 nd managed-config-flag

E

Set the managed address configuration flag in the IPv6 router advertisement. The description of this flag from RFC 2461 (<http://tools.ietf.org/html/rfc2461>) is:

M: 1-bit “Managed address configuration” flag. When set, hosts use the administered (stateful) protocol for address autoconfiguration in addition to any addresses autoconfigured using stateless address autoconfiguration. The use of this flag is described in:

Thomson, S. and T. Narten, “IPv6 Address Autoconfiguration”, RFC 2462, December 1998.

Syntax ipv6 nd managed-config-flag

To clear the flag from the IPv6 router advertisements, use the no ipv6 nd managed-config-flag command.

Defaults The default flag is 0.

Command Modes INTERFACE

ipv6 nd max-ra-interval

E

Configure the interval between the IPv6 router advertisement (RA) transmissions on an interface.

Syntax ipv6 nd max-ra-interval { *interval* } min-ra-interval { *interval* }

To restore the default interval, use the no ipv6 nd max-ra-interval command.

Parameters	max-ra-interval { <i>interval</i> }	Enter the keyword max-ra-interval followed by the interval in seconds. Range: 4 to 1800 seconds
	min-ra-interval { <i>interval</i> }	Enter the keyword min-ra-interval followed by the interval in seconds. Range: 3 to 1350 seconds

Defaults Max RA interval: 600 seconds, Min RA interval: 200 seconds

Command Modes INTERFACE

ipv6 nd mtu

C **E** **S**

Configure an IPv6 neighbor discovery.

Syntax ipv6 nd mtu *number*

Parameters	<i>mtu number</i>	Set the MTU advertisement value in Routing Prefix Advertisement packets. Range: 1280 to 9234
Defaults	No default values or behavior	
Command Modes	INTERFACE	
Command History	Version 8.3.1.0	Introduced
Usage Information	<p>The ip nd mtu command sets the value advertised to routers. It does not set the actual MTU rate. For example, if ip nd mtu is set to 1280, the interface will still pass 1500-byte packets.</p> <p>The mtu command sets the actual frame size passed, and can be larger than the advertised MTU. If the mtu setting is larger than the ip nd mtu, an error message is sent, but the configuration is accepted.</p> <p><code>% Error: nd ra mtu is greater than link mtu, link mtu will be used.</code></p>	
Related Commands	mtu	Set the maximum link MTU (frame size) for an Ethernet interface.

ipv6 nd other-config-flag

E

Set the other stateful configuration flag in the IPv6 router advertisement. The description of this flag from RFC 2461 (<http://tools.ietf.org/html/rfc2461>) is:

O: 1-bit “Other stateful configuration” flag. When set, hosts use the administered (stateful) protocol for autoconfiguration of other (non-address) information. The use of this flag is described in:

Thomson, S. and T. Narten, “IPv6 Address Autoconfiguration”, RFC 2462, December 1998.

Syntax

ipv6 nd other-config-flag

To clear the flag from the IPv6 router advertisements, use the no ipv6 nd other-config-flag command.

Defaults

The default flag is 0.

Command Modes

INTERFACE

ipv6 nd prefix

E

Configure how IPv6 prefixes are advertised in the IPv6 router advertisements. The description of an IPv6 prefix from RFC 2461 (<http://tools.ietf.org/html/rfc2461>) is a bit string that consists of some number of initial bits of an address.

Syntax `ipv6 nd prefix { ipv6-address prefix-length | default} [no-advertise] | [no-autoconfig | no-rtr-address | off-link]`

Parameters	<i>ipv6-address prefix-length</i>	Enter the IPv6 address in the x:x:x:x format followed by the prefix length in the /x format. Range: /0 to /128 The :: notation specifies successive hexadecimal fields of zeros
	default	(OPTIONAL) Enter the keyword <code>default</code> to specify the prefix default parameters.
	no-advertise	(OPTIONAL) Enter the keyword <code>no-advertise</code> to not advertise prefixes.
	no-autoconfig	(OPTIONAL) Enter the keyword <code>no-autoconfig</code> to not use prefixes for auto-configuration.
	no-rtr-address	(OPTIONAL) Enter the keyword <code>no-rtr-address</code> to not send full router addresses in prefix advertisement.
	off-link	(OPTIONAL) Enter the keyword <code>off-link</code> to not use prefixes for on-link determination.

Defaults Not configured

Command Modes INTERFACE

ipv6 nd ra-lifetime

E Configure the router lifetime value in the IPv6 router advertisements on an interface. The description of router lifetime from RFC 2461 (<http://tools.ietf.org/html/rfc2461>) is:

Router Lifetime: 16-bit unsigned integer. The lifetime associated with the default router in units of seconds. The maximum value corresponds to 18.2 hours. A Lifetime of 0 indicates that the router is not a default router and **SHOULD NOT** appear on the default router list. The Router Lifetime applies only to the router's usefulness as a default router; it does not apply to information contained in other message fields or options. Options that need time limits for their information include their own lifetime fields.

Syntax `ipv6 nd ra-lifetime seconds`

To restore the default values, use the `no ipv6 nd ra-lifetime` command.

Parameters	<i>seconds</i>	Enter the lifetime value in seconds. Range: 0 to 9000
-------------------	----------------	--

Defaults 9000 seconds

Command Modes INTERFACE

ipv6 nd reachable-time

E

Configure the amount of time that a remote IPv6 node is considered available after a reachability confirmation event has occurred. The description of reachable time from RFC 2461 (<http://tools.ietf.org/html/rfc2461>) is:

Reachable Time: 32-bit unsigned integer. The time, in milliseconds, that a node assumes a neighbor is reachable after having received a reachability confirmation. Used by the Neighbor Unreachability Detection algorithm. A value of zero means unspecified (by this router).

Syntax ipv6 nd reachable-time { *milliseconds* }

To restore the default time, use the no ipv6 nd reachable-time command.

Parameters

<i>milliseconds</i>	Enter the leachability time in milliseconds. Range: 0 to 3600000
---------------------	---

Defaults 3600000 milliseconds

Command Modes INTERFACE

ipv6 nd suppress-ra

E

Suppress the IPv6 router advertisement transmissions on an interface.

Syntax ipv6 nd suppress-ra

To enable the sending of IPv6 router advertisement transmissions on an interface, use the no ipv6 nd suppress-ra command.

Defaults Enabled

Command Modes INTERFACE

ipv6 neighbor

E **S4810**

S4820T

Configure a static entry in the IPv6 neighbor discovery.

Syntax ipv6 neighbor { *ipv6-address* } { interface *interface* } { *hardware_address* }

To remove a static IPv6 entry from the IPv6 neighbor discovery, use the no ipv6 neighbor { *ipv6-address* } { interface *interface* } command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address of the neighbor in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zero
	interface <i>interface</i>	Enter the keyword <code>interface</code> followed by the interface type and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword <code>fastEthernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
	<i>hardware_address</i>	Enter a 48-bit hardware MAC address in nn:nn:nn:nn:nn:nn format.
Defaults	No default behavior or values	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810

show ipv6 neighbors

E **S4810**

S4820T

Display IPv6 discovery information. Entering the command without options shows all IPv6 neighbor addresses stored on the CP (control processor).

Syntax

```
show ipv6 neighbors [ipv6-address] [cpu {rp1 [ipv6-address] | rp2 [ipv6-address]}]
[interface interface]
```

Parameters	<i>ipv6-address</i>	Enter the IPv6 address of the neighbor in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zero
-------------------	---------------------	---

<code>cpu</code>	Enter the keyword <code>cpu</code> followed by either <code>rp1</code> or <code>rp2</code> (Route Processor 1 or 2), optionally followed by an IPv6 address to display the IPv6 neighbor entries stored on the designated RP.
<code>interface interface</code>	<ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword <code>fastEthernet</code> followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number from 1 to 255. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by the VLAN ID. The range is from 1 to 4094.

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Example

```
FTOS#show ipv6 neighbors

IPv6 Address    Expires (min)    Hardware Address    State    Interface    VLAN    CPU
-----
fe80::201:e8ff:fe17:5bc6
                1439            00:01:e8:17:5b:c6    STALE    Gi 1/9        -       CP
fe80::201:e8ff:fe17:5bc7
                1439            00:01:e8:17:5b:c7    STALE    Gi 1/10       -       CP
fe80::201:e8ff:fe17:5bc8
                1439            00:01:e8:17:5b:c8    STALE    Gi 1/11       -       CP
fe80::201:e8ff:fe17:5caf
                0.3            00:01:e8:17:5c:af    REACH    Po 1          -       CP
fe80::201:e8ff:fe17:5cb0
                1439            00:01:e8:17:5c:b0    STALE    Po 32         -       CP
fe80::201:e8ff:fe17:5cb1
                1439            00:01:e8:17:5c:b1    STALE    Po 255        -       CP
fe80::201:e8ff:fe17:5cae
                1439            00:01:e8:17:5c:ae    STALE    Gi 1/3        V1 100    CP
fe80::201:e8ff:fe17:5cae
                1439            00:01:e8:17:5c:ae    STALE    Gi 1/5        V1 1000   CP
fe80::201:e8ff:fe17:5cae
                1439            00:01:e8:17:5c:ae    STALE    Gi 1/7        V1 2000   CP
FTOS#
```

Open Shortest Path First (OSPFv2)

Overview

The **S4810** and **S4820T** platform supports [Open Shortest Path First \(OSPFv2\)](#) only. Up to 16 OSPF instances can be run simultaneously on the **S4810** and **S4820T**.

OSPF is an Interior Gateway Protocol (IGP), which means that it distributes routing information between routers in a single Autonomous System (AS). OSPF is also a link-state protocol in which all routers contain forwarding tables derived from information about their links to their neighbors.

OSPFv2 Commands

The Dell Force10 implementation of OSPFv2 is based on IETF RFC 2328. The following commands enable you to configure and enable OSPFv2.

- [area default-cost](#)
- [area nssa](#)
- [area range](#)
- [area stub](#)
- [area virtual-link](#)
- [auto-cost](#)
- [clear ip ospf](#)
- [clear ip ospf statistics](#)
- [debug ip ospf](#)
- [default-information originate](#)
- [default-metric](#)
- [description](#)
- [distance](#)
- [distance ospf](#)
- [distribute-list in](#)
- [distribute-list out](#)
- [enable inverse mask](#)
- [fast-convergence](#)

- flood-2328
- graceful-restart grace-period
- graceful-restart helper-reject
- graceful-restart mode
- graceful-restart role
- ip ospf auth-change-wait-time
- ip ospf authentication-key
- ip ospf cost
- ip ospf dead-interval
- ip ospf hello-interval
- ip ospf message-digest-key
- ip ospf mtu-ignore
- ip ospf network
- ip ospf priority
- ip ospf retransmit-interval
- ip ospf transmit-delay
- log-adjacency-changes
- maximum-paths
- mib-binding
- network area
- passive-interface
- redistribute
- redistribute bgp
- redistribute isis
- router-id
- router ospf
- show config
- show ip ospf
- show ip ospf asbr
- show ip ospf database
- show ip ospf database asbr-summary
- show ip ospf database external
- show ip ospf database network
- show ip ospf database nssa-external
- show ip ospf database opaque-area
- show ip ospf database opaque-as
- show ip ospf database opaque-link
- show ip ospf database router
- show ip ospf database summary
- show ip ospf interface

- [show ip ospf neighbor](#)
- [show ip ospf routes](#)
- [show ip ospf statistics](#)
- [show ip ospf timers rate-limit](#)
- [show ip ospf topology](#)
- [show ip ospf virtual-links](#)
- [summary-address](#)
- [timers spf](#)
- [timers throttle lsa all](#)
- [timers throttle lsa arrival](#)

area default-cost

C **E** **S**

Set the metric for the summary default route generated by the area border router (ABR) into the stub area. Use this command on the border routers at the edge of a stub area.

Syntax `area area-id default-cost cost`

To return default values, use the **no area *area-id* default-cost** command.

Parameters

<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
<i>cost</i>	Specifies the stub area's advertised external route metric. Range: zero (0) to 65535.

Defaults `cost = 1`; no areas are configured.

Command Modes ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

In FTOS, cost is defined as reference bandwidth/bandwidth.

Related Commands

area stub	Create a stub area.
---------------------------	---------------------

area nssa

C **E** **S**

Specify an area as a Not So Stubby Area (NSSA).

Syntax

area *area-id* **nssa** [**default-information-originate**] [**no-redistribution**] [**no-summary**]

To delete an NSSA, enter **no area** *area-id* **nssa**.

Parameters

<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D) or enter a number from 0 and 65535.
no-redistribution	(OPTIONAL) Specify that the redistribute command should not distribute routes into the NSSA. You should only use this command in a NSSA Area Border Router (ABR).
default-information-originate	(OPTIONAL) Allows external routing information to be imported into the NSSA by using Type 7 default.
no-summary	(OPTIONAL) Specify that no summary LSAs should be sent into the NSSA.

Defaults

Not configured

Command Mode

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

area range

C **E** **S**

Summarize routes matching an address/mask at an area border router (ABR).

Syntax

area *area-id* **range** *ip-address mask* [**not-advertise**]

To disable route summarization, use the **no area** *area-id* **range** *ip-address mask* command.

Parameters

<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
<i>ip-address</i>	Specify an IP address in dotted decimal format.
<i>mask</i>	Specify a mask for the destination prefix. Enter the full mask (for example, 255.255.255.0).
not-advertise	(OPTIONAL) Enter the keyword not-advertise to set the status to DoNotAdvertise (that is, the Type 3 summary-LSA is suppressed and the component networks remain hidden from other areas.)

Defaults No range is configured.

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information Only the routes within an area are summarized, and that summary is advertised to other areas by the ABR. External routes are not summarized.

Related Commands	area stub	Create a stub area.
	router ospf	Enter the ROUTER OSPF mode to configure an OSPF instance.

area stub



Configure a stub area, which is an area not connected to other areas.

Syntax `area area-id stub [no-summary]`

To delete a stub area, enter **no area *area-id* stub**.

Parameters	<i>area-id</i>	Specify the stub area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
	no-summary	(OPTIONAL) Enter the keyword no-summary to prevent the ABR from sending summary Link State Advertisements (LSAs) into the stub area.

Defaults Disabled

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information Use this command to configure all routers and access servers within a stub.

Related Commands

[router ospf](#) Enter the ROUTER OSPF mode to configure an OSPF instance.

area virtual-link

C **E** **S**

Set a virtual link and its parameters.

Syntax

```
area area-id virtual-link router-id [[authentication-key [encryption-type] key] |
message-digest-key keyid md5 [encryption-type] key]] [dead-interval seconds]
[hello-interval seconds] [retransmit-interval seconds] [transmit-delay seconds]
```

To delete a virtual link, use the **no area** *area-id virtual-link router-id* command.

To delete a parameter of a virtual link, use the **no area** *area-id virtual-link router-id* [[**authentication-key** [*encryption-type*] *key*] | [**message-digest-key** *keyid* **md5** [*encryption-type*] *key*]] [**dead-interval** *seconds*] [**hello-interval** *seconds*] [**retransmit-interval** *seconds*] [**transmit-delay** *seconds*] command syntax.

Parameters

<i>area-id</i>	Specify the transit area for the virtual link in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
<i>router-id</i>	Specify an ID (IP address in dotted decimal format) associated with a virtual link neighbor.
authentication-key [<i>encryption-type</i>] <i>key</i> message-digest-key <i>keyid</i> md5 [<i>encryption-type</i>] <i>key</i>	(OPTIONAL) Choose between two authentication methods: <ul style="list-style-type: none"> Enter the keyword authentication-key to enable simple authentication followed by an alphanumeric string up to 8 characters long. Optionally, for the <i>encryption-type</i> variable, enter the number 7 before entering the <i>key</i> string to indicate that an encrypted password will follow. Enter the keyword message-digest-key followed by a number from 1 to 255 as the <i>keyid</i>. After the <i>keyid</i>, enter the keyword md5 followed by the <i>key</i>. The <i>key</i> is an alphanumeric string up to 16 characters long. Optionally, for the <i>encryption-type</i> variable, enter the number 7 before entering the <i>key</i> string to indicate that an encrypted password will follow.
dead-interval <i>seconds</i>	(OPTIONAL) Enter the keyword dead-interval followed by a number as the number of <i>seconds</i> for the interval. Range: 1 to 8192. Default: 40 seconds.
hello-interval <i>seconds</i>	(OPTIONAL) Enter the keyword hello-interval followed by the number of <i>seconds</i> for the interval. Range: 1 to 8192. Default: 10 seconds.
retransmit-interval <i>seconds</i>	(OPTIONAL) Enter the keyword retransmit-interval followed by the number of <i>seconds</i> for the interval. Range: 1 to 8192. Default: 5 seconds.
transmit-delay <i>seconds</i>	(OPTIONAL) Enter the keyword transmit-delay followed by the number of <i>seconds</i> for the interval. Range: 1 to 8192. Default: 1 second.

Defaults **dead-interval** *seconds* = 40 seconds; **hello-interval** *seconds* = 10 seconds;
retransmit-interval *seconds* = 5 seconds; **transmit-delay** *seconds* = 1 second

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information All OSPF areas must be connected to a backbone area (usually Area 0). Virtual links connect broken or discontinuous areas.

You cannot enable both authentication options. Choose either the **authentication-key** or **message-digest-key** option.

auto-cost

C **E** **S**

Specify how the OSPF interface cost is calculated based on the reference bandwidth method.

Syntax **auto-cost** [**reference-bandwidth** *ref-bw*]

To return to the default bandwidth or to assign cost based on the interface type, use the **no auto-cost** [**reference-bandwidth**] command.

Parameters	<i>ref-bw</i>	(OPTIONAL) Specify a reference bandwidth in megabits per second. Range: 1 to 4294967 Default: 100 megabits per second.
-------------------	---------------	--

Defaults 100 megabits per second.

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

clear ip ospf

C **E** **S**

Clear all OSPF routing tables.

Syntax

clear ip ospf *process-id* [**process**]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to clear a specific process. If no Process ID is entered, all OSPF processes are cleared.
process	(OPTIONAL) Enter the keyword process to reset the OSPF process.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

clear ip ospf statistics

C **E** **S**

Clear the packet statistics in interfaces and neighbors.

Syntax

clear ip ospf *process-id* **statistics** [**interface** *name* {**neighbor** *router-id*}]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to clear statistics for a specific process. If no Process ID is entered, all OSPF processes are cleared.
interface <i>name</i>	(OPTIONAL) Enter the keyword interface followed by one of the following interface keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel groups, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1-32 for EtherScale, 1-255 for TeraScale For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
neighbor <i>router-id</i>	(OPTIONAL) Enter the keyword neighbor followed by the neighbor's router-id in dotted decimal format (A.B.C.D.).

Defaults

No defaults values or behavior

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Related Commands

show ip ospf statistics	Display the OSPF statistics
---	-----------------------------

debug ip ospf

C **E** **S**

Display debug information on OSPF. Entering **debug ip ospf** enables OSPF debugging for the first OSPF process,.

Syntax

debug ip ospf *process-id* [**bfd** | **event** | **packet** | **spf** | **database-timer rate-limit**]

To cancel the debug command, enter **no debug ip ospf**.

Parameters

<i>process-id</i>	Enter the OSPF Process ID to debug a specific process. If no Process ID is entered, command applies only to the first OSPF process.
bfd	(OPTIONAL) Enter the keyword bfd to debug only OSPF BFD information.
event	(OPTIONAL) Enter the keyword event to debug only OSPF event information.
packet	(OPTIONAL) Enter the keyword packet to debug only OSPF packet information.
spf	(OPTIONAL) Enter the keyword spf to display the Shortest Path First information.
database-timer rate-limit	(OPTIONAL) Enter the keyword database-timer rate-limit to display the LSA throttling timer information. Applies to the S4810 and S4820T only.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Added database-timer rate-limit option for the S4820T.
Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Added database-timer rate-limit option for the S4810.
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#debug ip ospf 1 packet
OSPF process 90, packet debugging is on
```

```

FTOS#
08:14:24 : OSPF(100:00):
Xmt. v:2 t:1(HELLO) l:44 rid:192.1.1.1
      aid:0.0.0.1 chk:0xa098 aut:0 auk: keyid:0 to:Gi 4/3 dst:224.0.0.5
      netmask:255.255.255.0 pri:1 N-, MC-, E+, T-,
      hi:10 di:40 dr:90.1.1.1 bdr:0.0.0.0

```

Table 37-1. Output Descriptions for debug ip ospf process-id packet

Field	Description
8:14	Displays the time stamp.
OSPF	Displays the OSPF process ID: instance ID.
v:	Displays the OSPF version. FTOS supports version 2 only.
t:	Displays the type of packet sent: <ul style="list-style-type: none"> • 1 - Hello packet • 2 - database description • 3 - link state request • 4 - link state update • 5 - link state acknowledgement
l:	Displays the packet length.
rid:	Displays the OSPF router ID.
aid:	Displays the Autonomous System ID.
chk:	Displays the OSPF checksum.
aut:	States if OSPF authentication is configured. One of the following is listed: <ul style="list-style-type: none"> • 0 - no authentication configured • 1 - simple authentication configured using the <code>ip ospf authentication-key</code> command) • 2 - MD5 authentication configured using the <code>ip ospf message-digest-key</code> command.
auk:	If the <code>ip ospf authentication-key</code> command is configured, this field displays the key used.
keyid:	If the <code>ip ospf message-digest-key</code> command is configured, this field displays the MD5 key
to:	Displays the interface to which the packet is intended.
dst:	Displays the destination IP address.
netmask:	Displays the destination IP address mask.
pri:	Displays the OSPF priority

Table 37-1. Output Descriptions for debug ip ospf process-id packet

Field	Description
N, MC, E, T	Displays information available in the Options field of the HELLO packet: <ul style="list-style-type: none"> • N + (N-bit is set) • N - (N-bit is not set) • MC+ (bit used by MOSPF is set and router is able to forward IP multicast packets) • MC- (bit used by MOSPF is not set and router cannot forward IP multicast packets) • E + (router is able to accept AS External LSAs) • E - (router cannot accept AS External LSAs) • T + (router can support TOS) • T - (router cannot support TOS)
hi:	Displays the amount of time configured for the HELLO interval.
di:	Displays the amount of time configured for the DEAD interval.
dr:	Displays the IP address of the designated router.
bdr:	Displays the IP address of the Border Area Router.

default-information originate

C E S

Configure the FTOS to generate a default external route into an OSPF routing domain.

Syntax

default-information originate [**always**] [**metric** *metric-value*] [**metric-type** *type-value*] [**route-map** *map-name*]

To return to the default values, enter **no default-information originate**.

Parameters

always	(OPTIONAL) Enter the keyword always to specify that default route information must always be advertised.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number to configure a metric value for the route. Range: 1 to 16777214
metric-type <i>type-value</i>	(OPTIONAL) Enter the keyword metric-type followed by an OSPF link state type of 1 or 2 for default routes. The values are: <ul style="list-style-type: none"> • 1 = Type 1 external route • 2 = Type 2 external route.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of an established route map.

Defaults

Disabled.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

redistribute	Redistribute routes from other routing protocols into OSPF.
------------------------------	---

default-metric

C **E** **S**

Change the metrics of redistributed routes to a value useful to OSPF. Use this command with the [redistribute](#) command.

Syntax

default-metric *number*

To return to the default values, enter **no default-metric** [*number*].

Parameters

<i>number</i>	Enter a number as the metric. Range: 1 to 16777214.
---------------	--

Defaults

Disabled.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

redistribute	Redistribute routes from other routing protocols into OSPF.
------------------------------	---

description

C **E** **S**

Add a description about the selected OSPF configuration.

Syntax

description *description*

To remove the OSPF description, use the **no description** command.

Parameters

<i>description</i>	Enter a text string description to identify the OSPF configuration (80 characters maximum).
--------------------	---

Defaults

No default behavior or values

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

show ip ospf asbr	Display VLAN configuration.
-----------------------------------	-----------------------------

distance

C **E** **S**

Define an administrative distance for particular routes to a specific IP address.

Syntax**distance** *weight* [*ip-address mask access-list-name*]To delete the settings, use the **no distance** *weight* [*ip-address mask access-list-name*] command.**Parameters**

<i>weight</i>	Specify an administrative distance. Range: 1 to 255. Default: 110
<i>ip-address</i>	(OPTIONAL) Enter a router ID in the dotted decimal format. If you enter a router ID, you must include the mask for that router address.
<i>mask</i>	(OPTIONAL) Enter a mask in dotted decimal format or /n format.
<i>access-list-name</i>	(OPTIONAL) Enter the name of an IP standard access list, up to 140 characters.

Defaults

110

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF. Increased name string to accept up to 140 characters. Prior to 7.8.1.0, names are up to 16 characters long.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

distance ospf

C **E** **S**

Configure an OSPF distance metric for different types of routes.

Syntax

distance ospf [**external** *dist3*] [**inter-area** *dist2*] [**intra-area** *dist1*]

To delete these settings, enter **no distance ospf**.

Parameters

external <i>dist3</i>	(OPTIONAL) Enter the keyword external followed by a number to specify a distance for external type 5 and 7 routes. Range: 1 to 255 Default: 110.
inter-area <i>dist2</i>	(OPTIONAL) Enter the keyword inter-area followed by a number to specify a distance metric for routes between areas. Range: 1 to 255 Default: 110.
intra-area <i>dist1</i>	(OPTIONAL) Enter the keyword intra-area followed by a number to specify a distance metric for all routes within an area. Range: 1 to 255 Default: 110.

Defaults

external *dist3* = 110; **inter-area** *dist2* = 110; **intra-area** *dist1* = 110.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

To specify a distance for routes learned from other routing domains, use the [redistribute](#) command.

distribute-list in

C **E** **S**

Apply a filter to incoming routing updates from OSPF to the routing table.

Syntax

distribute-list *prefix-list-name* **in** [*interface*]

To delete a filter, use the **no distribute-list** *prefix-list-name* **in** [*interface*] command.

Parameters	<i>prefix-list-name</i>	Enter the name of a configured prefix list.
	<i>interface</i>	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel groups, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1-32 for EtherScale, 1-255 for TeraScale For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
Defaults	Not configured.	
Command Modes	ROUTER OSPF	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

distribute-list out

C **E** **S**

Apply a filter to restrict certain routes destined for the local routing table after the SPF calculation.

Syntax

distribute-list *prefix-list-name* **out** [**bgp** | **connected** | **isis** | **rip** | **static**]

To remove a filter, use the **no distribute-list** *prefix-list-name* **out** [**bgp** | **connected** | **isis** | **rip** | **static**] command.

Parameters	<i>prefix-list-name</i>	Enter the name of a configured prefix list.
	bgp	(OPTIONAL) Enter the keyword bgp to specify that BGP routes are distributed.*
	connected	(OPTIONAL) Enter the keyword connected to specify that connected routes are distributed.
	isis	(OPTIONAL) Enter the keyword isis to specify that IS-IS routes are distributed.*

rip	(OPTIONAL) Enter the keyword rip to specify that RIP routes are distributed.*												
static	(OPTIONAL) Enter the keyword static to specify that only manually configured routes are distributed.												
	* BGP and ISIS routes are not available on the C-Series. BGP, ISIS, and RIP routes are not available on the S-Series.												
Defaults	Not configured.												
Command Modes	ROUTER OSPF												
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced support for Multi-Process OSPF.</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.1.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.8.1.0	Introduced support for Multi-Process OSPF.	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.1.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T												
Version 8.3.7.0	Introduced on S4810												
Version 7.8.1.0	Introduced support for Multi-Process OSPF.												
Version 7.6.1.0	Introduced on S-Series												
Version 7.5.1.0	Introduced on C-Series												
pre-Version 6.1.1.1	Introduced on E-Series												
Usage Information	The distribute-list out command applies to routes being redistributed by autonomous system boundary routers (ASBRs) into OSPF. It can be applied to external type 2 and external type 1 routes, but not to intra-area and inter-area routes.												

enable inverse mask

C **E**

FTOS, by default, permits the user to input OSPF **network** command with a net-mask. This command provides a choice between inverse-mask or net-mask (the default).

Syntax

enable inverse mask

To return to the default net-mask, enter **no enable inverse mask**.

Defaults

net-mask

Command Modes

CONFIGURATION

Command History

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

fast-convergence

C **E** **S**

This command sets the minimum LSA origination and arrival times to zero (0), allowing more rapid route computation so that convergence takes less time.

Syntax **fast-convergence** {*number*}

To cancel fast-convergence, enter **no fast convergence**.

Parameters	<i>number</i>	Enter the convergence level desired. The higher this parameter is set, the faster OSPF converge takes place. Range: 1-4
-------------------	---------------	--

Defaults None.

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on all platforms.

Usage Information

The higher this parameter is set, the faster OSPF converge takes place. Note that the faster the convergence, the more frequent the route calculations and updates. This will impact CPU utilization and may impact adjacency stability in larger topologies.

Generally, convergence level 1 meets most convergence requirements. Higher convergence levels should only be selected following consultation with Dell Force10 technical support.

flood-2328

C **E** **S**

Enable RFC-2328 flooding behavior.

Syntax **flood-2328**

To disable, use the **no flood-2328** command.

Defaults Disabled

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

In OSPF, flooding is the most resource-consuming task. The flooding algorithm, described in RFC-2328, requires that OSPF flood LSAs (Link State Advertisements) on all interfaces, as governed by LSA's flooding scope (Section 13 of the RFC). When multiple direct links connect two routers, the RFC-2328 flooding algorithm generates significant redundant information across all links.

By default, FTOS implements an enhanced flooding procedure that dynamically and intelligently determines when to optimize flooding. Whenever possible, the OSPF task attempts to reduce flooding overhead by selectively flooding on a subset of the interfaces between two routers.

When **flood-2328** is enabled, this command configures FTOS to flood LSAs on all interfaces.

graceful-restart grace-period

C **E** **S**

S4810

S4820T

Specifies the time duration, in seconds, that the router's neighbors will continue to advertise the router as fully adjacent regardless of the synchronization state during a graceful restart.

Syntax

graceful-restart grace-period *seconds*

To disable the grace period, enter **no graceful-restart grace-period**.

Parameters

<i>seconds</i>	Time duration, in seconds, that specifies the duration of the restart process before OSPF terminates the process. Range: 40 to 1800 seconds
----------------	--

Defaults

Not Configured

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced for S-Series Introduced support for Multi-Process OSPF.
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

graceful-restart helper-reject

C E S

Specify the OSPF router to not act as a helper during graceful restart.

S4810

S4820T

Syntax `graceful-restart helper-reject ip-address`

To return to default value, enter **no graceful-restart helper-reject**.

Parameters	<i>ip-address</i>	Enter the OSPF router-id, in IP address format, of the restart router that <i>will not</i> act as a helper during graceful restart.
Defaults	Not Configured	
Command Modes	ROUTER OSPF	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF. Restart role enabled on S-Series (Both Helper and Restart roles now supported on S-Series.
	Version 7.7.1.0	Helper-Role supported on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

graceful-restart mode

C E S

Enable the graceful restart mode.

S4810

S4820T

Syntax `graceful-restart mode [planned-only | unplanned-only]`

To disable graceful restart mode, enter **no graceful-restart mode**.

Parameters	planned-only	(OPTIONAL) Enter the keywords planned-only to indicate graceful restart is supported in a planned restart condition only.
	unplanned-only	(OPTIONAL) Enter the keywords unplanned-only to indicate graceful restart is supported in an unplanned restart condition only.
Defaults	Support for both planned and unplanned failures.	

Command Modes ROUTER OSPF**Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

graceful-restart role

C E S

Specify the role for your OSPF router during graceful restart.

S4810

S4820T

Syntax**graceful-restart role** [**helper-only** | **restart-only**]To disable graceful restart role, enter **no graceful-restart role**.**Parameters**

role helper-only	(OPTIONAL) Enter the keywords helper-only to specify the OSPF router is a helper only during graceful restart.
role restart-only	(OPTIONAL) Enter the keywords restart-only to specify the OSPF router is a restart only during graceful-restart.

Defaults

OSPF routers are, by default, both helper and restart routers during a graceful restart.

Command Modes ROUTER OSPF**Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF. Restart and helper roles supported on S-Series
Version 7.7.1	Helper-Role supported on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

ip ospf auth-change-wait-time

C E S

OSPF provides a grace period while OSPF changes its interface authentication type. During the grace period, OSPF sends out packets with new and old authentication scheme till the grace period expires.

Syntax**ip ospf auth-change-wait-time** *seconds*

To return to the default, enter **no ip ospf auth-change-wait-time**.

Parameters	<i>seconds</i>	Enter seconds Range: 0 to 300
Defaults	zero (0) seconds	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

ip ospf authentication-key

C **E** **S**

Enable authentication and set an authentication key on OSPF traffic on an interface.

Syntax

ip ospf authentication-key [*encryption-type*] *key*

To delete an authentication key, enter **no ip ospf authentication-key**.

Parameters	<i>encryption-type</i>	(OPTIONAL) Enter 7 to encrypt the key.
	<i>key</i>	Enter an 8 character string. Strings longer than 8 characters are truncated.
Defaults	Not configured.	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

All neighboring routers in the same network must use the same password to exchange OSPF information.

ip ospf cost

C **E** **S**

Change the cost associated with the OSPF traffic on an interface.

Syntax

ip ospf cost *cost*

To return to default value, enter **no ip ospf cost**.

Parameters	<i>cost</i>	Enter a number as the cost. Range: 1 to 65535.
Defaults	The default cost is based on the reference bandwidth.	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series
Usage Information	If this command is not configured, cost is based on the auto-cost command.	
	When you configure OSPF over multiple vendors, use the ip ospf cost command to ensure that all routers use the same cost. Otherwise, OSPF routes improperly.	
Related Commands	auto-cost	Control how the OSPF interface cost is calculated.

ip ospf dead-interval

C E S

Set the time interval since the last hello-packet was received from a router. After the interval elapses, the neighboring routers declare the router dead.

Syntax	ip ospf dead-interval <i>seconds</i>	
	To return to the default values, enter no ip ospf dead-interval .	
Parameters	<i>seconds</i>	Enter the number of seconds for the interval. Range: 1 to 65535. Default: 40 seconds.
Defaults	40 seconds	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

By default, the dead interval is four times the default hello-interval.

Related Commands

[ip ospf hello-interval](#) Set the time interval between hello packets.

ip ospf hello-interval

C **E** **S**

Specify the time interval between the hello packets sent on the interface.

Syntax

ip ospf hello-interval *seconds*

To return to the default value, enter **no ip ospf hello-interval**.

Parameters

<i>seconds</i>	Enter a the number of second as the delay between hello packets. Range: 1 to 65535. Default: 10 seconds.
----------------	--

Defaults

10 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

The time interval between hello packets must be the same for routers in a network.

Related Commands

[ip ospf dead-interval](#) Set the time interval before a router is declared dead.

ip ospf message-digest-key

C **E** **S**

Enable OSPF MD5 authentication and send an OSPF message digest key on the interface.

Syntax

ip ospf message-digest-key *keyid md5 key*

To delete a key, use the **no ip ospf message-digest-key** *keyid* command.

Parameters

<i>keyid</i>	Enter a number as the key ID. Range: 1 to 255.
<i>key</i>	Enter a continuous character string as the password.

Defaults No MD5 authentication is configured.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

To change to a different key on the interface, enable the new key while the old key is still enabled. The FTOS will send two packets: the first packet authenticated with the old key, and the second packet authenticated with the new key. This process ensures that the neighbors learn the new key and communication is not disrupted by keeping the old key enabled.

After the reply is received and the new key is authenticated, you must delete the old key. Dell Force10 recommends keeping only one key per interface.



Note: The MD5 secret is stored as plain text in the configuration file with service password encryption.

ip ospf mtu-ignore

C **E** **S**

Disable OSPF MTU mismatch detection upon receipt of database description (DBD) packets.

Syntax

ip ospf mtu-ignore

To return to the default, enter **no ip ospf mtu-ignore**.

Defaults

Enabled

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

ip ospf network

C **E** **S**

Set the network type for the interface.

Syntax `ip ospf network { broadcast | point-to-point }`

To return to the default, enter **no ip ospf network**.

Parameters	broadcast	Enter the keyword broadcast to designate the interface as part of a broadcast network.
	point-to-point	Enter the keyword point-to-point to designate the interface as part of a point-to-point network.

Defaults Not configured.

Command Modes ROUTER OSPF

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support for Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

ip ospf priority

C **E** **S**

Set the priority of the interface to determine the Designated Router for the OSPF network.

Syntax `ip ospf priority number`

To return to the default setting, enter **no ip ospf priority**.

Parameters	<i>number</i>	Enter a number as the priority. Range: 0 to 255. The default is 1.
-------------------	---------------	--

Defaults 1

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information Setting a priority of 0 makes the router ineligible for election as a Designated Router or Backup Designated Router.

Use this command for interfaces connected to multi-access networks, not point-to-point networks.

ip ospf retransmit-interval

C **E** **S**

Set the retransmission time between lost link state advertisements (LSAs) for adjacencies belonging to the interface.

Syntax

ip ospf retransmit-interval *seconds*

To return to the default values, enter **no ip ospf retransmit-interval**.

Parameters

<i>seconds</i>	Enter the number of seconds as the interval between retransmission. Range: 1 to 3600. Default: 5 seconds. This interval must be greater than the expected round-trip time for a packet to travel between two routers.
----------------	--

Defaults

5 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Set the time interval to a number large enough to prevent unnecessary retransmissions. For example, the interval should be larger for interfaces connected to virtual links.

ip ospf transmit-delay

C **E** **S**

Set the estimated time elapsed to send a link state update packet on the interface.

Syntax

ip ospf transmit-delay *seconds*

To return to the default value, enter **no ip ospf transmit-delay**.

Parameters

<i>seconds</i>	Enter the number of seconds as the transmission time. This value should be greater than the transmission and propagation delays for the interface. Range: 1 to 3600. Default: 1 second.
----------------	---

Defaults

1 second

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

log-adjacency-changes

C E S

Set FTOS to send a Syslog message about changes in the OSPF adjacency state.

Syntax

log-adjacency-changes

To disable the Syslog messages, enter **no log-adjacency-changes**.

Defaults

Disabled.

Command Mode

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

maximum-paths

C E S

Enable the software to forward packets over multiple paths.

Syntax

maximum-paths *number*

To disable packet forwarding over multiple paths, enter **no maximum-paths**.

Parameters

<i>number</i>	Specify the number of paths. Range: 1 to 16. Default: 4 paths.
---------------	--

Defaults

4

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

mib-binding

C E S

Enable this OSPF process ID to manage the SNMP traps and process SNMP queries.

Syntax**mib-binding**

To mib-binding on this OSPF process, enter **no mib-binding**.

Defaults

None.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced to all platforms.

Usage Information

This command is either enabled or disabled. If no OSPF process is identified as the MIB manager, the first OSPF process will be used.

If an OSPF process has been selected, it must be disabled prior to assigning new process ID the MIB responsibility.

network area

C E S

Define which interfaces run OSPF and the OSPF area for those interfaces.

Syntax**network** *ip-address mask area area-id*

To disable an OSPF area, use the **no network** *ip-address mask area area-id* command.

Parameters

<i>ip-address</i>	Specify a primary or secondary address in dotted decimal format. The primary address is required before adding the secondary address.
<i>mask</i>	Enter a network mask in /prefix format. (/x)
<i>area-id</i>	Enter the OSPF area ID as either a decimal value or in a valid IP address. Decimal value range: 0 to 65535 IP address format: dotted decimal format A.B.C.D. Note: If the area ID is smaller than 65535, it will be converted to a decimal value. For example, if you use an area ID of 0.0.0.1, it will be converted to 1.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

To enable OSPF on an interface, the [network area](#) command must include, in its range of addresses, the primary IP address of an interface.



Note: An interface can be attached only to a single OSPF area.

If you delete all the [network area](#) commands for Area 0, the [show ip ospf](#) command output will not list Area 0.

passive-interface



Suppress both receiving and sending routing updates on an interface.

Syntax

passive-interface { **default** | *interface* }

To enable both the receiving and sending routing, enter the **no passive-interface interface** command.

To return all OSPF interfaces (current and future) to active, enter the **no passive-interface default** command.

Parameters

default	Enter the keyword default to make all OSPF interfaces (current and future) passive.
<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel groups, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1-32 for EtherScale, 1-255 for TeraScale For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Modified to include the default keyword.
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Although the passive interface will neither send nor receive routing updates, the network on that interface will still be included in OSPF updates sent via other interfaces.

The default keyword sets all interfaces as passive. You can then configure individual interfaces, where adjacencies are desired, using the **no passive-interface** *interface* command. The no form of this command is inserted into the configuration for individual interfaces when the **no passive-interface** *interface* command is issued while **passive-interface default** is configured.

This command behavior has changed as follows:

passive-interface *interface*

- The previous **no passive-interface** *interface* is removed from the running configuration.
- The ABR status for the router is updated.
- Save **passive-interface** *interface* into the running configuration.

passive-interface default

- All present and future OSPF interface are marked as *passive*.
- Any adjacency are explicitly terminated from all OSPF interfaces.
- All previous **passive-interface** *interface* commands are removed from the running configuration.
- All previous **no passive-interface** *interface* commands are removed from the running configuration.

no passive-interface *interface*

- Remove the interface from the passive list.
- The ABR status for the router is updated.
- If **passive-interface default** is specified, then save **no passive-interface** *interface* into the running configuration.

No passive-interface default

- Clear everything and revert to the default behavior.

- All previously marked passive interfaces are removed.
- May update ABR status.

redistribute

C E S

Redistribute information from another routing protocol throughout the OSPF process.

Syntax

redistribute { **connected** | **rip** | **static** } [**metric** *metric-value* | **metric-type** *type-value*] [**route-map** *map-name*] [**tag** *tag-value*]

To disable redistribution, use the **no redistribute** { **connected** | **isis** | **rip** | **static** } command.

Parameters

connected	Enter the keyword connected to specify that information from active routes on interfaces is redistributed.
rip	Enter the keyword rip to specify that RIP routing information is redistributed.
static	Enter the keyword static to specify that information from static routes is redistributed.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number. Range: 0 (zero) to 16777214.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keyword metric-type followed by one of the following: <ul style="list-style-type: none"> • 1 = OSPF External type 1 • 2 = OSPF External type 2
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of the route map.
tag <i>tag-value</i>	(OPTIONAL) Enter the keyword tag followed by a number. Range: 0 to 4294967295

Defaults

Not configured.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

To redistribute the default route (0.0.0.0/0), configure the [default-information originate](#) command.

Related Commands

default-information originate	Generate a default route into the OSPF routing domain.
---	--

redistribute bgp

C **E** **S**

Redistribute BGP routing information throughout the OSPF instance.

Syntax

redistribute bgp *as number* [**metric** *metric-value*] | [**metric-type** *type-value*] | [**tag** *tag-value*]

To disable redistribution, use the **no redistribute bgp** *as number* [**metric** *metric-value*] | [**metric-type** *type-value*] [**route-map** *map-name*] [**tag** *tag-value*] command.

Parameters

<i>as number</i>	Enter the autonomous system number. Range: 1 to 65535
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by the metric-value number. Range: 0 to 16777214
metric-type <i>type-value</i>	(OPTIONAL) Enter the keyword metric-type followed by one of the following: <ul style="list-style-type: none"> 1 = for OSPF External type 1 2 = for OSPF External type 2
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of the route map.
tag <i>tag-value</i>	(OPTIONAL) Enter the keyword tag to set the tag for routes redistributed into OSPF. Range: 0 to 4294967295

Defaults

No default behavior or values

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.3	Introduced Route Map for BGP Redistribution to OSPF
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Modified to include the default keyword.
pre-Version 6.1.1.1	Introduced on E-Series

redistribute isis



Redistribute IS-IS routing information throughout the OSPF instance.

Syntax

redistribute isis [*tag*] [**level-1** | **level-1-2** | **level-2**] [**metric** *metric-value* | **metric-type** *type-value*] [**route-map** *map-name*] [**tag** *tag-value*]

To disable redistribution, use the **no redistribute isis** [*tag*] [**level-1** | **level-1-2** | **level-2**] [**metric** *metric-value* | **metric-type** *type-value*] [**route-map** *map-name*] [**tag** *tag-value*] command.

Parameters

<i>tag</i>	(OPTIONAL) Enter the name of the IS-IS routing process.
level-1	(OPTIONAL) Enter the keyword level-1 to redistribute only IS-IS Level-1 routes.
level-1-2	(OPTIONAL) Enter the keyword level-1-2 to redistribute both IS-IS Level-1 and Level-2 routes.
level-2	(OPTIONAL) Enter the keyword level-2 to redistribute only IS-IS Level-2 routes.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number. Range: 0 (zero) to 4294967295.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keyword metric-type followed by one of the following: <ul style="list-style-type: none">• 1 = for OSPF External type 1• 2 = for OSPF External type 2
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of the route map.
tag <i>tag-value</i>	(OPTIONAL) Enter the keyword tag followed by a number. Range: 0 to 4294967295

Defaults

Not configured.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

IS-IS is not supported on S-Series platforms.

router-id

C **E** **S**

Use this command to configure a fixed router ID.

Syntax

router-id *ip-address*

To remove the fixed router ID, use the **no router-id** *ip-address* command.

Parameters

<i>ip-address</i>	Enter the router ID in the IP address format
-------------------	--

Defaults

This command has no default behavior or values.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support for Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS(conf)#router ospf 100
FTOS(conf-router_ospf)#router-id 1.1.1.1
Changing router-id will bring down existing OSPF adjacency [y/n]:
```

```
FTOS(conf-router_ospf)#show config
!
router ospf 100
router-id 1.1.1.1
FTOS(conf-router_ospf)#no router-id
Changing router-id will bring down existing OSPF adjacency [y/n]:
FTOS#
```

Usage Information

You can configure an arbitrary value in the IP address format for each router. However, each router ID must be unique. If this command is used on an OSPF router process, which is already active (that is, has neighbors), a prompt reminding you that changing router-id will bring down the existing OSPF adjacency. The new router ID is effective at the next reload

router ospf

C **E** **S**

Enter the ROUTER OSPF mode to configure an OSPF instance.

Syntax

router ospf *process-id* [**vrf** {*vrf name*}]

To clear an OSPF instance, enter **no router ospf** *process-id*.

Parameters	<i>process-id</i>	Enter a number for the OSPF instance. Range: 1 to 65535.
	<i>vrf name</i>	(Optional) E-Series Only: Enter the VRF process identifier to tie the OSPF instance to the VRF. All network commands under this OSPF instance are subsequently tied to the VRF instance.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.9.1.0	Introduced VRF
	Version 7.8.1.0	Introduced support of Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series
Example	<pre>FTOS(conf)#router ospf 2 FTOS(conf-router_ospf)#</pre>	
Usage Information	<p>You must have an IP address assigned to an interface to enter the ROUTER OSPF mode and configure OSPF.</p> <p>Once the OSPF process and the VRF are tied together, the OSPF Process ID cannot be used again in the system.</p>	

show config

C **E** **S**

Display the non-default values in the current OSPF configuration.

Syntax

show config

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS(conf-router_ospf)#show config
!
router ospf 3
  passive-interface FastEthernet 0/1
FTOS(conf-router_ospf)#
```

show ip ospf

C **E** **S**

Display information on the OSPF process configured on the switch.

Syntax

show ip ospf *process-id* [**vrf** *vrf name*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>vrf name</i>	E-Series Only: Show only the OSPF information tied to the VRF process.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Added output for LSA throttling timers
Version 8.3.7.0	Introduced on S4810
Version 7.9.1.0	Introduced VRF
Version 7.9.1.0	Introduced VRF
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.8.1.0	Introduced <i>process-id</i> option, in support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

If you delete all the [network area](#) commands for Area 0, the [show ip ospf](#) command output will not list Area 0.

Example

```
FTOS#show ip ospf 10
Routing Process ospf 10 with ID 1.1.1.1 Virtual router default-vrf
Supports only single TOS (TOS0) routes
SPF schedule delay 5 secs, Hold time between two SPFs 10 secs
Convergence Level 0
Min LSA origination 0 msec, Min LSA arrival 1000 msec
Min LSA hold time 5000 msec, Max LSA wait time 5000 msec
Number of area in this router is 1, normal 1 stub 0 nssa 0
  Area BACKBONE (0)
    Number of interface in this area is 1
    SPF algorithm executed 205 times
    Area ranges are
```

FTOS#

Table 37-2. Command Output Descriptions: show ip ospf process-id

Line Beginning with	Description
“Routing Process...”	Displays the OSPF process ID and the IP address associated with the process ID.
“Supports only...”	Displays the number of Type of Service (TOS) route supported.
“SPF schedule...”	Displays the delay and hold time configured for this process ID.

Table 37-2. Command Output Descriptions: show ip ospf process-id

Line Beginning with	Description
“Convergence Level”	
“Min LSA....”	Displays the intervals set for LSA transmission and acceptance.
“Number of...”	Displays the number and type of areas configured for this process ID.

Related Commands

show ip ospf database	Displays information about the OSPF routes configured.
show ip ospf interface	Displays the OSPF interfaces configured.
show ip ospf neighbor	Displays the OSPF neighbors configured.
show ip ospf virtual-links	Displays the OSPF virtual links configured.

show ip ospf asbr

C **E** **S**

Display all ASBR routers visible to OSPF.

Syntax

show ip ospf process-id asbr

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.8.1.0	Introduced <i>process-id</i> option, in support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

Use this command to isolate problems with external routes. In OSPF, external routes are calculated by adding the LSA cost to the cost of reaching the ASBR router. If an external route does not have the correct cost, use this command to determine if the path to the originating router is correct. The display output is not sorted in any order.



Note: ASBRs that are not in directly connected areas are also displayed.

Example

```
FTOS#show ip ospf lasbr
```

```
RouterID      Flags      Cost      Nexthop      Interface      Area
```

```

3.3.3.3          -/-/-/  2      10.0.0.2        Gi 0/1        1
1.1.1.1          E/-/-/  0      0.0.0.0         -              0
FTOS#

```

You can determine if an ASBR is in a directly connected area (or not) by the flags. For ASBRs in a directly connected area, E flags are set. In the figure above, router 1.1.1.1 is in a directly connected area since the Flag is E/-/-/. For remote ASBRs, the E flag is clear (-/-/-/)

show ip ospf database

C **E** **S**

Display all LSA information. If OSPF is not enabled on the switch, no output is generated.

Syntax

show ip ospf *process-id* database [database-summary]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
database-summary	(OPTIONAL) Enter the keywords database-summary to the display the number of LSA types in each area and the total number of LSAs.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS>show ip ospf 1 database
```

```

                                OSPF Router with ID (11.1.2.1) (Process ID 1)
                                Router (Area 0.0.0.0)
Link ID          ADV Router      Age      Seq#           Checksum      Link count
11.1.2.1         11.1.2.1          673     0x80000005    0x707e        2
13.1.1.1         13.1.1.1          676     0x80000097    0x1035        2
192.68.135.2    192.68.135.2     1419    0x80000294    0x9cbd        1

                                Network (Area 0.0.0.0)
Link ID          ADV Router      Age      Seq#           Checksum
10.2.3.2         13.1.1.1          676     0x80000003    0x6592
10.2.4.2         192.68.135.2     908     0x80000055    0x683e

                                Type-5 AS External
Link ID          ADV Router      Age      Seq#           Checksum      Tag
0.0.0.0         192.68.135.2     908     0x80000052    0xeb83        100
1.1.1.1         192.68.135.2     908     0x8000002a    0xbd27        0
10.1.1.0        11.1.2.1          718     0x80000002    0x9012        0
10.1.2.0        11.1.2.1          718     0x80000002    0x851c        0

```



```

10.2.2.0      11.1.2.1      718      0x80000002    0x7927    0
10.2.3.0      11.1.2.1      718      0x80000002    0x6e31    0
10.2.4.0      13.1.1.1      1184     0x80000068    0x45db    0
11.1.1.0      11.1.2.1      718      0x80000002    0x831e    0
11.1.2.0      11.1.2.1      718      0x80000002    0x7828    0
12.1.2.0      192.68.135.2  1663     0x80000054    0xd8d6    0
13.1.1.0      13.1.1.1      1192     0x8000006b    0x2718    0
13.1.2.0      13.1.1.1      1184     0x8000006b    0x1c22    0
172.16.1.0    13.1.1.1      148      0x8000006d    0x533b    0
FTOS>

```

Table 37-3. Command Output Description: show ip ospf process-id database

Field	Description
Link ID	Identifies the router ID.
ADV Router	Identifies the advertising router's ID.
Age	Displays the link state age.
Seq#	Identifies the link state sequence number. This number enables you to identify old or duplicate link state advertisements.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Link count	Displays the number of interfaces for that router.

Related Commands

[show ip ospf database asbr-summary](#) Displays only ASBR summary LSA information.

show ip ospf database asbr-summary

C E S

Display information about AS Boundary LSAs.

Syntax

show ip ospf process-id database asbr-summary [link-state-id] [adv-router ip-address]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
adv-router ip-address	(OPTIONAL) Enter the keywords adv-router ip-address to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```

FTOS#show ip ospf 100 database asbr-summary

      OSPF Router with ID (1.1.1.10) (Process ID 100)

      Summary Asbr (Area 0.0.0.0)

LS age: 1437
Options: (No TOS-capability, No DC, E)
LS type: Summary Asbr
Link State ID: 103.1.50.1
Advertising Router: 1.1.1.10
LS Seq Number: 0x8000000f
Checksum: 0x8221
Length: 28
Network Mask: /0
      TOS: 0 Metric: 2

LS age: 473
Options: (No TOS-capability, No DC, E)
LS type: Summary Asbr
Link State ID: 104.1.50.1
Advertising Router: 1.1.1.10
LS Seq Number: 0x80000010
Checksum: 0x4198
Length: 28
--More--

```

Table 37-4. Command Output Descriptions: show ip ospf database asbr-summary

Item	Description
LS Age	Displays the LSA's age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the advertising router's ID.
Checksum	Displays the Fletcher checksum of the an LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Network Mask	Displays the network mask implemented on the area.
TOS	Displays the Type of Service (TOS) options. Option 0 is the only option.
Metric	Displays the LSA metric.

**Related
Commands**

[show ip ospf database](#)

Displays OSPF database information.

show ip ospf database external

C **E** **S**

Display information on the AS external (type 5) LSAs.

Syntax

show ip ospf *process-id* **database external** [*link-state-id*] [**adv-router** *ip-address*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">the network's IP address for Type 3 LSAs or Type 5 LSAsthe router's OSPF router ID for Type 1 LSAs or Type 4 LSAsthe default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 1 database external

      OSPF Router with ID (20.20.20.5) (Process ID 1)

      Type-5 AS External

      LS age: 612
      Options: (No TOS-capability, No DC, E)
      LS type: Type-5 AS External
      Link State ID: 12.12.12.2
      Advertising Router: 20.31.3.1
      LS Seq Number: 0x80000007
      Checksum: 0x4cde
      Length: 36
      Network Mask: /32
      Metrics Type: 2
      TOS: 0
      Metrics: 25
      Forward Address: 0.0.0.0
      External Route Tag: 43

      LS age: 1868
```

```

Options: (No TOS-capability, DC)
LS type: Type-5 AS External
Link State ID: 24.216.12.0
Advertising Router: 20.20.20.8
LS Seq Number: 0x80000005
Checksum: 0xa00e
Length: 36
Network Mask: /24
  Metrics Type: 2
  TOS: 0
  Metrics: 1
  Forward Address: 0.0.0.0
  External Route Tag: 701
FTOS#

```

Table 37-5. Command Example Descriptions: show ip ospf process-id database external

Item	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> • TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. • DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. • E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the router ID of the LSA's originating router.
LS Seq Number	Identifies the link state sequence number. This number enables you to identify old or duplicate LSAs.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Network Mask	Displays the network mask implemented on the area.
Metrics Type	Displays the external type.
TOS	Displays the TOS options. Option 0 is the only option.
Metrics	Displays the LSA metric.
Forward Address	Identifies the address of the forwarding router. Data traffic is forwarded to this router. If the forwarding address is 0.0.0.0, data traffic is forwarded to the originating router.
External Route Tag	Displays the 32-bit field attached to each external route. This field is not used by the OSPF protocol, but can be used for external route management.

**Related
Commands**

[show ip ospf database](#)

Displays OSPF database information.

show ip ospf database network



Display the network (type 2) LSA information.

Syntax

show ip ospf *process-id* **database network** [*link-state-id*] [**adv-router** *ip-address*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">the network's IP address for Type 3 LSAs or Type 5 LSAsthe router's OSPF router ID for Type 1 LSAs or Type 4 LSAsthe default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 1 data network

      OSPF Router with ID (20.20.20.5) (Process ID 1)

      Network (Area 0.0.0.0)

LS age: 1372
Options: (No TOS-capability, DC, E)
LS type: Network
Link State ID: 202.10.10.2
Advertising Router: 20.20.20.8
LS Seq Number: 0x80000006
Checksum: 0xa35
Length: 36
Network Mask: /24
    Attached Router: 20.20.20.8
    Attached Router: 20.20.20.9
    Attached Router: 20.20.20.7

      Network (Area 0.0.0.1)

LS age: 252
Options: (TOS-capability, No DC, E)
LS type: Network
Link State ID: 192.10.10.2
Advertising Router: 192.10.10.2
LS Seq Number: 0x80000007
```

```
Checksum: 0x4309
Length: 36
Network Mask: /24
  Attached Router: 192.10.10.2
  Attached Router: 20.20.20.1
  Attached Router: 20.20.20.5
FTOS#
```

Table 37-6. Command Example Descriptions: show ip ospf process-id database network

Item	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the router ID of the LSA's originating router.
Checksum	Identifies the link state sequence number. This number enables you to identify old or duplicate LSAs.
Length	Displays the Fletcher checksum of an LSA's complete contents.
Network Mask	Displays the length in bytes of the LSA.
Attached Router	Identifies the IP address of routers attached to the network.

Related Commands

[show ip ospf database](#)

Displays OSPF database information.

show ip ospf database nssa-external

C **E** **S**

Display NSSA-External (type 7) LSA information.

Syntax

show ip ospf database nssa-external [*link-state-id*] [**adv-router** *ip-address*]

Parameters

<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

show ip ospf database	Displays OSPF database information.
---------------------------------------	-------------------------------------

show ip ospf database opaque-area

C **E** **S**

Display the opaque-area (type 10) LSA information.

Syntax

show ip ospf *process-id* **database opaque-area** [*link-state-id*] [**adv-router** *ip-address*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">the network's IP address for Type 3 LSAs or Type 5 LSAsthe router's OSPF router ID for Type 1 LSAs or Type 4 LSAsthe default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS>show ip ospf 1 database opaque-area

      OSPF Router with ID (3.3.3.3) (Process ID 1)

      Type-10 Opaque Link Area (Area 0)

      LS age: 1133
      Options: (No TOS-capability, No DC, E)
      LS type: Type-10 Opaque Link Area
```

```

Link State ID: 1.0.0.1
Advertising Router: 10.16.1.160
LS Seq Number: 0x80000416
Checksum: 0x376
Length: 28
Opaque Type: 1
Opaque ID: 1
Unable to display opaque data

LS age: 833
Options: (No TOS-capability, No DC, E)
LS type: Type-10 Opaque Link Area
Link State ID: 1.0.0.2
Advertising Router: 10.16.1.160
LS Seq Number: 0x80000002
Checksum: 0x19c2
--More--

```

Table 37-7. Command Example Descriptions: show ip ospf process-id database opaque-area

Item	Description
LS Age	Displays the LSA's age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> • TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. • DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. • E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the advertising router's ID.
Checksum	Displays the Fletcher checksum of the an LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Opaque Type	Displays the Opaque type field (the first 8 bits of the Link State ID).
Opaque ID	Displays the Opaque type-specific ID (the remaining 24 bits of the Link State ID).

**Related
Commands**

[show ip ospf database](#)

Displays OSPF database information.

show ip ospf database opaque-as

C **E** **S**

Display the opaque-as (type 11) LSA information.

Syntax

show ip ospf process-id database opaque-as [link-state-id] [adv-router ip-address]

Parameters	<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
	<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
	adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router ip-address to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced support of Multi-Process OSPF.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Related Commands	show ip ospf database	Displays OSPF database information.
-------------------------	---------------------------------------	-------------------------------------

show ip ospf database opaque-link

C **E** **S**

Display the opaque-link (type 9) LSA information.

Syntax **show ip ospf** *process-id* **database opaque-link** [*link-state-id*] [**adv-router** *ip-address*]

Parameters	<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
	<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
	adv-router <i>ip-address</i>	(OPTIONAL) Enter the keyword adv-router followed by the IP address of an Advertising Router to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810

Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

show ip ospf database	Displays OSPF database information.
---------------------------------------	-------------------------------------

show ip ospf database router

C **E** **S**

Display the router (type 1) LSA information.

Syntax

show ip ospf *process-id* **database router** [*link-state-id*] [**adv-router** *ip-address*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 100 database router

      OSPF Router with ID (1.1.1.10) (Process ID 100)

          Router (Area 0)

LS age: 967
Options: (No TOS-capability, No DC, E)
LS type: Router
Link State ID: 1.1.1.10
Advertising Router: 1.1.1.10
LS Seq Number: 0x8000012f
Checksum: 0x3357
Length: 144
AS Boundary Router
```

```

Area Border Router
Number of Links: 10

Link connected to: a Transit Network
(Link ID) Designated Router address: 192.68.129.1
(Link Data) Router Interface address: 192.68.129.1
Number of TOS metric: 0
TOS 0 Metric: 1

Link connected to: a Transit Network
(Link ID) Designated Router address: 192.68.130.1
(Link Data) Router Interface address: 192.68.130.1
Number of TOS metric: 0
TOS 0 Metric: 1

Link connected to: a Transit Network
(Link ID) Designated Router address: 192.68.142.2
(Link Data) Router Interface address: 192.68.142.2
Number of TOS metric: 0
TOS 0 Metric: 1

Link connected to: a Transit Network
(Link ID) Designated Router address: 192.68.141.2
(Link Data) Router Interface address: 192.68.141.2
Number of TOS metric: 0
TOS 0 Metric: 1

Link connected to: a Transit Network
(Link ID) Designated Router address: 192.68.140.2
(Link Data) Router Interface address: 192.68.140.2
Number of TOS metric: 0
TOS 0 Metric: 1

Link connected to: a Stub Network
(Link ID) Network/subnet number: 11.1.5.0
--More--

```

Table 37-8. Command Example Descriptions: show ip ospf process-id database router

Item	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> • TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. • DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. • E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the router ID of the LSA's originating router.
LS Seq Number	Displays the link state sequence number. This number detects duplicate or old LSAs.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Length	Displays the length in bytes of the LSA.

Table 37-8. Command Example Descriptions: show ip ospf process-id database router

Item	Description
Number of Links	Displays the number of active links to the type of router (Area Border Router or AS Boundary Router) listed in the previous line.
Link connected to:	Identifies the type of network to which the router is connected.
(Link ID)	Identifies the link type and address.
(Link Data)	Identifies the router interface address.
Number of TOS Metric	Lists the number of TOS metrics.
TOS 0 Metric	Lists the number of TOS 0 metrics.

Related Commands

show ip ospf database	Displays OSPF database information.
---------------------------------------	-------------------------------------

show ip ospf database summary

C **E** **S**

Display the network summary (type 3) LSA routing information.

Syntax**show ip ospf process-id database summary** [*link-state-id*] [**adv-router** *ip-address*]**Parameters**

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> the network's IP address for Type 3 LSAs or Type 5 LSAs the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs the default destination (0.0.0.0) for Type 5 LSAs
adv-router <i>ip-address</i>	(OPTIONAL) Enter the keywords adv-router <i>ip-address</i> to display only the LSA information about that router.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 100 database summary
OSPF Router with ID (1.1.1.10) (Process ID 100)
```

Summary Network (Area 0.0.0.0)

LS age: 1551
 Options: (No TOS-capability, DC, E)
 LS type: Summary Network
 Link State ID: 192.68.16.0
 Advertising Router: 192.168.17.1
 LS Seq Number: 0x80000054
 Checksum: 0xb5a2
 Length: 28
 Network Mask: /24
 TOS: 0 Metric: 1

LS age: 9
 Options: (No TOS-capability, No DC, E)
 LS type: Summary Network
 Link State ID: 192.68.32.0
 Advertising Router: 1.1.1.10
 LS Seq Number: 0x80000016
 Checksum: 0x987c
 Length: 28
 Network Mask: /24
 TOS: 0 Metric: 1

LS age: 7
 Options: (No TOS-capability, No DC, E)
 LS type: Summary Network
 Link State ID: 192.68.33.0
 Advertising Router: 1.1.1.10
 LS Seq Number: 0x80000016
 Checksum: 0x1241
 Length: 28
 Network Mask: /26
 TOS: 0 Metric: 1

FTOS#

Table 37-9. Command Example Descriptions: show ip ospf process-id database summary

Items	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none"> • TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. • DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. • E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the router ID of the LSA's originating router.
LS Seq Number	Identifies the link state sequence number. This number enables you to identify old or duplicate LSAs.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Length	Displays the length in bytes of the LSA.

Table 37-9. Command Example Descriptions: show ip ospf process-id database summary

Items	Description
Network Mask	Displays the network mask implemented on the area.
TOS	Displays the TOS options. Option 0 is the only option.
Metric	Displays the LSA metrics.

Related Commands

show ip ospf database	Displays OSPF database information.
---------------------------------------	-------------------------------------

show ip ospf interface

C **E** **S**

Display the OSPF interfaces configured. If OSPF is not enabled on the switch, no output is generated.

Syntax

show ip ospf process-id interface [*interface*]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For the null interface, enter the keyword null followed by zero (0). For loopback interfaces, enter the keyword loopback followed by a number from 0 to 16383. For Port Channel groups, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1-32 for EtherScale, 1-255 for TeraScale For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by the VLAN ID. The range is from 1 to 4094. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced <i>process-id</i> option, in support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```

FTOS>show ip ospf int

GigabitEthernet 13/17 is up, line protocol is up
  Internet Address 192.168.1.2/30, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 192.168.253.2, Interface address 192.168.1.2
  Backup Designated Router (ID) 192.168.253.1, Interface address 192.168.1.1
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:02
  Neighbor Count is 1, Adjacent neighbor count is 1
  Adjacent with neighbor 192.168.253.1 (Backup Designated Router)

GigabitEthernet 13/23 is up, line protocol is up
  Internet Address 192.168.0.1/24, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DROTHER, Priority 1
  Designated Router (ID) 192.168.253.5, Interface address 192.168.0.4
  Backup Designated Router (ID) 192.168.253.3, Interface address 192.168.0.2
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:08
  Neighbor Count is 3, Adjacent neighbor count is 2
  Adjacent with neighbor 192.168.253.5 (Designated Router)
  Adjacent with neighbor 192.168.253.3 (Backup Designated Router)

Loopback 0 is up, line protocol is up
  Internet Address 192.168.253.2/32, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type LOOPBACK, Cost: 1
  Loopback interface is treated as a stub Host.
FTOS>

```

Table 37-10. Command Example Descriptions: show ip ospf process-id interface

Line beginning with	Description
GigabitEthernet...	This line identifies the interface type slot/port and the status of the OSPF protocol on that interface.
Internet Address...	This line displays the IP address, network mask and area assigned to this interface.
Process ID...	This line displays the OSPF Process ID, Router ID, Network type and cost metric for this interface.
Transmit Delay...	This line displays the interface's settings for Transmit Delay, State, and Priority. In the State setting, BDR is Backup Designated Router.
Designated Router...	This line displays the ID of the Designated Router and its interface address.
Backup Designated...	This line displays the ID of the Backup Designated Router and its interface address.
Timer intervals...	This line displays the interface's timer settings for Hello interval, Dead interval, Transmit Delay (Wait), and Retransmit Interval.

Table 37-10. Command Example Descriptions: show ip ospf *process-id* interface (continued)

Line beginning with	Description
Hello due...	This line displays the amount time till the next Hello packet is sent out this interface.
Neighbor Count...	This line displays the number of neighbors and adjacent neighbors. Listed below this line are the details about each adjacent neighbor.

show ip ospf neighbor

C **E** **S**

Display the OSPF neighbors connected to the local router.

Syntax

show ip ospf *process-id* neighbor

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 34 neighbor
```

```
Neighbor ID    Pri    State           Dead Time Address           Interface Area
20.20.20.7    1     FULL/DR         00:00:32 182.10.10.3      Gi 0/0    0.0.0.2
192.10.10.2   1     FULL/DR         00:00:37 192.10.10.2     Gi 0/1    0.0.0.1
20.20.20.1    1     FULL/DROTHER    00:00:36 192.10.10.4     Gi 0/1    0.0.0.1
FTOS#
```

Table 37-11. Command Example Descriptions: show ip ospf *process-id* neighbor

Row Heading	Description
Neighbor ID	Displays the neighbor router ID.
Pri	Displays the priority assigned neighbor.
State	Displays the OSPF state of the neighbor.
Dead Time	Displays the expected time until FTOS declares the neighbor dead.
Address	Displays the IP address of the neighbor.
Interface	Displays the interface type slot/port information.
Area	Displays the neighbor's area (process ID).

show ip ospf routes

C **E** **S**

Display routes as calculated by OSPF and stored in OSPF RIB.

Syntax

show ip ospf *process-id* routes

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

This command is useful in isolating routing problems between OSPF and RTM. For example, if a route is missing from the RTM/FIB but is visible from the display output of this command, then likely the problem is with downloading the route to the RTM.

This command has the following limitations:

- The display output is sorted by prefixes; intra-area ECMP routes are not displayed together.
- For Type 2 external routes, type1 cost is not displayed.

Example

```
FTOS#show ip ospf 100 route
```

```
Prefix          Cost    Nexthop      Interface    Area        Type
1.1.1.1         1       0.0.0.0      Lo 0         0           Intra-Area
3.3.3.3         2       13.0.0.3     Gi 0/47      1           Intra-Area
13.0.0.0        1       0.0.0.0      Gi 0/47      0           Intra-Area
150.150.150.0   2       13.0.0.3     Gi 0/47      -           External
172.30.1.0      2       13.0.0.3     Gi 0/47      1           Intra-Area
FTOS#
```

show ip ospf statistics

C **E** **S**

Display OSPF statistics.

Syntax

show ip ospf *process-id* statistics global | [*interface name* {*neighbor router-id*}]

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
global	Enter the keyword global to display the packet counts received on all running OSPF interfaces and packet counts received and transmitted by all OSPF neighbors.
interface <i>name</i>	(OPTIONAL) Enter the keyword interface followed by one of the following interface keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel groups, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1-32 for EtherScale, 1-255 for TeraScale For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
neighbor <i>router-id</i>	(OPTIONAL) Enter the keyword neighbor followed by the neighbor's router-id in dotted decimal format (A.B.C.D.).

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS#show ip ospf 1 statistics global
```

```

OSPF Packet Count
  Total   Error   Hello   DDiscr   LSReq   LSupd   LSack
RX    10      0       8        2        0       0       0
TX    10      0      10        0        0       0       0

```

```

OSPF Global Queue Length
           TxQ-Len   RxQ-Len   Tx-Mark   Rx-Mark
Hello-Q           0         0         0         2
LSR-Q             0         0         0         0
Other-Q          0         0         0         0

```

```
Error packets (Only for RX)
```

```

Intf-Down          0   Non-Dr          0   Self-Org          0
Wrong-Len          0   InvlD-Nbr        0   Nbr-State         0
Auth-Err           0   MD5-Err          0   Chksum            0
Version            0   AreaMis          0   Conf-Issues       0
No-Buffer          0   Seq-No           0   Socket            0
Q-Overflow         0   Unkown-Pkt       0

```

Error packets (Only for TX)

```

Socket Errors      0
FTOS#

```

Table 37-12. Command Example Descriptions: show ip ospf statistics process-id global

Row Heading	Description
Total	Displays the total number of packets received/transmitted by the OSPF process
Error	Displays the error count while receiving and transmitting packets by the OSPF process
Hello	Number of OSPF Hello packets
DDiscr	Number of database description packets
LSReq	Number of link state request packets
LSUpd	Number of link state update packets
LSAck	Number of link state acknowledgement packets
TxQ-Len	The transmission queue length
RxQ-Len	The reception queue length
Tx-Mark	The highest number mark in the transmission queue
Rx-Mark	The highest number mark in the reception queue
Hello-Q	The queue, for transmission or reception, for the hello packets
LSR-Q	The queue, for transmission or reception, for the link state request packets.
Other-Q	The queue, for transmission or reception, for the link state acknowledgement, database description, and update packets.

Table 37-13. Error Definitions: show ip ospf statistics process-id global

Error Type	Description
Intf_Down	Received packets on an interface that is either down or OSPF is not enabled.
Non-Dr	Received packets with a destination address of ALL_DRS even though SELF is not a designated router
Self-Org	Receive the self originated packet
Wrong_Len	The received packet length is different to what was indicated in the OSPF header
InvlD-Nbr	LSA, LSR, LSU, and DDB are received from a peer which is not a neighbor peer
Nbr-State	LSA, LSR, and LSU are received from a neighbor with stats less than the loading state
Auth-Error	Simple authentication error

Table 37-13. Error Definitions: show ip ospf statistics process-id global

Error Type	Description
MD5-Error	MD5 error
Cksum-Err	Checksum Error
Version	Version mismatch
AreaMismatch	Area mismatch
Conf-Issue	The received hello packet has a different hello or dead interval than the configuration
No-Buffer	Buffer allocation failure
Seq-no	A sequence no errors occurred during the database exchange process
Socket	Socket Read/Write operation error
Q-overflow	Packet(s) dropped due to queue overflow
Unknown-Pkt	Received packet is not an OSPF packet

The **show ip ospf process-id statistics** command displays the error packet count received on each interface as:

- The hello-timer remaining value for each interface
- The wait-timer remaining value for each interface
- The grace-timer remaining value for each interface
- The packet count received and transmitted for each neighbor
- Dead timer remaining value for each neighbor
- Transmit timer remaining value for each neighbor
- The LSU Q length and its highest mark for each neighbor
- The LSR Q length and its highest mark for each neighbor

Example

```

FTOS#show ip ospf 100 statistics

Interface GigabitEthernet 0/8

    Hello-Timer 9, Wait-Timer 0, Grace-Timer 0
    Error packets (Only for RX)

Intf-Down      0   Non-Dr          0   Self-Org       0
Wrong-Len      0   InvlD-Nbr      0   Nbr-State     0
Auth-Error     0   MD5-Error      0   Cksum-Err     0
Version        0   AreaMisMatch  0   Conf-Issue    0
SeqNo-Err      0   Unkown-Pkt     0

Neighbor ID 9.1.1.2

      Hello      DDiscr      LSReq      LSUpd      LSAck
RX         59         3          1          1          1
TX         62         2          1          0          0

    Dead-Timer      37, Transmit-Timer      0
    LSU-Q-Len       0, LSU-Q-Wmark       0
    LSR-Q-Len       0, LSR-Q-Wmark       1

```

**Related
Commands**

[clear ip ospf statistics](#)

Clear the packet statistics in all interfaces and neighbors

show ip ospf timers rate-limit

S4810

Show the LSA currently in the queue waiting for timers to expire.

S4820T

Syntax

show ip ospf *process-id* timers rate-limit

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0 Introduced on S4820T

Version 8.3.8.0 Introduced on S4810

Example

```
FTOS#show ip ospf 10 timers rate-limit
```

```
List of LSAs in rate limit Queue
```

```
LSA id: 1.1.1.0 Type: 3 Adv Rtid: 3.3.3.3 Expiry time: 00:00:09.111
```

```
LSA id: 3.3.3.3 Type: 1 Adv Rtid: 3.3.3.3 Expiry time: 00:00:23.96
```

```
FTOS#
```

show ip ospf topology

C E S

Display routers in directly connected areas.

Syntax

show ip ospf *process-id* topology

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series and E-Series

Usage Information

This command can be used to isolate problems with inter-area and external routes. In OSPF inter-area and external routes are calculated by adding LSA cost to the cost of reaching the router. If an inter-area or external route is not of correct cost, the display can determine if the path to the originating router is correct or not.

Example

```
FTOS#show ip ospf 1 topology
```

Router ID	Flags	Cost	Nexthop	Interface	Area
3.3.3.3	E/B/-/	1	20.0.0.3	Gi 13/1	0
1.1.1.1	E/-/-/	1	10.0.0.1	Gi 7/1	1

```
FTOS#
```

show ip ospf virtual-links

C **E** **S**

Display the OSPF virtual links configured and is useful for debugging OSPF routing operations. If no OSPF virtual-links are enabled on the switch, no output is generated.

Syntax

show ip ospf *process-id* virtual-links

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
-------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Example

```
FTOS#show ip ospf 1 virt
```

```
Virtual Link to router 192.168.253.5 is up
Run as demand circuit
Transit area 0.0.0.1, via interface GigabitEthernet 13/16, Cost of using 2
Transmit Delay is 1 sec, State POINT_TO_POINT,
Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
Hello due in 00:00:02
FTOS#
```

Table 37-14. Command Example Descriptions: show ip ospf process-id virtual-links

Items	Description
“Virtual Link...”	This line specifies the OSPF neighbor to which the virtual link was created and the link’s status.
“Run as...”	This line states the nature of the virtual link.
“Transit area...”	This line identifies the area through which the virtual link was created, the interface used, and the cost assigned to that link.
“Transmit Delay...”	This line displays the transmit delay assigned to the link and the State of the OSPF neighbor.
“Timer intervals...”	This line displays the timer values assigned to the virtual link. The timers are Hello is hello-interval, Dead is dead-interval, Wait is transmit-delay, and Retransmit is retransmit-interval.
“Hello due...”	This line displays the amount of time until the next Hello packet is expected from the neighbor router.
“Adjacency State...”	This line displays the adjacency state between neighbors.

summary-address

C **E** **S**

Set the OSPF ASBR to advertise one external route.

Syntax

summary-address *ip-address mask* [**not-advertise**] [**tag tag-value**]

To disable summary address, use the **no summary-address** *ip-address mask* command.

Parameters

<i>ip-address</i>	Specify the IP address in dotted decimal format of the address to be summarized.
<i>mask</i>	Specify the mask in dotted decimal format of the address to be summarized.
not-advertise	(OPTIONAL) Enter the keyword not-advertise to suppress that match the network prefix/mask pair.
tag tag-value	(OPTIONAL) Enter the keyword tag followed by a value to match on routes redistributed through a route map. Range: 0 to 4294967295

Defaults

Not configured.

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

The command [area range](#) summarizes routes for the different areas.

With "not-advertise" parameter configured, this command can be used to filter out some external routes. For example, you want to redistribute static routes to OSPF, but you don't want OSPF to advertise routes with prefix 1.1.0.0. Then you can configure `summary-address 1.1.0.0 255.255.0.0 not-advertise` to filter out all the routes fall in range 1.1.0.0/16.

Related Commands

area range	Summarizes routes within an area.
----------------------------	-----------------------------------

timers spf

C **E** **S**

Set the time interval between when the switch receives a topology change and starts a shortest path first (SPF) calculation.

Syntax

timers spf *delay holdtime*

To return to the default, enter **no timers spf**.

Parameters

<i>delay</i>	Enter a number as the delay. Range: 0 to 4294967295. Default: 5 seconds
--------------	---

<i>holdtime</i>	Enter a number as the hold time. Range: 0 to 4294967295. Default: 10 seconds.
-----------------	---

Defaults

delay = 5 seconds; *holdtime* = 10 seconds

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced support of Multi-Process OSPF.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Setting the *delay* and *holdtime* parameters to a low number enables the switch to switch to an alternate path quickly but requires more CPU usage.

timers throttle lsa all

S4810

Configure LSA transmit intervals.

S4820T

Syntax

timers throttle lsa all {start-interval | hold-interval | max-interval}

To return to the default, enter **no timers throttle lsa**.

Parameters

start-interval	Set the minimum interval between initial sending and resending the same LSA. Range: 0-600,000 milliseconds
hold-interval	Set the next interval to send the same LSA. This is the time between sending the same LSA after the start-interval has been attempted. Range: 1-600,000 milliseconds
max-interval	Set the maximum amount of time the system waits before sending the LSA. Range: 1-600,000 milliseconds

Defaults

start-interval : 0 msec
hold-interval : 5000 msec
max-interval: 5000 msec

Command Modes

ROUTER OSPF

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Usage Information

LSAs are sent after the start-interval and then after hold-interval until the maximum interval is reached. In throttling, exponential backoff is used when sending same LSA, so that the interval is multiplied until the maximum time is reached. For example, if the **start-interval** 5000 and **hold-interval** 1000 and **max-interval** 100,000, the LSA is sent at 5000 msec, then 1000 msec, then 2000 msec, then 4000 until 100,000 msec is reached.

timers throttle lsa arrival

S4810

Configure the LSA acceptance intervals.

S4820T

Syntax

timers throttle lsa arrival arrival-time

To return to the default, enter **no timers throttle lsa**.

Parameters	<i>arrival-time</i>	Set the interval between receiving the same LSA repeatedly, to allow sufficient time for the system to accept the LSA. Range: 0-600,000 milliseconds
Defaults	1000 msec	
Command Modes	ROUTER OSPF	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.8.0	Introduced on S4810

PIM-Sparse Mode (PIM-SM)

Overview

The PIM commands are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

This chapter contains the following sections:

- [IPv4 PIM-Sparse Mode Commands](#)
- [IPv6 PIM-Sparse Mode Commands](#)

IPv4 PIM-Sparse Mode Commands

The IPv4 PIM-Sparse Mode (PIM-SM) commands are:

- `clear ip pim rp-mapping`
- `clear ip pim tib`
- `clear ip pim snooping tib`
- `debug ip pim`
- `ip pim bsr-border`
- `ip pim bsr-candidate`
- `ip pim dr-priority`
- `ip pim graceful-restart`
- `ip pim join-filter`
- `ip pim ingress-interface-map`
- `ip pim neighbor-filter`
- `ip pim query-interval`
- `ip pim register-filter`
- `ip pim rp-address`
- `ip pim rp-candidate`
- `ip pim snooping`
- `ip pim sparse-mode`
- `ip pim sparse-mode sg-expiry-timer`

- [ip pim spt-threshold](#)
- [no ip pim snooping dr-flood](#)
- [show ip pim bsr-router](#)
- [show ip pim interface](#)
- [show ip pim neighbor](#)
- [show ip pim rp](#)
- [show ip pim snooping interface](#)
- [show ip pim snooping neighbor](#)
- [show ip pim snooping tib](#)
- [show ip pim summary](#)
- [show ip pim tib](#)
- [show running-config pim](#)

clear ip pim rp-mapping

C **E** **S**

S4810

S4820T

Used by the bootstrap router (BSR) to remove all or particular Rendezvous Point (RP) Advertisement.

Syntax

clear ip pim rp-mapping *rp-address*

Parameters

rp-address (OPTIONAL) Enter the RP address in dotted decimal format (A.B.C.D)

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

clear ip pim tib

C **E** **S**

S4810

S4820T

Clear PIM tree information from the PIM database.

Syntax

clear ip pim tib [*group*]

Parameters

group (OPTIONAL) Enter the multicast group address in dotted decimal format (A.B.C.D)

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

clear ip pim snooping tib

C **E** **S**

Clear tree information discovered by PIM-SM snooping from the PIM database.

S4810**S4820T****Syntax**clear ip pim snooping tib [*vlan vlan-id*] [*group-address*]**Parameters**

<i>vlan vlan-id</i>	(OPTIONAL) Enter a VLAN ID to clear TIB information learned through PIM-SM snooping about a specified VLAN. Valid VLAN IDs: 1 to 4094.
<i>group-address</i>	(OPTIONAL) Enter a multicast group address in dotted decimal format (A.B.C.D) to clear TIB information learned through PIM-SM snooping about a specified multicast group.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.1	Introduced on E-Series ExaScale
Version 8.3.7.0	Introduced on S4810

Related Commands

show ip pim snooping tib	Display TIB information learned through PIM-SM snooping.
--	--

debug ip pim

C **E** **S**

View IP PIM debugging messages.

S4810**S4820T****Syntax**debug ip pim [*bsr* | *events* | *group* | *packet* [*in* | *out*] | *register* | *state* | *timer* [*assert* | *hello* | *joinprune* | *register*]]

To disable PIM debugging, enter no debug ip pim, or enter undebug all to disable all debugging.

Parameters

<i>bsr</i>	(OPTIONAL) Enter the keyword bsr to view PIM Candidate RP/BSR activities.
<i>events</i>	(OPTIONAL) Enter the keyword events to view PIM events.

group	(OPTIONAL) Enter the keyword group to view PIM messages for a specific group.
packet [in out]	(OPTIONAL) Enter the keyword packet to view PIM packets. Enter one of the optional parameters <ul style="list-style-type: none"> in: to view incoming packets out: to view outgoing packets.
register	(OPTIONAL) Enter the keyword register to view PIM register address in dotted decimal format (A.B.C.D).
state	(OPTIONAL) Enter the keyword state to view PIM state changes.
timer [assert hello joinprune register]	(OPTIONAL) Enter the keyword timer to view PIM timers. Enter one of the optional parameters: <ul style="list-style-type: none"> assert: to view the assertion timer. hello: to view the PIM neighbor keepalive timer. joinprune: to view the expiry timer (join/prune timer) register: to view the register suppression timer.

Defaults Disabled

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

ip pim bsr-border

C **E** **S**

S4810

S4820T

Define the border of PIM domain by filtering inbound and outbound PIM-BSR messages per interface.

Syntax ip pim bsr-border

To return to the default value, enter no ip pim bsr-border.

Defaults Disabled

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series on port-channels and S-Series.

Usage Information

This command is applied to the subsequent PIM-BSR. Existing BSR advertisements are cleaned up by time out. Candidate RP advertisements can be cleaned using the [clear ip pim rp-mapping](#) command.

ip pim bsr-candidate



Configure the PIM router to join the Bootstrap election process.

Syntax

`ip pim bsr-candidate interface [hash-mask-length] [priority]`

To return to the default value, enter no ip pim bsr-candidate.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
<i>hash-mask-length</i>	(OPTIONAL) Enter the hash mask length. Range: zero (0) to 32 Default: 30
<i>priority</i>	(OPTIONAL) Enter the priority used in Bootstrap election process. Range: zero (0) to 255 Default: zero (0)

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 6.1.1.0	Added support for VLAN interface

ip pim dr-priority

C E S

S4810

S4820T

Change the Designated Router (DR) priority for the interface.

Syntax

ip pim dr-priority *priority-value*

To remove the DR priority value assigned, use the no ip pim dr-priority command.

Parameters

<i>priority-value</i>	Enter a number. Preference is given to larger/higher number. Range: 0 to 4294967294 Default: 1
-----------------------	--

Defaults

1

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series on port-channels and S-Series

Usage Information

The router with the largest value assigned to an interface becomes the Designated Router. If two interfaces contain the same DR priority value, the interface with the largest interface IP address becomes the Designated Router.

ip pim graceful-restart

E S4810

S4820T

This feature permits configuration of Non-stop Forwarding (NSF or graceful restart) capability of a PIM router to its neighbors.

Syntax

[ipv6] ip pim graceful-restart { helper-only | nsf [restart-time | stale-entry-time] }

Parameters

ipv6	Enter this keyword to enable graceful-restart for IPv6 Multicast Routes.
helper-only	Enter the keyword helper-only to configure as a receiver (helper) only by preserving the PIM status of a graceful restart PIM neighboring router.
nsf	Enter the keyword nsf to configure the Non-stop Forwarding capability.
restart-time	(OPTIONAL) Enter the keyword restart-time followed by the number of seconds estimated for the PIM speaker to restart. Range: 30 to 300 seconds Default: 180 seconds
stale-entry-time	(OPTIONAL) Enter the keyword stale-entry-time followed by the number of seconds for which entries are kept alive after restart. Range: 30 to 300 seconds Default: 60 seconds

Defaults as above

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.2.1.0	Introduced on E-Series ExaScale. Added the ipv6 option for E-Series.
Version 7.6.1.0	Introduced on E-Series

Usage Information

When an NSF-capable router comes up, it announces the graceful restart capability and restart duration as a Hello option. The receiving router notes the Hello option. Routers not NSF capable will discard the unknown Hello option and adjacency is not affected.

When an NSF-capable router goes down, neighboring PIM speaker preserves the states and continues the forwarding of multicast traffic while the neighbor router restarts.

ip pim join-filter

C E S

S4810

S4820T

Permit or deny PIM Join/Prune messages on an interface using an extended IP access list. This command prevents the PIM SM router from creating state based on multicast source and/or group.

Syntax

ip pim join-filter *ext-access-list* {in | out}

Remove the access list using the command no ip pim join-filter *ext-access-list* {in | out}

Parameters

<i>ext-access-list</i>	Enter the name of an extended access list.
in	Enter this keyword to apply the access list to inbound traffic.
out	Enter this keyword to apply the access list to outbound traffic.

Defaults None

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series on port-channels and S-Series
Version 7.7.1.0	Introduced on E-Series.

Example

```
FTOS(conf)# ip access-list extended iptv-channels
FTOS(config-ext-nacl)# permit ip 10.1.2.3/24 225.1.1.0/24
FTOS(config-ext-nacl)# permit ip any 232.1.1.0/24
FTOS(config-ext-nacl)# permit ip 100.1.1.0/16 any
```

```
FTOS(config-if-gi-1/1)# ip pim join-filter iptv-channels in
FTOS(config-if-gi-1/1)# ip pim join-filter iptv-channels out
```

Related Commands

ip access-list extended	Configure an access list based on IP addresses or protocols.
---	--

ip pim ingress-interface-map

C E S

S4810

S4820T

When the Dell Force10 system is the RP, statically map potential incoming interfaces to (*,G) entries to create a lossless multicast forwarding environment.

Syntax

ip pim ingress-interface-map *std-access-list*

Parameters

<i>std-access-list</i>	Enter the name of an standard access list that permits the
------------------------	--

Defaults

None

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on the S4810.
------------------	--------------------------

Version 8.4.1.0	Introduced
-----------------	------------

Example

```
FTOS(conf)# ip access-list standard map1
FTOS(config-std-nacl)# permit 224.0.0.1/24
FTOS(config-std-nacl)#exit
FTOS(conf)#int gig 1/1
FTOS(config-if-gi-1/1)# ip pim ingress-interface-map map1
```

ip pim neighbor-filter

C E S

S4810

S4820T

Configure this feature to prevent a router from participating in protocol independent Multicast (PIM).

Syntax

ip pim neighbor-filter { *access-list* }

To remove the restriction, use the no ip pim neighbor-filter { *access-list* } command.

Parameters

<i>access-list</i>	Enter the name of a standard access list. Maximum 16 characters.
--------------------	--

Defaults

Defaults.

Command Modes

CONFIGURATION.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series and S-Series
Version 7.6.1.0	Introduced on the E-Series

Usage Information

Do not enter this command before creating the access-list.

ip pim query-interval

C **E** **S**

S4810

S4820T

Change the frequency of PIM Router-Query messages.

Syntax

ip pim query-interval *seconds*

To return to the default value, enter no ip pim query-interval *seconds* command.

Parameters

<i>seconds</i>	Enter a number as the number of seconds between router query messages. Default: 30 seconds Range: 0 to 65535
----------------	--

Defaults

30 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series on port-channels and S-Series

ip pim register-filter

C **E** **S**

S4810

S4820T

Use this feature to prevent a PIM source DR from sending register packets to an RP for the specified multicast source and group.

Syntax

ip pim register-filter *access-list*

To return to the default, use the no ip pim register-filter *access-list* command.

Parameters

<i>access-list</i>	Enter the name of an extended access list. Maximum 16 characters.
--------------------	---

Defaults	Not configured
Command Modes	CONFIGURATION
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 7.8.1.0 Introduced on C-Series and S-Series
	Version 7.6.1.0 Introduced
Usage Information	The access name is an extended IP access list that denies PIM register packets to RP at the source DR based on the multicast and group addresses. Do not enter this command before creating the access-list.

ip pim rp-address

C E S

S4810

S4820T

Configure a static PIM Rendezvous Point (RP) address for a group or access-list.

Syntax

ip pim rp-address *address* { *group-address group-address mask* } *override*

To remove an RP address, use the no ip pim rp-address *address* { *group-address group-address mask* } *override* command.

Parameters

<i>address</i>	Enter the RP address in dotted decimal format (A.B.C.D).
<i>group-address group-address mask</i>	Enter the keyword <i>group-address</i> followed by a <i>group-address mask</i> , in dotted decimal format (/xx), to assign that group address to the RP.
<i>override</i>	Enter the keyword <i>override</i> to override the BSR updates with static RP. The <i>override</i> will take effect immediately during enable/disable. Note: This option is applicable to multicast group range.

Defaults Not configured

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

This address is used by first-hop routers to send Register packets on behalf of source multicast hosts. The RP addresses are stored in the order in which they are entered. RP addresses learned via BSR take priority over static RP addresses. Without the override option, RPs advertised by the BSR updates take precedence over the statically configured RPs.

ip pim rp-candidate

C E S

S4810

S4820T

Configure a PIM router to send out a Candidate-RP-Advertisement message to the Bootstrap (BS) router or define group prefixes that are defined with the RP address to PIM BSR.

Syntax

ip pim rp-candidate { *interface* [*priority*]

To return to the default value, enter no ip pim rp-candidate { *interface* [*priority*] command.

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
<i>priority</i>	<p>(OPTIONAL) Enter the priority used in Bootstrap election process. Range: zero (0) to 255 Default: 192</p>

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Priority is stored at BSR router when receiving a Candidate-RP-Advertisement.

ip pim snooping

E X S4810

S4820T

Enable PIM-SM snooping globally on a switch or on a VLAN interface.

Syntax

ip pim snooping [enable]

To disable PIM-SM snooping enter the no form of the command.

Defaults

Disabled.

Command Modes

CONFIGURATION: To configure PIM-SM snooping globally, enter the ip pim snooping enable command in global configuration mode.

VLAN INTERFACE: To configure PIM-SM snooping on a VLAN interface, enter the ip pim snooping command in VLAN interface configuration mode.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.1	Introduced on E-Series ExaScale

Usage Information

Because PIM-SM snooping is used in a Layer 2 environment, PIM-SM snooping and PIM multicast routing are mutually exclusive. PIM-SM snooping cannot be enabled on a switch/router if PIM-SM or PIM-DM is enabled.

If enabled at the global level, PIM-SM snooping is automatically enabled on all VLANs unless the **no ip pim snooping** command has been entered on a VLAN.

If enabled at the VLAN level, PIM-SM snooping requires that you also enter the **no shutdown** command to enable the interface.

PIM-SM snooping is supported with IGMP snooping, and forwards the IGMP report on the port that connects to the PIM DR. It is recommended that you do not enable IGMP snooping on a PIM-SM snooping-enabled VLAN interface unless until it is necessary for VLAN operation.

PIM-SM snooping listens to PIM hello and PIM-SM join and prune messages while maintaining the VLAN- and port-specific information in multicast packets that are snooped.

To display information about the operation of PIM-SM snooping on a switch, enter the show ip pim summary command.

Related Commands

show ip pim snooping tib	Display TIB information learned through PIM-SM snooping.
--	--

ip pim sparse-mode

C E S

Enable PIM sparse mode and IGMP on the interface.

S4810

S4820T

Syntax ip pim sparse-mode

To disable PIM sparse mode and IGMP, enter no ip pim sparse-mode.

Defaults Disabled.

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on C-Series on port-channels and S-Series

Usage Information

C-Series supports a maximum of 31 PIM interfaces.

The interface must be enabled (no shutdown command) and not have the switchport command configured. Multicast must also be enabled globally (using the [ip multicast-lag-hashing](#) command). PIM is supported on the port-channel interface.

Related Commands

ip multicast-lag-hashing	Enable multicast globally.
--	----------------------------

ip pim sparse-mode sg-expiry-timer

C E S

Enable expiry timers globally for all sources, or for a specific set of (S,G) pairs defined by an access list.

S4810

S4820T

Syntax ip pim sparse-mode sg-expiry-timer *seconds* [access-list name]

To disable configured timers and return to default mode, enter no ip pim sparse-mode sg-expiry-timer.

Parameters

<i>seconds</i>	Enter the number of seconds the S, G entries will be retained. Range 211-86400
access-list name	(OPTIONAL) Enter the name of a previously configured Extended ACL to enable the expiry time to specified S,G entries

Defaults Disabled. The default expiry timer (with no times configured) is 210 sec.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced
Version 7.7.1.1	Introduced

Usage Information

This command configures an expiration timer for all S.G entries, unless they are assigned to an Extended ACL.

ip pim spt-threshold

C **E** **S4810**
S4820T

Configure PIM router to switch to shortest path tree when the traffic reaches the specified threshold value.

Syntax

ip pim spt-threshold *value* | infinity

To return to the default value, enter no ip pim spt-threshold.

Parameters

<i>value</i>	(OPTIONAL) Enter the traffic value in kilobits per second. Default: 10 packets per second. A value of zero (0) will cause a switchover on the first packet.
infinity	(OPTIONAL) To never switch to the source-tree, enter the keyword infinity.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale

Usage Information

This is applicable to last hop routers on the shared tree towards the Rendezvous Point (RP).

no ip pim snooping dr-flood

E **X** **S4810**
S4820T

Disable the flooding of multicast packets to the PIM designated router.

Syntax

no ip pim snooping dr-flood

To re-enable the flooding of multicast packets to the PIM designated router, enter the ip pim snooping dr-flood command.

Defaults	Enabled.						
Command Modes	CONFIGURATION						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on the S4810.</td> </tr> <tr> <td>Version 8.4.1.1</td> <td>Introduced on E-Series ExaScale</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on the S4810.	Version 8.4.1.1	Introduced on E-Series ExaScale
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.12.0	Introduced on the S4810.						
Version 8.4.1.1	Introduced on E-Series ExaScale						
Usage Information	<p>By default, when you enable PIM-SM snooping, a switch floods all multicast traffic to the PIM designated router (DR), including unnecessary multicast packets. To minimize the traffic sent over the network to the designated router, you can disable designated-router flooding.</p> <p>When designated-router flooding is disabled, PIM-SM snooping only forwards the multicast traffic, which belongs to a multicast group for which the switch receives a join request, on the port connected towards the designated router.</p> <p>If the PIM DR flood is not disabled (default setting):</p> <ul style="list-style-type: none"> • Multicast traffic is transmitted on the egress port towards the PIM DR if the port is not the incoming interface. • Multicast traffic for an unknown group is sent on the port towards the PIM DR. When DR flooding is disabled, multicast traffic for an unknown group is dropped. 						
Related Commands	<table border="1"> <tr> <td>ip pim snooping</td> <td>Enable PIM-SM snooping.</td> </tr> </table>	ip pim snooping	Enable PIM-SM snooping.				
ip pim snooping	Enable PIM-SM snooping.						

show ip pim bsr-router



View information on the Bootstrap router.

Syntax	show ip pim bsr-router
Command Modes	EXEC EXEC Privilege

Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.1.1.0</td> <td>Introduced on E-Series ExaScale</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced on S-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 8.1.1.0	Introduced on E-Series ExaScale	Version 7.8.1.0	Introduced on S-Series
Version 8.3.19.0	Introduced on S4820T								
Version 8.3.7.0	Introduced on S4810								
Version 8.1.1.0	Introduced on E-Series ExaScale								
Version 7.8.1.0	Introduced on S-Series								

Example

```
E600-7-rpm0#show ip pim bsr-router
PIMv2 Bootstrap information
```

```
This system is the Bootstrap Router (v2)
BSR address: 7.7.7.7 (?)
Uptime: 16:59:06, BSR Priority: 0, Hash mask length: 30
Next bootstrap message in 00:00:08
```

```
This system is a candidate BSR
Candidate BSR address: 7.7.7.7, priority: 0, hash mask length: 30
```

show ip pim interface

C E S

S4810

S4820T

View information on the interfaces with IP PIM enabled.

Syntax

show ip pim interface

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

Example

```
E600-7-RPM0#show ip pim interface
Address Interface Ver/  Nbr  Query  DR  DR
                Mode  Count Intvl  Prio
172.21.200.254 Gi 7/9 v2/S  0    30    1 172.21.200.254
172.60.1.2 Gi 7/11 v2/S  0    30    1 172.60.1.2
192.3.1.1Gi 7/16 v2/S  1    30    1 192.3.1.1
192.4.1.1 Gi 13/5 v2/S  0    30    1 192.4.1.1
172.21.110.1 Gi 13/6 v2/S  0    30    1 172.21.110.1
172.21.203.1 Gi 13/7 v2/S  0    30    1 172.21.203.1
```

Table 38-1. show ip pim interface Command Example Fields

Field	Description
Address	Lists the IP addresses of the interfaces participating in PIM.
Interface	List the interface type, with either slot/port information or ID (VLAN or Port Channel), of the interfaces participating in PIM.
Ver/Mode	Displays the PIM version number and mode for each interface participating in PIM. <ul style="list-style-type: none"> v2 = PIM version 2 S = PIM Sparse mode
Nbr Count	Displays the number of PIM neighbors discovered over this interface.
Query Intvl	Displays the query interval for Router Query messages on that interface (configured with ip pim query-interval command).

Table 38-1. show ip pim interface Command Example Fields

Field	Description
DR Prio	Displays the Designated Router priority value configured on the interface (ip pim dr-priority command).
DR	Displays the IP address of the Designated Router for that interface.

show ip pim neighbor

C E S

View PIM neighbors.

S4810

S4820T

Syntax

show ip pim neighbor

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

Example

```

FTOS#show ip pim neighbor
Neighbor      Interface      Uptime/Expires      Ver  DR
Address                               Prio/Mode
127.87.3.4    Gi 7/16        09:44:58/00:01:24  v2  1 / S
FTOS#
    
```

Table 38-2. show ip pim neighbor Command Example Fields

Field	Description
Neighbor address	Displays the IP address of the PIM neighbor.
Interface	List the interface type, with either slot/port information or ID (VLAN or Port Channel), on which the PIM neighbor was found.
Uptime/expires	Displays the amount of time the neighbor has been up followed by the amount of time until the neighbor is removed from the multicast routing table (that is, until the neighbor hold time expires).
Ver	Displays the PIM version number. <ul style="list-style-type: none"> v2 = PIM version 2
DR prio/Mode	Displays the Designated Router priority and the mode. <ul style="list-style-type: none"> 1 = default Designated Router priority (use ip pim dr-priority) DR = Designated Router S = Sparse mode

show ip pim rp

C E S

S4810

S4820T

View all multicast groups-to-RP mappings.

Syntax

show ip pim rp [mapping | *group-address*]

Parameters

mapping	(OPTIONAL) Enter the keyword mapping to display the multicast groups-to-RP mapping and information on how RP is learnt.
<i>group-address</i>	(OPTIONAL) Enter the multicast group address mask in dotted decimal format to view RP for a specific group.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

Example (show ip pim rp)

```
FTOS#sh ip pim rp
Group          RP
224.2.197.115  165.87.20.4
224.2.217.146  165.87.20.4
224.3.3.3      165.87.20.4
225.1.2.1     165.87.20.4
225.1.2.2     165.87.20.4
229.1.2.1     165.87.20.4
229.1.2.2     165.87.20.4
FTOS#
```

Example (show ip pim rp mapping)

```
FTOS#sh ip pim rp mapping
Group(s): 224.0.0.0/4
  RP: 165.87.20.4, v2
    Info source: 165.87.20.5, via bootstrap, priority 0
    Uptime: 00:03:11, expires: 00:02:46
  RP: 165.87.20.3, v2
    Info source: 165.87.20.5, via bootstrap, priority 0
    Uptime: 00:03:11, expires: 00:03:03
FTOS#
```

Example (show ip pim rp group-address)

```
FTOS#sh ip pim rp 229.1.2.1
Group          RP
229.1.2.1     165.87.20.4
FTOS#
```

show ip pim snooping interface

E X S4810

S4820T

Display information on VLAN interfaces with PIM-SM snooping enabled.

Syntax show ip pim snooping interface [vlan *vlan-id*]

Parameters

<i>vlan vlan-id</i>	(OPTIONAL) Enter a VLAN ID to display information about a specified VLAN configured for PIM-SM snooping. Valid VLAN IDs: 1 to 4094.
---------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.1	Introduced on E-Series ExaScale

Example

```
FTOS#show ip pim snooping interface
Interface  Ver  Nbr    DR          DR
          Count Prio
Vlan 2    v2   3      1          165.87.32.2
```

Table 38-3. show ip pim snooping interface Command Example Fields

Field	Description
Interface	Displays the VLAN interfaces with PIM-SM snooping enabled.
Ver/Mode	Displays the PIM version number for each VLAN interface with PIM-SM snooping enabled: <ul style="list-style-type: none">v2 = PIM version 2S = PIM Sparse mode
Nbr Count	Displays the number of neighbors learned through PIM-SM snooping on the interface.
DR Prio	Displays the Designated Router priority value configured on the interface (ip pim dr-priority command).
DR	Displays the IP address of the Designated Router for that interface.

show ip pim snooping neighbor

   Display information on PIM neighbors learned through PIM-SM snooping.



Syntax show ip pim snooping neighbor [vlan *vlan-id*]

Parameters

<i>vlan vlan-id</i>	(OPTIONAL) Enter a VLAN ID to display information about PIM neighbors that was discovered by PIM-SM snooping on a specified VLAN. Valid VLAN IDs: 1 to 4094.
---------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.1	Introduced on E-Series ExaScale

Example




```
FTOS#show ip pim snooping neighbor
```

Neighbor Address	Interface	Uptime/Expires	Ver	DR Prio
165.87.32.2	Vl 2 [Gi 4/13]	00:04:03/00:01:42	v2	1
165.87.32.10	Vl 2 [Gi 4/11]	00:00:46/00:01:29	v2	0
165.87.32.12	Vl 2 [Gi 4/20]	00:00:51/00:01:24	v2	0

Table 38-4. show ip pim snooping neighbor Command Example Fields

Field	Description
Neighbor address	Displays the IP address of the neighbor learned through PIM-SM snooping.
Interface	Displays the VLAN ID number and slot/port on which the PIM-SM-enabled neighbor was discovered.
Uptime/expires	Displays the amount of time the neighbor has been up followed by the amount of time until the neighbor is removed from the multicast routing table (that is, until the neighbor hold time expires).
Ver	Displays the PIM version number. <ul style="list-style-type: none"> v2 = PIM version 2
DR prio/Mode	Displays the Designated Router priority and the mode. <ul style="list-style-type: none"> 1 = default Designated Router priority (use ip pim dr-priority) DR = Designated Router S = Sparse mode

show ip pim snooping tib

Display information from the tree information base (TIB) discovered by PIM-SM snooping about multicast group members and states.


Syntax

```
show ip pim snooping tib [vlan vlan-id] [group-address] [source-address]
```

Parameters

<i>vlan vlan-id</i>	(OPTIONAL) Enter a VLAN ID to display TIB information discovered by PIM-SM snooping on a specified VLAN. Valid VLAN IDs: 1 to 4094.
<i>group-address</i>	(OPTIONAL) Enter the group address in dotted decimal format (A.B.C.D) to display TIB information discovered by PIM-SM snooping for a specified multicast group.
<i>source-address</i>	(OPTIONAL) Enter the source address in dotted decimal format (A.B.C.D) to display TIB information discovered by PIM-SM snooping for a specified multicast source.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.1	Introduced on E-Series ExaScale

Example

```

FTOS#show ip pim snooping tib

PIM Multicast Snooping Table
Flags: J/P - (*,G) Join/Prune, j/p - (S,G) Join/Prune
       SGR-P - (S,G,R) Prune
Timers: Uptime/Expires
* : Inherited port

(*, 225.1.2.1), uptime 00:00:01, expires 00:02:59, RP 165.87.70.1, flags: J
Incoming interface: Vlan 2, RPF neighbor 0.0.0.0
Outgoing interface list:
GigabitEthernet 4/11 RPF 165.87.32.2          00:00:01/00:02:59
GigabitEthernet 4/13 Upstream Port           -/-

FTOS#show ip pim snooping tib vlan 2 225.1.2.1 165.87.1.7

PIM Multicast Snooping Table
Flags: J/P - (*,G) Join/Prune, j/p - (S,G) Join/Prune
       SGR-P - (S,G,R) Prune
Timers: Uptime/Expires
* : Inherited port

(165.87.1.7, 225.1.2.1), uptime 00:00:08, expires 00:02:52, flags: j
Incoming interface: Vlan 2, RPF neighbor 0.0.0.0
Outgoing interface list:
GigabitEthernet 4/11 Upstream Port           -/-
GigabitEthernet 4/13 DR Port                 -/-
GigabitEthernet 4/20 RPF 165.87.32.10       00:00:08/00:02:52

```

Table 38-5. show ip pim snooping tib Command Example Fields

Field	Description
(S, G)	Displays the entry in the PIM multicast snooping database.
uptime	Displays the amount of time the entry has been in the PIM multicast route table.
expires	Displays the amount of time until the entry expires and is removed from the database.
RP	Displays the IP address of the RP/source for this entry.

Table 38-5. show ip pim snooping tib Command Example Fields (continued)

Field	Description
flags	List the flags to define the entries: <ul style="list-style-type: none"> • S = PIM Sparse Mode • C = directly connected • L = local to the multicast group • P = route was pruned • R = the forwarding entry is pointing toward the RP • F = FTOS is registering this entry for a multicast source • T = packets were received via Shortest Tree Path • J = first packet from the last hop router is received and the entry is ready to switch to SPT • K = acknowledge pending state
Incoming interface	Displays the reverse path forwarding (RPF) interface towards the RP/source.
RPF neighbor	Displays the next hop from this interface towards the RP/source.
Outgoing interface list:	Lists the interfaces that meet one of the following criteria: <ul style="list-style-type: none"> • a directly connect member of the Group. • statically configured member of the Group. • received a (*,G) Join message.

show ip pim summary

C **E** **S**

View information about PIM-SM operation.

S4810

S4820T

Syntax

show ip pim summary

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.4.1.1	Support for the display of PIM-SM snooping status was added on E-Series ExaScale
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.8.1.0	Introduced on S-Series

Example

```
FTOS#show ip pim summary

PIM TIB version 495
Uptime 22:44:52
Entries in PIM-TIB/MFC : 2/2

Active Modes :
    PIM-SNOOPING
```



```

Interface summary:
  1 active PIM interface
  0 passive PIM interfaces
  3 active PIM neighbors

TIB summary:
  1/1 (*,G) entries in PIM-TIB/MFC
  1/1 (S,G) entries in PIM-TIB/MFC
  0/0 (S,G,Rpt) entries in PIM-TIB/MFC

  0 PIM nexthops
  0 RPs
  0 sources
  0 Register states

Message summary:
  2582/2583 Joins sent/received
  5/0 Prunes sent/received
  0/0 Candidate-RP advertisements sent/received
  0/0 BSR messages sent/received
  0/0 State-Refresh messages sent/received
  0/0 MSDP updates sent/received
  0/0 Null Register messages sent/received
  0/0 Register-stop messages sent/received

Data path event summary:
  0 no-cache messages received
  0 last-hop switchover messages received
  0/0 pim-assert messages sent/received
  0/0 register messages sent/received

Memory usage:
  TIB : 3768 bytes
  Nexthop cache : 0 bytes
  Interface table : 992 bytes
  Neighbor table : 528 bytes
  RP Mapping : 0 bytes

```

show ip pim tib

C E S

S4810

S4820T

View the PIM tree information base (TIB).

Syntax

show ip pim tib [*group-address* [*source-address*]]

Parameters

<i>group-address</i>	(OPTIONAL) Enter the group address in dotted decimal format (A.B.C.D).
<i>source-address</i>	(OPTIONAL) Enter the source address in dotted decimal format (A.B.C.D).

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.8.1.0 Introduced on S-Series

Example

```

FTOS#show ip pim tib

PIM Multicast Routing Table
Flags: D - Dense, S - Sparse, C - Connected, L - Local, P - Pruned,
       R - RP-bit set, F - Register flag, T - SPT-bit set, J - Join SPT,
       M - MSDP created entry, A - Candidate for MSDP Advertisement,
       K - Ack-Pending State
Timers: Uptime/Expires
Interface state: Interface, next-Hop, State/Mode

(*, 226.1.1.1), uptime 01:29:19, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: GigabitEthernet 4/23, RPF neighbor 10.211.1.2
  Outgoing interface list:
    GigabitEthernet 8/0

(*, 226.1.1.2), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: GigabitEthernet 4/23, RPF neighbor 10.211.1.2
  Outgoing interface list:
    GigabitEthernet 8/0

(*, 226.1.1.3), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: GigabitEthernet 4/23, RPF neighbor 10.211.1.2
  Outgoing interface list:
    GigabitEthernet 8/0

(*, 226.1.1.4), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: GigabitEthernet 4/23, RPF neighbor 10.211.1.2
  Outgoing interface list:
    GigabitEthernet 8/0

```

Table 38-6. show ip pim tib Command Example Fields

Field	Description
(S, G)	Displays the entry in the multicast PIM database.
uptime	Displays the amount of time the entry has been in the PIM route table.
expires	Displays the amount of time until the entry expires and is removed from the database.
RP	Displays the IP address of the RP/source for this entry.
flags	List the flags to define the entries: <ul style="list-style-type: none"> • D = PIM Dense Mode • S = PIM Sparse Mode • C = directly connected • L = local to the multicast group • P = route was pruned • R = the forwarding entry is pointing toward the RP • F = FTOS is registering this entry for a multicast source • T = packets were received via Shortest Tree Path • J = first packet from the last hop router is received and the entry is ready to switch to SPT • K = acknowledge pending state

Table 38-6. show ip pim tib Command Example Fields (continued)

Field	Description
Incoming interface	Displays the reverse path forwarding (RPF) interface towards the RP/source.
RPF neighbor	Displays the next hop from this interface towards the RP/source.
Outgoing interface list:	Lists the interfaces that meet one of the following criteria: <ul style="list-style-type: none"> • a directly connect member of the Group. • statically configured member of the Group. • received a (*,G) Join message.

show running-config pim

E **S4810**

Display the current configuration of PIM-SM snooping.

S4820T

Syntax

show running-config pim

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.12.0 Introduced on the S4810.

Version 8.4.1.0 Introduced on E-Series ExaScale.

Related Commands

[ip pim snooping](#) Enable PIM-SM snooping.

Example

```
FTOS#show running-config pim
!
ip pim snooping enable
```

IPv6 PIM-Sparse Mode Commands

The IPv6 PIM-SM commands are:

- [ipv6 pim bsr-border](#)
- [ipv6 pim bsr-candidate](#)
- [ipv6 pim dr-priority](#)
- [ipv6 pim join-filter](#)
- [ipv6 pim query-interval](#)
- [ipv6 pim neighbor-filter](#)
- [ipv6 pim register-filter](#)
- [ipv6 pim rp-address](#)

- [ipv6 pim rp-candidate](#)
- [ip pim sparse-mode](#)
- [ipv6 pim spt-threshold](#)
- [show ipv6 pim bsr-router](#)
- [show ipv6 pim interface](#)
- [show ipv6 pim neighbor](#)
- [show ipv6 pim rp](#)
- [show ipv6 pim tib](#)

clear ipv6 pim tib

E **S4810**

S4820T

Clear the IPv6 PIM multicast-routing database (tree information base—tib).

Syntax

clear ipv6 pim tib [*group-address*]

Parameters

<i>group-address</i>	(OPTIONAL) Enter the multicast group address in the x:x:x::x format. The :: notation specifies successive hexadecimal fields of zero.
----------------------	---

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Related Commands

show ipv6 pim tib	Display the IPv6 PIM tree information base (tib)
-----------------------------------	--

debug ipv6 pim

E **S4810**

S4820T

Invoke IPv6 PIM debugging.

Syntax

debug ipv6 pim [bsr | events | group *group* | packet | register [*group*] | state | | timer [assert | hello | joinprune | register]]

To disable IPv6 PIM debugging, enter no debug ipv6 pim.

Parameters

bsr	(OPTIONAL) Enter the keyword bsr to invoke debugging of IPv6 PIM Candidate RP/BSR activities.
events	(OPTIONAL) Enter the keyword events to invoke debugging of IPv6 PIM events.

<code>group <i>group</i></code>	(OPTIONAL) Enter the keyword <code>group</code> followed by the group address to invoke debugging on that specific group.
<code>packet</code>	(OPTIONAL) Enter the keyword <code>packet</code> to invoke debugging of IPv6 PIM packets.
<code>register [<i>group</i>]</code>	(OPTIONAL) Enter the keyword <code>register</code> and optionally the group address to invoke debugging of IPv6 PIM register messages for a particular group.
<code>state</code>	(OPTIONAL) Enter the keyword <code>state</code> to view IPv6 PIM state changes.
<code>timer [assert hello joinprune register]</code>	(OPTIONAL) Enter the keyword <code>timer</code> to view IPv6 PIM timers. Enter one of the optional parameters: <ul style="list-style-type: none"> • <code>assert</code>: to view the assertion timer. • <code>hello</code>: to view the IPv6 PIM neighbor keepalive timer. • <code>joinprune</code>: to view the expiry timer (join/prune timer) • <code>register</code>: to view the register suppression timer.
Defaults	Disabled
Command Modes	EXEC Privilege
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.12.0 Introduced on the S4810.
	Version 7.4.1.0 Introduced

ipv6 pim bsr-border

E **S4810**

Define the border of PIM domain by filtering inbound and outbound PIM-BSR messages per interface.

S4820T

Syntax `ipv6 pim bsr-border`

Defaults Disabled

Command Modes INTERFACE

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.12.0 Introduced on the S4810.

Version 8.3.1.0 Introduced

Usage Information

This command is applied to the subsequent PIM-BSR messages. Existing BSR advertisements are cleaned up by time-out.

ipv6 pim bsr-candidate

E **S4810**

Configure the router as a bootstrap (bsr) candidate.

S4820T

Syntax `ipv6 pim bsr-candidate interface [hash-mask-length] [priority]`

To disable the bootstrap candidate, use the `no ipv6 pim bsr-candidate` command.


Parameters	
<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Loopback interface, enter the keyword <code>loopback</code> followed by a number from 0 to 16383. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: <ul style="list-style-type: none"> E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>hash-mask-length</i>	(OPTIONAL) Enter the hash mask length for RP selection. Range: 0 to 128 Default: 126
<i>priority</i>	(OPTIONAL) Enter the priority value for Bootstrap election process. Range: 0 to 255 Default: 0

Defaults As above

Command Modes CONFIGURATION

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

ipv6 pim dr-priority

 **S4810**

Change the Designated Router (DR) priority for the IPv6 interface.



Syntax `ipv6 pim dr-priority priority-value`

To remove the DR priority value assigned, use the `no ipv6 pim dr-priority` command.

Parameters	
<i>priority-value</i>	Enter a number. Preference is given to larger/higher number. Range: 0 to 4294967294 Default: 1

Defaults 1

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 7.4.1.0	Introduced

Usage Information

The router with the largest value assigned to an interface becomes the Designated Router. If two interfaces contain the same DR priority value, the interface with the largest interface IP address becomes the Designated Router.

ipv6 pim join-filter

E **S4810**
S4820T

Permit or deny PIM Join/Prune messages on an interface using an access list. This command prevents the PIM-SM router from creating state based on multicast source and/or group.

Syntax

ipv6 pim join-filter *access-list*

Parameters

<i>access-list</i>	Enter the name of an extended access list.
in	Enter this keyword to apply the access list to inbound traffic.
out	Enter this keyword to apply the access list to outbound traffic.

Defaults

None

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.1.0	Introduced

Example

```
FTOS(conf)#ipv6 access-list JOIN-FIL_ACL
FTOS(conf-ipv6-acl)#permit ipv6 165:87:34::0/112 ff0e::225:1:2:0/112
FTOS(conf-ipv6-acl)#permit ipv6 any ff0e::230:1:2:0/112
FTOS(conf-ipv6-acl)#permit ipv6 165:87:32::0/112 any
FTOS(conf-ipv6-acl)#exit
FTOS(conf)#interface gigabitethernet 0/84
FTOS(conf-if-gi-0/84)#ipv6 pim join-filter JOIN-FIL_ACL in
FTOS(conf-if-gi-0/84)#ipv6 pim join-filter JOIN-FIL_ACL out
```

ipv6 pim query-interval

E **S4810**
S4820T

Change the frequency of IPv6 PIM Router-Query messages.

Syntax

ipv6 pim query-interval seconds

To return to the default value, enter no ipv6 pim query-interval seconds command.

Parameters	<i>seconds</i>	Enter a number as the number of seconds between router query messages. Default: 30 seconds Range: 0 to 65535
Defaults	30 seconds	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on the S4810.
	Version 7.4.1.0	Introduced

ipv6 pim neighbor-filter

E **S4810**

Prevent the system from forming a PIM adjacency with a neighboring system.

S4820T

Syntax

ipv6 pim neighbor-filter { *access-list* }

Parameters

<i>access-list</i>	Enter the name of a standard access list. Maximum 16 characters.
--------------------	--

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.1.0	Introduced

Usage Information

Do not enter this command before creating the access-list.

ipv6 pim register-filter

E **S4810**

Configure the source DR so that it does not send register packets to the RP for the specified sources and groups.

S4820T

Syntax

ipv6 pim register-filter *access-list*

Parameters

<i>access-list</i>	Enter the name of the extended ACL that contains the sources and groups to be filtered.
--------------------	---

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.1.0	Introduced

Example

```
FTOS(conf)#ipv6 pim register-filter REG-FIL_ACL
FTOS(conf)#ipv6 access-list REG-FIL_ACL
FTOS(conf-ipv6-acl)#deny ipv6 165:87:34::10/128 ff0e::225:1:2:0/112
FTOS(conf-ipv6-acl)#permit ipv6 any any
FTOS(conf-ipv6-acl)#exit
```

ipv6 pim rp-address



Configure a static PIM Rendezvous Point (RP) address for a group. This address is used by first-hop routers to send Register packets on behalf of the source multicast host.

Syntax

`ipv6 pim rp-address address group-address group-address mask override`

To remove an RP address, use the `no ipv6 pim re-address address group-address mask override`.

Parameters

<i>address</i>	Enter the IPv6 RP address in the <i>x:x:x:x</i> format. The <code>::</code> notation specifies successive hexadecimal fields of zero.
<i>group-address</i> <i>group-address mask</i>	Enter the keyword <code>group-address</code> followed by the group address in the <i>x:x:x:x</i> format and then the mask in <code>/nn</code> format to assign that group address to the RP. The <code>::</code> notation specifies successive hexadecimal fields of zero.
<i>override</i>	Enter the keyword <code>override</code> to override the BSR updates with static RP. The <code>override</code> will take effect immediately during enable/disable. Note: This option is applicable to multicast group range.

Defaults

No default values or behavior

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Usage Information

The RP addresses are stored in the order in which they are entered. RP addresses learnt via BSR take priority over static RP addresses.

Without the `override` option, RPs advertised by the BSR updates take precedence over the statically configured RPs.

ipv6 pim rp-candidate

E **S4810**

Specify an interface as an RP candidate.

S4820T

Syntax

ipv6 pim rp-candidate *interface* [*priority-value*]

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Loopback interface, enter the keyword <code>loopback</code> followed by a number from 0 to 16383. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: <p>E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.</p> For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>priority-value</i>	<p>(OPTIONAL) Enter a number as the priority of this RP Candidate, which is included in the Candidate-RP-Advertisements.</p> <p>Range: 0 (highest) to 255 (lowest)</p>

Defaults

No default values or behavior

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

ipv6 pim sparse-mode

E **S4810**

Enable IPv6 PIM sparse mode on the interface.

S4820T

Syntax

ipv6 pim sparse-mode

To disable IPv6 PIM sparse mode, enter no ipv6 pim sparse-mode.

Defaults

Disabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Usage Information

The interface must be enabled (no shutdown command) and not have the switchport command configured. Multicast must also be enabled globally. PIM is supported on the port-channel interface.

ipv6 pim spt-threshold

E **S4810**

Specifies when a PIM leaf router should join the shortest path tree.

S4820T

Syntax

ipv6 pim spt-threshold { *kbps* | infinity }

To return to the default value, enter no ipv6 pim spt-threshold.

Parameters

<i>kbps</i>	Enter a traffic rate in kilobytes per second. Range: 0 to 4294967 kbps Default: 10 kbps
infinity	Enter the keyword infinity to have all sources for the specified group use the shared tree and never join shortest path tree (SPT).

Defaults

10 kbps

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Usage Information

PIM leaf routers join the shortest path tree immediately after the first packet arrives from a new source.

show ipv6 pim bsr-router

E **S4810**

View information on the bootstrap router (v2).

S4820T

Syntax

show ipv6 pim bsr-router

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Example

```
FTOS#show ipv6 pim bsr-router
PIMv2 Bootstrap information
This system is the Bootstrap Router (v2)
  BSR address: 14::2
  Uptime:      00:02:54, BSR Priority: 0, Hash mask length: 126
  Next bootstrap message in 00:00:06

This system is a candidate BSR
  Candidate BSR address: 14::2, priority: 0, hash mask length: 126
FTOS#
```

show ipv6 pim interface

E **S4810**

Display IPv6 PIM enabled interfaces.

S4820T**Syntax**

show ipv6 pim interface

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Example

```
FTOS#show ipv6 pim interface
Interface Ver/   Nbr   Query  DR
          Mode  Count Intvl  Prio

Gi 10/3   v2/S   1     30     1
  Address : fe80::201:e8ff:fe02:140f
  DR      : this router

Gi 10/11  v2/S   0     30     1
  Address : fe80::201:e8ff:fe02:1417
  DR      : this router
FTOS#
```

show ipv6 pim neighbor

E **S4810**

Displays IPv6 PIM neighbor information.

S4820T**Syntax**

show ipv6 pim neighbor [detail]

Parameters

detail	(OPTIONAL) Enter the keyword <code>detail</code> to displayed PIM neighbor detailed information.
--------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on the S4810.
------------------	--------------------------

Version 7.4.1.0	Introduced
-----------------	------------

Example

```
FTOS##show ipv6 pim neighbor detail
Neighbor          Interface      Uptime/Expires   Ver  DR
Address
fe80::201:e8ff:fe00:6265  Gi 10/3      00:07:39/00:01:42  v2  1 / S
165:87:50::6
FTOS##
```

show ipv6 pim rp

E **S4810**

View all IPv6 multicast groups-to-rendezvous point (RP) mappings.

S4820T**Syntax**show ipv6 pim rp [*mapping* | *group-address*]**Parameters**

mapping	(OPTIONAL) Enter the keyword <code>mapping</code> to display the multicast groups-to-RP mapping and information on how RP is learnt.
---------	--

<i>group-address</i>	(OPTIONAL) Enter the multicast group address in the <code>x::x::x</code> format to view RP mappings for a specific group. The <code>::</code> notation specifies successive hexadecimal fields of zero.
----------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.12.0	Introduced on the S4810.
------------------	--------------------------

Version 7.4.1.0	Introduced
-----------------	------------

**Example
(show ipv6 pim rp)**

```
FTOS##show ipv6 pim rp
Group          RP
ff0e::225:1:2:1  14::1
ff0e::225:1:2:2  14::1
ff0e::226:1:2:1  14::1
ff0e::226:1:2:2  14::1
FTOS#
```

Example
(show ipv6 pim rp mapping)

```
FTOS#show ipv6 pim rp mapping
PIM Group-to-RP Mappings
Group(s): ff00::/8
  RP: 14::1, v2
    Info source: 14::1, via bootstrap, priority 192
    Uptime: 00:03:37, expires: 00:01:53
Group(s): ff00::/8, Static
  RP: 14::2, v2
FTOS#
```

show ipv6 pim tib

E **S4810**

View the IPv6 PIM multicast-routing database (tree information base—tib).

S4820T**Syntax**show ipv6 pim tib [*group-address* [*source-address*]]**Parameters**

<i>group-address</i>	(OPTIONAL) Enter the IPv6 group address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero
<i>source-address</i>	(OPTIONAL) Enter the source address in the x:x:x:x format. The :: notation specifies successive hexadecimal fields of zero

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 7.4.1.0	Introduced

Example

```
FTOS#show ipv6 pim tib

PIM Multicast Routing Table
Flags: D - Dense, S - Sparse, C - Connected, L - Local, P - Pruned,
       R - RP-bit set, F - Register flag, T - SPT-bit set, J - Join SPT,
       M - MSDP created entry, A - Candidate for MSDP Advertisement
       K - Ack-Pending State
Timers: Uptime/Expires
Interface state: Interface, next-Hop, State/Mode

(25::1, ff0e::225:1:2:1), uptime 00:09:53, expires 00:00:00, flags: CJ
RPF neighbor: GigabitEthernet 10/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  GigabitEthernet 10/11

(25::1, ff0e::225:1:2:2), uptime 00:09:54, expires 00:00:00, flags: CJ
RPF neighbor: GigabitEthernet 10/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  GigabitEthernet 10/11

(25::2, ff0e::225:1:2:2), uptime 00:09:54, expires 00:00:00, flags: CJ
RPF neighbor: GigabitEthernet 10/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  GigabitEthernet 10/11
```

```
(25::1, ff0e::226:1:2:1), uptime 00:09:54, expires 00:00:00, flags: CJ
  RPF neighbor: GigabitEthernet 10/3, fe80::201:e8ff:fe00:6265
  Outgoing interface list:
    GigabitEthernet 10/11
FTOS#
```


Port Monitoring

Overview

The Port Monitoring feature enables you to monitor network traffic by forwarding a copy of each incoming or outgoing packet from one port to another port.

The commands in this chapter are generally supported on the C-Series, E-Series, and S-Series, with one exception, as noted in the Command History fields and by these symbols under the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

- [description](#)
- [flow-based enable](#)
- [monitor session](#)
- [show config](#)
- [show monitor session](#)
- [show running-config monitor session](#)
- [source \(port monitoring\)](#)

Important Points to Remember

- On the E-Series, Port Monitoring is supported on TeraScale and ExaScale platforms.
- Port Monitoring is supported on physical ports only. Logical interfaces, such as Port Channels and VLANs, are not supported.
- A SONET port can only be configured as a monitored port.
- FTOS supports as many monitor sessions on a system as the number of port-pipes.
- The monitoring (destination, “MG”) and monitored (source, “MD”) ports must be on the same switch.

- In general, a monitoring port should have no ip address and no shutdown as the only configuration; FTOS permits a limited set of commands for monitoring ports; display them using the command ?. A monitoring port also may not be a member of a VLAN.
- A monitoring port can monitor any physical port in the chassis.
- Only one MG and one MD may be in a single port-pipe.
- A monitoring port can monitor more than one port.
- There may only be one destination port in a monitoring session.
- FTOS on the S-Series supports multiple source ports to be monitored by a single destination port in one monitor session.
- On the S-Series, one monitor session can have only one MG port. There is no restriction on the number of source ports, or destination ports on the chassis.



Note: The monitoring port should not be a part of any other configuration.

description

C **E** **S**

Enter a description of this monitoring session.

Syntax

`description { description }`

To remove the description, use the `no description { description }` command.

Parameters

<i>description</i>	Enter a description regarding this session(80 characters maximum).
--------------------	--

Defaults

No default behavior or values

Command Modes

MONITOR SESSION (*conf-mon-sess-session-ID*)

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-7.7.1.0	Introduced on E-Series

Related Commands

monitor session	Enable a monitoring session.
---------------------------------	------------------------------

flow-based enable

E

Enable flow-based monitoring.

Syntax

`flow-based enable`

To disable flow-based monitoring, use the `no flow-based enable` command.

Defaults	Disabled, that is flow-based monitoring is not applied
Command Modes	MONITOR SESSION (<i>conf-mon-sess-session-ID</i>)
Command History	Version 8.1.1.0 Introduced on E-Series ExaScale
	Version 7.4.1.0 Introduced on E-Series
Usage Information	To monitoring traffic with particular flows ingressing/egressing the interface, appropriate ACLs can be applied in both ingress and egress direction.
Related Commands	monitor session Create a monitoring session.

monitor session

C E S

S4810

S4820T

Create a session for monitoring traffic with port monitoring.

Syntax

monitor session *session-ID*

To delete a session, use the no monitor session *session-ID* command.

To delete all monitor sessions, use the no monitor session all command.

Parameters	<i>session-ID</i> Enter a session identification number. Range: 0 to 65535
-------------------	---

Defaults No default values or behaviors

Command Modes MONITOR SESSION (*conf-mon-sess-session-ID*)

Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	Version 8.1.1.0 Introduced on E-Series ExaScale
	Version 7.7.1.0 Introduced on S-Series
	Version 7.5.1.0 Introduced on C-Series
	Version 7.4.1.0 Introduced on E-Series

Example

```
FTOS(conf)# monitor session 60
FTOS(conf-mon-sess-60)
```

Usage Information The monitor command is saved in the running configuration at the Monitor Session mode level and can be restored after a chassis reload.

**Related
Commands**

show monitor session	Display the monitor session
show running-config monitor session	Display the running configuration of a monitor session

show config

C **E** **S**

Display the current monitor session configuration.

Syntax

show config

Defaults

No default values or behavior

Command ModesMONITOR SESSION (*conf-mon-sess-session-ID*)**Command
History**

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS(conf-mon-sess-11)#show config
!
monitor session 11
 source GigabitEthernet 10/0 destination GigabitEthernet 10/47 direction rx
FTOS#
```

show monitor session

C **E** **S**

Display the monitor information of a particular session or all sessions.

Syntaxshow monitor session {*session-ID*}

To display monitoring information for all sessions, use the show monitor session command.

Parameters

<i>session-ID</i>	(OPTIONAL) Enter a session identification number. Range: 0 to 65535
-------------------	--

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS#show monitor session 11
```

```

SessionID   Source      Destination  Direction  Mode
-----
11          Gi 10/0    Gi 10/47    rx         interface

```

Related Commands

monitor session	Create a session for monitoring.
---------------------------------	----------------------------------

show running-config monitor session

C **E** **S**

Display the running configuration of all monitor sessions or a specific session.

Syntaxshow running-config monitor session {*session-ID*}

To display the running configuration for all monitor sessions, use just the show running-config monitor session command.

Parameters

<i>session-ID</i>	(OPTIONAL) Enter a session identification number. Range: 0 to 65535
-------------------	--

Defaults

No default values or behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```

FTOS#show running-config monitor session
!
monitor session 8
 source GigabitEthernet 10/46 destination GigabitEthernet 10/1 direction rx
!
monitor session 11
 source GigabitEthernet 10/0 destination GigabitEthernet 10/47 direction rx

FTOS#show running-config monitor session 11
!
monitor session 11
 source GigabitEthernet 10/0 destination GigabitEthernet 10/47 direction rx

```

Usage Information

The monitoring command is saved in the running configuration at the Monitor Session mode level and can be restored after a chassis reload.

Related Commands

monitor session	Create a session for monitoring.
show monitor session	Display a monitor session.

source (port monitoring)



Configure a port monitor source.

Syntax

`source interface destination interface direction { rx | tx | both }`

To disable a monitor source, use the `no source interface destination interface direction { rx | tx | both }` command.

Parameters

<i>interface</i>	Enter the one of the following keywords and slot/port information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information.
<i>destination</i>	Enter the keyword <i>destination</i> to indicate the interface destination.
<i>direction { rx tx both }</i>	Enter the keyword <i>direction</i> followed by one of the packet directional indicators. rx: to monitor receiving packets only tx: to monitor transmitting packets only both: to monitor both transmitting and receiving packets

Defaults

No default behavior or values

Command Modes

MONITOR SESSION (*conf-mon-sess-session-ID*)

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS(conf-mon-sess-11)#source gi 10/0 destination gi 10/47 direction rx
FTOS(conf-mon-sess-11)#
```

Usage Information



Note: A SONET port can only be configured as a monitored port.

Private VLAN (PVLAN)

Overview

The Private VLAN (PVLAN) feature of FTOS is supported on Dell Force10 platforms as indicated by the characters that appear under each of the command headings: **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

- [ip local-proxy-arp](#)
- [private-vlan mode](#)
- [private-vlan mapping secondary-vlan](#)
- [show interfaces private-vlan](#)
- [show vlan private-vlan](#)
- [show vlan private-vlan mapping](#)
- [switchport mode private-vlan](#)

Refer also to the following commands. The command output is augmented in FTOS 7.8.1.0 to provide PVLAN data:

- [show arp](#) in [IPv4 Routing](#)
- [show vlan](#) in [Layer 2](#)

Private VLANs extend the FTOS security suite by providing Layer 2 isolation between ports within the same private VLAN. A private VLAN partitions a traditional VLAN into subdomains identified by a *primary* and *secondary VLAN* pair.

The FTOS private VLAN implementation is based on RFC 3069.

Private VLAN Concepts

Primary VLAN:

The *primary VLAN* is the base VLAN and can have multiple secondary VLANs. There are two types of secondary VLAN — *community VLAN* and *isolated VLAN*:

- A primary VLAN can have any number of community VLANs and isolated VLANs.
- Private VLANs block all traffic to isolated ports except traffic from promiscuous ports. Traffic received from an isolated port is forwarded only to promiscuous ports or trunk ports.

Community VLAN:

A community VLAN is a secondary VLAN of the primary VLAN:

- Ports in a community VLAN can talk to each other. Also, all ports in a community VLAN can talk to all *promiscuous ports* in the primary VLAN and vice-versa.
- Devices on a community VLAN can communicate with each other via member ports, while devices in an isolated VLAN cannot.

Isolated VLAN:


An isolated VLAN is a secondary VLAN of the primary VLAN:

- Ports in an isolated VLAN cannot talk to each other. Servers would be mostly connected to isolated VLAN ports.
- Isolated ports can talk to promiscuous ports in the primary VLAN, and vice-versa.

Port types:

- **Community port:** A *community port* is, by definition, a port that belongs to a community VLAN and is allowed to communicate with other ports in the same community VLAN and with promiscuous ports.
- **Isolated port:** An *isolated port* is, by definition, a port that, in Layer 2, can only communicate with promiscuous ports that are in the same PVLAN.
- **Promiscuous port:** A *promiscuous port* is, by definition, a port that is allowed to communicate with any other port type.
- **Trunk port:** A *trunk port*, by definition, carries VLAN traffic across switches:
 - A trunk port in a PVLAN is always tagged.
 - Primary or secondary VLAN traffic is carried by the trunk port in tagged mode. The tag on the packet helps identify the VLAN to which the packet belongs.
 - A trunk port can also belong to a regular VLAN (non-private VLAN).

ip local-proxy-arp



Syntax

Enable/disable Layer 3 communication between secondary VLANs in a private VLAN.

[no] ip local-proxy-arp

To disable Layer 3 communication between secondary VLANs in a private VLAN, use the `no ip local-proxy-arp` command in the `INTERFACE VLAN` mode for the primary VLAN.

To disable Layer 3 communication in a particular secondary VLAN, use the `no ip local-proxy-arp` command in the `INTERFACE VLAN` mode for the selected secondary VLAN.

Note: Even after `ip-local-proxy-arp` is disabled (`no ip-local-proxy-arp`) in a secondary VLAN, Layer 3 communication may happen between some secondary VLAN hosts, until the ARP timeout happens on those secondary VLAN hosts.

Defaults Layer 3 communication is disabled between secondary VLANs in a private VLAN.

Command Modes INTERFACE VLAN

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series

Related Commands	private-vlan mode	Set the mode of the selected VLAN to community, isolated, or primary.
	private-vlan mapping secondary-vlan	Map secondary VLANs to the selected primary VLAN.
	show arp	Display the ARP table.
	show interfaces private-vlan	Display type and status of PVLAN interfaces.
	show vlan private-vlan	Display PVLANS and/or interfaces that are part of a PVLAN.
	switchport mode private-vlan	Set the PVLAN mode of the selected port.

private-vlan mode

  **S4810**

Set the PVLAN mode of the selected VLAN to community, isolated, or primary.

 **S4820T**

Syntax `[no] private-vlan mode {community | isolated | primary}`

To remove the PVLAN configuration, use the `no private-vlan mode {community | isolated | primary}` command syntax.

Parameters	community	Enter community to set the VLAN as a community VLAN, as described above.
	isolated	Enter isolated to configure the VLAN as an isolated VLAN, as described above.
	primary	Enter primary to configure the VLAN as a primary VLAN, as described above.

Defaults none

Command Modes

INTERFACE VLAN

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series

Usage Information

The VLAN:

- Can be in only one mode, either community, isolated, or primary.
- Mode can be set to community or isolated even before associating it to a primary VLAN. This secondary VLAN will continue to work normally as a normal VLAN even though it is not associated to a primary VLAN. (A syslog message indicates this.)
- Must not have a port in it when the VLAN mode is being set.

Only ports (and port channels) configured as promiscuous, host, or PVLAN trunk ports (as described above) can be added to the PVLAN. No other regular ports can be added to the PVLAN.

After using this command to configure a VLAN as a primary VLAN, use the private-vlan mapping secondary-vlan command to map secondary VLANs to this VLAN.

Related Commands

private-vlan mapping secondary-vlan	Set the mode of the selected VLAN to primary and then associate secondary VLANs to it.
show interfaces private-vlan	Display type and status of PVLAN interfaces.
show vlan private-vlan	Display PVLANS and/or interfaces that are part of a PVLAN.
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.
switchport mode private-vlan	Set the PVLAN mode of the selected port.

private-vlan mapping secondary-vlan

C S **S4810**
S4820T

Map secondary VLANs to the selected primary VLAN.

Syntax[no] private-vlan mapping secondary-vlan *vlan-list*

To remove specific secondary VLANs from the configuration, use the no private-vlan mapping secondary-vlan *vlan-list* command syntax.

Parameters

<i>vlan-list</i>	Enter the list of secondary VLANs to associate with the selected primary VLAN, as described above. The list can be in comma-delimited or hyphenated-range format, following the convention for range input.
------------------	---

Defaults	none										
Command Modes	INTERFACE VLAN										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced on C-Series and S-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.8.1.0	Introduced on C-Series and S-Series				
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.8.1.0	Introduced on C-Series and S-Series										
Usage Information	<p>The list of secondary VLANs can be:</p> <ul style="list-style-type: none"> Specified in comma-delimited or hyphenated-range format. Specified with this command even before they have been created. Amended by specifying the new secondary VLAN to be added to the list. 										
Related Commands	<table border="1"> <tr> <td>private-vlan mode</td> <td>Set the mode of the selected VLAN to community, isolated, or primary.</td> </tr> <tr> <td>show interfaces private-vlan</td> <td>Display type and status of PVLAN interfaces.</td> </tr> <tr> <td>show vlan private-vlan</td> <td>Display PVLANS and/or interfaces that are part of a PVLAN.</td> </tr> <tr> <td>show vlan private-vlan mapping</td> <td>Display primary-secondary VLAN mapping.</td> </tr> <tr> <td>switchport mode private-vlan</td> <td>Set the PVLAN mode of the selected port.</td> </tr> </table>	private-vlan mode	Set the mode of the selected VLAN to community, isolated, or primary.	show interfaces private-vlan	Display type and status of PVLAN interfaces.	show vlan private-vlan	Display PVLANS and/or interfaces that are part of a PVLAN.	show vlan private-vlan mapping	Display primary-secondary VLAN mapping.	switchport mode private-vlan	Set the PVLAN mode of the selected port.
private-vlan mode	Set the mode of the selected VLAN to community, isolated, or primary.										
show interfaces private-vlan	Display type and status of PVLAN interfaces.										
show vlan private-vlan	Display PVLANS and/or interfaces that are part of a PVLAN.										
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.										
switchport mode private-vlan	Set the PVLAN mode of the selected port.										

show interfaces private-vlan



Display type and status of PVLAN interfaces.

Syntax `show interfaces private-vlan [interface interface]`

Parameters	<table border="1"> <tr> <td>interface <i>interface</i></td> <td>(OPTIONAL) Enter the keyword interface, followed by the ID of the specific interface for which to display PVLAN status.</td> </tr> </table>	interface <i>interface</i>	(OPTIONAL) Enter the keyword interface, followed by the ID of the specific interface for which to display PVLAN status.
interface <i>interface</i>	(OPTIONAL) Enter the keyword interface, followed by the ID of the specific interface for which to display PVLAN status.		

Defaults none

Command Modes EXEC
EXEC Privilege

Command History	Version 7.8.1.0 Introduced on C-Series and S-Series
------------------------	---

Usage Information This command has two types of display — a list of all PVLAN interfaces or for a specific interface. Examples of both types of output are shown below.

**Example
(all PVLAN
interfaces)**

```

FTOS# show interfaces private-vlan
Interface Vlan PVLAN-Type Interface Type Status
-----
Gi 2/1    10   Primary   Promiscuous  Up
Gi 2/2    100  Isolated  Host         Down
Gi 2/3    10   Primary   Trunk        Up
Gi 2/4    101  Community Host         Up

```

**Example
(specific
interface)**

```

FTOS# show interfaces private-vlan Gi 2/2
Interface Vlan PVLAN-Type Interface Type Status
-----
Gi 2/2    100  Isolated  Host         Up

```

The table below defines the fields in the output example above.

Table 40-1. show interfaces description Command Example Fields

Field	Description
Interface	Displays type of interface and associated slot and port number
Vlan	Displays the VLAN ID of the designated interface
PVLAN-Type	Displays the type of VLAN in which the designated interface resides
Interface Type	Displays the PVLAN port type of the designated interface.
Status	States whether the interface is operationally up or down.

**Related
Commands**

private-vlan mode	Set the mode of the selected VLAN to community, isolated, or primary.
show vlan private-vlan	Display PVLANS and/or interfaces that are part of a PVLAN.
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.
switchport mode private-vlan	Set the PVLAN mode of the selected port.

show vlan private-vlan



Display PVLANS and/or interfaces that are part of a PVLAN.

Syntax

```
show vlan private-vlan [community | interface | isolated | primary | primary_vlan | interface interface]
```

Parameters

<i>community</i>	(OPTIONAL) Enter the keyword <i>community</i> to display VLANs configured as community VLANs, along with their interfaces.
<i>interface</i>	(OPTIONAL) Enter the keyword <i>community</i> to display VLANs configured as community VLANs, along with their interfaces.
<i>isolated</i>	(OPTIONAL) Enter the keyword <i>isolated</i> to display VLANs configured as isolated VLANs, along with their interfaces.

<code>primary</code>	(OPTIONAL) Enter the keyword <code>primary</code> to display VLANs configured as primary VLANs, along with their interfaces.
<code>primary_vlan</code>	(OPTIONAL) Enter a private VLAN ID or secondary VLAN ID to display interface details about the designated PVLAN.
<code>interface interface</code>	(OPTIONAL) Enter the keyword <code>interface</code> and an interface ID to display the PVLAN configuration of the designated interface.

Defaults none

Command Modes EXEC
EXEC Privilege

Command History Version 7.8.1.0 Introduced on C-Series and S-Series

Usage Information Examples of all types of command output are shown below. The first type of output is the result of not entering an optional keyword. It displays a detailed list of all PVLANS and their member VLANs and interfaces. The other types of output show details about PVLAN subsets.

Example (show vlan private-vlan)

```
FTOS# show vlan private-vlan
Primary Secondary Type      Active Ports
-----
10                primary Yes      Gi 2/1,3
                100    isolated Yes      Gi 2/2
                101    community Yes      Gi 2/10
20                primary Yes      Po 10, 12-13
                Gi 3/1
                200    isolated Yes      Gi 3/2,4-6
                201    community No
                202    community Yes      Gi 3/11-12
```

Example (show vlan private-vlan primary)

```
FTOS# show vlan private-vlan primary
Primary Secondary Type      Active Ports
-----
10                primary Yes      Gi 2/1,3
20                primary Yes      Gi 3/1,3
```

Example (show vlan private-vlan isolated)

```
FTOS# show vlan private-vlan isolated
Primary Secondary Type      Active Ports
-----
10                primary Yes      Gi 2/1,3
                100    isolated Yes      Gi 2/2,4-6
                200    isolated Yes      Gi 3/2,4-6
```

Example (show vlan private-vlan community)

```
FTOS# show vlan private-vlan community
Primary Secondary Type      Active Ports
-----
10                primary Yes      Gi 2/1,3
                101    community Yes      Gi 2/7-10
20                primary Yes      Po 10, 12-13
                Gi 3/1
                201    community No
                202    community Yes      Gi 3/11-12
```

**Example
(show vlan
private-vlan
interface)**

```
FTOS# show vlan private-vlan interface Gi 2/1
Primary Secondary Type      Active Ports
-----
10                primary  Yes    Gi 2/1
```

If the VLAN ID is that of a primary VLAN, then the entire private VLAN output will be displayed, as shown in the first figure below. If the VLAN ID is a secondary VLAN, only its primary VLAN and its particular secondary VLAN properties will be displayed, as shown in the second figure below.

**Example
(primary)**

```
FTOS# show vlan private-vlan 10
Primary Secondary Type      Active Ports
-----
10                primary  Yes    Gi 2/1,3
102 isolated Yes    Gi 0/4
101 community Yes    Gi 2/7-10
```

**Example
(secondary)**

```
FTOS#show vlan private-vlan 102

Primary Secondary Type      Active Ports
-----
10                Primary  Yes    Po 1
                Gi 0/2
102 Isolated Yes    Gi 0/4
```

The table, below, defines the fields in the output, above.

Table 40-2. show interfaces description Command Example Fields

Field	Description
Primary	Displays the VLAN ID of the designated or associated primary VLAN(s)
Secondary	Displays the VLAN ID of the designated or associated secondary VLAN(s)
Type	Displays the type of VLAN in which the listed interfaces reside
Active	States whether the interface is operationally up or down
Ports	Displays the interface IDs in the listed VLAN.

**Related
Commands**

private-vlan mode	Set the mode of the selected VLAN to either community or isolated.
show interfaces private-vlan	Display type and status of PVLAN interfaces.
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.
switchport mode private-vlan	Set the PVLAN mode of the selected port.


show vlan private-vlan mapping



Display primary-secondary VLAN mapping.

Syntax	show vlan private-vlan mapping								
Defaults	none								
Command Modes	EXEC EXEC Privilege								
Command History	Version 7.8.1.0 Introduced on C-Series and S-Series								
Usage Information	<p>The output of this command, shown below, displays the community and isolated VLAN IDs that are associated with each primary VLAN.</p> <pre> FTOS# show vlan private-vlan mapping Private Vlan: Primary : 100 Isolated : 102 Community : 101 Unknown : 200 </pre>								
Related Commands	<table border="1"> <tr> <td>private-vlan mode</td> <td>Set the mode of the selected VLAN to either community or isolated.</td> </tr> <tr> <td>show interfaces private-vlan</td> <td>Display type and status of PVLAN interfaces.</td> </tr> <tr> <td>show vlan private-vlan mapping</td> <td>Display primary-secondary VLAN mapping.</td> </tr> <tr> <td>switchport mode private-vlan</td> <td>Set the PVLAN mode of the selected port.</td> </tr> </table>	private-vlan mode	Set the mode of the selected VLAN to either community or isolated.	show interfaces private-vlan	Display type and status of PVLAN interfaces.	show vlan private-vlan mapping	Display primary-secondary VLAN mapping.	switchport mode private-vlan	Set the PVLAN mode of the selected port.
private-vlan mode	Set the mode of the selected VLAN to either community or isolated.								
show interfaces private-vlan	Display type and status of PVLAN interfaces.								
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.								
switchport mode private-vlan	Set the PVLAN mode of the selected port.								

switchport mode private-vlan



Set the PVLAN mode of the selected port.

Syntax

[no] switchport mode private-vlan {host | promiscuous | trunk}

To remove the PVLAN mode from the selected port, use the no switchport mode private-vlan command.

Parameters

host	Enter host to configure the selected port or port channel as an isolated interface in a PVLAN, as described above.
promiscuous	Enter promiscuous to configure the selected port or port channel as an promiscuous interface, as described above.
trunk	Enter trunk to configure the selected port or port channel as a trunk port in a PVLAN, as described above.

Defaults

disabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series

Usage Information

The assignment of the various PVLAN port types to port and port channel (LAG) interfaces is demonstrated below.

Example

```
FTOS#conf
FTOS(conf)#interface GigabitEthernet 2/1
FTOS(conf-if-gi-2/1)#switchport mode private-vlan promiscuous

FTOS(conf)#interface GigabitEthernet 2/2
FTOS(conf-if-gi-2/2)#switchport mode private-vlan host

FTOS(conf)#interface GigabitEthernet 2/3
FTOS(conf-if-gi-2/3)#switchport mode private-vlan trunk

FTOS(conf)#interface port-channel 10
FTOS(conf-if-gi-2/3)#switchport mode private-vlan promiscuous
```

Related Commands

private-vlan mode	Set the mode of the selected VLAN to either community or isolated.
private-vlan mapping secondary-vlan	Set the mode of the selected VLAN to primary and then associate secondary VLANs to it.
show interfaces private-vlan	Display type and status of PVLAN interfaces.
show vlan private-vlan mapping	Display primary-secondary VLAN mapping.

Per-VLAN Spanning Tree Plus (PVST+)

Overview

The FTOS implementation of PVST+ (Per-VLAN Spanning Tree plus) is based on the IEEE 802.1d standard Spanning Tree Protocol, but it creates a separate spanning tree for each VLAN configured.

PVST+ (Per-VLAN Spanning Tree plus) is supported by FTOS on all Dell Force10 systems, as indicated by the characters that appear below each command heading:

E E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

The FTOS PVST+ commands are:

- [disable](#)
- [description](#)
- [extend system-id](#)
- [protocol spanning-tree pvst](#)
- [show spanning-tree pvst](#)
- [spanning-tree pvst](#)
- [spanning-tree pvst err-disable](#)
- [tc-flush-standard](#)
- [vlan bridge-priority](#)
- [vlan forward-delay](#)
- [vlan hello-time](#)
- [vlan max-age](#)



Note: For easier command line entry, the plus (+) sign is not used at the command line.

disable

C E S

S4810

S4820T

Disable PVST+ globally.

Syntax

disable

To enable PVST+, enter no disable.

Defaults

PVST+ is disabled

Command Modes

CONFIGURATION (conf-pvst)

Command History

version 8.3.19.0	Introduced on S4820T
version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Related Commands

[protocol spanning-tree pvst](#) Enter PVST+ mode.

description

C E S

S4810

S4820T

Enter a description of the PVST+

Syntax

description { *description* }

To remove the description, use the no description { *description* } command.

Parameters

description Enter a description to identify the Spanning Tree (80 characters maximum).

Defaults

No default behavior or values

Command Modes

SPANNING TREE PVST+ (The prompt is “config-pvst”).

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
pre-7.7.1.0	Introduced

**Related
Commands**

[protocol spanning-tree pvst](#) Enter SPANNING TREE mode on the switch.

extend system-id

C E S

S4810

S4820T

Use Extend System ID to augment the Bridge ID with a VLAN ID so that PVST+ differentiate between BPDUs for each VLAN. If for some reason on VLAN receives a BPDU meant for another VLAN, PVST+ will then not detect a loop, and both ports can remain in forwarding state.

Syntax extend system-id

Defaults Disabled

Command Modes PROTOCOL PVST

**Command
History**

version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.3.1.0 Introduced

Example

```
FTOS(conf-pvst)#do show spanning-tree pvst vlan 5 brief
```

```
VLAN 5
Executing IEEE compatible Spanning Tree Protocol
Root ID Priority 32773, Address 0001.e832.73f7
Root Bridge hello time 2, max age 20, forward delay 15
Bridge ID Priority 32773 (priority 32768 sys-id-ext 5), Address 0001.e832.73f7
We are the root of Vlan 5
Configured hello time 2, max age 20, forward delay 15
```

```
Interface
Name PortID Prio Cost Sts Cost Designated Bridge ID PortID
-----
Gi 0/10 128.140 128 200000 FWD 0 32773 0001.e832.73f7 128.140
Gi 0/12 128.142 128 200000 DIS 0 32773 0001.e832.73f7 128.142
```

```
Interface
Name Role PortID Prio Cost Sts Cost Link-type Edge
-----
Gi 0/10 Desg 128.140 128 200000 FWD 0 P2P No
Gi 0/12 Dis 128.142 128 200000 DIS 0 P2P No
```

**Related
Commands**

[protocol spanning-tree pvst](#) Enter SPANNING TREE mode on the switch.

protocol spanning-tree pvst

C E S

Enter the PVST+ mode to enable PVST+ on a device.

S4810

S4820T

Syntax protocol spanning-tree pvst

To disable PVST+, use the [disable](#) command.

Defaults This command has no default value or behavior.

Command Modes CONFIGURATION

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Example

```
FTOS#conf
FTOS(conf)#protocol spanning-tree pvst
FTOS(conf-pvst)#no disable
FTOS(conf-pvst)#vlan 2 bridge-priority 4096
FTOS(conf-pvst)#vlan 3 bridge-priority 16384
FTOS(conf-pvst)#
FTOS(conf-pvst)#show config
!
protocol spanning-tree pvst
no disable
vlan 2 bridge-priority 4096
vlan 3 bridge-priority 16384
FTOS#
```

Usage Information

Once PVST+ is enabled, the device runs an STP instance for each VLAN it supports.

Related Commands

disable	Disable PVST+.
show spanning-tree pvst	Display the PVST+ configuration.

show spanning-tree pvst

C E S

View the Per-VLAN Spanning Tree configuration.

Syntax show spanning-tree pvst [vlan *vlan-id*] [brief] [guard]

Parameters

vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by the VLAN ID. Range: 1 to 4094
---------------------	--

brief	(OPTIONAL) Enter the keyword brief to view a synopsis of the PVST+ configuration information.
Interface	(OPTIONAL) Enter one of the interface keywords along with the slot/port information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
guard	(OPTIONAL) Enter the keyword guard to display the type of guard enabled on a PVST interface and the current port state.

Defaults No default behavior or values

Command Modes EXEC
EXEC Privilege

Command History	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.4.2.1	Support for the optional guard keyword was added on the C-Series, S-Series, and E-Series TeraScale.
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.4.1.0	Expanded to display port error disable state (EDS) caused by loopback BPDU inconsistency and Port VLAN ID inconsistency.
	Version 6.2.1.1	Introduced

Example (brief)

```

FTOS#show spanning-tree pvst vlan 3 brief
VLAN 3
Executing IEEE compatible Spanning Tree Protocol
Root ID    Priority 4096, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15
Bridge ID  Priority 16384, Address 0001.e805.e306
Configured hello time 2, max age 20, forward delay 15

Interface
Name      PortID  Prio Cost    Sts Cost    Designated Bridge ID    PortID
-----
Gi 1/0    128.130 128 20000    FWD 20000    4096 0001.e801.6aa8 128.426
Gi 1/1    128.131 128 20000    BLK 20000    4096 0001.e801.6aa8 128.427
Gi 1/16   128.146 128 20000    FWD 20000    16384 0001.e805.e306 128.146
Gi 1/17   128.147 128 20000    FWD 20000    16384 0001.e805.e306 128.147

Interface
Name      Role  PortID  Prio Cost    Sts Cost    Link-type Edge

```

**Example
(vlan)**

```

-----
Gi 1/0      Root   128.130 128 20000   FWD 20000   P2P      No
Gi 1/1      Altr   128.131 128 20000   BLK 20000   P2P      No
Gi 1/16     Desg   128.146 128 20000   FWD 20000   P2P      Yes
Gi 1/17     Desg   128.147 128 20000   FWD 20000   P2P      Yes

```

```

FTOS#show spanning-tree pvst vlan 2
VLAN 2
Root Identifier has priority 4096, Address 0001.e805.e306
Root Bridge hello time 2, max age 20, forward delay 15
Bridge Identifier has priority 4096, Address 0001.e805.e306
Configured hello time 2, max age 20, forward delay 15
We are the root of VLAN 2
Current root has priority 4096, Address 0001.e805.e306
Number of topology changes 3, last change occurred 00:57:00

Port 130 (GigabitEthernet 1/0) is designated Forwarding
Port path cost 20000, Port priority 128, Port Identifier 128.130
Designated root has priority 4096, address 0001.e805.e3:06
Designated bridge has priority 4096, address 0001.e805.e3:06
Designated port id is 128.130, designated path cost 0
Number of transitions to forwarding state 1
BPDU sent 1567, received 3
The port is not in the Edge port mode

Port 131 (GigabitEthernet 1/1) is designated Forwarding
Port path cost 20000, Port priority 128, Port Identifier 128.131
Designated root has priority 4096, address 0001.e805.e3:06
Designated bridge has priority 4096, address 0001.e805.e3:06
Designated port id is 128.131, designated path cost 0
Number of transitions to forwarding state 1
BPDU sent 1567, received 0
The port is not in the Edge port mode

Port 146 (GigabitEthernet 1/16) is designated Forwarding
Port path cost 20000, Port priority 128, Port Identifier 128.146
Designated root has priority 4096, address 0001.e805.e3:06
Designated bridge has priority 4096, address 0001.e805.e3:06
Designated port id is 128.146, designated path cost 0
Number of transitions to forwarding state 1
BPDU sent 1578, received 0
The port is in the Edge port mode

Port 147 (GigabitEthernet 1/17) is designated Forwarding
Port path cost 20000, Port priority 128, Port Identifier 128.147
Designated root has priority 4096, address 0001.e805.e3:06
Designated bridge has priority 4096, address 0001.e805.e3:06
Designated port id is 128.147, designated path cost 0
Number of transitions to forwarding state 1
BPDU sent 1579, received 0
The port is in the Edge port mode

```

**Example
(with EDS & LBK)**

```

FTOS#show spanning-tree pvst vlan 2 interface gigabitethernet 1/0

GigabitEthernet 1/0 of VLAN 2 is LBK_INC discarding

Edge port:no (default) port guard :none (default)
Link type: point-to-point (auto) bpdu filter:disable (default)
Bpdu guard :disable (default)
Bpdus sent 152, received 27562

```

```

Interface
Name      PortID   Prio Cost   Sts Cost       Designated
-----
Bridge ID   PortID
-----

```

**Example
(with EDS &
PVID)**

```

Gi 1/0    128.1223 128 20000  EDS 0          32768 0001.e800.a12b 128.1223
FTOS#show spanning-tree pvst vlan 2 interface gigabitethernet 1/0

GigabitEthernet 1/0 of VLAN 2 is PVID_INC discarding

Edge port:no (default) port guard :none (default)
Link type: point-to-point (auto) bpdu filter:disable (default)
Bpdu guard :disable (default)
Bpdus sent 1, received 0

Interface
Name      PortID  Prio Cost   Sts Cost      Designated
-----  -
Gi 1/0    128.1223 128 20000  EDS 0      32768 0001.e800.a12b 128.1223

```

**Example
(guard)**

```

FTOS#show spanning-tree pvst vlan 5 guard
Interface
Name      Instance  Sts          Guard type
-----  -
Gi 0/1    5         INCON(Root)  Rootguard
Gi 0/2    5         FWD          Loopguard
Gi 0/3    5         EDS(Shut)   Bpduguard

```

Table 41-1. show spanning-tree pvst guard Command Information

Field	Description
Interface Name	PVST interface
Instance	PVST instance
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut)
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard)

**Related
Commands**

spanning-tree pvst	Configure PVST+ on an interface.
------------------------------------	----------------------------------

spanning-tree pvst



Configure a PVST+ interface with one of these settings: edge port with optional Bridge Port Data Unit (BPDU) guard, port disablement if an error condition occurs, port priority or cost for a VLAN range, loop guard, or root guard.

Syntax

```
spanning-tree pvst {edge-port [bpduguard [shutdown-on-violation]] | err-disable | vlan
vlan-range {cost number | priority value} | loopguard | rootguard}
```

Parameters

edge-port	Enter the keyword edge-port to configure the interface as a PVST+ edge port.
bpduguard	Enter the keyword portfast to enable Portfast to move the interface into forwarding mode immediately after the root fails. Enter the keyword bpduguard to disable the port when it receives a BPDU.

shutdown-on-violation	(OPTIONAL) Enter the keyword shutdown-on-violation to hardware disable an interface when a BPDU is received and the port is disabled.
err-disable	Enter the keyword err-disable to enable the port to be put into error-disable state (EDS) if an error condition occurs.
vlan <i>vlan-range</i>	Enter the keyword vlan followed by the VLAN number(s). Range: 1 to 4094
cost <i>number</i>	Enter the keyword cost followed by the port cost value. Range: 1 to 200000 Defaults: 100 Mb/s Ethernet interface = 200000 1-Gigabit Ethernet interface = 20000 10-Gigabit Ethernet interface = 2000 Port Channel interface with one 100 Mb/s Ethernet = 200000 Port Channel interface with one 1-Gigabit Ethernet = 20000 Port Channel interface with one 10-Gigabit Ethernet = 2000 Port Channel with two 1-Gigabit Ethernet = 18000 Port Channel with two 10-Gigabit Ethernet = 1800 Port Channel with two 100-Mbps Ethernet = 180000
priority <i>value</i>	Enter the keyword priority followed the Port priority value in increments of 16. Range: 0 to 240. Default: 128
loopguard	(C-, S-, and E-Series TeraScale only) Enter the keyword loopguard to enable loop guard on a PVST+ port or port-channel interface.
rootguard	(C-, S-, and E-Series TeraScale only) Enter the keyword rootguard to enable root guard on a PVST+ port or port-channel interface.

Defaults Not Configured

Command Modes INTERFACE

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced the loopguard and rootguard options on the E-Series TeraScale, C-Series, and S-Series.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced hardware shutdown-on-violation option
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added the optional Bridge Port Data Unit (BPDU) guard
Version 6.2.1.1	Introduced

Usage Information

The BPDU guard option prevents the port from participating in an active STP topology in case a BPDU appears on a port unintentionally, or is misconfigured, or is subject to a DOS attack. This option places the port into an error disable state if a BPDU appears, and a message is logged so that the administrator can take corrective action.



Note: A port configured as an edge port, on a PVST switch, will immediately transition to the forwarding state. Only ports connected to end-hosts should be configured as an edge port. Consider an edge port similar to a port with a spanning-tree portfast enabled.

If shutdown-on-violation is not enabled, BPDUs will still be sent to the RPM CPU.

Root guard and loop guard cannot be enabled at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message is displayed:

```
% Error: RootGuard is configured. Cannot configure LoopGuard.
```

When used in a PVST+ network, loop guard is performed per-port or per-port channel at a VLAN level. If no BPDUs are received on a VLAN interface, the port or port-channel transitions to a loop-inconsistent (blocking) state only for this VLAN.

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an err-disabled blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a loop-inconsistent blocking state and no traffic is forwarded on the port.

Example

```
FTOS(conf-if-gi-1/1)#spanning-tree pvst vlan 3 cost 18000
FTOS(conf-if-gi-1/1)#end
FTOS(conf-if-gi-1/1)#show config
!
interface GigabitEthernet 1/1
  no ip address
  switchport
  spanning-tree pvst vlan 3 cost 18000
  no shutdown
FTOS(conf-if-gi-1/1)#end

FTOS#
```

Related Commands

[show spanning-tree pvst](#)

[View PVST+ configuration](#)

spanning-tree pvst err-disable

C E S

S4810

S4820T

Place ports in an err-disabled state if they receive a PVST+ BPDU when they are members an untagged VLAN.

Syntax spanning-tree pvst err-disable cause invalid-pvst-bpdu

Defaults Enabled; ports are placed in err-disabled state if they receive a PVST+ BPDU when they are members of an untagged VLAN.

Command Modes INTERFACE

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced

Usage Information

Some non-Dell Force10 systems which have hybrid ports participating in PVST+ transmit two kinds of BPDUs: an 802.1D BPDU and an untagged PVST+ BPDU.

Dell Force10 systems do not expect PVST+ BPDU on an untagged port. If this happens, FTOS places the port in error-disable state. This behavior might result in the network not converging. To prevent FTOS from executing this action, use the command `no spanning-tree pvst err-disable cause invalid-pvst-bpdu`.

Related Commands

[show spanning-tree pvst](#) View the PVST+ configuration.

tc-flush-standard

C E S

S4810

S4820T

Enable the MAC address flushing upon receiving every topology change notification.

Syntax tc-flush-standard

To disable, use the `no tc-flush-standard` command.

Defaults Disabled

Command Modes CONFIGURATION

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

Version 6.5.1.0	Introduced
-----------------	------------

Usage Information

By default FTOS implements an optimized flush mechanism for PVST+. This helps in flushing the MAC addresses only when necessary (and less often) allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, this *knob* command can be turned on to enable flushing MAC addresses upon receiving every topology change notification.

vlan bridge-priority

C E S

S4810

S4820T

Set the PVST+ bridge-priority for a VLAN or a set of VLANs.

Syntax

vlan *vlan-range* bridge-priority *value*

To return to the default value, enter no vlan bridge-priority command.

Parameters

vlan <i>vlan-range</i>	Enter the keyword <i>vlan</i> followed by the VLAN number(s). Range: 1 to 4094
bridge-priority <i>value</i>	Enter the keyword <i>bridge-priority</i> followed by the bridge priority value in increments of 4096. Range: 0 to 61440 Default: 32768

Defaults

32768

Command Modes

CONFIGURATION (conf-pvst)

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Related Commands

vlan forward-delay	Change the time interval before FTOS transitions to the forwarding state
vlan hello-time	Change the time interval between BPDUs
vlan max-age	Change the time interval before PVST+ refreshes
show spanning-tree pvst	Display the PVST+ configuration

vlan forward-delay

C E S

S4810

S4820T

Set the amount of time the interface waits in the Listening State and the Learning State before transitioning to the Forwarding State.

Syntax

vlan *vlan-range* forward-delay *seconds*

To return to the default setting, enter no vlan forward-delay command.

Parameters

vlan <i>vlan-range</i>	Enter the keyword <code>vlan</code> followed by the VLAN number(s). Range: 1 to 4094
forward-delay <i>seconds</i>	Enter the keyword <code>forward-delay</code> followed by the time interval, in seconds, that FTOS waits before transitioning PVST+ to the forwarding state. Range: 4 to 30 seconds Default: 15 seconds

Defaults

15 seconds

Command Modes

CONFIGURATION (conf-pvst)

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Related Commands

vlan bridge-priority	Set the bridge-priority value
vlan hello-time	Change the time interval between BPDUs
vlan max-age	Change the time interval before PVST+ refreshes
show spanning-tree pvst	Display the PVST+ configuration

vlan hello-time

C E S

S4810

S4820T

Set the time interval between generation of PVST+ 7Bridge Protocol Data Units (BPDUs).

Syntax

vlan *vlan-range* hello-time *seconds*

To return to the default value, enter no vlan hello-time command.

Parameters	<i>vlan vlan-range</i>	Enter the keyword vlan followed by the VLAN number(s). Range: 1 to 4094
	<i>hello-time seconds</i>	Enter the keyword hello-time followed by the time interval, in seconds, between transmission of BPDUs. Range: 1 to 10 seconds Default: 2 seconds
Defaults	2 seconds	
Command Modes	CONFIGURATION (conf-pvst)	
Command History	version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.2.1.1	Introduced
Related Commands	vlan bridge-priority	Set the bridge-priority value
	vlan forward-delay	Change the time interval before FTOS transitions to the forwarding state
	vlan max-age	Change the time interval before PVST+ refreshes
	show spanning-tree pvst	Display the PVST+ configuration

vlan max-age

C E S

S4810

S4820T

Set the time interval for the PVST+ bridge to maintain configuration information before refreshing that information.

Syntax

*vlan **vlan-range** max-age **seconds***

To return to the default, use the **no vlan max-age** command.

Parameters	<i>vlan vlan-range</i>	Enter the keyword vlan followed by the VLAN number(s). Range: 1 to 4094
	<i>max-age seconds</i>	Enter the keyword max-age followed by the time interval, in seconds, that FTOS waits before refreshing configuration information. Range: 6 to 40 seconds Default: 20 seconds
Defaults	20 seconds	

Command Modes

CONFIGURATION (conf-pvst)

Command History

version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced

Related Commands

vlan bridge-priority	Set the bridge-priority value
vlan forward-delay	Change the time interval before FTOS transitions to the forwarding state
vlan hello-time	Change the time interval between BPDUs
show spanning-tree pvst	Display the PVST+ configuration

Quality of Service (QoS)

Overview

FTOS commands for Quality of Service (QoS) include traffic conditioning and congestion control. QoS commands are supported on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **C** C-Series, **S** S-Series, **S4810**, **S4820T**, or **Z** Z-Series.

This chapter contains the following sections:

- [Global Configuration Commands](#)
- [Per-Port QoS Commands](#)
- [Policy-Based QoS Commands](#)
- [Queue-Level Debugging \(E-Series Only\)](#)

Global Configuration Commands

- [qos-rate-adjust](#)

qos-rate-adjust

C **E** **S**

S4810

S4820T

By default, while rate limiting, policing, and shaping, FTOS does not include the Preamble, SFD, or the IFG fields. These fields are overhead; only the fields from MAC Destination Address to the CRC are used for forwarding and are included in these rate metering calculations. You can optionally include overhead fields in rate metering calculations by enabling QoS Rate Adjustment.

Syntax `qos-rate-adjustment overhead-bytes`

Parameters

<i>overhead-bytes</i>	Include a specified number of bytes of packet overhead to include in rate limiting, policing, and shaping calculations. C-Series and S-Series Range: 1-31 E-Series Range: 1-144
-----------------------	---

Defaults

QoS Rate Adjustment is disabled by default, and no `qos-rate-adjust` is listed in the running-configuration

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced

Per-Port QoS Commands

Per-port QoS (“port-based QoS”) allows users to defined QoS configuration on a per-physical-port basis. The commands include:

- [dot1p-priority](#)
- [rate limit](#)
- [rate police](#)
- [rate shape](#)
- [service-class dot1p-mapping](#)
- [service-class dynamic dot1p](#)
- [show interfaces rate](#)
- [strict-priority unicast queue](#)

dot1p-priority

C **E** **S**

Assign a value to the IEEE 802.1p bits on the traffic received by this interface.

S4810

S4820T

Syntax dot1p-priority *priority-value*

To delete the IEEE 802.1p configuration on the interface, enter no dot1p-priority.

Parameters

<i>priority-value</i>	Enter a value from 0 to 7.
dot1p	Queue Number
0	2
1	0
2	1
3	3
4	4
5	5
6	6
7	7
	For the C-Series and S-Series , enter a value 0, 2, 4, or 6
dot1p	Queue Number
0	1
1	0
2	0
3	1
4	2
5	2
6	3
7	3

Defaults No default behavior or values

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

The **dot1p-priority** command changes the priority of incoming traffic on the interface. The system places traffic marked with a priority in the correct queue and processes that traffic according to its queue.

When you set the priority for a Port Channel, the physical interfaces assigned to the Port Channel are configured with the same value. You cannot assign **dot1p-priority** command to individual interfaces in a Port Channel.

rate limit

(E) Limit the outgoing traffic rate on the selected interface.

Syntax rate limit [kbps] *committed-rate* [*burst-KB*] [peak [kbps] *peak-rate* [*burst-KB*]] [vlan *vlan-id*]

Parameters

<code>kbps</code>	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On the E-Series, Force10 recommends using a value greater than or equal to 512 as lower values does not yield accurate results. The default granularity is Megabits per second (Mbps). Range: 0 to 10000000
<code>committed-rate</code>	Enter the bandwidth in Mbps Range: 0 to 10000
<code>burst-KB</code>	(OPTIONAL) Enter the burst size in KB. Range: 16 to 200000 Default: 50
<code>peak peak-rate</code>	(OPTIONAL) Enter the keyword <code>peak</code> followed by a number to specify the peak rate in Mbps. Range: 0 to 10000
<code>vlan vlan-id</code>	(OPTIONAL) Enter the keyword <code>vlan</code> followed by a VLAN ID to limit traffic to those specific VLANs. Range: 1 to 4094

Defaults

Granularity for `committed-rate` and `peak-rate` is Mbps unless the `kbps` option is used.

Command Modes

INTERFACE

Command History

Version 8.2.1.0	Added <code>kbps</code> option on E-Series.
Version 7.7.1.0	Removed from C-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Note: Per Port rate limit and rate police is supported for Layer 2 tagged and untagged switched traffic and for Layer 3 traffic. Per VLAN rate limit and rate police is supported on only tagged ports with Layer 2 switched traffic.

On one interface, you can configure the [rate limit](#) or [rate police](#) command for a VLAN or you can configure the [rate limit](#) or the [rate police](#) command for the interface. For each physical interface, you can configure six [rate limit](#) commands specifying different VLANs.

If you receive the error message:

```
%Error: Specified VLANs overlap with existing config.
```

After configuring VLANs in the [rate police](#) command, check to see if the same VLANs are used in [rate limit](#) command on other interfaces. To clear the problem, remove the [rate limit](#) configuration(s), and re-configure the [rate police](#) command. After the [rate police](#) command is configured, return to the other interfaces and re-apply the [rate limit](#) configuration.

rate police

C E S

S4810

S4820T

Police the incoming traffic rate on the selected interface.

Syntax rate police [kbps] *committed-rate* [*burst-KB*] [peak [kbps] *peak-rate* [*burst-KB*]] [vlan *vlan-id*]

Parameters

kbps	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On C-Series, S-Series, S4810, and S4820T make the following value a multiple of 64. On the E-Series, Force10 recommends using a value greater than or equal to 512 as lower values does not yield accurate results. The default granularity is Megabits per second (Mbps). Range: 0 to 10000000
<i>committed-rate</i>	Enter a number as the bandwidth in Mbps. Range: 0 to 10000
<i>burst-KB</i>	(OPTIONAL) Enter a number as the burst size in KB. Range: 16 to 200000 Default: 50
peak <i>peak-rate</i>	(OPTIONAL) Enter the keyword peak followed by a number to specify the peak rate in Mbps. Range: 0 to 10000
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by a VLAN ID to police traffic to those specific VLANs. Range: 1 to 4094

Defaults Granularity for *committed-rate* and *peak-rate* is Mbps unless the kbps option is used.

Command Mode INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Added kbps option on C-Series, E-Series, and S-Series.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information



Note: Per Port rate limit and rate police is supported for Layer 2 tagged and untagged switched traffic and for Layer 3 traffic. Per VLAN rate limit and rate police is supported on only tagged ports with Layer 2 switched traffic.

C-Series and S-Series

On *one* interface, you can configure the [rate police](#) command for a VLAN or you can configure the [rate police](#) command for an interface. For each physical interface, you can configure three [rate police](#) commands specifying different VLANs.

E-Series

On *one* interface, you can configure the rate limit or [rate police](#) command for a VLAN or you can configure the rate limit or the [rate police](#) command for the interface.

For each physical interface, you can configure six [rate police](#) commands specifying different VLANs.

After configuring VLANs in the [rate police](#) command, if this error message appears:

```
%Error: Specified VLANs overlap with existing config.
```

Check to if the same VLANs are used with the rate limit command on other interfaces. To clear the problem, remove the rate limit configuration(s), and re-configure the [rate police](#) command. After the [rate police](#) command is configured, return to the other interfaces and re-apply the rate limit configuration.

Related Commands

rate-police	Police traffic output as part of the designated policy.
-----------------------------	---

rate shape

C E S

Shape the traffic output on the selected interface.

S4810

S4820T

Syntax

```
rate shape [kbps] rate [burst-KB]
```

Parameters

<i>kbps</i>	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On C-Series and S-Series make the following value a multiple of 64. The default granularity is Megabits per second (Mbps). Range: 0-10000000
<i>rate</i>	Enter the outgoing rate in multiples of 10 Mbps. Range: 10 to 10000
<i>burst-KB</i>	(OPTIONAL) Enter a number as the burst size in KB. Range: 0 to 10000 Default: 10

Defaults

Granularity for *rate* is Mbps unless the *kbps* option is used.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Added <i>kbps</i> option on C-Series, E-Series, and Series.
Version 7.6.1.0	Introduced on S-Series and on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

On 40-port 10G linecards, if the traffic is shaped between 64 and 1000kbs, for some values the shaped rate is much less than the value configured. Do not use values in this range for 10G interfaces.

Related Commands

[rate-shape](#) Shape traffic output as part of the designated policy.

service-class dot1p-mapping

S4810

Map the service class dot1p value to a CoS queue value.

S4820T

Syntax

service-class dot1p-mapping {dot1p0 *value* | dot1p1 *value* | dot1p2 *value* | dot1p3 *value* | dot1p4 *value* | dot1p5 *value* | dot1p6 *value* | dot1p7 *value*}

Parameters

dot1p <i>value</i>	Enter the keyword dot1p value followed by the CoS queue value that will be mapped. dot1p Range: 0 to 7. CoS queue value Range 0 to 3.
--------------------	--

Defaults

For each dot1p Priority, the default CoS queue value is shown below:

dot1p Priority	0	1	2	3	4	5	6	7
CoS Queue	0	0	0	1	2	3	3	3

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on the S4810.
Version 8.3.16.0	Introduced on MXL 10/40GbE Switch IO Module

Related Commands

[show qos](#) Displays the dot1p priority to queue mapping on the switch.
[dot1p-queue-mapping](#)

Usage Information

To apply dot1p-queue-mapping, use the service-class dynamic dot1p command.

service-class dynamic dot1p

C E S

S4810

S4820T

Honor all 802.1p markings on incoming switched traffic on an interface (from INTERFACE mode) or on all interfaces (from CONFIGURATION mode). A CONFIGURATION mode entry supersedes INTERFACE mode entries.

Syntax

service-class dynamic dot1p

To return to the default setting, enter `no service-class dynamic dot1p`.

Defaults

All dot1p traffic is mapped to Queue 0 unless `service-class dynamic dot1p` is enabled. Then the default mapping is as follows:

Table 42-1. Default dot1p to Queue Mapping

dot1p	E-Series Queue ID	C-Series Queue ID	S-Series Queue ID
0	2	1	0
1	0	0	0
2	1	0	0
3	3	1	1
4	4	2	2
5	5	2	3
6	6	3	3
7	7	3	3

Command Modes

INTERFACE

CONFIGURATION (C-Series and S-Series only)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Available globally on the C-Series and S-Series so that the configuration applies to all ports.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 6.5.1.0	Expanded command to permit configuration on port channels
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Enter this command to honor all incoming 802.1p markings, on incoming switched traffic, on the interface. By default, this facility is not enabled (that is, the 802.1p markings on incoming traffic are not honored).

This command can be applied on both physical interfaces and port channels. When you set the `service-class dynamic` for a port channel, the physical interfaces assigned to the port channel are automatically configured; you cannot assign the `service-class dynamic` command to individual interfaces in a port channel.

On the C-Series and S-Series all traffic is by default mapped to the same queue, Queue 0. If you honor dot1p on ingress, then you can create service classes based the queueing strategy using the command `service-class dynamic dot1p` from INTERFACE mode. You may apply this queueing strategy to all interfaces by entering this command from CONFIGURATION mode.

- All dot1p traffic is mapped to Queue 0 unless service-class dynamic dot1p is enabled on an interface or globally.
- Layer 2 or Layer 3 service policies supercede dot1p service classes.

service-class bandwidth-weight

C **S** Specify a minimum bandwidth for queues

Syntax service-class bandwidth-weight queue0 *number* queue1 *number* queue2 *number* queue3 *number*

Parameters	<i>number</i>	Enter the bandwidth-weight. The value must be a power of 2. Range 1-1024.
-------------------	---------------	---

Defaults None

Command Modes CONFIGURATION

Command History	Version 8.2.1.0	Introduced on C-Series and S-Series.
------------------------	-----------------	--------------------------------------

Usage Information Guarantee a minimum bandwidth to different queues globally using the command service-class bandwidth-weight from CONFIGURATION mode. The command is applied in the same way as the bandwidth-weight command in an output QoS policy. The bandwidth-weight command in QOS-POLICY-OUT mode super cedes the service-class bandwidth-weight command.

show interfaces rate

E Display information of either rate limiting or rate policing on the interface.

Syntax show interfaces [*interface*] rate [limit | police]

Parameters	<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a SONET interface, enter the keyword sonet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
	limit	(OPTIONAL) Enter the keyword limit to view the outgoing traffic rate.
	police	(OPTIONAL) Enter the keyword police to view the incoming traffic rate.

Command Mode EXEC

EXEC Privilege

Command History

pre-Version 6.1.1.1 Introduced on E-Series

Example (rate limit)

```

FTOS#show interfaces gigabitEthernet 1/1 rate limit
Rate limit 300 (50) peak 800 (50)
Traffic Monitor 0: normal 300 (50) peak 800 (50)
  Out of profile yellow 23386960 red 320605113
Traffic Monitor 1: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 2: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 3: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 4: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 5: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 6: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 7: normal NA peak NA
  Out of profile yellow 0 red 0
Total: yellow 23386960 red 320605113

```

Table 42-2. show interfaces Command Example Fields

Field	Description
Rate limit	Committed rate (Mbps) and burst size (KB) of the committed rate
peak	Peak rate (Mbps) and burst size (KB) of the peak rate
Traffic monitor 0	Traffic coming to class 0
Normal	Committed rate (Mbps) and burst size (KB) of the committed rate
peak	Peak rate (Mbps) and burst size (KB) of the peak rate
Out of profile Yellow	Number of packets that have exceeded the configured committed rate
Out of profile Red	Number of packets that have exceeded the configured peak rate
Traffic monitor 1	Traffic coming to class 1
Traffic monitor 2	Traffic coming to class 2
Traffic monitor 3	Traffic coming to class 3
Traffic monitor 4	Traffic coming to class 4
Traffic monitor 5	Traffic coming to class 5
Traffic monitor 6	Traffic coming to class 6
Traffic monitor 7	Traffic coming to class 7
Total: yellow	Total number of packets that have exceeded the configured committed rate
Total: red	Total number of packets that have exceeded the configured peak rate

Example (rate police)

```

FTOS#show interfaces gigabitEthernet 1/2 rate police
Rate police 300 (50) peak 800 (50)
Traffic Monitor 0: normal 300 (50) peak 800 (50)
  Out of profile yellow 23386960 red 320605113
Traffic Monitor 1: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 2: normal NA peak NA
  Out of profile yellow 0 red 0

```



```

Traffic Monitor 3: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 4: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 5: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 6: normal NA peak NA
  Out of profile yellow 0 red 0
Traffic Monitor 7: normal NA peak NA
  Out of profile yellow 0 red 0
Total: yellow 23386960 red 320605113

```

Table 42-3. show interfaces police Command Example Fields

Field	Description
Rate police	Committed rate (Mbps) and burst size (KB) of the committed rate
peak	Peak rate (Mbps) and burst size (KB) of the peak rate
Traffic monitor 0	Traffic coming to class 0
Normal	Committed rate (Mbps) and burst size (KB) of the committed rate
peak	Peak rate (Mbps) and burst size (KB) of the peak rate
Out of profile Yellow	Number of packets that have exceeded the configured committed rate
Out of profile Red	Number of packets that have exceeded the configured peak rate
Traffic monitor 1	Traffic coming to class 1
Traffic monitor 2	Traffic coming to class 2
Traffic monitor 3	Traffic coming to class 3
Traffic monitor 4	Traffic coming to class 4
Traffic monitor 5	Traffic coming to class 5
Traffic monitor 6	Traffic coming to class 6
Traffic monitor 7	Traffic coming to class 7
Total: yellow	Total number of packets that have exceeded the configured committed rate
Total: red	Total number of packets that have exceeded the configured peak rate

strict-priority unicast queue

C **E** **S**

Configure a unicast queue as a strict-priority (SP) queue.

S4810

S4820T

Syntax strict-priority unicast queue *number*

Parameters

queue <i>number</i>	Enter the keyword unicast followed by the queue number. C-Series, S-Series, S4810, S4820T Range: 1 to 3 E-Series Range: 1 to 7
---------------------	--

Defaults No default behavior or value

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Once a unicast queue is configured as strict-priority, that particular queue, on the entire chassis, is treated as strict-priority queue. Traffic for a strict priority is scheduled before any other queues are serviced. For example, if you send 100% line rate traffic over the SP queue, it will *starve* all other queues on the ports on which this traffic is flowing.

Policy-Based QoS Commands

Policy-based traffic classification is handled with class maps. These maps classify unicast traffic into one of eight classes in E-Series and one of four classes in C-Series, S-Series, **S4810**, and **S4820T**. FTOS enables you to match multiple class maps and specify multiple match criteria. Policy-based QoS is not supported on logical interfaces, such as port-channels, VLANs, or loopbacks. The commands are:

- [bandwidth-percentage](#)
- [bandwidth-weight](#)
- [class-map](#)
- [clear qos statistics](#)
- [description](#)
- [match ip access-group](#)
- [match ip dscp](#)
- [match ip precedence](#)
- [match mac access-group](#)
- [match mac dot1p](#)
- [match mac vlan](#)
- [policy-aggregate](#)
- [policy-map-input](#)
- [policy-map-output](#)
- [qos-policy-input](#)
- [qos-policy-output](#)
- [queue backplane ignore-backpressure](#)
- [queue egress](#)
- [queue ingress](#)
- [rate-limit](#)
- [rate-police](#)

- [rate-shape](#)
- [service-policy input](#)
- [service-policy output](#)
- [service-queue](#)
- [set](#)
- [show cam layer2-qos](#)
- [show cam layer3-qos](#)
- [show qos class-map](#)
- [show qos dot1p-queue-mapping](#)
- [show qos policy-map](#)
- [show qos policy-map-input](#)
- [show qos policy-map-output](#)
- [show qos qos-policy-input](#)
- [show qos qos-policy-output](#)
- [show qos statistics](#)
- [show qos wred-profile](#)
- [test cam-usage](#)
- [threshold](#)
- [trust](#)
- [wred](#)
- [wred-profile](#)

bandwidth-percentage

E **S4810** Assign a percentage of weight to class/queue.

S4820T

Syntax bandwidth-percentage *percentage*

To remove the bandwidth percentage, use the no bandwidth-percentage command.

Parameters	<i>percentage</i>	Enter the percentage assignment of weight to class/queue. Range: 0 to 100% (granularity 1%)
-------------------	-------------------	--

Defaults No default behavior or values

Command Modes CONFIGURATION (conf-qos-policy-out)



Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 6.2.1.1	Introduced on E-Series

Usage Information The unit of bandwidth percentage is 1%. A bandwidth percentage of 0 is allowed and will disable the scheduling of that class. If the sum of the bandwidth percentages given to all eight classes exceeds 100%, the bandwidth percentage will automatically scale down to 100%.

Related Commands

qos-policy-output	Create a QoS output policy.
-----------------------------------	-----------------------------

bandwidth-weight

  Assign a priority weight to a queue.

Syntax bandwidth-weight *weight*

To remove the bandwidth weight, use the no bandwidth-weight command.

Parameters

<i>weight</i>	Enter the weight assignment to queue. Range: 1 to 1024 (in increments of powers of 2: 2, 4, 8, 16, 32, 64, 128, 256, 512, or 1024)
---------------	---

Defaults No default behavior or values

Command Modes CONFIGURATION (conf-qos-policy-out)

Command History

Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series

Usage Information This command provides a minimum bandwidth guarantee to traffic flows in a particular queue. The minimum bandwidth is provided by scheduling packets from that queue a certain number of times relative to scheduling packets from the other queues using the Deficit Round Robin method.


Note: This command is not available on the S4810 or S4820T. Use the command [bandwidth-percentage](#).

Related Commands

qos-policy-output	Create a QoS output policy.
-----------------------------------	-----------------------------

class-map





Create/access a class map. Class maps differentiate traffic so that you can apply separate quality of service policies to each class.

Syntax class-map { match-all | match-any } *class-map-name* [layer2]

Parameters	match-all	Determines how packets are evaluated when multiple match criteria exist. Enter the keyword <code>match-all</code> to determine that the packets must meet all the match criteria in order to be considered a member of the class.
	match-any	Determines how packets are evaluated when multiple match criteria exist. Enter the keyword <code>match-any</code> to determine that the packets must meet at least one of the match criteria in order to be considered a member of the class.
	<i>class-map-name</i>	Enter a name of the class for the class map in a character format (32 character maximum).
	layer2	Enter the keyword <code>layer2</code> to specify a Layer 2 Class Map. Default: Layer 3

Defaults Layer 3

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Class-map names can be 32 characters. <code>layer2</code> available on C-Series and S-Series.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 7.4.1.0	E-Series Only: Expanded to add support for Layer 2

Usage Information Packets arriving at the input interface are checked against the match criteria, configured using this command, to determine if the packet belongs to that class. This command accesses the CLASS-MAP mode, where the configuration commands include `match ip` and `match mac` options.

Related Commands	ip access-list extended	Configure an extended IP ACL.
	ip access-list standard	Configure a standard IP ACL.
	match ip access-group	Configure the match criteria based on the access control list (ACL)
	match ip precedence	Identify IP precedence values as match criteria
	match ip dscp	Configure the match criteria based on the DSCP value
	match mac access-group	Configure a match criterion for a class map, based on the contents of the designated MAC ACL.
	match mac dot1p	Configure a match criterion for a class map, based on a dot1p value.
	match mac vlan	Configure a match criterion for a class map based on VLAN ID.
	service-queue	Assign a class map and QoS policy to different queues.
	show qos class-map	View the current class map information.

clear qos statistics

C E S

S4810

S4820T

Clears Matched Packets, Matched Bytes, and Dropped Packets. For TeraScale, clears Matched Packets, Matched Bytes, Queued Packets, Queued Bytes, and Dropped Packets.

Syntax clear qos statistics *interface-name*.

Parameters

interface-name

Enter one of the following keywords:

- For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

pre-Version 6.1.1.1 Introduced on E-Series

Usage Information

E-Series Only Behavior

If a Policy QoS is applied on an interface when clear qos statistics is issued, it will clear the egress counters in show queue statistics and vice versa. This behavior is due to the values being read from the same hardware registers.

The clear qos statistics command clears both the queued and matched byte and packet counters if the queued counters incremented based on classification of packets to the queues because of policy-based QoS. If the queued counters were incremented because of some other reason and do not reflect a matching QoS entry in CAM, then this command clears the matched byte and packet counters only.

Related Commands

[show qos statistics](#)

Display qos statistics.

match ip access-group

C E S

S4810

S4820T

Configure match criteria for a class map, based on the access control list (ACL).

Syntax match ip access-group *access-group-name* [set-ip-dscp *value*]

To remove ACL match criteria from a class map, enter no match ip access-group *access-group-name* [set-ip-dscp *value*] command.

Parameters	<i>access-group-name</i>	Enter the ACL name whose contents are used as the match criteria in determining if packets belong to the class specified by class-map.
	set-ip-dscp <i>value</i>	(OPTIONAL) Enter the keyword set-ip-dscp followed by the IP DSCP value. The matched traffic will be marked with the DSCP value. Range: 0 to 63

Defaults No default behavior or values

Command Modes CLASS-MAP CONFIGURATION (config-class-map)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Added DSCP Marking option support on S-Series
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 7.5.1.0	Added support for DSCP Marking option
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information You must enter the class-map command in order to access this command. Once the class map is identified, you can configure the match criteria. For class-map match-any, a maximum of five ACL match criteria are allowed. For class-map match-all, only one ACL match criteria is allowed.

Related Commands	class-map	Identify the class map.
-------------------------	---------------------------	-------------------------

description

C **E** **S**

Add a description to the selected policy map or QOS policy.

S4810

S4820T

Syntax description { *description* }

To remove the description, use the no description { *description* } command.

Parameters	<i>description</i>	Enter a description to identify the policies (80 characters maximum).
-------------------	--------------------	---

Defaults No default behavior or values

Command Modes CONFIGURATION (policy-map-input and policy-map-output; conf-qos-policy-in and conf-qos-policy-out; wred)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
pre-Version 7.7.1.0	Introduced

Related Commands

policy-map-input	Create an input policy map.
policy-map-output	Create an output policy map.
qos-policy-input	Create an input QOS-policy on the router.
qos-policy-output	Create an output QOS-policy on the router.
wred-profile	Create a WRED profile.

match ip dscp

C **E** **S**

Use a DSCP (Differentiated Services Code Point) value as a match criteria.

S4810

S4820T

Syntax

match ip dscp *dscp-list* [[multicast] set-ip-dscp *value*]

To remove a DSCP value as a match criteria, enter no match ip dscp *dscp-list* [[multicast] set-ip-dscp *value*] command.

Parameters

<i>dscp-list</i>	Enter the IP DSCP value(s) that is to be the match criteria. Separate values by commas — no spaces (1,2,3) or indicate a list of values separated by a hyphen (1-3). Range: 0 to 63
multicast	(OPTIONAL) Enter the keyword multicast to match against multicast traffic. Note: This option is not supported on C-Series or S-Series.
set-ip-dscp <i>value</i>	(OPTIONAL) Enter the keyword set-ip-dscp followed by the IP DSCP value. The matched traffic will be marked with the DSCP value. Range: 0 to 63 Note: This option is not supported on S-Series.

Defaults

No default behavior or values

Command Modes

CLASS-MAP CONFIGURATION (config-class-map)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Added keyword multicast . Added DSCP Marking option support on S-Series
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series Added support for DSCP Marking option
Version 6.2.1.1	Introduced on E-Series

Usage Information

You must enter the `class-map` command in order to access this command. Once the class map is identified, you can configure the match criteria.

The `match ip dscp` and `match ip precedence` commands are mutually exclusive.

Up to 64 IP DSCP values can be matched in one match statement. For example, to indicate IP DSCP values 0 1 2 3 4 5 6 7, enter either the command `match ip dscp 0,1,2,3,4,5,6,7` or `match ip dscp 0-7`.



Note: Only one of the IP DSCP values must be a successful match criterion, not all of the specified IP DSCP values need to match.

Related Commands

class-map	Identify the class map.
---------------------------	-------------------------

match ip precedence

C E S

Use IP precedence values as a match criteria.

S4810

S4820T

Syntax

`match ip precedence ip-precedence-list [[multicast] set-ip-dscp value]`

To remove IP precedence as a match criteria, enter no `match ip precedence ip-precedence-list [[multicast] set-ip-dscp value]` command.

Parameters

<i>ip-precedence-list</i>	Enter the IP precedence value(s) as the match criteria. Separate values by commas — no spaces (1,2,3) or indicate a list of values separated by a hyphen (1-3). Range: 0 to 7
multicast	(OPTIONAL) Enter the keyword <code>multicast</code> to match against multicast traffic. Note: This option is not supported on C-Series or S-Series.
set-ip-dscp <i>value</i>	(OPTIONAL) Enter the keyword <code>set-ip-dscp</code> followed by the IP DSCP value. The matched traffic will be marked with the DSCP value. Range: 0 to 63 Note: This option is not supported on S-Series.

Defaults

No default behavior or values

Command Modes

CLASS-MAP CONFIGURATION (`conf-class-map`)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Added keyword multicast . Added DSCP marking option support for S-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series Added support for DSCP Marking option
Version 6.2.1.1	Introduced on E-Series

Usage Information

You must enter the `class-map` command in order to access this command. Once the class map is identified, you can configure the match criteria. The `match ip precedence` command and the `match ip dscp` command are mutually exclusive.

Up to eight precedence values can be matched in one match statement. For example, to indicate the IP precedence values 0 1 2 3 enter either the command `match ip precedence 0-3` or `match ip precedence 0,1,2,3`.



Note: Only one of the IP precedence values must be a successful match criterion, not all of the specified IP precedence values need to match.

Related Commands

class-map	Identify the class map.
---------------------------	-------------------------

match mac access-group

C **E** **S**

S4810

S4820T

Configure a match criterion for a class map, based on the contents of the designated MAC ACL.

Syntax `match mac access-group {mac-acl-name}`

Parameters

<i>mac-acl-name</i>	Enter a MAC ACL name. Its contents will be used as the match criteria in the class map.
---------------------	---

Defaults No default values or behavior

Command Modes `class-map`

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Available on the C-Series and S-Series.
Version 7.5.1.0	Added support for DSCP Marking option
Version 7.4.1.0	Introduced

Usage Information You must enter the class-map command in order to access this command. Once the class map is identified, you can configure the match criteria.

Related Commands

class-map	Identify the class map.
---------------------------	-------------------------

match mac dot1p

C **E** **S**

Configure a match criterion for a class map, based on a dot1p value.

S4810

S4820T

Syntax match mac dot1p { *dot1p-list* }

Parameters

<i>dot1p-list</i>	Enter a dot1p value. Range: 0 to 7
-------------------	---------------------------------------

Defaults No default values or behavior

Command Modes class-map

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Available on the C-Series and S-Series.
Version 7.5.1.0	Added support for DSCP Marking option
Version 7.4.1.0	Introduced

Usage Information You must enter the class-map command in order to access this command. Once the class map is identified, you can configure the match criteria.

Related Commands

class-map	Identify the class map.
---------------------------	-------------------------

match mac vlan

C **E** **S**

Configure a match criterion for a class map based on VLAN ID.

S4810

S4820T

Syntax match mac vlan *number*

Parameters

<i>number</i>	Enter the VLAN ID. Range: 1 to 4094
---------------	--

Defaults None

Command Modes	class-map	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.0.1	Introduced
Usage Information	You must first enter the class-map command in order to access this command. You can match against only one VLAN ID.	
Related Commands	class-map	Create/access a class map.

policy-aggregate

C **E** **S**

S4810

S4820T

Allow an aggregate method of configuring per-port QoS via policy maps. An aggregate QoS policy is part of the policy map (input/output) applied on an interface.

Syntax `policy-aggregate qos-policy-name`

To remove a policy aggregate configuration, use no `policy-aggregate qos-policy-name` command.

Parameters	<code>qos-policy-name</code>	Enter the name of the policy map in character format (32 characters maximum)
-------------------	------------------------------	--

Defaults No default behavior or values

Command Modes CONFIGURATION (policy-map-input and policy-map-output)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Policy name character limit increased from 16 to 32.
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information **C-Series and S-Series**

Aggregate input/output QoS policy applies to all the port ingoing/outgoing traffic. Aggregate input/output QoS policy can co-exist with per queue input/output QoS policies.

1. If only aggregate input QoS policy exists, input traffic conditioning configurations (rate-police) will apply. Any marking configurations in aggregate input QoS policy will be ignored.

2. If aggregate input QoS policy and per class input QoS policy co-exist, then aggregate input QoS policy will preempt per class input QoS policy on input traffic conditioning (rate-police). In other words, if rate police configuration exists in aggregate QoS policy, the rate police configurations in per class QoS are ignored. Marking configurations in per class input QoS policy still apply to each queue.

E-Series

Aggregate input/output QoS policy applies to all the port ingoing/outgoing traffic. Aggregate input/output QoS policy can co-exist with per queue input/output QoS policies.

1. If only an aggregate input QoS policy exists, input traffic conditioning configurations (rate-police) will apply. Any marking configurations in the aggregate input QoS policy will be ignored.
2. If an aggregate input QoS policy and a per-class input QoS policy co-exist, then the aggregate input QoS policy will preempt the per-class input QoS policy on input traffic conditioning (rate-police). In other words, if a rate police configuration exists in the aggregate QoS policy, the rate police configurations in the per-class QoS are ignored. Marking configurations in the per-class input QoS policy still apply to each queue.
3. If only an aggregate output QoS policy exists, egress traffic conditioning configurations (rate-limit and rate-shape) in the aggregate output QoS policy will apply. Scheduling and queuing configurations in the aggregate output QoS policy (if existing) are ignored. Each queue will use default scheduling and queuing configuration (Weighted Random Early Detection (WRED) and Bandwidth).
4. If the aggregate output QoS policy and per-queue output QoS policy co-exist, the aggregate output QoS policy will preempt a per-queue output QoS policy on egress traffic conditioning (rate-limit). In other words, if a rate limit configuration exists in the aggregate output QoS policy, the rate limit configurations in per-queue output QoS policies are ignored. Scheduling and queuing configurations (WRED and Bandwidth) in the per-queue output QoS policy still apply to each queue.

Related Commands

policy-map-input	Create an input policy map
policy-map-output	Create an output policy map (E-Series Only)

policy-map-input

C **E** **S**

Create an input policy map.

54810

54820T

Syntax

`policy-map-input policy-map-name [layer2]`

To remove an input policy map, use the `no policy-map-input policy-map-name [layer2]` command.

Parameters

<i>policy-map-name</i>	Enter the name for the policy map in character format (32 characters maximum).
layer2	(OPTIONAL) Enter the keyword <code>layer2</code> to specify a Layer 2 Class Map. Default: Layer 3

Defaults	Layer 3														
Command Modes	CONFIGURATION														
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.2.1.0</td> <td>Policy name character limit increased from 16 to 32.</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>Version 7.4.1.0</td> <td>Expanded to add support for Layer 2</td> </tr> <tr> <td>pre-Version 6.1.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 8.2.1.0	Policy name character limit increased from 16 to 32.	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	Version 7.4.1.0	Expanded to add support for Layer 2	pre-Version 6.1.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T														
Version 8.3.7.0	Introduced on S4810														
Version 8.2.1.0	Policy name character limit increased from 16 to 32.														
Version 7.6.1.0	Introduced on S-Series														
Version 7.5.1.0	Introduced on C-Series														
Version 7.4.1.0	Expanded to add support for Layer 2														
pre-Version 6.1.1.1	Introduced on E-Series														
Usage Information	Input policy map is used to classify incoming traffic to different flows using class-map, QoS policy, or simply using incoming packets DSCP. This command enables policy-map-input configuration mode (conf-policy-map-in).														
Related Commands	<table border="1"> <tr> <td>service-queue</td> <td>Assign a class map and QoS policy to different queues.</td> </tr> <tr> <td>policy-aggregate</td> <td>Allow an aggregate method of configuring per-port QoS via policy maps.</td> </tr> <tr> <td>service-policy input</td> <td>Apply an input policy map to the selected interface.</td> </tr> </table>	service-queue	Assign a class map and QoS policy to different queues.	policy-aggregate	Allow an aggregate method of configuring per-port QoS via policy maps.	service-policy input	Apply an input policy map to the selected interface.								
service-queue	Assign a class map and QoS policy to different queues.														
policy-aggregate	Allow an aggregate method of configuring per-port QoS via policy maps.														
service-policy input	Apply an input policy map to the selected interface.														

policy-map-output

C **E** **S**

Create an output policy map.

S4810

S4820T

Syntax `policy-map-output policy-map-name`

To remove a policy map, use the `no policy-map-output policy-map-name` command.

Parameters	<table border="1"> <tr> <td><i>policy-map-name</i></td> <td>Enter the name for the policy map in character format (16 characters maximum).</td> </tr> </table>	<i>policy-map-name</i>	Enter the name for the policy map in character format (16 characters maximum).								
<i>policy-map-name</i>	Enter the name for the policy map in character format (16 characters maximum).										
Defaults	No default behavior or values										
Command Modes	CONFIGURATION										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.2.1.0</td> <td>Policy name character limit increased from 16 to 32.</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on C-Series and S-Series</td> </tr> <tr> <td>pre-Version 6.1.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 8.2.1.0	Policy name character limit increased from 16 to 32.	Version 7.6.1.0	Introduced on C-Series and S-Series	pre-Version 6.1.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 8.2.1.0	Policy name character limit increased from 16 to 32.										
Version 7.6.1.0	Introduced on C-Series and S-Series										
pre-Version 6.1.1.1	Introduced on E-Series										

Usage Information

Output policy map is used to assign traffic to different flows using QoS policy. This command enables the policy-map-output configuration mode (conf-policy-map-out).

Related Commands

service-queue	Assign a class map and QoS policy to different queues.
policy-aggregate	Allow an aggregate method of configuring per-port QoS via policy maps.
service-policy output	Apply an output policy map to the selected interface.

qos-policy-input

C **E** **S**

Create a QoS input policy on the router.

S4810

S4820T

Syntax

`qos-policy-input qos-policy-name [layer2]`

To remove an existing input QoS policy from the router, use `no qos-policy-input qos-policy-name [layer2]` command.

Parameters

<i>qos-policy-name</i>	Enter your input QoS policy name in character format (32 character maximum).
layer2	(OPTIONAL) Enter the keyword layer2 to specify a Layer 2 Class Map. Default: Layer 3

Defaults

Layer 3

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Policy name character limit increased from 16 to 32.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Expanded to add support for Layer 2

Usage Information

Use this command to specify the name of the input QoS policy. Once input policy is specified, rate-police can be defined. This command enables the qos-policy-input configuration mode—(conf-qos-policy-in).

When changing a “service-queue” configuration in a QoS policy map, all QoS rules are deleted and re-added automatically to ensure that the order of the rules is maintained. As a result, the Matched Packets value shown in the “show qos statistics” command is reset.



Note: On ExaScale, FTOS cannot classify IGMP packets on a Layer 2 interface using Layer 3 policy map. The packets always take the default queue, Queue 0, and cannot be rate-policed.

Related Commands

rate-police	Incoming traffic policing function
-----------------------------	------------------------------------

qos-policy-output

C E S

Create a QoS output policy.

S4810

S4820T

Syntax

`qos-policy-output qos-policy-name`

To remove an existing output QoS policy, use `no qos-policy-output qos-policy-name` command.

Parameters

<i>qos-policy-name</i>	Enter your output QoS policy name in character format (32 character maximum).
------------------------	---

Defaults

No default behavior or values

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Policy name character limit increased from 16 to 32.
Version 7.6.1.0	Introduced on C-Series and S-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

Use this command to specify the name of the output QoS policy. Once output policy is specified, rate-limit, bandwidth-percentage, and WRED can be defined. This command enables the `qos-policy-output` configuration mode—(`conf-qos-policy-out`).

When changing a “service-queue” configuration in a QoS policy map, all QoS rules are deleted and re-added automatically to ensure that the order of the rules is maintained. As a result, the Matched Packets value shown in the “show qos statistics” command is reset.

Related Commands

rate-limit	Outgoing traffic rate-limit functionality
bandwidth-percentage	Assign weight to class/queue percentage
bandwidth-weight	Assign a priority weight to a queue.
wred	Assign yellow or green drop precedence

queue backplane ignore-backpressure

E Reduce egress pressure by ignoring the ingress backpressure

Syntax queue backplane ignore-backpressure

To return to the default, use the no queue backplane ignore-backpressure command.

Defaults No default behavior or values

Command Modes CONFIGURATION

Command History

Version 7.7.1.0	Introduced on E-Series
-----------------	------------------------

queue egress

E Assign a WRED Curve to all eight egress Multicast queues or designate the percentage for the Multicast bandwidth queue.

Syntax queue egress multicast linecard { *slot number* port-set *number* | all } [wred-profile *name* | multicast-bandwidth *percentage*]

To return to the default, use the no queue egress multicast linecard { *slot number* port-set *number* | all } [wred-profile *name* | multicast-bandwidth *percentage*] command.

Parameters

linecard <i>number</i>	Enter the keyword linecard followed by the line card slot number. E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
port-set <i>number</i>	Enter the keyword port-set followed by the line card's port pipe. Range: 0 or 1
all	Enter the keyword all to apply to all line cards.
wred-profile <i>name</i>	(OPTIONAL) Enter the keyword wred-profile followed by your WRED profile name in character format (16 character maximum). Or use one of the pre-defined WRED profile names. Pre-defined Profiles: wred_drop, wred-ge_y, wred_ge_g, wred_teng_y, wred_teng_g
multicast-bandwidth <i>percentage</i>	(OPTIONAL) Enter the keyword multicast-bandwidth followed by the bandwidth percentage. Range: 0 to 100%

Defaults No default behavior or values

Command Modes CONFIGURATION

Command History

Version 7.5.1.0	Added support for multicast-bandwidth
Version 7.4.1.0 and 6.5.3.0	Introduced on E-Series

Usage Information

This command does not uniquely identify a queue, but rather identifies only a set of queues. The WRED curve is applied to all eight egress Multicast queues.

Important Points to Remember — multicast-bandwidth option

- A unique Multicast Weighted Fair Queuing (WFQ) setting can be applied only on a per port-pipe basis. The minimum percentage of the multicast bandwidth assigned to any of the ports in the port-pipe will take effect for the entire port-pipe.
- If the percentage of multicast bandwidth is 0, control traffic going through multicast queues are dropped.
- The no form of the command without multicast-bandwidth and wred-profile, will remove both the wred-profile and multicast-bandwidth configuration.
- On 10 Gigabit ports only, the multicast bandwidth option will work only if the total unicast bandwidth is more than the multicast bandwidth.
- If strict priority is applied along with multicast-bandwidth, the effect of strict priority is on all ports where unicast and multicast bandwidth are applied.
- When multicast bandwidth is assigned along with unicast bandwidth, first multicast bandwidth will be reserved for that port, then the remaining unicast bandwidth configured is adjusted according to the bandwidth available after reserving for multicast bandwidth.

Related Commands

show queue statistics egress	Display the egress queue statistics
--	-------------------------------------

queue ingress


E Assign a WRED Curve to all eight ingress Multicast queues or designate the percentage for the Multicast bandwidth queue.

Syntax `queue ingress multicast {linecard slot number port-set number | all} [wred-profile name]`

To return to the default, use the `no queue ingress multicast {linecard slot number port-set number | all} [wred-profile name]` command.

Parameters

<code>linecard <i>number</i></code>	Enter the keyword <code>linecard</code> followed by the line card slot number. E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
<code>port-set <i>number</i></code>	Enter the keyword <code>port-set</code> followed by the line card's port pipe. Range: 0 or 1
<code>all</code>	Enter the keyword <code>all</code> to apply to all line cards.
<code>wred-profile <i>name</i></code>	(OPTIONAL) Enter the keyword <code>wred-profile</code> followed by your WRED profile name in character format (16 character maximum). Or use one of the pre-defined WRED profile names. Pre-defined Profiles: <code>wred_drop</code> , <code>wred-ge_y</code> , <code>wred_ge_g</code> , <code>wred_teng_y</code> , <code>wred_teng_g</code>

Defaults	No default behavior or values
Command Modes	CONFIGURATION
Command History	Version 7.4.1.0 and 6.5.3.0 Introduced on E-Series
Usage Information	This command does not uniquely identify a queue, but rather identifies only a set of queues. The WRED Curve is applied to all eight ingress Multicast queues.
	 Note: The multicast-bandwidth option is not supported on queue ingress. If you attempt to use the multicast-bandwidth option, the following reject error message is generated: <pre style="margin-left: 40px;">% Error:Bandwidth-percent is not allowed for ingress multicast</pre>
Related Commands	show queue statistics ingress Display the ingress queue statistics

rate-limit



Specify the rate-limit functionality on outgoing traffic as part of the selected policy.

Syntax

rate-limit [kbps] *committed-rate* [*burst-KB*] [peak [kbps] *peak-rate* [*burst-KB*]]

Parameters

<i>kbps</i>	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On the E-Series, Force10 recommends using a value greater than or equal to 512 as lower values does not yield accurate results. The default granularity is Megabits per second (Mbps). Range: 0-10000000
<i>committed-rate</i>	Enter the committed rate in Mbps. Range: 0 to 10000 Mbps
<i>burst-KB</i>	(OPTIONAL) Enter the burst size in KB. Range: 16 to 200000 KB Default: 50 KB
<i>peak peak-rate</i>	(OPTIONAL) Enter the keyword <i>peak</i> followed by the peak rate in Mbps. Range: 0 to 10000 Mbps Default: Same as designated for <i>committed-rate</i>

Defaults

Burst size is 50 KB. *peak-rate* is by default the same as *committed-rate*. Granularity for *committed-rate* and *peak-rate* is Mbps unless the *kbps* option is used.

Command Modes

QOS-POLICY-OUT

Command History

Version 8.2.1.0	Added <i>kbps</i> option on E-Series.
Version 7.7.1.0	Removed from C-Series

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

rate limit	Specify rate-limit functionality on the selected interface.
qos-policy-output	Create a QoS output policy.

rate-police

C E S

S4810

S4820T

Specify the policing functionality on incoming traffic.

Syntax

rate-police [kbps] *committed-rate* [*burst-KB*] [peak [kbps] *peak-rate* [*burst-KB*]]

Parameters

kbps	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On C-Series and S-Series make the following value a multiple of 64. On the E-Series, Force10 recommends using a value greater than or equal to 512 as lower values does not yield accurate results. The default granularity is Megabits per second (Mbps). Range: 0 to 40000000
<i>committed-rate</i>	Enter the committed rate in Mbps. Range: 0 to 10000 Mbps
<i>burst-KB</i>	(OPTIONAL) Enter the burst size in KB. Range: 16 to 200000 KB Default: 50 KB
peak <i>peak-rate</i>	(OPTIONAL) Enter the keyword peak followed by the peak rate in Mbps. Range: 0 to 10000 Mbps Default: Same as designated for <i>committed-rate</i>

Defaults

Burst size is 50 KB. *peak-rate* is by default the same as *committed-rate*. Granularity for *committed-rate* and *peak-rate* is Mbps unless the kbps option is used.

Command Modes

QOS-POLICY-IN

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Added kbps option on C-Series, E-Series, and Series.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Related Commands

rate police	Specify traffic policing on the selected interface.
qos-policy-input	Create a QoS output policy.

rate-shape

C E S

Shape traffic output as part of the designated policy.

S4810

S4820T

Syntax rate-shape [kbps] *rate* [*burst-KB*]

Parameters

<i>kbps</i>	Enter this keyword to specify the rate limit in Kilobits per second (Kbps). On C-Series and S-Series make the following value a multiple of 64. The default granularity is Megabits per second (Mbps). Range: 0-10000000
<i>rate</i>	Enter the outgoing rate in multiples of 10 Mbps. Range: 10 to 10000
<i>burst-KB</i>	(OPTIONAL) Enter a number as the burst size in KB. Range: 0 to 10000 Default: 10

Defaults Burst size is 10 KB. Granularity for *rate* is Mbps unless the *kbps* option is used.

Command Modes QOS-POLICY-OUT

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Added <i>kbps</i> option on C-Series, E-Series, and Series.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

rate-shape can be applied only as an aggregate policy. If it is applied as a class-based policy, then *rate-shape* will not take effect.

On 40-port 10G linecards, if the traffic is shaped between 64 and 1000kbs, for some values the shaped rate is much less than the value configured. Do not use values in this range for 10G interfaces.

Related Commands

rate shape	Shape the traffic output of the selected interface.
qos-policy-output	Create a QoS output policy.

service-class dot1p-mapping

S4810

Configure a service-class criterion, based on a dot1p value.




S4820T


Syntax `service-class dot1p-mapping { dot1p0 value | dot1p1 value | dot1p2 value | dot1p3 value | dot1p4 value | dot1p5 value | dot1p6 <value> | dot1p7 value }`

Parameters	<code>dot1p0 <i>value</i> ...</code>	Enter a dot1p list number and value
	<code>dot1p7 <i>value</i></code>	List number Range: 0 to 7 Range: 0 to 33

Command Mode INTERFACE

service-policy input

   Apply an input policy map to the selected interface.





Syntax `service-policy input policy-map-name [layer2]`

To remove the input policy map from the interface, use the `no service-policy input policy-map-name [layer2]` command.

Parameters	<code><i>policy-map-name</i></code>	Enter the name for the policy map in character format (16 characters maximum). You can identify an existing policy map or name one that does not yet exist.
	<code>layer2</code>	(OPTIONAL) Enter the keyword <code>layer2</code> to specify a Layer 2 Class Map. Default: Layer 3

Defaults Layer 3

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 7.4.1.0	E-Series Only: Expanded to add support for Layer 2
	pre-Version 6.1.1.1	Introduced on E-Series

Usage Information A single policy-map can be attached to one or more interfaces to specify the service-policy for those interfaces. A policy map attached to an interface can be modified.



Note: The service-policy commands are not allowed on a port channel. The service-policy input `policy-map-name` command and the service-class dynamic dot1p command are not allowed simultaneously on an interface. However, the service-policy input command (without the `policy-map-name` option) and the service-class dynamic dot1p command are allowed on an interface.

**Related
Commands**

[policy-map-input](#)

Create an input policy map.

service-policy output

C **E** **S**

Apply an output policy map to the selected interface.

S4810

S4820T

Syntax

service-policy output *policy-map-name*

To remove the output policy map from the interface, use the no service-policy output *policy-map-name* command.

Parameters

policy-map-name

Enter the name for the policy map in character format (16 characters maximum). You can identify an existing policy map or name one that does not yet exist.

Defaults

No default behavior or values

Command Modes

INTERFACE

**Command
History**

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on C-Series and S-Series

pre-Version 6.1.1.1 Introduced on E-Series

**Usage
Information**

A single policy-map can be attached to one or more interfaces to specify the service-policy for those interfaces. A policy map attached to an interface can be modified.

**Related
Commands**

[policy-map-output](#)

Create an output policy map.

service-queue

C **E** **S**

Assign a class map and QoS policy to different queues.

S4810

S4820T

Syntax

service-queue *queue-id* [class-map *class-map-name*] [qos-policy *qos-policy-name*]

To remove the queue assignment, use the no service-queue *queue-id* [class-map *class-map-name*] [qos-policy *qos-policy-name*] command.

Parameters	<i>queue-id</i>	Enter the value used to identify a queue. Range: 0 to 7 on E-Series (eight queues per interface), 0-3 on C-Series and S-Series (four queues per interface; four queues are reserved for control traffic.)
	<i>class-map</i> <i>class-map-name</i>	(OPTIONAL) Enter the keyword <code>class-map</code> followed by the class map name assigned to the queue in character format (16 character maximum). Note: This option is available under policy-map-input only.
	<i>qos-policy</i> <i>qos-policy-name</i>	(OPTIONAL) Enter the keyword <code>qos-policy</code> followed by the QoS policy name assigned to the queue in text format (16 characters maximum). This specifies the input QoS policy assigned to the queue under policy-map-input and output QoS policy under policy-map-output context.
Defaults	No default behavior or values	
Command Modes	CONFIGURATION (conf-policy-map-in and conf-policy-map-out)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.1.1.1	Introduced on E-Series
Usage Information	There are eight (8) queues per interface on the E-Series and four (4) queues per interface on the C-Series and S-Series. This command assigns a class map or QoS policy to different queues.	
Related Commands	class-map	Identify the class map.
	service-policy input	Apply an input policy map to the selected interface.
	service-policy output	Apply an output policy map to the selected interface.

set



Mark outgoing traffic with a Differentiated Service Code Point (DSCP) or dot1p value.

Syntax

set {ip-dscp *value* | mac-dot1p *value*}

Parameters	<i>ip-dscp value</i>	(OPTIONAL) Enter the keyword <code>ip-dscp</code> followed by the IP DSCP value. Range: 0 to 63
	<i>mac-dot1p value</i>	Enter the keyword <code>mac-dot1p</code> followed by the dot1p value. Range: 0 to 7 On the C-Series and S-Series allowed values are:0,2,4,6

Defaults No default behavior or values

Command Modes CONFIGURATION (conf-qos-policy-in)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	mac-dot1p available on the C-Series and S-Series
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Expanded to add support for mac-dot1p
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

C-Series and S-Series

Once the IP DSCP bit is set, other QoS services can then operate on the bit settings.

E-Series

Once the IP DSCP bit is set, other QoS services can then operate on the bit settings. WRED (Weighted Random Early Detection) ensures that high-precedence traffic has lower loss rates than other traffic during times of congestion.

show cam layer2-qos

E Display the Layer 2 QoS CAM entries.

Syntax show cam layer2-qos {[linecard *number* port-set *number*] | [interface *interface*]} [summary]

Parameters

<i>linecard number</i>	Enter the keyword linecard followed by the line card slot number. E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
<i>port-set number</i>	Enter the keyword port-set followed by the line card's port pipe. Range: 0 or 1
<i>interface interface</i>	Enter the keyword interface followed by one of the keywords below and slot/port or number information: <ul style="list-style-type: none">• For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.• For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a SONET interface, enter the keyword sonet followed by the slot/port information.• For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
<i>summary</i>	(OPTIONAL) Enter the keyword summary to display only the total number of CAM entries.

Defaults No default behavior or values

Command Modes EXEC**Command History**

Version 7.4.1.0 Introduced on E-Series

Example (interface)

FTOS#show cam layer2-qos interface gigabitethernet 2/0

Cam Index	Port	Dot1p	Proto	SrcMac	SrcMask	DstMac	DstMask	Dot1p Marking	DSCP Marking	Queue
01817	0	-	0	00:00:00:00:cc:cc	00:00:00:00:ff:ff	00:00:00:00:dd:dd	00:00:00:00:ff:ff	-	-	7
01818	0	-	0	00:00:00:00:00:c0	00:00:00:00:00:f0	00:00:00:00:00:d0	00:00:00:00:00:f0	-	45	5
01819	0	4	0	00:00:00:a0:00:00	00:00:00:ff:00:00	00:00:00:b0:00:00	00:00:00:ff:00:00	4	-	4
01820	0	-	0x2000	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:b0	ff:ff:ff:ff:ff:ff	-	-	1
02047	0	-	0	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:00:00	-	-	0

FTOS#

Example (linecard)

FTOS#show cam layer2-qos linecard 2 port-set 0

Cam Index	Port	Dot1p	Proto	SrcMac	SrcMask	DstMac	DstMask	Dot1p Marking	DSCP Marking	Queue
01817	0	-	0	00:00:00:00:cc:cc	00:00:00:00:ff:ff	00:00:00:00:dd:dd	00:00:00:00:ff:ff	-	-	7
01818	0	-	0	00:00:00:00:00:c0	00:00:00:00:00:f0	00:00:00:00:00:d0	00:00:00:00:00:f0	-	45	5
01819	0	4	0	00:00:00:a0:00:00	00:00:00:ff:00:00	00:00:00:b0:00:00	00:00:00:ff:00:00	4	-	4
01820	0	-	0x2000	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:b0	ff:ff:ff:ff:ff:ff	-	-	1
02047	0	-	0	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:00:00	00:00:00:00:00:00	-	-	0

FTOS#

show cam layer3-qos

E Display the Layer 3 QoS CAM entries.**Syntax** show cam layer3-qos {[linecard *number* port-set *number*] | [interface *interface*]} [summary]**Parameters**

<i>linecard number</i>	Enter the keyword linecard followed by the line card slot number. E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
<i>port-set number</i>	Enter the keyword port-set followed by the line card's port pipe. Range: 0 or 1
<i>interface interface</i>	Enter the keyword interface followed by one of the keywords below and slot/port or number information: <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
<i>summary</i>	(OPTIONAL) Enter the keyword summary to display only the total number of CAM entries.

Defaults No default behavior or values**Command Modes** EXEC

Command History

Version 6.5.1.0 Introduced on E-Series

Example

```
FTOS#sh cam layer3-qos interface gigabitethernet 2/1
```

Cam Index	Port	Dscp	Proto	Tcp Flag	Src Port	Dst Port	SrcIp	DstIp	DSCP Marking	Queue
23488	1	0	0	0x0	0	0	0.0.0.0/0	0.0.0.0/0	-	TRUST-DSCP

```
FTOS#
```

In these output examples, note that:

- The entry TRUST-DSCP in the Queue column indicates that the trust diffserv is configured on the policy-map.
- A hyphen (-) entry in the DSCP Marking column indicates that there is no DSCP marking.
- In the Proto column (Protocol), IP, ICMP, UDP, and TCP strings are displayed. For other protocols, the corresponding protocol number is displayed.

Example (linecard port-set)

```
FTOS#show cam layer3-qos linecard 13 port-set 0
```

Cam Index	Port	Dscp	Proto	Tcp Flag	Src Port	Dst Port	SrcIp	DstIp	DSCP Marking	Queue
24511	1	0	TCP	0x5	2	5	1.0.0.1/24	2.0.0.2/24	-	TRUST-DSCP
24512	1	0	UDP	0x2	2	5	8.0.0.8/24	8.0.0.8/24	23	3

```
FTOS#
```

Example (linecard interface without trust output)

```
FTOS#sh cam layer3-qos interface gigabitethernet 2/1
```

Cam Index	Port	Dscp	Proto	Tcp Flag	Src Port	Dst Port	SrcIp	DstIp	DSCP Marking	Queue
23488	1	56	0	0x0	0	0	0.0.0.0/0	0.0.0.0/0	-	7
23489	1	48	0	0x0	0	0	0.0.0.0/0	0.0.0.0/0	-	6
23490	1	40	0	0x0	0	0	0.0.0.0/0	0.0.0.0/0	-	5
23491	1	0	IP	0x0	0	0	10.1.1.1/32	20.1.1.1/32	-	0
23492	1	0	IP	0x0	0	0	10.1.1.1/32	20.1.1.2/32	-	0
24511	1	0	0	0x0	0	0	0.0.0.0/0	0.0.0.0/0	-	0

```
FTOS#
```

Example (summary)

```
FTOS#show cam layer3-qos linecard 13 port-set 0 summary
```


Total number of CAM entries for Port-Set 0 is 100

```
FTOS#
```

show qos class-map



View the current class map information.



Syntax show qos class-map [class-name]

Parameters	<i>class-name</i> (Optional) Enter the name of a configured class map.
Defaults	No default behavior or values
Command Modes	EXEC EXEC Privilege
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 7.6.1.0 Introduced on S-Series <hr/> Version 7.5.1.0 Introduced on C-Series <hr/> pre-Version 6.1.1.1 Introduced on E-Series <hr/>
Example	<pre>FTOS#show qos class-map Class-map match-any CM Match ip access-group ACL</pre>
Related Commands	class-map Identify the class map

show qos dot1p-queue-mapping

S4810

Displays the dot1p priority to queue mapping on the switch.

S4820T

Syntax	show qos dot1p-queue-mapping
Defaults	<pre>dot1p Priority 0 1 2 3 4 5 6 7 Queue 0 0 0 1 2 3 3 3</pre>
Command Modes	EXEC Privilege
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.12.0 Introduced on the S4810. <hr/> Version 8.3.16.0 Introduced on MXL 10/40GbE Switch IO Module <hr/>
Related Commands	service-class dot1p-mapping Identify the class map

show qos policy-map

C E S

View the QoS policy map information.

S4810

S4820T

Syntax show qos policy-map {summary [*interface*] | detail [*interface*]}

Parameters

summary <i>interface</i>	To view a policy map interface summary, enter the keyword summary and optionally one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
detail <i>interface</i>	To view a policy map interface in detail, enter the keyword detail and optionally one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series only: Added Trust IPv6 diffserv
Version 6.2.1.1	Introduced on E-Series

Example (IPv4)

```
FTOS#show qos policy-map detail gigabitethernet 0/0
Interface GigabitEthernet 4/1
Policy-map-input policy
Trust diffserv
Queue# Class-map-name Qos-policy-name
```

**Example
(IPv6)**

```

0 - q0
1 CM1q1
2 CM2q2
3 CM3q3
4 CM4q4
5 CM5q5
6 CM6q6
7 CM7q7
FTOS#
FTOS# show qos policy-map detail gigabitethernet 0/0

Interface GigabitEthernet 8/29

Policy-map-input pmap1
Trust ipv6-diffserv
Queue#   Class-map-name           Qos-policy-name
0         c0                           q0
1         c1                           q1
2         c2                           q2
3         c3                           q3
4         c4                           q4
5         c5                           -
6         c6                           q6
7         c7                           q7
FTOS#

```

**Example
(summary IPv4)**

```

FTOS#sho qos policy-map summary

Interface           policy-map-input      policy-map-output
Gi 4/1              PM1                    -
Gi 4/2              PM2                    PMOut
FTOS#

```

show qos policy-map-input

C **E** **S**

View the input QoS policy map details.

54810**54820T****Syntax**

```
show qos policy-map-input [policy-map-name] [class class-map-name] [qos-policy-input
qos-policy-name]
```

Parameters

<i>policy-map-name</i>	Enter the policy map name.
class <i>class-map-name</i>	Enter the keyword class followed by the class map name.
qos-policy-input <i>qos-policy-name</i>	Enter the keyword qos-policy-input followed by the QoS policy name.

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Added Trust IPv6 diffserv
Version 6.2.1.1	Introduced on E-Series

Example (IPv4)

```
FTOS#show qos policy-map-input

Policy-map-input PolicyMapInput
Aggregate Qos-policy-name AggPolicyIn
Queue#    Class-map-name    Qos-policy-name
0         ClassMap1              qosPolicyInput
FTOS#
```

Example (IPv6)

```
FTOS# show qos policy-map-input

Policy-map-input pmap1
Trust ipv6-diffserv
Queue#    Class-map-name    Qos-policy-name
0         c0                    q0
1         c1                    q1
2         c2                    q2
3         c3                    q3
4         c4                    q4
5         c5                    -
6         c6                    q6
7         c7                    q7
FTOS#
```

show qos policy-map-output

C **E** **S**

View the output QoS policy map details.

S4810**S4820T****Syntax**show qos policy-map-output [*policy-map-name*] [qos-policy-output *qos-policy-name*]**Parameters**

<i>policy-map-name</i>	Enter the policy map name.
qos-policy-output <i>qos-policy-name</i>	Enter the keyword qos-policy-output followed by the QoS policy name.

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0 Introduced on C-Series and S-Series

pre-Version 6.1.1.1 Introduced on E-Series

Example

```
FTOS#show qos policy-map-output

Policy-map-output PolicyMapOutput
Aggregate Qos-policy-name AggPolicyOut
Queue#           Qos-policy-name
0                qosPolicyOutput
FTOS#
```

show qos qos-policy-input

C **E** **S**

View the input QoS policy details.

S4810

S4820T

Syntax

show qos qos-policy-input [*qos-policy-name*]

Parameters

<i>qos-policy-name</i>	Enter the QoS policy name.
------------------------	----------------------------

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on S-Series

Version 7.5.1.0 Introduced on C-Series

pre-Version 6.1.1.1 Introduced on E-Series

Example

```
FTOS#show qos qos-policy-input

Qos-policy-input QosInput
Rate-police 100 50 peak 100 50
Dscp 32
FTOS#
```

show qos qos-policy-output

C **E** **S**

View the output QoS policy details.

S4810

S4820T

Syntax

show qos qos-policy-output [*qos-policy-name*]

Parameters	<i>qos-policy-name</i> Enter the QoS policy name.
Defaults	No default behavior or values
Command Modes	EXEC EXEC Privilege
Command History	Version 8.3.19.0 Introduced on S4820T Version 8.3.7.0 Introduced on S4810 Version 7.6.1.0 Introduced on C-Series and S-Series pre-Version 6.1.1.1 Introduced on E-Series
Example	<pre>FTOS#show qos qos-policy-output Qos-policy-output qosOut Rate-limit 50 50 peak 50 50 Wred yellow 1 Wred green 1</pre>

show qos statistics

C E S

View QoS statistics.

S4810

S4820T

Syntax show qos statistics {wred-profile [*interface*]} | [*interface*]

Parameters	<i>wred-profile interface</i>	<p>Platform—E-Series Only: Enter the keyword wred-profile and optionally one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
	<i>interface</i>	<p>Enter one of the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> On the C-Series and E-Series, For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.1	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

The show qos statistics command can be used on the C-Series, but the wred-profile keyword must be omitted in the syntax. The show qos statistics output differs from the ED and EE series line cards and the EF series line cards. The QoS statistics for the EF series generates two extra columns, Queued Pkts and Dropped Pkts, Example 2.



Note: The show qos statistics command displays Matched Packets and Matched Bytes. The [show queue statistics egress](#) command (E-Series only) displays Queued Packets and Queued Bytes. The following example explains how these two displays relate to each other.

- 9000 byte size packets are sent from Interface A to Interface B.
- The Matched Packets on Interface A are equal to the Queued Packets on Interface B.
- Matched bytes on Interface A = matched packets *9000
- Queued bytes on Interface B = queued packets *(9020)—Each packet has an additional header of 20 bytes.

**Example
(ED and EE
series of
E-Series)**

```
FTOS#show qos statistics
```

```
Interface Gi 0/0
```

Queue#	Queued Bytes	Matched Pkts	Matched Bytes
0	0	0	0
1	0	0	0
2	0	0	0
3	0	0	0
4	0	0	0
5	0	0	0
6	0	0	0
7	0	0	0

```
Interface Gi 0/1
```

Queue#	Queued Bytes	Matched Pkts	Matched Bytes
0	0	0	0
1	0	0	0
2	0	0	0
3	0	0	0
4	0	0	0
5	0	0	0
6	0	0	0
7	0	0	0

Table 42-4. show qos statistics Command Example Fields (ED and EE Series)

Field	Description
Queue #	Queue Number
Queued Bytes	Snapshot of the byte count in that queue.
Matched Pkts	The number of packets that matched the class-map criteria. Note: When trust is configured, matched packet counters are not incremented in this field.
Matched Bytes	The number of bytes that matched the class-map criteria. Note: When trust is configured, matched byte counters are not incremented in this field.

**Example
(EF series of
E-Series)**

FTOS#show qos statistics gig 0/1

Queue#	Queued Bytes (Cumulative)	Queued Pkts (Cumulative)	Matched Pkts	Matched Bytes	Dropped Pkts
0	0	0	1883725	1883725000	0
1	0	0	1883725	1883725000	0
2	0	0	1883725	1883725000	0
3	0	0	1883725	1883725000	0
4	0	0	1883725	1883725000	0
5	0	0	1883724	1883724000	0
6	0	0	1883720	1883720000	0
7	0	0	1883720	1883720000	0

FTOS#

Table 42-5. show qos statistics Command Example Fields (EF Series)

Field	Description
Queue #	Queue Number
Queued Bytes	Cumulative byte count in that queue
Queued Pkts	Cumulative packet count in that queue.
Matched Pkts	The number of packets that matched the class-map criteria. Note: When trust is configured, matched packet counters are not incremented in this field.
Matched Bytes	The number of bytes that matched the class-map criteria. Note: When trust is configured, matched byte counters are not incremented in this field.
Dropped Pkts	The total of the number of packets dropped for green, yellow and out-of-profile.

**Example
(wred-profile: ED,
EE, & EF Series)**

FTOS#show qos statistics wred-profile

Interface Gi 5/11

Queue#	Drop-statistic	WRED-name	Dropped Pkts
0	Green	WRED1	51623
	Yellow	WRED2	51300
	Out of Profile		0
1	Green	WRED1	52082
	Yellow	WRED2	51004
	Out of Profile		0
2	Green	WRED1	50567

	Yellow	WRED2	49965
	Out of Profile		0
3	Green	WRED1	50477
	Yellow	WRED2	49815
	Out of Profile		0
4	Green	WRED1	50695
	Yellow	WRED2	49476
	Out of Profile		0
5	Green	WRED1	50245
	Yellow	WRED2	49535
	Out of Profile		0
6	Green	WRED1	50033
	Yellow	WRED2	49595
	Out of Profile		0
7	Green	WRED1	50474
	Yellow	WRED2	49522
	Out of Profile		0

FTOS#

Table 42-6. show qos statistics wred-profile Command Example Fields (ED, EE, and EF Series)

Field	Description
Queue #	Queue Number
Drop-statistic	Drop statistics for green, yellow and out-of-profile packets
WRED-name	WRED profile name
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

**Related
Commands**

clear qos statistics	Clears counters as shown in show qos statistics
--------------------------------------	---

show qos wred-profile

E **S4810**

View the WRED profile details.

S4820T

Syntax

show qos wred-profile *wred-profile-name*

Parameters

<i>wred-profile-name</i>	Enter the WRED profile name to view the profile details.
--------------------------	--

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
pre-Version 6.1.1.1	Introduced on E-Series

Example

FTOS#show qos wred-profile

wred-profile-name	min-threshold	max-threshold
wred_drop	0	0
wred_ge_y	1024	2048
wred_ge_g	2048	4096
wred_teng_y	4096	8192
wred_teng_g	8192	16384
WRED1	2000	7000

test cam-usage

C **E** **S**

Check the Input Policy Map configuration for the CAM usage.

S4810

S4820T

Syntax

test cam-usage service-policy input *policy-map* linecard {[*number* port-set *portpipe number*] | [all]}

Parameters

<i>policy-map</i>	Enter the policy map name.
linecard <i>number</i>	(OPTIONAL) Enter the keyword linecard followed by the line card slot number.
port-set <i>portpipe number</i>	Enter the keyword port-set followed by the line card's port pipe number. Range: 0 or 1
linecard all	(OPTIONAL) Enter the keywords linecard all to indicate all line cards.

Defaults

No default values or behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

Example

```
FTOS# test cam-usage service-policy input pmap_l2 linecard all
```

For a L2 Input Policy Map pmap_l2, the output must be as follows,

Linecard	Portpipe	CAM Partition	Available CAM	Estimated CAM per Port	Status (Allowed ports)
0	0	L2ACL	500	200	Allowed (2)
0	1	L2ACL	100	200	Exception
1	0	L2ACL	1000	200	Allowed (5)
1	1	L2ACL	0	200	Exception
		...			
		...			
		...			
13	1	L2ACL	400	200	Allowed (2)

FTOS#



Note: In a Layer 2 Policy Map, IPv4/IPv6 rules are not allowed and hence the output contains only L2ACL CAM partition entries.

Table 42-7. test cam-usage Command Example Fields

Field	Description
Linecard	Indicates the line card slot number.
Portpipe	Indicates the portpipe number.
CAM Partition	The CAM space where the rules are added.
Available CAM	Indicates the free CAM space, in the partition, for the classification rules. Note: The CAM entries reserved for the default rules are not included in the Available CAM column; free entries, from the default rules space, can not be used as a policy map for the classification rules.
Estimated CAM per Port	Indicates the number of free CAM entries required (for the classification rules) to apply the input policy map on a single interface. Note: The CAM entries for the default rule are not included in this column; a CAM entry for the default rule is always dedicated to a port and is always available for that interface.
Status (Allowed ports)	Indicates if the input policy map configuration on an interface belonging to a linecard/port-pipe is successful—Allowed (<i>n</i>)—or not successful—Exception. The allowed number (<i>n</i>) indicates the number of ports in that port-pipe on which the Policy Map can be applied successfully.

Usage Information

This feature allows you to determine if the CAM has enough space available before applying the configuration on an interface.

An input policy map with both Trust and Class-map configuration, the Class-map rules are ignored and only the Trust rule is programmed in the CAM. In such an instance, the Estimated CAM output column will contain the size of the CAM space required for the Trust rule and *not* the Class-map rule.

threshold



Specify the minimum and maximum threshold values for the configured WRED profiles.

Syntax

threshold min *number* max *number*

To remove the threshold values, use the no threshold min *number* max *number* command.

Parameters	<i>min number</i>	Enter the keyword <code>min</code> followed by the minimum threshold number for the WRED profile. Range: 1024 to 77824 KB
	<i>max number</i>	Enter the keyword <code>max</code> followed by the maximum threshold number for the WRED profile. Range: 1024 to 77824 KB

Defaults No default behavior or values

Command Modes CONFIGURATION (config-wred)

Command History
pre-Version 6.1.1.1 Introduced on E-Series

Usage Information Use this command to configure minimum and maximum threshold values for user defined profiles. Additionally, use this command to modify the minimum and maximum threshold values for the pre-defined WRED profiles. If you delete threshold values of the pre-defined WRED profiles, the profiles will revert to their original default values.

Table 42-8. Pre-defined WRED Profile Threshold Values

Pre-defined WRED Profile Name	Minimum Threshold	Maximum Threshold
wred_drop	0	0
wred_ge_y	1024	2048
wred_ge_g	2048	4096
wred_teng_y	4096	8192
wred_teng_g	8192	16384

Related Commands
[wred-profile](#) Create a WRED profile.

trust

C **E** **S** Specify dynamic classification (DSCP) or dot1p to trust.

S4810

S4820T

Syntax trust { diffserv [fallback] dot1p [fallback] ipv6-diffserv }

Parameters	<code>diffserv</code>	Enter the keyword <code>diffserv</code> to specify trust of DSCP markings.
	<code>dot1p</code>	Enter the keyword <code>dot1p</code> to specify trust dot1p configuration.
	<code>fallback</code>	Enter this keyword to classify packets according to their DSCP value as a secondary option in case no match occurs against the configured class maps.
	<code>ipv6-diffserv</code>	On E-Series only, enter the keyword <code>ipv6-diffserv</code> to specify trust configuration of IPv6 DSCP.

Defaults No default behavior or values

Command Modes CONFIGURATION (conf-policy-map-in)**Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	fallback available on the E-Series.
Version 8.2.1.0	dot1p available on the C-Series and S-Series.
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	Expanded to add support for dot1p and IPv6 DSCP
pre-Version 6.1.1.1	Introduced on E-Series

Usage Information

When trust is configured, matched bytes/packets counters are not incremented in the show qos statistics command.

The trust diffserv feature is not supported on E-Series ExaScale when an IPv6 microcode is enabled.

Dynamic mapping honors packets marked according to the standard definitions of DSCP. The default mapping table is detailed in the following table.

Table 42-9. Standard Default DSCP Mapping Table

DSCP/CP hex range (XXX)	DSCP Definition	Traditional IP Precedence	E-Series Internal Queue ID	C-Series and S-Series Internal Queue ID	DSCP/CP decimal
111XXX		Network Control	7	3	48–63
110XXX		Internetwork Control	6	3	
101XXX	EF (Expedited Forwarding)	CRITIC/ECP	5	2	32–47
100XXX	AF4 (Assured Forwarding)	Flash Override	4	2	
011XXX	AF3	Flash	3	1	16–31
010XXX	AF2	Immediate	2	1	
001XXX	AF1	Priority	1	0	0–15
000XXX	BE (Best Effort)	Best Effort	0	0	

wred**E** **S4810**


Designate the WRED profile to yellow or green traffic.

S4820T**Syntax** wred {yellow | green} *profile-name*

To remove the WRED drop precedence, use the `no wred {yellow | green} [profile-name]` command.

Parameters	<code>yellow green</code>	Enter the keyword <code>yellow</code> for yellow traffic. DSCP value of xxx110 and xxx100 maps to yellow. Enter the keyword <code>green</code> for green traffic. DSCP value of xxx010 maps to green.
	<code>profile-name</code>	Enter your WRED profile name in character format (16 character maximum). Or use one of the 5 pre-defined WRED profile names. Pre-defined Profiles: wred_drop, wred-ge_y, wred_ge_g, wred_teng_y, wred_teng_
Defaults	No default behavior or values	
Command Modes	CONFIGURATION (conf-qos-policy-out)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Profile name character limit increased from 16 to 32.
	pre-Version 6.1.1.1	Introduced on E-Series
Usage Information	Use this command to assign drop precedence to green or yellow traffic. If there is no honoring enabled on the input, all the traffic defaults to green drop precedence.	
Related Commands	wred-profile	Create a WRED profile and name that profile
	trust	Define the dynamic classification to trust DSCP

wred-profile

 **S4810**

Create a WRED profile and name that profile.



Syntax `wred-profile wred-profile-name`

To remove an existing WRED profile, use the `no wred-profile` command.

Parameters	<code>wred-profile-name</code>	Enter your WRED profile name in character format (16 character maximum). Or use one of the pre-defined WRED profile names. You can configure up to 26 WRED profiles plus the 5 pre-defined profiles, for a total of 31 WRED profiles. Pre-defined Profiles: wred_drop, wred-ge_y, wred_ge_g, wred_teng_y, wred_teng_g
-------------------	--------------------------------	---

Defaults The five pre-defined WRED profiles. When a new profile is configured, the minimum and maximum threshold defaults to predefined `wred_ge_g` values

Command Modes	CONFIGURATION
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.7.0 Introduced on S4810
	pre-Version 6.1.1.1 Introduced on E-Series
Usage Information	Use the default pre-defined profiles or configure your own profile. You can not delete the pre-defined profiles or their default values. This command enables the WRED configuration mode—(conf-wred).
Related Commands	threshold Specify the minimum and maximum threshold values of the WRED profile

Queue-Level Debugging

Queue-Level Debugging is an E-Series-only feature, as indicated by the **E** character that appears below each command heading.

The following queuing statistics are available on both the EtherScale and TeraScale versions of E-Series systems.

- [clear queue statistics egress](#)
- [clear queue statistics ingress](#)
- [show queue statistics egress](#)
- [show queue statistics ingress](#)

clear queue statistics egress

E Clear egress queue statistics.

Syntax clear queue statistics egress [unicast | multicast] [*Interface*]

Parameters	unicast multicast	(OPTIONAL) Enter the keyword multicast to clear only Multicast queue statistics. Enter the keyword unicast to clear only Unicast queue statistics. Default: Both Unicast and Multicast queue statistics are cleared.
	Interface	(OPTIONAL) Enter one of the following interfaces to display the interface specific queue statistics. <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a SONET interface, enter the keyword sonet followed by the slot/port information. Note: Fast Ethernet is not supported.

Defaults No default behavior or values

Command Modes	EXEC						
	EXEC Privilege						
Command History	Version 6.2.1.1 Introduced						
Usage Information	If a Policy QoS is applied on an interface when clear queue statistics egress is issued, it will clear the egress counters in show queue statistics and vice-versa. This behavior is due to the values being read from the same hardware registers.						
Related Commands	<table border="1"> <tr> <td>clear queue statistics egress</td> <td>Clear ingress queue statistics</td> </tr> <tr> <td>show queue statistics egress</td> <td>Display egress queue statistics</td> </tr> <tr> <td>show queue statistics ingress</td> <td>Display ingress queue statistics</td> </tr> </table>	clear queue statistics egress	Clear ingress queue statistics	show queue statistics egress	Display egress queue statistics	show queue statistics ingress	Display ingress queue statistics
clear queue statistics egress	Clear ingress queue statistics						
show queue statistics egress	Display egress queue statistics						
show queue statistics ingress	Display ingress queue statistics						

clear queue statistics ingress

E Clear ingress queue statistics.

Syntax clear queue statistics ingress [unicast [src-card *ID* [dst-card *ID*]] | [multicast] [src-card *ID*]]

Parameters	unicast [src-card <i>ID</i> [dst-card <i>ID</i>]]	(OPTIONAL) Enter the keyword unicast to clear Unicast queue statistics. Optionally, enter the source card identification (src-card <i>ID</i>) and the destination card identification (dst-card <i>ID</i>) to clear the unicast statistics from the source card to the destination card.
	multicast [src-card <i>ID</i>]	(OPTIONAL) Enter the keyword multicast to clear only Multicast queue statistics. Optionally, enter the source card identification (src-card <i>ID</i>) to clear the multicast statistics from the source card. Default: Both Unicast and Multicast queue statistics are cleared.

Defaults No default behavior or values

Command Modes	EXEC						
	EXEC Privilege						
Command History	Version 6.2.1.1 Introduced						
Related Commands	<table border="1"> <tr> <td>clear queue statistics egress</td> <td>Clear egress queue statistics</td> </tr> <tr> <td>show queue statistics egress</td> <td>Display egress queue statistics</td> </tr> <tr> <td>show queue statistics ingress</td> <td>Display ingress queue statistics</td> </tr> </table>	clear queue statistics egress	Clear egress queue statistics	show queue statistics egress	Display egress queue statistics	show queue statistics ingress	Display ingress queue statistics
clear queue statistics egress	Clear egress queue statistics						
show queue statistics egress	Display egress queue statistics						
show queue statistics ingress	Display ingress queue statistics						

show queue statistics egress

E Display the egress queue statistics.

Syntax show queue statistics egress [unicast | multicast] [*Interface*] [brief]

Parameters	unicast multicast	(OPTIONAL) Enter the keyword multicast to display only Multicast queue statistics. Enter the keyword unicast to display only Unicast queue statistics. Default: Both Unicast and Multicast queue statistics are displayed.
	Interface	(OPTIONAL) Enter one of the following interfaces to display the interface specific queue statistics. <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. Fast Ethernet is not supported.
	brief	(OPTIONAL) Enter the keyword brief to display only ingress per link buffering and egress per port buffering statistics.

Defaults No default behavior or values

Command Modes EXEC

EXEC Privilege

Command History
Version 6.2.1.1 Introduced for E-Series

Usage Information EtherScale systems display cumulative dropped packets, while TeraScale systems display cumulative queued bytes (in KB), cumulative queued packets (in KB), and cumulative dropped packets (in KB).

The display area is limited to 80 spaces to accommodate the screen and for optimal readability. Numbers, that is values, are limited to 12 characters. The numbering conventions are detailed in the table below.

Table 42-10. Numbering Conventions for show queue egress statistics Output

Value	Divide the number by	Quotient Display	Examples
(10 ¹¹) - (10 ¹⁴)	1024	K	12345678901 K
(10 ¹⁴) - (10 ¹⁷)	1024*1024	M	12345678901 M
> (10 ¹⁷)	1024*1024*1024	T	12345678901 T



Note: The show queue statistics command displays Queued Packets and Queued Bytes. The [show qos statistics](#) command displays Matched Packets and Matched Bytes. The following example explains how these two outputs relate to each other.

- 9000 byte size packets are sent from Interface A to Interface B.
- The Matched Packets on Interface A are equal to the Queued Packets on Interface B.
- Matched bytes on Interface A = matched packets *9000
- Queued bytes on Interface B = queued packets *(9020)—Each packet has an additional header of 20 bytes.

Example (TeraScale)

```
FTOS#show queue statistics egress unicast gigabitethernet 9/1
Interface Gi 9/1
```

```

Egress Queued      Queued      Packet Type  Min      Max      Dropped
Port  bytes      packets
Queue#
0      281513847K    31959000    Green      2048     4096     0
      281513847K    31959000    Yellow     1024     2048     0
      281513847K    31959000    Out of Profile
      281513847K    31959000    30385770
1      99281660K     11271000    Green      2048     4096     0
      99281660K     11271000    Yellow     1024     2048     0
      99281660K     11271000    Out of Profile
      99281660K     11271000    9886100
2      99281660K     11271000    Green      2048     4096     0
      99281660K     11271000    Yellow     1024     2048     0
      99281660K     11271000    Out of Profile
      99281660K     11271000    9784600
3      38984440000   4322000     Green      2048     4096     0
      38984440000   4322000     Yellow     1024     2048     0
      38984440000   4322000     Out of Profile
      38984440000   4322000     3053753
4      99281660K     11271000    Green      2048     4096     0
      99281660K     11271000    Yellow     1024     2048     0
      99281660K     11271000    Out of Profile
      99281660K     11271000    9581600
5      39760160000   4408000     Green      2048     4096     0
      39760160000   4408000     Yellow     1024     2048     0
      39760160000   4408000     Out of Profile
      39760160000   4408000     3070671
6      39642900000   4395000     Green      2048     4096     0
      39642900000   4395000     Yellow     1024     2048     0
      39642900000   4395000     Out of Profile
      39642900000   4395000     3026100
7      99274410K     11270177    Green      2048     4096     0
      99274410K     11270177    Yellow     1024     2048     0
      99274410K     11270177    Out of Profile
      99274410K     11270177    9273402
FTOS#

```

Table 42-11. show queue statistics egress Command Fields

Field	Description
Egress Port Queue#	Egress Port Queue Number
Queued bytes	Cumulative byte count in that queue
Queued packets	Cumulative packet count in that queue.
Packet type	Green, yellow, and out-of-profile packets
Min KB	Minimum threshold for WRED queue
Max KB	Maximum threshold for WRED queue
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

**Example
(EtherScale)**

```

FTOS#sho queue statistics egress multicast

Linecard 3 port pipe 0, multicast

Packet Type      Min      Max      Dropped
                  KB       KB       packets
Green            8192     16384    0
Yellow           4096     8192     0
Out of Profile
Linecard 3 port pipe 1, multicast

Packet Type      Min      Max      Dropped
                  KB       KB       packets
Green            8192     16384    0
Yellow           4096     8192     0
Out of Profile

```

```

Linecard 7 port pipe 0, multicast

Packet Type      Min      Max      Dropped
                  KB       KB       packets
Green            2048    4096    0
Yellow           1024    2048    0
Out of Profile                    0

Linecard 7 port pipe 1, multicast

Packet Type      Min      Max      Dropped
                  KB       KB       packets
Green            2048    4096    0
Yellow           1024    2048    0
Out of Profile                    0
FTOS#

```

Table 42-12. show queue statistics egress multicast Command Fields

Field	Description
Packet type	Green, yellow, and out-of-profile packets
Min KB	Minimum threshold for WRED queue
Max KB	Maximum threshold for WRED queue
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

Example (brief)

```

FTOS#show queue statistics egress brief

LC      Portpipe      Port      Dropped
        PortPipe
0       0              0         0
0       0              1         0
0       0              2         0
0       0              3         0
0       0              4         0
0       0              5         0
0       0              6         0
0       0              7         0
0       0              8         0
0       0              9         0
0       0             10         0
0       0             11         0
0       0              M         0
0       1              0         0
0       1              1         0
0       1              2         0
0       1              3         0
0       1              4         0
0       1              5         0
0       1              6         0
0       1              7         0
0       1              8         0
0       1              9         0
0       1             10         0
0       1             11         0
0       1              M         0
1       0              0         0
FTOS#

```

Table 42-13. show queue statistics egress brief Command Fields

Field	Description
LC	Line Card
Portpipe	Portpipe number
Port	Port Queue. Where M is Multicast queue
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

Related Commands

clear queue statistics egress	Clear egress queue statistics.
clear queue statistics ingress	Clear ingress queue statistics.
show queue statistics ingress	Display ingress queue statistics

show queue statistics ingress

E Display the ingress queue statistics.

Syntax

show queue statistics ingress [unicast [src-card *ID* [dst-card *ID*]] | [multicast] [src-card *ID*]] [brief]

Parameters

unicast [src-card <i>ID</i> [dst-card <i>ID</i>]]	(OPTIONAL) Enter the keyword unicast to display Unicast queue statistics. Optionally, enter the source card identification (src-card <i>ID</i>) and the destination card identification (dst-card <i>ID</i>) to display the unicast statistics from the source card to the destination card. Destination card Identification: Range 0 to 13 or RPM
multicast [src-card <i>ID</i>]	(OPTIONAL) Enter the keyword multicast to display only Multicast queue statistics. Optionally, enter the source card identification (src-card <i>ID</i>) to display the multicast statistics from the source card. Default: Both Unicast and Multicast queue statistics are displayed.
brief	(OPTIONAL) Enter the keyword brief to display only ingress per link buffering and egress per port buffering statistics.

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 6.2.1.1 Introduced

Usage Information

EtherScale systems display cumulative dropped packets, while TeraScale systems display cumulative queued bytes (in KB), cumulative queued packets (in KB), and cumulative dropped packets (in KB).

The display area is limited to 80 spaces to accommodate the screen and for optimal readability. Numbers, that is values, are limited to 12 characters. The conventions are detailed in the following table.

Table 42-14. Numbering Conventions for show queue statistics ingress Output

Value	Divide the number by	Quotient Display	Examples
(10 ¹¹) - (10 ¹⁴)	1024	K	12345678901 K
(10 ¹⁴) - (10 ¹⁷)	1024*1024	M	12345678901 M
> (10 ¹⁷)	1024*1024*1024	T	12345678901 T



Note: The show queue statistics command displays Queued Packets and Queued Bytes. The [show qos statistics](#) command displays Matched Packets and Matched Bytes. The following example explains how these two displays relate to each other.

- 9000 byte size packets are sent from Interface A to Interface B.
- The Matched Packets on Interface A are equal to the Queued Packets on Interface B.
- Matched bytes on Interface A = matched packets *9000
- Queued bytes on Interface B = queued packets *(9020)—Each packet has an additional header of 20 bytes.

**Example
(EtherScale)**

```
FTOS#show queue statistics ingress unicast src-card 7 dst-card 3
```

```
Linecard 7 port pipe 0, to linecard 3 port pipe 0, unicast
```

SF	Packet Type	Min	Max	Dropped
Ingress		KB	KB	packets
Queue#				
0	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
1	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
2	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
3	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
4	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
5	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
6	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0
7	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0

```
Linecard 7 port pipe 0, to linecard 3 port pipe 1, unicast
```

SF	Packet Type	Min	Max	Dropped
Ingress		KB	KB	packets
Queue#				
0	Green	4096	4096	0
	Yellow	3276	3276	0
	Out of Profile			0


```

1      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
2      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
3      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
4      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
5      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
6      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
7      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
4      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
5      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
6      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
7      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile 0

```

Table 42-15. show queue statistics Command Fields

Field	Description
SF Ingress Queue #	Switch Fabric Queue Number
Packet type	Green, yellow, and out-of-profile packets
Min KB	Minimum threshold for WRED queue
Max KB	Maximum threshold for WRED queue
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

**Example
(Multicast)**

```

FTOS#show queue statistics ingress multicast src-card 7

Linecard 7 port pipe 0, multicast

SF      Packet Type      Min      Max      Dropped
Ingress      Queue#      KB      KB      packets
0      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
1      Green      4096      4096      0
      Yellow      3276      3276      0
      Out of Profile
2      Green      4096      4096      0
      Yellow      3276      3276      0

```

```

3      Out of Profile      0
      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
4      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
5      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
6      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
7      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0

```

Linecard 7 port pipe 1, multicast

```

SF      Packet Type      Min      Max      Dropped
Ingress Queue#          KB      KB      packets
0      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
1      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
2      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
3      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
4      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
5      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
6      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
7      Green                4096    4096    0
      Yellow               3276    3276    0
      Out of Profile      0
FTOS#

```

Table 42-16. show queue statistics ingress Multicast Command Fields

Field	Description
SF Ingress Queue #	Switch Fabric Queue Number
Packet type	Green, yellow, and out-of-profile packets
Min KB	Minimum threshold for WRED queue
Max KB	Maximum threshold for WRED queue
Dropped Pkts	The number of packets dropped for green, yellow and out-of-profile

**Example
(brief)**

```

FTOS#show queue statistics ingress src-card 0 brief
Source Linecard 0

```

```

Dest LC      Src      Dest      Dropped
Port set    Port set  Port set  packets
0            0         0         0
0            0         1         100
0            1         0         0
0            1         1         100
1            0         0         0
1            0         1         100
1            1         0         0
1            1         1         100
2            0         0         0
2            0         1         100
2            1         0         0
2            1         1         100
3            0         0         0
3            0         1         100
3            1         0         0
3            1         1         100
4            0         0         0
4            0         1         100
4            1         0         0
4            1         1         100
5            0         0         0
5            0         1         100
5            1         0         0
5            1         1         100
6            0         0         0
6            0         1         100
6            1         0         0
6            1         1         100
RPM         0         0         0
RPM         1         0         100
Multicast   0         0         0
Multicast   1         0         0

FTOS#

```

Table 42-17. show queue statistics ingress brief Command Fields

Field	Description
Dest LC	Destination Line Card
Src Port Set	Source PortPipe Number
Dest Port Set	Destination PortPipe Number
Dropped Pkts	The number of packets dropped

**Related
Commands**

clear queue statistics egress	Clear egress queue statistics.
clear queue statistics ingress	Clear ingress queue statistics.
show queue statistics ingress	Display egress queue statistics

Routing Information Protocol (RIP)

Overview

Routing Information Protocol (RIP) is a Distance Vector routing protocol. FTOS supports both RIP version 1 (RIPv1) and RIP version 2 (RIPv2) on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.



Note: The C-Series platform supports RIP with FTOS version 7.6.1.0 and later. The S-Series platform supports RIP with FTOS version 7.8.1.0 and later. Prior to 7.6.1.0, only the E-Series platform supported RIP.

The FTOS implementation of RIP is based on IETF RFCs 2453 and RFC 1058. For more information on configuring RIP, refer to *FTOS Configuration Guide*.

Commands

The following commands enable you to configure RIP:

- [auto-summary](#)
- [clear ip rip](#)
- [debug ip rip](#)
- [default-information originate](#)
- [default-metric](#)
- [description](#)
- [distance](#)
- [distribute-list in](#)
- [distribute-list out](#)
- [ip poison-reverse](#)
- [ip rip receive version](#)
- [ip rip send version](#)
- [ip split-horizon](#)
- [maximum-paths](#)
- [neighbor](#)

- [network](#)
- [offset-list](#)
- [output-delay](#)
- [passive-interface](#)
- [redistribute](#)
- [redistribute isis](#)
- [redistribute ospf](#)
- [router rip](#)
- [show config](#)
- [show ip rip database](#)
- [show running-config rip](#)
- [timers basic](#)
- [version](#)

auto-summary

C E S

S4810

S4820T

Restore the default behavior of automatic summarization of subnet routes into network routes. This command applies only to RIP version 2.

Syntax

auto-summary

To send sub-prefix routing information, enter no auto-summary .

Default

Enabled.

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

clear ip rip

C E S

S4810

S4820T

Update all the RIP routes in the FTOS routing table.

Syntax

clear ip rip

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

This command triggers updates of the main RIP routing tables.

debug ip rip

C E S

S4810

S4820T

Examine RIP routing information for troubleshooting.

Syntax

debug ip rip [*interface* | database | events [*interface*] | packet [*interface*] | trigger]

To turn off debugging output, use the no debug ip rip command.

Parameters

<i>interface</i>	(OPTIONAL) Enter the interface type and ID as one of the following: <ul style="list-style-type: none">For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.For a VLAN, enter the keyword vlan followed by a number from 1 to 4094. Note: This option is available only on E-Series when entered as a standalone option. It is available on both C-Series and E-Series as a sub-option.
database	(OPTIONAL) Enter the keyword database to display messages when there is a change to the RIP database.
events	(OPTIONAL) Enter the keyword events to debug only RIP protocol changes.
packet	(OPTIONAL) Enter the keyword events to debug only RIP protocol packets. Note: This option is available only on C-Series.
trigger	(OPTIONAL) Enter the keyword trigger to debug only RIP trigger extensions.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.

Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

default-information originate

C E S

S4810

S4820T

Generate a default route for the RIP traffic.

Syntax

default-information originate [always] [metric *metric-value*] [route-map *map-name*]

To return to the default values, enter no default-information originate.

Parameters

always	(OPTIONAL) Enter the keyword always to enable the switch software to always advertise the default route.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number as the metric value. Range: 1 to 16 Default: 1
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route-map.

Defaults

Disabled

metric: 1

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The default route must be present in the switch routing table for the [default-information originate](#) command to take effect.

default-metric

C E S

S4810

S4820T

Change the default metric for routes. Use this command with the **redistribute** command to ensure that all redistributed routes use the same metric value.

Syntax `default-metric number`

To return the default metric to the original values, enter `no default-metric`.

Parameters	<i>number</i>	Specify a number. Range: 1 to 16. The default is 1.
-------------------	---------------	---

Default 1

Command Modes ROUTER RIP

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

Usage Information This command ensures that route information being redistributed is converted to the same metric value.

Related Commands	redistribute	Allows you to redistribute routes learned by other methods.
-------------------------	------------------------------	---

description

C **E** **S**

S4810

S4820T

Enter a description of the RIP routing protocol

Syntax `description { description }`

To remove the description, use the `no description { description }` command.

Parameters	<i>description</i>	Enter a description to identify the RIP protocol (80 characters maximum).
-------------------	--------------------	---

Defaults No default behavior or values

Command Modes ROUTER RIP

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-7.7.1.0	Introduced on E-Series

**Related
Commands**

router rip	Enter ROUTER mode on the switch.
----------------------------	----------------------------------

distance

C E S

S4810

S4820T

Assign a weight (for prioritization) to all routes in the RIP routing table or to a specific route. Lower weights (“administrative distance”) are preferred.

Syntax

`distance weight [ip-address mask [prefix-name]]`

To return to the default values, use the `no distance weight [ip-address mask]` command.

Parameters

<i>weight</i>	Enter a number from 1 to 255 for the weight (for prioritization). The default is 120.
<i>ip-address</i>	(OPTIONAL) Enter the IP address, in dotted decimal format (A.B.C.D), of the host or network to receive the new distance metric.
<i>mask</i>	If you enter an IP address, you must also enter a mask for that IP address, in either dotted decimal format or /prefix format (/x)
<i>prefix-name</i>	(OPTIONAL) Enter a configured prefix list name.

Defaults

`weight = 120`

Command Modes

ROUTER RIP

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

**Related
Commands**

default-metric	Assign one distance metric to all routes learned using the redistribute command.
--------------------------------	--

distribute-list in

C E S

S4810

S4820T

Configure a filter for incoming routing updates.

Syntax

`distribute-list prefix-list-name in [interface]`

To delete the filter, use the `no distribute-list prefix-list-name in` command.

Parameters	<i>prefix-list-name</i>	Enter the name of a configured prefix list.
	<i>interface</i>	<p>(OPTIONAL) Identifies the interface type slot/port as one of the following:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
Defaults	Not configured.	
Command Modes	ROUTER RIP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	ip prefix-list	Enter the PREFIX-LIST mode and configure a prefix list.

distribute-list out

C **E** **S**

S4810

S4820T

Configure a filter for outgoing routing updates.

Syntax

`distribute-list prefix-list-name out [interface | bgp | connected | isis | ospf | static]`

To delete the filter, use the `no distribute-list prefix-list-name out` command.

Parameters

<i>prefix-list-name</i>	Enter the name of a configured prefix list.
<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>connected</i>	(OPTIONAL) Enter the keyword <code>connected</code> to filter only directly connected routes.
<i>isis</i>	(OPTIONAL) Enter the keyword <code>isis</code> to filter only IS-IS routes. Note: This option is only available on E-Series.
<i>ospf</i>	(OPTIONAL) Enter the keyword <code>ospf</code> to filter all OSPF routes.
<i>static</i>	(OPTIONAL) Enter the keyword <code>static</code> to filter manually configured routes.

Defaults

Not configured.

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Related Commands

ip prefix-list	Enter the PREFIX-LIST mode and configure a prefix list.
--------------------------------	---

ip poison-reverse

C **E** **S**

Set the prefix of the RIP routing updates to the RIP infinity value.

S4810**S4820T****Syntax**

ip poison-reverse

To disable poison reverse, enter no ip poison-reverse.

Defaults	Disabled.	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	ip split-horizon	Set RIP routing updates to exclude routing prefixes.

ip rip receive version



Set the interface to receive specific versions of RIP. The RIP version you set on the interface overrides the [version](#) command in the ROUTER RIP mode.

Syntax ip rip receive version [1] [2]

To return to the default, enter no ip rip receive version.

Parameters	1	(OPTIONAL) Enter the number 1 for RIP version 1.
	2	(OPTIONAL) Enter the number 2 for RIP version 2.

Defaults IPv1 and IPv2

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

Usage Information If you want the interface to receive both versions of RIP, enter ip rip receive version 1 2.

Related Commands	ip rip send version	Sets the RIP version to be used for sending RIP traffic on an interface.
	version	Sets the RIP version to be used for the switch software.

ip rip send version

C E S

S4810

S4820T

Set the interface to send a specific version of RIP. The version you set on the interface overrides the [version](#) command in the ROUTER RIP mode.

Syntax

```
ip rip send version [1] [2]
```

To return to the default value, enter no ip rip send version.

Parameters

1	(OPTIONAL) Enter the number 1 for RIP version 1. The default is RIPv1.
---	--

2	(OPTIONAL) Enter the number 2 for RIP version 2.
---	--

Defaults

RIPv1

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.8.1.0	Introduced on S-Series
-----------------	------------------------

Version 7.6.1.0	Introduced on C-Series
-----------------	------------------------

pre-Version 6.2.1.1	Introduced on E-Series
---------------------	------------------------

Usage Information

To enable the interface to send both version of RIP packets, enter ip rip send version 1 2.

Related Commands

ip rip receive version	Sets the RIP version for the interface to receive traffic.
--	--

version	Sets the RIP version to be used for the switch software.
-------------------------	--

ip split-horizon

C E S

S4810

S4820T

Enable split-horizon for RIP data on the interface. As described in RFC 2453, the split-horizon scheme prevents any routes learned over a specific interface to be sent back out that interface.

Syntax

```
ip split-horizon
```

To disable split-horizon, enter no ip split-horizon.

Defaults

Enabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Related Commands

ip poison-reverse	Set the prefix for RIP routing updates.
-----------------------------------	---

maximum-paths

C E S

S4810

S4820T

Set RIP to forward packets over multiple paths.

Syntax

maximum-paths *number*

To return to the default values, enter no maximum-paths.

Parameters

<i>number</i>	Enter the number of paths. Range: 1 to 16. The default is 4 paths.
---------------	--

Defaults

4

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

RIP supports a maximum of 16 ECMP paths.

neighbor

C E S

S4810

S4820T

Define a neighbor router with which to exchange RIP information.

Syntax

neighbor *ip-address*

To delete a neighbor setting, use the no neighbor *ip-address* command.

Parameters	<i>ip-address</i> Enter the IP address, in dotted decimal format, of a router with which to exchange information.										
Defaults	Not configured.										
Command Modes	ROUTER RIP										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.8.1.0	Introduced on S-Series	Version 7.6.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.8.1.0	Introduced on S-Series										
Version 7.6.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										
Usage Information	<p>When a neighbor router is identified, unicast data exchanges occur. Multiple neighbor routers are possible.</p> <p>Use the passive-interface command in conjunction with the neighbor command to ensure that only specific interfaces are receiving and sending data.</p>										
Related Commands	<table border="1"> <tr> <td>passive-interface</td> <td>Sets the interface to only listen to RIP broadcasts.</td> </tr> </table>	passive-interface	Sets the interface to only listen to RIP broadcasts.								
passive-interface	Sets the interface to only listen to RIP broadcasts.										

network



Enable RIP for a specified network. Use this command to enable RIP on all networks connected to the switch.

Syntax

`network ip-address`

To disable RIP for a network, use the `no network ip-address` command.

Parameter	<i>ip-address</i> Specify an IP network address in dotted decimal format. You cannot specify a subnet.										
Defaults	No RIP network is configured.										
Command Modes	ROUTER RIP										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.8.1.0	Introduced on S-Series	Version 7.6.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.8.1.0	Introduced on S-Series										
Version 7.6.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										

Usage Information

You can enable an unlimited number of RIP networks.

RIP operates over interfaces configured with any address specified by the [network](#) command.

offset-list

C E S

S4810

S4820T

Specify a number to add to the incoming or outgoing route metrics learned via RIP.

Syntax

`offset-list prefix-list-name {in | out} offset [interface]`

To delete an offset list, use the `no offset-list prefix-list-name {in | out} offset [interface]` command.

Parameters

<i>prefix-list-name</i>	Enter the name of an established Prefix list to determine which incoming routes will be modified.
<i>offset</i>	Enter a number from zero (0) to 16 to be applied to the incoming route metric matching the access list specified. If you set an offset value to zero (0), no action is taken.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Defaults

Not configured.

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series

Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information When the offset metric is applied to an interface, that value takes precedence over an offset value that is not extended to an interface.

Related Commands	ip prefix-list Enter the PREFIX-LIST mode and configure a prefix list.
-------------------------	--

output-delay



Set the interpacket delay of successive packets to the same neighbor.

Syntax

output-delay *delay*

To return to the switch software defaults for interpacket delay, enter no output-delay.

Parameters

<i>delay</i>	Specify a number of milliseconds as the delay interval. Range: 8 to 50
--------------	---

Default

Not configured.

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

This command is intended for low-speed interfaces.

passive-interface



Suppress routing updates on a specified interface.

Syntax

passive-interface *interface*

To delete a passive interface, use the no passive-interface *interface* command.

Parameters

<i>interface</i>	Enter the following information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information.For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information.For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
------------------	---

Defaults

Not configured.

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

Although the passive interface will neither send nor receive routing updates, the network on that interface will still be included in RIP updates sent via other interfaces.

Related Commands

neighbor	Enable RIP for a specified network.
network	Define a neighbor.

redistribute

C **E** **S**

S4810

S4820T

Redistribute information from other routing instances.

Syntax

`redistribute {connected | static}`

To disable redistribution, use the `no redistribute {connected | static}` command.

Parameters	connected	Enter the keyword <code>connected</code> to specify that information from active routes on interfaces is redistributed.
	static	Enter the keyword <code>static</code> to specify that information from static routes is redistributed.
Defaults	Not configured.	
Command Modes	ROUTER RIP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Usage Information	To redistribute the default route (0.0.0.0/0), configure the default-information originate command.	
Related Commands	default-information originate	Generate a default route for RIP traffic.

redistribute isis

E **S4810**

S4820T

Redistribute routing information from an IS-IS instance.

Syntax

```
redistribute isis [tag] [level-1 | level-1-2 | level-2] [metric metric-value] [route-map map-name]
```

To disable redistribution, use the `no redistribute isis [tag] [level-1 | level-1-2 | level-2] [metric metric-value] [route-map map-name]` command.

Parameters

<i>tag</i>	(OPTIONAL) Enter the name of the IS-IS routing process.
<i>level-1</i>	(OPTIONAL) Enter the keyword <code>level-1</code> to redistribute only IS-IS Level-1 routes.
<i>level-1-2</i>	(OPTIONAL) Enter the keyword <code>level-1-2</code> to redistribute both IS-IS Level-1 and Level-2 routes.
<i>level-2</i>	(OPTIONAL) Enter the keyword <code>level-2</code> to redistribute only IS-IS Level-2 routes.
<i>metric metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> followed by a number as the metric value. Range: 0 to 16
<i>route-map map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> followed by the name of a configured route map.

Defaults	Not configured.						
Command Modes	ROUTER RIP						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.7.0	Introduced on S4810						
pre-Version 6.2.1.1	Introduced on E-Series						
Usage Information	IS-IS is not supported on S-Series systems.						

redistribute ospf

C **E** **S**

S4810

S4820T

Redistribute routing information from an OSPF process.

Syntax

redistribute ospf *process-id* [match external { 1 | 2 } | match internal | metric *metric-value*] [route-map *map-name*]

To disable redistribution, enter no redistribute ospf *process-id* [match external { 1 | 2 } | match internal | metric *metric-value*] [route-map *map-name*] command.

Parameters	<table border="1"> <tr> <td><i>process-id</i></td> <td>Enter a number that corresponds to the OSPF process ID to be redistributed. Range: 1 to 65355.</td> </tr> <tr> <td>match external { 1 2 }</td> <td>(OPTIONAL) Enter the keywords match external followed by the numbers 1 or 2 to indicated that external 1 routes or external 2 routes should be redistributed.</td> </tr> <tr> <td>match internal</td> <td>(OPTIONAL) Enter the keywords match internal to indicate that internal routes should be redistributed.</td> </tr> <tr> <td>metric <i>metric-value</i></td> <td>(OPTIONAL) Enter the keyword metric followed by a number as the metric value. Range: 0 to 16</td> </tr> <tr> <td>route-map <i>map-name</i></td> <td>(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.</td> </tr> </table>	<i>process-id</i>	Enter a number that corresponds to the OSPF process ID to be redistributed. Range: 1 to 65355.	match external { 1 2 }	(OPTIONAL) Enter the keywords match external followed by the numbers 1 or 2 to indicated that external 1 routes or external 2 routes should be redistributed.	match internal	(OPTIONAL) Enter the keywords match internal to indicate that internal routes should be redistributed.	metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number as the metric value. Range: 0 to 16	route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.
<i>process-id</i>	Enter a number that corresponds to the OSPF process ID to be redistributed. Range: 1 to 65355.										
match external { 1 2 }	(OPTIONAL) Enter the keywords match external followed by the numbers 1 or 2 to indicated that external 1 routes or external 2 routes should be redistributed.										
match internal	(OPTIONAL) Enter the keywords match internal to indicate that internal routes should be redistributed.										
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword metric followed by a number as the metric value. Range: 0 to 16										
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword route-map followed by the name of a configured route map.										

Defaults	Not configured.						
Command Modes	ROUTER RIP						
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.8.1.0</td> <td>Introduced on S-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.8.1.0	Introduced on S-Series
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.7.0	Introduced on S4810						
Version 7.8.1.0	Introduced on S-Series						

Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

router rip

C E S

S4810

S4820T

Enter the ROUTER RIP mode to configure and enable RIP.

Syntax

router rip

To disable RIP, enter no router rip.

Defaults

Disabled.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

To enable RIP, you must assign a network address using the [network](#) command.

Example

```
FTOS(conf)#router rip
FTOS(conf-router_rip)#
```

Related Commands

network	Enable RIP.
exit	Return to the CONFIGURATION mode.

show config

C E S

S4810

S4820T

Display the changes you made to the RIP configuration. Default values are not shown.

Syntax

show config

Command Modes

ROUTER RIP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS(conf-router_rip)#show config
!
router rip
 network 172.31.0.0
 passive-interface GigabitEthernet 0/1
FTOS(conf-router_rip)#
```

show ip rip database

C E S

S4810

S4820T

Display the routes learned by RIP. If the switch learned no RIP routes, no output is generated.

Syntax

show ip rip database [*ip-address mask*]

Parameters

<i>ip-address</i>	(OPTIONAL) Specify an IP address in dotted decimal format to view RIP information on that network only. If you enter an IP address, you must also enter a mask for that IP address.
<i>mask</i>	(OPTIONAL) Specify a mask, in /network format, for the IP address.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show ip rip database
Total number of routes in RIP database: 1624
204.250.54.0/24
    [50/1] via 192.14.1.3, 00:00:12, GigabitEthernet 9/15
204.250.54.0/24          auto-summary
203.250.49.0/24
    [50/1] via 192.13.1.3, 00:00:12, GigabitEthernet 9/14
203.250.49.0/24          auto-summary
210.250.40.0/24
    [50/2] via 1.1.18.2, 00:00:14, Vlan 18
    [50/2] via 1.1.130.2, 00:00:12, Port-channel 30
210.250.40.0/24          auto-summary
207.250.53.0/24
    [50/2] via 1.1.120.2, 00:00:55, Port-channel 20
    [50/2] via 1.1.130.2, 00:00:12, Port-channel 30
    [50/2] via 1.1.10.2, 00:00:18, Vlan 10
207.250.53.0/24          auto-summary
208.250.42.0/24
    [50/2] via 1.1.120.2, 00:00:55, Port-channel 20
    [50/2] via 1.1.130.2, 00:00:12, Port-channel 30
```

```
[50/2] via 1.1.10.2, 00:00:18, Vlan 10
208.250.42.0/24 auto-summary
```

Table 43-1. Fields in show ip rip database Command Output

Field	Description
Total number of routes in RIP database	Displays the number of RIP routes stored in the RIP database.
100.10.10.0/24 directly connected	Lists the route(s) directly connected.
150.100.0.0 redistributed	Lists the routes learned through redistribution.
209.9.16.0/24...	Lists the routes and the sources advertising those routes.

show running-config rip

C **E** **S**

Use this feature to display the current RIP configuration.

S4810

S4820T

Syntax

show running-config rip

Defaults

No default values or behavior

Command Modes

EXEC Privilege

Example

```
show running-config rip
!
router rip
 distribute-list Test1 in
 distribute-list Test21 out
 network 10.0.0.0
 passive-interface GigabitEthernet 2/0
 neighbor 20.20.20.20
 redistribute ospf 999
 version 2
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.7.1.0	Introduced on C-Series
Version 7.6.1.0	Introduced on E-Series

timers basic

C **E** **S**

Manipulate the RIP timers for routing updates, invalid, holddown times and flush time.

S4810

S4820T

Syntax `timers basic update invalid holddown flush`

To return to the default settings, enter `no timers basic`.

Parameters	
<i>update</i>	Enter the number of seconds to specify the rate at which RIP routing updates are sent. Range: zero (0) to 4294967295. Default: 30 seconds.
<i>invalid</i>	Enter the number of seconds to specify the time interval before routing updates are declared invalid or expired. The <i>invalid</i> value should be at least three times the <i>update</i> timer value. Range: zero (0) to 4294967295. Default: 180 seconds.
<i>holddown</i>	Enter the number of seconds to specify a time interval during which the route is marked as unreachable but still sending RIP packets. The <i>holddown</i> value should be at least three times the <i>update</i> timer value. Range: zero (0) to 4294967295. Default: 180 seconds.
<i>flush</i>	Enter the number of seconds to specify the time interval during which the route is advertised as unreachable. When this interval expires, the route is flushed from the routing table. The <i>flush</i> value should be greater than the <i>update</i> value. Range: zero (0) to 4294967295. Default is 240 seconds.

Defaults `update = 30 seconds; invalid = 180 seconds; holddown = 180 seconds; flush = 240 seconds.`

Command Modes `ROUTER RIP`

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information If the timers on one router are changed, the timers on all routers in the RIP domain must also be synchronized.

version

C E S

S4810

S4820T

Syntax `version {1 | 2}`

Specify either RIP version 1 or RIP version 2.

To return to the default version setting, enter `no version`.

Parameters	1	Enter the keyword 1 to specify RIP version 1.
	2	Enter the keyword 2 to specify RIP version 2.
Default	The FTOS sends RIPv1 and receives RIPv1 and RIPv2.	
Command Modes	ROUTER RIP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	ip rip receive version	Set the RIP version to be received on the interface.
	ip rip send version	Set the RIP version to be sent out the interface.

Remote Monitoring (RMON)

Overview

FTOS RMON is implemented on all Dell Force10 switching platforms as indicated by the characters that appear below each command heading: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, **S4820T**, or **Z** Z-Series.

FTOS RMON is based on IEEE standards, providing both 32-bit and 64-bit monitoring, and long-term statistics collection. FTOS RMON supports the following RMON groups, as defined in RFC-2819, RFC-3273, and RFC-3434:

- Ethernet Statistics Table RFC-2819
- Ethernet Statistics High-Capacity Table RFC-3273, 64bits
- Ethernet History Control Table RFC-2819
- Ethernet History Table RFC-2819
- Ethernet History High-Capacity Table RFC-3273, 64bits
- Alarm Table RFC-2819
- High-Capacity Alarm Table (64bits) RFC-3434, 64bits
- Event Table RFC-2819
- Log Table RFC-2819

FTOS RMON does not support the following statistics:

- etherStatsCollisions
- etherHistoryCollisions
- etherHistoryUtilization



Note: Only SNMP GET/GETNEXT access is supported. Configure RMON using the RMON commands. Collected data is lost during a chassis reboot.

Commands

The FTOS Remote Network Monitoring RMON commands are:

- [rmon alarm](#)
- [rmon collection history](#)

- [rmon collection statistics](#)
- [rmon event](#)
- [rmon hc-alarm](#)
- [show rmon](#)
- [show rmon alarms](#)
- [show rmon events](#)
- [show rmon hc-alarm](#)
- [show rmon history](#)
- [show rmon log](#)
- [show rmon statistics](#)

rmon alarm

C E S Z

S4810

S4820T

Set an alarm on any MIB object.

Syntax

`rmon alarm number variable interval {delta | absolute} rising-threshold value event-number falling-threshold value event-number [owner string]`

To disable the alarm, use the `no rmon alarm number` command.

Parameters

<i>number</i>	Enter the alarm integer number from 1 to 65535. The value must be unique in the RMON Alarm Table.
<i>variable</i>	The MIB object to monitor. The variable must be in the SNMP OID format, for example, 1.3.6.1.2.1.1.3 The object type must be a 32 bit integer.
<i>interval</i>	Time, in seconds, the alarm monitors the MIB variables; this is the <code>alarmSampleType</code> in the RMON Alarm table. Range: 5 to 3600 seconds
<i>delta</i>	Enter the keyword <code>delta</code> to test the change between MIB variables. This is the <code>alarmSampleType</code> in the RMON Alarm table.
<i>absolute</i>	Enter the keyword <code>absolute</code> to test each MIB variable directly. This is the <code>alarmSampleType</code> in the RMON Alarm table.
<i>rising-threshold value event-number</i>	Enter the keyword <code>rising-threshold</code> followed by the value (32bit) the rising-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the rising threshold exceeds its limit. This value is the same as the <code>alarmRisingEventIndex</code> or <code>alarmTable</code> of the RMON MIB. If there is no corresponding rising-threshold event, the value is zero.

<i>falling-threshold value event-number</i>	Enter the keyword <i>falling-threshold</i> followed by the value (32bit) the falling-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the falling threshold exceeds its limit. This value is the same as the <i>alarmFallingEventIndex</i> or the <i>alarmTable</i> of the RMON MIB. If there is no corresponding falling-threshold event, the value is zero.
<i>owner string</i>	(OPTIONAL) Enter the keyword <i>owner</i> followed by the owner name to specify an owner for the alarm. This is the <i>alarmOwner</i> object in the <i>alarmTable</i> of the RMON MIB.

Default

owner

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

rmon collection history

C **E** **S** **Z**

S4810

S4820T

Enable the RMON MIB history group of statistics collection on an interface.

Syntax

rmon collection history {*controlEntry integer*} [*owner name*] [*buckets number*] [*interval seconds*]

To remove a specified RMON history group of statistics collection, use the *no rmon collection history* {*controlEntry integer*} command.

Parameters

<i>controlEntry integer</i>	Enter the keyword <i>controlEntry</i> to specify the RMON group of statistics using a value. Then enter an integer value from 1 to 65535 that identifies the RMON group of statistics. The integer value must be a unique index in the RMON History Table.
<i>owner name</i>	(OPTIONAL) Enter the keyword <i>owner</i> followed by the owner name to record the owner of the RMON group of statistics.

	<i>buckets number</i>	(OPTIONAL) Enter the keyword buckets followed the number of buckets for the RMON collection history group of statistics. Bucket Range: 1 to 1000 Default: 50
	<i>interval seconds</i>	(OPTIONAL) Enter the keyword interval followed the number of seconds in each polling cycle. Range: 5 to 3600 seconds Default: 1800 seconds
Defaults	No default behavior	
Command Modes	CONFIGURATION INTERFACE (config-if)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.1.1.0	Introduced for E-Series

rmon collection statistics

C **E** **S** **Z**

S4810

S4820T

Enable RMON MIB statistics collection on an interface.

Syntax

rmon collection statistics { controlEntry *integer* } [owner *name*]

To remove RMON MIB statistics collection on an interface, use the no rmon collection statistics { controlEntry *integer* } command.

Parameters

<i>controlEntry integer</i>	Enter the keyword controlEntry to specify the RMON group of statistics using a value. Then enter an integer value from 1 to 65535 that identifies the RMON Statistic Table. The integer value must be a unique in the RMON Statistic Table.
<i>owner name</i>	(OPTIONAL) Enter the keyword owner followed by the owner name to record the owner of the RMON group of statistics.

Defaults

No default behavior

Command Modes

CONFIGURATION INTERFACE (config-if)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

rmon event

C E S Z

S4810

S4820T

Add an event in the RMON event table.

Syntax

rmon event *number* [log] [trap *community*] [description *string*] [owner *name*]

To disable RMON on an interface, use the no rmon event *number* [log] [trap *community*] [description *string*] command.

Parameters

<i>number</i>	Assign an event number in integer format from 1 to 65535. The number value must be unique in the RMON Event Table.
log	(OPTIONAL) Enter the keyword log to generate an RMON log entry. The log entry is triggered and sets the eventType in the RMON MIB to log or log-and-trap. Default: No log
trap <i>community</i>	(OPTIONAL) Enter the keyword trap followed by an SNMP community string to configure the eventType setting in the RMON MIB. This sets either snmp-trap or log-and-trap. Default: public
description <i>string</i>	(OPTIONAL) Enter the keyword description followed by a string describing the event.
owner <i>name</i>	(OPTIONAL) Enter the keyword owner followed by the name of the owner of this event.

Defaults

as described above

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

rmon hc-alarm

C E S Z

S4810

S4820T

Set an alarm on any MIB object.

Syntax

```
rmon hc-alarm number variable interval {delta | absolute} rising-threshold value
event-number falling-threshold value event-number [owner string]
```

To disable the alarm, use the no rmon hc-alarm *number* command.

Parameters

<i>number</i>	Enter the alarm integer number from 1 to 65535. The value must be unique in the RMON Alarm Table.
<i>variable</i>	The MIB object to monitor. The variable must be in the SNMP OID format, for example, 1.3.6.1.2.1.1.3 The object type must be a 64 bit integer.
<i>interval</i>	Time, in seconds, the alarm monitors the MIB variables; this is the alarmSampleType in the RMON Alarm table. Range: 5 to 3600 seconds
delta	Enter the keyword delta to test the change between MIB variables. This is the alarmSampleType in the RMON Alarm table.
absolute	Enter the keyword absolute to test each MIB variable directly. This is the alarmSampleType in the RMON Alarm table.
rising-threshold <i>value</i> <i>event-number</i>	Enter the keyword rising-threshold followed by the value (64 bit) the rising-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the rising threshold exceeds its limit. This value is the same as the alarmRisingEventIndex or alarmTable of the RMON MIB. If there is no corresponding rising-threshold event, the value is zero.
falling-threshold <i>value</i> <i>event-number</i>	Enter the keyword falling-threshold followed by the value (64 bit) the falling-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the falling threshold exceeds its limit. This value is the same as the alarmFallingEventIndex or the alarmTable of the RMON MIB. If there is no corresponding falling-threshold event, the value is zero.
owner <i>string</i>	(OPTIONAL) Enter the keyword owner followed the owner name to specify an owner for the alarm. This is the alarmOwner object in the alarmTable of the RMON MIB.

Defaults

owner

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

show rmon

C E S Z

S4810

S4820T

Display the RMON running status including the memory usage.

Syntax

show rmon

Defaults

No default behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS# show rmon
RMON status
  total memory used 218840 bytes.
  ether statistics table: 8 entries, 4608 bytes
  ether history table: 8 entries, 6000 bytes
  alarm table: 390 entries, 102960 bytes
  high-capacity alarm table: 5 entries, 1680 bytes
  event table: 500 entries, 206000 bytes
  log table: 2 entries, 552 bytes
FTOS#
```

show rmon alarms

C E S Z

S4810

S4820T

Display the contents of the RMON Alarm Table.

Syntax

show rmon alarms [*index*] [*brief*]

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
<i>brief</i>	(OPTIONAL) Enter the keyword <i>brief</i> to display the RMON Alarm Table in an easy-to-read format.

Defaults

No default behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

Example (index)

```

FTOS#show rmon alarm 1
RMON alarm entry 1
  sample Interval: 5
  object: 1.3.6.1.2.1.1.3
  sample type: absolute value.
  value: 255161
  alarm type: rising or falling alarm.
  rising threshold: 1, RMON event index: 1
  falling threshold: 501, RMON event index: 501
  alarm owner: 1
  alarm status: OK
FTOS#

```

Example (brief)

```

FTOS#show rmon alarm br
index          SNMP OID
-----
1              1.3.6.1.2.1.1.3
2              1.3.6.1.2.1.1.3
3              1.3.6.1.2.1.1.3
4              1.3.6.1.2.1.1.3
5              1.3.6.1.2.1.1.3
6              1.3.6.1.2.1.1.3
7              1.3.6.1.2.1.1.3
8              1.3.6.1.2.1.1.3
9              1.3.6.1.2.1.1.3
10             1.3.6.1.2.1.1.3
11             1.3.6.1.2.1.1.3
12             1.3.6.1.2.1.1.3
13             1.3.6.1.2.1.1.3
14             1.3.6.1.2.1.1.3
15             1.3.6.1.2.1.1.3
16             1.3.6.1.2.1.1.3
17             1.3.6.1.2.1.1.3
18             1.3.6.1.2.1.1.3
19             1.3.6.1.2.1.1.3
20             1.3.6.1.2.1.1.3
21             1.3.6.1.2.1.1.3
22             1.3.6.1.2.1.1.3
FTOS#

```

show rmon events

Display the contents of RMON Event Table.

Syntax show rmon events [*index*] [brief]

Parameters	<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
	brief	(OPTIONAL) Enter the keyword brief to display the RMON Event Table in an easy-to-read format.

Defaults No default behavior

Command Modes EXEC

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.1.1.0	Introduced for E-Series

Example (index)

```
FTOS#show rmon event 1
RMON event entry 1
  description: 1
  event type: LOG and SNMP TRAP.
  event community: public
  event last time sent: none
  event owner: 1
  event status: OK
FTOS#
```

Example (brief)

```
FTOS#show rmon event br
index          description
-----
1              1
2              2
3              3
4              4
5              5
6              6
7              7
8              8
9              9
10             10
11             11
12             12
13             13
14             14
15             15
16             16
17             17
18             18
19             19
20             20
21             21
22             22
FTOS#
```

show rmon hc-alarm

C E S Z

S4810

S4820T

Display the contents of RMON High-Capacity Alarm Table.

Syntax show rmon hc-alarm [*index*] [brief]

Parameters	
<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
brief	(OPTIONAL) Enter the keyword brief to display the RMON High-Capacity Alarm Table in an easy-to-read format.

Defaults No default behavior

Command Modes EXEC

Command History	
Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

Example (brief)

```

FTOS#show rmon hc-alarm brief
index          SNMP OID
-----
1              1.3.6.1.2.1.1.3
2              1.3.6.1.2.1.1.3
3              1.3.6.1.2.1.1.3
4              1.3.6.1.2.1.1.3
5              1.3.6.1.2.1.1.3
FTOS#

```

Example (index)

```

FTOS#show rmon hc-alarm 1
RMON high-capacity alarm entry 1
  object: 1.3.6.1.2.1.1.3
  sample interval: 5
  sample type: absolute value.
  value: 185638
  alarm type: rising or falling alarm.
  alarm rising threshold value: positive.
  rising threshold: 1001, RMON event index: 1
  alarm falling threshold value: positive.
  falling threshold: 999, RMON event index: 6
  alarm sampling failed 0 times.
  alarm owner: 1
  alarm storage type: non-volatile.
  alarm status: OK
FTOS#

```

show rmon history

C E S Z

S4810

S4820T

Display the contents of the RMON Ethernet History table.

Syntax show rmon history [*index*] [brief]

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
brief	(OPTIONAL) Enter the keyword brief to display the RMON Ethernet History table in an easy-to-read format.

Defaults No default behavior

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 6.1.1.0	Introduced for E-Series

Example (index)

```
FTOS#show rmon history 6001
RMON history control entry 6001
  interface: ifIndex.100974631 GigabitEthernet 2/0
  bucket requested: 1
  bucket granted: 1
  sampling interval: 5 sec
  owner: 1
  status: OK
FTOS#
```

Example (brief)

```
FTOS#show rmon history brief
index          ifIndex          interface
-----
6001           100974631        GigabitEthernet 2/0
6002           100974631        GigabitEthernet 2/0
6003           101236775        GigabitEthernet 2/1
6004           101236775        GigabitEthernet 2/1
9001           134529054        GigabitEthernet 3/0
9002           134529054        GigabitEthernet 3/0
9003           134791198        GigabitEthernet 3/1
9004           134791198        GigabitEthernet 3/1
FTOS#
```

show rmon log

C E S Z

S4810

S4820T

Display the contents of RMON Log Table.

Syntax show rmon log [*index*] [brief]

Parameters	<i>index</i>	(OPTIONAL) Enter the log index number to display just that entry.
	<i>brief</i>	(OPTIONAL) Enter the keyword <i>brief</i> to display the RMON Log Table in an easy-to-read format.

Defaults No default behavior

Command Modes EXEC

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	Version 6.1.1.0	Introduced for E-Series

Example (index)

```
FTOS#show rmon log 2
RMON log entry, alarm table index 2, log index 1
  log time: 14638 (THU AUG 12 22:10:40 2004)
  description: 2
FTOS#
```

Example (brief)

```
FTOS#show rmon log br
eventIndex      description
-----
2                2
4                4
FTOS#
```

Usage Information The log table has a maximum of 500 entries. If the log exceeds that maximum, the oldest log entry is purged to allow room for the new entry.

show rmon statistics

C **E** **S** **Z**

S4810

S4820T

Display the contents of RMON Ethernet Statistics table.

Syntax show rmon statistics [*index*] [*brief*]

Parameters	<i>index</i>	(OPTIONAL) Enter the index number to display just that entry.
	<i>brief</i>	(OPTIONAL) Enter the keyword <i>brief</i> to display the RMON Ethernet Statistics table in an easy-to-read format.

Defaults No default behavior

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.1.1.0	Introduced for E-Series

Example (index)

```
FTOS#show rmon statistics 6001
RMON statistics entry 6001
  interface: ifIndex.100974631 GigabitEthernet 2/0
  packets dropped: 0
  bytes received: 0
  packets received: 0
  broadcast packets: 0
  multicast packets: 0
  CRC error: 0
  under-size packets: 0
  over-size packets: 0
  fragment errors: 0
  jabber errors: 0
  collision: 0
  64bytes packets: 0
  65-127 bytes packets: 0
  128-255 bytes packets: 0
  256-511 bytes packets: 0
  512-1023 bytes packets: 0
  1024-1518 bytes packets: 0
  owner: 1
  status: OK
  <high-capacity data>
  HC packets received overflow: 0
  HC packets received: 0
  HC bytes received overflow: 0
  HC bytes received: 0
  HC 64bytes packets overflow: 0
  HC 64bytes packets: 0
  HC 65-127 bytes packets overflow: 0
  HC 65-127 bytes packets: 0
  HC 128-255 bytes packets overflow: 0
  HC 128-255 bytes packets: 0
  HC 256-511 bytes packets overflow: 0
  HC 256-511 bytes packets: 0
  HC 512-1023 bytes packets overflow: 0
  HC 512-1023 bytes packets: 0
  HC 1024-1518 bytes packets overflow: 0
  HC 1024-1518 bytes packets: 0
FTOS#
```

Example (brief)

```
FTOS#show rmon statistics br
index          ifIndex          interface
-----
6001           100974631        GigabitEthernet 2/0
6002           100974631        GigabitEthernet 2/0
6003           101236775        GigabitEthernet 2/1
6004           101236775        GigabitEthernet 2/1
9001           134529054        GigabitEthernet 3/0
9002           134529054        GigabitEthernet 3/0
9003           134791198        GigabitEthernet 3/1
```

9004
FTOS#

134791198

GigabitEthernet 3/1

Rapid Spanning Tree Protocol (RSTP)

Overview

The FTOS implementation of RSTP (Rapid Spanning Tree Protocol) is based on the IEEE 802.1w standard spanning-tree protocol. The RSTP algorithm configures connectivity throughout a bridged LAN that is comprised of LANs interconnected by bridges.

RSTP is supported by FTOS on all Dell Force10 systems, as indicated by the characters that appear below each command heading: C-Series: **C**, E-Series: **E**, S-Series: **S**, **S4810**, or **S4810T**.

Commands

The FTOS RSTP commands are:

- `bridge-priority`
- `debug spanning-tree rstp`
- `description`
- `description`
- `forward-delay`
- `hello-time`
- `max-age`
- `protocol spanning-tree rstp`
- `show config`
- `show spanning-tree rstp`
- `spanning-tree rstp`
- `tc-flush-standard`

bridge-priority

C E S

S4810

S4820T

Set the bridge priority for RSTP.

Syntax

bridge-priority *priority-value*

To return to the default value, enter no bridge-priority.

Parameters

<i>priority-value</i>	Enter a number as the bridge priority value in increments of 4096. Range: 0 to 61440 Default: 32768
-----------------------	---

Defaults

32768

Command Modes

CONFIGURATION RSTP (conf-rstp)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced for E-Series

Related Commands

protocol spanning-tree rstp	Enter the Rapid Spanning Tree mode
---	------------------------------------

debug spanning-tree rstp

C E S

S4810

S4820T

Enable debugging of RSTP and view information on the protocol.

Syntax

debug spanning-tree rstp [all | bpdu *interface* {in | out} | events]

To disable debugging, enter no debug spanning-tree rstp.

Parameters

all	(OPTIONAL) Enter the keyword all to debug all spanning tree operations.
bpdu <i>interface</i> {in out}	(OPTIONAL) Enter the keyword bpdu to debug Bridge Protocol Data Units. (OPTIONAL) Enter the interface keyword along with the type slot/port of the interface you want displayed. Type slot/port options are the following: <ul style="list-style-type: none">• For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information.• For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale.• For a SONET interface, enter the keyword sonet followed by the slot/port information.• For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. Optionally, enter an in or out parameter in conjunction with the optional interface: <ul style="list-style-type: none">• For Receive, enter in• For Transmit, enter out
events	(OPTIONAL) Enter the keyword events to debug RSTP events.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.2.1.1	Introduced for E-Series

Example

```
FTOS#debug spanning-tree rstp bpdu gigabitethemet 2/0 ?in Receive (in) out Transmit (out)
```

description

C **E** **S**

S4810

S4820T

Enter a description of the Rapid Spanning Tree

Syntax

description { *description* }

To remove the description, use the no description { *description* } command.

Parameters	<i>description</i>	Enter a description to identify the Rapid Spanning Tree (80 characters maximum).
Defaults		No default behavior or values
Command Modes		SPANNING TREE (The prompt is “config-rstp”.)
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	pre-7.7.1.0	Introduced
Related Commands	protocol spanning-tree rstp	Enter SPANNING TREE mode on the switch.

disable

C E S

S4810

S4820T

Disable RSTP globally on the system.

Syntax

disable

To enable Rapid Spanning Tree Protocol, enter no disable.

Defaults

RSTP is disabled

Command Modes

CONFIGURATION RSTP (conf-rstp)

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

Version 6.2.1.1 Introduced for E-Series

Related Commands

[protocol spanning-tree rstp](#) Enter the Rapid Spanning Tree mode

forward-delay

C E S

S4810

S4820T

Configure the amount of time the interface waits in the Listening State and the Learning State before transitioning to the Forwarding State.

Syntax

forward-delay *seconds*

To return to the default setting, enter no forward-delay.

Parameters	<hr/> <i>seconds</i> Enter the number of seconds that FTOS waits before transitioning RSTP to the forwarding state. Range: 4 to 30 Default: 15 seconds <hr/>
Defaults	15 seconds
Command Modes	CONFIGURATION RSTP (conf-rstp)
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 7.6.1.0 Support added for S-Series <hr/> Version 7.5.1.0 Support added for C-Series <hr/> Version 6.2.1.1 Introduced for E-Series <hr/>
Related Commands	<hr/> hello-time Change the time interval between BPDUs. <hr/> max-age Change the wait time before RSTP refreshes protocol configuration information. <hr/>

hello-time

C **E** **S**

S4810

S4820T

Set the time interval between generation of RSTP Data Units (BPDUs).

Syntax

hello-time [milli-second] *seconds*

To return to the default value, enter no hello-time.

Parameters	<hr/> <i>seconds</i> Enter a number as the time interval between transmission of BPDUs. Range: 1 to 10 seconds Default: 2 seconds. <hr/> <i>milli-second</i> Enter this keyword to configure a hello time on the order of milliseconds. Range: 50 - 950 milliseconds <hr/>
Defaults	2 seconds
Command Modes	CONFIGURATION RSTP (conf-rstp)
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.3.1.0 Added milli-second to S-Series. <hr/> Version 7.6.1.0 Support added for S-Series <hr/>

 Version 7.5.1.0 Support added for C-Series

 Version 6.2.1.1 Introduced for E-Series

Usage Information

The hello time is encoded in BPDUs in increments of 1/256ths of a second. The standard minimum hello time in seconds is 1 second, which is encoded as 256. Millisecond hello times are encoded using values less than 256; the millisecond hello time equals $(x/1000)*256$.

When millisecond hellos are configured, the default hello interval of 2 seconds is still used for edge ports; the millisecond hello interval is not used.

Related Commands

forward-delay Change the wait time before RSTP transitions to the Forwarding state.

max-age Change the wait time before RSTP refreshes protocol configuration information.

max-age

C E S
S4810
S4820T

Set the time interval for the RSTP bridge to maintain configuration information before refreshing that information.

Syntax

`max-age seconds`

To return to the default values, enter no max-age.

Parameters

<i>max-age</i>	Enter a number of seconds the FTOS waits before refreshing configuration information. Range: 6 to 40 seconds Default: 20 seconds
----------------	--

Defaults

20 seconds

Command Modes

CONFIGURATION RSTP (conf-rstp)

Command History

 Version 8.3.19.0 Introduced on S4820T

 Version 8.3.7.0 Introduced on S4810

 Version 7.6.1.0 Support added for S-Series

 Version 7.5.1.0 Support added for C-Series

 Version 6.2.1.1 Introduced for E-Series

Related Commands

max-age Change the wait time before RSTP transitions to the Forwarding state.

hello-time Change the time interval between BPDUs.

protocol spanning-tree rstp

C E S

Enter the RSTP mode to configure RSTP.

S4810

S4820T

Syntax protocol spanning-tree rstp

To exit the RSTP mode, enter `exit`.

Defaults Not configured

Command Modes CONFIGURATION RSTP (conf-rstp)

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Support added for S-Series
-----------------	----------------------------

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

Version 6.2.1.1	Introduced for E-Series
-----------------	-------------------------

Example

```
FTOS(conf)#protocol spanning-tree rstp
FTOS(config-rstp)##no disable
```

Usage Information RSTP is not enabled when you enter the RSTP mode. To enable RSTP globally on the system, enter [no disable](#) from the RSTP mode.

Related Commands [disable](#) Disable RSTP globally on the system.

show config

C E S

View the current configuration for the mode. Only non-default values are displayed.

S4810

S4820T

Syntax show config

Command Modes CONFIGURATION RSTP (conf-rstp)

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Support added for S-Series
-----------------	----------------------------

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

Version 6.2.1.1	Introduced for E-Series
-----------------	-------------------------

Example

```
FTOS(config-rstp)#show config
!
```

```

protocol spanning-tree rstp
no disable
bridge-priority 16384

```

show spanning-tree rstp

C E S

Display the RSTP configuration.

S4810

S4820T

Syntax

show spanning-tree rstp [brief] [guard]

Parameters

brief	(OPTIONAL) Enter the keyword brief to view a synopsis of the RSTP configuration information.
guard	(OPTIONAL) Enter the keyword guard to display the type of guard enabled on an RSTP interface and the current port state.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Support for the optional guard keyword was added on the C-Series, S-Series, and E-Series TeraScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 6.4.1.0	Expanded to display port error disable state (EDS) caused by loopback BPDU inconsistency
Version 6.2.1.1	Introduced for E-Series

Example (brief)

```

FTOS#show spanning-tree rstp brief
Executing IEEE compatible Spanning Tree Protocol
Root ID    Priority 8192, Address 0001.e805.e306
Root Bridge hello time 4, max age 20, forward delay 15
Bridge ID   Priority 16384, Address 0001.e801.6aa8
Configured hello time 2, max age 20, forward delay 15

```

```

Interface
Name      PortID  Prio Cost    Sts Cost    Designated
-----
Gi 4/0    128.418 128 20000    FWD 20000    16384 0001.e801.6aa8 128.418
Gi 4/1    128.419 128 20000    FWD 20000    16384 0001.e801.6aa8 128.419
Gi 4/8    128.426 128 20000    FWD 20000    8192  0001.e805.e306 128.130
Gi 4/9    128.427 128 20000    BLK 20000    8192  0001.e805.e306 128.131

```

```

Interface
Name      Role    PortID  Prio Cost    Sts Cost    Link-type Edge
-----
Gi 4/0    Desg   128.418 128 20000    FWD 20000    P2P      Yes
Gi 4/1    Desg   128.419 128 20000    FWD 20000    P2P      Yes
Gi 4/8    Root   128.426 128 20000    FWD 20000    P2P      No

```



```
Gi 4/9      Altr   128.427 128 20000   BLK 20000   P2P      No
FTOS#
```

**Example
(with EDS & LBK)**

```
FTOS#show spanning-tree rstp br
Executing IEEE compatible Spanning Tree Protocol
Root ID      Priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15
Bridge ID    Priority 32768, Address 0001.e801.6aa8
We are the root
Configured hello time 2, max age 20, forward delay 15
```

Interface Name	PortID	Prio	Cost	Sts	Cost	Designated Bridge ID	PortID
Gi 0/0	128.257	128	20000	EDS	0	32768 0001.e801.6aa8	128.257

Interface Name	Role	PortID	Prio	Cost	Sts	Cost	Link-type	Edge
Gi 0/0	ErrDis	128.257	128	20000	EDS	0	P2P	No

```
FTOS#show spanning-tree rstp
Root Identifier has priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15, max hops 0
Bridge Identifier has priority 32768, Address 0001.e801.6aa8
Configured hello time 2, max age 20, forward delay 15, max hops 0
We are the root
Current root has priority 32768, Address 0001.e801.6aa8
Number of topology changes 1, last change occurred 00:00:31 ago on Gi 0/0
Port 257 (GigabitEthernet 0/0) is LBK_INC Discarding
Port path cost 20000, Port priority 128, Port Identifier 128.257
Designated root has priority 32768, address 0001.e801.6aa8
Designated bridge has priority 32768, address 0001.e801.6aa8
Designated port id is 128.257, designated path cost 0
Number of transitions to forwarding state 1
BPDU : sent 27, received 9
The port is not in the Edge port mode
```

**Example
(guard)**

```
FTOS#show spanning-tree rstp guard
Interface
Name      Instance  Sts      Guard type
-----
Gi 0/1    0         INCON(Root) Rootguard
Gi 0/2    0         FWD      Loopguard
Gi 0/3    0         BLK      Bpduguard
```

Table 45-1. show spanning-tree rstp guard Command Information

Field	Description
Interface Name	RSTP interface
Instance	RSTP instance
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), disabled (DIS), or shut down (EDS Shut)
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard)

spanning-tree rstp

C E S

S4810

S4820T

Configure an RSTP interface with one of these settings: port cost, edge port with optional Bridge Port Data Unit (BPDU) guard, port priority, loop guard, or root guard.

Syntax

```
spanning-tree rstp { cost port-cost | edge-port [bpduguard [shutdown-on-violation]] |
priority priority | {loopguard | rootguard} }
```

Parameters

<i>cost port-cost</i>	Enter the keyword <i>cost</i> followed by the port cost value. Range: 1 to 200000 Defaults: 100 Mb/s Ethernet interface = 200000 1-Gigabit Ethernet interface = 20000 10-Gigabit Ethernet interface = 2000 Port Channel interface with one 100 Mb/s Ethernet = 200000 Port Channel interface with one 1-Gigabit Ethernet = 20000 Port Channel interface with one 10-Gigabit Ethernet = 2000 Port Channel with two 1-Gigabit Ethernet = 18000 Port Channel with two 10-Gigabit Ethernet = 1800 Port Channel with two 100-Mbps Ethernet = 180000
<i>edge-port</i>	Enter the keyword <i>edge-port</i> to configure the interface as a Rapid Spanning Tree edge port.
<i>bpduguard</i>	(OPTIONAL) Enter the keyword <i>portfast</i> to enable Portfast to move the interface into forwarding mode immediately after the root fails. Enter the keyword <i>bpduguard</i> to disable the port when it receives a BPDU.
<i>shutdown-on-violation</i>	(OPTIONAL) Enter the keyword <i>shutdown-on-violation</i> to hardware disable an interface when a BPDU is received and the port is disabled.
<i>priority priority</i>	Enter keyword <i>priority</i> followed by a value in increments of 16 as the priority. Range: 0 to 240 Default: 128
<i>loopguard</i>	(C-, S-, and E-Series TeraScale only) Enter the keyword <i>loopguard</i> to enable loop guard on an RSTP port or port-channel interface.
<i>rootguard</i>	(C-, S-, and E-Series TeraScale only) Enter the keyword <i>rootguard</i> to enable root guard on an RSTP port or port-channel interface.

Defaults

Not configured

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	Introduced the loopguard and rootguard options on the E-Series TeraScale, C-Series, and S-Series.
version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced hardware shutdown-on-violation options

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
Version 7.4.1.0	Added the optional Bridge Port Data Unit (BPDU) guard.
Version 6.2.1.1	Introduced for E-Series

Usage Information

The BPDU guard option prevents the port from participating in an active STP topology in case a BPDU appears on a port unintentionally, or is mis-configured, or is subject to a DOS attack. This option places the port into an error disable state if a BPDU appears, and a message is logged so that the administrator can take corrective action.



Note: A port configured as an edge port, on an RSTP switch, will immediately transition to the forwarding state. Only ports connected to end-hosts should be configured as edge ports. Consider an edge port similar to a port with a spanning-tree portfast enabled.

If shutdown-on-violation is not enabled, BPDUs will still be sent to the RPM CPU.

STP root guard and loop guard cannot be enabled at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message is displayed:

```
% Error: RootGuard is configured. Cannot configure LoopGuard.
```

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an err-disabled blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a loop-inconsistent blocking state and no traffic is forwarded on the port.

Example

```
FTOS(conf)#interface gigabitethernet 4/0
FTOS(conf-if-gi-4/0)#spanning-tree rstp edge-port
FTOS(conf-if-gi-4/0)#show config
!
interface GigabitEthernet 4/0
 no ip address
 switchport
 spanning-tree rstp edge-port
 no shutdown
FTOS#
```

tc-flush-standard

C E S

S4810

S4820T

Enable the MAC address flushing upon receiving every topology change notification.

Syntax tc-flush-standard

To disable, use the no tc-flush-standard command.

Defaults Disabled

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Support added for S-Series
-----------------	----------------------------

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

Version 6.5.1.0	Introduced for E-Series
-----------------	-------------------------

Usage Information

By default FTOS implements an optimized flush mechanism for RSTP. This helps in flushing MAC addresses only when necessary (and less often), allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, this *knob* command can be turned on to enable flushing MAC addresses upon receiving every topology change notification.

Security

Overview

Except for the Trace List feature (E-Series only), most of the commands in this chapter are available on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

This chapter contains various types of security commands in FTOS, in the following sections:

- [AAA Accounting Commands](#)
- [Authorization and Privilege Commands](#)
- [Authentication and Password Commands](#)
- [RADIUS Commands](#)
- [TACACS+ Commands](#)
- [Port Authentication \(802.1X\) Commands](#)
- [SSH Server and SCP Commands](#)
- [Trace List Commands](#)
- [Secure DHCP Commands](#)

For configuration details, refer to the Security chapter in the FTOS Configuration Guide.



Note: Starting with FTOS v7.2.1.0, LEAP with MSCHAP v2 supplicant is implemented.

AAA Accounting Commands

AAA Accounting enables tracking of services that users are accessing and the amount of network resources being consumed by those services. When AAA Accounting is enabled, the network server reports user activity to the TACACS+ security server in the form of accounting records. Each accounting record is comprised of accounting AV pairs and is stored on the access control server.

As with authentication and authorization, you must configure AAA Accounting by defining named list of accounting methods, and then apply that list to various interfaces. The commands are:

- [aaa accounting](#)
- [aaa accounting suppress](#)
- [accounting](#)
- [show accounting](#)

aaa accounting

C E S

S4810

S4820T

Enable AAA Accounting and create a record for monitoring the accounting function.

Syntax

```
aaa accounting {system | exec | commands level} {name | default} {start-stop | wait-start | stop-only} {tacacs+}
```

To disable AAA Accounting, use the `no aaa accounting {system | exec | command level} {name | default} {start-stop | wait-start | stop-only} {tacacs+}` command.

Parameters

system	Enter the keyword <code>system</code> to send accounting information of any other AAA configuration.
exec	Enter the keyword <code>exec</code> to send accounting information when a user has logged in to the EXEC mode.
commands <i>level</i>	Enter the keyword <code>command</code> followed by a privilege level for accounting of commands executed at that privilege level.
<i>name</i> default	Enter one of the following: <ul style="list-style-type: none"> • For <i>name</i>, a user-defined name of a list of accounting methods • <code>default</code> for the default accounting methods
start-stop	Enter the keyword <code>start-stop</code> to send a “start accounting” notice at the beginning of the requested event and a “stop accounting” notice at the end of the event.
wait-start	Enter the keyword <code>wait-start</code> to ensure that the TACACS+ security server acknowledges the start notice before granting the user’s process request.

stop-only	Enter the keyword stop-only to instruct the TACACS+ security server to send a “stop record accounting” notice at the end of the requested user process.
tacacs+	Enter the keyword tacacs+ to use TACACS+ data for accounting. FTOS currently only supports TACACS+ accounting.

Defaults No default configuration or behavior

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	Version 6.3.1.0	Introduced for E-Series

Example

```
FTOS(conf)# aaa accounting exec default start-stop tacacs+
FTOS(conf)# aaa accounting command 15 default start-stop tacacs+
FTOS (config)#
```

Usage Information In the example above, TACACS+ accounting is used to track all usage of EXEC command and commands on privilege level 15.

Privilege level 15 is the default. If you want to track usage at privilege level 1, for example, use aaa accounting command 1.

Related Commands	enable password	Change the password for the enable command.
	login authentication	Enable AAA login authentication on terminal lines.
	password	Create a password.
	tacacs-server host	Specify a TACACS+ server host.

aaa accounting suppress

C **E** **S**

S4810

S4820T

Prevent the generation of accounting records of users with user name value of NULL.

Syntax aaa accounting suppress null-username

To permit accounting records to users with user name value of NULL, use the no aaa accounting suppress null-username command

Defaults Accounting records are recorded for all users.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 6.3.1.0	Introduced

Usage Information

FTOS issues accounting records for all users on the system, including users whose username string, due to protocol translation, is NULL. For example, a user who comes on line with the aaa authentication login *method-list* none command is applied. Use aaa accounting suppress command to prevent accounting records from being generated for sessions that do not have user names associated to them.

accounting

C E S

Apply an accounting method list to terminal lines.

Syntaxaccounting { *exec* | commands *level* } *method-list***Parameters**

<i>exec</i>	Enter this keyword to apply an EXEC level accounting method list.
commands <i>level</i>	Enter this keyword to apply an EXEC and CONFIGURATION level accounting method list.
<i>method-list</i>	Enter a method list that you defined using the command aaa accounting exec or aaa accounting commands.

Defaults

None

Command Modes

LINE

Command History

Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 6.3.1.0	Introduced on E-Series

Usage Information

aaa accounting	Enable AAA Accounting and create a record for monitoring the accounting function.
--------------------------------	---

show accounting

C E S

Display the active accounting sessions for each online user.

S4810**S4820T****Syntax**

show accounting

Defaults

No default configuration or behavior

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 6.3.1.0	Introduced

Example

```
FTOS#show accounting
Active accounted actions on tty2, User admin Priv 1
    Task ID 1, EXEC Accounting record, 00:00:39 Elapsed, service=shell
Active accounted actions on tty3, User admin Priv 1
    Task ID 2, EXEC Accounting record, 00:00:26 Elapsed, service=shell
FTOS#
```

Usage Information

This command steps through all active sessions and then displays the accounting records for the active account functions.

Authorization and Privilege Commands

Set command line authorization and privilege levels with the following commands:

- [authorization](#)
- [aaa authorization commands](#)
- [aaa authorization config-commands](#)
- [aaa authorization exec](#)
- [privilege level \(CONFIGURATION mode\)](#)
- [privilege level \(LINE mode\)](#)

authorization

C E S

S4810

S4820T

Apply an authorization method list to terminal lines.

Syntax

authorization { *exec* | *commands level* } *method-list*

Parameters

<i>exec</i>	Enter this keyword to apply an EXEC level authorization method list.
-------------	--

	<code>commands level</code>	Enter this keyword to apply an EXEC and CONFIGURATION level authorization method list.
	<code>method-list</code>	Enter a method list that you defined using the command <code>aaa authorization exec</code> or <code>aaa authorization</code> commands.
Defaults	None	
Command Modes	LINE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	Version 6.3.1.0	Introduced on E-Series
Usage Information	aaa authorization commands	Set parameters that restrict (or permit) a user's access to EXEC and CONFIGURATION level commands
	aaa authorization exec	Set parameters that restrict (or permit) a user's access to EXEC level commands.

aaa authorization commands

C **E** **S**

S4810

S4820T

Set parameters that restrict (or permit) a user's access to EXEC and CONFIGURATION level commands

Syntax

`aaa authorization commands level { name | default } { local || tacacs+ || none }`

Undo a configuration with the `no aaa authorization commands level { name | default } { local || tacacs+ || none }` command syntax.

Parameters

<code>commands level</code>	Enter the keyword <code>commands</code> followed by the command privilege level for command level authorization.
<code>name</code>	Define a name for the list of authorization methods.
<code>default</code>	Define the default list of authorization methods.
<code>local</code>	Use the authorization parameters on the system to perform authorization.
<code>tacacs+</code>	Use the TACACS+ protocol to perform authorization.
<code>none</code>	Enter this keyword to apply no authorization.

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 6.1.1.0	Added support for RADIUS

aaa authorization config-commands

E **S4810**

Set parameters that restrict (or permit) a user's access to EXEC level commands.

S4820T

Syntax

aaa authorization config-commands

Disable authorization checking for CONFIGURATION level commands using the command no aaa authorization config-commands.

Defaults

Enabled when you configure aaa authorization commands

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.5.1.0	Introduced for E-Series

Usage Information

By default, the command aaa authorization commands configures the system to check both EXEC level and CONFIGURATION level commands. Use the command no aaa authorization config-commands to enable only EXEC-level command checking.

aaa authorization exec

C **E** **S**

Set parameters that restrict (or permit) a user's access to EXEC-level commands.

S4810

S4820T

Syntax

aaa authorization exec { *name* | default } { local || tacacs+ || if-authenticated || none }

Disable authorization checking for EXEC level commands using the command no aaa authorization exec.

Parameters

<i>name</i>	Define a name for the list of authorization methods.
default	Define the default list of authorization methods.
local	Use the authorization parameters on the system to perform authorization.

	tacacs+	Use the TACACS+ protocol to perform authorization.
	none	Enter this keyword to apply no authorization.
Defaults	None	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	Version 6.1.1.0	Added support for RADIUS

privilege level (CONFIGURATION mode)

C **E** **S**

Change the access or privilege level of one or more commands.

S4810

S4820T

Syntax

`privilege mode {level level command | reset command}`

To delete access to a level and command, use the `no privilege mode level level command` command.

Parameters

<i>mode</i>	Enter one of the following keywords as the mode for which you are controlling access: <ul style="list-style-type: none"> • <code>configure</code> for the CONFIGURATION mode • <code>exec</code> for the EXEC mode • <code>interface</code> for the INTERFACE modes • <code>line</code> for the LINE mode • <code>route-map</code> for the ROUTE-MAP • <code>router</code> for the ROUTER OSPF, ROUTER RIP, ROUTER ISIS and ROUTER BGP modes.
<i>level level</i>	Enter the keyword level followed by a number for the access level. Range: 0 to 15. Level 1 is the EXEC mode and Level 15 allows access to all CLI modes and commands.
<i>reset</i>	Enter the keyword <code>reset</code> to return the security level to the default setting.
<i>command</i>	Enter the command's keywords to assign the command to a certain access level. You can enter one or all of the keywords

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Usage Information Use the [enable password](#) command to define a password for the level to which you are assigning privilege or access.

privilege level (LINE mode)

C **E** **S**

S4810

S4820T

Change the access level for users on the terminal lines.

Syntax `privilege level level`

To delete access to a terminal line, use the `no privilege level level` command.

Parameters	<code>level <i>level</i></code>	Enter the keyword <code>level</code> followed by a number for the access level. Range: 0 to 15. Level 1 is the EXEC mode and Level 15 allows access to all CLI modes.
-------------------	---------------------------------	---

Defaults `level = 15`

Command Modes LINE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Authentication and Password Commands

This section contains the following commands controlling management access to the system:

- [aaa authentication enable](#)
- [aaa authentication login](#)
- [access-class](#)
- [enable password](#)

- [enable restricted](#)
- [enable secret](#)
- [login authentication](#)
- [password](#)
- [password-attributes](#)
- [privilege level \(CONFIGURATION mode\)](#)
- [privilege level \(LINE mode\)](#)
- [service password-encryption](#)
- [show privilege](#)
- [show users](#)
- [timeout login response](#)
- [username](#)

aaa authentication enable

C E S

54810

54820T

Configure AAA Authentication method lists for user access to the EXEC privilege mode (the “Enable” access).

Syntax

```
aaa authentication enable {default | method-list-name} method [... method2]
```

To return to the default setting, use the `no aaa authentication enable {default | method-list-name} method [... method2]` command.

Parameters

<i>default</i>	Enter the keyword <code>default</code> followed by the authentication methods to use as the default sequence of methods to be used for the Enable log-in. Default: <code>default enable</code>
<i>method-list-name</i>	Enter a text string (up to 16 characters long) to name the list of enabled authentication methods activated at log in.
<i>method</i>	Enter one of the following methods: <ul style="list-style-type: none"> • <code>enable</code> - use the password defined by the enable password command in the CONFIGURATION mode. • <code>line</code> - use the password defined by the password command in the LINE mode. • <code>none</code> - no authentication. • <code>radius</code> - use the RADIUS server(s) configured with the radius-server host command. • <code>tacacs+</code> - use the TACACS+ server(s) configured with the tacacs-server host command.
<i>... method2</i>	(OPTIONAL) In the event of a “no response” from the first method, FTOS applies the next configured method.

Defaults

Use the `enable` password.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 6.2.1.1	Introduced

Usage Information

By default, the Enable password is used. If aaa authentication enable default is configured, FTOS will use the methods defined for Enable access instead.

Methods configured with the aaa authentication enable command are evaluated in the order they are configured. If authentication fails using the primary method, FTOS employs the second method (or third method, if necessary) automatically. For example, if the TACACS+ server is reachable, but the server key is invalid, FTOS proceeds to the next authentication method. The TACACS+ is incorrect, but the user is still authenticated by the secondary method.

Related Commands

enable password	Change the password for the enable command.
login authentication	Enable AAA login authentication on terminal lines.
password	Create a password.
radius-server host	Specify a RADIUS server host.
tacacs-server host	Specify a TACACS+ server host.

aaa authentication login

C E S

S4810

S4820T

Configure AAA Authentication method lists for user access to the EXEC mode (Enable log-in).

Syntax

```
aaa authentication login { method-list-name | default } method [... method4]
```

To return to the default setting, use the no aaa authentication login { *method-list-name* | default } command.

Parameters

<i>method-list-name</i>	Enter a text string (up to 16 characters long) as the name of a user-configured method list that can be applied to different lines.
default	Enter the keyword default to specify that the method list specified is the default method for all terminal lines.

<i>method</i>	Enter one of the following methods: <ul style="list-style-type: none"> enable - use the password defined by the enable password command in the CONFIGURATION mode. line - use the password defined by the password command in the LINE mode. local - use the user name/password defined by the in the local configuration. none - no authentication. radius - use the RADIUS server(s) configured with the radius-server host command. tacacs+ - use the TACACS+ server(s) configured with the tacacs-server host command.
<i>... method4</i>	(OPTIONAL) Enter up to four additional methods. In the event of a “no response” from the first method, FTOS applies the next configured method (up to four configured methods).

Default Not configured (that is, no authentication is performed)

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.0	Introduced on E-Series

Usage Information

By default, the locally configured username password will be used. If [aaa authentication login](#) default is configured, FTOS will use the methods defined by this command for login instead.

Methods configured with the [aaa authentication login](#) command are evaluated in the order they are configured. If users encounter an error with the first method listed, FTOS applies the next method configured. If users fail the first method listed, no other methods are applied. The only exception is the local method. If the user’s name is not listed in the local database, the next method is applied. If the correct user name/ password combination are not entered, the user is not allowed access to the switch.



Note: If authentication fails using the primary method, FTOS employs the second method (or third method, if necessary) automatically. For example, if the TACACS+ server is reachable, but the server key is invalid, FTOS proceeds to the next authentication method. The TACACS+ is incorrect, but the user is still authenticated by the secondary method.

After configuring the [aaa authentication login](#) command, configure the [login authentication](#) command to enable the authentication scheme on terminal lines.

Connections to the SSH server will work with the following login mechanisms: local, radius and tacacs.

**Related
Commands**

login authentication	Apply an authentication method list to designated terminal lines.
password	Create a password.
radius-server host	Specify a RADIUS server host.
tacacs-server host	Specify a TACACS+ server host.

access-class

C **E** **S****S4810****S4820T**

Restrict incoming connections to a particular IP address in a defined IP access control list (ACL).

Syntax

`access-class access-list-name`

To delete a setting, use the `no access-class` command.

Parameters

<i>access-list-name</i>	Enter the name of an established IP Standard ACL.
-------------------------	---

Defaults

Not configured.

Command Modes

LINE

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced for S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

**Related
Commands**

line	Apply an authentication method list to designated terminal lines.
ip access-list standard	Name (or select) a standard access list to filter based on IP address.
ip access-list extended	Name (or select) an extended access list based on IP addresses or protocols.

enable password

C **E** **S****S4810****S4820T**

Change the password for the [enable](#) command.

Syntax

`enable password [level level] [encryption-type] password`

To delete a password, use the `no enable password [encryption-type] password [level level]` command.

Parameters

<i>level level</i>	(OPTIONAL) Enter the keyword <i>level</i> followed by a number as the level of access. Range: 1 to 15
<i>encryption-type</i>	(OPTIONAL) Enter the number 7 or 0 as the encryption type. Enter a 7 followed by a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Force10 router. Use this parameter only with a password that you copied from the show running-config file of another Dell Force10 router.
<i>password</i>	Enter a text string, up to 32 characters long, as the clear text password.

Defaults

No password is configured. *level* = 15

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Use this command to define a password for a level and use the [privilege level \(CONFIGURATION mode\)](#) command to control access to command modes.

Passwords must meet the following criteria:

- Start with a letter, not a number.
- Passwords can have a regular expression as the password. To create a password with a regular expression in it, you must use CNTL + v prior to entering regular expression. For example, to create the password `abcd] e`, you type “`abcd CNTL v] e`”. When the password is created, you do not use the CNTL + v key combination and enter “`abcd] e`”.



Note: The question mark (?) and the tilde (~) are not supported characters.

Related Commands

show running-config	View the current configuration.
privilege level (CONFIGURATION mode)	Control access to command modes within the switch.

enable restricted

C **E** **S**

S4810

S4820T

Allows Dell Force10 technical support to access restricted commands.

Syntax enable restricted [*encryption-type*] *password*

To disallow access to restricted commands, enter no enable restricted.

Parameters	<i>encryption-type</i>	(OPTIONAL) Enter the number 7 as the encryption type. Enter 7 followed a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Force10 router. Use this parameter only with a password that you copied from the show running-config file of another Dell Force10 router.
	<i>password</i>	Enter a text string, up to 32 characters long, as the clear text password.

Command Modes Not configured.

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Usage Information Only Dell Force10 Technical Support staff use this command.

enable secret

C E S

S4810

S4820T

Change the password for the [enable](#) command.

Syntax enable secret [*level level*] [*encryption-type*] *password*

To delete a password, use the no enable secret [*encryption-type*] *password* [*level level*] command.

Parameters	<i>level level</i>	(OPTIONAL) Enter the keyword level followed by a number as the level of access. Range: 1 to 15
	<i>encryption-type</i>	(OPTIONAL) Enter the number 5 or 0 as the encryption type. Enter a 5 followed by a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Force10 router. Use this parameter only with a password that you copied from the show running-config file of another Dell Force10 router.
	<i>password</i>	Enter a text string, up to 32 characters long, as the clear text password.

Defaults No password is configured. *level* = 15

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Use this command to define a password for a level and use the [privilege level \(CONFIGURATION mode\)](#) command to control access to command modes.

Passwords must meet the following criteria:

- Start with a letter, not a number.
- Passwords can have a regular expression as the password. To create a password with a regular expression in it, you must use CNTL + v prior to entering regular expression. For example, to create the password abcd] e, you type abcd CNTL v] e and when the password is created, you do not use the CNTL + v key combination and enter abcd] e.



Note: The question mark (?) and the tilde (~) are not supported characters.

Related Commands

show running-config	View the current configuration.
privilege level (CONFIGURATION mode)	Control access to command modes within the E-Series.

login authentication

C E S

S4810

S4820T

Apply an authentication method list to designated terminal lines.

Syntax

login authentication { *method-list-name* | default }

To use the local user/password database for login authentication, enter no login authentication.

Parameters

<i>method-list-name</i>	Enter the <i>method-list-name</i> to specify that method list, created in the aaa authentication login command, to be applied to the designated terminal line.
default	Enter the keyword <code>default</code> to specify that the default method list, created in the aaa authentication login command, is applied to the terminal line.

Defaults

No authentication is performed on the console lines, and local authentication is performed on the virtual terminal and auxiliary lines.

Command Modes

LINE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.0	Introduced on E-Series

Usage Information

If you configure the [aaa authentication login default](#) command, then the [login authentication default](#) command automatically is applied to all terminal lines.

Related Commands

aaa authentication login	Select login authentication methods.
--	--------------------------------------

password

Specify a password for users on terminal lines.

Syntax

`password` [*encryption-type*] *password*

To delete a password, use the `no password password` command.

Parameters

<i>encryption-type</i>	(OPTIONAL) Enter either zero (0) or 7 as the encryption type for the <i>password</i> entered. The options are: <ul style="list-style-type: none"> 0 is the default and means the password is not encrypted and stored as clear text. 7 means that the password is encrypted and hidden.
<i>password</i>	Enter a text string up to 32 characters long. The first character of the <i>password</i> must be a letter. You cannot use spaces in the password.

Defaults

No password is configured.

Command Modes

LINE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

FTOS prompts users for these passwords when the method for authentication or authorization used is “line.”

Related Commands

enable password	Set the password for the enable command.
login authentication	Configure an authentication method to log in to the switch.
service password-encryption	Encrypt all passwords configured in FTOS.
radius-server key	Configure a key for all RADIUS communications between the switch and the RADIUS host server.
tacacs-server key	Configure a key for communication between a TACACS+ server and client.
username	Establish an authentication system based on user names.

password-attributes

C E S

S4810

S4820T

Configure the password attributes (strong password).

Syntax

password-attributes [min-length *number*] [max-retry *number*] [character-restriction [upper *number*] [lower *number*] [numeric *number*] [special-char *number*]]

To return to the default, use the no password-attributes [min-length *number*] [max-retry *number*] [character-restriction [upper *number*] [lower *number*] [numeric *number*] [special-char *number*]] command.

Parameters

min-length <i>number</i>	(OPTIONAL) Enter the keyword min-length followed by the number of characters. Range: 0 - 32 characters
max-retry <i>number</i>	(OPTIONAL) Enter the keyword max-retry followed by the number of maximum password retries. Range: 0 - 16
character-restriction	(OPTIONAL) Enter the keyword character-restriction to indicate a character restriction for the password.
upper <i>number</i>	(OPTIONAL) Enter the keyword upper followed the upper number. Range: 0 - 31
lower <i>number</i>	(OPTIONAL) Enter the keyword lower followed the lower number. Range: 0 - 31
numeric <i>number</i>	(OPTIONAL) Enter the keyword numeric followed the numeric number. Range: 0 - 31
special-char <i>number</i>	(OPTIONAL) Enter the keyword special-char followed the number of special characters permitted. Range: 0 - 31

Defaults

No default values or behavior

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
Version 7.4.1.0	Introduced

Related Commands

password	Specify a password for users on terminal lines.
--------------------------	---

service password-encryption

C E S

Encrypt all passwords configured in FTOS.

S4810

S4820T

Syntax

service password-encryption

To store new passwords as clear text, enter no service password-encryption.

Defaults

Enabled.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series



Caution: Encrypting passwords with this command does not provide a high level of security. When the passwords are encrypted, you cannot return them to plain text unless you re-configure them. To remove an encrypted password, use the `no password password` command.

Usage Information

To keep unauthorized people from viewing passwords in the switch configuration file, use the [service password-encryption](#) command. This command encrypts the clear-text passwords created for user name passwords, authentication key passwords, the privileged command password, and console and virtual terminal line access passwords.

To view passwords, use the [show running-config](#) command.

show privilege

C E S

S4810

S4820T

View your access level.

Syntax

show privilege

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Introduced for S-Series
-----------------	-------------------------

Version 7.5.1.0	Introduced for C-Series
-----------------	-------------------------

pre-Version 6.1.1.0	Introduced for E-Series
---------------------	-------------------------

Example

```
FTOS#show privilege
Current privilege level is 15
FTOS#
```

Related Commands

[privilege level \(CONFIGURATION mode\)](#)

Assign access control to different command modes.

show users

C E S

S4810

S4820T

View information on all users logged into the switch.

Syntax

show users [all]

Parameters

all	(OPTIONAL) Enter the keyword all to view all terminal lines in the switch.
-----	--

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Introduced for S-Series
-----------------	-------------------------

Version 7.5.1.0	Introduced for C-Series
-----------------	-------------------------

pre-Version 6.1.1.0	Introduced for E-Series
---------------------	-------------------------

Example

```
FTOS#show user
      Line           User           Host(s)      Location
      0 console 0    admin        idle
*   3 vty 1         admin        idle         172.31.1.4
FTOS#
```

[Table 1](#) describes the information in the show users command example.

Table 1 show users Command Example Fields

Field	Description
(untitled)	Indicates with an asterisk (*) which terminal line you are using.
Line	Displays the terminal lines currently in use.
User	Displays the user name of all users logged in.
Host(s)	Displays the terminal line status.
Location	Displays the IP address of the user.

Related Commands

username	Enable a user.
--------------------------	----------------

timeout login response

C **E** **S**

S4810

S4820T

Specify how long the software will wait for login input (for example, user name and password) before timing out.

Syntax

timeout login response *seconds*

To return to the default values, enter no timeout login response.

Parameters

<i>seconds</i>	Enter a number of seconds the software will wait before logging you out. Range: VTY: 1 to 30 seconds, default: 30 seconds. Console: 1 to 300 seconds, default: 0 seconds (no timeout). AUX: 1 to 300 seconds, default: 0 seconds (no timeout).
----------------	---

Defaults

above

Command Modes

LINE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

The software measures the period of inactivity defined in this command as the period between consecutive keystrokes. For example, if your password is “password” you can enter “p” and wait 29 seconds to enter the next letter.

username

C E S

S4810

S4820T

Establish an authentication system based on user names.

Syntax

```
username name [access-class access-list-name] [nopassword | {password | secret}
[encryption-type] password] [privilege level]
```

If you do not want a specific user to enter a password, use the nopassword option.

To delete authentication for a user, use the no username *name* command.

Parameters

<i>name</i>	Enter a text string for the name of the user up to 63 characters.
access-class <i>access-list-name</i>	Enter the keyword access-class followed by the name of a configured access control list (either a IP access control list or MAC access control list).
nopassword	Enter the keyword nopassword to specify that the user should not enter a password.
password	Enter the keyword password followed by the <i>encryption-type</i> or the password.
secret	Enter the keyword secret followed by the <i>encryption-type</i> or the password.
<i>encryption-type</i>	Enter an encryption type for the <i>password</i> that you will enter. <ul style="list-style-type: none"> • 0 directs FTOS to store the password as clear text. It is the default encryption type when using the password option. • 7 to indicate that a password encrypted using a DES hashing algorithm will follow. This encryption type is available with the password option only. • 5 to indicate that a password encrypted using an MD5 hashing algorithm will follow. This encryption type is available with the secret option only, and is the default encryption type for this option.
<i>password</i>	Enter a string up to 32 characters long.
<i>privilege level</i>	Enter the keyword privilege followed by a number from zero (0) to 15.
secret	Enter the keyword secret followed by the encryption type.

Defaults

The default encryption type for the password option is 0. The default encryption type for the secret option is 0.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.7.1.0	Added support for secret option and MD5 password encryption. Extended <i>name</i> from 25 characters to 63.
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
E-Series original Command	

Usage Information

To view the defined user names, use the [show running-config](#) user command.

Related Commands

password	Specify a password for users on terminal lines.
show running-config	View the current configuration.

RADIUS Commands

The RADIUS commands supported by FTOS. are:

- [debug radius](#)
- [ip radius source-interface](#)
- [radius-server deadtime](#)
- [radius-server host](#)
- [radius-server key](#)
- [radius-server retransmit](#)
- [radius-server timeout](#)

debug radius



View RADIUS transactions to assist with troubleshooting.

Syntax

debug radius

To disable debugging of RADIUS, enter no debug radius.

Defaults

Disabled.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

ip radius source-interface

C E S

S4810

S4820T

Specify an interface's IP address as the source IP address for RADIUS connections.

Syntax

ip radius source-interface *interface*

To delete a source interface, enter no ip radius source-interface.

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interfaces, enter the keyword loopback followed by a number from zero (0) to 16838. For the Null interface, enter the keywords null 0. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
------------------	--

Defaults

Not configured.

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
------------------	----------------------

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
-----------------	--

Version 8.3.7.0	Introduced on S4810
-----------------	---------------------

Version 7.6.1.0	Support added for S-Series
-----------------	----------------------------

Version 7.5.1.0	Support added for C-Series
-----------------	----------------------------

pre-Version 6.2.1.1	Introduced on E-Series
---------------------	------------------------

radius-server deadline

C E S

S4810

S4820T

Configure a time interval during which non-responsive RADIUS servers to authentication requests are skipped.

Syntax radius-server deadline *seconds*

To disable this function or return to the default value, enter no radius-server deadline.

Parameters	<i>seconds</i>	Enter a number of seconds during which non-responsive RADIUS servers are skipped. Range: 0 to 2147483647 seconds. Default: 0 seconds.
	Defaults	0 seconds
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

radius-server host

C E S

S4810

S4820T

Configure a RADIUS server host.

Syntax radius-server host { *hostname* | *ipv4-address* | *ipv6-address* } [*auth-port port-number*] [*retransmit retries*] [*timeout seconds*] [*key [encryption-type] key*]

Parameters	<i>hostname</i>	Enter the name of the RADIUS server host.
	<i>ipv4-address</i> <i>ipv6-address</i>	Enter the IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X), of the RADIUS server host.
	<i>auth-port port-number</i>	(OPTIONAL) Enter the keyword auth-port followed by a number as the port number. Range: zero (0) to 65535 The default <i>port-number</i> is 1812.
	<i>retransmit retries</i>	(OPTIONAL) Enter the keyword retransmit followed by a number as the number of attempts. This parameter overwrites the radius-server retransmit command. Range: zero (0) to 100 Default: 3 attempts

	<code>timeout <i>seconds</i></code>	(OPTIONAL) Enter the keyword <code>timeout</code> followed by the seconds the time interval the switch waits for a reply from the RADIUS server. This parameter overwrites the radius-server timeout command. Range: 0 to 1000 Default: 5 seconds
	<code>key [<i>encryption-type</i>] <i>key</i></code>	(OPTIONAL) Enter the keyword <code>key</code> followed by an optional <code>encryption-type</code> and a string up to 42 characters long as the authentication key. This authentication key is used by the RADIUS host server and the RADIUS daemon operating on this switch. For the <code>encryption-type</code> , enter either zero (0) or 7 as the encryption type for the <code>key</code> entered. The options are: <ul style="list-style-type: none"> • 0 is the default and means the password is not encrypted and stored as clear text. • 7 means that the password is encrypted and hidden. Configure this parameter last because leading spaces are ignored.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.4.1.0	Added support for IPv6
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Authentication key length increased to 42 characters
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Usage Information	<p>Use this command to configure any number of RADIUS server hosts for each server host that is configured. FTOS searches for the RADIUS hosts in the order they are configured in the software.</p> <p>The global default values for <code>timeout</code>, <code>retransmit</code>, and <code>key</code> optional parameters are applied, unless those values are specified in the radius-server host or other commands. If you configure <code>timeout</code>, <code>retransmit</code>, or <code>key</code> values, you must include those keywords when entering the <code>no radius-server host</code> command syntax to return to the global default values.</p>	
Related Commands	login authentication	Set the database to be checked when a user logs in.
	radius-server key	Set a authentication key for RADIUS communications.
	radius-server retransmit	Set the number of times the RADIUS server will attempt to send information.
	radius-server timeout	Set the time interval before the RADIUS server times out.

radius-server key

C E S

S4810

S4820T

Configure a key for all RADIUS communications between the switch and the RADIUS host server.

Syntax radius-server key [*encryption-type*] *key*

To delete a password, enter no radius-server key.

Parameters

<i>encryption-type</i>	(OPTIONAL) Enter either zero (0) or 7 as the encryption type for the <i>key</i> entered. The options are: <ul style="list-style-type: none">0 is the default and means the key is not encrypted and stored as clear text.7 means that the key is encrypted and hidden.
<i>key</i>	Enter a string that is the key to be exchanged between the switch and RADIUS servers. It can be up to 42 characters long.

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Authentication key length increased to 42 characters
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The key configured on the switch must match the key configured on the RADIUS server daemon.

If the key parameter in the [radius-server host](#) command is configured, the key configured with the [radius-server key](#) command is the default key for all RADIUS communications.

Related Commands

radius-server host	Configure a RADIUS host.
------------------------------------	--------------------------

radius-server retransmit

C E S

S4810

S4820T

Configure the number of times the switch attempts to connect with the configured RADIUS host server before declaring the RADIUS host server unreachable.

Syntax radius-server retransmit *retries*

To configure zero retransmit attempts, enter no radius-server retransmit. To return to the default setting, enter radius-server retransmit 3.

Parameters	<i>retries</i>	Enter a number of attempts that FTOS tries to locate a RADIUS server. Range: zero (0) to 100. Default: 3 retries.
	Defaults	3 retries
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	radius-server host	Configure a RADIUS host.

radius-server timeout



Configure the amount of time the RADIUS client (the switch) waits for a RADIUS host server to reply to a request.

Syntax

radius-server timeout *seconds*

To return to the default value, enter no radius-server timeout.

Parameters	<i>seconds</i>	Enter the number of seconds between an unsuccessful attempt and the FTOS times out. Range: zero (0) to 1000 seconds. Default: 5 seconds.
	Defaults	5 seconds
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

**Related
Commands**

[radius-server host](#)

Configure a RADIUS host.

TACACS+ Commands

FTOS supports TACACS+ as an alternate method for login authentication.

- [debug tacacs+](#)
- [ip tacacs source-interface](#)
- [tacacs-server host](#)
- [tacacs-server key](#)

debug tacacs+

C E S

S4810

S4820T

View TACACS+ transactions to assist with troubleshooting.

Syntax

debug tacacs+

To disable debugging of TACACS+, enter no debug tacacs+.

Defaults

Disabled.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

ip tacacs source-interface

C E S

S4810

S4820T

Specify an interface's IP address as the source IP address for TACACS+ connections.

Syntax

ip tacacs source-interface *interface*

To delete a source interface, enter no ip tacacs source-interface.

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interfaces, enter the keyword loopback followed by a number from zero (0) to 16838. For the Null interface, enter the keywords null 0. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
------------------	--

Defaults

Not configured.

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

tacacs-server host

C **E** **S**

Specify a TACACS+ host.

S4810**S4820T****Syntax**

tacacs-server host { *hostname* | *ipv4-address* | *ipv6-address* } [*port number*] [*timeout seconds*] [*key key*]

Parameters

<i>hostname</i>	Enter the name of the TACACS+ server host.
<i>ipv4-address</i> <i>ipv6-address</i>	Enter the IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X), of the TACACS+ server host.

<i>port number</i>	(OPTIONAL) Enter the keyword <code>port</code> followed by a number as the port to be used by the TACACS+ server. Range: zero (0) to 65535 Default: 49
<i>timeout seconds</i>	(OPTIONAL) Enter the keyword <code>timeout</code> followed by the number of seconds the switch waits for a reply from the TACACS+ server. Range: 0 to 1000 Default: 10 seconds
<i>key key</i>	(OPTIONAL) Enter the keyword <code>key</code> followed by a string up to 42 characters long as the authentication key. This authentication key must match the key specified in the tacacs-server key for the TACACS+ daemon. Configure this parameter last because leading spaces are ignored.

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv6
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Authentication key length increased to 42 characters
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

To list multiple TACACS+ servers to be used by the [aaa authentication login](#) command, configure this command multiple times.

If you are not configuring the switch as a TACACS+ server, you do not need to configure the port, timeout and key optional parameters. If you do not configure a key, the key assigned in the [tacacs-server key](#) command is used.

Related Commands

aaa authentication login	Specify the login authentication method.
tacacs-server key	Configure a TACACS+ key for the TACACS server.

tacacs-server key

C **E** **S**

S4810

S4820T

Configure a key for communication between a TACACS+ server and client.

Syntax

`tacacs-server key [encryption-type] key`

To delete a key, use the `no tacacs-server key key`

Parameters	<i>encryption-type</i>	(OPTIONAL) Enter either zero (0) or 7 as the encryption type for the <i>key</i> entered. The options are: <ul style="list-style-type: none"> 0 is the default and means the key is not encrypted and stored as clear text. 7 means that the key is encrypted and hidden.
	<i>key</i>	Enter a text string, up to 42 characters long, as the clear text password. Leading spaces are ignored.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Authentication key length increased to 42 characters
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Usage Information	The key configured with this command must match the key configured on the TACACS+ daemon.	

Port Authentication (802.1X) Commands

The 802.1X Port Authentication commands are:

- [dot1x authentication \(Configuration\)](#)
- [dot1x authentication \(Interface\)](#)
- [dot1x auth-fail-vlan](#)
- [dot1x auth-server](#)
- [dot1x guest-vlan](#)
- [dot1x mac-auth-bypass](#)
- [dot1x max-eap-req](#)
- [dot1x port-control](#)
- [dot1x quiet-period](#)
- [dot1x reauthentication](#)
- [dot1x reauth-max](#)
- [dot1x server-timeout](#)
- [dot1x supplicant-timeout](#)
- [dot1x tx-period](#)
- [show dot1x interface](#)

An authentication server must authenticate a client connected to an 802.1X switch port. Until the authentication, only EAPOL (Extensible Authentication Protocol over LAN) traffic is allowed through the port to which a client is connected. Once authentication is successful, normal traffic passes through the port.

FTOS supports RADIUS and Active Directory environments using 802.1X Port Authentication.

Important Points to Remember

FTOS limits network access for certain users by using VLAN assignments. 802.1X with VLAN assignment has these characteristics when configured on the switch and the RADIUS server.

- 802.1X is supported on C-Series, E-Series, and S-Series.
- 802.1X is not supported on the LAG or the channel members of a LAG.
- If no VLAN is supplied by the RADIUS server or if 802.1X authorization is disabled, the port is configured in its access VLAN after successful authentication.
- If 802.1X authorization is enabled but the VLAN information from the RADIUS server is not valid, the port returns to the unauthorized state and remains in the configured access VLAN. This prevents ports from appearing unexpectedly in an inappropriate VLAN due to a configuration error. Configuration errors create an entry in Syslog.
- If 802.1X authorization is enabled and all information from the RADIUS server is valid, the port is placed in the specified VLAN after authentication.
- If port security is enabled on an 802.1X port with VLAN assignment, the port is placed in the RADIUS server assigned VLAN.
- If 802.1X is disabled on the port, it is returned to the configured access VLAN.
- When the port is in the force authorized, force unauthorized, or shutdown state, it is placed in the configured access VLAN.
- If an 802.1X port is authenticated and put in the RADIUS server assigned VLAN, any change to the port access VLAN configuration will not take effect.
- The 802.1X with VLAN assignment feature is not supported on trunk ports, dynamic ports, or with dynamic-access port assignment through a VLAN membership.

dot1x authentication (Configuration)

C **E** **S**

54810

54820T

Syntax

Enable dot1x globally; dot1x must be enabled both globally and at the interface level.

dot1x authentication

To disable dot1x on an globally, use the no dot1x authentication command.

Defaults Disabled

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series

Related Commands	dot1x authentication (Interface)	Enable dot1x on an interface
-------------------------	--	------------------------------

dot1x authentication (Interface)

C **E** **S**

S4810

S4820T

Enable dot1x on an interface; dot1x must be enabled both globally and at the interface level.

Syntax dot1x authentication

To disable dot1x on an interface, use the no dot1x authentication command.

Defaults Disabled

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series

Related Commands	dot1x authentication (Configuration)	Enable dot1x globally
-------------------------	--	-----------------------

dot1x auth-fail-vlan

C **E** **S**

S4810

S4820T

Configure a authentication failure VLAN for users and devices that fail 802.1X authentication.

Syntax dot1x auth-fail-vlan *vlan-id* [max-attempts *number*]

To delete the authentication failure VLAN, use the `no dot1x auth-fail-vlan vlan-id [max-attempts number]` command.

Parameters	<i>vlan-id</i>	Enter the VLAN Identifier. Range: 1 to 4094
	max-attempts <i>number</i>	(OPTIONAL) Enter the keyword max-attempts followed number of attempts desired before authentication fails. Range: 1 to 5 Default: 3

Defaults 3 attempts

Command Modes CONFIGURATION (*conf-if-interface-slot/port*)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C-Series, E-Series and S-Series

Usage Information

If the host responds to 802.1X with an incorrect login/password, the login fails. The switch will attempt to authenticate again until the maximum attempts configured is reached. If the authentication fails after all allowed attempts, the interface is moved to the authentication failed VLAN.

Once the authentication VLAN is assigned, the port-state must be toggled to restart authentication. Authentication will occur at the next re-authentication interval ([dot1x reauthentication](#)).

Related Commands	dot1x port-control	Enable port-control on an interface
	dot1x guest-vlan	Configure a guest VLAN for non-dot1x devices
	show dot1x interface	Display the 802.1X information on an interface

dot1x auth-server

C **E** **S**

Configure the authentication server to RADIUS.

S4810

S4820T

Syntax dot1x auth-server radius

Defaults No default behavior or values

Command Modes CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0	Introduced on C-Series and S-Series
-----------------	-------------------------------------

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

dot1x guest-vlan

C E S

S4810

S4820T

Configure a guest VLAN for limited access users or for devices that are not 802.1X capable.

Syntax

`dot1x guest-vlan vlan-id`

To disable the guest VLAN, use the `no dot1x guest-vlan vlan-id` command.

Parameters

<i>vlan-id</i>	Enter the VLAN Identifier. Range: 1 to 4094
----------------	--

Defaults

Not configured

Command Modes

CONFIGURATION (*conf-if-interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series, E-Series, and S-Series

Usage Information

802.1X authentication is enabled when an interface is connected to the switch. If the host fails to respond within a designated amount of time, the authenticator places the port in the guest VLAN.

If a device does not respond within 30 seconds, it is assumed that the device is not 802.1X capable. Therefore, a guest VLAN is allocated to the interface and authentication, for the device, will occur at the next re-authentication interval ([dot1x reauthentication](#)).

If the host fails authentication for the designated amount of times, the authenticator places the port in authentication failed VLAN ([dot1x auth-fail-vlan](#)).



Note: Layer 3 portion of guest VLAN and authentication fail VLANs can be created regardless if the VLAN is assigned to an interface or not. Once an interface is assigned a guest VLAN (which has an IP address), then routing through the guest VLAN is the same as any other traffic. However, interface may join/leave a VLAN dynamically.

Related Commands

dot1x auth-fail-vlan	Configure a VLAN for authentication failures
dot1x reauthentication	Enable periodic re-authentication
show dot1x interface	Display the 802.1X information on an interface

dot1x mac-auth-bypass

C **S** **S4810**
S4820T

Enable MAC authentication bypass. If 802.1X times out because the host did not respond to the Identity Request frame, FTOS attempts to authenticate the host based on its MAC address.

Syntax [no] dot1x mac-auth-bypass

Defaults Disabled

Command Modes INTERFACE

Command History	Version 8.4.1.0	Introduced on C-Series and S-Series
------------------------	-----------------	-------------------------------------

Usage Information To disable MAC authentication bypass on a port, enter the no dot1x mac-auth-bypass command.

dot1x max-eap-req

C **E** **S**
S4810
S4820T

Configure the maximum number of times an EAP (Extensive Authentication Protocol) request is transmitted before the session times out.

Syntax dot1x max-eap-req *number*

To return to the default, use the no dot1x max-eap-req command.

Parameters	<i>number</i>	Enter the number of times an EAP request is transmitted before a session time-out. Range: 1 to 10 Default: 2
-------------------	---------------	--

Defaults 2

Command Modes INTERFACE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series
	Version 7.4.1.0	Introduced on E-Series

Related Commands	interface range	Configure a range of interfaces
-------------------------	---------------------------------	---------------------------------

dot1x port-control

C E S

Enable port control on an interface.

S4810

S4820T

Syntax

dot1x port-control { force-authorized | auto | force-unauthorized }

Parameters

force-authorized	Enter the keyword force-authorized to forcibly authorize a port.
auto	Enter the keyword auto to authorize a port based on the 802.1X operation result.
force-unauthorized	Enter the keyword force-unauthorized to forcibly de-authorize a port.

Defaults

No default behavior or values

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

Usage Information

The authenticator performs authentication only when port-control is set to auto.

dot1x quiet-period

C E S

Set the number of seconds that the authenticator remains quiet after a failed authentication with a client.

S4810

S4820T

Syntax

dot1x quiet-period *seconds*

To disable quiet time, use the no dot1x quiet-time command.

Parameters

<i>seconds</i>	Enter the number of seconds. Range: 1 to 65535 Default: 30
----------------	--

Defaults

30 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0	Introduced on C-Series and S-Series
-----------------	-------------------------------------

Version 7.4.1.0	Introduced on E-Series
-----------------	------------------------

dot1x reauthentication

C	E	S
---	---	---

Enable periodic re-authentication of the client.

S4810

S4820T

Syntax

dot1x reauthentication [interval *seconds*]

To disable periodic re-authentication, use the no dot1x reauthentication command.

Parameters

<i>interval seconds</i>	(Optional) Enter the keyword interval followed by the interval time, in seconds, after which re-authentication will be initiated. Range: 1 to 31536000 (1 year) Default: 3600 (1 hour)
-------------------------	--

Defaults

3600 seconds (1 hour)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

Related Commands

interface range	Configure a range of interfaces
---------------------------------	---------------------------------

dot1x reauth-max

C	E	S
---	---	---

Configure the maximum number of times a port can re-authenticate before the port becomes unauthorized.

S4810

S4820T

Syntax

dot1x reauth-max *number*

To return to the default, use the no dot1x reauth-max command.

Parameters

<i>number</i>	Enter the permitted number of re-authentications. Range: 1 - 10 Default: 2
---------------	--

Defaults

2

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x server-timeout

C E S

S4810

S4820T

Configure the amount of time after which exchanges with the server time out.

Syntaxdot1x server-timeout *seconds*

To return to the default, use the no dot1x server-timeout command.

Parameters

<i>seconds</i>	Enter a time-out value in seconds. Range: 1 to 300, where 300 is implementation dependant. Default: 30
----------------	--

Defaults

30 seconds

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x supplicant-timeout

C E S

S4810

S4820T

Configure the amount of time after which exchanges with the supplicant time out.

Syntaxdot1x supplicant-timeout *seconds*

To return to the default, use the no dot1x supplicant-timeout command.

Parameters

<i>seconds</i>	Enter a time-out value in seconds. Range: 1 to 300, where 300 is implementation dependant. Default: 30
----------------	--

Defaults 30 seconds

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

dot1x tx-period

C **E** **S**

S4810

S4820T

Configure the intervals at which EAPOL PDUs are transmitted by the Authenticator PAE.

Syntax

dot1x tx-period *seconds*

To return to the default, use the no dot1x tx-period command.

Parameters

<i>seconds</i>	Enter the interval time, in seconds, that EAPOL PDUs are transmitted. Range: 1 to 31536000 (1 year) Default: 30
----------------	---

Defaults 30 seconds

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series
Version 7.4.1.0	Introduced on E-Series

show dot1x interface

C **E** **S**

S4810

S4820T

Display the 802.1X information on an interface.

Syntax

show dot1x interface *interface*

Parameters*interface*

Enter one of the following keywords and slot/port or number information:

- For a Gigabit Ethernet interface, enter the keyword **GigabitEthernet** followed by the slot/port information.
- For a Fast Ethernet interface, enter the keyword **FastEthernet** followed by the slot/port information.
- For a Ten Gigabit Ethernet interface, enter the keyword **TenGigabitEthernet** followed by the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword **fortyGigE** followed by the slot/port information.

Defaults

No default values or behavior

Command Modes

EXEC

EXEC privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale.

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Introduced on C-Series, E-Series, and S-Series

Example

```
FTOS#show dot1x int Gi 2/32
```

```
802.1x information on Gi 2/32:
```

```
-----
```

```
Dot1x Status:      Enable
Port Control:      AUTO
Port Auth Status:  UNAUTHORIZED
Re-Authentication: Disable
Untagged VLAN id:  None
Guest VLAN:        Enable
Guest VLAN id:     10
Auth-Fail VLAN:    Enable
Auth-Fail VLAN id: 11
Auth-Fail Max-Attempts: 3
Tx Period:         30 seconds
Quiet Period:      60 seconds
ReAuth Max:        2
Supplicant Timeout: 30 seconds
Server Timeout:    30 seconds
Re-Auth Interval: 3600 seconds
Max-EAP-Req:       2
Auth Type:         SINGLE_HOST

Auth PAE State:    Initialize
Backend State:     Initialize
```

```
FTOS#
```

SSH Server and SCP Commands

FTOS supports SSH Protocol versions 1.5 and 2.0. Secure Shell (SSH) is a protocol for secure remote login over an insecure network. SSH sessions are encrypted and use authentication.

- [crypto key generate](#)
- [debug ip ssh](#)
- [ip scp topdir](#)
- [ip ssh authentication-retries](#)
- [ip ssh connection-rate-limit](#)
- [ip ssh hostbased-authentication](#)
- [ip ssh key-size](#)
- [ip ssh password-authentication](#)
- [ip ssh pub-key-file](#)
- [ip ssh rhostsfile](#)
- [ip ssh rsa-authentication \(Config\)](#)
- [ip ssh rsa-authentication \(EXEC\)](#)
- [ip ssh server](#)
- [show crypto](#)
- [show ip ssh](#)
- [show ip ssh client-pub-keys](#)
- [show ip ssh rsa-authentication](#)
- [ssh](#)

crypto key generate

C E S

54810

54820T



Generate keys for the SSH server.

Note: Some of the parameters in this command require licensing to access. For more information, please contact your Dell Force10 representative.

Syntax

```
crypto key generate {rsa | rsa1 }
```


Parameters

rsa	Enter the keyword <code>rsa</code> followed by the key size to generate a SSHv2 RSA host keys. Range: 1024 to 2048 if FIPS mode not enabled; if FIPS mode is enabled, only a 2048-bit key can be generated. Default: 1024 Note: You must have a license to access the FIPS mode. For more information, please contact your Dell Force10 representative.
rsa1	Enter the keyword <code>rsa1</code> followed by the key size to generate a SSHv1 RSA host keys. Range: 1024 to 2048 Default: 1024 Note: This option is not available in FIPS mode.

Defaults

Key size 1024; If FIPS mode is enabled, the key size is 2048.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.19.0	Added support for FIPS mode on S4820T.
Version 8.3.12.0	Added support for FIPS mode on S4810.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#conf
FTOS(conf)#crypto key generate rsa1
Enter key size <1024-2048>. Default<1024>: 1024

Host key already exists. Do you want to replace. [y/n] :y
FTOS(conf)#
```

Usage Information

The host keys are required for key-exchange by the SSH server. If the keys are not found when the server is enabled (`ip ssh server enable`), the keys are automatically generated.

This command requires user interaction and will generate a prompt prior to overwriting any existing host keys.



Note: Only a user with superuser permissions should generate host-keys.

Related Commands

ip ssh server	Enable the SSH server.
show crypto	Display SSH host public keys

debug ip ssh

C E S

S4810

S4820T

Enables collecting SSH debug information.

Syntax

debug ip ssh { client | server }

To disable debugging, use the no debug ip ssh { client | server } command.

Parameters

client	Enter the keyword <code>client</code> to enable collecting debug information on the client.
server	Enter the keyword <code>server</code> to enable collecting debug information on the server.

Defaults

Disabled on both client and server

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Debug information includes details for key-exchange, authentication, and established session for each connection.

ip scp topdir

C E S

S4810

S4820T

Identify a location for files used in secure copy transfer.

Syntax

ip scp topdir *directory*

To return to the default setting, enter no ip scp topdir command.

Parameters

<i>directory</i>	Enter a directory name.
------------------	-------------------------

Defaults

The internal flash (flash:) is the default directory.

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series
Usage Information	To configure the switch as a SCP server, use the ip ssh server command.	
Related Commands	ip ssh server	Enable SSH and SCP server on the switch.

ip ssh authentication-retries

C **E** **S**

S4810

S4820T

Configure the maximum number of attempts that should be used to authenticate a user.

Syntax

ip ssh authentication-retries *1-10*

Parameters

<i>1-10</i>	Enter the number of maximum retries to authenticate a user. Range: 1 to 10 Default: 3
-------------	---

Defaults

3

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

This command specifies the maximum number of attempts to authenticate a user on a SSH connection with the remote host for password authentication. SSH will disconnect when the number of password failures exceeds authentication-retries.

ip ssh connection-rate-limit

C **E** **S**

S4810

S4820T

Configure the maximum number of incoming SSH connections per minute.

Syntax

ip ssh connection-rate-limit *1-10*

Parameters	1-10	Enter the number of maximum number of incoming SSH connections allowed per minute. Range: 1 to 10 per minute Default: 10 per minute
Defaults	10 per minute	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

ip ssh hostbased-authentication

C **E** **S**

S4810

S4820T

Enable hostbased-authentication for the SSHv2 server.

Syntax

ip ssh hostbased-authentication enable

To disable hostbased-authentication for SSHv2 server, use the no ip ssh hostbased-authentication enable command.

Parameters	enable	Enter the keyword enable to enable hostbased-authentication for SSHv2 server.
Defaults	Disable by default	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced for S-Series
	Version 7.5.1.0	Introduced for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series
Usage Information	<p>If this command is enabled, clients can login without a password prompt. This provides two levels of authentication:</p> <ul style="list-style-type: none"> • rhost-authentication is done with the file specified in the ip ssh rhostfile command • checking client host-keys is done with the file specified in the ip ssh pub-key-file command 	

If no `ip ssh rsa-authentication enable` is executed, host-based authentication is disabled.



Note: Administrators must specify the two files (`rhosts` and `pub-key-file`) to configure host-based authentication.

**Related
Commands**

ip ssh pub-key-file	Public keys of trusted hosts from a file.
ip ssh rhostsfile	Trusted hosts and users for rhost authentication.

ip ssh key-size

C E S

S4810

S4820T

Configure the size of the server-generated RSA SSHv1 key.

Syntax

`ip ssh key-size 512-869`

Parameters

<code>512-869</code>	Enter the key-size number for the server-generated RSA SSHv1 key. Range: 512 to 869 Default: 768
----------------------	--

Defaults

Key size 768

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

**Usage
Information**

The server-generated key is used for SSHv1 key-exchange.

ip ssh password-authentication

C E S

S4810

S4820T

Enable password authentication for the SSH server.

Syntax

`ip ssh password-authentication enable`

To disable password-authentication, use the `no ip ssh password-authentication enable`.

Parameters

<code>enable</code>	Enter the keyword <code>enable</code> to enable password-authentication for the SSH server.
---------------------	---

Defaults	enabled										
Command Modes	CONFIGURATION										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced for S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced for C-Series</td> </tr> <tr> <td>pre-Version 6.1.1.0</td> <td>Introduced for E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced for S-Series	Version 7.5.1.0	Introduced for C-Series	pre-Version 6.1.1.0	Introduced for E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced for S-Series										
Version 7.5.1.0	Introduced for C-Series										
pre-Version 6.1.1.0	Introduced for E-Series										
Usage Information	With password authentication enabled, users can authenticate using local, RADIUS, or TACACS+ password fallback order as configured.										

ip ssh pub-key-file

C **E** **S**

S4810

S4820T

Specify the file to be used for host-based authentication.

Syntax	ip ssh pub-key-file { <i>WORD</i> }										
Parameters	<table border="1"> <tr> <td><i>WORD</i></td> <td>Enter the file name for the host-based authentication.</td> </tr> </table>	<i>WORD</i>	Enter the file name for the host-based authentication.								
<i>WORD</i>	Enter the file name for the host-based authentication.										
Defaults	No default behavior or values										
Command Modes	CONFIGURATION										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced for S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced for C-Series</td> </tr> <tr> <td>pre-Version 6.1.1.0</td> <td>Introduced for E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced for S-Series	Version 7.5.1.0	Introduced for C-Series	pre-Version 6.1.1.0	Introduced for E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced for S-Series										
Version 7.5.1.0	Introduced for C-Series										
pre-Version 6.1.1.0	Introduced for E-Series										
Example	<pre>FTOS#conf FTOS(conf)# ip ssh pub-key-file flash://knownhosts FTOS(conf)#</pre>										
Usage Information	<p>This command specifies the file to be used for the host-based authentication. The file creates/overwrites the file flash://ADMIN_DIR/ssh/knownhosts and deletes the user specified file. Even though this is a global configuration command, it will not appear in the running configuration since this command needs to be run just once.</p>										

The file contains the OpenSSH compatible public keys of the host for which host-based authentication is allowed. An example known host file format:

```

poclab4,123.12.1.123 ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAIEAox/
QQp8xYhzOxn07yh4VGPAoUfgKoieTHO9G4sNV+ui+DWec3cgYAcU5Lai1MU
2ODrzhCwyDNp05tKBU3tReG1o8AxLi6+S4hyEMqHzkzBFNVqHzpQc+Rs4p2ur
zV0F4pRKnaXdHf3Lk4D460HZRhhVrxqeNxPDpEnWIMPJi0ds=
ashwani@poclab4

```



Note: For rhostfile and pub-key-file, the administrator must FTP the file to the chassis.

**Related
Commands**

[show ip ssh](#)
[client-pub-keys](#)

Display the client-public keys used for the host-based authentication.

ip ssh rhostfile

C **E** **S**

S4810

S4820T

Specify the rhost file to be used for host-based authorization.

Syntax

ip ssh rhostfile { *WORD* }

Parameters

<i>WORD</i>	Enter the rhost file name for the host-based authentication.
-------------	--

Defaults

No default behavior or values

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#conf
FTOS(conf)# ip ssh rhostfile flash://shosts
FTOS(conf)#

```

**Usage
Information**

This command specifies the rhost file to be used for host-based authentication. This file creates/overwrites the file flash:/ADMIN_DIR/ssh/shosts and deletes the user specified file. Even though this is a global configuration command, it will not appear in the running configuration since this command needs to be run just once.

This file contains hostnames and usernames, for which hosts and users, rhost-authentication can be allowed.



Note: For rhostfile and pub-key-file, the administrator must FTP the file to the switch.

ip ssh rsa-authentication (Config)

C **E** **S**

Enable RSA authentication for the SSHv2 server.

S4810

S4820T

Syntax ip ssh rsa-authentication enable

To disable RSA authentication, use the no ip ssh rsa-authentication enable command.

Parameters

enable	Enter the keyword enable to enable RSA authentication for the SSHv2 server.
--------	---

Defaults RSA authentication is disabled by default

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information Enabling RSA authentication allows the user to login without being prompted for a password. In addition, the OpenSSH compatible SSHv2 RSA public key must be added to the list of authorized keys (ip ssh rsa-authentication my-authorized-keys *device://filename* command).

Related Commands

ip ssh rsa-authentication (EXEC)	Add keys for RSA authentication.
--	----------------------------------

ip ssh rsa-authentication (EXEC)

C **E** **S**

Add keys for the RSA authentication.

Syntax ip ssh rsa-authentication {my-authorized-keys *WORD*}

To delete the authorized keys, use the no ip ssh rsa-authentication {my-authorized-keys} command.

Parameters

my-authorized-keys <i>WORD</i>	Enter the keyword my-authorized-keys followed by the file name of the RSA authorized-keys.
--------------------------------	--

Defaults No default behavior or values

Command Modes EXEC

Command History

Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

If you want to log in without being prompted for a password, log in through RSA authentication. To do that, you must first add the SSHv2 RSA public keys to the list of authorized keys. This command adds the specified RSA keys to the following file: **flash://ADMIN_DIR/ssh/authorized-keys-username** (where *username* is the user associated with this terminal).



Note: The no form of this command deletes the file **flash://ADMIN_DIR/ssh/authorized-keys-username**

Related Commands

show ip ssh rsa-authentication	Display RSA authorized keys.
ip ssh rsa-authentication (Config)	Enable RSA authentication.

ip ssh server



Configure an SSH server.



Note: Some of the parameters in this command require licensing to access. For more information, please contact your Dell Force10 representative.

Syntax

`ip ssh server {enable | port port-number} [version {1 | 2}]`

To disable SSH server functions, enter no `ip ssh server enable` command.

Parameters

<code>enable</code>	Enter the key word <code>enable</code> to start the SSH server.
<code>port <i>port-number</i></code>	(OPTIONAL) Enter the keyword <code>port</code> followed by the port number of the listening port of the SSH server. Range: 1 to 65535 Default: 22
<code>[version {1 2}]</code>	(OPTIONAL) Enter the keyword <code>version</code> followed by the SSH version 1 or 2 to specify only SSHv1 or SSHv2. Note: If FIPS mode is enabled, only version 2 can be selected.

Defaults

Default listening port is 22

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Expanded to include specifying SSHv1 or SSHv2; Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

This command enables the SSH server and begins listening on a port. If a port is not specified, listening is on SSH default port 22.

Example

```
FTOS# conf
FTOS(conf)# ip ssh server port 45
FTOS(conf)# ip ssh server enable
FTOS#
```

Related Commands

show ip ssh	Display the ssh information
-----------------------------	-----------------------------

show crypto

C E S

S4810

S4820T

Display the public part of the SSH host-keys.



Note: Some of the parameters in this command require licensing to access. For more information, please contact your Dell Force10 representative.

Syntax

```
show crypto key mypubkey {rsa | rsa1 }
```

Parameters

Key	Enter the keyword <code>key</code> to display the host public key.
mypubkey	Enter the keyword <code>mypubkey</code> to display the host public key.
rsa	Enter the keyword <code>rsa</code> to display the host SSHv2 RSA public key.
rsa1	Enter the keyword <code>rsa1</code> to display the host SSHv1 RSA public key. Note: If FIPS mode is enabled, this parameter is not available.

Defaults

No default behavior or values

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#show crypto key mypubkey rsa

ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAIEAtzkZME/
e8V8smnXR22EJGQhCMkEOkuisa+OILVoMYU1ZKGfj0W5BPCsvF/
x5ifqYFFwUzJNOcsJK7vjSsnmMhChF2YSvXlvTJ6h971FJAQlOsgd0ycpocsF+DNLKfJnx7SAjhakF
QMwGg/g78ZkDT3Ydr8KKjfSI4Bg/WS8B740=

FTOS#show crypto key mypubkey rsa1

1024 35
131060015480873398953257515397249657850072206444294963674080935683088961020317
226679889567549667652650063796221897799276092785236388392230550818191660099281
326164086643457746022192295189039929663345791173742247431553750501676929660273
790601494434050000015179864425629613385774919236081771341059533760063913083

FTOS#

```

Usage Information

This command is useful if the remote SSH client implements Strict Host Key Checking. You can copy the host key to your list of known hosts.

Related Commands

crypto key generate	Generate SSH keys.
-------------------------------------	--------------------

show ip ssh

C **E** **S**

54810

54820T



Display information about established SSH sessions.

Note: Some of the parameters in this command require licensing to access. For more information, please contact your Dell Force10 representative.

Syntax

show ip ssh

Command Modes

EXEC

EXEC Privilege

Example

```

FTOS#sh ip ssh
SSH server           : enabled.
SSH server version   : v1 and v2.
Password Authentication : enabled.
Hostbased Authentication : disabled.
RSA Authentication   : disabled.

  Vty      Encryption      HMAC      Remote IP
  ---      ---            ---      ---
  1        3des-cbc         hmac-md5  10.1.20.48
  2        3des-cbc         hmac-md5  10.1.20.48

```

Related Commands

ip ssh server	Configure an SSH server.
show ip ssh client-pub-keys	Display the client-public keys.

show ip ssh client-pub-keys

C **E** **S**

Display the client public keys used in host-based authentication.

S4810

S4820T

Syntax show ip ssh client-pub-keys

Defaults No default behavior or values

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip ssh client-pub-keys
```

```
poclab4,123.12.1.123 ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAIEAox/
QQp8xYhzOxn07yh4VGPAoUfgKoiETH09G4sNV+ui+DWEc3cgYAcU5Lai1MU2ODrzhCwyDNp05tKBU3
tReG1o8AxLi6+S4hyEMqHzkzBFNVqHzpQc+Rs4p2urzV0F4pRKnaXdHF3Lk4D460HZRhhVrxqeNxPD
pEnWIMPJi0ds= ashwani@poclab4
```

```
FTOS#
```

Usage Information

This command displays the contents of the file flash://ADMIN_DIRssh/knownhosts

Related Commands

ip ssh pub-key-file	Configure the file name for the host-based authentication
-------------------------------------	---

show ip ssh rsa-authentication

C **E** **S**

Display the authorized-keys for the RSA authentication.

Syntax show ip ssh rsa-authentication {my-authorized-keys}

Parameters	my-authorized-keys	Display the RSA authorized keys.
-------------------	--------------------	----------------------------------

Defaults No default behavior or values

Command Modes EXEC

Command History

Version 7.6.1.0	Introduced for S-Series
-----------------	-------------------------

Version 7.5.1.0	Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show ip ssh rsa-authentication my-authorized-keys
ssh-rsa
AAAAB3NzaC1yc2EAAAABIwAAAIEAyB17l4gFp4r2DRHIvMc1VZd0Sg5GQxRV1y1X1JOMeO6Nd0WuYy
zrQMM4qJAoBwtneOXfLBcHF3V2hcMIqaZN+CRcnw/
zCmlnCf0+qVTd1oofsea5r09kS0xTp0CNfHXZ3NuGCq9Ov33m9+U9tMwhS8vy8AVxdH4x4km3c3t5J
vc= freedom@poclabb4

FTOS#
```

Usage Information

This command displays the contents of the file flash:/ADMIN_DIR/ssh/authorized-keys.*username*.

Related Commands

[ip ssh rsa-authentication \(Config\)](#) Configure the RSA authorized keys.

ssh



Open an SSH connection specifying the hostname, username, port number and version of the SSH client.

FTOS supports both inbound and outbound SSH sessions using IPv4 or IPv6 addressing. Inbound SSH supports accessing the system through the management interface as well as through a physical Layer 3 interface.



Note: Some of the parameters in this command require licensing to access. For more information, please contact your Dell Force10 representative.

Syntax

```
ssh { hostname | ipv4 address | ipv6 address } [-c encryption cipher | -l username | -m HMAC algorithm | -p port-number | -v { 1 | 2 }]
```

Parameters

<i>hostname</i>	(OPTIONAL) Enter the IP address or the hostname of the remote device.
<i>vrf instance</i>	(OPTIONAL) E-Series Only: Enter the keyword vrf following by the VRF Instance name to open a SSH connection to that instance.
<i>ipv4 address</i>	(OPTIONAL) Enter the IP address in dotted decimal format A.B.C.D.
<i>ipv6-address prefix-length</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format followed by the prefix length in the /x format. Range: /0 to /128 Note: The :: notation specifies successive hexadecimal fields of zeros
<i>-c encryption cipher</i>	Enter the following encryption cipher to use. (For v2 clients only.): • 3des-cbc: Force ssh to use 3des-cbc encryption cipher.
<i>-l username</i>	(OPTIONAL) Enter the keyword -l followed by the user name used in this SSH session. Default: The user name of the user associated with the terminal.

<code>-m <i>HMAC algorithm</i></code>	Enter one of the following HMAC algorithms to use. (For v2 clients only.): <ul style="list-style-type: none"> • hmac-sha1: Force ssh to use the hmac-sha1 HMAC algorithm. • hmac-sha1-96: Force ssh to use the hmac-sha1-96 HMAC algorithm. • hmac-md5: Force ssh to use the hmac-md5 HMAC algorithm. • hmac-md5-96: Force ssh to use the hmac-md5-96 HMAC algorithm.
<code>-p <i>port-number</i></code>	(OPTIONAL) Enter the keyword <code>-p</code> followed by the port number. Range: 1 to 65536 Default: 22
<code>-v {1 2}</code>	(OPTIONAL) Enter the keyword <code>-v</code> followed by the SSH version 1 or 2. Default: The version from the protocol negotiation. Note: If FIPS mode is enabled, only version 2 can be selected.

Defaults As indicated above.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.19.0	Added support for the -c and -m parameters on the S4820T.
Version 8.3.12.0	Added support for the -c and -m parameters on the S4810.
Version 8.3.7.0	Introduced on S4810
Version 7.9.1.0	Introduced VRF
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Added IPv6 support; Introduced for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```

FTOS#ssh 10.11.8.12 ?
-c                Encryption cipher to use (for v2 clients only)
-l                User name option
-m                HMAC algorithm to use (for v2 clients only)
-p                SSH server port option (default 22)
-v                SSH protocol version
<cr>
FTOS#ssh 10.11.8.12 -c ?
3des-cbc         Force ssh to use 3des-cbc encryption cipher
FTOS#ssh 10.11.8.12 -m ?
hmac-sha1        Force ssh to use hmac-sha1 HMAC algorithm
hmac-sha1-96     Force ssh to use hmac-sha1-96 HMAC algorithm
hmac-md5         Force ssh to use hmac-md5 HMAC algorithm
hmac-md5-96     Force ssh to use hmac-md5-96 HMAC algorithm

```

Trace List Commands

IP trace lists create an Access Control List (ACLs) to trace all traffic into the E-Series switch. This feature is useful for tracing Denial of Service (DOS) attacks.



Note: For other Access Control List commands, the chapter [Chapter 7, Access Control Lists \(ACL\)](#).

- [clear counters ip trace-group](#)
- [deny](#)
- [deny tcp](#)
- [deny udp](#)
- [ip trace-group](#)
- [ip trace-list](#)
- [permit](#)
- [permit tcp](#)
- [permit udp](#)
- [seq](#)
- [show config](#)
- [show ip accounting trace-lists](#)

clear counters ip trace-group

E

Erase all counters maintained for trace lists.

Syntax

clear counters ip trace-group [*trace-list-name*]

Parameters

trace-list-name (OPTIONAL) Enter the name of a configured trace list.

Command Modes

EXEC Privilege

deny

E

Configure a filter that drops IP packets meeting the filter criteria.

Syntax

deny {ip | *ip-protocol-number*} {*source mask* | any | host *ip-address*} {*destination mask* | any | host *ip-address*} [count [byte]] | log] [order *number*]

To remove this filter, you have two choices:

- Use the no seq *sequence-number* command syntax if you know the filter's sequence number or

- Use the `no deny {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

<code>ip</code>	Enter the keyword <code>ip</code> to configure a generic IP access list. The keyword <code>ip</code> specifies that the access list will deny all IP protocols.
<code>ip-protocol-number</code>	Enter a number from 0 to 255 to deny based on the protocol identified in the IP protocol header.
<code>source</code>	Enter the IP address of the network or host from which the packets were sent.
<code>mask</code>	(OPTIONAL) Enter a network mask in /prefix format (/x).
<code>any</code>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<code>host ip-address</code>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<code>destination</code>	Enter the IP address of the network or host to which the packets are sent.
<code>count</code>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<code>bytes</code>	(OPTIONAL) Enter the keyword <code>bytes</code> to count only bytes processed by the filter.
<code>log</code>	(OPTIONAL) Enter the keyword <code>log</code> to have the information kept in a Trace-list log file.
<code>order number</code>	(OPTIONAL) Enter the keyword <code>order</code> followed by a number from 0 to 7 as the order number.

Defaults

Not configured.

Command Modes

TRACE LIST

Related Commands

deny tcp	Assign a trace list filter to deny TCP packets.
deny udp	Assign a trace list filter to deny UDP packets.
ip trace-group	Create a trace list.

deny tcp



Configure a filter that drops TCP packets meeting the filter criteria.

Syntax

```
deny tcp { source address mask | any | host ip-address } [operator port [port]]
{ destination mask | any | host ip-address } [operator port [port]] [count [byte]] | log] [order
number]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword any to specify that all routes are subject to the filter.
<i>host ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• eq = equal to• neq = not equal to• gt = greater than• lt = less than• range = inclusive range of ports (you must specify two ports for the <i>port</i> command parameter.)
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none">• 23 = Telnet• 20 and 21 = FTP• 25 = SMTP• 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>count</i>	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword byte to count only bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword log to have the information kept in a Trace-list log file.
<i>order number</i>	(OPTIONAL) Enter the keyword order followed by a number from 0 to 7 as the order number.

Defaults

Not configured.

Command Modes

TRACE LIST

Related Commands

deny	Assign a trace list filter to deny IP traffic.
deny udp	Assign a trace list filter to deny UDP traffic.

deny udp

E

Configure a filter to drop UDP packets meeting the filter criteria.

Syntax

```
deny udp { source mask | any | host ip-address } [operator port [port]] { destination mask | any | host ip-address } [operator port [port]] [count [byte]] | log] [order number]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny udp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports
port <i>port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count only bytes
log	(OPTIONAL) Enter the keyword log to have the information kept in a Trace-list log file.
order <i>number</i>	(OPTIONAL) Enter the keyword order followed by a number from 0 to 7 as the order number.

Defaults

Not configured.

Command Modes

TRACE LIST

Related Commands

deny	Assign a trace list filter to deny IP traffic.
deny tcp	Assign a trace list filter to deny TCP traffic.

ip trace-group

E

Assign a trace list globally to process all incoming packets to the switch.

Syntax `ip trace-group trace-list-name`

To delete an trace list configuration, use the `no ip trace-group trace-list-name` command.

Parameters `trace-list-name` Enter the name of a configured trace list.

Defaults Not enabled.

Command Modes CONFIGURATION

Usage Information You can assign one Trace list to the chassis.

If there are unresolved next-hops and a Trace-list is enabled, there is a possibility that the traffic hitting the CPU will not be rate-limited.

Related Commands [ip trace-list](#) Configure a trace list ACL.

ip trace-list

E

Configure a trace list, based on IP addresses or protocols, to filter all traffic on the E-Series.

Syntax `ip trace-list trace-list-name`

To delete a trace list, use the `no ip trace-list trace-list-name` command.

Parameters `trace-list-name` Enter a string up to 16 characters long as the access list name.

Defaults Not configured

Example

```
FTOS(conf)#ip trace-list suzanne
FTOS(config-trace-acl)#
```

Command Modes CONFIGURATION

Usage Information After you create a trace list, you must apply it to the E-Series using the [ip trace-group](#) command in the CONFIGURATION mode.

Related Commands [ip trace-group](#) View the current configuration.

permit

E

Configure a filter to pass IP packets meeting the filter criteria.

Syntax

```
permit {ip | ip-protocol-number} { source mask | any | host ip-address} { destination mask | any | host ip-address} [count [byte]] log]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no deny {ip | ip-protocol-number} { source mask | any | host ip-address} { destination mask | any | host ip-address}` command.

Parameters

<code>ip</code>	Enter the keyword <code>ip</code> to configure a generic IP access list. The keyword <code>ip</code> specifies that the access list will permit all IP protocols.
<code><i>ip-protocol-number</i></code>	Enter a number from 0 to 255 to permit based on the protocol identified in the IP protocol header.
<code><i>source</i></code>	Enter the IP address of the network or host from which the packets were sent.
<code><i>mask</i></code>	(OPTIONAL) Enter a network mask in /prefix format (/x).
<code>any</code>	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
<code>host <i>ip-address</i></code>	Enter the keyword <code>host</code> followed by the IP address to specify a host IP address.
<code><i>destination</i></code>	Enter the IP address of the network or host to which the packets are sent.
<code>count</code>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<code>byte</code>	(OPTIONAL) Enter the keyword <code>byte</code> to count only bytes processed by the filter.
<code>log</code>	(OPTIONAL) Enter the keyword <code>log</code> to have the information kept in a Trace-list log file.

Defaults

Not configured.

Command Modes

TRACE LIST

Related Commands

ip trace-list	Create a trace list.
permit tcp	Assign a trace list filter to forward TCP packets.
permit udp	Assign a trace list filter to forward UDP packets.

permit tcp

E

Configure a filter to pass TCP packets meeting the filter criteria.

Syntax

```
permit tcp { source mask | any | host ip-address } [operator port [port]] { destination mask | any | host ip-address } [operator port [port]] [count [byte]] | log] [order number]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit tcp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: eq = equal to neq = not equal to gt = greater than lt = less than range = inclusive range of ports (you must specify two port for the <i>port</i> parameter.)
<i>port port</i>	Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535. The following list includes some common TCP port numbers: 23 = Telnet 20 and 21 = FTP 25 = SMTP 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count only bytes processed by the filter.
log	(OPTIONAL) Enter the keyword log to have the information kept in a Trace-list log file.
<i>order number</i>	(OPTIONAL) Enter the keyword order followed by a number from 0 to 7 as the order number.

Defaults

Not configured.

Command Modes

TRACE LIST

**Related
Commands**

ip trace-list	Create a trace list.
permit	Assign a trace list filter to forward IP packets.
permit udp	Assign a trace list filter to forward UDP packets.

permit udp

E

Configure a filter to pass UDP packets meeting the filter criteria.

Syntax

```
permit udp { source mask | any | host ip-address } [operator port [port]] { destination mask | any | host ip-address } [operator port [port]] [count [byte]] | log] [order number]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number or
- Use the `no permit udp { source mask | any | host ip-address } { destination mask | any | host ip-address }` command.

Parameters

<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)
<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword count to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword byte to count only bytes processed by the filter.
log	(OPTIONAL) Enter the keyword log to have the information kept in a Trace-list log file.
<i>order number</i>	(OPTIONAL) Enter the keyword order followed by a number from 0 to 7 as the order number.

Defaults

Not configured.

Command Modes

TRACE LIST

**Related
Commands**

ip trace-list	Configure a trace list.
permit	Assign a trace list filter to forward IP packets.
permit tcp	Assign a trace list filter to forward TCP packets.

seq**E**

Assign a sequence number to a deny or permit filter in a trace list while creating the filter.

Syntax

```
seq sequence-number {deny | permit} {ip-protocol-number | ip | tcp | udp} {source mask |  
any | host ip-address} {destination mask | any | host ip-address} [operator port [port]]  
[precedence precedence] [tos tos-value] [count [byte] | log]
```

To delete a filter, use the no seq *sequence-number* command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 65535.
deny	Enter the keyword deny to configure a filter to drop packets meeting this condition.
permit	Enter the keyword permit to configure a filter to forward packets meeting this criteria.
<i>ip-protocol-number</i>	Enter a number from 0 to 255 to filter based on the protocol identified in the IP protocol header.
ip	Enter the keyword ip to configure a generic IP access list. The keyword ip specifies that the access list will permit all IP protocols.
tcp	Enter the keyword tcp to configure a TCP access list filter.
udp	Enter the keyword udp to configure a UDP access list filter.
<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	(OPTIONAL) Enter a network mask in /prefix format (/x).
any	Enter the keyword any to specify that all routes are subject to the filter.
host <i>ip-address</i>	Enter the keyword host followed by the IP address to specify a host IP address.
<i>operator</i>	(OPTIONAL) Enter one of the following logical operands: <ul style="list-style-type: none"> • eq = equal to • neq = not equal to • gt = greater than • lt = less than • range = inclusive range of ports (you must specify two ports for the <i>port</i> parameter.)

<i>port port</i>	(OPTIONAL) Enter the application layer port number. Enter two port numbers if using the range logical operand. Range: 0 to 65535 The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>precedence precedence</i>	Enter the keyword <i>precedence</i> followed by a number from 0 to 7 as the precedence value.
<i>tos tos-value</i>	Enter the keyword <i>tos</i> followed by a number from 0 to 15 as the TOS value.
<i>count</i>	(OPTIONAL) Enter the keyword <i>count</i> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <i>byte</i> to count only bytes processed by the filter.
<i>log</i>	(OPTIONAL) Enter the keyword <i>log</i> to have the information kept in a Trace-list log file.
Defaults	Not configured.
Command Modes	TRACE LIST
Command History	Version 7.4.1.0 Deprecated established keyword — not supported on TeraScale line cards.
Related Commands	deny Configure a filter to drop packets. permit Configure a filter to forward packets.

show config

E

View the current IP trace list configuration.

Syntax

show config

Command Modes

TRACE LIST

Example

```
FTOS(config-trace-acl)#show config
!
ip trace-list suzanne
seq 5 deny tcp any any
FTOS(config-trace-acl)#
```


show ip accounting trace-lists

E

View the trace lists created on the switch and the sequence of filters.

Syntax

show ip accounting trace-lists [*trace-list-name* [*linecard number*]]

Parameters

<i>trace-list-name</i>	(OPTIONAL) Enter the name of the trace list to be displayed.
<i>linecard number</i>	(OPTIONAL) Enter the keyword linecard followed by the line card number to view the Trace list information on that line card. C-Series and S-Series Range: 0 to 7 on the C300 E-Series Range: 0 to 13 on a E1200, 0 to 6 on a E600, and 0 to 5 on a E300.

Command Modes

EXEC

EXEC Privilege

Command History

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series

Example

```
FTOS#show ip accounting trace-list suzanne
Trace List suzanne
  seq 5 deny ip any any count (0x00 packets)
  seq 10 permit tcp 10.1.1.0 /24 any count bytes (0x00 bytes)
FTOS#
```

Secure DHCP Commands

DHCP as defined by RFC 2131 provides no authentication or security mechanisms. Secure DHCP is a suite of features that protects networks that use dynamic address allocation from spoofing and attacks.

- [clear ip dhcp snooping](#)
- [ip dhcp relay](#)
- [ip dhcp snooping](#)
- [ip dhcp snooping database](#)
- [ip dhcp snooping binding](#)
- [ip dhcp snooping database renew](#)
- [ip dhcp snooping trust](#)
- [ip dhcp source-address-validation](#)
- [ip dhcp snooping vlan](#)
- [show ip dhcp snooping](#)

clear ip dhcp snooping

C **S**

Clear the DHCP binding table.

Syntax clear ip dhcp snooping binding

Command Modes EXEC Privilege

Default None

Command History	Version 7.8.1.0	Introduced on C-Series and S-Series
------------------------	-----------------	-------------------------------------

Related Commands	show ip dhcp snooping	Display the contents of the DHCP binding table.
-------------------------	---------------------------------------	---

ip dhcp relay

C **S** **S4810**

Enable Option 82.

S4820T

Syntax ip dhcp relay information-option [trust-downstream]

Parameters	trust-downstream	Configure the system to trust Option 82 when it is received from the previous-hop router.
-------------------	------------------	---

Command Modes CONFIGURATION

Default Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series

ip dhcp snooping

C **S** **S4810**

Enable DHCP Snooping globally.

S4820T

Syntax [no] ip dhcp snooping

Command Modes CONFIGURATION

Default Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series
Usage Information	When enabled, no learning takes place until snooping is enabled on a VLAN. Upon disabling DHCP Snooping the binding table is deleted, and Option 82, IP Source Guard, and Dynamic ARP Inspection are disabled.	
Related Commands	ip dhcp snooping vlan	Enable DHCP Snooping on one or more VLANs.

ip dhcp snooping database

C **S** **S4810**
S4820T

Delay writing the binding table for a specified time.

Syntax

ip dhcp snooping database write-delay *minutes*

Parameters

<i>minutes</i>	Range: 5 to 21600
----------------	-------------------

Command Modes

CONFIGURATION

Default

None

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series

ip dhcp snooping binding

C **S** **S4810**
S4820T

Create a static entry in the DHCP binding table.

Syntax

[no] ip dhcp snooping binding mac *address* vlan-id *vlan-id* ip *ip-address* interface *type* *slot/port* lease *number*

Parameters

<i>mac address</i>	Enter the keyword mac followed by the MAC address of the host to which the server is leasing the IP address.
<i>vlan-id vlan-id</i>	Enter the keyword vlan-id followed by the VLAN to which the host belongs. Range: 2 to 4094
<i>ip ip-address</i>	Enter the keyword ip followed by the IP address that the server is leasing.

<i>interface type</i>	Enter the keyword interface followed by the type of interface to which the host is connected. <ul style="list-style-type: none"> For an 10/100 Ethernet interface, enter the keyword fastethernet. For a Gigabit Ethernet interface, enter the keyword gigabitethernet. For a SONET interface, enter the keyword sonet. For a Ten Gigabit Ethernet interface, enter the keyword tengigabitethernet. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE.
<i>slot/port</i>	Enter the slot and port number of the interface.
<i>lease time</i>	Enter the keyword lease followed by the amount of time the IP address will be leased. Range: 1-4294967295

Command Modes

EXEC

EXEC Privilege

Default

None

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale.

Version 8.3.7.0 Introduced on S4810

Version 7.8.1.0 Introduced on C-Series and S-Series

Related Commands[show ip dhcp snooping](#) Display the contents of the DHCP binding table.

ip dhcp snooping database renew

C S **S4810**

Renew the binding table.

S4820T**Syntax**

ip dhcp snooping database renew

Command Modes

EXEC

EXEC Privilege

Default

None

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.8.1.0 Introduced on C-Series and S-Series

ip dhcp snooping trust

C **S** **S4810**

Configure an interface as trusted.

S4820T

Syntax [no] ip dhcp snooping trust

Command Modes INTERFACE

Default Untrusted

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series

ip dhcp source-address-validation

C **S** **S4810**

Enable IP Source Guard.

S4820T

Syntax [no] ip dhcp source-address-validation

Command Modes INTERFACE

Default Disabled

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.8.1.0	Introduced on C-Series and S-Series

ip dhcp snooping vlan

C **S** **S4810**

Enable DHCP Snooping on one or more VLANs.

S4820T

Syntax [no] ip dhcp snooping vlan *name*

Parameters

<i>name</i>	Enter the name of a VLAN on which to enable DHCP Snooping.
-------------	--

Command Modes CONFIGURATION

Default Disabled

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series
Usage Information	When enabled the system begins creating entries in the binding table for the specified VLAN(s). Note that learning only happens if there is a trusted port in the VLAN.	
Related Commands	ip dhcp snooping trust	Configure an interface as trusted.

show ip dhcp snooping

C **S** **S4810**

Display the contents of the DHCP binding table.

S4820T

Syntax

show ip dhcp snooping binding

Command Modes

EXEC

EXEC Privilege

Default

None

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.8.1.0	Introduced on C-Series and S-Series
Related Commands	clear ip dhcp snooping	Clear the contents of the DHCP binding table.

Service Provider Bridging

Overview

Service Provider Bridging is composed of VLAN Stacking, Layer 2 Protocol Tunneling, and Provider Backbone Bridging as described in the *FTOS Configuration Guide Service Provider Bridging* chapter.

This chapter includes CLI information for FTOS Layer 2 Protocol Tunneling (L2PT). L2PT enables protocols to tunnel through an 802.1q tunnel.

L2PT is supported by FTOS on all Dell Force10 systems as indicated by the characters that appear below each command heading: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

L2PT is supported on E-Series ExaScale **E**_x with FTOS 8.2.1.0. and later.

Refer to [Chapter 56, VLAN Stacking](#) or [Chapter 52, Spanning Tree Protocol \(STP\)](#) and [Chapter 19, GARP VLAN Registration \(GVRP\)](#) for further information related to those features.

Commands

The L2PT commands are:

- [debug protocol-tunnel](#)
- [protocol-tunnel](#)
- [protocol-tunnel destination-mac](#)
- [protocol-tunnel enable](#)
- [protocol-tunnel rate-limit](#)
- [show protocol-tunnel](#)

Important Points to Remember

- L2PT is enabled at the interface VLAN-Stack VLAN level. For details on Stackable VLAN (VLAN-Stacking) commands, refer to [Chapter 56, VLAN Stacking](#).

- The default behavior is to disable protocol packet tunneling through the 802.1q tunnel.
- Rate-limiting is required to protect against BPDU attacks.
- A port channel (including through LACP) can be configured as a VLAN-Stack access or trunk port.
- ARP packets work as expected across the tunnel.
- FEFD works the same as with Layer 2 links.
- Protocols that use Multicast MAC addresses (OSPF for example) work as expected and carry over to the other end of the VLAN-Stack VLAN.

debug protocol-tunnel

C E S

S4810

S4820T

Enable debugging to ensure incoming packets are received and rewritten to a new MAC address.

Syntax

```
debug protocol-tunnel interface {in | out | both} [vlan vlan-id] [count value]
```

To disable debugging, use the no debug protocol-tunnel interface {in | out | both} [vlan *vlan-id*] [count *value*] command.

Parameters

interface	<p>Enter one of the following interfaces and slot/port information:</p> <ul style="list-style-type: none"> • For a Fast Ethernet interface, enter the keyword FastEthernet followed by the slot/port information. • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. • For a SONET interface, enter the keyword sonet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
in out both	Enter the keyword in, out, or both to debug incoming interfaces, outgoing interfaces, or both incoming and outgoing interfaces.
vlan <i>vlan-id</i>	Enter the keyword vlan followed by the VLAN ID. Range: 1 to 4094
count <i>value</i>	Enter the keyword count followed by the number of debug outputs. Range: 1 to 100

Defaults

Debug Disabled

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the C-Series, E-Series and E-Series ExaScale.
Version 7.4.1.0	Introduced

protocol-tunnel

C **E** **S**

Enable protocol tunneling on a stacked (Q-in-Q) VLAN for specified protocol packets.

Syntax

protocol-tunnel {dot1x | e-lmi | gmrp | gvrp | lldp | lacp | mmrp | mvrp | oam | stp}

To disable protocol tunneling for a Layer 2 protocol, use the no protocol-tunnel command.

Parameters

dot1x	E-Series ExaScale only: Enter dot1x to enable protocol tunneling for 802.1x authentication.
e-lmi	E-Series ExaScale only: Enter e-lmi to enable protocol tunneling for the Ethernet local management interface (E-LMI).
gmrp	E-Series ExaScale only: Enter gmrp to enable protocol tunneling for the GARP Multicast Registration protocol (GMRP).
gvrp	E-Series ExaScale only: Enter gvrp to enable protocol tunneling for the GARP VLAN Registration protocol (GVRP).
lldp	E-Series ExaScale only: Enter lldp to enable protocol tunneling for the Link Layer Discovery protocol (LLDP).
lacp	E-Series ExaScale only: Enter lacp to enable protocol tunneling for the Link Aggregation Control protocol (LACP).
mmrp	E-Series ExaScale only: Enter mmrp to enable protocol tunneling for the Multiple MAC Registration protocol (MMRP).
mvrp	E-Series ExaScale only: Enter mvrp to enable protocol tunneling for the Multiple VLAN Registration protocol (MVRP).
oam	E-Series ExaScale only: Enter oam to enable protocol tunneling for Link-Layer Ethernet Operations, Administration, and Maintenance functions (Ethernet in the First Mile - EFM - OAM 802.3ah).
stp	Enter stp to enable protocol tunneling on a spanning tree, including STP, MSTP, RSTP, and PVST.

Defaults

No default values or behavior

Command Modes

CONF-IF-VLAN

Command History

Version 8.5.1.1	Support for 802.1X, E-LMI, GMRP, GVRP, LLDP, LACP, MMRP, MVRP, and OAM 802.3ah protocol traffic was added to the E-Series ExaScale.
-----------------	---

Version 8.2.1.0 Introduced on the C-Series, E-Series and E-Series ExaScale.

Version 7.4.1.0 Introduced

Example

```
FTOS#conf
FTOS(conf)#interface vlan 2
FTOS(conf-if-vl-2)#vlan-stack compatible
FTOS(conf-if-vl-2)#member Gi1/2-3
FTOS(conf-if-vl-2)#protocol-tunnel stp
FTOS(conf-if-vl-2)#protocol-tunnel enable
```

**Related
Commands**

[show protocol-tunnel](#) Display tunneling information for all VLANs

protocol-tunnel destination-mac

C **E** **S**

Overwrite the BPDU destination MAC address with a specific value.

S4810

S4820T

Syntax

protocol-tunnel destination-mac xstp *address*

Parameters

stp Change the default destination MAC address used for L2PT to another value.

Defaults

The default destination MAC is 01:01:e8:00:00:00.

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.2.1.0 Introduced on the C-Series and S-Series.

Version 7.4.1.0 Introduced

**Usage
Information**

When VLAN-Stacking is enabled, no protocol packets are tunneled.

**Related
Commands**

[show protocol-tunnel](#) Display tunneling information for all VLANs

protocol-tunnel enable

C **E** **S**

Enable protocol tunneling globally on the system.

S4810

S4820T

Syntax

protocol-tunnel enable

To disable protocol tunneling, use the no protocol-tunnel enable command.

Defaults	Disabled
Command Modes	CONFIGURATION
Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 7.4.1.0 Introduced <hr/>
Usage Information	FTOS must have the default CAM profile with the default microcode before you enable L2PT.

protocol-tunnel rate-limit

C E S

S4810

S4820T

Enable traffic rate limiting per box.

Syntax

protocol-tunnel rate-limit *rate*

To reset the rate limit to the default, use the no protocol-tunnel rate-limit *rate* command.

Parameters	<i>rate</i> Enter the rate in frames per second. Range: 75 to 3000 Default: 75
-------------------	--

Defaults 75 Frames per second

Command Modes CONFIGURATION

Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.2.1.0 Introduced on the C-Series, E-Series Terascale, and E-Series ExaScale. Maximum rate limit on E-Series reduced from 4000 to 3000. <hr/> Version 7.4.1.0 Introduced <hr/>
------------------------	--

Example

```
FTOS#
FTOS#conf
FTOS(conf)#protocol-tunnel rate-limit 1000
FTOS(conf)#
```

Related Commands	show protocol-tunnel Display tunneling information for all VLANs <hr/> show running-config Display the current configuration. <hr/>
-------------------------	---

show protocol-tunnel

C E S

S4810

S4820T

Display protocol tunnel information for all or a specified VLAN-Stack VLAN.

Syntax show protocol-tunnel [vlan *vlan-id*]

Parameters

vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword vlan followed by the VLAN ID to display information for the one VLAN. Range: 1 to 4094
---------------------	---

Defaults No default values or behavior

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the C-Series, E-Series and E-Series ExaScale.
Version 7.4.1.0	Introduced

Example

```
FTOS#show protocol-tunnel
System Rate-Limit: 75 frames/second
VLAN  Protocols  Interface
1000  STP,PVST     Gi 5/7,Gi 5/6
1001  LLDP,GVRP   Gi 5/7,Gi 5/6
1002  MMRP,MVRP   Gi 5/7,Gi 5/6
1003  LACP,DOT1X  Gi 5/7,Gi 5/6
1004  OAM, PAUSE  Gi 5/7,Gi 5/6
1005  E-LMI       Gi 5/7,Gi 5/6
```

Example (specific VLAN)

```
FTOS#show protocol-tunnel vlan 2
System Rate-Limit: 1000 Frames/second
Interface      Vlan   Protocol(s)
Gi1/2          2      STP, PVST
FTOS#
```

Related Commands

show running-config	Display the current configuration.
-------------------------------------	------------------------------------

sFlow

Overview

sFlow commands are supported by FTOS on all Dell Force10 platforms as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

FTOS sFlow monitoring system includes an sFlow Agent and an sFlow Collector. The sFlow Agent combines the flow samples and interface counters into sFlow datagrams and forwards them to the sFlow Collector. The sFlow Collector analyses the sFlow Datagrams received from the different devices and produces a network-wide view of traffic flows.

Important Points to Remember

- Dell Force10 recommends that the sFlow Collector be connected to the Dell Force10 chassis through a line card port rather than the RPM Management Ethernet port.
- FTOS exports all sFlow packets to the sFlow Collector. A small sampling rate can equate to a large number of exported packets. A backoff mechanism will automatically be applied to reduce this amount. Some sampled packets may be dropped when the exported packet rate is high and the backoff mechanism is about to or is starting to take effect. The dropEvent counter, in the sFlow packet, will always be zero.
- sFlow sampling is done on a per-port basis.
- Community list and local preference fields are not filled up in the extended gateway element in the sFlow datagram.
- The 802.1P source priority field is not filled up in the extended switch element in the sFlow datagram.
- Only Destination and Destination Peer AS numbers are packed in the dst-as-path field in the extended gateway element.
- If the packet being sampled is redirected using PBR (Policy-Based Routing), the sFlow datagram may contain incorrect extended gateway/router information.
- sFlow does not support packing extended information for IPv6 packets. Only the first 128 bytes of the IPv6 packet is shipped in the datagram.
- The source VLAN field in the extended switch element will not be packed in case of a routed packet.

- The destination VLAN field in the extended switch element will not be packed in case of a multicast packet.
- The maximum number of packets that can be sampled and processed per second is:
 - 7500 packets when no extended information packing is enabled
 - 7500 packets when only extended-switch information packing is enabled ([sflow extended-switch enable](#))
 - 1600 packets when extended-router and/or extended-gateway information packing is enabled ([Figure](#) and [sflow extended-gateway enable](#))

Commands

The sFlow commands are:

- [sflow collector](#)
- [sflow enable \(Global\)](#)
- [sflow enable \(Interface\)](#)
- [sflow extended-gateway enable](#)
- [sflow extended-router enable](#)
- [sflow extended-switch enable](#)
- [sflow polling-interval \(Global\)](#)
- [sflow polling-interval \(Interface\)](#)
- [sflow sample-rate \(Global\)](#)
- [sflow sample-rate \(Interface\)](#)
- [show sflow](#)
- [show sflow linecard](#)

sflow collector

C **E** **S**

S4810

S4820T

Syntax

Configure a collector device to which sFlow datagrams are forwarded.

```
sflow collector { ipv4-address | ipv6-address } agent-addr { ipv4-address | ipv6-address }
[ number [max-datagram-size number] ] | [max-datagram-size number]
```

Parameters

<code>sflow collector <i>ipv4-address</i> <i>ipv6-address</i></code>	Enter the IPv4 (A.B.C.D) or IPv6 address (X:X:X:X::X) of the sFlow collector device.
<code>agent-addr <i>ipv4-address</i> <i>ipv6-address</i></code>	Enter the IPv4 (A.B.C.D) or IPv6 address (X:X:X:X::X) of the sFlow agent in the router.

<i>number</i>	(OPTIONAL) Enter the UDP port number (User Datagram Protocol). Range: 0 to 65535 Default: 6343
<i>max-datagram-size number</i>	(OPTIONAL) Enter the keyword <i>max-datagram-size</i> followed by the size number in bytes. Range: 400 to 1500 Default: 1400

Defaults

Not configured

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.3	Support for IPv6 sFlow collectors and agents was added on the E-series TeraScale, C-Series, and S-Series.
Version 8.4.1.1	Support for IPv6 sFlow collectors and agents was added on the E-series ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduces on S-Series Stacking
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.5.1.0	Expanded the no form of the command to mirror the syntax used to configure
Version 6.2.1.1	Introduced on E-Series

Usage Information

You can configure up to two sFlow collectors (IPv4 or IPv6). If two collectors are configured, traffic samples are sent to both.

The sFlow agent address is carried in a field in SFlow packets and is used by the collector to identify the sFlow agent.

IPv6 sFlow collectors and agents are supported on E-Series (ExaScale and TeraScale), C-Series, and S-Series routers.

To delete a configured collector, enter the `no sflow collector { ipv4-address | ipv6-address } agent-addr { ipv4-address | ipv6-address } [number [max-datagram-size number]] | [max-datagram-size number]` command.

As part of the sFlow-MIB, if the SNMP request originates from a configured collector, FTOS will return the corresponding configured agent IP in MIB requests. FTOS checks to ensure that two entries are not configured for the same collector IP with a different agent IP. Should that happen, FTOS generates the following error:
%Error: Different agent-addr attempted for an existing collector

sflow enable (Global)

C E S

Enable sFlow globally.

S4810

S4820T

Syntax sflow enable

To disable sFlow, use the no sflow enable command.

Defaults sFlow is disabled by default

Command Modes CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.2.1.0 Introduces on S-Series Stacking

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.7.1.0 Introduced on S-Series

Version 7.6.1.0 Introduced on C-Series

Version 6.2.1.1 Introduced on E-Series

Usage Information

sFlow is disabled by default. In addition to this command, sFlow needs to be enable on individual interfaces where sFlow sampling is desired.

Related Commands

[sflow enable \(Interface\)](#) Enable sFlow on Interfaces.

sflow enable (Interface)

C E S

Enable sFlow on Interfaces.

S4810

S4820T

Syntax sflow enable

To disable sFlow, use the no sflow enable command.

Defaults sFlow is disabled by default on all interfaces

Command Modes INTERFACE

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.2.1.0 Introduces on S-Series Stacking

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Usage Information

When sFlow is enable on an interface, flow sampling is done on any traffic going out of the interface.



Note: Once a physical port is a member of a LAG, it will inherit the sFlow configuration from the LAG port.

Related Commands

sflow enable (Global)	Turn sFlow on globally
---------------------------------------	------------------------

sflow extended-gateway enable



Enable packing information on an extended gateway.

Syntax

sflow extended-gateway [extended-router] [extended-switch] enable

To disable packing information, use the no sflow extended-gateway [extended-router] [extended-switch] enable command.

Parameters

extended-router	Enter the keyword <code>extended-router</code> to collect extended router information.
extended-switch	Enter the keyword <code>extended-switch</code> to collect extended switch information.
enable	Enter the keyword <code>enable</code> to enable global extended information.

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series

Usage Information

The show sflow command displays the configured global extended information.

FTOS 7.8.1.0 and later enhances the sFlow implementation for real time traffic analysis on the E-Series to provide extended gateway information in cases where the destination IP addresses are learned by different routing protocols, and for cases where the destination is reachable over ECMP.

Example

```

FTOS#show sflow
sFlow services are enabled
Global default sampling rate: 64
Global default counter polling interval: 1000
Global extended information enabled: gateway, router, switch
1 collectors configured
Collector IP addr: 20.20.20.2, Agent IP addr: 10.11.201.7, UDP port: 6343
1732336 UDP packets exported
0 UDP packets dropped
12510225 sFlow samples collected
0 sFlow samples dropped due to sub-sampling
FTOS#

```

Related Commands

show sflow	Display the sFlow configuration
----------------------------	---------------------------------

sflow extended-router enable

E

Enable packing information on a router and switch.

Syntax

sflow extended-router [extended-switch] enable

To disable packing information, use the no sflow extended-router [extended-switch] enable command.

Parameters

extended-switch	Enter the keyword <code>extended-switch</code> to collect extended switch information.
enable	Enter the keyword <code>enable</code> to enable global extended information.

Defaults

Disabled

Command Modes

CONFIGURATION

Command History

Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.4.1.0	Introduced on E-Series

Usage Information

FTOS 7.8.1.0 and later enhances the sflow implementation for real time traffic analysis on the E-Series to provide extended gateway information in cases where the destination IP addresses are learned by different routing protocols, and for cases where the destination is reachable over ECMP.

Related Commands

sflow extended-gateway enable	Enable packing information on an extended gateway
sflow extended-switch enable	Enable packing information on a switch.
show sflow	Display the sFlow configuration

sflow extended-switch enable

C E S

Enable packing information on a switch only.

S4810

S4820T

Syntax sflow extended-switch enable

To disable packing information, use the no sflow extended-switch [enable] command.

Parameters	enable	Enter the keyword enable to enable global extended information.
-------------------	--------	---

Defaults	Disabled
-----------------	----------

Command Modes	CONFIGURATION
----------------------	---------------

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Introduces on S-Series Stacking
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	Version 7.4.1.0	Introduced on E-Series

Usage Information	FTOS 7.8.1.0 and later enhances the sflow implementation for real time traffic analysis on the E-Series to provide extended gateway information in cases where the destination IP addresses are learned by different routing protocols, and for cases where the destination is reachable over ECMP.
--------------------------	---

Related Commands	sflow extended-gateway enable	Enable packing information on an extended gateway.
	sflow extended-router enable	Enable packing information on a router.
	show sflow	Display the sFlow configuration

sflow polling-interval (Global)

C E S

Set the sFlow polling interval at a global level.

S4810

S4820T

Syntax sflow polling-interval *interval value*

To return to the default, use the no sflow polling-interval *interval* command.

Parameters	<i>interval value</i>	Enter the interval value in seconds. Range: 15 to 86400 seconds Default: 20 seconds
Defaults	20 seconds	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.2.1.0	Introduces on S-Series Stacking
	Version 8.1.1.0	Introduced on E-Series ExaScale
	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
	Version 6.2.1.1	Introduced on E-Series
Usage Information	The polling interval for an interface is the maximum number of seconds between successive samples of counters to be sent to the collector. This command changes the global default counter polling (20 seconds) interval. You can configure an interface to use a different polling interval.	
Related Commands	sflow polling-interval (Interface)	Set the polling interval for an interface

sflow polling-interval (Interface)

C **E** **S**

Set the sFlow polling interval at an interface (overrides the global-level setting.)

S4810

S4820T

Syntax

sflow polling-interval *interval value*

To return to the default, use the no sflow polling-interval *interval* command.

Parameters	<i>interval value</i>	Enter the interval value in seconds. Range: 15 to 86400 seconds Default: The global counter polling interval
Defaults	The same value as the current global default counter polling interval	
Command Modes	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810

Version 8.2.1.0	Introduces on S-Series Stacking
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Usage Information

This command sets the counter polling interval for an interface.

Related Commands

[sflow polling-interval \(Global\)](#) Globally set the polling interval

sflow sample-rate (Global)

C **E** **S**

Change the global default sampling rate.

S4810

S4820T

Syntax

sflow sample-rate *value*

To return to the default sampling rate, enter the no sflow sample-rate.

Parameters

value Enter the sampling rate value.
 Range: **C-Series and S-Series:** 256 to 8388608 packets
E-Series TeraScale and ExaScale: 2 to 8388608

Enter values in powers of 2 only, for example 4096, 8192, 16384 etc.
 Default: 32768 packets

Defaults

32768

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduces on S-Series Stacking
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Usage Information

Sample-rate is the average number of packets skipped before the sample is taken. This command changes the global default sampling rate. You can configure an interface to use a different sampling rate than the global sampling rate. If the value entered is not a correct power of 2, the command generates an error message with the previous and next power of 2 value. Select one of these two packet numbers and re-enter the command.

Related Commands

[sflow sample-rate \(Interface\)](#) Change the Interface sampling rate.

sflow sample-rate (Interface)

C **E** **S**

Change the Interface default sampling rate.

S4810

S4820T

Syntax

sflow sample-rate *value*

To return to the default sampling rate, enter the no sflow sample-rate.

Parameters

value

Enter the sampling rate value.

Range: **C-Series and S-Series**: 256 to 8388608 packets

E-Series TeraScale and ExaScale: 2 to 8388608 packets

Enter values in powers of 2 only, for example 4096, 8192, 16384 etc.

Default: 32768 packets

Defaults

The Global default sampling

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.2.1.0 Introduces on S-Series Stacking

Version 8.1.1.0 Introduced on E-Series ExaScale

Version 7.7.1.0 Introduced on S-Series

Version 7.6.1.0 Introduced on C-Series

Version 6.2.1.1 Introduced on E-Series

Usage Information

This command changes the sampling rate for an Interface. By default, the sampling rate of an interface is set to the same value as the current global default sampling rate. If the value entered is not a correct power of 2, the command generates an error message with the previous and next power-of-2 value. Select one of these two number and re-enter the command.

Related Commands

[sflow sample-rate \(Global\)](#) Change the sampling rate globally.

show sflow

C E S

S4810

S4820T

Display the current sFlow configuration

Syntax

show sflow [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383.For a SONET interface, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.
------------------	--

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduces on S-Series Stacking
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show sflow
sFlow services are enabled
Global default sampling rate: 32768
Global default counter polling interval: 20
1 collectors configured
Collector IP addr: 133.33.33.53, Agent IP addr: 133.33.33.116, UDP port: 6343
0 UDP packets exported
0 UDP packets dropped
165 sFlow samples collected
0 sFlow samples dropped due to sub-sampling

Linecard 1 Port set 0 H/W sampling rate 8192
Gi 1/16: configured rate 8192, actual rate 8192, sub-sampling rate 1
Gi 1/17: configured rate 16384, actual rate 16384, sub-sampling rate 2

Linecard 3 Port set 1 H/W sampling rate 16384
Gi 3/40: configured rate 16384, actual rate 16384, sub-sampling rate 1
FTOS#
```

Usage Information

The dropEvent counter (*sFlow samples dropped due to sub-sampling*) shown in red in the example above will always display a value of zero.

show sflow linecard

C E S

Display the sFlow information on a line card.

Syntaxshow sflow linecard { *slot number* }**Parameters**

<i>slot number</i>	(OPTIONAL) Enter a slot number to view information on the line card in that slot. Range: 0 to 13 on a E1200, 0 to 6 on a E600/E600i, and 0 to 5 on a E300.
--------------------	---

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.2.1.0	Introduces on S-Series Stacking
Version 8.1.1.0	Introduced on E-Series ExaScale
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series
Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS#show sflow linecard 1
Linecard 1
  Samples rcvd from h/w           :165
  Samples dropped for sub-sampling :0
  Total UDP packets exported      :0
  UDP packets exported via RPM    :77
  UDP packets dropped             :
```

FTOS#

Simple Network Management Protocol and Syslog

Overview

This chapter contains commands to configure and monitor SNMP v1/v2/v3 and Syslog. Both features are supported on the C-Series, E-Series, S-Series, and Z-Series platforms, as indicated by the following symbols under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **54810**, **54820T**, or **Z** Z-Series.

The chapter contains the following sections:

- [SNMP Commands](#)
- [Syslog Commands](#)

SNMP Commands

The SNMP commands available in FTOS are:

- [show snmp](#)
- [show snmp engineID](#)
- [show snmp group](#)
- [show snmp user](#)
- [snmp ifmib ifalias long](#)
- [snmp-server community](#)
- [snmp-server contact](#)
- [snmp-server enable traps](#)
- [snmp-server engineID](#)
- [snmp-server group](#)
- [snmp-server host](#)
- [snmp-server location](#)
- [snmp-server packetsize](#)
- [snmp-server trap-source](#)
- [snmp-server user](#)
- [snmp-server view](#)
- [snmp trap link-status](#)

The Simple Network Management Protocol (SNMP) is used to communicate management information between the network management stations and the agents in the network elements. FTOS supports SNMP versions 1, 2c, and 3, supporting both read-only and read-write modes. FTOS sends SNMP traps, which are messages informing an SNMP management system about the network. FTOS supports up to 16 SNMP trap receivers.

Important Points to Remember

- Typically, 5-second timeout and 3-second retry values on an SNMP server are sufficient for both LAN and WAN applications. If you experience a timeout with these values, the recommended best practice on Dell Force10 switches (to accommodate their high port density) is to increase the timeout and retry values on your SNMP server to the following:
 - SNMP Timeout—greater than 3 seconds
 - SNMP Retry count—greater than 2 seconds
- If you want to query an E-Series switch using SNMP v1/v2/v3 with an IPv6 address, configure the IPv6 address on a non-management port on the switch.
- If you want to send SNMP v1/v2/v3 traps from an E-Series using an IPv6 address, use a non-management port.
- SNMP v3 informs are not currently supported with IPv6 addresses.
- If you are using ACLs in SNMP v3 configuration, group ACL overrides user ACL if the user is part of that group.
- SNMP operations are not supported on a VLAN.

show snmp

C **E** **S** **Z**

Display the status of SNMP network elements.

Syntax

show snmp

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Example

```

FTOS#show snmp
 32685 SNMP packets input
   0 Bad SNMP version errors
   0 Unknown community name
   0 Illegal operation for community name supplied
   0 Encoding errors
96988 Number of requested variables
   0 Number of altered variables
31681 Get-request PDUs
   968 Get-next PDUs
   0 Set-request PDUs
61727 SNMP packets output
   0 Too big errors (Maximum packet size 1500)
   9 No such name errors
   0 Bad values errors
   0 General errors
32649 Response PDUs
29078 Trap PDUs
FTOS#

```

**Related
Commands**

snmp-server community	Enable SNMP and set community string.
---------------------------------------	---------------------------------------

show snmp engineID

C **E** **S** **Z**

Display the identification of the local SNMP engine and all remote engines that are configured on the router.

Syntax

```
show snmp engineID
```

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
	E-Series legacy command

Example

```

FTOS#show snmp engineID
Local SNMP engineID: 0000178B02000001E80214A8
Remote Engine ID      IP-addr      Port
80001F88043132333435  172.31.1.3   5009
80001F88043938373635  172.31.1.3   5008
FTOS#

```

**Related
Commands**

snmp-server engineID	Configure local and remote SNMP engines on the router
--------------------------------------	---

show snmp group

C **E** **S** **Z**

Display the group name, security model, status, and storage type of each group.

Syntax show snmp group

Command Modes EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
	E-Series legacy command

Usage Information

The following example displays a group named ngroup. The ngroup has a security model of version 3 (v3) with authentication (auth), the read and notify name is nview with no write view name specified, and finally the row status is active.

Example

```
FTOS#show snmp group

      groupname: ngroup                security model: v3 auth
      readview  : nview                writeview: no write view specified
      notifyview: nview
      row status: active

FTOS#
```

Related Commands

[snmp-server group](#) Configure an SNMP server group

show snmp user

C **E** **S** **Z**

Display the information configured on each SNMP user name.

Syntax show snmp user

Command Modes EXEC

EXEC Privilege

Example

```
FTOS#show snmp user
User name: vlv2creadu
Engine ID: 0000178B02000001E80214A8
storage-type: nonvolatile          active
Authentication Protocol: None
Privacy Protocol: None

FTOS#
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
	E-Series legacy command

snmp ifmib ifalias long

C **E** **S** **Z**

Display the entire description string through the Interface MIB, which would otherwise be truncated to 63 characters.

Syntax

snmp ifmib ifalias long

Defaults

Interface description truncated beyond 63 characters

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced for S-Series
Version 7.5.1.0	Introduced for C-Series
unknown	Introduced for E-Series

Example

```
!-----command run on host connected to switch: -----!  
> snmpwalk -c public 10.10.10.130 .1.3.6.1.2.1.31 | grep -i alias | more  
IF-MIB::ifAlias.134530304 = STRING: This is a port connected to Router2. This  
is a port connected to  
IF-MIB::ifAlias.134792448 = STRING:  
  
!-----command run on Force10 switch: -----!  
FTOS#snmp ifmib ifalias long  
  
!-----command run on server connected to switch: -----!  
> snmpwalk -c public 10.10.10.130 .1.3.6.1.2.1.31 | grep -i alias | more  
IF-MIB::ifAlias.134530304 = STRING: This is a port connected to Router2. This  
is a port connected to Router2. This is a port connected to Router2. This is a  
port connected to Router2. This is a port connected to Router2.  
IF-MIB::ifAlias.134792448 = STRING:
```

snmp-server community

C **E** **S** **Z**

Configure a new community string access for SNMPv1, v2, and v3.

Syntax `snmp-server community community-name { ro | rw } [ipv6 ipv6-access-list-name [ipv6 ipv6-access-list-name | access-list-name | security-name name] | security-name name [ipv6 ipv6-access-list-name | access-list-name | security-name name] | access-list-name [ipv6 ipv6-access-list-name | access-list-name | security-name name]]]`

To remove access to a community, use the **no snmp-server community** *community-string* { **ro** | **rw** } [**security-name** *name* [*access-list-name* | **ipv6** *access-list-name* | *access-list-name* | **ipv6** *access-list-name*]] command.

Parameters

<i>community-name</i>	Enter a text string (up to 20 characters long) to act as a password for SNMP.
ro	Enter the keyword ro to specify read-only permission.
rw	Enter the keyword rw to specify read-write permission.
ipv6 <i>access-list-name</i>	(Optional) Enter the keyword ipv6 followed by a an IPv6 ACL name (a string up to 16 characters long).
security-name <i>name</i>	(Optional) Enter the keyword security-name followed by the security name as defined by the community MIB.
<i>access-list-name</i>	(Optional) Enter a standard IPv4 access list name (a string up to 16 characters long).

Defaults

No default behavior or values

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The example below configures a community named public that is mapped to the security named guestuser with Read Only (ro) permissions.

Example

```
FTOS#config
FTOS(conf)# snmp-server community public ro
FTOS(conf)# snmp-server community guest ro security-name guestuser
FTOS(conf)#
```

The security-name parameter maps the community string to an SNMPv3 user/security name as defined by the community MIB.

If a community string is configured without a security-name (for example, snmp-server community public ro), the community is mapped to a default security-name/group:

- v1v2creadu / v1v2creadg — maps to a community with ro (read-only) permissions

- `v1v2cwriteu/ v1v2cwriteg` — maps to a community with rw (read-write) permissions

This command is indexed by the *community-name* parameter.

If the `snmp-server community` command is not configured, you cannot query SNMP data. Only Standard IPv4 ACL and IPv6 ACL is supported in the optional *access-list-name*.

The command options `ipv6`, `security-name`, and *access-list-name* are recursive. In other words, each option can, in turn, accept any of the three options as a sub-option, and each of those sub-options can accept any of the three sub-options as a sub-option, and so forth. The following example demonstrates the creation of a standard IPv4 ACL called “snmp-ro-acl” and then assigning it to the SNMP community “guest”:

Example

```
FTOS(conf)# ip access-list standard snmp-ro-acl
FTOS(config-std-nacl)#seq 5 permit host 10.10.10.224
FTOS(config-std-nacl)#seq 10 deny any count
!

FTOS(conf)#snmp-server community guest ro snmp-ro-acl
FTOS(conf)#
```



Note: For IPv6 ACLs, only IPv6 and UDP types are valid for SNMP; TCP, ICMP rules are not valid for SNMP. In IPv6 ACLs port rules are not valid for SNMP.

Related Commands

ip access-list standard	Name (or select) a standard access list to filter based on IP address.
ipv6 access-list	Configure an access list based on IPv6 addresses or protocols.
show running-config snmp	Display the current SNMP configuration and defaults.

snmp-server contact



Configure contact information for troubleshooting this SNMP node.

Syntax

`snmp-server contact text`

To delete the SNMP server contact information, use the `no snmp-server contact` command.

Parameters

<i>text</i>	Enter an alphanumeric text string, up to 55 characters long.
-------------	--

Defaults

No default values or behavior

Command Modes

CONFIGURATION

Command History	Version	Description
	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
		E-Series legacy command

snmp-server enable traps

C **E** **S** **Z**

Enable SNMP traps.

Syntax

snmp-server enable traps [*notification-type*] [*notification-option*]

To disable traps, use the no snmp-server enable traps [*notification-type*] [*notification-option*] command.

Parameters

notification-type

Enter the type of notification from the list below:

- **bgp**—Notification of changes in BGP process
- **ecfm** — Notification of changes to ECFM
- **envmon**—For Dell Force10, device notifications when an environmental threshold is exceeded
- **isis** — Notification of intermediate service traps.
- **lacp** — Notification of changes to
- **snmp**—Notification of RFC 1157 traps.
- **stp**—Notification of state change in Spanning Tree protocol (RFC 1493)
- **vlt**—Notification of virtual link trunking
- **vrrp**—Notification of state change in a VRRP group
- **xstp**—Notification of state change in MSTP (802.1s), RSTP (802.1w), and PVST+

notification-option

For the **envmon** notification-type, enter one of the following optional parameters:

- **cam-utilization**
- **fan**
- **supply**
- **temperature**

For the **snmp** notification-type, enter one of the following optional parameters:

- **authentication**
- **coldstart**
- **linkdown**
- **linkup**

Defaults

Not enabled.

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 8.4.1.0	Support was added for VRRP traps.
	Version 7.6.1.0	Support added for S-Series; Added support for STP and xSTP traps.
	Version 7.5.1.0	Support added for C-Series
	E-Series legacy command	
Usage Information	FTOS supports up to 16 SNMP trap receivers.	
	For the <i>cam-utilization</i> notification option, the system will generate syslogs and SNMP traps when the L3 host table or route table utilization goes above the threshold. This applies to the S4810 and S4820T only.	
	If this command is not configured, no traps controlled by this command are sent. If you do not specify a <i>notification-type</i> and <i>notification-option</i> , all traps are enabled.	
Related Commands	snmp-server community	Enable SNMP and set the community string.

snmp-server engineID

C E S Z

Configure name for both the local and remote SNMP engines on the router.

Syntax

snmp-server engineID [local *engineID*] [remote *ip-address* udp-port *port-number* *engineID*]

To return to the default, use the no snmp-server engineID [local *engineID*] [remote *ip-address* udp-port *port-number* *engineID*] command

Parameters

<i>local engineID</i>	Enter the keyword local followed by the engine ID number that identifies the copy of the SNMP on the <i>local</i> device. Format (as specified in RFC 3411): 12 octets. <ul style="list-style-type: none"> The first 4 octets are set to the private enterprise number. The remaining 8 octets are the MAC address of the chassis.
<i>remote ip-address</i>	Enter the keyword remote followed by the IP address that identifies the copy of the SNMP on the <i>remote</i> device.
udp-port <i>port-number</i> <i>engineID</i>	Enter the keyword udp-port followed by the UDP (User Datagram Protocol) port number on the remote device. Range: 0 to 65535 Default: 162

Defaults

As above

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

Changing the value of the SNMP Engine ID has important side effects. A user's password (entered on the command line) is converted to an MD5 (Message Digest Algorithm) or SHA (Secure Hash Algorithm) security digest. This digest is based on both the password and the local Engine ID. The command line password is then destroyed, as required by RFC 2274. Because of this deletion, if the local value of the Engine ID changes, the security digests of SNMPv3 users will be invalid, and the users will have to be reconfigured.

For the remote Engine ID, the host IP and UDP port are the indexes to the command that are matched to either overwrite or remove the configuration.

Related Commands

show snmp engineID	Display SNMP engine and all remote engines that are configured on the router
show running-config snmp	Display the SNMP running configuration

snmp-server group

C **E** **S** **Z**

Configure a new SNMP group or a table that maps SNMP users to SNMP views.

Syntax

snmp-server group [*group_name* {**1** | **2c** | **3** {**auth** | **noauth** | **priv**}}] [**read name**] [**write name**] [**notify name**] [**access access-list-name** | **ipv6 access-list-name** | **access-list-name ipv6 access-list-name**]

To remove a specified group, use the **no snmp-server group** [*group_name* {**1** | **2c** | **3** {**auth** | **noauth** | **priv**}}] [**read name**] [**write name**] [**notify name**] [**access access-list name** | **ipv6 access-list-name** | **access-list-name ipv6 access-list-name**] command.

Parameters

<i>group_name</i>	Enter a text string (up to 20 characters long) as the name of the group. Defaults: The following groups are created for mapping to read/write community/security-names. <ul style="list-style-type: none"> • v1v2creadg — maps to a community/security-name with ro permissions • 1v2cwriteg — maps to a community/security-name rw permissions
1 2c 3	(OPTIONAL) Enter the security model version number (1, 2c, or 3). <ul style="list-style-type: none"> • 1 is the least secure version • 3 is the most secure of the security modes. • 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed. Default: 1
auth	(OPTIONAL) Enter the keyword auth to specify authentication of a packet without encryption.
noauth	(OPTIONAL) Enter the keyword noauth to specify no authentication of a packet.
priv	(OPTIONAL) Enter the keyword priv to specify both authentication and then scrambling of the packet.
read name	(OPTIONAL) Enter the keyword read followed by a name (a string of up to 20 characters long) as the read view name. Default: GlobalView is set by default and is assumed to be every object belonging to the Internet (1.3.6.1) OID space.
write name	(OPTIONAL) Enter the keyword write followed by a name (a string of up to 20 characters long) as the write view name.
notify name	(OPTIONAL) Enter the keyword notify followed by a name (a string of up to 20 characters long) as the notify view name. Note: This parameter must be enabled on the receiver for traps to be received.
access access-list name	(Optional) Enter the standard IPv4 access list name (a string up to 16 characters long).
ipv6 access-list -name	(Optional) Enter the keyword ipv6 followed by the IPv6 access list name (a string up to 16 characters long)
<i>access-list-name ipv6 access-list-name</i>	(Optional) Enter both an IPv4 and IPv6 access list name.

Defaults

As defined above

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.10.2	Added access parameter support
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series

 Version 7.5.1.0 Support added for C-Series

 E-Series legacy command

Usage Information

The following example specifies the group named harig as a version 3 user requiring both authentication and encryption and read access limited to the read named rview.



Note: For IPv6 ACLs, only IPv6 and UDP types are valid for SNMP; TCP, ICMP rules are not valid for SNMP. In IPv6 ACLs port rules are not valid for SNMP.

Example

```
FTOS#conf
FTOS(conf)# snmp-server group harig 3 priv read rview
FTOS#
```



Note: The number of configurable groups is limited to 16 groups.

Related Commands

show snmp group	Display the group name, security model, view status, and storage type of each group.
show running-config snmp	Display the SNMP running configuration

snmp-server host



Configure the recipient of an SNMP trap operation.

Syntax

`snmp-server host ip-address | ipv6-address [traps | informs] [version 1 | 2c | 3] [auth | noauth | priv] [community-string] [udp-port port-number] [notification-type]`

To remove the SNMP host, use the `no snmp-server host ip-address [traps | informs] [version 1 | 2c | 3] [auth | noauth | priv] [community-string] [udp-port number] [notification-type]` command.

Parameters

<i>ip-address</i>	Enter the keyword <code>host</code> followed by the IP address of the host (configurable hosts is limited to 16).
<i>ipv6-address</i>	Enter the keyword <code>host</code> followed by the IPv6 address of the host in the <code>x:x:x::x</code> format. The <code>::</code> notation specifies successive hexadecimal fields of zero
traps	(OPTIONAL) Enter the keyword <code>traps</code> to send trap notifications to the specified host. Default: traps
informs	(OPTIONAL) Enter the keyword <code>informs</code> to send inform notifications to the specified host. Default: traps

<code>version 1 2c 3</code>	(OPTIONAL) Enter the keyword <code>version</code> to specify the security model followed by the security model version number 1, 2c, or 3. <ul style="list-style-type: none"> • Version 1 is the least secure version • version 3 is the most secure of the security modes. • Version 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed. Default: Version 1
<code>auth</code>	(OPTIONAL) Enter the keyword <code>auth</code> to specify authentication of a packet without encryption.
<code>noauth</code>	(OPTIONAL) Enter the keyword <code>noauth</code> to specify no authentication of a packet.
<code>priv</code>	(OPTIONAL) Enter the keyword <code>priv</code> to specify both authentication and then scrambling of the packet.
<code>community-string</code>	Enter a text string (up to 20 characters long) as the name of the SNMP community. Note: For version 1 and version 2c security models, this string represents the name of the SNMP community. The string can be set using this command, however it is recommended that you set the community string using the <code>snmp-server community</code> command before executing this command. For version 3 security model, this string is the USM user security name.
<code>udp-port port-number</code>	(OPTIONAL) Enter the keywords <code>udp-port</code> followed by the port number of the remote host to use. Range: 0 to 65535. Default: 162
<code>notification-type</code>	(OPTIONAL) Enter one of the following keywords for the type of trap to be sent to the host: <ul style="list-style-type: none"> • <code>bgp</code> - BGP state change • <code>envmon</code> - Environment monitor trap • <code>snmp</code> - SNMP notification (RFC 1157) • <code>stp</code> - Spanning Tree protocol notification (RFC 1493) • <code>vrrp</code> - State change in a VRRP group • <code>xstp</code> - State change in MSTP (802.1s), RSTP (802.1w), and PVST+ Default: All trap types are sent to host.

Defaults As shown

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 8.4.1.0	Support was added for VRRP traps.
Version 7.6.1.0	Support added for S-Series; Added support for STP and xSTP notification types.
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

In order to configure the router to send SNMP notifications, you must enter at least one `snmp-server host` command. If you enter the command with no keywords, all trap types are enabled for the host. If you do not enter an `snmp-server host` command, no notifications are sent.

In order to enable multiple hosts, you must issue a separate `snmp-server host` command for each host. You can specify multiple notification types in the command for each host.

Several host commands for the same ip can coexist. For the same host ip, community-name, and udp-port commands, the trap over-writes informs and vice-versa.

The **snmp-server host** command is used in conjunction with the `snmp-server enable` command. Use the `snmp-server enable` command to specify which SNMP notifications are sent globally. For a host to receive most notifications, at least one **snmp-server enable** command and the **snmp-server host** command for that host must be enabled.



Note: For v1 / v2c trap configuration, if the community-string is not defined using the **snmp-server community** command prior to using this command, the default form of the **snmp-server community** command will automatically be configured, with the community-name the same as specified in the **snmp-server host** command.

Configuring Informs

To send an inform, follow the step below.

1. Configure a remote engine ID.
2. Configure a remote user.
3. Configure a group for this user with access rights.
4. Enable traps.
5. Configure a host to receive informs.

Related Commands

snmp-server enable traps	Enable SNMP traps.
snmp-server community	Configure a new community SNMPv1 or SNMPv2c

snmp-server location



Configure the location of the SNMP server.

Syntax

snmp-server location *text*

To delete the SNMP location, enter **no snmp-server location**.

Parameters

<i>text</i>	Enter an alpha-numeric text string, up to 55 characters long.
-------------	---

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

snmp-server packetsize

C E S Z

Set the largest SNMP packet size permitted when the SNMP server is receiving a request or generating a reply, use the **snmp-server packetsize** global configuration command.

Syntax **snmp-server packetsize** *byte-count*

Parameters

<i>byte-count</i>	Enter one of the following values 8, 16, 24 or 32. Packet sizes are 8000 bytes, 16000 bytes, 32000 bytes, and 64000 bytes.
-------------------	--

Defaults 8

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

snmp-server trap-source

C E S Z

Configure a specific interface as the source for SNMP traffic.

Syntax **snmp-server trap-source** *interface*

To disable sending traps out a specific interface, enter **no snmp trap-source**.

Parameter	<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
Defaults		The IP address assigned to the management interface is the default.
Command Modes		CONFIGURATION
Command History		<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.11.1 Introduced on Z9000 <hr/> Version 8.3.12.0 Added description of keyword vlan <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 8.5.1.0 Added support for 4-port 40G line cards on ExaScale. <hr/> Version 7.6.1.0 Support added for S-Series <hr/> Version 7.5.1.0 Support added for C-Series <hr/> E-Series legacy command
Usage Information		For this snmp-server trap-source command to be enabled, you must configure an IP address on the interface and enable the interface configured as an SNMP trap source.
Related Commands	snmp-server community	Set the community string.

snmp-server user



Configure a new user to an SNMP group.

Syntax

```
snmp-server user name {group_name remote ip-address udp-port port-number} [1 | 2c | 3]
[encrypted] [auth {md5 | sha} auth-password] [priv des56 priv password] [access
access-list-name | ipv6 access-list-name | access-list-name ipv6 access-list-name]
```

To remove a user from the SNMP group, use the **no snmp-server user** *name* {*group_name remote ip-address udp-port port-number*} [**1** | **2c** | **3**] [**encrypted**] [**auth** {**md5** | **sha**} *auth-password*] [**priv** **des56** *priv password*] [**access** *access-list-name* | **ipv6** *access-list-name* | *access-list-name* **ipv6** *access-list-name*] command.

Parameters

<i>name</i>	Enter the name of the user (not to exceed 20 characters), on the host, that connects to the agent.
<i>group_name</i>	Enter a text string (up to 20 characters long) as the name of the group. Defaults: The following groups are created for mapping to read/write community/security-names. <ul style="list-style-type: none"> • v1v2creadu — maps to a community with ro (read only) permissions • 1v2cwriteu — maps to a community rw (read/write) permissions
remote <i>ip-address</i>	Enter the keyword remote followed by the IP address that identifies the copy of the SNMP on the <i>remote</i> device.
udp-port <i>port-number</i>	Enter the keyword udp-port followed by the UDP (User Datagram Protocol) port number on the remote device. Range: 0 to 65535. Default: 162
1 2c 3	(OPTIONAL) Enter the security model version number (1 , 2c , or 3). <ul style="list-style-type: none"> • 1 is the least secure version • 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed. • 3 is the most secure of the security modes. Default: 1
encrypted	(OPTIONAL) Enter the keyword encrypted to specify the password appear in encrypted format (a series of digits, masking the true characters of the string).
auth	(OPTIONAL) Enter the keyword auth to specify authentication of a packet without encryption.
md5 sha	(OPTIONAL) Enter the keyword md5 or sha to designate the authentication level. md5 — Message Digest Algorithm sha — Secure Hash Algorithm
<i>auth-password</i>	(OPTIONAL) Enter a text string (up to 20 characters long) password that will enable the agent to receive packets from the host. Minimum: 8 characters long
priv des56	(OPTIONAL) Enter the keyword priv des56 to initiate a privacy authentication level setting using the CBC-DES privacy authentication algorithm (des56).
<i>priv password</i>	(OPTIONAL) Enter a text string (up to 20 characters long) password that will enables the host to encrypt the contents of the message it sends to the agent. Minimum: 8 characters long
access <i>access-list-name</i>	(Optional) Enter the keyword access followed by the standard IPv4 access list name (a string up to 16 characters long).
ipv6 <i>access-list-name</i>	(Optional) Enter the keyword ipv6 followed by the IPv6 access list name (a string up to 16 characters long)
<i>access-list-name</i> ipv6 <i>access-list-name</i>	(Optional) Enter both an IPv4 and IPv6 access list name.

Defaults

As above

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.10.2	Added access parameter support
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

Note: For IPv6 ACLs, only IPv6 and UDP types are valid for SNMP; TCP, ICMP rules are not valid for SNMP. In IPv6 ACLs port rules are not valid for SNMP.

No default values exist for authentication or privacy algorithms and no default password exist. If you forget a password, you cannot recover it; the user must be reconfigured. You can specify either a plain-text password or an encrypted cypher-text password. In either case, the password will be stored in the configuration in an encrypted form and displayed as encrypted in the [show running-config](#) command.

If you have an encrypted password, you can specify the encrypted string instead of the plain-text password. The following command is an example of how to specify the command with an encrypted string:

Examples

```
FTOS# snmp-server user privuser v3group v3 encrypted auth md5
9fc53d9d908118b2804fe80e3ba8763d priv des56 d0452401a8c3ce42804fe80e3ba8763d
```

The following command is an example of how to enter a plain-text password as the string **authpasswd** for user **authuser** of group **v3group**.

```
FTOS#conf
FTOS(conf)# snmp-server user authuser v3group v3 auth md5 authpasswd
```

The following command configures a remote user named **n3user** with a **v3** security model and a security level of **authNOPriv**.

```
FTOS#conf
FTOS(conf)# snmp-server user n3user ngroup remote 172.31.1.3 udp-port 5009 3
auth md5 authpasswd
```



Note: The number of configurable users is limited to 16.

Related Commands

show snmp user	Display the information configured on each SNMP user name.
--------------------------------	--

snmp-server view

C E S Z

Configure an SNMPv3 view.

S4810

S4820T

Syntax

snmp-server view *view-name* *oid-tree* { **included** | **excluded** }

To remove an SNMPv3 view, use the **no snmp-server view** *view-name* *oid-tree* { **included** | **excluded** } command.

Parameters

<i>view-name</i>	Enter the name of the view (not to exceed 20 characters).
<i>oid-tree</i>	Enter the OID sub tree for the view (not to exceed 20 characters).
included	(OPTIONAL) Enter the keyword included to include the MIB family in the view.
excluded	(OPTIONAL) Enter the keyword excluded to exclude the MIB family in the view.

Defaults

No default behavior or values.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

The *oid-tree* variable is a full sub-tree starting from 1.3.6 and can not specify the name of a sub-tree or a MIB. The following example configures a view named **rview** that allows access to all objects under 1.3.6.1:

Example

```
FTOS# conf
FTOS#(conf) snmp-server view rview 1.3.6.1 included
```

Related Commands

[show running-config snmp](#) Display the SNMP running configuration

snmp trap link-status

C E S Z

Enable the interface to send SNMP link traps, which indicate whether the interface is up or down.

Syntax

snmp trap link-status

To disable sending link trap messages, enter **no snmp trap link-status**.

Defaults

Enabled.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

If the interface is expected to flap during normal usage, you could disable this command.

Syslog Commands

The following commands allow you to configure logging functions on all Dell Force10 switches:

- [clear logging](#)
- [default logging buffered](#)
- [default logging console](#)
- [default logging monitor](#)
- [default logging trap](#)
- [logging](#)
- [logging buffered](#)
- [logging console](#)
- [logging facility](#)
- [logging history](#)
- [logging history size](#)
- [logging monitor](#)
- [logging on](#)
- [logging source-interface](#)
- [logging synchronous](#)
- [logging trap](#)
- [show logging](#)
- [show logging driverlog stack-unit \(S-Series\)](#)
- [terminal monitor](#)

clear logging

C **E** **S** **Z**

Clear the messages in the logging buffer.

Syntax **clear logging**

Defaults None.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.11.1 Introduced on Z9000

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

Related Commands

[show logging](#) Display logging settings and system messages in the internal buffer.

default logging buffered

C **E** **S** **Z**

Return to the default setting for messages logged to the internal buffer.

Syntax **default logging buffered**

Defaults size = 40960; level = 7 or debugging

Command Modes CONFIGURATION

Command History

Version 8.3.11.1 Introduced on Z9000

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

Related Commands

[logging buffered](#) Set the logging buffered parameters.

default logging console

C **E** **S** **Z**

Return the default settings for messages logged to the console.

Syntax **default logging console**

Defaults level = 7 or debugging

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Related Commands

logging console	Set the logging console parameters.
---------------------------------	-------------------------------------

default logging monitor

C **E** **S** **Z**

Return to the default settings for messages logged to the terminal.

Syntax**default logging monitor****Defaults**

level = 7 or debugging

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Related Commands

logging monitor	Set the logging monitor parameters.
terminal monitor	Send system messages to the terminal/monitor.

default logging trap

C **E** **S** **Z**

Return to the default settings for logging messages to the Syslog servers.

Syntax**default logging trap****Defaults**

level = 6 or informational

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

**Related
Commands**

[logging trap](#) Limit messages logged to the Syslog servers based on severity.

logging

C E S Z

Configure an IP address or host name of a Syslog server where logging messages will be sent. Multiple logging servers of both IPv4 and/or IPv6 can be configured.

Syntax

logging { *ipv4-address* | *ipv6-address* | *hostname* }

To disable logging, enter **no logging**.

Parameters

ipv4-address / *ipv6-address* Enter an IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X) address.

hostname Enter the name of a host already configured and recognized by the switch.

Defaults

Disabled

Command Modes

CONFIGURATION

**Command
History**

Version 8.3.19.0 Introduced on S4820T

Version 8.3.11.1 Introduced on Z9000

Version 8.3.7.0 Introduced on S4810

Version 8.4.1.0 Added support for IPv6.

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

**Related
Commands**

[logging on](#) Enables the logging asynchronously to logging buffer, console, Syslog server, and terminal lines.

[logging trap](#) Enables logging to the Syslog server based on severity.

logging buffered

C E S Z

Enable logging and specify which messages are logged to an internal buffer. By default, all messages are logged to the internal buffer.

Syntax

logging buffered [*level*] [*size*]

To return to the default values, enter **default logging buffered**. To disable logging stored to an internal buffer, enter **no logging buffered**.

Parameters	<i>level</i>	(OPTIONAL) Indicate a value from 0 to 7 or enter one of the following equivalent words: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. Default: 7 or debugging.
	<i>size</i>	(OPTIONAL) Indicate the size, in bytes, of the logging buffer. The number of messages buffered depends on the size of each message. Range: 40960 to 524288. Default: 40960 bytes.
Defaults	<i>level = 7; size = 40960 bytes</i>	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.11.1	Introduced on Z9000
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	E-Series legacy command	
Usage Information	When you decrease the buffer size, all messages stored in the buffer are lost. Increasing the buffer size does not affect messages stored in the buffer.	
Related Commands	clear logging	Clear the logging buffer.
	default logging buffered	Returns the logging buffered parameters to the default setting.
	show logging	Display the logging setting and system messages in the internal buffer.

logging console



Specify which messages are logged to the console.

Syntax

logging console [*level*]

To return to the default values, enter [default logging console](#). To disable logging to the console, enter **no logging console**.

Parameters

<i>level</i>	(OPTIONAL) Indicate a value from 0 to 7 or enter one of the following parameters: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. Default: 7 or debugging.
--------------	--

Defaults

7 or debugging

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Related Commands

clear logging	Clear logging buffer.
default logging console	Returns the logging console parameters to the default setting.
show logging	Display logging settings and system messages in the internal buffer.

logging facility

C E S Z

Configure the Syslog facility, used for error messages sent to Syslog servers.

Syntax

logging facility [*facility-type*]

To return to the default values, enter **no logging facility**.

Parameters

<i>facility-type</i>	(OPTIONAL) Enter one of the following parameters. <ul style="list-style-type: none">• auth (authorization system)• cron (Cron/at facility)• daemon (system daemons)• kern (kernel)• local0 (local use)• local1 (local use)• local2 (local use)• local3 (local use)• local4 (local use)• local5 (local use)• local6 (local use)• local7 (local use)• lpr (line printer system)• mail (mail system)• news (USENET news)• sys9 (system use)• sys10 (system use)• sys11 (system use)• sys12 (system use)• sys13 (system use)• sys14 (system use)• syslog (Syslog process)• user (user process)• uucp (Unix to Unix copy process) The default is local7.
----------------------	--

Defaults

local7

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.11.1 Introduced on Z9000

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

Related Commands[logging](#) Enable logging to a Syslog server.[logging on](#) Enables logging.

logging history

C E S Z

Specify which messages are logged to the history table of the switch and the SNMP network management station (if configured).

Syntax**logging history** *level*To return to the default values, enter **no logging history**.**Parameters**

<i>level</i>	Indicate a value from 0 to 7 or enter one of the following equivalent words: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. The default is 4.
--------------	--

Defaults

4 or warnings

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.11.1 Introduced on Z9000

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

E-Series legacy command

Usage InformationWhen you configure the [snmp-server trap-source](#) command, the system messages logged to the history table are also sent to the SNMP network management station.**Related Commands**[show logging history](#) Display information logged to the history buffer.

logging history size

C E S Z

Specify the number of messages stored in the FTOS logging history table.

Syntax `logging history size size`

To return to the default values, enter **no logging history size**.

Parameters	<i>size</i>	Indicate a value as the number of messages to be stored. Range: 0 to 500. Default: 1 message.
Defaults	1 message	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0 Introduced on S4820T	
	Version 8.3.11.1 Introduced on Z9000	
	Version 8.3.7.0 Introduced on S4810	
	Version 7.6.1.0 Support added for S-Series	
	Version 7.5.1.0 Support added for C-Series	
	E-Series legacy command	
Usage Information	When the number of messages reaches the limit you set with the logging history size command, older messages are deleted as newer ones are added to the table.	
Related Commands	show logging history	Display information logged to the history buffer.

logging monitor

C E S Z

Specify which messages are logged to Telnet applications.

Syntax `logging monitor [level]`

To disable logging to terminal connections, enter **no logging monitor**.

Parameters	<i>level</i>	Indicate a value from 0 to 7 or enter one of the following parameters: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. The default is 7 or debugging.
Defaults	7 or debugging	
Command Modes	CONFIGURATION	

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Related Commands

default logging monitor	Returns the logging monitor parameters to the default setting.
---	--

logging on

C **E** **S** **Z**

Specify that debug or error messages are asynchronously logged to multiple destinations, such as logging buffer, Syslog server, or terminal lines.

Syntax**logging on**

To disable logging to logging buffer, Syslog server and terminal lines, enter **no logging on**.

Defaults

Enabled

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Usage Information

When you enter **no logging on**, messages are logged only to the console.

Related Commands

logging	Enable logging to Syslog server.
logging buffered	Set the logging buffered parameters.
logging console	Set the logging console parameters.
logging monitor	Set the logging parameters for the terminal connections.

logging source-interface

C **E** **S** **Z**

Specify that the IP address of an interface is the source IP address of Syslog packets sent to the Syslog server.

Syntax**logging source-interface** *interface*

To disable this command and return to the default setting, enter **no logging source-interface**.

Parameters	<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Loopback interfaces, enter the keyword loopback followed by a number from zero (0) to 16383. For the management interface on the RPM, enter the keyword ManagementEthernet followed by the slot/port information. The slot range is 0-1 and the port range is 0. For a Port Channel interface, enter the keyword port-channel followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a SONET interface, enter the keyword sonet followed by the slot/port information. For a Ten Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For VLAN interface, enter the keyword vlan followed by a number from 1 to 4094. 														
Defaults		Not configured.														
Command Modes		CONFIGURATION														
Command History		<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.11.1</td> <td>Introduced on Z9000</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.5.1.0</td> <td>Added support for 4-port 40G line cards on ExaScale.</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Support added for S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Support added for C-Series</td> </tr> <tr> <td colspan="2">E-Series legacy command</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.11.1	Introduced on Z9000	Version 8.3.7.0	Introduced on S4810	Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.	Version 7.6.1.0	Support added for S-Series	Version 7.5.1.0	Support added for C-Series	E-Series legacy command	
Version 8.3.19.0	Introduced on S4820T															
Version 8.3.11.1	Introduced on Z9000															
Version 8.3.7.0	Introduced on S4810															
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.															
Version 7.6.1.0	Support added for S-Series															
Version 7.5.1.0	Support added for C-Series															
E-Series legacy command																
Usage Information		Syslog messages contain the IP address of the interface used to egress the router. By configuring the logging source-interface command, the Syslog packets contain the IP address of the interface configured.														
Related Commands	logging	Enable the logging to another device.														

logging synchronous



Synchronize unsolicited messages and FTOS output.

Syntax `logging synchronous [level level | all] [limit number-of-buffers]`

To disable message synchronization, use the **no logging synchronous [level *level* | all] [limit *number-of-buffers*]** command.

Parameters		
all		Enter the keyword all to ensure that all levels are printed asynchronously.
level <i>level</i>		Enter the keyword level followed by a number as the severity level. A high number indicates a low severity level and visa versa. Range: 0 to 7. Default: 2
all		Enter the keyword all to turn off all
limit <i>number-of-buffers</i>		Enter the keyword limit followed by the number of buffers to be queued for the terminal after which new messages are dropped Range: 20 to 300 Default: 20

Defaults Disabled. If enabled without *level* or *number-of-buffers* options specified, *level* = 2 and *number-of-buffers* = 20 are the defaults.

Command Modes LINE

Command History		
Version 8.3.19.0	Introduced on S4820T	
Version 8.3.11.1	Introduced on Z9000	
Version 8.3.7.0	Introduced on S4810	
Version 7.6.1.0	Support added for S-Series	
Version 7.5.1.0	Support added for C-Series	
E-Series legacy command		

Usage Information When [logging synchronous](#) is enabled, unsolicited messages appear between software prompts and outputs. Only the messages with a severity at or below the set level are sent to the console.

If the message queue limit is reached on a terminal line and messages are discarded, a system message appears on that terminal line. Messages may continue to appear on other terminal lines.

Related Commands		
logging on		Enables logging.

logging trap

C **E** **S** **Z**
S55

Specify which messages are logged to the Syslog server based on the message severity.

Syntax `logging trap [level]`

To return to the default values, enter **default logging trap**. To disable logging, enter **no logging trap**.

Parameters

<i>level</i>	Indicate a value from 0 to 7 or enter one of the following parameters: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. The default is 6.
--------------	--

Defaults

6 or informational

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Related Commands

logging	Enable the logging to another device.
logging on	Enables logging.

Usage Information

To block a type of message parameter, set the logging trap level to a lower number. For example, to block severity messages at level 6, set the level to 5.

show logging

C E S Z

Display the logging settings and system messages logged to the internal buffer of the switch.

Syntax

show logging [*number* | **history** [**reverse**] [*number*] | **reverse** [*number*] | **summary**]

Parameters

<i>number</i>	(OPTIONAL) Enter the number of message to be displayed on the output. Range: 1 to 65535
history	(OPTIONAL) Enter the keyword history to view only information in the Syslog history table.
reverse	(OPTIONAL) Enter the keyword reverse to view the Syslog messages in FIFO (first in, first out) order.
summary	(OPTIONAL) Enter the keyword summary to view a table showing the number of messages per type and per slot. Slots *7* and *8* represent RPMs.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.11.1	Introduced on Z9000
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
E-Series legacy command	

Example (partial)

```

FTOS#show logging
Syslog logging: enabled
  Console logging: level debugging
  Monitor logging: level debugging
  Buffer logging: level debugging, 5604 Messages Logged, Size (524288 bytes)
  Trap logging: level informational
Oct 8 09:25:37: %RPM1:RP1 %BGP-5-ADJCHANGE: Connection with neighbor
223.80.255.254 closed. Hold time expired
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.200.13.2 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.13 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 1.1.14.2 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.14 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 1.1.11.2 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.5 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.4.1.3 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.4 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.6 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.12 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.15 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.1.1.3 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.200.12.2 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 1.1.10.2 Up
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Session closed by neighbor
1.1.10.2 (Hold time expired)
Oct 8 09:25:38: %RPM1:RP1 %BGP-5-ADJCHANGE: Neighbor 192.200.14.7 Up
Oct 8 09:26:25: %RPM1:RP1 %BGP-5-ADJCHANGE: Connection with neighbor 1.1.11.2
closed. Neighbor recycled
Oct 8 09:26:25: %RPM1:RP1 %BGP-5-ADJCHANGE: Connection with neighbor 1.1.14.2
closed. Neighbor recycled
--More--

```

Example (show logging history)

```

FTOS#show logging history
Syslog History Table: 1 maximum table entries,
saving level Warnings or higher
  SNMP notifications not Enabled
%RPM:0:0 %CHMGR-2-LINECARDDOWN - Line card 3 down - IPC timeout
FTOS#

```

show logging driverlog stack-unit (S-Series)



Display the driver log for the specified stack member.

Syntax

show logging driverlog stack-unit *unit#*

Parameters

stack-unit <i>unit#</i>	Enter the keyword stack-unit followed by the stack member ID of the switch for which you want to display the driver log. Range: 0 to 1
--------------------------------	--

Defaults

No default values or behavior

Command Modes	EXEC
	EXEC Privilege
Command History	<hr/> Version 8.3.11.1 Introduced on Z9000 <hr/> Version 7.6.1.0 Introduced for S-Series <hr/>
Usage Information	This command displays internal software driver information, which may be useful during troubleshooting switch initialization errors, such as a downed Port-Pipe.

terminal monitor

C E S Z

Configure the FTOS to display messages on the monitor/terminal.

Syntax **terminal monitor**

To return to default settings, enter **terminal no monitor**.

Defaults Disabled.

Command Modes EXEC

EXEC Privilege

Command History	<hr/> Version 8.3.19.0 Introduced on S4820T <hr/> Version 8.3.11.1 Introduced on Z9000 <hr/> Version 8.3.7.0 Introduced on S4810 <hr/> Version 7.6.1.0 Support added for S-Series <hr/> Version 7.5.1.0 Support added for C-Series <hr/> E-Series legacy command <hr/>
Related Commands	<hr/> logging monitor Set the logging parameters on the monitor/terminal. <hr/>

S-Series Stacking Commands

Overview

All commands in this chapter are specific to the S-Series **S**, **S4810**, and **S4820T** platforms as indicated by the characters that appear under each of the command headers.

The commands are always available and operational, whether or not the S-Series has a stacking module inserted. You can use the commands to pre-configure a switch, so that the configuration settings are invoked when the switch is attached to other S-Series units.

For details on using the S-Series stacking feature, the chapter “Stacking S-Series Switches” in the *FTOS Configuration Guide*.



Caution: S4810 and S4820T Stacking cannot be enabled simultaneously with VLT. If both are enabled at the same time, unexpected behavior will occur.

The Dell Force10 operating software (FTOS) commands for data center bridging features include 802.1Qbb priority-based flow control (PFC), 802.1Qaz enhanced transmission selection (ETS), and the Data Center Bridging Exchange (DCBX) protocol. CLI commands for individual DCB features are as follows:

Switch Stacking an DCB Caveats for the S4820T

The following is a list of behaviors and limitations regarding the use of DCB over S4820T ports involved in switch stacking:

- You can enable DCB only on 40 Gig (QSPF+) ports.
- DCB is not supported over any of the 48 RJ-45 10 Gig ports while they are configured in stacking mode.
- You cannot configure stacking on any of the 48 RJ-45 10 Gig ports, if DCB is enabled on any of the 40 Gig stacking ports.
- If DCB is enabled, it will disable the ability to use any of the 48 10 Gig ports for stacking.

Commands

The commands in this chapter are used for managing the stacking of S-Series systems:

- [redundancy disable-auto-reboot](#)
- [redundancy force-failover stack-unit](#)
- [reset stack-unit](#)
- [show redundancy](#)
- [show system stack-ports](#)
- [stack-unit priority](#)
- [stack-unit provision](#)
- [stack-unit renumber](#)
- [stack-unit stack-group](#)
- [upgrade system stack-unit \(S-Series stack member\)](#)

redundancy disable-auto-reboot



Prevent the S-Series stack management unit, stack member unit, and standby unit from rebooting if they fail.

Syntax

redundancy disable-auto-reboot [*members* | 0-11]

To return to the default, enter **no redundancy disable-auto-reboot stack-unit**.

The stack-unit range is 0-11.

Defaults

Disabled (the failed switch is automatically rebooted).

Command Modes

CONFIGURATION

Command History

Version 8.3.1.0	Added the members option
Version 7.7.1.0	Introduced on S-Series

Usage Information

Enabling this command keeps the failed switch in the failed state. It will not reboot until it is manually rebooted. When enabled, it is not displayed in the running-config. When disabled, it is displayed in the running-config.

Related Commands

show redundancy	Display the current redundancy status.
---------------------------------	--

redundancy force-failover stack-unit



Force the standby unit in the stack to become the management unit.

Syntax	redundancy force-failover stack-unit
Defaults	Not enabled
Command Modes	EXEC Privilege

reset stack-unit



Reset any designated stack member except the management unit (master unit).

Syntax **reset stack-unit** *0-11 hard*

Parameters	<i>0-11</i>	Enter the stack member unit identifier of the stack member to reset.
	<i>hard</i>	Reset the stack unit if the unit is in a problem state.

Default none

Command Modes EXEC

Command History	Version 8.3.1.0	Added hard reset option.
	Version 7.8.1.0	Augmented to run on the standby unit in order to reset the standby unit directly.
	Version 7.7.1.0	Introduced on S-Series

Usage Information Resetting the management unit is not allowed, and an error message will be displayed if you try to do so. Resetting is a soft reboot, including flushing the forwarding tables.

Starting with FTOS 7.8.1.0, you can run this command directly on the stack standby unit (standby master) to reset the standby. You cannot reset any other unit from the standby unit.

Example

```
Stack MAC : 00:01:e8:8b:1a:36
Reload-Type : normal-reload [Next boot : normal-reload]
```

```
-- Stack Info --
Unit  UnitType   Status      ReqTyp      CurTyp      Version     Ports
-----
  0   Management  online      S4810       S4810       8-3-12-1    64
  1   Standby     online      S4810       S4810       8-3-12-1    64
  2   Member      online      S4810       S4810       8-3-12-1    64
  3   Member      online      S4810       S4810       8-3-12-1    64
  4   Member      online      S4810       S4810       8-3-12-1    64
  5   Member      online      S4810       S4810       8-3-12-1    64
  6   Member      not present
  7   Member      not present
  8   Member      not present
  9   Member      not present
 10   Member      not present
 11   Member      not present
```

**Related
Commands**

reload	Reboot FTOS.
upgrade (S-Series management unit and Z9000)	Reset the designated S-Series stack member.

show redundancy

S

Display the current redundancy configuration (status of automatic reboot configuration on stack management unit).

Syntax**show redundancy****Command Modes**

EXEC

EXEC Privilege

**Command
History**

Version 7.7.1.0 Introduced on S-Series

Example

```

FTOS#show redundancy

FTOS#show redundancy

-- SSeries Redundancy Configuration --
-----
Auto reboot :                               Enabled

-- Stack-unit Status --
-----
Mgmt ID:                                     0
Stack-unit ID:                               0
Stack-unit Redundancy Role:                  Primary
Stack-unit State:                           Active
Stack-unit SW Version:                       7.7.1.0
Link to Peer:                               Up

-- PEER Stack-unit Status --
-----
Stack-unit State:                           Standby
Peer stack-unit ID:                         1
Stack-unit SW Version:                       7.7.1.0

-- Stack-unit Redundancy Configuration --
-----
Primary Stack-unit:                          mgmt-id  0
Auto Data Sync:                              Full
Failover Type:                               Hot Failover
Auto reboot Stack-unit:                      Enabled
Auto failover limit:                         3 times in 60 minutes

-- Stack-unit Failover Record --
-----
Failover Count:                              0
Last failover timestamp:                     None
Last failover Reason:                       None
Last failover type:                          None

-- Last Data Block Sync Record: --
-----

```

```

Stack Unit Config:      succeeded Jul 11 2012 09:42:35
Start-up Config:       succeeded Jul 11 2012 09:42:35
Runtime Event Log:     succeeded Jul 11 2012 09:42:35
Running Config:
  ACL Mgr:             succeeded Jul 11 2012 09:42:35
  LACP:                no block sync done
  STP:                 no block sync done
  SPAN:                no block sync done

```

**Related
Commands**

redundancy disable-auto-reboot	Prevent the system from auto-rebooting if it fails.
--	---

show system stack-ports



Display information about the stacking ports on all switches in the S-Series stack.

Syntax

show system stack-ports [**status** | **topology**]

Parameters

status	(OPTIONAL) Enter the keyword status to display the command output without the Connection field.
topology	(OPTIONAL) Enter the keyword topology to limit the table to just the Interface and Connection fields.

Defaults

No default behavior

Command Modes

EXEC

EXEC Privilege

**Command
History**

Version 7.7.1.0	Introduced on S-Series
-----------------	------------------------

Example

```

FTOS# show system stack-ports
Topology: Ring

```

Interface	Connection	Link Speed (Gb/s)	Admin Status	Link Status

0/49	1/49	12	up	up
0/50		12	up	down
0/51	2/49	24	up	up
1/49	0/49	12	up	up
1/50	2/51	12	up	up
2/49	0/51	24	up	up
2/51	1/50	12	up	up
2/52		12	up	down

```

FTOS#

```

**Example
(status)**

```

FTOS# show system stack-ports status
Topology: Ring

```

Interface	Link Speed (Gb/s)	Admin Status	Link Status

0/49	12	up	up
0/50	12	up	down
0/51	24	up	up

**Example
(topology)**

```

1/49          12          up          up
1/50          12          up          up
2/49          24          up          up
2/51          12          up          up
2/52          12          up          down
FTOS#
FTOS# show system stack-ports topology
Topology: Ring

Interface    Connection
-----
0/49         1/49
0/50
0/51         2/49
1/49         0/49
1/50         2/51
2/49         0/51
2/51         1/50
2/52
FTOS#

```

Table 50-1. show interfaces description Command Example Fields

Field	Description
Topology	Lists the topology of stack ports connected: Ring, Daisy chain, or Standalone
Interface	The unit/port ID of the connected stack port on this unit
Link Speed	Link Speed of the stack port (10 or 40) in Gb/s
Admin Status	The only currently listed status is Up.
Connection	The stack port ID to which this unit's stack port is connected

**Related
Commands**

reset stack-unit	Reset the designated S-Series stack member.
show hardware stack-unit	Display the data plane or management plane input and output statistics of the designated component of the designated stack member.
show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.
upgrade (S-Series management unit and Z9000)	Upgrade the boot flash image or system image of the S-Series management unit.

stack-unit priority



Configure the ability of an S-Series switch to become the management unit of a stack.

Syntax**stack-unit 0-7 priority 1-14**

Parameters	0-7	Enter the stack member unit identifier, from 0 to 7, of the switch on which you want to set the management priority.
	1-14	This preference parameter allows you to specify the management priority of one backup switch over another, with 0 the lowest priority and 14 the highest. The switch with the highest priority value will be chosen to become the management unit if the active management unit fails or on the next reload.
Defaults	0	
Command Modes	CONFIGURATION	
Command History	Version 7.7.1.0	Introduced on S-Series
Related Commands	reload	Reboot FTOS.
	show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.

stack-unit provision




Pre-configure a logical stacking ID of a switch that will join the stack. This is an optional command that is executed on the management unit.

Syntax `stack-unit 0-11 provision { S25N|S25P|S25V|S50N|S50V|S4810|S4820T }`

Parameters	0-11	Enter a stack member identifier, from 0 to 11, of the switch that you want to add to the stack.
	S25N S25P S25V S50N S50V S4810 S4820T	Enter the S-Series model identifier of the switch to be added as a stack member. This identifier is also referred to as the <i>provision type</i> .
Defaults	When this value is not set, a switch joining the stack is given the next available sequential stack member identifier.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 7.7.1.0	Introduced on S-Series
Related Commands	reload	Reboot FTOS.
	show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.

stack-unit renumber

 S4810

 S4820T

Change the stack member ID of any stack member or a stand-alone S-Series.

Syntax

stack-unit *0-11* **renumber** *0-11*

Parameters

<i>0-11</i>	The first instance of this value is the stack member unit identifier of the switch that you want add to the stack. Range: 0-11. The second instance of this value is the desired new unit identifier number.
-------------	--

Defaults

none

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 7.7.1.0	Introduced on S-Series

Usage Information

You can renumber any switch, including the management unit or a stand-alone unit.

You cannot renumber a unit to a number of an active member in the stack.

When executing this command on the master, the stack reloads. When the members are renumbered, only that specific unit will reset and come up with the new unit number.

Example


```
FTOS#stack-unit 5 renumber 6
```

```
Renumbering will reset the unit.
Warning: Interface configuration for current unit will be lost!
Proceed to renumber [confirm yes/no]:
```

Related Commands

reload	Reboot FTOS.
reset stack-unit	Reset the designated S-Series stack member.
show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.

stack-unit stack-group

 S4810

 S4820T

Configure the stacking unit and stacking group by specifying an ID when adding units to a stack to ensure the unit is assigned to the correct group.

Syntax

stack-unit *unit-id* **stack-group** *stack-group-id*

Use **no stack-unit unit-id stack-group stack-id** to remove the current stack group configuration.


Parameters	<i>unit-id</i>	Enter the stack unit ID.
	<i>stack-group-id</i>	Enter the stack group ID. Range is 0 to 15.


Defaults None

Command Mode CONFIGURATION


Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Reset command mode from EXEC to CONFIGURATION.
	Version 8.3.10.2	Introduced on S4810

Usage Information The following message displays to confirm the command.

Warning: Setting ports **Fo 0/60** as stack group will make their interface configs obsolete after a reload. [confirm yes/no] :
 If “y” is entered, all non-default configurations on any member ports of the current stack group will be removed when the unit is rebooted.

 **Note:** Any scripts used to streamline the stacking configuration process must be updated to reflect the Command Mode change from EXEC Privilege to CONFIGURATION to allow the scripts to work correctly.

upgrade system stack-unit (S-Series stack member)





Copy the boot image or FTOS from the management unit to one or more stack members.

Syntax `upgrade {boot | system} stack-unit {all | 0-11 | A | B}`

Parameters	boot	Enter this keyword to copy the boot image from the management unit to the designated stack members.
	system	Enter this keyword to copy the FTOS image from the management unit to the designated stack members.
	all	Enter this keyword to copy the designated image to all stack members.
	<i>0-11</i>	Enter the unit ID of the stack member to which to copy the designated image.
	A	Enter this keyword to upgrade all stacked units in System A(S4810 and S4820T only)
	B	Enter this keyword to upgrade all stacked units in System B(S4810 and S4820T only)

Defaults No configuration or default values

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 7.7.1.0	Introduced on S-Series

Usage Information

To reboot using the new image, use the command **upgrade boot system stack-unit**.

Related Commands

reload	Reboot FTOS.
reset stack-unit	Reset the designated S-Series stack member.
show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.
show version	Display the current FTOS version information on the system.
upgrade (S-Series management unit and Z9000)	Upgrade the bootflash image or system image of the S-Series management unit.

Storm Control

Overview

The FTOS Storm Control feature allows users to limit or suppress traffic during a traffic storm (Broadcast/Unknown Unicast Rate Limiting, or Multicast on the C-Series and S-Series).

Support for particular Dell Force10 platforms (C-Series, E-Series, or S-Series) is indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

The Storm Control commands are:

- [show storm-control broadcast](#)
- [show storm-control multicast](#)
- [show storm-control unknown-unicast](#)
- [storm-control broadcast \(Configuration\)](#)
- [storm-control broadcast \(Interface\)](#)
- [storm-control multicast \(Configuration\)](#)
- [storm-control multicast \(Interface\)](#)
- [storm-control unknown-unicast \(Configuration\)](#)
- [storm-control unknown-unicast \(Interface\)](#)

Important Points to Remember

- Interface commands can only be applied on physical interfaces (VLANs and LAG interfaces are not supported).
- An INTERFACE-level command only support storm control configuration on ingress.
- An INTERFACE-level command overrides any CONFIGURATION-level ingress command for that physical interface, if both are configured.
- The CONFIGURATION-level storm control commands can be applied at ingress or egress and are supported on all physical interfaces.

- When storm control is applied on an interface, the percentage of storm control applied is calculated based on the advertised rate of the line card. It is not based on the speed setting for the line card.
- Do not apply per-VLAN QoS on an interface that has storm control enabled (either on an interface or globally).
- When broadcast storm control is enabled on an interface or globally on ingress, and DSCP marking for a DSCP value 1 is configured for the data traffic, the traffic will go to queue 1 instead of queue 0.
- Similarly, if unicast storm control is enabled on an interface or globally on ingress, and DSCP marking for a DSCP value 2 is configured for the data traffic, the traffic will go to queue 2 instead of queue 0.



Note: Bi-directional traffic (unknown unicast and broadcast), along with egress storm control, causes the configured traffic rates to be split between the involved ports. The percentage of traffic that each port receives after the split is not predictable. These ports can be in the same/different port pipes, or the same/different line cards.

show storm-control broadcast

C E S

Display the storm control broadcast configuration.

S4810

S4820T

Syntax

show storm-control broadcast [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Enter one of the following interfaces to display the interface specific storm control configuration. <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. • For a SONET interface, enter the keyword sonet followed by the slot/port information. • Fast Ethernet is not supported.
------------------	---

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series
Version 6.5.1.0	Introduced on E-Series

Example (E-Series)

```
FTOS#show storm-control broadcast gigabitethernet 11/11

Broadcast storm control configuration

Interface      Direction      Percentage      Wred Profile
-----
Gi 11/11       Ingress        5.6
Gi 11/11       Egress         5.6             -
FTOS#
```


Example (C-Series)

```
FTOS#show storm-control broadcast gigabitethernet 3/24

Broadcast storm control configuration

Interface      Direction      Packets/Second
-----
Gi 3/24        Ingress        1000
FTOS#
```

show storm-control multicast



Display the storm control multicast configuration.

Syntax

show storm-control multicast [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Enter one of the following interfaces to display the interface specific storm control configuration. <ul style="list-style-type: none"> For Fast Ethernet, enter the keyword Fastethernet followed by the slot/port information. For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
------------------	---

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series

Example

```

FTOS#show storm-control multicast gigabitethernet 1/0

Multicast storm control configuration

Interface          Direction          Packets/Second
-----
Gi 1/0             Ingress            5

FTOS#

```

show storm-control unknown-unicast

C **E** **S**

Display the storm control unknown-unicast configuration

S4810

S4820T

Syntax

show storm-control unknown-unicast [*interface*]

Parameters

<i>interface</i>	(OPTIONAL) Enter one of the following interfaces to display the interface specific storm control configuration. <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information. For a SONET interface, enter the keyword sonet followed by the slot/port information. Fast Ethernet is not supported.
------------------	---

Defaults

No default behavior or values

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.10	Introduced on C-Series
Version 6.5.1.0	Introduced on E-Series

**Example
(E-Series)**

```
FTOS#show storm-control unknown-unicast gigabitethernet 11/1
```

```
Unknown-unicast storm control configuration
```

Interface	Direction	Percentage	Wred Profile
Gi 11/1	Ingress	5.9	-
Gi 11/1	Egress	5.7	w8

```
FTOS#
```

**Example
(C-Series)**

```
FTOS#show storm-control unknown-unicast gigabitethernet 3/0
```

```
Unknown-unicast storm control configuration
```

Interface	Direction	Packets/Second
Gi 3/0	Ingress	1000

```
FTOS#
```

storm-control broadcast (Configuration)

C **E** **S**

Configure the percentage of broadcast traffic allowed in or out of the network.

S4810

S4820T

Syntax

```
storm-control broadcast [percentage decimal_value in | out] | [wred-profile name]  
[packets_per_second in]
```

To disable broadcast rate-limiting, use the storm-control broadcast [*percentage decimal_value* in | out] | [*wred-profile name*] [*packets_per_second* in] command.

Parameters

<i>percentage decimal_value</i> in out	E-Series Only: Enter the percentage of broadcast traffic allowed in or out of the network. Optionally, you can designate a decimal value percentage, for example, 55.5%. Percentage: 0 to 100 0 % blocks all related traffic 100% allows all traffic into the interface Decimal Range: .1 to .9
<i>wred-profile name</i>	E-Series Only: (Optionally) Enter the keyword <i>wred-profile</i> followed by the profile name to designate a wred-profile.
<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of broadcast traffic allowed into the network. Range: 0 to 33554431

Defaults

No default behavior or values

Command Modes

CONFIGURATION (conf)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Added percentage decimal value option
Version 6.5.1.0	Introduced on E-Series

Usage Information

Broadcast storm control is valid on Layer 2/Layer 3 interfaces only. Layer 2 broadcast traffic is treated as unknown-unicast traffic.

storm-control broadcast (Interface)

C E S

S4810

S4820T

Configure the percentage of broadcast traffic allowed on an interface (ingress only).

Syntax

```
storm-control broadcast [percentage decimal_value in] [[wred-profile name]]
[packets_per_second in]
```

To disable broadcast storm control on the interface, use the no storm-control broadcast [*percentage* { *decimal_value*} in] [[wred-profile name]] [*packets_per_second* in] command.

Parameters

<i>percentage decimal_value</i> in	E-Series Only: Enter the percentage of broadcast traffic allowed in to the network. Optionally, you can designate a decimal value percentage, for example, 55.5%. Percentage: 0 to 100 0 % blocks all related traffic 100% allows all traffic into the interface Decimal Range: .1 to .9
wred-profile name	E-Series Only: (Optionally) Enter the keyword wred-profile followed by the profile name to designate a wred-profile.
<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of broadcast traffic allowed into the network. Range: 0 to 33554431

Defaults

No default behavior or values


Command Modes

INTERFACE (conf-if-*interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Added percentage decimal value option
Version 6.5.1.0	Introduced on E-Series

storm-control multicast (Configuration)



Configure the packets per second (pps) of multicast traffic allowed in to the C-Series and S-Series networks only.

Syntax storm-control multicast *packets_per_second* in

To disable storm-control for multicast traffic into the network, use the no storm-control multicast *packets_per_second* in command.

Parameters	<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of multicast traffic allowed into the network followed by the keyword in. Range: 0 to 33554431
-------------------	------------------------------	---


Defaults No default behavior or values

Command Modes CONFIGURATION (conf)

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on C-Series and S-Series only

Usage Information Broadcast traffic (all 0xFs) should be counted against broadcast storm control meter, not against the multicast storm control meter. It is possible, however, that some multicast control traffic may get dropped when storm control thresholds are exceeded.

storm-control multicast (Interface)



Configure the percentage of multicast traffic allowed on an C-Series or S-Series interface (ingress only) network only.

Syntax storm-control multicast *packets_per_second* in

To disable multicast storm control on the interface, use the no storm-control multicast *packets_per_second* in command.

Parameters	<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of broadcast traffic allowed into the network. Range: 0 to 33554431
-------------------	------------------------------	--

Defaults No default behavior or values

Command Modes INTERFACE (conf-if-interface-slot/port)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on C-Series and S-Series

storm-control unknown-unicast (Configuration)

C E S

S4810

S4820T

Configure the percentage of unknown-unicast traffic allowed in or out of the network.

Syntax

storm-control unknown-unicast [*percentage decimal_value* [in | out]] | [wred-profile name] [*packets_per_second* in]

To disable storm control for unknown-unicast traffic, use the no storm-control unknown-unicast [*percentage decimal_value* [in | out] | [wred-profile name] [*packets_per_second* in] command.

Parameters

<i>percentage decimal_value</i> [in out]	E-Series Only: Enter the percentage of broadcast traffic allowed in or out of the network. Optionally, you can designate a decimal value percentage, for example, 55.5%. Percentage: 0 to 100 0 % blocks all related traffic 100% allows all traffic into the interface Decimal Range: .1 to .9
wred-profile name	E-Series Only: (Optionally) Enter the keyword wred-profile followed by the profile name to designate a wred-profile.
<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of broadcast traffic allowed into the network. Range: 0 to 33554431

Defaults

No default behavior or values

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Added percentage decimal value option
Version 6.5.1.0	Introduced on E-Series

Usage Information

Unknown Unicast Storm-Control is valid for Layer 2 and Layer 2/Layer 3 interfaces.

storm-control unknown-unicast (Interface)

C E S

S4810

S4820T

Configure percentage of unknown-unicast traffic allowed on an interface (ingress only).

Syntax

storm-control unknown-unicast [*percentage decimal_value* in] | [*wred-profile name*]
[*packets_per_second* in]

To disable unknown-unicast storm control on the interface, use the no storm-control unknown-unicast [*percentage decimal_value* in] | [*wred-profile name*]
[*packets_per_second* in] command.

Parameters

<i>percentage decimal_value</i> in	E-Series Only: Enter the percentage of broadcast traffic allowed in to the network. Optionally, you can designate a decimal value percentage, for example, 55.5%. Percentage: 0 to 100 0 % blocks all related traffic 100% allows all traffic into the interface Decimal Range: .1 to .9
<i>wred-profile name</i>	E-Series Only: (Optionally) Enter the keyword wred-profile followed by the profile name to designate a wred-profile.
<i>packets_per_second</i> in	C-Series and S-Series Only: Enter the packets per second of broadcast traffic allowed into the network. Range: 0 to 33554431

Defaults

No default behavior or values

Command Modes

INTERFACE (conf-if-*interface-slot/port*)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
Version 7.4.1.0	E-Series Only: Added percentage decimal value option
Version 6.5.1.0	Introduced on E-Series

Spanning Tree Protocol (STP)

Overview

The commands in this chapter configure and monitor the IEEE 802.1d Spanning Tree protocol (STP) and are supported on the Dell Force10 switch/routing platforms, as indicated by the characters under the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

- [bridge-priority](#)
- [debug spanning-tree](#)
- [description](#)
- [disable](#)
- [forward-delay](#)
- [hello-time](#)
- [max-age](#)
- [protocol spanning-tree](#)
- [show config](#)
- [show spanning-tree 0](#)
- [spanning-tree 0](#)

bridge-priority

C **E** **S**

S4810

S4820T

Syntax

Set the bridge priority of the switch in an IEEE 802.1D Spanning Tree.

```
bridge-priority {priority-value | primary | secondary}
```

To return to the default value, enter no bridge-priority.

Parameters	<i>priority-value</i>	Enter a number as the bridge priority value. Range: 0 to 65535. Default: 32768.
	primary	Enter the keyword primary to designate the bridge as the root bridge.
	secondary	Enter the keyword secondary to designate the bridge as a secondary root bridge.
Defaults	<i>priority-value</i> = 32768	
Command Modes	SPANNING TREE (The prompt is “config-stp”.)	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

debug spanning-tree

C E S

Enable debugging of Spanning Tree Protocol and view information on the protocol.

S4810

S4820T

Syntax

debug spanning-tree { *stp-id* [all | bpdu | config | events | exceptions | general | root] | *protocol* }

To disable debugging, enter no debug spanning-tree.

Parameters	<i>stp-id</i>	Enter zero (0). The switch supports one Spanning Tree group with a group ID of 0.
	<i>protocol</i>	Enter the keyword for the type of STP to debug, either mstp , pvst , or rstp .
	all	(OPTIONAL) Enter the keyword all to debug all spanning tree operations.
	bpdu	(OPTIONAL) Enter the keyword bpdu to debug Bridge Protocol Data Units.
	config	(OPTIONAL) Enter the keyword config to debug configuration information.
	events	(OPTIONAL) Enter the keyword events to debug STP events.
	general	(OPTIONAL) Enter the keyword general to debug general STP operations.
	root	(OPTIONAL) Enter the keyword root to debug STP root transactions.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

When you enable debug spanning-tree bpdudata for multiple interfaces, the software only sends information on BPDUs for the last interface specified.

Related Commands

[protocol spanning-tree](#) Enter SPANNING TREE mode on the switch.

description

C **E** **S**

Enter a description of the Spanning Tree

S4810

S4820T

Syntax

description { *description* }

To remove the description from the Spanning Tree, use the no description { *description* } command.

Parameters

description Enter a description to identify the Spanning Tree (80 characters maximum).

Defaults

No default behavior or values

Command Modes

SPANNING TREE (The prompt is “config-stp”.)

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
pre-7.7.1.0	Introduced

Related Commands

[protocol spanning-tree](#) Enter SPANNING TREE mode on the switch.

disable

C **E** **S**

Disable Spanning Tree Protocol globally on the switch.

S4810

S4820T

Syntax

disable

To enable Spanning Tree Protocol, enter no disable.

Defaults	Enabled (that is, Spanning Tree Protocol is disabled.)	
Command Modes	SPANNING TREE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	protocol spanning-tree	Enter SPANNING TREE mode.

forward-delay

C E S

S4810

S4820T

The amount of time the interface waits in the Listening State and the Learning State before transitioning to the Forwarding State.

Syntax

`forward-delay seconds`

To return to the default setting, enter no forward-delay.

Parameters	<i>seconds</i>	Enter the number of seconds the FTOS waits before transitioning STP to the forwarding state. Range: 4 to 30 Default: 15 seconds.
Defaults	15 seconds	
Command Modes	SPANNING TREE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	max-age	Change the wait time before STP refreshes protocol configuration information.
	hello-time	Change the time interval between BPDUs.

hello-time

C E S

S4810

S4820T

Set the time interval between generation of Spanning Tree Bridge Protocol Data Units (BPDUs).

Syntax hello-time *seconds*

To return to the default value, enter no hello-time.

Parameters	<i>seconds</i>	Enter a number as the time interval between transmission of BPDUs. Range: 1 to 10. Default: 2 seconds.
-------------------	----------------	--

Defaults 2 seconds

Command Modes SPANNING TREE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

Related Commands	forward-delay	Change the wait time before STP transitions to the Forwarding state.
	max-age	Change the wait time before STP refreshes protocol configuration information.

max-age

C E S

S4810

S4820T

Set the time interval for the Spanning Tree bridge to maintain configuration information before refreshing that information.

Syntax max-age *seconds*

To return to the default values, enter no max-age.

Parameters	<i>seconds</i>	Enter a number of seconds the FTOS waits before refreshing configuration information. Range: 6 to 40 Default: 20 seconds.
-------------------	----------------	---

Defaults 20 seconds

Command Modes SPANNING TREE

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.7.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Related Commands	forward-delay	Change the wait time before STP transitions to the Forwarding state.
	hello-time	Change the time interval between BPDUs.

protocol spanning-tree

C **E** **S**

S4810

S4820T

Enter the SPANNING TREE mode to enable and configure the Spanning Tree group.

Syntax

protocol spanning-tree *stp-id*

To disable the Spanning Tree group, enter no protocol spanning-tree *stp-id* command.

Parameters

<i>stp-id</i>	Enter zero (0). FTOS supports one Spanning Tree group, group 0.
---------------	---

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS(conf)#protocol spanning-tree 0
FTOS(config-stp)#
```

Usage Information

STP is not enabled when you enter the SPANNING TREE mode. To enable STP globally on the switch, enter [no disable](#) from the SPANNING TREE mode.

Related Commands

disable	Disable Spanning Tree group 0. To enable Spanning Tree group 0, enter no disable.
-------------------------	---

show config

C E S

S4810

S4820T

Display the current configuration for the mode. Only non-default values are displayed.

Syntax show config

Command Modes SPANNING TREE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS(config-stp)#show config
protocol spanning-tree 0
no disable
FTOS(config-stp)#
```

show spanning-tree 0

C E S

S4810

S4820T

Display the Spanning Tree group configuration and status of interfaces in the Spanning Tree group.

Syntax show spanning-tree 0 [active | brief | guard | interface *interface* | root | summary]

Parameters

0	Enter 0 (zero) to display information about that specific Spanning Tree group.
active	(OPTIONAL) Enter the keyword active to display only active interfaces in Spanning Tree group 0.
brief	(OPTIONAL) Enter the keyword brief to display a synopsis of the Spanning Tree group configuration information.
guard	(OPTIONAL) Enter the keyword guard to display the type of guard enabled on an STP interface and the current port state.

<code>interface</code> <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> and the type slot/port of the interface you want displayed. Type slot/port options are the following: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword <code>GigabitEthernet</code> followed by the slot/port information. For a SONET interface, enter the keyword <code>sonet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> followed by the slot/port information.
<code>root</code>	(OPTIONAL) Enter the keyword <code>root</code> to display configuration information on the Spanning Tree group root.
<code>summary</code>	(OPTIONAL) Enter the keyword <code>summary</code> to only the number of ports in the Spanning Tree group and their state.

Command Modes

EXEC Privilege

Usage Information

You must enable Spanning Tree group 0 prior to using this command.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.5.1.0	Added support for 4-port 40G line cards on the E-Series ExaScale.
Version 8.4.2.1	Support for the optional <code>guard</code> keyword was added on the C-Series, S-Series, and E-Series TeraScale.
Version 8.3.7.0	Introduced on S4810
Version 7.7.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```

FTOS#show spann 0
Executing IEEE compatible Spanning Tree Protocol
  Bridge Identifier has priority 32768, Address 0001.e800.0a56
  Configured hello time 2, max age 20, forward delay 15
  We are the root of the spanning tree
  Current root has priority 32768 address 0001.e800.0a56
  Topology change flag set, detected flag set
  Number of topology changes 1 last change occurred 0:00:05 ago
    from GigabitEthernet 1/3
  Timers: hold 1, topology change 35
    hello 2, max age 20, forward_delay 15
  Times: hello 1, topology change 1, notification 0, aging 2

Port 26 (GigabitEthernet 1/1) is Forwarding
  Port path cost 4, Port priority 8, Port Identifier 8.26
  Designated root has priority 32768, address 0001.e800.0a56
  Designated bridge has priority 32768, address 0001.e800.0a56
  Designated port id is 8.26, designated path cost 0
  Timers: message age 0, forward_delay 0, hold 0
  Number of transitions to forwarding state 1
  BPDU: sent:18, received 0
  The port is not in the portfast mode

Port 27 (GigabitEthernet 1/2) is Forwarding
  Port path cost 4, Port priority 8, Port Identifier 8.27
  Designated root has priority 32768, address 0001.e800.0a56
  Designated bridge has priority 32768, address 0001.e800.0a56
  Designated port id is 8.27, designated path cost 0
  Timers: message age 0, forward_delay 0, hold 0
  Number of transitions to forwarding state 1
  BPDU: sent:18, received 0
  The port is not in the portfast mode

Port 28 (GigabitEthernet 1/3) is Forwarding
  Port path cost 4, Port priority 8, Port Identifier 8.28
  Designated root has priority 32768, address 0001.e800.0a56
  Designated bridge has priority 32768, address 0001.e800.0a56
  Designated port id is 8.28, designated path cost 0
  Timers: message age 0, forward_delay 0, hold 0
  Number of transitions to forwarding state 1
  BPDU: sent:31, received 0
  The port is not in the portfast mode

FTOS#

```

Table 52-1. show spanning-tree 0 Command Information

Field	Description
“Bridge Identifier..”	Lists the bridge priority and the MAC address for this STP bridge.
“Configured hello...”	Displays the settings for hello time, max age, and forward delay.
“We are...”	States whether this bridge is the root bridge for the STG.
“Current root...”	Lists the bridge priority and MAC address for the root bridge.
“Topology flag...”	States whether the topology flag and the detected flag were set.

Table 52-1. show spanning-tree 0 Command Information

Field	Description
“Number of...”	Displays the number of topology changes, the time of the last topology change, and on what interface the topology change occurred.
“Timers”	Lists the values for the following bridge timers: hold time, topology change, hello time, max age, and forward delay.
“Times”	List the number of seconds since the last: <ul style="list-style-type: none"> • hello time • topology change • notification • aging
“Port 1...”	Displays the Interface type slot/port information and the status of the interface (Disabled or Enabled).
“Port path...”	Displays the path cost, priority, and identifier for the interface.
“Designated root...”	Displays the priority and MAC address of the root bridge of the STG that the interface belongs to.
“Designated port...”	Displays the designated port ID

Example (brief)

```

FTOS#show span 0 brief
      Executing IEEE compatible Spanning Tree Protocol
      Root ID      Priority 32768
      Address 0001.e800.0a56
      Root Bridge hello time 2, max age 20, forward delay 15
      Bridge ID    Priority 32768,
      Address 0001.e800.0a56
      Configured hello time 2, max age 20, forward delay 15

Interface
Name          PortID Prio Cost Sts Cost      Designated
-----
Gi 1/1        8.26   8    4 FWD   0    32768 0001.e800.0a56 8.26
Gi 1/2        8.27   8    4 FWD   0    32768 0001.e800.0a56 8.27
Gi 1/3        8.28   8    4 FWD   0    32768 0001.e800.0a56 8.28
FTOS#

```

Example (guard)

```

FTOS#show spanning-tree 0 guard
Interface
Name      Instance  Sts          Guard type
-----
Gi 0/1    0         INCON(Root)  Rootguard
Gi 0/2    0         LIS         Loopguard
Gi 0/3    0         EDS (Shut)  Bpduguard

```

Table 52-2. show spanning-tree 0 guard Command Example Information

Field	Description
Interface Name	STP interface
Instance	STP 0 instance

Table 52-2. show spanning-tree 0 guard Command Example Information

Field	Description
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut)
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard)

spanning-tree 0

C E S

S4810

S4820T

Assigns a Layer 2 interface to STP instance 0 and configures a port cost or port priority, or enables loop guard, root guard, or the Portfast feature on the interface.

Syntax

```
spanning-tree stp-id { cost cost | { loopguard | rootguard } |
portfast [bpduguard [shutdown-on-violation]] | priority priority}
```

To disable Spanning Tree group on an interface, use the **no spanning-tree *stp-id* { *cost cost* | { *loopguard* | *rootguard* } | *portfast* [*bpduguard* [*shutdown-on-violation*]] | *priority priority*}** command.

Parameters

<i>stp-id</i>	Enter the STP instance ID. Range: 0
<i>cost cost</i>	Enter the keyword <i>cost</i> followed by a number as the cost. Range: 1 to 65535 Defaults: <ul style="list-style-type: none"> • 100 Mb/s Ethernet interface = 19 • 1-Gigabit Ethernet interface = 4 • 10-Gigabit Ethernet interface = 2 • Port Channel interface with 100 Mb/s Ethernet = 18 • Port Channel interface with 1-Gigabit Ethernet = 3 • Port Channel interface with 10-Gigabit Ethernet = 1
<i>loopguard</i>	(C-, S-, and E-Series TeraScale S4810 and S4820T only) Enter the keyword <i>loopguard</i> to enable STP loop guard on a port or port-channel interface.
<i>rootguard</i>	(C-, S-, and E-Series TeraScale S4810 and S4820T only) Enter the keyword <i>rootguard</i> to enable STP root guard on a port or port-channel interface.
<i>portfast</i> [<i>bpduguard</i> [<i>shutdown-on-violation</i>]]	Enter the keyword <i>portfast</i> to enable Portfast to move the interface into forwarding mode immediately after the root fails. Enter the optional keyword <i>bpduguard</i> to disable the port when it receives a BPDU. Enter the optional keyword <i>shutdown-on-violation</i> to hardware disable an interface when a BPDU is received and the port is disabled.
<i>priority priority</i>	Enter keyword <i>priority</i> followed by a number as the priority. Range: zero (0) to 15 Default: 8

Defaults

cost = depends on the interface type; *priority* = 8

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.19.1	Introduced the loopguard and rootguard options on the S4820T.
Version 8.3.10.1	Introduced the loopguard and rootguard options on the S4810.
Version 8.4.2.1	Introduced the loopguard and rootguard options on the E-Series TeraScale, C-Series, and S-Series.
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced shutdown-on-violation option.
Version 7.7.1.0	Introduced on S-Series.
Version 7.5.1.0	Introduced on C-Series.
Version 6.2.1.1	Introduced.

Usage Information

If you enable **portfast bpduguard** on an interface and the interface receives a BPDU, the software disables the interface and sends a message stating that fact. The port is in ERR_DISABLE mode, yet appears in the **show interface** commands as enabled. If **shutdown-on-violation** is not enabled, BPDUs will still be sent to the RPM CPU.

STP loop guard and root guard are supported on a port or port-channel enabled in any Spanning Tree mode: Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), Multiple Spanning Tree Protocol (MSTP), and Per-VLAN Spanning Tree Plus (PVST+).

Root guard is supported on any STP-enabled port or port-channel except when used as a stacking port. When enabled on a port, root guard applies to all VLANs configured on the port.

STP root guard and loop guard cannot be enabled at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message is displayed:

```
% Error: RootGuard is configured. Cannot configure LoopGuard.
```

Do not enable Portfast BPDU guard and loop guard at the same time on a port. Enabling both features may result in a port that remains in a blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an err-disabled blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a loop-inconsistent blocking state and no traffic is forwarded on the port.

To display the type of STP guard (Portfast BPDU, root, or loop guard) enabled on a port, enter the **show spanning-tree 0** command.

System Time and Date

Overview

The commands in this chapter configure time values on the system, either using FTOS, or the hardware, or using the Network Time Protocol (NTP). With NTP, the switch can act only as a client to an NTP clock host. For details, the “Network Time Protocol” section of the Management chapter in the *FTOS Configuration Guide*.

The commands in this chapter are generally supported on the C-Series, E-Series, and S-Series, with some exceptions, as noted in the Command History fields and by these symbols under the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

- [calendar set](#)
- [clock read-calendar](#)
- [clock set](#)
- [clock summer-time date](#)
- [clock summer-time recurring](#)
- [clock timezone](#)
- [clock update-calendar](#)
- [debug ntp](#)
- [ntp authenticate](#)
- [ntp authentication-key](#)
- [ntp broadcast client](#)
- [ntp disable](#)
- [ntp multicast client](#)
- [ntp server](#)
- [ntp source](#)
- [ntp trusted-key](#)
- [ntp update-calendar](#)
- [show calendar](#)
- [show clock](#)

- [show ntp associations](#)
- [show ntp status](#)

calendar set

C E S

S4810

S4820T

Set the time and date for the switch hardware clock.

Syntax

calendar set *time month day year*

Parameters

<i>time</i>	Enter the time in hours:minutes:seconds. For the hour variable, use the 24-hour format, for example, 17:15:00 is 5:15 pm.
<i>month</i>	Enter the name of one of the 12 months in English. You can enter the name of a day to change the order of the display to <i>time day month year</i> .
<i>day</i>	Enter the number of the day. Range: 1 to 31. You can enter the name of a month to change the order of the display to <i>time day month year</i> .
<i>year</i>	Enter a four-digit number as the year. Range: 1993 to 2035.

Command Modes

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#calendar set 08:55:00 june 18 2006
FTOS#
```

Usage Information

You can change the order of the *month* and *day* parameters to enter the time and date as *time day month year*.

In the switch, the hardware clock is separate from the software and is called the calendar. This hardware clock runs continuously. After the hardware clock (the calendar) is set, the FTOS automatically updates the software clock after system bootup. You cannot delete the hardware clock (calendar).

To manually update the software with the hardware clock, use the command [clock read-calendar](#).

**Related
Commands**

clock read-calendar	Set the software clock based on the hardware clock.
clock set	Set the software clock.
clock update-calendar	Set the hardware clock based on the software clock.
show clock	Display clock settings.

clock read-calendar

C **E** **S****S4810****S4820T**

Set the software clock on the switch from the information set in hardware clock (calendar).

Syntax `clock read-calendar`**Defaults** Not configured.**Command Modes** EXEC Privilege**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

**Usage
Information**

In the switch, the hardware clock is separate from the software and is called the calendar. This hardware clock runs continuously. After the hardware clock (the calendar) is set, the FTOS automatically updates the software clock after system bootup.

You cannot delete this command (that is, there is not a “no” version of this command).

clock set

C **E** **S**

Set the software clock in the switch.

Syntax `clock set time month day year`**Parameters**

<i>time</i>	Enter the time in hours:minutes:seconds. For the hour variable, use the 24-hour format, example, 17:15:00 is 5:15 pm.
<i>month</i>	Enter the name of one of the 12 months, in English. You can enter the number of a day and change the order of the display to <i>time day month year</i> .

	<i>day</i>	Enter the number of the day. Range: 1 to 31. You can enter the name of a month to change the order of the display to <i>time month day year</i> .
	<i>year</i>	Enter a four-digit number as the year. Range: 1993 to 2035.
Defaults		Not configured
Command Modes		EXEC Privilege
Command History	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series
Example	<pre>FTOS#clock set 16:20:00 19 may 2001 FTOS#</pre>	
Usage Information	You can change the order of the <i>month</i> and <i>day</i> parameters to enter the time and date as <i>time day month year</i> . You cannot delete the software clock.	
	The software clock runs only when the software is up. The clock restarts, based on the hardware clock, when the switch reboots.	
	Dell Force10 recommends that you use an outside time source, such as NTP, to ensure accurate time on the switch.	
Related Commands	ntp update-calendar	Set the switch using the NTP settings.

clock summer-time date

C **E** **S**

54810

54820T

Set a date (and time zone) on which to convert the switch to daylight saving time on a one-time basis.

Syntax

clock summer-time *time-zone date start-month start-day start-year start-time end-month end-day end-year end-time [offset]*

To delete a daylight saving time zone configuration, enter **no clock summer-time**.

Parameters

<i>time-zone</i>	Enter the three-letter name for the time zone. This name is displayed in the show clock output.
<i>start-month</i>	Enter the name of one of the 12 months in English. You can enter the name of a day to change the order of the display to <i>time day month year</i> .

<i>start-day</i>	Enter the number of the day. Range: 1 to 31. You can enter the name of a month to change the order of the display to <i>time day month year</i> .
<i>start-year</i>	Enter a four-digit number as the year. Range: 1993 to 2035.
<i>start-time</i>	Enter the time in hours:minutes. For the hour variable, use the 24-hour format, example, 17:15 is 5:15 pm.
<i>end-day</i>	Enter the number of the day. Range: 1 to 31. You can enter the name of a month to change the order of the display to <i>time day month year</i> .
<i>end-month</i>	Enter the name of one of the 12 months in English. You can enter the name of a day to change the order of the display to <i>time day month year</i> .
<i>end-time</i>	Enter the time in hours:minutes. For the hour variable, use the 24-hour format, example, 17:15 is 5:15 pm.
<i>end-year</i>	Enter a four-digit number as the year. Range: 1993 to 2035.
<i>offset</i>	(OPTIONAL) Enter the number of minutes to add during the summer-time period. Range: 1 to 1440. Default: 60 minutes

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

calendar set	Set the hardware clock.
clock summer-time recurring	Set a date (and time zone) on which to convert the switch to daylight saving time each year.
show clock	Display the current clock settings.

clock summer-time recurring

C E S

S4810

S4820T

Set the software clock to convert to daylight saving time on a specific day each year.

Syntax

clock summer-time *time-zone recurring* [*start-week start-day start-month start-time end-week end-day end-month end-time* [*offset*]]

To delete a daylight saving time zone configuration, enter **no clock summer-time**.

Parameters

<i>time-zone</i>	Enter the three-letter name for the time zone. This name is displayed in the show clock output. You can enter up to eight characters.
<i>start-week</i>	(OPTIONAL) Enter one of the following as the week that daylight saving begins and then enter values for <i>start-day</i> through <i>end-time</i> : <ul style="list-style-type: none"> week-number: Enter a number from 1-4 as the number of the week in the month to start daylight saving time. first: Enter this keyword to start daylight saving time in the first week of the month. last: Enter this keyword to start daylight saving time in the last week of the month.
<i>start-day</i>	Enter the name of the day that you want daylight saving time to begin. Use English three letter abbreviations, for example, Sun, Sat, Mon, etc. Range: Sun – Sat
<i>start-month</i>	Enter the name of one of the 12 months in English.
<i>start-time</i>	Enter the time in hours:minutes. For the hour variable, use the 24-hour format, example, 17:15 is 5:15 pm.
<i>end-week</i>	Enter the one of the following as the week that daylight saving ends: <ul style="list-style-type: none"> week-number: enter a number from 1-4 as the number of the week to end daylight saving time. first: enter the keyword first to end daylight saving time in the first week of the month. last: enter the keyword last to end daylight saving time in the last week of the month.
<i>end-day</i>	Enter the weekday name that you want daylight saving time to end. Enter the weekdays using the three letter abbreviations, for example Sun, Sat, Mon etc. Range: Sun to Sat
<i>end-month</i>	Enter the name of one of the 12 months in English.
<i>end-time</i>	Enter the time in hours:minutes:seconds. For the hour variable, use the 24-hour format, example, 17:15:00 is 5:15 pm.
<i>offset</i>	(OPTIONAL) Enter the number of minutes to add during the summer-time period. Range: 1 to 1440. Default: 60 minutes.

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series

Version 7.4.1.0	Updated the <i>start-day</i> and <i>end-day</i> options to allow for using the three-letter abbreviation of the weekday name.
pre-Version 6.1.1.0	Introduced for E-Series

Related Commands

calendar set	Set the hardware clock.
clock summer-time date	Set a date (and time zone) on which to convert the switch to daylight saving time on a one-time basis.
show clock	Display the current clock settings.

clock timezone

C E S

S4810

S4820T

Configure a timezone for the switch.

Syntax

clock timezone *timezone-name* *offset*

To delete a timezone configuration, enter **no clock timezone**.

Parameters

<i>timezone-name</i>	Enter the name of the timezone. You cannot use spaces.
<i>offset</i>	Enter one of the following: <ul style="list-style-type: none"> a number from 1 to 23 as the number of hours in addition to UTC for the timezone. a minus sign (-) followed by a number from 1 to 23 as the number of hours

Default

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

Coordinated Universal Time (UTC) is the time standard based on the International Atomic Time standard, commonly known as Greenwich Mean time. When determining system time, you must include the differentiator between UTC and your local timezone. For example, San Jose, CA is the Pacific Timezone with a UTC offset of -8.

clock update-calendar

C **E** **S**

Set the switch hardware clock based on the software clock.

Syntax `clock update-calendar`

Defaults Not configured.

Command Modes EXEC Privilege

Command History

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

pre-Version 6.1.1.0 Introduced for E-Series

Usage Information

Use this command only if you are sure that the hardware clock is inaccurate and the software clock is correct. You cannot delete this command (that is, there is not a “no” form of this command).

Related Commands

[calendar set](#) Set the hardware clock.

debug ntp

C **E** **S**

S4810

S4820T

Display Network Time Protocol (NTP) transactions and protocol messages for troubleshooting.

Syntax `debug ntp { adjust | all | authentication | events | loopfilter | packets | select | sync }`

To disable debugging of NTP transactions, use the `no debug ntp { adjust | all | authentication | events | loopfilter | packets | select | sync }` command.

Parameters

adjust Enter the keyword **adjust** to display information on NTP clock adjustments.

all Enter the keyword **all** to display information on all NTP transactions.

authentication Enter the keyword **authentication** to display information on NTP authentication transactions.

events Enter the keyword **events** to display information on NTP events.

loopfilter Enter the keyword **loopfilter** to display information on NTP local clock frequency.

packets Enter the keyword **packets** to display information on NTP packets.

select Enter the keyword **select** to display information on the NTP clock selection.

sync Enter the keyword **sync** to display information on the NTP clock synchronization.

Command Modes EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ntp authenticate

C **E** **S**

S4810

S4820T

Enable authentication of NTP traffic between the switch and the NTP time serving hosts.

Syntax

ntp authenticate

To disable NTP authentication, enter **no ntp authentication**.

Defaults

Not enabled.

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

You also must configure an authentication key for NTP traffic using the [ntp authentication-key](#) command.

Related Commands

ntp authentication-key	Configure authentication key for NTP traffic.
ntp trusted-key	Configure a key to authenticate

ntp authentication-key

C **E** **S**

Specify a key for authenticating the NTP server.

Syntax

ntp authentication-key *number* **md5** [**0** | **7**] *key*

Parameters

<i>number</i>	Specify a number for the authentication key. Range: 1 to 4294967295. This number must be the same as the number parameter configured in the ntp trusted-key command.
md5	Specify that the authentication key will be encrypted using MD5 encryption algorithm.

0	Specify that authentication key will be entered in an unencrypted format (default).
7	Specify that the authentication key will be entered in DES encrypted format.
key	Enter the authentication key in the previously specified format.

Defaults NTP authentication is not configured by default. If you do not specify the option [0 | 7], 0 is selected by default.

Command Modes CONFIGURATION

Command History

Version 8.2.1.0	Added options [0 7] for entering authentication key.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

After configuring the [ntp authentication-key](#) command, configure the [ntp trusted-key](#) command to complete NTP authentication.

FTOS versions 8.2.1.0 and later use an encryption algorithm to store the authentication key that is different from previous FTOS versions; beginning in version 8.2.1.0, FTOS uses DES encryption to store the key in the startup-config when you enter the command **ntp authentication-key**. Therefore, if your system boots with a startup-configuration from an FTOS versions prior to 8.2.1.0 in which you have configured **ntp authentication-key**, the system cannot correctly decrypt the key, and cannot authenticate NTP packets. In this case you must re-enter this command and save the running-config to the startup-config.

Related Commands

ntp authenticate	Enables NTP authentication.
ntp trusted-key	Configure a trusted key.

ntp broadcast client

C **E** **S**

S4810

S4820T

Set up the interface to receive NTP broadcasts from an NTP server.

Syntax

ntp broadcast client

To disable broadcast, enter **no ntp broadcast client**.

Defaults

Disabled

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ntp disable

C E S

S4810

S4820T

Prevent an interface from receiving NTP packets.

Syntax

ntp disable

To re-enable NTP on an interface, enter **no ntp disable**.

Default

Disabled (that is, if an NTP host is configured, all interfaces receive NTP packets)

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ntp multicast client

E S4810

S4820T

Configure the switch to receive NTP information from the network via multicast.

Syntax

ntp multicast client [*multicast-address*]

To disable multicast reception, use the **no ntp multicast client** [*multicast-address*] command.

Parameters

<i>multicast-address</i>	(OPTIONAL) Enter a multicast address. Enter either an IPv4 address in dotted decimal format or an IPv6 address in X:X:X:X::X format. If you do not enter a multicast address, the address 224.0.1.1 is configured if the interface address is IPv4 or ff05::101 is configured if the interface address is IPv6.
--------------------------	---

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.1.0	Added support for IPv6 multicast addresses.
Version 8.3.7.0	Introduced on S4810
pre-Version 6.1.1.0	Introduced for E-Series

ntp server

C **E** **S**

Configure an NTP time-serving host.

Syntax

ntp server { *hostname* | *ipv4-address* | *ipv6-address* } [**key** *keyid*] [**prefer**] [**version** *number*]

Parameters

<i>ipv4-address</i> <i>ipv6-address</i>	Enter an IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X::X).
<i>hostname</i>	Enter the hostname of the server.
key <i>keyid</i>	(OPTIONAL) Enter the keyword key and a number as the NTP peer key. Range: 1 to 4294967295
prefer	(OPTIONAL) Enter the keyword prefer to indicate that this peer has priority over other servers.
version <i>number</i>	(OPTIONAL) Enter the keyword version and a number to correspond to the NTP version used on the server. Range: 1 to 3

Defaults

Not configured.

Command Modes

CONFIGURATION

Command History

Version 8.4.1.0	Added IPv6 support.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Usage Information

You can configure multiple time serving hosts (up to 250). From these time serving hosts, the FTOS will choose one NTP host with which to synchronize. Use the [show ntp associations](#) to determine which server was selected.

Since a large number of polls to NTP hosts can impact network performance, Dell Force10 recommends that you limit the number of hosts configured.

Related Commands

show ntp associations	Displays NTP servers configured and their status.
---------------------------------------	---

ntp source

C **E** **S**

Specify an interface's IP address to be included in the NTP packets.

Syntax `ntp source interface`

To delete the configuration, enter **no ntp source**.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For an 100/1000 Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.• For Loopback interfaces, enter the keyword loopback followed by a number from zero (0) to 16383.• For a Port Channel interface, enter the keyword lag followed by a number: C-Series and S-Series Range: 1-128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale• For SONET interface types, enter the keyword sonet followed by the slot/port information.• For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.• For VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
------------------	--

Defaults Not configured.

Command Modes CONFIGURATION

Command History

Version 8.5.1.0	Added support for 4-port 40G line cards on ExaScale.
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

ntp trusted-key

C **E** **S**

Set a key to authenticate the system to which NTP will synchronize.

Syntax `ntp trusted-key number`

To delete the key, use the **no ntp trusted-key number** command.

Parameters

<i>number</i>	Enter a number as the trusted key ID. Range: 1 to 4294967295.
---------------	--

Defaults Not configured.

Command Modes CONFIGURATION

Command History	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series
Usage Information	The <i>number</i> parameter in the ntp trusted-key command must be the same number as the <i>number</i> parameter in the ntp authentication-key command. If you change the ntp authentication-key command, you must also change the ntp trusted-key command.	
Related Commands	ntp authentication-key	Set an authentication key for NTP.
	ntp authenticate	Enable the NTP authentication parameters you set.

ntp update-calendar

C **E** **S**

Configure the FTOS to update the calendar (the hardware clock) with the NTP-derived time.

Syntax

ntp update-calendar [*minutes*]

To return to default setting, enter **no ntp update-calendar**.

Parameters

<i>minutes</i>	(OPTIONAL) Enter the number of minutes between updates from NTP to the hardware clock. Range: 1 to 1440. Default: 60 minutes.
----------------	---

Defaults

Not enabled.

Command Modes

CONFIGURATION

Command History

Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

show calendar

C **E** **S**

Display the current date and time based on the switch hardware clock.

54810

54820T

Syntax

show calendar

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show calendar
16:33:30 UTC Tue Jun 26 2001
FTOS#
```

Related Commands	show clock	Display the time and date from the switch software clock.
-------------------------	----------------------------	---

show clock

C E S

S4810

S4820T

Display the current clock settings.

Syntax `show clock [detail]`

Parameters	detail	(OPTIONAL) Enter the keyword detail to view the source information of the clock.
-------------------	---------------	---

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Support added for S-Series
	Version 7.5.1.0	Support added for C-Series
	pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#show clock
11:05:56.949 UTC Thu Oct 25 2001
FTOS#
```

Example (detail)

```
FTOS#show clock detail
12:18:10.691 UTC Wed Jan 7 2009
Time source is RTC hardware
Summer time starts 02:00:00 UTC Sun Mar 8 2009
Summer time ends 02:00:00 ABC Sun Nov 1 2009
FTOS#
```

Related Commands	clock summer-time recurring	Display the time and date from the switch hardware clock.
	show calendar	Display the time and date from the switch hardware clock.

show ntp associations

C E S

Display the NTP master and peers.

S4810

S4820T

Syntax

show ntp associations

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 7.6.1.0 Support added for S-Series

Version 7.5.1.0 Support added for C-Series

pre-Version 6.1.1.0 Introduced for E-Series

Example

```
FTOS#show ntp associations
remote      ref clock      st when poll reach  delay  offset  disp
=====
 10.10.120.5  0.0.0.0        16  - 256  0    0.00  0.000 16000.0
*172.16.1.33 127.127.1.0    11  6  16 377  -0.08 -1499.9 104.16
 172.31.1.33  0.0.0.0        16  - 256  0    0.00  0.000 16000.0
 192.200.0.2  0.0.0.0        16  - 256  0    0.00  0.000 16000.0
* master (synced), # master (unsynced), + selected, - candidate
FTOS#
```

Table 53-1. show ntp associations Command Fields

Field	Description
(none)	One or more of the following symbols could be displayed: <ul style="list-style-type: none"> * means synchronized to this peer # means almost synchronized to this peer + means the peer was selected for possible synchronization - means the peer is a candidate for selection ~ means the peer is statically configured
remote	Displays the remote IP address of the NTP peer.
ref clock	Displays the IP address of the remote peer's reference clock.
st	Displays the peer's stratum, that is, the number of hops away from the external time source. A 16 in this column means the NTP peer cannot reach the time source.
when	Displays the last time the switch received an NTP packet.
poll	Displays the polling interval (in seconds).
reach	Displays the reachability to the peer (in octal bitstream).
delay	Displays the time interval or delay for a packet to complete a round-trip to the NTP time source (in milliseconds).

Table 53-1. show ntp associations Command Fields

Field	Description
offset	Displays the relative time of the NTP peer's clock to the switch clock (in milliseconds).
disp	Displays the dispersion.

Related Commands

show ntp status	Display current NTP status.
---------------------------------	-----------------------------

show ntp status

C E S

S4810

S4820T

Display the current NTP status.

Syntax

show ntp status

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Support added for S-Series
Version 7.5.1.0	Support added for C-Series
pre-Version 6.1.1.0	Introduced for E-Series

Example

```
FTOS#sh ntp status
Clock is synchronized, stratum 2, reference is 100.10.10.10
frequency is -32.000 ppm, stability is 15.156 ppm, precision is 4294967290
reference time is BC242FD5.C7C5C000 (10:15:49.780 UTC Mon Jan 10 2000)
clock offset is clock offset msec, root delay is 0.01656 sec
root dispersion is 0.39694 sec, peer dispersion is peer dispersion msec
peer mode is client
FTOS#
```

Table 53-2. show ntp status Command Example Information

Field	Description
“Clock is...”	States whether or not the switch clock is synchronized, which NTP stratum the system is assigned and the IP address of the NTP peer.
“frequency is...”	Displays the frequency (in ppm), stability (in ppm) and precision (in Hertz) of the clock in this system.
“reference time is...”	Displays the reference time stamp.

Table 53-2. show ntp status Command Example Information

Field	Description
“clock offset is...”	Displays the system offset to the synchronized peer and the time delay on the path to the NTP root clock.
“root dispersion is...”	Displays the root and path dispersion.
“peer mode is...”	State what NTP mode the switch is. This should be client mode.

**Related
Commands**

[show ntp associations](#)Display information on NTP master and peer configurations.

S4810 and S4820T u-Boot

Overview

All commands in this chapter are in u-Boot. These commands are supported on the Dell Force10 **S4810** and **S4820T** platforms only.

To access this mode, hit any key when the following line appears on the console during a system boot:

Hit any key to stop autoboot:

You enter u-Boot immediately, as indicated by the => prompt.



Note: This chapter discusses only a few commands available in uBoot. The commands included here are those that are comparable to those found in the Boot User mode on other S-Series systems.

Commands

- [printenv](#)
- [reset](#)
- [save](#)
- [setenv](#)



Note: You cannot use the Tab key to complete commands in this mode.

printenv

S4810

S4820T

Syntax

Display the current system boot variable and other system settings.

`printenv`

Command Modes

uBoot

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.

Example

```
=> printenv
baudrate=9600
uboot_filesize=0x80000
bootfile=FTOS-SC-1.2.0.0E3.bin
bootcmd=echo Booting primary bootline...;$primary_boot;boot;echo
Failed;echo Booting secondary bootline...;$secondary_boot;boot;echo
Failed;echo Booting default bootline...;$default_boot;boot;echo
Failed;echo Rebooting...;reset
bootdelay=5
loads_echo=1
rootpath=/opt/nfsroot
hostname=unknown
loadaddr=640000
ftpuser=force10
ftppasswd=force10
uboot=u-boot.bin
tftpflash=tftpboot $loadaddr $uboot; protect off 0xffff80000 +$filesize; erase 0x
fff80000 +$filesize; cp.b $loadaddr 0xffff80000 $filesize; protect on 0xffff80000
+$filesize; cmp.b $loadaddr 0xffff80000 $filesize
ethact=eTSEC1
ethaddr=00:01:E8:82:09:B2
serverip=10.11.9.4

primary_boot=f10boot tftp://10.11.9.2/si-S4810-40g
secondary_boot=f10boot flash0
default_boot=f10boot tftp://192.168.128.1/FTOS-SC-1.2.0.0E3.bin

gatewayip=10.11.192.254
ipaddr=10.11.198.114
netmask=255.255.0.0
mgmtautoneg=true
mgmtspeed100=true
mgmtfullduplex=true
stdin=serial
stdout=serial
stderr=serial
Environment size: 1002/8188 bytes
=>
```

← MAC Address

┌ Boot
└ Variables

← Default Gateway Address

← Management IP Address

reset

S4810

Reload the S4810 or S4820T system.

S4820T

Syntax

reset

Command Modes

uBoot

Command History

Version 8.3.19.0	Introduced on the S4820T.
------------------	---------------------------

Version 8.3.7.0	Introduced on the S4810.
-----------------	--------------------------

Usage Information

You must save your changes before resetting the system, or all changes will be lost.

save

S4810

Save configurations created in uBoot.

S4820T

Syntax

save

Command Modes

uBoot

Command History

Version 8.3.19.0	Introduced on the S4820T.
------------------	---------------------------

Version 8.3.7.0	Introduced on the S4810.
-----------------	--------------------------

Usage Information

You must save your changes before resetting the system, or all changes will be lost.

setenv

S4810

Configure system settings.

S4820T

Syntax

setenv [**gatewayip** *address* | **primary_image** **f10boot** *location* | **secondary_image** **f10boot** *location* | **default_image** **f10boot** *location* | **ipaddr** *address* | **ethaddr** *address* | **enablepwdignore** | **stconfigignore**]

Parameters

gatewayip <i>address</i>	Enter the IP address for the default gateway.
---------------------------------	---

primary_image	Enter the keywords primary_image to configure the boot parameters used in the first attempt to boot FTOS.
----------------------	--

secondary_image	Enter the keywords secondary_image to configure boot parameters used if the primary operating system boot selection is not available.
default_image	Enter the keywords default_image to configure boot parameters used if the secondary operating system boot parameter selection is not available. The default location should always be the internal flash device (flash:), and a verified image should be stored there.
<i>location</i>	Enter the location of the image file to be loaded. The keyword f10boot must precede the location when using this command. For example, primary_image f10boot tftp://10.10.10.10/server
ipaddr	Enter the keyword ipaddr to configure the system management IP address.
ethaddr	Enter the keyword ethaddr to configure system management MAC address.
<i>address</i>	Enter the IP address in standard IPv4 format and the MAC address in standard MAC format.
enablepwdignore	Enter the keywords enablepwdignore true to reload the system software without the enable password configured.
stconfigignore	Enter the keywords stconfigignore true ignore the startup configuration file when reloading the system.

Command Modes

uBoot

Command History

Version 8.3.19.0	Introduced on the S4820T.
Version 8.3.7.0	Introduced on the S4810.

Uplink Failure Detection (UFD)

Overview

Uplink Failure Detection (UFD) provides detection of the loss of upstream connectivity and, if used with NIC teaming, automatic recovery from a failed link.

Uplink Failure Detection is supported on the following platforms: **S** (S50 only), **S4810**, and **S4820T**.

Commands

- `clear ufd-disable`
- `debug uplink-state-group`
- `description`
- `downstream`
- `downstream auto-recover`
- `downstream disable links`
- `enable`
- `show running-config uplink-state-group`
- `show uplink-state-group`
- `uplink-state-group`
- `upstream`

clear ufd-disable

S S50 only

S4810

S4820T

Re-enable one or more downstream interfaces on the switch/router that are in a UFD-disabled error state so that an interface can send and receive traffic.

Syntax

clear ufd-disable {**interface** *interface* | **uplink-state-group** *group-id*}

Parameters	interface <i>interface</i>	Specifies one or more downstream interfaces. For <i>interface</i> , enter one of the following interface types: Fast Ethernet: fastethernet { <i>slot/port</i> <i>slot/port-range</i> } 1-Gigabit Ethernet: gigabitethernet { <i>slot/port</i> <i>slot/port-range</i> } 10-Gigabit Ethernet: tengigabitethernet { <i>slot/port</i> <i>slot/port-range</i> } Port channel: port-channel {1-512 <i>port-channel-range</i> } Where <i>port-range</i> and <i>port-channel-range</i> specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example: gigabitethernet 1/1-2,5,9,11-12 port-channel 1-3,5 A comma is required to separate each port and port-range entry.
	uplink-state-group <i>group-id</i>	Re-enables all UFD-disabled downstream interfaces in the group. Valid <i>group-id</i> values are 1 to 16.
Defaults	A downstream interface in an uplink-state group that has been disabled by UFD is disabled and in a UFD-disabled error state.	
Command Modes	CONFIGURATION	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.4.2.3	Introduced on the S-Series S50.
Related Commands	downstream	Assign a port or port-channel to the uplink-state group as a downstream interface.
	uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.

debug uplink-state-group

S S50 only

S4810

S4820T

Enable debug messages for events related to a specified uplink-state group or all groups.

Syntax

debug uplink-state-group [*group-id*]

Parameters

<i>group-id</i>	Enables debugging on the specified uplink-state group. Valid <i>group-id</i> values are 1 to 16.
-----------------	--

Defaults

None

Command Modes

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.4.2.3	Introduced on the S-Series S50.
Usage Information	To turn off debugging event messages, enter the no debug uplink-state-group <i>[group-id]</i> command.	
Related Commands	clear ufd-disable	Re-enable downstream interfaces that are in a UFD-disabled error state.

description

S S50 only Enter a text description of an uplink-state group.

S4810

S4820T

Syntax **description** *text*

Parameters	<i>text</i>	Text description of the uplink-state group. Maximum length: 80 alphanumeric characters.
-------------------	-------------	--

Defaults None

Command Modes UPLINK-STATE-GROUP

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.4.2.3	Introduced on the S-Series S50.

Related Commands	uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.
-------------------------	------------------------------------	---

Example

```
FTOS(conf-uplink-state-group-16)# description test
FTOS(conf-uplink-state-group-16)#
```

downstream

S S50 only Assign a port or port-channel to the uplink-state group as a downstream interface.

S4810

S4820T

Syntax **downstream** *interface*

Parameters	<i>interface</i>	Enter one of the following interface types: Fast Ethernet: fastethernet { <i>slot/port</i> <i>slot/port-range</i> } 1-Gigabit Ethernet: gigabitethernet { <i>slot/port</i> <i>slot/port-range</i> } 10-Gigabit Ethernet: tengigabitethernet { <i>slot/port</i> <i>slot/port-range</i> } Port channel: port-channel {1-512 <i>port-channel-range</i> } Where <i>port-range</i> and <i>port-channel-range</i> specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example: gigabitethernet 1/1-2,5,9,11-12 port-channel 1-3,5 A comma is required to separate each port and port-range entry.
Defaults	None	
Command Modes	UPLINK-STATE-GROUP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.4.2.3	Introduced on the S-Series S50.
Usage Information	You can assign physical port or port-channel interfaces to an uplink-state group.	
	You can assign an interface to only one uplink-state group. Each interface assigned to an uplink-state group must be configured as either an upstream or downstream interface, but not both.	
	You can assign individual member ports of a port channel to the group. An uplink-state group can contain either the member ports of a port channel or the port channel itself, but not both.	
	To delete an uplink-state group, enter the no downstream interface command.	
Related Commands	upstream	Assign a port or port-channel to the uplink-state group as an upstream interface.
	uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.

downstream auto-recover

S S50 only

S4810

S4820T

Enable auto-recovery so that UFD-disabled downstream ports in an uplink-state group automatically come up when a disabled upstream port in the group comes back up.

Syntax

downstream auto-recover

Defaults	The auto-recovery of UFD-disabled downstream ports is enabled.						
Command Modes	UPLINK-STATE-GROUP						
Command History	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.12.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 8.4.2.3</td> <td>Introduced on the S-Series S50.</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.12.0	Introduced on S4810	Version 8.4.2.3	Introduced on the S-Series S50.
Version 8.3.19.0	Introduced on S4820T						
Version 8.3.12.0	Introduced on S4810						
Version 8.4.2.3	Introduced on the S-Series S50.						
Usage Information	To disable auto-recovery on downstream links, enter the no downstream auto-recover command.						
Related Commands	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">downstream</td> <td>Assign a port or port-channel to the uplink-state group as a downstream interface.</td> </tr> <tr> <td>uplink-state-group</td> <td>Create an uplink-state group and enabling the tracking of upstream links.</td> </tr> </table>	downstream	Assign a port or port-channel to the uplink-state group as a downstream interface.	uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.		
downstream	Assign a port or port-channel to the uplink-state group as a downstream interface.						
uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.						

downstream disable links

S S50 only

S4810

S4820T

Configure the number of downstream links in the uplink-state group that will be disabled if one upstream link in an uplink-state group goes down.

Syntax

downstream disable links {*number* |all}

Parameters

<i>number</i>	Enter the number of downstream links to be brought down by UFD. Range: 1 to 1024.
all	Brings down all downstream links in the group.

Defaults

No downstream links are disabled when an upstream link in an uplink-state group goes down.

Command Modes

UPLINK-STATE-GROUP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.4.2.3	Introduced on the S-Series S50.

Usage Information

A user-configurable number of downstream interfaces in an uplink-state group are put into a link-down state with an UFD-Disabled error message when one upstream interface in an uplink-state group goes down.

If all upstream interfaces in an uplink-state group go down, all downstream interfaces in the same uplink-state group are put into a link-down state.

To revert to the default setting, enter the **no downstream disable links** command.

Related Commands

downstream	Assign a port or port-channel to the uplink-state group as a downstream interface.
uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.

enable

S S50 only**S4810****S4820T**

Enable uplink state group tracking for a specific Uplink Failure Detection (UFD) group.

Syntax**enable****Defaults**

Upstream-link tracking is automatically enabled in an uplink-state group.

Command Modes

UPLINK-STATE-GROUP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.4.2.3	Introduced on the S-Series S50.

Usage Information

To disable upstream-link tracking without deleting the uplink-state group, enter the **no enable** command.

Related Commands

uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.
------------------------------------	---

show running-config uplink-state-group

S S50 only**S4810****S4820T**

Display the current configuration of one or more uplink-state groups.

Syntax**show running-config uplink-state-group [group-id]****Parameters**

<i>group-id</i>	Displays the current configuration of all uplink-state groups or a specified group. Valid <i>group-id</i> values are 1 to 16.
-----------------	---

Defaults

None

Command Modes

EXEC

EXEC Privilege

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810
	Version 8.4.2.3	Introduced on the S-Series S50.
Example	<pre>FTOS#show running-config uplink-state-group ! no enable uplink state track 1 downstream GigabitEthernet 0/2,4,6,11-19 upstream TengigabitEthernet 0/48, 52 upstream PortChannel 1 ! uplink state track 2 downstream GigabitEthernet 0/1,3,5,7-10 upstream TengigabitEthernet 0/56,60</pre>	
Related Commands	show uplink-state-group	Display status information on a specified uplink-state group or all groups.
	uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.

show uplink-state-group

S S50 only

Display status information on a specified uplink-state group or all groups.

S4810

S4820T

Syntax

show uplink-state-group [*group-id*] [*detail*]

Parameters

<i>group-id</i>	Displays status information on a specified uplink-state group or all groups. Valid <i>group-id</i> values are 1 to 16.
detail	Displays additional status information on the upstream and downstream interfaces in each group

Defaults

None

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.4.2.3	Introduced on the S-Series S50.

Example

```
FTOS# show uplink-state-group

Uplink State Group: 1   Status: Enabled, Up
Uplink State Group: 3   Status: Enabled, Up
Uplink State Group: 5   Status: Enabled, Down
Uplink State Group: 6   Status: Enabled, Up
```

```
Uplink State Group: 7   Status: Enabled, Up
Uplink State Group: 16  Status: Disabled, Up
```

```
FTOS# show uplink-state-group 16
Uplink State Group: 16  Status: Disabled, Up
```

```
FTOS#show uplink-state-group detail
(Up): Interface up      (Dwn): Interface down   (Dis): Interface disabled
```

```
Uplink State Group   : 1           Status: Enabled, Up
Upstream Interfaces  :
Downstream Interfaces :
```

```
Uplink State Group   : 3           Status: Enabled, Up
Upstream Interfaces  : Gi 0/46(Up) Gi 0/47(Up)
Downstream Interfaces : Te 13/0(Up) Te 13/1(Up) Te 13/3(Up) Te 13/5(Up) Te 13/6(Up)
```

```
Uplink State Group   : 5           Status: Enabled, Down
Upstream Interfaces  : Gi 0/0(Dwn) Gi 0/3(Dwn) Gi 0/5(Dwn)
Downstream Interfaces : Te 13/2(Dis) Te 13/4(Dis) Te 13/11(Dis) Te 13/12(Dis) Te 13/13(Dis) Te 13/14(Dis) Te 13/15(Dis)
```

```
Uplink State Group   : 6           Status: Enabled, Up
Upstream Interfaces  :
Downstream Interfaces :
```

```
Uplink State Group   : 7           Status: Enabled, Up
Upstream Interfaces  :
Downstream Interfaces :
```

```
Uplink State Group   : 16          Status: Disabled, Up
Upstream Interfaces  : Gi 0/41(Dwn) Po 8(Dwn)
Downstream Interfaces : Gi 0/40(Dwn)
```

Related Commands

show running-config uplink-state-group	Display the current configuration of one or more uplink-state groups.
uplink-state-group	Create an uplink-state group and enabling the tracking of upstream links.

uplink-state-group

S S50 only

S4810

S4820T

Create an uplink-state group and enabling the tracking of upstream links on a switch/router.

Syntax

uplink-state-group *group-id*

Parameters

<i>group-id</i>	Enter the ID number of an uplink-state group. Range: 1-16.
-----------------	--

Defaults

None

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810
Version 8.4.2.3	Introduced on the S-Series S50.

Usage Information

After you enter the command, you enter `uplink-state-group` configuration mode to assign upstream and downstream interfaces to the group.

An uplink-state group is considered to be operationally up if at least one upstream interface in the group is in the link-up state.

An uplink-state group is considered to be operationally down if no upstream interfaces in the group are in the link-up state. No uplink-state tracking is performed when a group is disabled or in an operationally down state.

To delete an uplink-state group, enter the **no uplink-state-group** *group-id* command.

To disable upstream-link tracking without deleting the uplink-state group, enter the **no enable** command in uplink-state-group configuration mode.

Related Commands

show running-config uplink-state-group	Display the current configuration of one or more uplink-state groups.
show uplink-state-group	Display status information on a specified uplink-state group or all groups.

Example

```
FTOS (conf) #uplink-state-group 16
FTOS (conf) #
02:23:17: %RPM0-P:CP %IFMGR-5-ASTATE_UP: Changed uplink state group Admin state to up: Group 16
```

upstream

S S50 only

S4810

S4820T

Assign a port or port-channel to the uplink-state group as an upstream interface.

Syntax

upstream *interface*

Parameters

<i>interface</i>	Enter one of the following interface types: <ul style="list-style-type: none">Fast Ethernet: fastethernet { <i>slot/port</i> <i>slot/port-range</i> }1-Gigabit Ethernet: gigabitethernet { <i>slot/port</i> <i>slot/port-range</i> }10-Gigabit Ethernet: tengigabitethernet { <i>slot/port</i> <i>slot/port-range</i> }40-Gigabit Ethernet: fortyGigE { <i>slot/port</i> <i>slot/port-range</i> }Port channel: port-channel { 1-512 <i>port-channel-range</i> }Where <i>port-range</i> and <i>port-channel-range</i> specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example:<ul style="list-style-type: none">gigabitethernet 1/1-2,5,9,11-12port-channel 1-3,5A comma is required to separate each port and port-range entry.
------------------	--

Defaults	None
Command Modes	UPLINK-STATE-GROUP
Command History	Version 8.3.19.0 Introduced on S4820T
	Version 8.3.12.0 Introduced on S4810
	Version 8.4.2.3 Introduced on the S-Series S50.
Usage Information	You can assign physical port or port-channel interfaces to an uplink-state group.
	You can assign an interface to only one uplink-state group. Each interface assigned to an uplink-state group must be configured as either an upstream or downstream interface, but not both.
	You can assign individual member ports of a port channel to the group. An uplink-state group can contain either the member ports of a port channel or the port channel itself, but not both.
	To delete an uplink-state group, enter the no upstream interface command.
Related Commands	downstream Assign a port or port-channel to the uplink-state group as a downstream interface.
	uplink-state-group Create an uplink-state group and enabling the tracking of upstream links.
Example	<pre>FTOS(conf-uplink-state-group-16)# upstream gigabitethernet 1/10-15 FTOS(conf-uplink-state-group-16)#</pre>

VLAN Stacking

Overview

With the VLAN-Stacking feature (also called Stackable VLANs and *QinQ*), you can “stack” VLANs into one tunnel and switch them through the network transparently. This feature is supported by FTOS on all Dell Force10 platforms as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Commands

The commands included are:

- `dei enable`
- `dei honor`
- `dei mark`
- `member`
- `show interface dei-honor`
- `show interface dei-mark`
- `stack-unit stack-group`
- `vlan-stack access`
- `vlan-stack compatible`
- `vlan-stack dot1p-mapping`
- `vlan-stack protocol-type`
- `vlan-stack trunk`

For information on basic VLAN commands, refer to [Virtual LAN \(VLAN\) Commands](#) in the chapter [Layer 2](#).

Important Points to Remember

- If Spanning Tree Protocol (STP) is *not* enabled across the Stackable VLAN network, STP BPDUs from the customer’s networks are tunneled across the Stackable VLAN network.

- If STP *is* enabled across the Stackable VLAN network, STP BPDUs from the customer's networks are consumed and *not* tunneled across the Stackable VLAN network *unless* protocol tunneling is enabled.

Note: For details on protocol tunneling on the E-Series, refer to [Chapter 47, Service Provider Bridging](#).

- Layer 3 protocols are not supported on a Stackable VLAN network.
- Assigning an IP address to a Stackable VLAN is supported when all the members are only Stackable VLAN trunk ports. IP addresses on a Stackable VLAN-enabled VLAN is not supported if the VLAN contains Stackable VLAN access ports. This facility is provided for SNMP management over a Stackable VLAN enabled VLAN containing only Stackable VLAN trunk interfaces. Layer 3 routing protocols on such a VLAN are not supported.
- It is recommended that you do not use the same MAC address, on different customer VLANs, on the same Stackable VLAN.
- Interfaces configured using Stackable VLAN access or Stackable VLAN trunk commands will not switch traffic for the default VLAN. These interfaces will switch traffic only when they are added to a non-default VLAN.
- Starting with FTOS 7.8.1 for C-Series and S-Series (FTOS 7.7.1 for E-Series, 8.2.1.0 for E-Series ExaScale), a vlan-stack trunk port is also allowed to be configured as a tagged port and as an untagged port for single-tagged VLANs. When the vlan-stack trunk port is also a member of an untagged vlan, the port should be in hybrid mode. Refer to [portmode hybrid](#).

dei enable

C S S4810
S4820T

Make packets eligible for dropping based on their DEI value.

Syntax

dei enable

Defaults

Packets are colored green; no packets are dropped.

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced on C-Series and S-Series.

dei honor

C S S4810
S4820T


Honor the incoming DEI value by mapping it to an FTOS drop precedence. You may enter the command once for 0 and once for 1.

Syntax

dei honor {0 | 1} {green | red | yellow}

Parameters	0 1	Enter the bit value you want to map to a color.
	green red yellow	Choose a color: <ul style="list-style-type: none"> • Green: High priority packets that are the least preferred to be dropped. • Yellow: Lower priority packets that are treated as best-effort. • Red: Lowest priority packets that are always dropped (regardless of congestion status).
Defaults	Disabled; Packets with an unmapped DEI value are colored green.	
Command Mode	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on C-Series and S-Series.
Usage Information	You must first enable DEI for this configuration to take effect.	
Related Commands	dei enable	

dei mark



Set the DEI value on egress according to the color currently assigned to the packet.

Syntax `dei mark {green | yellow} {0 | 1}`

Parameters	0 1	Enter the bit value you want to map to a color.
	green yellow	Choose a color: <ul style="list-style-type: none"> • Green: High priority packets that are the least preferred to be dropped. • Yellow: Lower priority packets that are treated as best-effort.
Defaults	All the packets on egress will be marked with DEI 0.	
Command Mode	INTERFACE	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 8.3.1.0	Introduced on C-Series and S-Series.
Usage Information	You must first enable DEI for this configuration to take effect.	

Related Commands

[dei enable](#)

member

C **E** **S**

Assign a Stackable VLAN access or trunk port to a VLAN. The VLAN must contain the [vlan-stack compatible](#) command in its configuration.

Syntax

member *interface*

To remove an interface from a Stackable VLAN, use the **no member** *interface* command.

Parameters

<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale and 1 to 512 for ExaScale. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a 40-Gigabyte Ethernet interface, enter the keyword fortyGigE followed by the slot/port information.
------------------	--

Defaults

Not configured.

Command Mode

CONF-IF-VLAN

Command History

Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.6.1.0	Support added for C-Series and S-Series
E-Series original Command	

Usage Information

You must enable the Stackable VLAN (using the [vlan-stack compatible](#) command) on the VLAN prior to adding a member to the VLAN.

Related Commands

[vlan-stack compatible](#) Enable Stackable VLAN on a VLAN.

show interface dei-honor

C **S**

Display the dei honor configuration.

Syntax

show interface dei-honor [*interface slot/port* | *linecard number port-set number*]

Parameters	<i>interface slot/port</i>	Enter the interface type followed by the line card slot and port number.
	linecard <i>number</i> port-set <i>number</i>	Enter linecard followed by the line card slot number, then enter port-set followed by the port-pipe number.
Command Mode	EXEC Privilege	
Command History	Version 8.3.1.0 Introduced on C-Series and S-Series.	
Example	<pre>FTOS#show interface dei-honor Default Drop precedence: Green Interface CFI/DEI Drop precedence ----- Gi 0/1 0 Green Gi 0/1 1 Yellow Gi 8/9 1 Red Gi 8/40 0 Yellow</pre>	
Related Commands	dei honor	

show interface dei-mark



Display the dei mark configuration.

Syntax

show interface dei-mark [*interface slot/port* | linecard *number* port-set *number*]

Parameters	<i>interface slot/port</i>	Enter the interface type followed by the line card slot and port number.
	linecard <i>number</i> port-set <i>number</i>	Enter linecard followed by the line card slot number, then enter port-set followed by the port-pipe number.
Command Mode	EXEC Privilege	
Command History	Version 8.3.1.0 Introduced on C-Series and S-Series.	
Example	<pre>FTOS#show interface dei-mark Default CFI/DEI Marking: 0 Interface Drop precedence CFI/DEI ----- Gi 0/1 Green 0 Gi 0/1 Yellow 1 Gi 8/9 Yellow 0 Gi 8/40 Yellow 0</pre>	
Related Commands	dei mark	

stack-unit stack-group

S4810

Configure stacking group specified by ID.

S4820T

Syntax

[no] stack-unit *unit-id* stack-group *stack-group-id*

Parameters

unit-id	Enter the stack unit ID.
stack-group-id	Enter the stack group ID. Range is 0 to 16.
[no]	Use no stack-unit <i>unit-id</i> stack-group <i>stack-id</i> to remove the current stack group configuration.

Defaults

N/A

Command Mode

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.10.2	Introduced on S4810

Usage Information

Warning: The following message is displayed to confirm the command:

All non-default configurations on the related member ports ports (<ports listed here>) will be removed. Do you want to continue (y/n)?



If “y” is entered, all non-default configurations on any member ports of the current stack group will be removed when the unit is rebooted.

vlan-stack access

C E S

S4810

Specify a Layer 2 port or port channel as an access port to the Stackable VLAN network.

S4820T

Syntax

vlan-stack access

To remove access port designation, enter no vlan-stack access.

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the E-Series ExaScale

Version 7.6.1.0 Support added for C-Series and S-Series

E-Series original Command

Usage Information

Prior to enabling this command, you must enter the `switchport` command to place the interface in Layer 2 mode.

To remove the access port designation, the port must be removed (using the `no member interface` command) from all Stackable VLAN enabled VLANs.

vlan-stack compatible

C E S

S4810

S4820T

Enable the Stackable VLAN feature on a VLAN.

Syntax

`vlan-stack compatible`

To disable the Stackable VLAN feature on a VLAN, enter `no vlan-stack compatible`.

Defaults

Not configured.

Command Modes

CONF-IF-VLAN

Command History

Version 8.3.19.0 Introduced on S4820T

Version 8.3.7.0 Introduced on S4810

Version 8.2.1.0 Introduced on the E-Series ExaScale

Version 7.6.1.0 Support added for C-Series and S-Series

E-Series original Command

Usage Information

You must remove the members prior to disabling the Stackable VLAN feature.

To view the Stackable VLANs, use the `show vlan` command in the EXEC Privilege mode. Stackable VLANs contain members, designated by the M in the Q column of the command output.

Example

```
FTOS#show vlan
```

```
Codes: * - Default VLAN, G - GVRP VLANs
```

```
NUM      Status    Q Ports
*  1      Inactive
  2      Active    M Gi 13/13
                    M Gi 13/0-2
  3      Active    M Po1(Gi 13/14-15)
                    M Gi 13/18
                    M Gi 13/3
  4      Active    M Po1(Gi 13/14-15)
                    M Gi 13/18
```

```

5          Active      M Gi 13/4
                    M Po1 (Gi 13/14-15)
                    M Gi 13/18
                    M Gi 13/5
FTOS#

```

vlan-stack dot1p-mapping

C S S4810
S4820T

Map C-Tag dot1p values to a S-Tag dot1p value. C-Tag values may be separated by commas and dashed ranges are permitted. Dynamic Mode CoS overrides any Layer 2 QoS configuration in case of conflicts.

Syntax `vlan-stack dot1p-mapping c-tag-dot1p values sp-tag-dot1p value`

Parameters

<code>c-tag-dot1p <i>value</i></code>	Enter the keyword followed by the customer dot1p value that will be mapped to a service provider dot1p value. Range: 0 to 7
<code>sp-tag-dot1p <i>value</i></code>	Enter the keyword followed by the service provider dot1p value. Range: 0 to 7

Defaults None

Command Modes INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.3.1.0	Introduced on C-Series and S-Series.

vlan-stack protocol-type

C E S
S4810
S4820T

Define the Stackable VLAN Tag Protocol Identifier (TPID) for the outer VLAN tag (also called the *VMAN tag*). If you do not configure this command, FTOS assigns the value 0x9100.

Syntax `vlan-stack protocol-type number`

Parameters

<code><i>number</i></code>	Enter the hexadecimal number as the Stackable VLAN tag. On the E-Series : FTOS accepts the Most Significant Byte (MSB) and then appends zeros for the Least Significant Byte (LSB). On the C-Series and S-Series : You may specify both bytes of the 2-byte S-Tag TPID. E-Series Range: 0 to FF C-Series and S-Series Range: 0 to FFFF Default: 9100
----------------------------	---

Defaults 0x9100

Command Modes**CONFIGURATION****Command History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the E-Series ExaScale. C-Series and S-Series accept both bytes of the 2-byte S-Tag TPID.
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.6.1.0	Support added for C-Series and S-Series
E-Series original Command	

Usage Information

Refer to the *FTOS Configuration Guide* for specific interoperability limitations regarding the S-Tag TPID.

On E-Series TeraScale, the two characters you enter in the CLI for *number* become the MSB, as shown in [Table 56-1](#).

Table 56-1. Configuring a TPID on the E-Series TeraScale

<i>number</i>	Resulting TPID
1	0x0100
10	0x1000
More than two characters.	Configuration rejected.

On E-Series ExaScale, C-Series, and S-Series, four characters you enter in the CLI for *number* are interpreted as follows:

Table 56-2. Configuring a TPID on the E-Series TeraScale

<i>number</i>	Resulting TPID
1	0x0001
10	0x0010
81	0x0081
8100	0x8100

Related Commands

portmode hybrid	Set a port (physical ports only) to accept both tagged and untagged frames. A port configured this way is identified as a hybrid port in report displays.
vlan-stack trunk	Specify a Layer 2 port or port channel as a trunk port to the Stackable VLAN network.

vlan-stack trunk

C E S

S4810

S4820T

Specify a Layer 2 port or port channel as a trunk port to the Stackable VLAN network.

Syntax

vlan-stack trunk

To remove a trunk port designation from the selected interface, enter no vlan-stack trunk.

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 8.2.1.0	Introduced on the E-Series ExaScale
Version 7.8.1.0	Functionality augmented for C-Series and S-Series to enable multi-purpose use of the port. Refer to Usage Information, below.
Version 7.7.1.0	Functionality augmented for E-Series to enable multi-purpose use of the port. Refer to Usage Information, below.
Version 7.6.1.0	Introduced for C-Series and S-Series
E-Series original Command	

Usage Information

Prior to using this command, you must execute the switchport command to place the interface in Layer 2 mode.

To remove the trunk port designation, the port must first be removed (using the no member *interface* command) from all Stackable VLAN-enabled VLANs.

Starting with FTOS 7.7.1.0 for E-Series, the VLAN-Stack trunk port can transparently tunnel, in a service provider environment, customer-originated xSTP control protocol PDUs. Refer to [Chapter 47, Service Provider Bridging](#).

Starting with FTOS 7.8.1.0 for C-Series and S-Series (FTOS 7.7.1 for E-Series), a VLAN-Stack trunk port is also allowed to be configured as a tagged port and as an untagged port for single-tagged VLANs. When the VLAN-Stack trunk port is also a member of an untagged VLAN, the port should be in hybrid mode. Refer to [portmode hybrid](#).

In Example 1 below a VLAN-Stack trunk port is configured and then also made part of a single-tagged VLAN.

In Example 2 below, the Tag Protocol Identifier (TPID) is set to 8848. The “Gi 3/10” port is configured to act as a VLAN-Stack access port, while the “TenGi 8/0” port will act as a VLAN-Stack trunk port, switching Stackable VLAN traffic for VLAN 10, while also switching untagged traffic for VLAN 30 and tagged traffic for VLAN 40. (To allow VLAN 30 traffic, the native VLAN feature is required, by executing the portmode hybrid command. Refer to [portmode hybrid](#) in [Interfaces](#).)

**Example
(Tagged VLAN)**

```
FTOS(conf-if-gi-0/42)#switchport
FTOS(conf-if-gi-0/42)#vlan-stack trunk
FTOS(conf-if-gi-0/42)#show config
!
interface GigabitEthernet 0/42
no ip address
switchport
vlan-stack trunk
no shutdown
FTOS(conf-if-gi-0/42)#interface vlan 100
FTOS(conf-if-vl-100)#vlan-stack compatible
FTOS(conf-if-vl-100-stack)#member gigabitethernet 0/42
FTOS(conf-if-vl-100-stack)#show config
!
interface Vlan 100
no ip address
vlan-stack compatible
member GigabitEthernet 0/42
shutdown
FTOS(conf-if-vl-100-stack)#interface vlan 20
FTOS(conf-if-vl-20)#tagged gigabitethernet 0/42
FTOS(conf-if-vl-20)#show config
!
interface Vlan 20
no ip address
tagged GigabitEthernet 0/42
shutdown
FTOS(conf-if-vl-20)#do show vlan
```

Codes: * - Default VLAN, G - GVRP VLANs

Q: U - Untagged, T - Tagged

x - Dot1x untagged, X - Dot1x tagged

G - GVRP tagged, M - Vlan-stack

	NUM	Status	Description	Q Ports
*	1	Inactive		
	20	Active		T Gi 0/42
	100	Active		M Gi 0/42

```
FTOS(conf-if-vl-20)#
```

**Example
(Tagged &
Untagged
VLANs)**

```
FTOS(config)#vlan-stack protocol-type 88A8
FTOS(config)#interface gigabitethernet 3/10
FTOS(conf-if-gi-3/10)#no shutdown
FTOS(conf-if-gi-3/10)#switchport
FTOS(conf-if-gi-3/10)#vlan-stack access
FTOS(conf-if-gi-3/10)#exit
```

```
FTOS(config)#interface tenGigabitethernet 8/0
FTOS(conf-if-te-10/0)#no shutdown
```

```
FTOS(conf-if-te-10/0)#portmode hybrid
FTOS(conf-if-te-10/0)#switchport
FTOS(conf-if-te-10/0)#vlan-stack trunk
FTOS(conf-if-te-10/0)#exit

FTOS(config)#interface vlan 10
FTOS(conf-if-vlan)#vlan-stack compatible
FTOS(conf-if-vlan)#member Gi 7/0, Gi 3/10, TenGi 8/0
FTOS(conf-if-vlan)#exit

FTOS(config)#interface vlan 30
FTOS(conf-if-vlan)#untagged TenGi 8/0
FTOS(conf-if-vlan)#exit
FTOS(config)#

FTOS(config)#interface vlan 40
FTOS(conf-if-vlan)#tagged TenGi 8/0
FTOS(conf-if-vlan)#exit
FTOS(config)#
```

Virtual Link Trunking (VLT)

Overview

Virtual Link Trunking (VLT) is supported on the **S4810** and **S4820T** platforms.

Virtual link trunking (VLT) allows physical links between two chassis to appear as a single virtual link to the network core or other switches such as Edge, Access or ToR. VLT reduces the role of Spanning Tree protocols by allowing LAG terminations on two separate distribution or core switches, and by supporting a loop free topology. (A Spanning Tree protocol is still needed to prevent the initial loop that may occur prior to VLT being established. After VLT is established, RTSP may be used to prevent loops from forming with new links that are incorrectly connected and outside the VLT domain.) VLT provides Layer 2 multipathing, creating redundancy through increased bandwidth, enabling multiple parallel paths between nodes and load-balancing traffic where alternative paths exist.

Prerequisites: Before you configure VLT, make sure that both VLT peer switches are running the same FTOS version and are configured for RSTP as described in the Virtual Link Trunking (VLT) chapter in the *FTOS Configuration Guide*.



Caution: Dell Force10 recommends not enabling Stacking and VLT simultaneously. If both are enabled at the same time, unexpected behavior will occur.

Commands

- [back-up](#)
- [back-up destination](#)
- [clear vlt statistics](#)
- [delay-restore](#)
- [lACP ungroup member-independent](#)
- [peer-link](#)
- [peer-link port-channel](#)
- [primary-priority](#)
- [show vlt](#)
- [show vlt backup-link](#)

- [show vlt counter](#)
- [show vlt role](#)
- [show vlt statistics](#)
- [show vlt statistics igmp-snoop](#)
- [system-mac](#)
- [unit-id](#)
- [vlt domain](#)
- [vlt domain peer-link](#)
- [vlt-peer-lag port-channel](#)

back-up

S4810

Configure the backup link for VLT.

S4820T

Syntax

back-up

Defaults

Not configured.

Command Modes

VLT DOMAIN

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

back-up destination

S4810

Configure the IP address of the management interface on the remote VLT peer to be used as the endpoint of the VLT backup link for sending out-of-band hello messages.

S4820T

Syntax

back-up destination *ip-address* [**interval** *seconds*]

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format.
interval <i>seconds</i>	Enter the keyword interval to specify the time interval used to send hello messages. Range: 1 to 5 seconds.

Defaults

1 second

Command Modes

VLT DOMAIN

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.8.0	Introduced on S4810

clear vlt statistics

S4810

Clear the statistics on VLT operations.

S4820T

Syntax `clear vlt statistics`

Command Modes EXEC

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

Related Commands	show vlt statistics	Display statistics on VLT operations.
-------------------------	-------------------------------------	---------------------------------------

delay-restore

S4810

Configure the delay in bringing up VLT ports after reload or peer-link restoration between the VLT peer switches.

S4820T

Syntax `delay-restore`

Parameters	delay-restore	Enter the amount of time, in seconds, to delay bringing up the VLT ports after the VLTi device is reloaded or after the peer-link is restored between VLT peer switches. Range: 1 to 1200. Default: 90 seconds.
-------------------	----------------------	---

Defaults Not configured.

Command Modes VLT DOMAIN

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.12.0	Introduced on S4810

Usage Information Use the **delay-restore** parameter to delay the system from bringing up the VLT port for a brief period to allow IGMP Snooping and Layer 3 routing protocols to converge. This feature can be used:

- after a VLT device is reloaded.

- if the Peer VLT device was up at the time the VLTi link failed to the time when it was restored.

lacp ungroup member-independent

S4810

Enable BMP boot for the device connected to the LACP LAG or by a VLT peer device.

S4820T

Syntax

lacp ungroup member-independent {vlt | port-channel *port-channel-id*}

Defaults

Not configured.

Command Modes

CONFIGURATION

Usage Information

LACP on VLT ports (on a VLT switch or access device), which are members of the virtual link trunk, is not brought up until the VLT domain is recognized on the access device.

During boot-up in a stacking configuration, the system must be able to reach the DHCP server with the image and configuration image. During bootup, only untagged DHCP requests are sent to the DHCP server to receive an offer on static LAGs between switches. The DHCP server must be configured to start in jumpstart mode. If switches are connected using LACP port-channel like the VLT peer and ToR, use the **port-channel** parameter on the TOR side of the configuration to allow member ports of a completely un-grouped lacp port-channel to inherit vlan membership of that port channel to ensure untagged packets sent by a VLT peer device reach the DHCP server located on the TOR. To ungroup the vlt and port-channel configurations, use the **no lacp ungroup member-independent vlt** command on a VLT port channel, depending on whether the port channel is VLT or non-VLT..

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Added port-channel parameter.
Version 8.3.8.0	Introduced on S4810

peer-link

S4810

Configure the peer-link for VLT

S4820T

Syntax

peer-link

Defaults

Not configured.

Command Modes

VLT DOMAIN

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

peer-link port-channel

S4810

Configure the specified port channel as the chassis interconnect trunk between VLT peers in the domain.

S4820T**Syntax**

peer-link port-channel *port-channel-number* { **peer-down-vlan** *vlan id* }

Parameters

<i>port-channel-number</i>	Enter the port-channel number that will act as the interconnect trunk.
peer-down-vlan <i>vlan id</i>	(Optional) Configure the VLAN that the VLT peer link uses when the VLT peer is down.

Defaults

Not configured.

Command Modes

VLT DOMAIN

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Added support for peer-down-vlan parameter.
Version 8.3.8.0	Introduced on S4810

Usage Information

Use **peer-down-vlan** to configure the VLAN from where the VLT peer forwards packets received over the VLTi from an adjacent VLT peer that is down. When a VLT peer with Bare Metal Provisioning (BMP) is booting up, it sends untagged DHCP discover packets to its peer over the VLTi. Use this configuration to ensure that the DHCP discover packets are forwarded to the VLAN on the DHCP server.

primary-priority

S4810

Assign the priority for master election among VLT peers.

S4820T**Syntax**

[no] primary-priority

Parameters

<i>value</i>	To configure the primary role on a VLT peer, enter a lower <i>value</i> than the priority value of the remote peer. Range: 1 to 65535.
--------------	---

Default

32768

Command Modes

VLT DOMAIN

Usage Information

After you configure the VLT domain on each peer switch on both sides of the interconnect trunk, by default, the FTOS software elects a primary and secondary VLT peer device. Use the **priority** command to reconfigure the primary role of VLT peer switches.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

show vlt**Z** **S4810****S4820T**

Displays status information about VLT domains currently configured on the switch.

Syntax**show vlt [brief | detail]****Defaults**

Not configured.

Command Modes

EXEC

Example (brief)

```
FTOS(conf)#show vlt brief
VLT Domain Brief
-----
Domain ID:                10
Role:                     Primary
Role Priority:            32768
ICL Link Status:         Up
HeartBeat Status:       Not Established
VLT Peer Status:        Up
Version:                  5 (1)
Local System MAC address: 00:01:e8:8b:14:3c
Remote System MAC address: 00:01:e8:8b:15:20
Remote system version:   5 (1)
```

Example (detail)

```
FTOS# FTOS(conf-if-vl-100)#show vlt detail
Local LAG Id Peer LAG Id Local Status Peer Status Active VLANs
-----
10           10           UP           UP           100, 200, 300
                                     400,
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Support added for number of VLT instances on S4810. For show vlt brief , added support in output for version and delay restore timer . For show vlt detail , added support in output for local LAG status and remote LAG status .
Version 8.3.8.0	Introduced on S4810.

Usage Information

The version shown in the **show vlt brief** output displays the VLT version number which is different from the FTOS version number. VLT version numbers are begin with odd numbers such as 3 or 5.

show vlt backup-link

S4810

Displays information on backup link operation

S4820T

Syntax `show vlt backup-link`

Defaults Not configured.

Command Modes EXEC

Example FTOS_VLTpeer1# `show vlt backup-link`

```
VLT Backup Link
-----
Destination:                10.11.200.18
Peer HeartBeat status:      Up
HeartBeat Timer Interval:   1
HeartBeat Timeout:         3
UDP Port:                   34998
HeartBeat Messages Sent:    1026
HeartBeat Messages Received: 1025
```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

show vlt counter

S4810

Displays the counter information.

S4820T

Syntax `show vlt counter [arp | igmp-snoop | interface | mac]`

Parameters

arp	Enter the keyword arp to display the ARP counter information for the VLT.
igmp-snoop	Enter the keyword igmp-snoop to display the igmp-snooping counter information for the VLT.
interface	Enter the keyword interface to display the interface counter information for the VLT.
mac	Enter the keyword mac to display the MAC address counter information for the VLT.

Defaults Not configured.

Command Modes EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

Example

```
FTOS# show vlt counter
Total VLT counters
-----
L2 Total MAC-Address Count      :
IGMP MRouter Vlans count :
IGMP Mcast Groups count :
ARP entries count                :
```

**Example
(igmp-snoop)**

```
FTOS# show vlt counter igmp-snoop
Total IGMP VLT counters
-----
IGMP MRouter Vlans count :      1
IGMP Mcast Groups count  :      5
```

**Example
(igmp-snoop
interface port
channel)**

```
FTOS#show vlt counter igmp-snoop interface port-channel 2
VLT Port-ID: 2 IGMP Counter
-----
IGMP MRouter Vlans count :      0
IGMP Mcast Groups count  :      5

FTOS# show vlt counter igmp-snoop interface port-channel 100
VLT Port-ID: 100 IGMP Counter
-----
IGMP MRouter Vlans count :      1
IGMP Mcast Groups count  :      0
```

**Usage
Information**

If you do not add a parameter such as **arp** or **mac**, the output will display all of the counters.

show vlt role

S4810**S4820T**

Displays the VLT peer status, role of the local VLT switch, VLT system MAC address and system priority, and the MAC address and priority of the local VLT device.

Syntax**show vlt role****Defaults**

Not configured.

Command Modes

EXEC

**Command
History**

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Example

```
FTOS_VLTpeer1# show vlt role

VLT Role
-----
VLT Role:                Primary
System MAC address:      00:01:e8:8a:df:bc
System Role Priority:    32768
Local System MAC address: 00:01:e8:8a:df:bc
Local System Role Priority: 32768
```

```

FTOS_VLTpeer2# show vlt role

VLT Role
-----
VLT Role:                Secondary
System MAC address:      00:01:e8:8a:df:bc
System Role Priority:    32768
Local System MAC address: 00:01:e8:8a:df:e6
Local System Role Priority: 32768

```

show vlt statistics

S4810

Displays statistics on VLT operations.

S4820T

Syntax

show vlt statistics

Defaults

Not configured.

Command Modes

EXEC

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Added support in output for ARP, MAC and IGMP snooping.
Version 8.3.8.0	Introduced on S4810

Example

Note: The following example shows the statistics for *all* of the VLT parameters. If a specific keyword is entered, such as **mac**, only the statistics for that VLT parameter will display.

```

FTOS_VLTpeer1#show vlt statistics
VLT Statistics
-----
HeartBeat Messages Sent:      930
HeartBeat Messages Received:  909
ICL Hello's Sent:            927
ICL Hello's Received:        910
Domain Mismatch Errors:      0
Version Mismatch Errors:     0
Config Mismatch Errors:      0

VLT MAC Statistics
-----
L2 Info Pkts sent:6,         L2 Mac-sync Pkts Sent:0
L2 Info Pkts Rcvd:3,        L2 Mac-sync Pkts Rcvd:2
L2 Reg Request sent:1
L2 Reg Request rcvd:2

L2 Reg Response sent:1
L2 Reg Response rcvd:1

VLT Igmp-Snooping Statistics
-----
IGMP Info Pkts sent:        4
IGMP Info Pkts Rcvd:        1
IGMP Reg Request sent:      1

```

```

IGMP Reg Request rcvd: 2
IGMP Reg Response sent: 1
IGMP Reg Response rcvd: 1
IGMP PDU Tunnel Pkt sent:5
IGMP PDU Tunnel Pkt rcvd:10
IGMP Tunnel PDUs sent: 10
IGMP Tunnel PDUs rcvd: 19

```

VLT ARP Statistics

```

-----
ARP Tunnel Pkts sent:0
ARP Tunnel Pkts Rcvd:0
ARP-sync Pkts Sent:0
ARP-sync Pkts Rcvd:0
ARP Reg Request sent:19
ARP Reg Request rcvd:10

```

Command History

clear vlt statistics	Clear statistics on VLT operations.
--------------------------------------	-------------------------------------

show vlt statistics igmp-snoop

S4810

Displays the informational packets and IGMP control PDUs that are exchanged between VLT peer nodes.

S4820T

Syntax

show vlt statistics igmp-snoop

Defaults

Not configured.

Command Modes

EXEC

Example

```

FTOS_VLTpeer1#show vlt statistics igmp-snoop
VLT Igmp-Snooping Statistics
-----
IGMP Info Pkts sent:      4
IGMP Info Pkts Rcvd:     1
IGMP Reg Request sent:   1
IGMP Reg Request rcvd:   2
IGMP Reg Response sent:  1
IGMP Reg Response rcvd:  1
IGMP PDU Tunnel Pkt sent:5
IGMP PDU Tunnel Pkt rcvd:10
IGMP Tunnel PDUs sent:  10
IGMP Tunnel PDUs rcvd:  19

```

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.12.0	Introduced on S4810

system-mac

S4810

Configure the MAC address for the VLT domain on a VLT peer switch.

S4820T

Syntax `system-mac mac-address`

Parameters

<code>mac-address</code>	Enter a MAC address in the format aaaa.bbbb.cccc.
--------------------------	---

Defaults Automatically assigned based on the primary priority and MAC address of each VLT peer.

Command Modes VLT DOMAIN

Usage Information When you create a VLT domain on a switch, the FTOS software automatically creates a VLT-system MAC address used for internal system operations. Use the **system-mac** command to explicitly define the MAC address for the domain. You must also reconfigure the same MAC address on the VLT peer switch.

Use this command to minimize the time required for the VLT system to synchronize the default MAC address of the VLT domain on both peer switches when one peer switch reboots.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

unit-id

S4810

Explicitly configure the default unit ID of a VLT peer switch.

S4820T

Syntax `unit-id [0 | 1]`

Parameters

<code>0 1</code>	Configure the default unit ID of a VLT peer switch. Enter 0 for a unit with a lower MAC address or enter 1 for a unit with a higher MAC address.
--------------------	--

Defaults Automatically assigned based on the MAC address of each VLT peer. The peer with the lower MAC address is assigned unit 0; the peer with the higher MAC address is assigned unit 1.

Command Modes VLT DOMAIN

Usage Information When you create a VLT domain on a switch, the FTOS software automatically assigns a unique unit ID (0 or 1) to each peer switch. The unit IDs are used for internal system operations. Use the **unit-id** command to explicitly configure the unit ID of a VLT peer. You must configure a different unit ID (0 or 1) on each peer switch.

Use this command to minimize the time required for the VLT system to determine the unit ID assigned to each peer switch when one peer reboots.

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

vlt domain

S4810

S4820T

Use this command to enable VLT on a switch, configure a VLT domain, enter VLT-domain configuration mode, set a VLT port delay time, set VLT priorities and configure a VLT peer link.

Syntax

vlt domain *domain-id*

Parameters

<i>domain-id</i>	Enter the Domain ID number. You must configure the same domain ID on the peer switch. VLT uses the domain ID to automatically create a VLT MAC address for the domain. Range of domain IDs: 1 to 1000.
------------------	---

Command Modes

CONFIGURATION

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Related Commands

show vlt	Use the show vlt brief command to display the delay-restore value.
--------------------------	--

Usage Information

The VLT domain ID must be the same between the two VLT devices. If the domain ID is not the same, a syslog message is generated and VLT will not launch.

vlt domain peer-link

S4810

S4820T

Use this command to configure a VLT peer link for a VLAN to indicate where the VLT peer forwards packets from the VLTi in a peer failure scenario.

Syntax

vlt domain *domain-id* **peer-link** *port-channel*

Parameters

<i>domain-id</i>	Enter the Domain ID number. You must configure the same domain ID on the peer switch. VLT uses the domain ID to automatically create a VLT MAC address for the domain. Range of domain IDs: 1 to 1000.
peer-link <i>port-channel</i>	Configure the VLT peer link.

Command Modes

CONFIGURATION

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.8.0	Introduced on S4810
Related Commands	show vlt Use the show vlt brief command to display the delay-restore value.	

vlt-peer-lag port-channel

S4810

Associate the port channel to the corresponding port channel in the VLT peer for the VLT connection to an attached device.

S4820T

Syntax `vlt-peer-lag port-channel id-number`

Parameters	<i>id-number</i>	Enter the port-channel number that will connect to another port channel in the VLT peer.
-------------------	------------------	--

Defaults Not configured.

Command Modes INTERFACE PORT-CHANNEL

Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.8.0	Introduced on S4810

Virtual Router Redundancy Protocol (VRRP)

Virtual Router Redundancy Protocol (VRRP) is supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series, **S4810**, or **S4820T**.

Overview

This chapter has the following sections:

- [IPv4 VRRP Commands](#)
- [IPv6 VRRP Commands](#)

IPv4 VRRP Commands

The commands are:

- [advertise-interval](#)
- [authentication-type](#)
- [clear counters vrrp](#)
- [debug vrrp](#)
- [description](#)
- [disable](#)
- [hold-time](#)
- [preempt](#)
- [priority](#)
- [show config](#)
- [show vrrp](#)
- [track](#)
- [virtual-address](#)
- [vrrp delay minimum](#)
- [vrrp delay reload](#)
- [vrrp-group](#)

advertise-interval

C E S

S4810

S4820T

Set the time interval between VRRP advertisements.

Syntax advertise-interval *seconds*

To return to the default settings, enter no advertise-interval.

Parameters

<i>seconds</i>	Enter a number of seconds. Range: 1 to 255. Default: 1 second.
----------------	--

Defaults 1 second.

Command Modes

INTERFACE-VRRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

Dell Force10 recommends that you keep the default setting for this command. If you do change the time interval between VRRP advertisements on one router, you must change it on all routers.

authentication-type

C E S

S4810

S4820T

Enable authentication of VRRP data exchanges.

Syntax authentication-type simple [*encryption-type*] *password*

To delete an authentication type and password, enter no authentication-type.

Parameters

<i>simple</i>	Enter the keyword <i>simple</i> to specify simple authentication.
<i>encryption-type</i>	(OPTIONAL) Enter one of the following numbers: <ul style="list-style-type: none"> 0 (zero) for an un-encrypted (clear text) password 7 (seven) for hidden text password.
<i>password</i>	Enter a character string up to 8 characters long as a password. If you do not enter an encryption-type, the password is stored as clear text.

Defaults	Not configured.										
Command Modes	VRRP										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										
Usage Information	The password is displayed in the show config output if the encryption-type is unencrypted or clear text. If you choose to encrypt the password, the show config displays an encrypted text string.										

clear counters vrrp

C E S

Clear the counters maintained on VRRP operations.

S4810

S4820T

Syntax clear counters vrrp [*vrrp-id*]

Parameters	<i>vrrp-id</i> (OPTIONAL) Enter the number of the VRRP group ID. Range: 1 to 255
-------------------	---

Command Modes EXEC Privilege

Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										

debug vrrp

C E

Allows you to enable debugging of VRRP.

Syntax debug vrrp *interface* [*vrrp-id*] {all | packets | state | timer}

To disable debugging, use the no debug vrrp *interface* [*vrrp-id*] {all | packets | state | timer} command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel interface types, enter the keyword port-channel followed by the number: <ul style="list-style-type: none"> C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by the VLAN ID. The VLAN ID range is from 1 to 4094.
<i>vrrp-id</i>	(OPTIONAL) Enter a number from 1 to 255 as the VRRP group ID.
<i>all</i>	Enter the keyword all to enable debugging of all VRRP groups.
<i>bfd</i>	Enter the keyword bfd to enable debugging of all VRRP BFD interactions
<i>packets</i>	Enter the keyword packets to enable debugging of VRRP control packets.
<i>state</i>	Enter the keyword state to enable debugging of VRRP state changes.
<i>timer</i>	Enter the keyword timer to enable debugging of the VRRP timer.

Command Modes

EXEC Privilege

Command History

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

If no options are specified, debug is active on all interfaces and all VRRP groups.

description

C E S

S4810

S4820T

Configure a short text string describing the VRRP group.

Syntax`description text`

To delete a VRRP group description, enter no description.

Parameters

<i>text</i>	Enter a text string up to 80 characters long.
-------------	---

Defaults

Not enabled.

Command Modes

VRRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series

Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

disable

C E S
S4810
S4820T

Disable a VRRP group.

Syntax

disable

To re-enable a disabled VRRP group, enter no disable.

Defaults

C and S-Series default: VRRP is enabled.

E-Series default: VRRP is disabled.

Command Modes

VRRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

To enable VRRP traffic, assign an IP address to the VRRP group using the [virtual-address](#) command and enter no disable.

Related Commands

virtual-address	Specify the IP address of the Virtual Router.
---------------------------------	---

hold-time

C E S
S4810
S4820T

Specify a delay (in seconds) before a switch becomes the MASTER virtual router. By delaying the initialization of the VRRP MASTER, the new switch can stabilize its routing tables.

Syntax

hold-time *seconds*

To return to the default value, enter no hold-time.

Parameters

<i>seconds</i>	Enter a number of seconds. Range: 0 to 65535. Default: zero (0) seconds.
----------------	--

Defaults	zero (0) seconds										
Command Modes	VRRP										
Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										
Usage Information	If a switch is a MASTER and you change the hold timer, you must disable and re-enable VRRP for the new hold timer value to take effect.										
Related Commands	<table border="1"> <tr> <td>disable</td> <td>Disable a VRRP group.</td> </tr> </table>	disable	Disable a VRRP group.								
disable	Disable a VRRP group.										

preempt

C **E** **S**

S4810

S4820T

Permit a BACKUP router with a higher priority value to preempt or become the MASTER router.

Syntax preempt

To prohibit preemption, enter no preempt.

Defaults Enabled (that is, a BACKUP router can preempt the MASTER router).

Command Modes VRRP

Command History	<table border="1"> <tr> <td>Version 8.3.19.0</td> <td>Introduced on S4820T</td> </tr> <tr> <td>Version 8.3.7.0</td> <td>Introduced on S4810</td> </tr> <tr> <td>Version 7.6.1.0</td> <td>Introduced on S-Series</td> </tr> <tr> <td>Version 7.5.1.0</td> <td>Introduced on C-Series</td> </tr> <tr> <td>pre-Version 6.2.1.1</td> <td>Introduced on E-Series</td> </tr> </table>	Version 8.3.19.0	Introduced on S4820T	Version 8.3.7.0	Introduced on S4810	Version 7.6.1.0	Introduced on S-Series	Version 7.5.1.0	Introduced on C-Series	pre-Version 6.2.1.1	Introduced on E-Series
Version 8.3.19.0	Introduced on S4820T										
Version 8.3.7.0	Introduced on S4810										
Version 7.6.1.0	Introduced on S-Series										
Version 7.5.1.0	Introduced on C-Series										
pre-Version 6.2.1.1	Introduced on E-Series										

priority

C **E** **S**

S4810

S4820T

Specify a VRRP priority value for the VRRP group. This value is used by the VRRP protocol during the MASTER election process.

Syntax priority *priority*

To return to the default value, enter no priority.

Parameters	<i>priority</i>	Enter a number as the priority. Enter 255 only if the router's virtual address is the same as the interface's primary IP address (that is, the router is the OWNER). Range: 1 to 255 Default: 100
Defaults	100	
Command Modes	VRRP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series
Usage Information	<p>To guarantee that a VRRP group becomes MASTER, configure the VRRP group's virtual address with same IP address as the interface's primary IP address and change the priority of the VRRP group to 255.</p> <p>If you set the priority to 255 and the virtual-address is not equal to the interface's primary IP address, an error message appears.</p>	

show config

C E S

S4810

S4820T

View the non-default VRRP configuration.

Syntax

show config [verbose]

Parameters	verbose	(OPTIONAL) Enter the keyword verbose to view all VRRP group configuration information, including defaults.
Command Modes	VRRP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS(conf-if-vrid-4)#show con
vrrp-group 4
virtual-address 119.192.182.124
!
```

show vrrp

C E S**S4810****S4820T**

View the VRRP groups that are active. If no VRRP groups are active, the FTOS returns “No Active VRRP group.”

Syntax

```
show vrrp [vrrp-id] [interface] [brief]
```

Parameters

<i>vrrp-id</i>	(OPTIONAL) Enter the Virtual Router Identifier for the VRRP group to view only that group. Range: 1 to 255.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For Port Channel interface types, enter the keyword port-channel followed by the number: C-Series and S-Series Range: 1 to 128 E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScale For SONET interfaces, enter the keyword sonet followed by the slot/port information. For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by the VLAN ID. The VLAN ID range is from 1 to 4094.
<i>brief</i>	(OPTIONAL) Enter the keyword brief to view a table of information on the VRRP groups on the E-Series.

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Example

```
FTOS>Interface Grp Pri Pre State Master addr Virtual addr(s)
Description-----
Gi 10/37 1 100 Y Master 200.200.200.200 200.200.200.201
Gi 10/37 2 100 Y Master 200.200.200.200 200.200.200.202 200.200.200.203 Description
Gi 10/37 3 100 Y Master 1.1.1.1 1.1.1.2
Gi 10/37 4 100 Y Master 200.200.200.200 200.200.200.206 200.200.200.207 ... short desc
Gi 10/37 254 254 Y Master 200.200.200.200 200.200.200.204 200.200.200.205
FTOS>
```

Table 58-1. Command Example Descriptions: show vrrp brief

Item	Description
Interface	Lists the interface type, slot and port on which the VRRP group is configured.
Grp	Displays the VRRP group ID.
Pri	Displays the priority value assigned to the interface. If the <code>track</code> command is configured to track that interface and the interface is disabled, the <code>cost</code> is subtracted from the priority value assigned to the interface.
Pre	States whether preempt is enabled on the interface. <ul style="list-style-type: none"> • Y = Preempt is enabled. • N = Preempt is not enabled.
State	Displays the operational state of the interface by using one of the following: <ul style="list-style-type: none"> • NA/IF (the interface is not available). • MASTER (the interface associated with the MASTER router). • BACKUP (the interface associated with the BACKUP router).
Master addr	Displays the IP address of the MASTER router.
Virtual addr(s)	Displays the virtual IP addresses of the VRRP routers associated with the interface.

Example

```

FTOS>show vrrp
-----
GigabitEthernet 12/3, VRID: 1, Net: 10.1.1.253
State: Master, Priority: 105, Master: 10.1.1.253 (local)
Hold Down: 0 sec, Preempt: TRUE, AdvInt: 1 sec
Adv rcvd: 0, Adv sent: 1862, Gratuitous ARP sent: 0
Virtual MAC address:
  00:00:5e:00:01:01
Virtual IP address:
  10.1.1.252
Authentication: (none)
Tracking states for 1 interfaces:
  Up GigabitEthernet 12/17 priority-cost 10
-----
GigabitEthernet 12/4, VRID: 2, Net: 10.1.2.253
State: Master, Priority: 110, Master: 10.1.2.253 (local)
Hold Down: 10 sec, Preempt: TRUE, AdvInt: 1 sec
Adv rcvd: 0, Adv sent: 1862, Gratuitous ARP sent: 0
Virtual MAC address:
  00:00:5e:00:01:02
Virtual IP address:
  10.1.2.252
Authentication: (none)
Tracking states for 2 interfaces:
  Up GigabitEthernet 2/1 priority-cost 10
  Up GigabitEthernet 12/17 priority-cost 10
FTOS>

```

Table 58-2. Command Example Description: show vrrp

Line Beginning with	Description
GigabitEthernet 12/3...	Displays the Interface, the VRRP group ID, and the network address. If the interface is not sending VRRP packets, 0 . 0 . 0 . 0 appears as the network address.
State: master...	Displays the interface's state: <ul style="list-style-type: none"> • Na/If (not available), • master (MASTER virtual router) • backup (BACKUP virtual router) the interface's priority and the IP address of the MASTER.
Hold Down:...	This line displays additional VRRP configuration information: <ul style="list-style-type: none"> • Hold Down displays the hold down timer interval in seconds. • Preempt displays TRUE if preempt is configured and FALSE if preempt is not configured. • AdvInt displays the Advertise Interval in seconds.
Adv rcvd:...	This line displays counters for the following: <ul style="list-style-type: none"> • Adv rcvd displays the number of VRRP advertisements received on the interface. • Adv sent displays the number of VRRP advertisements sent on the interface. • Gratuitous ARP sent displays the number of gratuitous ARPs sent.
Virtual MAC address	Displays the virtual MAC address of the VRRP group.
Virtual IP address	Displays the virtual IP address of the VRRP router to which the interface is connected.
Authentication:...	States whether authentication is configured for the VRRP group. If it is, the authentication type and the password are listed.
Tracking states...	This line is displayed if the track command is configured on an interface. Below this line, the following information on the tracked interface is displayed: <ul style="list-style-type: none"> • Dn or Up states whether the interface is down or up. • the interface type slot/port information

track

C **E** **S**

54810

54820T

Syntax

Monitor an interface and lower the priority value of the VRRP group on that interface if it is disabled.

```
track interface [priority-cost cost]
```

To disable monitoring, use the `no track interface` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information.For a Loopback interface, enter the keyword loopback followed by a number from 0 to 16383.For Port Channel interface types, enter the keyword port-channel followed by the number:<ul style="list-style-type: none">C-Series and S-Series Range: 1-128E-Series Range: 1 to 32 for EtherScale, 1 to 255 for TeraScaleFor SONET interfaces, enter the keyword sonet followed by the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information.For a VLAN interface, enter the keyword vlan followed by a number from 1 to 4094.
<i>cost</i>	(OPTIONAL) Enter a number as the amount to be subtracted from the priority value. Range: 1 to 254. Default: 10.

Defaults

cost = 10

Command Modes

VRRP

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

If the interface is disabled, the cost value is subtracted from the **priority** value and forces a new MASTER election if the priority value is lower than the priority value in the BACKUP virtual routers.

virtual-address

C **E** **S**

S4810

S4820T

Syntax

Configure up to 12 IP addresses of virtual routers in the VRRP group. You must set at least one virtual address for the VRRP group to start sending VRRP packets.

virtual-address *ip-address1* [... *ip-address12*]

To delete one or more virtual IP addresses, use the **no virtual-address** *ip-address1* [... *ip-address12*] command.

Parameters	<i>ip-address1</i>	Enter an IP address of the virtual router in dotted decimal format. The IP address must be on the same subnet as the interface's primary IP address.
	<i>... ip-address12</i>	(OPTIONAL) Enter up to 11 additional IP addresses of virtual routers in dotted decimal format. Separate the IP addresses with a space. The IP addresses must be on the same subnet as the interface's primary IP address.
Defaults	Not configured.	
Command Modes	VRRP	
Command History	Version 8.3.19.0	Introduced on S4820T
	Version 8.3.7.0	Introduced on S4810
	Version 7.6.1.0	Introduced on S-Series
	Version 7.5.1.0	Introduced on C-Series
	Version 7.4.1.0	Introduced support for telnetting to the VRRP group IP address assigned using this command
	pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The VRRP group only becomes active and sends VRRP packets when a virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

A system message appears after you enter or delete the [virtual-address](#) command.

To guarantee that a VRRP group becomes MASTER, configure the VRRP group's virtual address with the same IP address as the interface's primary IP address and change the [priority](#) of the VRRP group to 255.

You can ping the virtual addresses configured in all VRRP groups.

vrrp delay minimum

S4810

Set the delay time for VRRP initialization after an interface comes up.

S4820T

Syntax

vrrp delay minimum *seconds*

Parameters

<i>seconds</i>	Enter the number of seconds for the delay for VRRP initialization after an interface becomes operational. Range: 0 to 900 (0 indicates no delay)
----------------	---

Defaults

0

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Usage Information

This command applies to a single interface. When used in conjunction with the `vrrp delay reload` CLI, the later timer rules the VRRP enabling. For example, if `vrrp delay reload` is 600 and the `vrrp delay minimum` is 300:

- When the system reloads, VRRP waits 600 seconds (10 minutes) to bring up VRRP on all interfaces that are up and configured for vrrp.
- When an interface comes up, whether as part of a system reload or an interface reload, the system waits 300 seconds (5 minutes) to bring up VRRP on that interface.

Related Commands

vrrp delay reload	Set the delay time for VRRP initialization after a system reboot.
-----------------------------------	---

vrrp delay reload

S4810

Set the delay time for VRRP initialization after a system reboot.

S4820T**Syntax**`vrrp delay minimum seconds`**Parameters**

<i>seconds</i>	Enter the number of seconds for the delay. Range: 0 to 900 (0 indicates no delay)
----------------	--

Defaults

0

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.8.0	Introduced on S4810

Usage Information

This command applies to all the VRRP configured interfaces on a system. When used in conjunction with the `vrrp delay minimum` CLI, the later timer rules the VRRP enabling. For example, if `vrrp delay reload` is 600 and the `vrrp delay minimum` is 300:

- When the system reloads, VRRP waits 600 seconds (10 minutes) to bring up VRRP on all interfaces that are up and configured for vrrp.
- When an interface comes up, whether as part of a system reload or an interface reload, the system waits 300 seconds (5 minutes) to bring up VRRP on that interface.

You must save the configuration and reload the system for the delay timers to take affect.

Related Commands

[vrrp delay minimum](#) Set the delay time for VRRP initialization after a line card reboot.

vrrp-group

C E S

S4810

S4820T

Assign a VRRP ID to an interface. You can configure up to 12 VRRP groups per interface.

Syntax

`vrrp-group vrrp-id`

Parameters

vrrp-id Enter a number as the group ID.
Range: 1 to 255.

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.3.7.0	Introduced on S4810
Version 7.6.1.0	Introduced on S-Series
Version 7.5.1.0	Introduced on C-Series
pre-Version 6.2.1.1	Introduced on E-Series

Usage Information

The VRRP group only becomes active and sends VRRP packets when a virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

Related Commands

[virtual-address](#) Assign up to 12 virtual IP addresses per VRRP group.

IPv6 VRRP Commands

The IPv6 VRRP commands are:

- [clear counters vrrp ipv6](#)
- [debug vrrp ipv6](#)
- [show vrrp ipv6](#)
- [vrrp-ipv6-group](#)

The following commands apply to IPv4 and IPv6:

- [advertise-interval](#)
- [description](#)
- [disable](#)
- [hold-time](#)
- [preempt](#)
- [priority](#)
- [show config](#)
- [track](#)
- [virtual-address](#)

clear counters vrrp ipv6

E C S

S4810

S4820T

Clear the counters recorded for IPv6 VRRP groups.

Syntax

clear counters vrrp ipv6 [*vrid* | **vrf** *instance*]

Parameters

- vrid* (OPTIONAL) Enter the number of an IPv6 VRRP group.
Range: 1 to 255
- vrf** *instance* (OPTIONAL) **E-Series only**: Enter the name of a VRF instance (32 characters maximum) to clear the counters of all IPv6 VRRP groups in the specified VRF.

Command Modes

EXEC Privilege

Command History

- | | |
|------------------|---|
| Version 8.3.19.0 | Introduced on S4820T |
| Version 8.4.1.0 | Introduced on E-Series ExaScale, C-Series, and S-Series. Support was added for IPv6 VRRP groups in non-default VRF instances. |
| Version 8.3.10.0 | Introduced on S4810 |
| Version 8.3.2.0 | Introduced on E-Series TeraScale |

debug vrrp ipv6

E C S

S4810

S4820T

Allows you to enable debugging of VRRP.

Syntax

debug vrrp ipv6 *interface* [*vrid*] {**all** | **packets** | **state** | **timer**}

Parameters	<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. For a Port Channel interface, enter the keyword port-channel followed by a number: E-Series Range: 1 to 255 for TeraScale For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN interface, enter the keyword vlan followed by the VLAN ID. The VLAN ID range is from 1 to 4094.
	<i>vrid</i>	(OPTIONAL) Enter a number from 1 to 255 as the VRRP group ID.
	all	Enter the keyword all to enable debugging of all VRRP groups.
	bfd	Enter the keyword bfd to enable debugging of all VRRP BFD interactions
	database	Enter the keyword database to display changes related to group, prefix, and interface entries in the VRRP table.
	packets	Enter the keyword packets to enable debugging of VRRP control packets.
	state	Enter the keyword state to enable debugging of VRRP state changes.
	timer	Enter the keyword timer to enable debugging of the VRRP timer.

Command Modes EXEC Privilege

Command History	Version 8.4.1.0	Introduced on E-Series ExaScale, C-Series, and S-Series.
	Version 8.3.10.0	Introduced on S4180
	Version 8.3.2.0	Introduced on E-Series TeraScale

Usage Information If no options are specified, debug is active on all interfaces and all VRRP groups.

show vrrp ipv6

E C S

S4810

S4820T

View the IPv6 VRRP groups that are active. If no VRRP groups are active, the FTOS returns “**No Active VRRP group.**”

Syntax `show vrrp ipv6 [vrid] [interface] [brief]`

Parameters	<p><i>vrid</i> (OPTIONAL) Enter the Virtual Router Identifier for the VRRP group to view only that group. Range: 1 to 255.</p> <p><i>interface</i> (OPTIONAL) Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> • For a 1-Gigabit Ethernet interface, enter the keyword GigabitEthernet followed by the slot/port information. • For a Port Channel interface, enter the keyword port-channel followed by a number: E-Series Range: 1 to 255 for TeraScale • For SONET interfaces, enter the keyword sonet followed by the slot/port information. • For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. • For a VLAN interface, enter the keyword vlan followed by the VLAN ID. The VLAN ID range is from 1 to 4094. <p>brief (OPTIONAL) Enter the keyword brief to view a table of information on the VRRP groups on the E-Series.</p>
-------------------	--

Command Modes EXEC
EXEC Privilege

Command History	<p>Version 8.3.19.0 Introduced on S4820T</p> <p>Version 8.3.10.0 Introduced on S4810</p> <p>Version 8.3.2.0 Introduced</p>
------------------------	--

Example

```

FTOS#show vrrp ipv6
-----
GigabitEthernet 5/6, IPv6 VRID: 255, Version: 3, Net: fe80::201:e8ff:fe7a:6bb9
VRF: 0 default-vrf
State: Master, Priority: 101, Master: fe80::201:e8ff:fe7a:6bb9 (local)
Hold Down: 0 centisec, Preempt: TRUE, AdvInt: 100 centisec
Accept Mode: FALSE, Master AdvInt: 100 centisec
Adv rcvd: 0, Bad pkts rcvd: 0, Adv sent: 64
Virtual MAC address:
 00:00:5e:00:02:ff
Virtual IP address:
 1::255 fe80::255

```

Table 58-3. Command Example Description: show vrrp ipv6

Line Beginning with	Description
GigabitEthernet...	Displays the Interface, the VRRP group ID, and the network address. If the interface is no sending VRRP packets, 0.0.0.0 appears as the network address.
VRF	VRF instance to which the interface (on which the VRRP group is configured) belongs

Table 58-3. Command Example Description: show vrrp ipv6

State: master...	Displays the interface's state: <ul style="list-style-type: none"> • Na/If (not available), • master (MASTER virtual router) • backup (BACKUP virtual router) the interface's priority and the IP address of the MASTER.
Hold Down:...	This line displays additional VRRP configuration information: <ul style="list-style-type: none"> • Hold Down displays the hold down timer interval in seconds. • Preempt displays TRUE if preempt is configured and FALSE if preempt is not configured. • AdvInt displays the Advertise Interval in seconds.
Adv rcvd:...	This line displays counters for the following: <ul style="list-style-type: none"> • Adv rcvd displays the number of VRRP advertisements received on the interface. • Adv sent displays the number of VRRP advertisements sent on the interface. • Bad pkts rcvd displays the number of invalid packets received on the interface.
Virtual MAC address	Displays the virtual MAC address of the VRRP group.
Virtual IP address	Displays the virtual IP address of the VRRP router to which the interface is connected.
Tracking states...	Displays information on the tracked interfaces or objects configured for a VRRP group (track command), including: <ul style="list-style-type: none"> • UP or DOWN state of the tracked interface or object (Up or Dn) • Interface type and slot/port or object number, description, and time since the last change in the state of the tracked object • Cost to be subtracted from the VRRP group priority if the state of the tracked interface/object goes DOWN

vrrp-ipv6-group

E C S

S4810

S4820T

Assign an interface to a VRRP group.

Syntax

vrrp-ipv6-group *vrid*

Parameters

vrid Enter the virtual-router ID number of the VRRP group.
VRID range (C-Series and S-Series): 1-255.
VRID range (E-Series): 1-255 when VRF microcode is not loaded and 1-15 when VRF microcode is loaded.

Defaults

Not configured.

Command Modes

INTERFACE

Command History

Version 8.3.19.0	Introduced on S4820T
Version 8.4.2.1	The range of valid VRID values on the E-Series when VRF microcode is loaded in CAM changed to 1-15.
Version 8.4.1.0	Introduced on E-Series ExaScale, C-Series, and S-Series.
Version 8.3.7.0	Introduced on S4810
Version 8.3.2.0	Introduced on E-Series TeraScale

Usage Information

The VRRP group only becomes active and sends VRRP packets when a link-local virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

E-Series ExaScale and TeraScale only: Starting in release 8.4.2.1, you can configure up to 255 VRRP groups per interface if VRF microcode is not loaded, and up to 15 groups if VRF microcode is loaded.

E-Series ExaScale and TeraScale only: Starting in release 8.4.2.1, the VRID used by the VRRP protocol changes according to whether VRF microcode is loaded or not:

- When VRF microcode is not loaded in CAM, the VRID for a VRRP group is the same as the VRID number configured with the **vrrp-group** or **vrrp-ipv6-group** command.
- When VRF microcode is loaded in CAM, the VRID for a VRRP group is equal to 16 times the **vrrp-group** or **vrrp-ipv6-group** *vid* number plus the **ip vrf vrf-id** number.

For example, if VRF microcode is loaded and VRRP group 10 is configured in VRF 2, the VRID used for the VRRP group is $(16 \times 10) + 2$, or 162. This VRID value is used in the lowest byte of the virtual MAC address of the VRRP group and is also used for VRF routing.

Important: You must configure the same VRID on neighboring routers (Dell Force10 or non-Dell Force10) in the same VRRP group in order for all routers to interoperate.

Related Commands

[virtual-address](#) Assign up to 12 virtual IP addresses per VRRP group.

S-Series Debugging and Diagnostics

The basic debugging and diagnostic commands are supported by FTOS on all Dell Force10 platforms, as indicated by the characters that appear under each of the command headings: **E** E-Series, **C** C-Series, **S** S-Series (S25/S50), **S4810**, or **S4820T**.

This chapter contains three sections:

- [Offline Diagnostic Commands](#)
- [Buffer Tuning Commands](#)
- [Hardware Commands](#)

Offline Diagnostic Commands

The offline diagnostics test suite is useful for isolating faults and debugging hardware. While tests are running, FTOS results are saved as a text file (TestReport-SU-X.txt) in the flash directory. This show file command is available only on master and standby.

Important Points to Remember

- Offline diagnostics can only be run when the unit is offline.
- You can only run offline diagnostics on a unit to which you are connected via console.
In other words, you cannot run diagnostics on a unit to which you are connected via a stacking link.
- Diagnostic results are printed to the screen. FTOS does not write them to memory.
- Diagnostics only test connectivity, not the entire data path.

The offline diagnostics commands are:

- [diag stack-unit](#)
- [offline stack-unit](#)
- [online stack-unit](#)

diag stack-unit



Run offline diagnostics on a stack unit.

Syntax

diag stack-unit *number* [**allelevels** | **level0** | **level1** | **level2**] *verbose testname*

Parameters

<i>number</i>	Enter the stack-unit number. Range: 0 to 7
allelevels	Enter the keyword allelevels to run the complete set of offline diagnostic tests.
level0	Enter the keyword level0 to run Level 0 diagnostics. Level 0 diagnostics check for the presence of various components and perform essential path verifications. In addition, they verify the identification registers of the components on the board.
level1	Enter the keyword Level1 to run Level 1 diagnostics. Level 1 diagnostics is a smaller set of diagnostic tests with support for automatic partitioning. They perform status/self test for all the components on the board and test their registers for appropriate values. In addition, they perform extensive tests on memory devices (e.g., SDRAM, flash, NVRAM, EEPROM, and CPLD) wherever possible. There are no tests on 10G links. At this level, stack ports are shut down automatically.
level2	Enter the keyword level2 to run Level 2 diagnostics. Level 2 diagnostics is a full set of diagnostic tests with no support for automatic partitioning. Level 2 diagnostics are used primarily for on-board loopback tests and more extensive component diagnostics. Various components on the board are put into loop back mode, and test packets are transmitted through those components. These diagnostics also perform snake tests using VLAN configurations. You must physically remove the unit from the stack to test 10G links.
verbose	Enter the keyword verbose to run the diagnostic in verbose mode. Verbose mode gives more information in the output than standard mode.
testname	Enter the keyword level2 to run a specific test case. Enclose the test case name in double quotes (“ ”). For example: diag stack-unit 1 level1 testname “first”

Defaults

None

Command Modes

EXEC Privilege

Command History

Version 8.3.1.0	Introduced the verbose option.
Version 7.7.1.0	Introduced on S-Series

offline stack-unit



Place a stack unit in the offline state.

Syntax

offline stack-unit *number*

Parameters

<i>number</i>	Enter the stack unit number. Range: 0 to 7
---------------	---

Defaults

None

Command Mode EXEC Privilege

Command History

Version 8.3.11.1	Introduced on Z9000
Version 8.2.1.0	Added warning message to off-line diagnostic
Version 7.7.1.0	Introduced on S-Series

Related Commands

show environment (S-Series)	View S-Series system component status (for example, temperature, voltage).
---	--

Usage Information

You cannot enter this command on a Master or Standby unit.

The system reboots when the off-line diagnostics complete. This is an automatic process. A warning message appears when the **offline stack-unit** command is implemented.

Warning - Diagnostic execution will cause stack-unit to reboot after completion of diags.

```
Proceed with Offline-Diags [confirm yes/no]:y
```

online stack-unit



Place a stack unit in the online state.

Syntax

online stack-unit *number*

Parameters

<i>number</i>	Enter the stack unit number. S4810 range: 0 to 11 S4820T range: 0 to 11 Z9000 range: 0 to 7
---------------	--

Defaults

None

Command Mode EXEC Privilege

Command History

Version 8.3.11.1	Introduced on Z9000
Version 7.7.1.0	Introduced on S-Series

Related Commands

show environment (S-Series)	View S-Series system component status (for example, temperature, voltage).
---	--

Buffer Tuning Commands

The buffer tuning commands are:

- [buffer \(Buffer Profile\)](#)
- [buffer \(Configuration\)](#)
- [buffer-profile \(Configuration\)](#)
- [buffer-profile \(Interface\)](#)
- [show buffer-profile](#)
- [show buffer-profile interface](#)



Warning: Altering the buffer allocations is a sensitive operation. Do not use any buffer tuning commands without first contacting the Dell Force10 Technical Assistance Center.

buffer (Buffer Profile)



Allocate an amount of dedicated buffer space, dynamic buffer space, or packet pointers to queues 0 to 3.

Syntax

buffer [**dedicated** | **dynamic** | **packets-pointers**] *queue0 number queue1 number queue2 number queue3 number*

Parameters

dedicated	Enter this keyword to configure the amount of dedicated buffer space per queue.
dynamic	Enter this keyword to configure the amount of dynamic buffer space per Field Processor.
packets-pointers	Enter this keyword to configure the number of packet pointers per queue.
queue0 number	Enter this keyword to allocate an amount of buffer space or packet pointers to Queue 0. Dedicated Buffer Range: 0-2013 Dynamic Buffer Range: FP: 0-2013 CSF: 0-131200 (in multiples of 80) Packet Pointer Range: 0-2047
queue1 number	Enter this keyword to allocate an amount of buffer space or packet pointers to Queue 1. Dedicated Buffer Range: 0-2013 Dynamic Buffer Range: FP: 0-2013 CSF: 0-131200 (in multiples of 80) Packet Pointer Range: 0-2047

	<i>queue2 number</i>	Enter this keyword to allocate an amount of buffer space or packet pointers to Queue 2. Dedicated Buffer Range: 0-2013 Dynamic Buffer Range: FP: 0-2013 CSF: 0-131200 (in multiples of 80) Packet Pointer Range: 0-2047
	<i>queue3 number</i>	Enter this keyword to allocate an amount of buffer space or packet pointers to Queue 3. Dedicated Buffer Range: 0-2013 Dynamic Buffer Range: FP: 0-2013 CSF: 0-131200 (in multiples of 80) Packet Pointer Range: 0-2047
Defaults	None	
Command Mode	BUFFER PROFILE	
Command History	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
Related Commands	buffer-profile (Configuration)	Create a buffer profile that can be applied to an interface.

buffer (Configuration)



Apply a buffer profile to all Field or Switch Fabric processors in a port-pipe.

buffer [*csf* | *fp-uplink*] **linecard** *slot* **port-set** *port-pipe* **buffer-policy** *buffer-profile*

Parameters	csf	Enter this keyword to apply a buffer profile to all Switch Fabric processors in a port-pipe.
	fp-uplink	Enter this keyword to apply a buffer profile to all Field Processors in a port-pipe.
	linecard <i>slot</i>	Enter the keyword linecard followed by the line card slot number.
	port-set <i>port-pipe</i>	Enter the keyword port-set followed by the port-pipe number. Range: 0-3 on C-Series, 0-1 on S-Series
	buffer-policy <i>buffer-profile</i>	Enter the keyword buffer-policy followed by the name of a buffer profile you created.

None

Command Mode BUFFER PROFILE

Usage Information	If you attempt to apply a buffer profile to a non-existent port-pipe, FTOS displays the following message. However, the configuration still appears in the running-config. %DIFFSERV-2-DSA_BUFF_CARVING_INVALID_PORT_SET: Invalid FP port-set 2 for linecard 2. Valid range of port-set is <0-1>	
Usage Information	When you remove a buffer-profile using the command <code>no buffer-profile [fp csf]</code> from CONFIGURATION mode, the buffer-profile name still appears in the output of <code>show buffer-profile [detail summary]</code> . After a line card reset, the buffer profile correctly returns to the default values, but the profile name remains. Remove it from the <code>show buffer-profile [detail summary]</code> command output by entering <code>no buffer [fp-uplink csf] linecard port-set buffer-policy</code> from CONFIGURATION mode and <code>no buffer-policy</code> from INTERFACE mode.	
Command History	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
Related Commands	buffer-profile (Configuration)	Create a buffer profile that can be applied to an interface.

buffer-profile (Configuration)



Create a buffer profile that can be applied to an interface.

Syntax

buffer-profile { { **fp** | **csf** } *profile-name* | **global** { **1Q**|**4Q** }

Parameters

fp	Enter this keyword to create a buffer profile for the Field Processor.
csf	Enter this keyword to create a buffer profile for the Switch Fabric Processor.
<i>profile-name</i>	Create a name for the buffer profile.
global	Apply one of two pre-defined buffer profiles to all of the port-pipes in the system.
1Q	Enter this keyword to choose a pre-defined buffer profile for single queue (i.e non-QoS) applications.
4Q	Enter this keyword to choose a pre-defined buffer profile for four queue (i.e QoS) applications.

Defaults

global 4Q

Command Mode

CONFIGURATION

Command History

Version 7.8.1.0	Added global keyword.
Version 7.7.1.0	Introduced on S-Series
Version 7.6.1.0	Introduced on C-Series

Related Commands	buffer (Buffer Profile)	Allocate an amount of dedicated buffer space, dynamic buffer space, or packet pointers to queues 0 to 3.
-------------------------	---	--

Usage Information

The **buffer-profile global** command fails if you have already applied a custom buffer-profile on an interface. Similarly, when **buffer-profile global** is configured, you cannot not apply buffer-profile on any interface.

If the default buffer-profile (4Q) is active, FTOS displays an error message instructing you to remove the default configuration using the command **no buffer-profile global**.

You must reload the system for the global buffer-profile to take effect.

buffer-profile (Interface)



Apply a buffer profile to an interface.

Syntax `buffer-profile profile-name`

Parameters	<i>profile-name</i>	Enter the name of the buffer profile you want to apply to the interface.
-------------------	---------------------	--

Defaults None

Command Mode INTERFACE

Command History	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series

Related Commands	buffer-profile (Configuration)	Create a buffer profile that can be applied to an interface.
-------------------------	--	--

show buffer-profile



Display the buffer profile that is applied to an interface.

Syntax `show buffer-profile { detail | summary } { csf | fp-uplink }`

Parameters	detail	Display the buffer allocations of the applied buffer profiles.
	summary	Display the buffer-profiles that are applied to line card port-pipes in the system.
	csf	Display the Switch Fabric Processor buffer profiles that you have applied to line card port-pipes in the system.
	fp-uplink	Display the Field Processor buffer profiles that you have applied to line card port-pipes in the system.

Defaults	None	
Command Mode	INTERFACE	
Command History	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
Example	<pre>FTOS#show buffer-profile summary fp-uplink Linecard Port-set Buffer-profile 0 0 test1 4 0 test2 FTOS#</pre>	
Related Commands	buffer-profile (Configuration)	Create a buffer profile that can be applied to an interface.

show buffer-profile interface



Display the buffer profile that is applied to an interface.

Syntax	show buffer-profile { detail summary } interface <i>interface slot/port</i>	
Parameters	detail	Display the buffer allocations of a buffer profile.
	summary	Display the Field Processors and Switch Fabric Processors that are applied to line card port-pipes in the system.
	interface <i>interface</i>	Enter the keyword interface followed by the interface type, either gigabitethernet or tengigabitethernet .
	<i>slot/port</i>	Enter the slot and port number of the interface.
Defaults	None	
Command Mode	INTERFACE	
Command History	Version 7.7.1.0	Introduced on S-Series
	Version 7.6.1.0	Introduced on C-Series
Example	<pre>FTOS#show buffer-profile detail csf linecard 4 port-set 0 Linecard 4 Port-set 0 Buffer-profile test Queue# Dedicated Buffer Buffer Packets (Bytes) 0 36960 718 1 18560 358 2 18560 358 3 18560 358 4 9600 64 5 9600 64 6 9600 64 7 9600 63 FTOS#</pre>	

**Related
Commands**

[buffer-profile
\(Configuration\)](#)

Create a buffer profile that can be applied to an interface.

Hardware Commands

These commands display information from a hardware sub-component or ASIC.

The commands are:

- [clear hardware stack-unit](#)
- [clear hardware system-flow](#)
- [hardware watchdog](#)
- [show hardware layer2 acl](#)
- [show hardware layer3](#)
- [show hardware stack-unit](#)
- [show hardware system-flow](#)

clear hardware stack-unit



Clear statistics from selected hardware components.

Syntax

clear hardware stack-unit *0-7* { counters | unit *0-1* counters | cpu data-plane statistics | cpu party-bus statistics | stack-port *0-52* }

Parameters

stack-unit <i>0-7</i>	Enter the keyword stack-unit followed by 0 to 7 to select a particular stack member and then enter one of the following command options to clear a specific collection of data.
counters	Enter the keyword counters to clear the counters on the selected stack member.
unit <i>0-1</i> counters	Enter the keyword unit along with a port-pipe number, from 0 to 1, followed by the keyword counters to clear the counters on the selected port-pipe. Note: S25 models (S25N, S25P, S25V, etc.) have only port-pipe 0.
cpu data-plane statistics	Enter the keywords cpu data-plane statistics to clear the data plane statistics.
cpu party-bus statistics	Enter the keywords cpu party-bus statistics to clear the management statistics.
stack-port <i>0-52</i>	Enter the keyword stack-port followed by the port number of the stacking port to clear the statistics of the particular stacking port. Range: 0 to 52 Note: You can identify stack port numbers by physical inspection of the rear modules. The numbering is the same as for the 10G ports. You can also inspect the output of the show system stack-ports command.

Defaults	No default behavior or values	
Command Modes	EXEC Privilege	
Command History	Version 7.8.1.0	Introduced on S-Series
Related Commands	show hardware stack-unit	Display the data plane or management plane input and output statistics of the designated component of the designated stack member.

clear hardware system-flow



Clear system-flow statistics from selected hardware components.

Syntax	clear hardware system-flow layer2 stack-unit <i>0-7</i> port-set <i>0-1</i> counters	
Parameters	stack-unit <i>0-7</i>	Enter the keyword stack-unit followed by 0 to 7 to select a particular stack member and then enter one of the following command options to clear a specific collection of data.
	port-set <i>0-1</i> counters	Enter the keyword port-set along with a port-pipe number, from 0 to 1, followed by the keyword counters to clear the system-flow counters on the selected port-pipe. Note: S25 models (S25N, S25P, S25V, etc.) have only port-pipe 0.
Defaults	No default behavior or values	
Command Modes	EXEC Privilege	
Command History	Version 7.8.1.0	Introduced on S-Series
Related Commands	show hardware stack-unit	Display the data plane or management plane input and output statistics of the designated component of the designated stack member.

hardware watchdog



Set the watchdog timer to trigger a reboot and restart the system.

Syntax	hardware watchdog	
Defaults	Enabled	
Command Mode	CONFIGURATION	
Command History	Version 7.8.1.0	Introduced

Usage Information

This command enables a hardware watchdog mechanism that automatically reboots an FTOS switch/router with a single unresponsive unit. This is a last resort mechanism intended to prevent a manual power cycle.

show hardware layer2 acl

S

Display Layer 2 ACL data for the selected stack member and stack member port-pipe.

Syntax

show hardware layer2 acl stack-unit *0-7* port-set *0-1*

Parameters

stack-unit <i>0-7</i>	Enter the keyword stack-unit followed by 0 to 7 to select a stack ID.
port-set <i>0-1</i>	Enter the keyword port-set with a port-pipe number — 0 or 1. The S25 models of the S-Series have only port-pipe 0.

Defaults

No default behavior

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0 Introduced on S-Series

show hardware layer3

S

Display Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.

Syntax

show hardware layer3 {acl | qos} stack-unit *0-7* port-set *0-1*

Parameters

acl qos	Enter either the keyword acl or the keyword qos to select between ACL or QoS data.
stack-unit <i>0-7</i>	Enter the keyword stack-unit followed by a numeral from 0 to 7 to select a stack ID.
port-set <i>0-1</i>	Enter the keyword port-set with a port-pipe number — 0 or 1. The S25 models of the S-Series have only port-pipe 0.

Defaults

No default behavior

Command Modes

EXEC Privilege

Command History

Version 7.8.1.0 Introduced on S-Series

show hardware stack-unit



Display the data plane or management plane input and output statistics of the designated component of the designated stack member.

Syntax

```
show hardware stack-unit 0-7 {buffer [buffer unit | port [(0-27) | all] total buffer | buffer unit
(1) port (0-64) queue [(0-14) | a11] buffer-info} {cpu data-plane statistics [stack-port
0-52] | cpu party-bus statistics | drops [unit 0-1 [port 0-27]] | stack-port 0-52 | unit 0-1
{counters | details | port-stats [detail] | register}}
```

Parameters

stack-unit 0-7 { <i>command-option</i> }	Enter the keyword stack-unit followed by 0 to 7 to select a particular stack member and then enter one of the following command options to display a collection of data based on the option entered.
buffer	Enter the keyword buffer , optionally followed by the keywords total-buffer to show the total buffer statistics per stack unit. Enter the keywords buffer unit then total-buffer to display the buffer details per unit and mode of allocation. To display the forwarding plane statistics containing the packet buffer usage per port per stack unit, enter the keywords buffer unit followed by port and the port number (0-64 or all), then buffer-info . To display the forwarding plane statistics containing the packet buffer statistics per COS per port, enter the keywords buffer unit and port (0-64), and queue (0-14 or all), and buffer-info . Buffer unit default: 1
cpu data-plane statistics	Enter the keywords cpu data-plane statistics , optionally followed by the keywords stack port and its number — 0 to 52 — to display the data plane statistics, which shows the High Gig (Higig) port raw input/output counter statistics to which the stacking module is connected.
cpu party-bus statistics	Enter the keywords cpu party-bus statistics , to display the Management plane input/output counter statistics of the pseudo party bus interface.
drops [unit 0-1 [port 0-27]]	Enter the drops keyword to display internal drops on the selected stack member. Optionally, use the unit keyword with 0 or 1 to select port-pipe 0 or 1, and then use port 0-27 to select a port on that port-pipe.
stack-port 0-52	Enter this keyword and a stacking port number to select a stacking port for which to display statistics. Identify the stack port number as you would to identify a 10G port that was in the same place in one of the rear modules. Note: You can identify stack port numbers by physical inspection of the rear modules. The numbering is the same as for the 10G ports. You can also inspect the output of the show system stack-ports command.
unit 0-1 {counters details port-stats [detail] register}	Enter the unit keyword followed by 0 or 1 for port-pipe 0 or 1, and then enter one of the following keywords to troubleshoot errors on the selected port-pipe and to give status on why a port is not coming up to register level: counters , details , port-stats [detail] , or register

Defaults

No default behavior

Command Modes

EXEC

EXEC Privilege

Command History

Version 8.3.19.0	Added the <code>buffer</code> parameter for S4820T
Version 8.3.10.0	Added the <code>buffer</code> parameter for S4810
Version 7.8.1.0	Modified: <code>stack-port</code> keyword range expanded from 49-52 to 0-52; output modified for the <code>cpu data-plane statistics</code> option; the following options were added: <code>drops [unit 0-1 [port 0-27]]</code> ; <code>unit 0-1 {counters details port-stats [detail] register}</code>
Version 7.7.1.0	Introduced on S-Series

Example (data plane statistics)

```
FTOS#show hardware stack-unit 0 cpu data-plane statistics stack-port 49
Input Statistics:
  1856 packets, 338262 bytes
  141 64-byte pkts, 1248 over 64-byte pkts, 11 over 127-byte pkts
  222 over 255-byte pkts, 236 over 511-byte pkts, 0 over 1023-byte pkts
  919 Multicasts, 430 Broadcasts
  0 runts, 0 giants, 0 throttles
  0 CRC, 0 overrun, 0 discarded
Output Statistics:
  325 packets, 27629 bytes, 0 underruns
  9 64-byte pkts, 310 over 64-byte pkts, 1 over 127-byte pkts
  1 over 255-byte pkts, 2 over 511-byte pkts, 2 over 1023-byte pkts
  0 Multicasts, 3 Broadcasts, 322 Unicasts
  0 throttles, 0 discarded, 0 collisions
Rate info (interval 299 seconds):
  Input 00.00 Mbits/sec
  Output 00.00 Mbits/sec
FTOS#
```

Example (party-bus statistics)

```
FTOS#show hardware stack-unit 0 cpu party-bus statistics
Input Statistics:
  8189 packets, 8076608 bytes
  0 dropped, 0 errors
Output Statistics:
  366 packets, 133100 bytes
  0 errors
FTOS#
```

Example (drop summary for switch)

```
FTOS#sh hard stack-unit 0 drops
UNIT No: 0
Total Ingress Drops: 0
Total IngMacDrops: 0
Total MmuDrops: 0
Total EgMacDrops: 0
Total Egress Drops: 0
FTOS#
```

Example (drop summary per port)

```
FTOS#sh hard stack-unit 0 drops unit 0

PortNumber Ingress Drops IngMac Drops Total Mmu Drops EgMac Drops Egress Drops
100 000
200 000
300 000
400 000
FTOS#
```

**Example
(drop counters
per port)**

```

FTOS#show hardware stack-unit 0 drops unit 1 port 27
  --- Ingress Drops      ---
Ingress Drops           : 0
IBP CBP Full Drops     : 0
PortSTPnotFwd Drops    : 0
IPv4 L3 Discards       : 0
Policy Discards        : 0
Packets dropped by FP   : 0
(L2+L3) Drops          : 0
Port bitmap zero Drops : 0
Rx VLAN Drops          : 0
  --- Ingress MAC counters---
Ingress FCS Drops      : 0
Ingress MTUExceeds    : 0
  --- MMU Drops          ---
HOL DROPS              : 0
TxPurge CellErr       : 0
Aged Drops             : 0
  --- Egress MAC counters---
Egress FCS Drops       : 0
  --- Egress FORWARD PROCESSOR Drops ---
IPv4 L3UC Aged & Drops : 0
TTL Threshold Drops    : 0
INVALID VLAN CNTR Drops : 0
L2MC Drops            : 0
PKT Drops of ANY Conditions : 0
Hg MacUnderflow        : 0
TX Err PKT Counter     : 0 25
FTOS#

```

**Example
(port-statistics)**

```

FTOS#show hardware stack-unit 0 unit 0 port-stats
      ena/  speed/  link  auto   STP      lrn  inter  max  loop
port  link  duplex  scan  neg?  state  pause  discrd  ops  face  frame  back
ge0   down  -       SW   Yes   Block  -      Untag  FA  SGMII  1554
ge1   !ena  -       SW   Yes   Block  -      Tag    FA  SGMII  1554
ge2   !ena  -       SW   Yes   Block  -      Tag    FA  SGMII  1554
ge3   !ena  -       SW   Yes   Block  -      Tag    FA  SGMII  1554
ge4   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge5   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge6   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge7   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge8   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge9   !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge10  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  9252
ge11  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  9252
ge12  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge13  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge14  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge15  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge16  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge17  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge18  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge19  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge20  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge21  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge22  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
ge23  !ena  -       SW   Yes   Forward  -     Tag    F   SGMII  1554
hg0   up    12G  FD   SW   No    Forward  -     None  F   XGMII  16360
hg1   up    12G  FD   SW   No    Forward  -     None  F   XGMII  16360
hg2   down  10G  FD   SW   No    Forward  -     None  F   XGMII  16360
hg3   down  10G  FD   SW   No    Forward  -     None  F   XGMII  16360
      0
FTOS#

```

Example
(unit 1 register)

```
FLOS#show hardware stack-unit 0 unit 1 register
0x0068003c AGINGCTRMEMDEBUG.mmu0 = 0x00000000
0x0068003d AGINGEXPMEMDEBUG.mmu0 = 0x00000000
0x00680017 ASFCONFIG.mmu0 = 0x0000000e
0x0060004c ASFPORTSPEED.ge0 = 0x00000000
0x0060104c ASFPORTSPEED.ge1 = 0x00000000
0x0060204c ASFPORTSPEED.ge2 = 0x00000000
0x0060304c ASFPORTSPEED.ge3 = 0x00000000
0x0060404c ASFPORTSPEED.ge4 = 0x00000000
0x0060504c ASFPORTSPEED.ge5 = 0x00000000
0x0060604c ASFPORTSPEED.ge6 = 0x00000000
0x0060704c ASFPORTSPEED.ge7 = 0x00000000
0x0060804c ASFPORTSPEED.ge8 = 0x00000000
0x0060904c ASFPORTSPEED.ge9 = 0x00000000
0x0060a04c ASFPORTSPEED.ge10 = 0x00000000
0x0060b04c ASFPORTSPEED.ge11 = 0x00000000
0x0060c04c ASFPORTSPEED.ge12 = 0x00000000
0x0060d04c ASFPORTSPEED.ge13 = 0x00000000
0x0060e04c ASFPORTSPEED.ge14 = 0x00000000
0x0060f04c ASFPORTSPEED.ge15 = 0x00000000
0x0061004c ASFPORTSPEED.ge16 = 0x00000000
0x0061104c ASFPORTSPEED.ge17 = 0x00000000
0x0061204c ASFPORTSPEED.ge18 = 0x00000000
0x0061304c ASFPORTSPEED.ge19 = 0x00000000
0x0061404c ASFPORTSPEED.ge20 = 0x00000000
0x0061504c ASFPORTSPEED.ge21 = 0x00000000
0x0061604c ASFPORTSPEED.ge22 = 0x00000000
0x0061704c ASFPORTSPEED.ge23 = 0x00000005
0x0061804c ASFPORTSPEED.hg0 = 0x00000007
0x0061904c ASFPORTSPEED.hg1 = 0x00000007
0x0061a04c ASFPORTSPEED.hg2 = 0x00000000
0x0061b04c ASFPORTSPEED.hg3 = 0x00000000
0x0061c04c ASFPORTSPEED.cpu0 = 0x00000000
0x00780000 AUX_ARB_CONTROL.ipipe0 = 0x0000001c
0x0e700102 BCAST_BLOCK_MASK.ge0 = 0x00000000
0x0e701102 BCAST_BLOCK_MASK.ge1 = 0x00000000
0x0e702102 BCAST_BLOCK_MASK.ge2 = 0x00000000
0x0e703102 BCAST_BLOCK_MASK.ge3 = 0x00000000
0x0e704102 BCAST_BLOCK_MASK.ge4 = 0x00000000
0x0e705102 BCAST_BLOCK_MASK.ge5 = 0x00000000
0x0e706102 BCAST_BLOCK_MASK.ge6 = 0x00000000
0x0e707102 BCAST_BLOCK_MASK.ge7 = 0x00000000
0x0e708102 BCAST_BLOCK_MASK.ge8 = 0x00000000
0x0e709102 BCAST_BLOCK_MASK.ge9 = 0x00000000
0x0e70a102 BCAST_BLOCK_MASK.ge10 = 0x00000000
0x0e70b102 BCAST_BLOCK_MASK.ge11 = 0x00000000
0x0e70c102 BCAST_BLOCK_MASK.ge12 = 0x00000000
0x0e70d102 BCAST_BLOCK_MASK.ge13 = 0x00000000
0x0e70e102 BCAST_BLOCK_MASK.ge14 = 0x00000000
0x0e70f102 BCAST_BLOCK_MASK.ge15 = 0x00000000
0x0e710102 BCAST_BLOCK_MASK.ge16 = 0x00000000
0x0e711102 BCAST_BLOCK_MASK.ge17 = 0x00000000
0x0e712102 BCAST_BLOCK_MASK.ge18 = 0x00000000
0x0e713102 BCAST_BLOCK_MASK.ge19 = 0x00000000
0x0e714102 BCAST_BLOCK_MASK.ge20 = 0x00000000
0x0e715102 BCAST_BLOCK_MASK.ge21 = 0x00000000
0x0e716102 BCAST_BLOCK_MASK.ge22 = 0x00000000
0x0e717102 BCAST_BLOCK_MASK.ge23 = 0x00000000
0x0e718102 BCAST_BLOCK_MASK.hg0 = 0x00000000
0x0e719102 BCAST_BLOCK_MASK.hg1 = 0x00000000
0x0e71a102 BCAST_BLOCK_MASK.hg2 = 0x00000000
0x0e71b102 BCAST_BLOCK_MASK.hg3 = 0x00000000
```

**Example
(unit details)**

```

0x0e71c102 BCAST_BLOCK_MASK.cpu0 = 0x00000000
0x0b700001 BCAST_STORM_CONTROL.ge0 = 0x00000000
0x0b701001 BCAST_STORM_CONTROL.ge1 = 0x00000000
0x0b702001 BCAST_STORM_CONTROL.ge2 = 0x00000000
0x0b703001 BCAST_STORM_CONTROL.ge3 = 0x00000000
0x0b704001 BCAST_STORM_CONTROL.ge4 = 0x00000000
0x0b705001 BCAST_STORM_CONTROL.ge5 = 0x00000000
0x0b706001 BCAST_STORM_CONTROL.ge6 = 0x00000000
0x0b707001 BCAST_STORM_CONTROL.ge7 = 0x00000000
0x0b708001 BCAST_STORM_CONTROL.ge8 = 0x00000000
0x0b709001 BCAST_STORM_CONTROL.ge9 = 0x00000000
0x0b70a001 BCAST_STORM_CONTROL.ge10 = 0x00000000
!----- output truncated -----!

```

```

FTOS#

```

```

show hardware stack-unit 0 unit 1 details

```

```

*****

```

```

The total no of FP & CSF Devices in the Card is 2

```

```

The total no of FP Devices in the Card is 2

```

```

The total no of CSF Devices in the Card is 0

```

```

The number of ports in device 0 is - 24

```

```

The number of Hg ports in devices 0 is - 4

```

```

The CPU Port of the device is 28

```

```

The number of ports in device 1 is - 24

```

```

The number of Hg ports in devices 1 is - 4

```

```

The CPU Port of the device is 28

```

```

The staring unit no the SWF in the device is 0

```

```

*****

```

```

The Current Link Status Is

```

```

Front End Link Status          0x000000000000400000000000

```

```

Front End Port Present Status 0x000000000000000000000000

```

```

Back Plane Link Status        0x00000000

```

```

*****

```

```

Link Status of all the ports in the Device - 1

```

```

The linkStatus of Front End Port 0 is FALSE

```

```

The linkStatus of Front End Port 1 is FALSE

```

```

The linkStatus of Front End Port 2 is FALSE

```

```

The linkStatus of Front End Port 3 is FALSE

```

```

The linkStatus of Front End Port 4 is FALSE

```

```

The linkStatus of Front End Port 5 is FALSE

```

```

The linkStatus of Front End Port 6 is FALSE

```

```

The linkStatus of Front End Port 7 is FALSE

```

```

The linkStatus of Front End Port 8 is FALSE

```

```

The linkStatus of Front End Port 9 is FALSE

```

```

The linkStatus of Front End Port 10 is FALSE

```

```

The linkStatus of Front End Port 11 is FALSE

```

```

The linkStatus of Front End Port 12 is FALSE

```

```

The linkStatus of Front End Port 13 is FALSE

```

```

The linkStatus of Front End Port 14 is FALSE

```

```

The linkStatus of Front End Port 15 is FALSE

```

```

The linkStatus of Front End Port 16 is FALSE

```

```

The linkStatus of Front End Port 17 is FALSE

```

```

The linkStatus of Front End Port 18 is FALSE

```

```

The linkStatus of Front End Port 19 is FALSE

```

```

The linkStatus of Front End Port 20 is FALSE

```



```

The linkStatus of Front End Port 21 is FALSE
The linkStatus of Front End Port 22 is FALSE
The linkStatus of Front End Port 23 is TRUE
The linkStatus of Hg Port 24 is TRUE
The linkStatus of Hg Port 25 is TRUE
The linkStatus of Hg Port 26 is FALSE
The linkStatus of Hg Port 27 is FALSE
!----- output truncated -----!

FTOS(conf)#sh hardware stack-unit 0 buffer total-buffer

FTOS#sh hardware stack-unit 0 buffer total-buffer
----- Buffer Details for Stack-Unit 0 -----
Total Buffers allocated per Stack-Unit 46080

```

**Example
(Per Stack Unit
buffer statistics)**

```

FTOS(conf)#sh hardware stack-unit 0 buffer unit 0 port 1 buffer-info
----- Buffer Stats for Unit 0 Port 1 -----
Maximum Shared Limit for the Port: 30720
Default Packet Buffer allocate for the Port: 120
Used Packet Buffer for the Port: 0

```

**Example
(Per Port buffer
statistics for
specific port)**

```

FTOS(conf)#sh hardware stack-unit 0 buffer unit 0 port 1 queue 2 buffer-info

----- Buffer Stats for Unit 0 Port 1 Queue 2 -----
Maximum Shared Limit: 30720
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0

```

**Example
(Queue buffer
statistics)**

**Related
Commands**

clear hardware system-flow	Clear statistics from selected hardware components.
show interfaces stack-unit	Display information on all interfaces on a specific S-Series stack member.
show processes cpu (S-Series)	Display CPU usage information based on processes running in an S-Series.
show system stack-ports	Display information about the stacking ports on all switches in the S-Series stack.
show system (S-Series, S4810 and S4820T)	Display the current status of all stack members or a specific member.

show hardware system-flow



Display Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.

Syntax

```
show hardware system-flow layer2 stack-unit 0-7 port-set 0-1 [counters]
```

Parameters

acl qos	For the selected stack member and stack member port-pipe, display which system flow entry the packet hits and what queue the packet takes as it dumps the raw system flow tables.
-----------	---

stack-unit 0-7	Enter the keyword stack-unit followed by 0 to 7 to select a stack member ID.
port-set 0-1 [counters]	Enter the keyword port-set with a port-pipe number — 0 or 1. The S25 models of the S-Series have only port-pipe 0. (OPTIONAL) Enter the keyword counters to display hit counters for the selected ACL or QoS option.

Defaults No default behavior

Command Modes EXEC Privilege

Command History
Version 7.8.1.0 Introduced on S-Series

**Example
(layer2 counters)**

```
FTOS#show hardware system-flow layer2 stack-unit 0 port-set 0 counters
```

```
-----
```

EntryId	Description	#HITS
2048	STP BPDU Redirects	0
2047	LLDP BPDU Redirects	0
2045	LACP traffic Redirects	0
2044	GVRP traffic Redirects	0
2043	ARP Reply Redirects	0
2042	802.1x frames Redirects	0
2041	VRRP frames Redirects	0
2040	GRAT ARP	0
2039	DROP Cases	0
2038	OSPF1 STUB	0
2037	OSPF2 STUB	0
2036	VRRP STUB	0
2035	L2_DST_HIT+BC MAC+VLAN 4095	0
2034	L2_DST_HIT+BC MAC	0
2033	Catch all	0
384	OSPF[224.0.0.5] Packets	0
383	OSPF[224.0.0.6] Packets	0
382	VRRP Packets	0
380	BCast L2_DST_HIT on VLAN 4095	0
379	BCAST L2_DST_HIT Packets	0
4	Unknown L2MC Packets	0
3	L2DLF Packets	0
2	L2UCAST Packets	0
1	L2BCASTPackets	0
25		

```
FTOS#
```

**Example
(layer2 non-counters)**

```
FTOS#show hardware system-flow layer2 stack-unit 0 port-set 0
```

```
##### FP Entry for redirecting STP BPDU to CPU Port #####
EID 2048: gid=1,
        slice=15, slice_idx=0x00, prio=0x800, flags=0x82, Installed
        tcam: color_indep=0,          higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 00000000 00000000 00000000 , FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000 ,      0x00
        action={act=Drop, param0=0(0x00), param1=0(0x00)},
        action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
        action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
        action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
        meter=NULL,
        counter={idx=0, mode=0x01, entries=1}

##### FP Entry for redirecting LLDP BPDU to RSM #####
EID 2047: gid=1,
```

```

slice=15, slice_idx=0x01, prio=0x7ff, flags=0x82, Installed
  tcam: color_indep=0,          higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 000e0000 00000000 00000000 , FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000 ,      0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
  meter=NULL,
  counter={idx=1, mode=0x01, entries=1}

##### FP Entry for redirecting LACP traffic to CPU Port #####
EID 2045: gid=1,
  slice=15, slice_idx=0x02, prio=0x7fd, flags=0x82, Installed
  tcam: color_indep=0,          higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 00020000 00000000 00000000 , FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000 ,      0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
  meter=NULL,
  counter={idx=2, mode=0x01, entries=1}

##### FP Entry for redirecting GVRP traffic to RSM #####
EID 2044: gid=1,
  slice=15, slice_idx=0x03, prio=0x7fc, flags=0x82, Installed
  tcam: color_indep=0,          higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 00210000 00000000 00000000 , FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000 ,      0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
  meter=NULL,
  counter={idx=3, mode=0x01, entries=1}

##### FP Entry for redirecting ARP Replies to RSM #####
EID 2043: gid=1,
  slice=15, slice_idx=0x04, prio=0x7fb, flags=0x82, Installed
  tcam: color_indep=0,          higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 00000000 00000000 00000806 00001600 , FPF4=0x00
        MASK=0x00000000 00000000 00000000 00000000 00000000 0000ffff 00001600 ,      0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=6(0x06), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
!----- output truncated -----!

```


SNMP Traps

This chapter lists the traps sent by FTOS. Each trap is listed by the fields Message ID, Trap Type, and Trap Option, and the next is the message(s) associated with the trap.

Table 60-1. SNMP Traps and Error Messages

Message ID	Trap Type	Trap Option
COLD_START	SNMP	COLDSTART
%SNMP-5-SNMP_COLD_START: SNMP COLD_START trap sent.		
WARM_START	SNMP	WARMSTART
COPY_CONFIG_COMPLETE		
COPY_CONFIG_COMPLETE	SNMP	NONE
SNMP Copy Config Command Completed		
LINK_DOWN	SNMP	LINKDOWN
%IFA-1-PORT_LINKDN: changed interface state to down:%d		
LINK_UP	SNMP	LINKUP
%IFA-1-PORT_LINKUP: changed interface state to up:%d		
AUTHENTICATION_FAIL	SNMP	AUTH
%SNMP-3-SNMP_AUTH_FAIL: SNMP Authentication failed.Request with invalid community string.		
EGP_NEIGHBOR_LOSS	SNMP	NONE
OSTATE_DOWN		
OSTATE_DOWN	SNMP	LINKDOWN
%IFM-1-OSTATE_DN: changed interface state to down:%s %IFM-5-CSTATE_DN:Changed interface Physical state to down: %s		
OSTATE_UP	SNMP	LINKUP
%IFM-1-OSTATE_UP: changed interface state to up:%s %IFM-5-CSTATE_UP: Changed interface Physical state to up: %s		
RMON_RISING_THRESHOLD	SNMP	NONE
%RPM0-P:CP %SNMP-4-RMON_RISING_THRESHOLD: RMON rising threshold alarm from SNMP OID <oid>		

Table 60-1. SNMP Traps and Error Messages (continued)

Message ID	Trap Type	Trap Option
RMON_FALLING_THRESHOLD	SNMP	NONE
%RPM0-P:CP %SNMP-4-RMON_FALLING_THRESHOLD: RMON falling threshold alarm from SNMP OID <oid>		
RMON_HC_RISING_THRESHOLD	SNMP	NONE
%RPM0-P:CP %SNMP-4-RMON_HC_RISING_THRESHOLD: RMON high-capacity rising threshold alarm from SNMP OID <oid>		
RMON_HC_FALLING_THRESHOLD	SNMP	NONE
%RPM0-P:CP %SNMP-4-RMON_HC_FALLING_THRESHOLD: RMON high-capacity falling threshold alarm from SNMP OID <oid>		
RESV	NONE	NONE
N/A		
CHM_CARD_DOWN	ENVMON	NONE
%CHMGR-1-CARD_SHUTDOWN: %sLine card %d down - %s %CHMGR-2-CARD_DOWN: %sLine card %d down - %s		
CHM_CARD_UP	ENVMON	NONE
%CHMGR-5-LINECARDUP: %sLine card %d is up		
CHM_CARD_MISMATCH	ENVMON	NONE
%CHMGR-3-CARD_MISMATCH: Mismatch: line card %d is type %s - type %s required.		
CHM_CARD_PROBLEM	ENVMON	NONE
CHM_ALARM_CUTOFF	ENVMON	NONE
CHM_SFM_UP	ENVMON	NONE
CHM_SFM_DOWN	ENVMON	NONE
CHM_RPM_UP	ENVMON	NONE
%RAM-6-RPM_STATE: RPM1 is in Active State %RAM-6-RPM_STATE: RPM0 is in Standby State		
CHM_RPM_DOWN	ENVMON	NONE
%CHMGR-2-RPM_DOWN: RPM 0 down - hard reset %CHMGR-2-RPM_DOWN: RPM 0 down - card removed		
CHM_RPM_PRIMARY	ENVMON	NONE
%RAM-5-COLD_FAILOVER: RPM Failover Completed %RAM-5-HOT_FAILOVER: RPM Failover Completed %RAM-5-FAST_FAILOVER: RPM Failover Completed		
CHM_SFM_ADD	ENVMON	NONE
%TSM-5-SFM_DISCOVERY: Found SFM 1		
CHM_SFM_REMOVE	ENVMON	NONE

Table 60-1. SNMP Traps and Error Messages (continued)

Message ID	Trap Type	Trap Option
%TSM-5-SFM_REMOVE: Removed SFM 1		
CHM_MAJ_SFM_DOWN	ENVMON	NONE
%CHMGR-0-MAJOR_SFM: Major alarm: Switch fabric down		
CHM_MAJ_SFM_DOWN_CLR	ENVMON	NONE
%CHMGR-5-MAJOR_SFM_CLR: Major alarm cleared: Switch fabric up		
CHM_MIN_SFM_DOWN	ENVMON	NONE
%CHMGR-2-MINOR_SFM: Minor alarm: No working standby SFM		
CHM_MIN_SFM_DOWN_CLR	ENVMON	NONE
%CHMGR-5-MINOR_SFM_CLR: Minor alarm cleared: Working standby SFM present		
CHM_PWRSRC_DOWN	ENVMON	SUPPLY
%CHMGR-2-PEM_PRBLM: Major alarm: problem with power entry module %s		
CHM_PWRSRC_CLR	ENVMON	SUPPLY
%CHMGR-5-PEM_OK: Major alarm cleared: power entry module %s is good		
CHM_MAJ_ALARM_PS	ENVMON	SUPPLY
%CHMGR-0-MAJOR_PS: Major alarm: insufficient power %s		
CHM_MAJ_ALARM_PS_CLR	ENVMON	SUPPLY
%CHMGR-5-MAJOR_PS_CLR: major alarm cleared: sufficient power		
CHM_MIN_ALARM_PS	ENVMON	SUPPLY
%CHMGR-1-MINOR_PS: Minor alarm: power supply non-redundant		
CHM_MIN_ALARM_PS_CLR	ENVMON	SUPPLY
%CHMGR-5-MINOR_PS_CLR: Minor alarm cleared: power supply redundant		
CHM_MIN_ALRM_TEMP	ENVMON	TEMP
%CHMGR-2-MINOR_TEMP: Minor alarm: chassis temperature		
CHM_MIN_ALRM_TEMP_CLR	ENVMON	TEMP
%CHMGR-5-MINOR_TEMP_CLR: Minor alarm cleared: chassis temperature normal (%s %d temperature is within threshold of %dC)		
CHM_MAJ_ALRM_TEMP	ENVMON	TEMP
%CHMGR-2-MAJOR_TEMP: Major alarm: chassis temperature high (%s temperature reaches or exceeds threshold of %dC)		
CHM_MAJ_ALRM_TEMP_CLR	ENVMON	TEMP
%CHMGR-2-MAJOR_TEMP_CLR: Major alarm cleared: chassis temperature lower (%s %d temperature is within threshold of %dC)		
CHM_FANTRAY_BAD	ENVMON	FAN
For E1200: %CHMGR-2-FAN_TRAY_BAD: Major alarm: fan tray %d is missing or down %CHMGR-2-ALL_FAN_BAD: Major alarm: all fans in fan tray %d are down. For E600 and E300: %CHMGR-2-FANTRAYBAD: Major alarm: fan tray is missing %CHMGR-2-FANSBAD: Major alarm: most or all fans in fan tray are down		

Table 60-1. SNMP Traps and Error Messages (continued)

Message ID	Trap Type	Trap Option
CHM_FANTRAY_BAD_CLR	ENVMON	FAN
For the E1200: %CHMGR-5-FAN_TRAY_OK: Major alarm cleared: fan tray %d present For the E600 and E300: %CHMGR-5-FANTRAYOK: Major alarm cleared: fan tray present		
CHM_MIN_FANBAD	ENVMON	FAN
For the E1200: %CHMGR-2-FAN_BAD: Minor alarm: some fans in fan tray %d are down For the E600 and E300: %CHMGR- 2-1FANBAD: Minor alarm: fan in fan tray is down		
CHM_MIN_FANBAD_CLR	ENVMON	FAN
For E1200: %CHMGR-2-FAN_OK: Minor alarm cleared: all fans in fan tray %d are good For E600 and E300: %CHMGR-5-FANOK: Minor alarm cleared: all fans in fan tray are good		
TME_TASK_SUSPEND	ENVMON	NONE
%TME-2-TASK SUSPENDED: SUSPENDED - svce:%d - inst:%d - task:%s		
TME_TASK_TERM	ENVMON	NONE
%TME-2-ABNORMAL_TASK_TERMINATION: CRASH - task:%s %s		
CHM_CPU_THRESHOLD	ENVMON	NONE
%CHMGR-5-CPU_THRESHOLD: Cpu %s usage above threshold. Cpu5SecUsage (%d)		
CHM_CPU_THRESHOLD_CLR	ENVMON	NONE
%CHMGR-5-CPU_THRESHOLD_CLR: Cpu %s usage drops below threshold. Cpu5SecUsage (%d)		
CHM_MEM_THRESHOLD	ENVMON	NONE
%CHMGR-5-MEM_THRESHOLD: Memory %s usage above threshold. MemUsage (%d)		
CHM_MEM_THRESHOLD_CLR	ENVMON	NONE
%CHMGR-5-MEM_THRESHOLD_CLR: Memory %s usage drops below threshold. MemUsage (%d)		
MACMGR_STN_MOVE	ENVMON	NONE
%MACMGR-5-DETECT_STN_MOVE: Station Move threshold exceeded for Mac %s in vlan %d		
VRRP_BADAUTH	PROTO	NONE
%RPM1-P:RP2 %VRRP-3-VRRP_BAD_AUTH: vrid-1 on Gi 11/12 rcvd pkt with authentication type mismatch. %RPM1-P:RP2 %VRRP-3-VRRP_BAD_AUTH: vrid-1 on Gi 11/12 rcvd pkt with authentication failure.		
VRRP_GO_MASTER	PROTO	NONE
%VRRP-6-VRRP_MASTER: vrid-%d on %s entering MASTER		
VRRP_PROTOCOL_ERROR	PROTO	NONE
VRRP_PROTOERR: VRRP protocol error on %S		
BGP4_ESTABLISHED	PROTO	NONE
%TRAP-5-PEER_ESTABLISHED: Neighbor %a, state %s		
BGP4_BACKW_XSITION	PROTO	NONE
%TRAP-5-BACKWARD_STATE_TRANS: Neighbor %a, state %s		