

Dell PowerEdge FN IO Module

Command Line Reference Guide

9.13.0.0

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Copyright © 2017 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

1 About this Guide.....	46
Objectives.....	46
Audience.....	46
Conventions.....	46
Information Icons.....	47
2 Before You Start.....	48
Operational Modes.....	48
Default Settings.....	49
Other Auto-Configured Settings.....	49
DCB Support.....	49
FCoE Connectivity.....	50
iSCSI Operation.....	50
Link Aggregation.....	50
Uplink Failure Detection.....	50
VLANs.....	50
Where to Go From Here.....	52
3 CLI Basics.....	53
Accessing the Command Line.....	53
Multiple Configuration Users.....	53
Navigating the CLI.....	54
Obtaining Help.....	54
Using the Keyword no Command.....	56
Filtering show Commands.....	56
Command Modes.....	57
Track Login Activity.....	59
Restrictions for Tracking Login Activity.....	59
Configuring Login Activity Tracking.....	59
Display Login Statistics.....	59
Limit Concurrent Login Sessions.....	60
Restrictions for Limiting the Number of Concurrent Sessions.....	60
Configuring Concurrent Session Limit.....	61
Enabling the System to Clear Existing Sessions.....	61
4 File Management.....	63
boot system gateway.....	63
boot system stack-unit.....	63
cd.....	64
copy.....	64
copy running-config startup-config.....	66
delete.....	66

dir.....	67
format flash.....	67
HTTP Copy via CLI.....	68
logging coredump stack-unit.....	69
logging coredump server.....	69
pwd.....	70
rename.....	70
restore factory-defaults.....	71
show boot system.....	72
show file.....	73
show file-systems.....	74
show os-version.....	74
show running-config.....	75
show startup-config.....	77
show version.....	77
upgrade boot.....	78
upgrade system.....	79
verify.....	80
5 Control and Monitoring.....	82
asf-mode.....	82
asset-tag.....	82
banner exec.....	83
banner login.....	84
banner motd.....	85
clear alarms.....	85
clear command history.....	86
clear line.....	86
configure.....	87
debug cpu-traffic-stats.....	87
debug ifm trace-flags.....	88
debug ftpserver.....	88
disable.....	88
do.....	89
enable.....	90
exec-banner.....	90
enable optic-info-update interval.....	91
enable secure.....	91
end.....	91
exec-timeout.....	92
exit.....	92
feature unique-name.....	93
ftp-server enable.....	94
ftp-server topdir.....	94
ftp-server username.....	95
hostname.....	95

http-server.....	96
ip ftp password.....	96
ip ftp source-interface.....	97
ip telnet server enable.....	98
ip telnet source-interface.....	98
ip ftp username.....	99
line.....	99
login concurrent-session.....	100
login statistics.....	101
motd-banner.....	103
show login statistics.....	103
show software ifm.....	105
ping.....	107
reload.....	107
service timestamps.....	108
show alarms.....	109
show command-history.....	109
show configuration lock.....	110
show cpu-traffic-stats.....	111
show debugging.....	112
show diag.....	112
show environment.....	113
show inventory.....	114
show memory.....	115
show processes cpu.....	115
show processes ipc flow-control.....	117
show processes memory.....	118
show reset-reason.....	120
show revision.....	121
show server-interfaces.....	122
show system.....	123
show tech-support.....	125
show uplink brief.....	127
show util-threshold cpu.....	128
show util-threshold memory.....	129
ssh-peer-stack-unit.....	129
telnet.....	130
telnet-peer-stack-unit.....	130
terminal length.....	131
terminal monitor.....	131
terminal xml.....	132
trace route.....	132
undebg all.....	133
virtual-ip.....	133
write.....	134

6 802.1X.....	135
debug dot1x.....	136
dot1x authentication (Configuration).....	136
dot1x authentication (Interface).....	137
dot1x auth-fail-vlan.....	137
dot1x auth-server.....	138
dot1x auth-type mab-only.....	138
dot1x guest-vlan.....	139
dot1x host-mode.....	139
dot1x mac-auth-bypass.....	140
dot1x max-eap-req.....	140
dot1x max-suplicants.....	141
dot1x port-control.....	141
dot1x quiet-period.....	142
dot1x reauthentication.....	142
dot1x reauth-max.....	143
dot1x server-timeout.....	143
dot1x supplicant-timeout.....	144
dot1x tx-period.....	144
show dot1x cos-mapping interface.....	145
show dot1x interface.....	146
7 Access Control Lists (ACL).....	148
Commands Common to all ACL Types.....	150
description.....	150
remark.....	151
resequence access-list.....	152
resequence prefix-list ipv4.....	152
show config.....	153
Common IP ACL Commands.....	153
access-class.....	154
clear counters ip access-group.....	154
ip access-group.....	155
show ip access-lists.....	156
show ip accounting access-list.....	156
Standard IP ACL Commands.....	157
ip access-list standard.....	157
permit (for Standard IP ACLs).....	158
seq.....	160
Extended IP ACL Commands.....	161
deny (for Extended IP ACLs).....	161
deny icmp.....	163
deny tcp.....	165
deny udp.....	167
ip access-list extended.....	169

permit (for Extended IP ACLs).....	170
permit icmp.....	172
permit tcp.....	173
permit udp.....	176
seq.....	178
Common MAC Access List Commands.....	181
clear counters mac access-group.....	181
mac access-group.....	181
show mac access-lists.....	182
show mac accounting access-list.....	183
Standard MAC ACL Commands.....	183
deny.....	184
deny.....	185
mac access-list extended.....	186
permit.....	187
seq.....	188
Extended MAC ACL Commands.....	190
mac access-list standard.....	190
permit.....	191
seq.....	192
IP Prefix List Commands.....	193
clear ip prefix-list.....	193
deny.....	193
ip prefix-list.....	194
permit.....	194
seq.....	195
show config.....	196
show ip prefix-list detail.....	196
show ip prefix-list summary.....	197
Route Map Commands.....	197
continue.....	197
description.....	198
match interface.....	199
match ip address.....	200
match ip next-hop.....	200
match ip route-source.....	201
match metric.....	201
match route-type.....	202
match tag.....	203
route-map.....	203
set automatic-tag.....	204
set metric.....	204
set metric-type.....	205
set tag.....	206
show config.....	206

show route-map.....	206
deny (for Standard IP ACLs).....	207
deny.....	209
seq.....	210
deny tcp.....	212
deny udp.....	215
deny arp (for Extended MAC ACLs).....	217
deny icmp.....	219
deny ether-type (for Extended MAC ACLs).....	220
deny.....	222
deny.....	224
permit (for Standard IP ACLs).....	225
permit.....	227
permit ether-type (for Extended MAC ACLs).....	228
permit icmp.....	230
permit udp.....	232
permit (for Extended IP ACLs).....	234
permit.....	236
seq.....	237
permit tcp.....	239
seq arp.....	242
seq ether-type.....	244
seq.....	246
seq.....	248
permit udp.....	250
permit tcp.....	253
permit icmp.....	255
permit.....	257
deny udp (for IPv6 ACLs).....	258
deny tcp (for IPv6 ACLs).....	260
deny icmp (for Extended IPv6 ACLs).....	262
deny (for IPv6 ACLs).....	263
8 Access Control List (ACL) VLAN Groups and Content Addressable Memory (CAM).....	265
member vlan.....	265
ip access-group.....	266
show acl-vlan-group	266
show cam-acl-vlan.....	267
cam-acl-vlan.....	268
show cam-usage.....	269
show running config acl-vlan-group.....	270
acl-vlan-group.....	271
show acl-vlan-group detail.....	272
description (ACL VLAN Group).....	273
9 Bidirectional Forwarding Detection (BFD).....	274

bfd all-neighbors.....	274
bfd disable.....	276
bfd enable (Configuration).....	276
bfd enable (Interface).....	277
bfd interval	277
bfd protocol-liveness.....	278
ip route bfd.....	278
ip ospf bfd all-neighbors.....	279
ipv6 ospf bfd all-neighbors.....	280
isis bfd all-neighbors.....	281
neighbor bfd.....	282
neighbor bfd disable.....	283
show bfd neighbors.....	283
vrrp bfd neighbor.....	285
10 Border Gateway Protocol IPv4 (BGPv4).....	286
BGPv4 Commands.....	288
address-family.....	289
aggregate-address.....	289
bgp add-path.....	290
bgp always-compare-med.....	291
bgp asnotation.....	291
bgp bestpath as-path ignore.....	292
bgp bestpath as-path multipath-relax.....	293
bgp bestpath med confed.....	293
bgp bestpath med missing-as-best.....	293
bgp bestpath router-id ignore.....	294
bgp client-to-client reflection.....	294
bgp cluster-id.....	295
bgp confederation identifier.....	295
bgp confederation peers.....	296
bgp dampening.....	297
bgp default local-preference.....	298
bgp enforce-first-as.....	298
bgp fast-external-failover.....	299
bgp four-octet-as-support.....	299
bgp graceful-restart.....	300
bgp non-deterministic-med.....	301
bgp outbound-optimization.....	301
bgp recursive-bgp-next-hop.....	302
bgp regex-eval-optz-disable.....	302
bgp router-id.....	303
bgp soft-reconfig-backup.....	304
capture bgp-pdu neighbor.....	304
capture bgp-pdu max-buffer-size.....	305
clear ip bgp.....	305

clear ip bgp dampening.....	306
clear ip bgp flap-statistics.....	306
clear ip bgp peer-group.....	307
debug ip bgp.....	308
debug ip bgp dampening.....	308
debug ip bgp events.....	309
debug ip bgp keepalives.....	309
debug ip bgp notifications.....	310
debug ip bgp soft-reconfiguration.....	311
debug ip bgp updates.....	311
default-metric.....	312
description.....	312
max-paths.....	313
neighbor activate.....	313
neighbor add-path.....	314
neighbor advertisement-interval.....	314
neighbor advertisement-start.....	315
neighbor allowas-in.....	316
neighbor default-originate.....	316
neighbor description.....	317
neighbor distribute-list.....	317
neighbor ebgp-multihop.....	318
neighbor fall-over.....	318
neighbor graceful-restart.....	319
neighbor local-as.....	320
neighbor maximum-prefix.....	320
neighbor password.....	321
neighbor peer-group (assigning peers).....	322
neighbor peer-group (creating group).....	323
neighbor peer-group passive.....	323
neighbor remote-as.....	324
neighbor remove-private-as.....	325
neighbor route-map.....	326
neighbor route-reflector-client.....	326
neighbor shutdown.....	327
neighbor soft-reconfiguration inbound.....	328
neighbor timers.....	328
neighbor update-source.....	329
neighbor weight.....	330
network.....	330
network backdoor.....	331
redistribute.....	332
redistribute ospf.....	333
router bgp.....	333
shutdown all.....	334

shutdown address-family-ipv4-multicast.....	334
shutdown address-family-ipv4-unicast.....	335
shutdown address-family-ipv6-unicast.....	335
show capture bgp-pdu neighbor.....	336
show config.....	336
show ip bgp.....	337
show ip bgp cluster-list.....	338
show ip bgp community.....	340
show ip bgp community-list.....	341
show ip bgp dampened-paths.....	342
show ip bgp detail.....	343
show ip bgp extcommunity-list.....	344
show ip bgp filter-list.....	345
show ip bgp flap-statistics.....	346
show ip bgp inconsistent-as.....	348
show ip bgp neighbors.....	349
show ip bgp next-hop.....	352
show ip bgp paths.....	353
show ip bgp paths as-path.....	354
show ip bgp paths community.....	355
show ip bgp peer-group.....	356
show ip bgp regexp.....	358
show ip bgp summary.....	359
show running-config bgp.....	361
timers bgp.....	361
MBGP Commands.....	362
debug ip bgp dampening.....	362
distance bgp.....	362
show ip bgp dampened-paths.....	363
BGP Extended Communities (RFC 4360).....	364
set extcommunity rt.....	364
set extcommunity soo.....	365
show ip bgp paths extcommunity.....	365
show ip bgp extcommunity-list.....	366
IPv6 BGP Commands.....	367
bgp soft-reconfig-backup.....	367
clear ip bgp ipv6 unicast soft.....	367
debug ip bgp ipv6 unicast soft-reconfiguration.....	368
ipv6 prefix-list.....	369
show ipv6 prefix-list.....	369
IPv6 MBGP Commands.....	370
show ipv6 mbgproutes.....	370
11 Configuration Cloning.....	371
clone-config apply.....	371
clone-config check.....	371

clone-config create.....	372
12 Content Addressable Memory (CAM).....	373
CAM Profile Commands.....	373
cam-acl (Configuration).....	374
cam-optimization.....	376
cam-threshold.....	376
show cam-acl.....	377
show cam-acl-egress.....	379
13 Control Plane Policing (CoPP).....	380
control-plane-cpuqos.....	380
service-policy rate-limit-cpu-queues.....	380
service-policy rate-limit-protocols.....	381
show cpu-queue rate cp.....	381
show ip protocol-queue-mapping.....	382
show ipv6 protocol-queue-mapping.....	383
show mac protocol-queue-mapping.....	383
14 u-Boot.....	385
boot change.....	385
boot show net config retries.....	386
boot write net config retries.....	386
boot zero.....	387
default gateway.....	387
enable.....	387
help.....	388
ignore enable password.....	388
ignore startup-config.....	389
interface management ethernet ip address.....	389
no default gateway.....	389
no interface management ethernet ip address.....	390
reload.....	390
show boot blc.....	390
show boot selection.....	391
show bootflash.....	391
show bootvar.....	392
show default gateway.....	393
show interface management ethernet.....	393
show interface management port config.....	393
syntax help.....	394
15 Data Center Bridging (DCB).....	395
advertise dcbx-appln-tlv.....	396
advertise dcbx-tlv.....	397
bandwidth-percentage.....	398

dcb-enable.....	398
dcb-policy buffer-threshold (Global Configuration).....	399
dcb-policy buffer-threshold (Interface Configuration).....	400
clear dcbx counters.....	400
clear ets counters.....	401
clear pfc counters.....	401
dcb enable pfc-queues.....	402
dcb enable auto-detect on-next-reload.....	402
dcb-map stack-unit all stack-ports all.....	404
dcbx-port role.....	405
dcbx version.....	405
debug dcbx.....	406
description.....	407
fc-map.....	407
fcoe-map.....	408
fcoe priority-bits.....	409
iscsi priority-bits.....	410
keepalive.....	410
interface vlan (NPIV proxy gateway).....	411
pfc mode on.....	411
pfc no-drop queues.....	412
priority.....	413
priority-group bandwidth pfc.....	414
priority-pgid.....	415
qos-policy-output ets.....	416
qos-policy-buffer.....	417
priority-list.....	418
scheduler.....	419
show dcb.....	420
show interface dcbx detail.....	420
show interface ets.....	423
show interface pfc.....	426
show interface pfc statistics.....	429
show qos priority-groups.....	430
show qos dcb-map.....	430
show stack-unit stack-ports ets details.....	431
dcb pfc-shared-buffer-size.....	432
dcb pfc-total-buffer-size.....	433
dcb-buffer-threshold	433
dcb enable pfc-queues.....	434
dcb {ets pfc} enable.....	435
service-class buffer shared-threshold-weight.....	435
show stack-unit stack-ports pfc details.....	436

16 Dynamic Host Configuration Protocol.....	438
Commands to Configure the System to be a DHCP Server.....	438

clear ip dhcp.....	438
debug ip dhcp server.....	439
debug ipv6 dhcp	439
default-router.....	440
disable.....	440
dns-server.....	441
domain-name.....	441
excluded-address.....	441
hardware-address.....	442
host.....	442
lease.....	443
netbios-name-server.....	443
netbios-node-type.....	444
network.....	444
show ip dhcp binding.....	445
show ip dhcp configuration.....	445
show ip dhcp conflict.....	445
show ip dhcp server.....	446
Commands to Configure the System to be a DHCP Client.....	446
ip address dhcp.....	446
Other Commands Supported by the DHCP Client.....	447
clear ip dhcp client statistics.....	447
debug ip dhcp client events.....	447
debug ip dhcp client packets.....	448
release dhcp interface.....	448
renew dhcp interface.....	449
show ip dhcp client statistics.....	450
show ip dhcp lease.....	450
Commands to Configure Secure DHCP.....	451
arp inspection.....	451
arp inspection-trust.....	451
clear ip dhcp snooping.....	451
clear ipv6 dhcp snooping binding.....	452
ip dhcp snooping.....	452
ipv6 dhcp snooping.....	453
ip dhcp snooping database.....	453
ipv6 dhcp snooping database write-delay.....	453
ip dhcp snooping binding.....	454
ip dhcp snooping database renew.....	455
ip dhcp snooping trust.....	455
ipv6 dhcp snooping trust.....	455
ip dhcp source-address-validation.....	456
ip dhcp snooping vlan.....	456
ipv6 dhcp snooping vlan.....	457
ip dhcp relay.....	457

show ip dhcp snooping.....	458
show ipv6 DHCP snooping.....	458
ip dhcp snooping verify mac-address.....	459
ipv6 DHCP snooping verify mac-address.....	459
17 Equal Cost Multi-Path (ECMP).....	460
ecmp-group.....	460
hash-algorithm.....	460
hash-algorithm ecmp.....	464
hash-algorithm seed.....	464
ip ecmp-group.....	465
link-bundle-distribution trigger-threshold.....	466
link-bundle-monitor enable.....	466
show config.....	466
show link-bundle distribution.....	467
18 FC FLEXIO FPORT.....	468
feature fc.....	469
fc zone.....	469
fc alias.....	470
fc zoneset.....	471
fcoe-map.....	471
fabric.....	472
active-zoneset	473
stack-unit port-group port portmode.....	474
show fc ns.....	474
show fc switch.....	476
show fc zoneset.....	477
show fc zone.....	478
show fc alias.....	478
show fcoe-map.....	479
show system stack-unit port-group portmode.....	480
19 FIPS Cryptography.....	481
fips mode enable.....	481
show fips status.....	481
show ip ssh.....	482
ssh.....	483
20 FIP Snooping.....	485
clear fip-snooping database interface vlan.....	485
clear fip-snooping statistics.....	486
feature fip-snooping.....	486
fip-snooping enable.....	487
fip-snooping fc-map.....	487
fip-snooping port-mode fcf.....	488

show fip-snooping statistics.....	488
debug fip-snooping.....	491
show fip-snooping config.....	492
show fip-snooping enode.....	492
show fip-snooping fcf.....	493
show fip-snooping sessions.....	494
show fip-snooping statistics.....	495
show fip-snooping system.....	498
show fip-snooping vlan.....	498
21 Force10 Resilient Ring Protocol (FRRP).....	500
clear frrp.....	500
debug frrp.....	501
description.....	502
disable.....	502
interface.....	502
member-vlan.....	503
mode.....	504
protocol frrp.....	504
show frrp.....	505
timer.....	506
22 GARP VLAN Registration (GVRP).....	507
clear gvrp statistics.....	508
debug gvrp.....	508
disable.....	509
garp timers.....	509
gvrp enable.....	510
gvrp registration.....	511
protocol gvrp.....	511
show config.....	512
show garp timers.....	512
show gvrp.....	513
clear gvrp statistics.....	514
show vlan.....	515
23 Internet Group Management Protocol (IGMP).....	516
IGMP Commands.....	516
IGMP Snooping Commands.....	517
clear ip igmp groups.....	517
debug ip igmp.....	517
ip igmp access-group.....	518
ip igmp group-join-limit.....	518
ip igmp querier-timeout.....	519
ip igmp query-interval.....	519
ip igmp query-max-resp-time.....	520

ip igmp snooping enable.....	520
ip igmp snooping fast-leave.....	521
ip igmp snooping flood.....	521
ip igmp snooping last-member-query-interval.....	522
ip igmp snooping mrouter.....	522
ip igmp snooping querier.....	523
ip igmp version.....	524
show ip igmp groups.....	524
show ip igmp interface.....	525
show ip igmp snooping mrouter.....	526
24 Interfaces.....	528
Basic Interface Commands.....	528
clear counters.....	528
clear dampening.....	529
cx4-cable-length.....	529
dampening.....	530
description.....	531
flowcontrol.....	532
interface.....	534
interface loopback.....	535
interface ManagementEthernet.....	536
interface null.....	536
interface range.....	537
interface range macro (define).....	539
interface range macro name.....	540
interface vlan.....	540
intf-type cr4 autoneg.....	541
keepalive.....	542
load-balance.....	542
load-balance hg.....	543
monitor interface.....	544
mtu.....	546
negotiation auto.....	547
portmode hybrid.....	549
rate-interval.....	550
rate-interval (Configuration Mode).....	551
remote-fault-signaling rx.....	552
show config.....	552
show config (from INTERFACE RANGE mode).....	553
show interfaces.....	553
show interfaces configured.....	556
show interfaces dampening.....	556
show interfaces description.....	557
show interfaces stack-unit.....	558
show interfaces status.....	559

show interfaces switchport.....	560
show interfaces transceiver.....	562
show range.....	566
shutdown.....	567
speed (for 1000/10000/auto interfaces).....	568
stack-unit portmode.....	568
wavelength.....	569
Port Channel Commands.....	570
channel-member.....	570
group.....	571
interface port-channel.....	572
minimum-links.....	573
port-channel failover-group.....	573
show config.....	574
show interfaces port-channel.....	574
Time Domain Reflectometer (TDR) Commands.....	577
tdr-cable-test.....	577
show tdr.....	578
Enhanced Validation of Interface Ranges.....	579
UDP Broadcast.....	579
debug ip udp-helper.....	579
ip udp-broadcast-address.....	580
ip udp-helper udp-port.....	580
show ip udp-helper.....	581
Port Interface Commands.....	582
Virtual LAN (VLAN) Commands.....	582
auto vlan.....	582
clear mac-address-table dynamic.....	583
default vlan-id.....	583
feature fc.....	584
monitor interface.....	584
name.....	586
show config (INTERFACE mode).....	587
show config (from INTERFACE VLAN mode).....	587
show config (from PROTOCOL LLDP mode).....	588
show vlan.....	588
speed (for 1000/10000 interfaces).....	590
stack-unit port-group port mode ethernet.....	590
vlan tagged (CMC).....	591
vlan untagged (CMC).....	592
25 IPv4 Routing.....	594
arp.....	595
arp learn-enable.....	596
arp retries.....	596
arp timeout.....	597

clear arp-cache.....	597
clear host.....	598
clear ip fib stack-unit.....	598
clear ip route.....	599
clear tcp statistics.....	599
debug arp.....	600
debug ip dhcp.....	600
debug ip icmp.....	601
debug ip packet.....	602
ip address.....	604
ip directed-broadcast.....	605
ip domain-list.....	605
ip domain-lookup.....	606
ip domain-name.....	606
ip helper-address.....	607
ip helper-address hop-count disable.....	608
ip host.....	608
ip icmp source-interface.....	609
ipv6 icmp source-interface.....	610
ip max-frag-count.....	611
ip name-server.....	611
ip proxy-arp.....	612
ip route.....	612
ip source-route.....	613
ip tcp initial-time.....	613
show ip tcp initial-time.....	614
ip unreachable.....	614
management route.....	615
show arp.....	615
show arp retries.....	617
show hosts.....	617
show ip cam stack-unit.....	618
show ip fib stack-unit.....	620
show ip interface.....	621
show ip management-route.....	623
show ip multicast-cam stack-unit.....	623
show ip protocols.....	625
show ip route.....	625
show ip route list.....	627
show ip route summary.....	628
show ip traffic.....	629
show tcp statistics.....	630
26 Internet Protocol Security (IPSec).....	633
crypto ipsec transform-set.....	633
crypto ipsec policy.....	635

management crypto-policy.....	635
match.....	636
session-key.....	636
show crypto ipsec transform-set.....	637
show crypto ipsec policy.....	638
transform-set.....	639
27 IPv6 Access Control Lists (IPv6 ACLs).....	640
IPv6 ACL Commands.....	640
cam-acl.....	640
cam-acl-egress.....	641
ipv6 access-list.....	642
ipv6 control-plane egress-filter.....	643
permit.....	643
permit icmp.....	644
show cam-acl.....	646
show cam-acl-egress.....	647
28 IPv6 Basics.....	648
clear ipv6 fib.....	648
clear ipv6 route.....	649
clear ipv6 mld_host.....	649
ipv6 address autoconfig.....	649
ipv6 address.....	650
ipv6 address eui64.....	651
ipv6 control-plane icmp error-rate-limit.....	652
ipv6 flowlabel-zero.....	652
ipv6 host.....	652
ipv6 name-server.....	653
ipv6 nd dad attempts.....	653
ipv6 nd disable-reachable-timer.....	654
ipv6 nd dns-server.....	654
ipv6 nd prefix.....	655
ipv6 route.....	656
ipv6 unicast-routing.....	657
show ipv6 cam stack-unit.....	658
show ipv6 control-plane icmp.....	659
show ipv6 fib stack-unit.....	659
show ipv6 flowlabel-zero.....	660
show ipv6 interface.....	660
show ipv6 mld_host.....	663
show ipv6 route.....	663
trust ipv6-diffserv.....	665
29 IPv6 Border Gateway Protocol (IPv6 BGP).....	667
IPv6 BGP Commands.....	667

address family.....	667
aggregate-address.....	668
bgp always-compare-med.....	669
bgp bestpath as-path ignore.....	669
bgp bestpath med confed.....	670
bgp bestpath med missing-as-best.....	670
bgp client-to-client reflection.....	671
bgp cluster-id.....	671
bgp confederation identifier.....	672
bgp confederation peers.....	672
bgp dampening.....	673
bgp default local-preference.....	674
bgp enforce-first-as.....	674
bgp fast-external-fallover.....	675
bgp four-octet-as-support.....	675
bgp graceful-restart.....	676
bgp log-neighbor-changes.....	676
bgp non-deterministic-med.....	677
bgp recursive-bgp-next-hop.....	677
bgp regex-eval-optz-disable.....	678
bgp router-id.....	679
bgp soft-reconfig-backup.....	679
capture bgp-pdu neighbor (ipv6).....	680
capture bgp-pdu max-buffer-size.....	680
clear ip bgp * (asterisk).....	681
clear ip bgp as-number.....	681
clear ip bgp ipv6-address.....	682
clear ip bgp peer-group.....	683
clear ip bgp ipv6 dampening.....	683
clear ip bgp ipv6 flap-statistics.....	684
clear ip bgp ipv6 unicast soft.....	685
debug ip bgp.....	685
debug ip bgp events.....	686
debug ip bgp ipv6 dampening.....	687
debug ip bgp ipv6 unicast soft-reconfiguration.....	687
debug ip bgp keepalives.....	688
debug ip bgp notifications.....	689
debug ip bgp updates.....	689
default-metric.....	690
description.....	691
distance bgp.....	691
maximum-paths.....	692
neighbor activate.....	692
neighbor advertisement-interval.....	693
neighbor allowas-in.....	694

neighbor default-originate.....	694
neighbor description.....	695
neighbor distribute-list.....	695
neighbor ebgp-multihop.....	696
neighbor fall-over.....	697
neighbor filter-list.....	697
neighbor maximum-prefix.....	698
neighbor X:X:X::X password.....	699
neighbor next-hop-self.....	699
neighbor peer-group (assigning peers).....	700
neighbor peer-group (creating group).....	701
neighbor peer-group passive.....	701
neighbor remote-as.....	702
neighbor remove-private-as.....	702
neighbor route-map.....	703
neighbor route-reflector-client.....	704
neighbor send-community.....	704
neighbor shutdown.....	705
neighbor soft-reconfiguration inbound.....	706
neighbor subnet.....	706
neighbor timers.....	707
neighbor update-source.....	708
neighbor weight.....	708
network.....	709
network backdoor.....	710
redistribute.....	710
redistribute isis.....	711
redistribute ospf.....	712
router bgp.....	712
show capture bgp-pdu neighbor.....	713
show config.....	713
show ip bgp ipv6 unicast.....	714
show ip bgp ipv6 unicast cluster-list.....	714
show ip bgp ipv6 unicast community.....	715
show ip bgp ipv6 unicast community-list.....	716
show ip bgp ipv6 unicast dampened-paths.....	716
show ip bgp ipv6 unicast detail.....	716
show ip bgp ipv6 unicast extcommunity-list.....	717
show ip bgp ipv6 unicast filter-list.....	717
show ip bgp ipv6 unicast flap-statistics.....	718
show ip bgp ipv6 unicast inconsistent-as.....	719
show ip bgp ipv6 unicast neighbors.....	719
show ip bgp ipv6 unicast peer-group.....	722
show ip bgp ipv6 unicast summary.....	723
show ip bgp next-hop.....	724

show ip bgp paths.....	724
show ip bgp paths as-path.....	725
show ip bgp paths community.....	725
show ip bgp paths extcommunity.....	726
show ip bgp regexp.....	726
timers bgp.....	727
IPv6 MBGP Commands.....	727
address family.....	727
aggregate-address.....	728
bgp dampening.....	729
clear ip bgp ipv6 unicast.....	729
clear ip bgp ipv6 unicast dampening.....	730
clear ip bgp ipv6 unicast flap-statistics.....	730
debug ip bgp ipv6 unicast dampening.....	731
debug ip bgp ipv6 unicast peer-group updates.....	731
debug ip bgp ipv6 unicast updates.....	732
distance bgp.....	732
neighbor activate.....	733
neighbor advertisement-interval.....	734
neighbor default-originate.....	734
neighbor distribute-list.....	735
neighbor filter-list.....	736
neighbor maximum-prefix.....	736
neighbor next-hop-self.....	737
neighbor remove-private-as.....	738
neighbor route-map.....	738
neighbor route-reflector-client.....	739
network.....	739
redistribute.....	740
show ip bgp ipv6 unicast.....	741
show ip bgp ipv6 unicast cluster-list.....	741
show ip bgp ipv6 unicast community.....	742
show ip bgp ipv6 unicast community-list.....	742
show ip bgp ipv6 unicast dampened-paths.....	743
show ip bgp ipv6 unicast detail.....	743
show ip bgp ipv6 unicast filter-list.....	744
show ip bgp ipv6 unicast flap-statistics.....	744
show ip bgp ipv6 unicast inconsistent-as.....	745
show ip bgp ipv6 unicast neighbors.....	746
show ip bgp ipv6 unicast peer-group.....	748
show ip bgp ipv6 unicast summary.....	749
30 iSCSI Optimization.....	751
advertise dcbx-app-tlv.....	751
iscsi aging time.....	752
iscsi cos.....	752

iscsi enable.....	753
iscsi priority-bits.....	754
iscsi profile-compellent.....	754
iscsi target port.....	755
show iscsi.....	755
show iscsi sessions.....	756
show iscsi sessions detailed.....	757
show run iscsi.....	757
31 Intermediate System to Intermediate System (IS-IS).....	759
adjacency-check.....	761
advertise.....	761
area-password.....	762
clear config.....	762
clear isis.....	763
clns host.....	763
debug isis.....	764
debug isis adj-packets.....	764
debug isis local-updates.....	765
debug isis snp-packets.....	765
debug isis spf-triggers.....	766
debug isis update-packets.....	766
default-information originate.....	767
description.....	767
distance.....	768
distribute-list in.....	769
distribute-list out.....	769
distribute-list redistributed-override.....	770
domain-password.....	771
graceful-restart ietf.....	771
graceful-restart interval.....	772
graceful-restart t1.....	772
graceful-restart t2.....	773
graceful-restart t3.....	773
graceful-restart restart-wait.....	774
hello padding.....	774
hostname dynamic.....	775
ignore-lsp-errors.....	775
ip router isis.....	776
ipv6 router isis.....	776
isis circuit-type.....	777
isis csnp-interval.....	778
isis csnp-interval.....	778
isis hello-multiplier.....	779
isis hello padding.....	780
isis ipv6 metric.....	780

isis metric.....	781
isis network point-to-point.....	781
isis password.....	782
isis priority.....	783
is-type.....	783
log-adjacency-changes.....	784
lsp-gen-interval.....	784
lsp-mtu.....	785
lsp-refresh-interval.....	786
max-area-addresses.....	786
max-lsp-lifetime.....	787
maximum-paths.....	787
metric-style.....	788
multi-topology.....	789
net.....	789
passive-interface.....	789
redistribute.....	790
redistribute bgp.....	791
redistribute ospf.....	793
router isis.....	794
set-overload-bit.....	794
show config.....	795
show isis database.....	796
show isis graceful-restart detail.....	798
show isis hostname.....	799
show isis interface.....	799
show isis neighbors.....	800
show isis protocol.....	801
show isis traffic.....	802
spf-interval.....	803
32 Isolated Networks.....	805
io-aggregator isolated-network vlan.....	805
show io-aggregator isolated-networks	805
33 Link Aggregation Control Protocol (LACP).....	807
auto-lag enable.....	807
clear lacp counters.....	808
debug lacp.....	808
io-aggregator auto-lag enable.....	809
lacp link-fallback.....	809
lacp long-timeout.....	810
lacp port-priority.....	810
port-channel mode.....	811
port-channel-protocol lacp.....	812
show interfaces port-channel.....	813

show io-aggregator auto-lag status.....	815
show lacp.....	816
show link-bundle-distribution port-channel.....	817
show port-channel-flow.....	818
34 Layer 2.....	820
MAC Addressing Commands.....	820
clear mac-address-table dynamic.....	820
mac-address-table aging-time.....	821
mac-address-table static.....	821
mac-address-table station-move refresh-arp.....	822
mac learning-limit.....	822
mac learning-limit learn-limit-violation.....	824
mac learning-limit station-move-violation.....	824
mac learning-limit reset.....	825
show cam mac stack-unit.....	825
show mac-address-table.....	826
show mac-address-table aging-time.....	828
show mac learning-limit.....	829
Virtual LAN (VLAN) Commands.....	829
description.....	829
default vlan-id.....	830
default-vlan disable.....	831
name.....	831
show config.....	832
show vlan.....	832
tagged.....	834
track ip.....	835
untagged.....	836
35 Link Layer Discovery Protocol (LLDP).....	837
advertise dot1-tlv.....	837
advertise dot3-tlv.....	838
advertise interface-port-desc.....	839
advertise management-tlv.....	839
clear lldp counters.....	840
clear lldp neighbors.....	840
debug lldp interface.....	841
disable.....	842
hello.....	842
mode.....	843
multiplier.....	843
protocol lldp (Configuration).....	844
protocol lldp (Interface).....	844
show lldp neighbors.....	845
show lldp statistics.....	845

show running-config lldp.....	846
LLDP-MED Commands.....	846
advertise med guest-voice.....	847
advertise med guest-voice-signaling.....	847
advertise med location-identification.....	848
advertise med power-via-mdi.....	849
advertise med softphone-voice.....	849
advertise med streaming-video.....	850
advertise med video-conferencing.....	851
advertise med voice-signaling.....	851
advertise med voice.....	852
advertise med voice-signaling.....	852
36 Microsoft Network Load Balancing.....	854
mac-address-table static (for Multicast MAC Address).....	856
ip vlan-flooding.....	857
37 Multicast Source Discovery Protocol (MSDP).....	858
clear ip msdp peer.....	858
clear ip msdp sa-cache.....	859
clear ip msdp statistic.....	859
debug ip msdp.....	860
ip msdp cache-rejected-sa.....	860
ip msdp default-peer.....	861
ip msdp log-adjacency-changes.....	861
ip msdp mesh-group.....	862
ip msdp originator-id.....	862
ip msdp peer.....	863
ip msdp redistribute.....	864
ip msdp sa-filter.....	864
ip msdp sa-limit.....	865
ip msdp shutdown.....	866
ip multicast-msdp.....	866
show ip msdp.....	866
show ip msdp sa-cache rejected-sa.....	867
38 Multiple Spanning Tree Protocol (MSTP).....	869
debug spanning-tree mstp.....	869
description.....	870
disable.....	870
disable.....	871
forward-delay.....	871
hello-time.....	872
max-age.....	872
max-hops.....	873
msti.....	873

name.....	874
protocol spanning-tree mstp.....	874
revision.....	875
show config.....	875
show spanning-tree mst configuration.....	876
show spanning-tree msti.....	876
spanning-tree.....	878
spanning-tree msti.....	879
spanning-tree mstp.....	880
tc-flush-standard.....	881
39 Multicast.....	882
IPv4 Multicast Commands.....	882
clear ip mroute.....	882
ip mroute.....	883
ip multicast-limit.....	884
ip multicast-routing.....	884
mtrace.....	885
show ip mroute.....	886
show ip rpf.....	888
IPv6 Multicast Commands.....	889
debug ipv6 mld_host.....	889
ip multicast-limit.....	890
40 Neighbor Discovery Protocol (NDP).....	891
clear ipv6 neighbors.....	891
ipv6 neighbor.....	892
show ipv6 neighbors.....	893
41 NPIV Proxy Gateway.....	894
dcb-map.....	894
description (for FCoE maps).....	895
fabric-id vlan.....	896
fcf-priority.....	897
fc-map.....	897
fcoe-map.....	898
feature fc.....	899
fka-adv-period.....	900
keepalive.....	900
show fcoe-map.....	901
show fc sw.....	903
show interfaces status.....	903
show npiv devices.....	904
show qos dcb-map.....	906
show running-config fcoe-map.....	907

42 Open Shortest Path First (OSPFv2 and OSPFv3)	909
OSPFv2 Commands.....	911
area default-cost.....	911
area nssa.....	912
area range.....	912
area stub.....	913
auto-cost.....	914
clear ip ospf.....	914
clear ip ospf statistics.....	915
debug ip ospf.....	915
default-information originate.....	917
default-metric.....	918
description.....	918
distance.....	919
distance ospf.....	919
distribute-list in.....	920
distribute-list out.....	920
fast-convergence.....	921
flood-2328.....	922
graceful-restart grace-period.....	922
graceful-restart helper-reject.....	923
graceful-restart mode.....	923
graceful-restart role.....	924
ip ospf auth-change-wait-time.....	924
ip ospf authentication-key.....	925
ip ospf cost.....	925
ip ospf dead-interval.....	926
ip ospf hello-interval.....	926
ip ospf message-digest-key.....	927
ip ospf mtu-ignore.....	927
ip ospf network.....	928
ip ospf priority.....	928
ip ospf retransmit-interval.....	929
ip ospf transmit-delay.....	929
log-adjacency-changes.....	930
maximum-paths.....	930
mib-binding.....	931
network area.....	931
passive-interface.....	932
redistribute.....	933
redistribute bgp.....	934
redistribute isis.....	934
router-id.....	935
router ospf.....	936
show config.....	936

show ip ospf.....	937
show ip ospf asbr.....	938
show ip ospf database.....	939
show ip ospf database asbr-summary.....	940
show ip ospf database external.....	942
show ip ospf database network.....	944
show ip ospf database nssa-external.....	945
show ip ospf database opaque-area.....	946
show ip ospf database opaque-as.....	947
show ip ospf database opaque-link.....	948
show ip ospf database router.....	949
show ip ospf database summary.....	951
show ip ospf interface.....	953
show ip ospf neighbor.....	954
show ip ospf routes.....	955
show ip ospf statistics.....	956
show ip ospf timers rate-limit.....	959
show ip ospf topology.....	959
summary-address.....	960
timers spf.....	960
timers throttle lsa all.....	961
timers throttle lsa arrival.....	962
OSPFv3 Commands.....	963
area authentication.....	963
area encryption.....	964
area nssa.....	965
auto-cost.....	966
clear ipv6 ospf process.....	967
debug ipv6 ospf.....	968
debug ipv6 ospf bfd.....	968
debug ipv6 ospf events.....	969
debug ipv6 ospf packet.....	971
debug ipv6 ospf spf.....	972
default-information originate.....	973
graceful-restart grace-period.....	974
graceful-restart mode.....	974
ipv6 ospf area.....	975
ipv6 ospf authentication.....	975
ipv6 ospf bfd all-neighbors.....	976
ipv6 ospf cost.....	977
ipv6 ospf dead-interval.....	978
ipv6 ospf encryption.....	978
ipv6 ospf graceful-restart helper-reject.....	980
ipv6 ospf hello-interval.....	980
ipv6 ospf priority.....	981

ipv6 router ospf.....	981
maximum-paths.....	982
passive-interface.....	982
redistribute.....	983
router-id.....	984
show crypto ipsec policy.....	985
show crypto ipsec sa ipv6.....	985
show ipv6 ospf database.....	986
show ipv6 ospf interface.....	987
show ipv6 ospf neighbor.....	988
timers spf.....	988
43 Policy-based Routing (PBR).....	990
description.....	990
ip redirect-group.....	991
ip redirect-list.....	992
permit.....	992
redirect.....	993
seq.....	995
show cam pbr.....	997
show ip redirect-list.....	997
44 PIM-Sparse Mode (PIM-SM).....	999
IPv4 PIM-Sparse Mode Commands.....	1000
clear ip pim rp-mapping.....	1000
clear ip pim tib.....	1000
debug ip pim.....	1001
ip pim bsr-border.....	1002
ip pim bsr-candidate.....	1002
ip pim dr-priority.....	1003
ip pim join-filter.....	1003
ip pim ingress-interface-map.....	1004
ip pim neighbor-filter.....	1004
ip pim query-interval.....	1005
ip pim register-filter.....	1005
ip pim rp-address.....	1006
ip pim rp-candidate.....	1006
ip pim sparse-mode.....	1007
ip pim sparse-mode sg-expiry-timer.....	1008
ip pim spt-threshold.....	1008
no ip pim snooping dr-flood.....	1009
show ip pim bsr-router.....	1009
show ip pim interface.....	1010
show ip pim neighbor.....	1011
show ip pim rp.....	1011
show ip pim snooping interface.....	1012

show ip pim snooping neighbor.....	1013
show ip pim snooping tib.....	1014
show ip pim summary.....	1016
show ip pim tib.....	1017
show running-config pim.....	1018
IPv6 PIM-Sparse Mode Commands.....	1019
ipv6 pim bsr-border.....	1019
ipv6 pim bsr-candidate.....	1019
ipv6 pim dr-priority.....	1020
ipv6 pim join-filter.....	1020
ipv6 pim query-interval.....	1021
ipv6 pim neighbor-filter.....	1021
ipv6 pim register-filter.....	1022
ipv6 pim rp-address.....	1022
ipv6 pim rp-candidate.....	1023
ipv6 pim sparse-mode.....	1024
ipv6 pim spt-threshold.....	1024
show ipv6 pim bsr-router.....	1025
show ipv6 pim interface.....	1025
show ipv6 pim neighbor.....	1026
show ipv6 pim rp.....	1026
show ipv6 pim tib.....	1027
45 Port Monitoring.....	1029
description.....	1030
erpm.....	1030
flow-based enable.....	1031
rate-limit.....	1031
monitor session.....	1032
show config.....	1033
show monitor session.....	1033
show running-config monitor session.....	1034
source (port monitoring).....	1035
46 Private VLAN (PVLAN).....	1036
ip local-proxy-arp.....	1037
private-vlan mapping secondary-vlan.....	1038
private-vlan mode.....	1038
show interfaces private-vlan.....	1039
show vlan private-vlan.....	1040
show vlan private-vlan mapping.....	1042
switchport mode private-vlan.....	1043
47 Per-VLAN Spanning Tree Plus (PVST+).....	1045
description.....	1045
disable.....	1046

edge-port bpdufilter default.....	1046
extend system-id.....	1046
protocol spanning-tree pvst.....	1047
show spanning-tree pvst.....	1048
spanning-tree pvst.....	1051
spanning-tree pvst err-disable.....	1052
tc-flush-standard.....	1053
vlan bridge-priority.....	1053
vlan forward-delay.....	1054
vlan hello-time.....	1054
vlan max-age.....	1055
48 Quality of Service (QoS).....	1056
Global Configuration Commands.....	1056
qos-rate-adjust.....	1056
service-class dot1p-mapping.....	1056
Per-Port QoS Commands.....	1057
dot1p-priority.....	1057
rate police.....	1058
rate-shape.....	1059
service-class dynamic dot1p.....	1060
service-class bandwidth-percentage.....	1061
strict-priority unicast.....	1061
Policy-Based QoS Commands.....	1062
bandwidth-percentage.....	1062
class-map.....	1063
clear qos statistics.....	1064
crypto key zeroize rsa.....	1064
ip ssh rekey	1065
match ip access-group.....	1066
match ip vlan.....	1066
match ip vrf.....	1067
description.....	1067
match ip dscp.....	1068
match ip precedence.....	1069
match mac access-group.....	1070
match mac dot1p.....	1070
match mac vlan.....	1071
policy-aggregate.....	1071
policy-map-input.....	1072
policy-map-output.....	1073
qos-policy-input.....	1073
qos-policy-output.....	1074
rate police.....	1075
rate shape.....	1075
service-policy input.....	1076

service-policy output.....	1077
service-queue.....	1077
set.....	1078
show qos class-map.....	1079
show qos dcb-map.....	1079
show qos policy-map.....	1080
show qos policy-map-input.....	1081
show qos qos-policy-output.....	1082
show qos qos-policy-input.....	1082
show qos qos-policy-output.....	1083
show qos statistics.....	1084
show qos wred-profile.....	1085
test cam-usage.....	1085
trust.....	1087
wred.....	1088
wred ecn.....	1088
wred-profile.....	1089
dscp.....	1090
qos dscp-color-map.....	1091
qos dscp-color-policy.....	1092
show qos dscp-color-policy.....	1092
show qos dscp-color-map.....	1093
show qos dot1p-queue-mapping.....	1094
trust.....	1094
49 Routing Information Protocol (RIP).....	1096
auto-summary.....	1096
clear ip rip.....	1097
debug ip rip.....	1097
default-information originate.....	1098
default-metric.....	1098
description.....	1099
distance.....	1099
distribute-list in.....	1100
distribute-list out.....	1101
ip poison-reverse.....	1101
ip rip receive version.....	1102
ip rip send version.....	1102
ip split-horizon.....	1103
maximum-paths.....	1103
neighbor.....	1104
network.....	1104
offset-list.....	1105
output-delay.....	1106
passive-interface.....	1106
redistribute.....	1107

redistribute ospf.....	1107
router rip.....	1108
show config.....	1108
show ip rip database.....	1109
show running-config rip.....	1110
timers basic.....	1110
version.....	1111
50 Remote Monitoring (RMON).....	1112
rmon alarm.....	1113
rmon collection history.....	1114
rmon collection statistics.....	1114
rmon event.....	1115
rmon hc-alarm.....	1115
show rmon.....	1116
show rmon alarms.....	1117
show rmon events.....	1118
show rmon hc-alarm.....	1119
show rmon history.....	1120
show rmon log.....	1120
show rmon statistics.....	1121
51 Rapid Spanning Tree Protocol (RSTP).....	1123
bridge-priority.....	1123
debug spanning-tree rstp.....	1123
description.....	1124
disable.....	1124
forward-delay.....	1125
hello-time.....	1125
max-age.....	1126
edge-port bpdufilter default.....	1127
protocol spanning-tree rstp.....	1127
show config.....	1128
spanning-tree rstp.....	1128
spanning-tree rstp.....	1130
tc-flush-standard.....	1131
52 Security.....	1132
AAA Accounting Commands.....	1132
aaa accounting.....	1132
aaa accounting suppress.....	1133
aaa authorization commands.....	1134
aaa authorization config-commands.....	1135
aaa authorization exec.....	1135
accounting.....	1136
crypto key zeroize rsa.....	1136

show accounting.....	1137
Authentication and Password Commands.....	1138
aaa authentication enable.....	1138
aaa authentication login.....	1139
authorization.....	1140
aaa authorization commands.....	1141
aaa authorization role-only	1141
aaa authorization config-commands.....	1142
aaa authorization exec.....	1143
aaa reauthenticate enable.....	1143
privilege level (CONFIGURATION mode).....	1144
privilege level (LINE mode).....	1145
banner exec.....	1145
banner login.....	1146
banner motd.....	1147
debug radius.....	1148
debug tacacs+.....	1148
exec-banner.....	1149
access-class.....	1149
enable password.....	1150
enable restricted.....	1151
enable secret.....	1151
enable sha256-password.....	1152
login authentication.....	1153
password.....	1154
password-attributes.....	1154
service password-encryption.....	1155
show privilege.....	1156
show users.....	1157
secure-cli enable.....	1157
timeout login response.....	1158
username.....	1159
RADIUS Commands.....	1160
client.....	1160
client-key.....	1161
coa-bounce-port.....	1161
coa-disable-port.....	1162
coa-reauthenticate.....	1162
debug radius.....	1163
da-rsp-timeout.....	1163
disconnect-user.....	1164
dynamic-auth-enable.....	1164
ip radius source-interface.....	1165
port.....	1165
radius dynamic-auth.....	1166

radius-server deadtime.....	1166
radius-server host.....	1167
radius-server key.....	1168
radius-server retransmit.....	1169
radius-server timeout.....	1169
role	1170
rate-limit.....	1171
replay-protection-window.....	1171
terminate-session.....	1172
show privilege.....	1172
Suppressing AAA Accounting for Null Username Sessions.....	1173
TACACS+ Commands.....	1173
TACACS+ Accounting.....	1173
debug tacacs+.....	1174
ip tacacs source-interface.....	1175
tacacs-server host.....	1175
tacacs-server key.....	1176
timeout login response.....	1177
SSH Server and SCP Commands.....	1177
crypto key generate.....	1177
debug ip ssh.....	1178
ip scp topdir.....	1179
ip ssh authentication-retries.....	1179
ip ssh cipher.....	1180
ip ssh connection-rate-limit.....	1181
ip ssh hostbased-authentication.....	1181
ip ssh key-size.....	1182
ip ssh mac.....	1182
ip ssh password-authentication.....	1183
ip ssh rhostsfile.....	1184
ip ssh rekey	1184
ip ssh rsa-authentication (Config).....	1185
ip ssh rsa-authentication (EXEC).....	1186
ip ssh server.....	1186
show crypto.....	1188
show ip ssh.....	1189
show ip ssh client-pub-keys.....	1190
show ip ssh rsa-authentication.....	1190
show role.....	1191
show userroles.....	1192
ssh.....	1192
ip ssh pub-key-file.....	1193
Secure DHCP Commands.....	1194
clear ip dhcp snooping.....	1194
ip dhcp relay.....	1194

ip dhcp snooping.....	1195
ip dhcp snooping database.....	1195
ip dhcp snooping binding.....	1195
ip dhcp snooping database renew.....	1196
ip dhcp snooping trust.....	1197
ip dhcp source-address-validation.....	1197
ip dhcp snooping vlan.....	1197
show ip dhcp snooping.....	1198
username.....	1198
userrole	1199
ICMP Vulnerabilities.....	1200
drop icmp.....	1202
System Security Commands.....	1202
generate hash.....	1202
root-access password.....	1203
verified boot.....	1204
verified boot hash.....	1204
verified startup-config.....	1205
53 sFlow.....	1206
sflow collector.....	1207
sflow enable (Global).....	1208
sflow ingress-enable.....	1208
sflow extended-switch enable.....	1209
sflow max-header-size extended.....	1209
sflow polling-interval (Global).....	1210
sflow polling-interval (Interface).....	1210
sflow sample-rate (Global).....	1211
sflow sample-rate (Interface).....	1211
show sflow.....	1212
show sflow stack-unit.....	1213
54 Service Provider Bridging.....	1214
debug protocol-tunnel.....	1214
protocol-tunnel.....	1215
protocol-tunnel destination-mac.....	1216
protocol-tunnel enable.....	1216
protocol-tunnel rate-limit.....	1216
show protocol-tunnel.....	1217
55 Simple Network Management Protocol (SNMP) and Syslog.....	1219
SNMP Commands.....	1220
clear logging auditlog.....	1220
show snmp.....	1221
show snmp engineID.....	1221
show snmp group.....	1222

show snmp user.....	1223
snmp context.....	1223
snmp ifmib ifalias long.....	1224
snmp-server community.....	1224
snmp-server contact.....	1226
snmp-server enable traps.....	1226
snmp-server engineID.....	1227
snmp-server group.....	1228
snmp-server host.....	1229
snmp-server location.....	1231
snmp-server packetsize.....	1232
snmp-server trap-source.....	1232
snmp-server user.....	1233
snmp-server user (for AES128-CFB Encryption).....	1235
snmp-server view.....	1236
snmp trap link-status.....	1237
Syslog Commands.....	1237
clear logging.....	1237
default logging buffered.....	1237
default logging console.....	1238
logging extended.....	1238
default logging monitor.....	1239
default logging trap.....	1239
logging.....	1240
logging buffered.....	1240
logging console.....	1241
logging facility.....	1242
logging history.....	1243
logging history size.....	1243
logging monitor.....	1244
logging on.....	1244
logging source-interface.....	1245
logging synchronous.....	1246
logging trap.....	1246
logging version.....	1247
show logging.....	1248
show logging driverlog stack-unit.....	1249
show logging auditlog.....	1249
terminal monitor.....	1250
56 Stacking Commands.....	1251
power-cycle stack-unit.....	1251
redundancy disable-auto-reboot.....	1252
redundancy force-failover stack-unit.....	1253
reset stack-unit.....	1253
show redundancy.....	1254

show system stack-ports.....	1255
show system stack-unit iom-mode.....	1256
show system stack-unit stack-group.....	1257
stack-unit iom-mode.....	1257
stack-unit priority.....	1258
stack-unit provision.....	1259
stack-unit renumber.....	1259
57 Storm Control.....	1261
io-aggregator broadcast storm-control.....	1262
show io-aggregator broadcast storm-control status.....	1262
show storm-control unknown-unicast.....	1263
show storm-control broadcast.....	1263
show storm-control multicast.....	1264
storm-control multicast (Interface).....	1264
storm-control broadcast (Configuration).....	1265
storm-control broadcast (Interface).....	1265
storm-control multicast (Configuration).....	1266
storm-control PFC/LLFC.....	1266
storm-control unknown-unicast (Configuration).....	1267
storm-control unknown-unicast (Interface).....	1267
58 SupportAssist.....	1269
eula-consent.....	1269
support-assist.....	1271
support-assist activate.....	1271
support-assist activity.....	1272
SupportAssist Commands.....	1273
activity.....	1273
contact-company.....	1274
contact-person.....	1274
enable.....	1275
server.....	1276
SupportAssist Activity Commands.....	1276
action-manifest get.....	1276
action-manifest install.....	1277
action-manifest remove.....	1278
action-manifest show.....	1279
enable.....	1279
SupportAssist Company Commands.....	1280
address.....	1280
street-address.....	1281
territory.....	1282
SupportAssist Person Commands.....	1282
email-address.....	1283
phone.....	1283

preferred-method.....	1284
time-zone.....	1285
SupportAssist Server Commands.....	1285
proxy-ip-address.....	1286
enable.....	1287
url.....	1287
show eula-consent.....	1288
show running-config.....	1289
show support-assist status.....	1290
59 Spanning Tree Protocol (STP).....	1292
bridge-priority.....	1292
debug spanning-tree.....	1293
description.....	1293
disable.....	1294
forward-delay.....	1294
hello-time.....	1295
max-age.....	1295
portfast bpdufilter default.....	1296
protocol spanning-tree.....	1296
show config.....	1297
show spanning-tree 0.....	1297
spanning-tree 0.....	1299
60 System Time.....	1301
clock set.....	1301
clock summer-time date.....	1302
clock summer-time recurring.....	1303
debug ntp.....	1304
ntp offset-threshold.....	1305
ntp server.....	1305
ntp authenticate.....	1306
ntp authentication-key.....	1306
ntp master <stratum>.....	1307
ntp server.....	1308
ntp source.....	1309
ntp trusted-key.....	1309
show clock.....	1310
show ntp associations.....	1310
show ntp vrf associations.....	1311
show ntp status.....	1312
61 Tunneling	1314
tunnel-mode.....	1314
tunnel source.....	1315
tunnel keepalive.....	1315

tunnel allow-remote.....	1316
tunnel dscp.....	1317
tunnel destination.....	1317
tunnel flow-label.....	1318
tunnel hop-limit.....	1318
ip unnumbered.....	1319
ipv6 unnumbered.....	1320
62 u-Boot.....	1321
boot change.....	1321
boot selection.....	1322
boot show net config retries.....	1322
boot write net config retries.....	1322
boot zero.....	1323
default gateway.....	1323
enable.....	1323
help.....	1324
ignore enable password.....	1324
ignore startup config.....	1325
interface management ethernet ip address.....	1325
no default-gateway.....	1325
no interface management ethernet ip address.....	1326
reload.....	1326
show boot blc.....	1326
show boot selection.....	1327
show bootflash.....	1327
show bootvar.....	1328
show default-gateway.....	1328
show interface management Ethernet.....	1329
show interface management port config.....	1329
syntax help.....	1330
63 Uplink Failure Detection (UFD).....	1331
clear ufd-disable.....	1331
debug uplink-state-group.....	1332
defer-timer.....	1332
description.....	1333
downstream.....	1333
downstream auto-recover.....	1334
downstream disable links.....	1335
enable.....	1336
show running-config uplink-state-group.....	1336
show uplink-state-group.....	1337
uplink-state-group.....	1338
upstream.....	1339

64 VLAN Stacking.....	1340
dei enable.....	1340
dei honor.....	1341
dei mark.....	1341
member.....	1342
show interface dei-honor.....	1342
show interface dei-mark.....	1343
vlan-stack access.....	1344
vlan-stack compatible.....	1344
vlan-stack dot1p-mapping.....	1345
vlan-stack protocol-type.....	1345
vlan-stack trunk.....	1346
65 Virtual Link Trunking (VLT).....	1348
back-up destination.....	1349
clear ip mroute.....	1349
clear ip pim tib.....	1350
clear vlt statistics.....	1350
delay-restore abort-threshold.....	1351
lACP ungroup member-independent.....	1352
multicast peer-routing timeout.....	1352
peer-link port-channel.....	1353
peer-routing.....	1353
peer-routing-timeout.....	1354
primary-priority.....	1354
show ip mroute.....	1355
show vlt backup-link.....	1357
show vlt brief.....	1357
show vlt detail.....	1358
show vlt inconsistency.....	1358
show vlt mismatch.....	1359
show vlt role.....	1359
show vlt statistics.....	1360
stack-unit iom-mode.....	1361
system-mac.....	1362
unit-id.....	1362
vlt domain.....	1363
vlt-peer-lag port-channel.....	1363
show vlt private-vlan.....	1364
66 Virtual Router Redundancy Protocol (VRRP).....	1365
advertise-interval.....	1366
authentication-type.....	1366
clear counters vrrp.....	1367
debug vrrp.....	1367

description.....	1368
disable.....	1368
hold-time.....	1369
preempt.....	1369
priority.....	1370
show config.....	1370
show vrrp.....	1371
track.....	1373
virtual-address.....	1374
vrrp delay minimum.....	1375
vrrp delay reload.....	1375
vrrp-group.....	1376
VRRP for IPv6 Commands.....	1376
clear counters vrrp ipv6.....	1376
debug vrrp ipv6.....	1377
show vrrp ipv6.....	1378
vrrp-ipv6-group.....	1379
version.....	1380
67 SNMP Traps.....	1382
68 FC Flex IO Modules.....	1386
FC Flex IO Modules.....	1386
Data Center Bridging (DCB) for FC Flex IO Modules.....	1386
NPIV Proxy Gateway for FC Flex IO Modules.....	1386
description (for FCoE maps).....	1387
fabric.....	1387
fabric-id vlan.....	1388
fcf-priority.....	1389
fc-map.....	1389
fcoe-map.....	1390
fka-adv-period.....	1391
interface vlan (NPIV proxy gateway).....	1392
keepalive.....	1393
show fcoe-map.....	1393
show npiv devices.....	1395
69 Debugging and Diagnostics.....	1398
Offline Diagnostic Commands.....	1398
Hardware Commands.....	1399
clear hardware stack-unit.....	1399
clear hardware system-flow.....	1400
show hardware layer2 acl.....	1400
show hardware layer3.....	1401
diag stack-unit.....	1401
hardware watchdog.....	1402

online stack-unit.....	1403
offline stack-unit.....	1403
show diag.....	1404
show hardware stack-unit.....	1406
show hardware system-flow.....	1413
show hardware buffer interface.....	1415
show hardware counters interface interface.....	1417
show hardware drops.....	1418
A Internet Control Message Protocol (ICMP) Message Types.....	1421

About this Guide

This book provides information about the Dell Networking OS command line interface (CLI) on the Dell PowerEdge FN I/O Module.

This book also includes information about the protocols and features found in the Dell Networking OS and on the Dell Networking systems supported by the Dell Networking OS.

References

For more information about your system, refer to the following documents:

- *Dell PowerEdge FN I/O Module Configuration Guide*
- *Dell PowerEdge FN I/O Module Getting Started Guide*
- *Release Notes for the Dell System PowerEdge FN I/O Module*

Topics:

- [Objectives](#)
- [Audience](#)
- [Conventions](#)
- [Information Icons](#)

Objectives

This book is intended as a reference guide for the FN I/O Module CLI commands, with detailed syntax statements, along with usage information and sample output.

This guide contains an Appendix with a list of the request for comment (RFCs) and management information base files (MIBs) supported.

NOTE: For more information about when to use the CLI commands, refer to the *Dell PowerEdge FN I/O Module Configuration Guide* for your system.

Audience

This book is intended for system administrators who are responsible for configuring or maintaining networks. This guide assumes that you are knowledgeable in Layer 2 and Layer 3 networking technologies.

Conventions

This book uses the following conventions to describe command syntax.

- | | |
|------------------|--|
| Keyword | Keywords are in Courier font and must be entered in the CLI as listed. |
| <i>parameter</i> | Parameters are in italics and require a number or word to be entered in the CLI. |
| {X} | Keywords and parameters within braces must be entered in the CLI. |

- [X] Keywords and parameters within brackets are optional.
- x|y Keywords and parameters separated by a bar require you to choose one option.
- x||y Keywords and parameters separated by a double bar allow you to choose any or all of the options.

Information Icons

This book uses the following information symbols:

 **NOTE:** The Note icon signals important operational information.

 **CAUTION:** The Caution icon signals information about situations that could result in equipment damage or loss of data.

 **WARNING:** The Warning icon signals information about hardware handling that could result in injury.

Before You Start

By following the instructions in the *Dell PowerEdge FN I/O Module Getting Started Guide* that is shipped with the product, you install the FN I/O Module in a Dell PowerEdge FX2 server chassis.

The Aggregator installs with zero-touch configuration. After you power it on, an Aggregator boots up with default settings and auto-configures with software features enabled. This chapter describes the default settings and software features that are automatically configured at startup. Use the tasks described in the other chapters to reconfigure the Aggregator for customized network operation.

Topics:

- [Operational Modes](#)
- [Default Settings](#)
- [Other Auto-Configured Settings](#)
- [DCB Support](#)
- [FCoE Connectivity](#)
- [iSCSI Operation](#)
- [Link Aggregation](#)
- [Uplink Failure Detection](#)
- [VLANs](#)
- [Where to Go From Here](#)

Operational Modes

The FN I/O Module supports four operational modes. Select the operational mode that meets your deployment needs. To enable a new operational mode, reload the switch.

- Standalone mode — `stack-unit unit iom-mode standalone`. This is the default mode for IOA. It is fully automated zero-touch mode that allows you to configure VLAN memberships. (Manageable through CMC also)
- Programmable MUX mode (PMUX) — `stack-unit unit iom-mode programmable-mux`. Select this mode to configure PMUX mode CLI commands.
- Stacking mode — `stack-unit unit iom-mode stacking`. Select this mode to stack up to six IOA stack units as a single logical switch. The stack units can be in the same or on different chassis. This is a low-touch mode where all configuration except VLAN membership is automated. To enable VLAN, you must configure it. In this operational mode, ports 9 and 10 are dedicated to stacking.
- Virtual Link Trunking mode (VLT) — `stack-unit unit iom-mode vlt`. Select this mode to multi-home server interfaces to different IOA modules. This is a low-touch mode where all configuration except VLAN membership is automated. To enable VLAN, you must configure it. In this mode, ports 9 is configured as VLT interconnect.
- Full Switch mode — `stack-unit unit iom-mode full-switch`. The full switch mode provides Layer 2 / Layer 3 functionalities on the Dell FX2 chassis. All the commands and configurations supported on the MXL is available in full-switch mode.

For more information, see the *FN IOM Configuration Guide*.

Default Settings

The I/O Aggregator provides zero-touch configuration with the following default configuration settings:

- Default user name (**root**)
- Password (**calvin**)
- VLAN (**vlan1**) and IP address for in-band management (**DHCP-assigned**)
- IP address for out-of-band (OOB) management (**DHCP-assigned**)
- Read-only SNMP community name (**public**)
- Broadcast storm control (**enabled**)
- Unregistered Multicast Packets flooding (**enabled**)
- IGMP snooping in all VLANs except the default VLAN (**enabled**)
- VLAN configuration (**all ports belong to all VLANs**)

You can change any of these default settings using the CLI. Refer to the appropriate chapter for details.

i **NOTE:** You can also change many of the default settings using the chassis management controller (CMC) interface. For information about how to access the CMC to configure an Aggregator, refer to the *Dell PowerEdge M1000e Enclosure Hardware Owner's Manual* or *Dell Chassis Management Controller (CMC) User's Guide* on the Dell Support website at <http://support.dell.com/support/edocs/systems/pem/en/index.htm>.

Other Auto-Configured Settings

After the Aggregator powers on, it auto-configures and is operational with software features enabled, including:

- VLANs: All ports are configured as members of all (4094) VLANs. All VLANs are up and can send or receive layer 2 traffic. For more information, refer to [VLANs](#).
- Data Center Bridging Capability Exchange Protocol (DCBX)
- Fibre Channel over Ethernet (FCoE) connectivity
- FCoE Initiation Protocol (FIP) snooping
- Hybrid ports: Ports are administratively up and auto-configured to operate as hybrid ports to transmit tagged and untagged VLAN traffic.
- iSCSI optimization
- IGMP snooping
- Jumbo frames: Ports are set to a maximum MTU of 12,000 bytes by default.
- Link aggregation: All uplink ports are configured in a single LAG (LAG 128).
- Link Layer Discovery Protocol (LLDP): Enabled on all ports.
- Link tracking: Enables server-facing links to be brought up only if the uplink port-channel (LAG 128) is up.

DCB Support

DCB enhancements for data center networks are supported to eliminate packet loss and provision links with required bandwidth.

The Aggregator provides zero-touch configuration for DCB. The Aggregator auto-configures DCBX port roles to match the DCBX configuration in the ToR switches to which it connects through its uplink ports.

The Aggregator supports DCB only in standalone mode and not in the stacking mode.

FCoE Connectivity

Many data centers use Fibre Channel (FC) in storage area networks (SANs). Fibre Channel over Ethernet (FCoE) encapsulates Fibre Channel frames over Ethernet networks.

On an Aggregator, the internal ports support FCoE connectivity and connect to the converged network adapter (CNA) in blade servers. FCoE allows Fibre Channel to use 10-Gigabit Ethernet networks while preserving the Fibre Channel protocol.

The Aggregator also provides zero-touch configuration for FCoE configuration. The Aggregator auto-configures to match the FCoE settings used in the ToR switches to which it connects through its uplink ports.

iSCSI Operation

Support for iSCSI traffic is turned on by default when the Aggregator powers up. No configuration is required.

When the Aggregator powers up, it monitors known TCP ports for iSCSI storage devices on all interfaces. When a session is detected, an entry is created and monitored as long as the session is active.

The Aggregator also detects iSCSI storage devices on all interfaces and auto-configures to optimize performance. Performance optimization operations, such as Jumbo frame size support, and disabling storm control on interfaces connected to an iSCSI equallogic (EQL) storage device, are applied automatically.

CLI configuration is necessary only when the configuration includes iSCSI storage devices that cannot be automatically detected and when non-default QoS handling is required.

Link Aggregation

In Standalone, Stacking, and VLT modes, all uplink ports (except port 9 in VLT mode) are configured in a single LAG (LAG 128). There can be multiple uplink LAGs in programmable-mux mode. Server-facing ports are auto-configured as part of link aggregation groups if the corresponding server is configured for LACP-based NIC teaming. Static LAGs are supported only in PMUX and Full-Switch modes.

NOTE: The default LACP timeout is Long-Timeout. The same timeout is recommended to be configured in peer devices.

Uplink Failure Detection

By default, all server-facing ports are tracked by the operational status of the uplink LAG. If the uplink LAG goes down, the Aggregator loses its connectivity and is no longer operational; all server-facing ports are brought down.

NOTE: If installed servers do not have connectivity to a ToR switch, check the Link Status LED of uplink ports on the Aggregator. If all LEDs are ON, check the LACP configuration on the ToR switch that is connected to the Aggregator to ensure the LACP is correctly configured.

VLANs

By default, all Aggregator ports belong to all 4094 VLANs and are members of untagged VLAN 1. You can use the CLI or CMC interface to configure only the required VLANs on a port.

When you configure VLANs on server-facing interfaces (ports 1 to 8), you can assign VLANs to a port or a range of ports by entering the `vlan tagged` or `vlan untagged` commands in interface configuration mode; for example:

```
Dell(conf)# interface tengigabitethernet 0/2 - 4
Dell(conf-if-range-te-0/2-4)# vlan tagged 5,7,10-12
Dell(conf-if-range-te-0/2-4)# vlan untagged 3
```

NOTE: You can also use the CMC interface to configure VLANs.

Uplink LAG

The tagged VLAN membership of the uplink LAG is automatically configured based on the tagged and untagged VLAN configuration of all server-facing ports (ports 1 to 8).

The untagged VLAN used for the uplink LAG is always the default VLAN.

Server-Facing LAGs

The tagged VLAN membership of a server-facing LAG is automatically configured based on the server-facing ports that are members of the LAG.

The untagged VLAN of a server-facing LAG is configured based on the untagged VLAN to which the lowest numbered server-facing port in the LAG belongs.

NOTE: Dell Networking recommends that you configure the same VLAN membership on all LAG member ports.

Stacking Mode

When you configure an Aggregator to operate in stacking mode (See “Configuring and Bringing Up a Stack” in the Dell Networking Configuration Guide for the M I/O Aggregator), VLANs are reconfigured as follows:

If an Aggregator port belonged to all 4094 VLANs in standalone mode (default), all VLAN membership is removed and the port is assigned only to default VLAN 1. You must configure additional VLAN membership as necessary.

If you had manually configured an Aggregator port to belong to one or more VLANs (non-default) in standalone mode, the VLAN configuration is retained in stacking mode only on the master switch.

When you reconfigure an Aggregator from stacking to standalone mode:

Aggregator ports that you manually configured for VLAN membership in stacking mode retain their VLAN configuration in standalone mode.

To restore the default auto-VLAN mode of operation (in which all ports are members of all 4094 VLANs) on a port, enter the `auto vlan` command:

```
Dell(conf)# interface tengigabitethernet 0/2
Dell(conf-if-te-0/2)# auto vlan
```

The `auto vlan` command is applicable only in Standalone mode.

To get the default standalone mode configurations:

- Restore to factory default settings.

Where to Go From Here

You can customize the Aggregator for use in your data center network as necessary. To perform additional switch configuration, do one of the following:

- For remote out-of-band management, enter the OOB management interface IP address into a Telnet or SSH client and log in to the switch using the user ID and password to access the CLI.
- For local management using the CLI, use the attached console connection.
- For remote in-band management from a network management station, enter the VLAN IP address of the management port and log in to the switch to access the CLI.

If you installed the Aggregator in a stack, you can configure additional settings for switch stacking

In case of a Dell Networking OS upgrade, you can check to see that an Aggregator is running the latest Dell Networking OS version by entering the `show version` command. To download a Dell Networking OS version, go to <http://support.dell.com>.

Refer to the appropriate chapter for detailed information on how to configure specific software settings.

CLI Basics

This chapter describes the command line interface (CLI) structure and command modes. The Dell operating system commands are in a text-based interface that allows you to use the launch commands, change command modes, and configure interfaces and protocols.

Topics:

- [Accessing the Command Line](#)
- [Multiple Configuration Users](#)
- [Navigating the CLI](#)
- [Obtaining Help](#)
- [Using the Keyword no Command](#)
- [Filtering show Commands](#)
- [Command Modes](#)
- [Track Login Activity](#)
- [Limit Concurrent Login Sessions](#)

Accessing the Command Line

When the system boots successfully, you are positioned on the command line in EXEC mode and not prompted to log in. You can access the commands through a serial console port or a Telnet session. When you Telnet into the switch, you are prompted to enter a login name and password.

Example

```
telnet 172.31.1.53
Trying 172.31.1.53...
Connected to 172.31.1.53.
Escape character is '^]'.
Login: username
Password:
Dell>
```

After you log in to the switch, the prompt provides you with the current command-level information. For example:

Prompt	CLI Command Mode
Dell>	EXEC
Dell#	EXEC Privilege
Dell (conf) #	CONFIGURATION

NOTE: For a list of all the command mode prompts, refer to the [Command Modes Modes](#) section.

Multiple Configuration Users

When a user enters CONFIGURATION mode and another user is already in CONFIGURATION mode, the Dell operating system generates an alert warning message similar to the following:

```
Dell#conf
```

```
% Warning: The following users are currently configuring the system:
```

```
User "" on line console0
User "admin" on line vty0 ( 123.12.1.123 )
User "admin" on line vty1 ( 123.12.1.123 )
User "Irene" on line vty3 ( 123.12.1.321 )
Dell#conf
```

When another user enters CONFIGURATION mode, the Dell Networking OS sends a message similar to the following:

```
% Warning: User "admin" on line vty2 "172.16.1.210" is in configuration
```

In this case, the user is “admin” on vty2.

Navigating the CLI

The Dell Networking OS displays a CLI prompt comprised of the host name and CLI mode.

- Host name is the initial part of the prompt and is “Dell” by default. You can change the host name with the `hostname` command.
- CLI mode is the second part of the prompt and reflects the current CLI mode. For a list of the Dell Networking OS command modes, refer to the command mode list in the [Accessing the Command Line](#) section.

The CLI prompt changes as you move up and down the levels of the command structure. Starting with CONFIGURATION mode, the command prompt adds modifiers to further identify the mode. For more information about command modes, refer to the [Command Modes](#) section.

Table 1. CLI Command Modes and Prompts

Prompt	CLI Command Mode
Dell>	EXEC
Dell#	EXEC Privilege
Dell(conf)#	CONFIGURATION
Dell(conf-if-te-0/1)#	INTERFACE
Dell(conf-if-vl-1)#	
Dell(conf-if-ma-0/0)#	
Dell(conf-if-range)#	
Dell(conf-line-console)#	LINE
Dell(conf-line-vty)#	
Dell(conf-mon-sess)#	MONITOR SESSION

Obtaining Help

As soon as you are in a command mode there are several ways to access help.

To obtain a list of keywords at any command mode: Type a `?` at the prompt or after a keyword. There must always be a space before the `?`.

To obtain a list of keywords with a Type `help` at the prompt.

brief functional description:

To obtain a list of available options: Type a keyword and then type a space and a ?.

To obtain a list of partial keywords using a partial keyword: Type a partial keyword and then type a ?.

Example The following is an example of typing `ip ?` at the prompt:

```
Dell(conf)#ip ?
igmp      Internet Group Management Protocol
route     Establish static routes
telnet    Specify telnet options
```

When entering commands, you can take advantage of the following timesaving features:

- The commands are not case-sensitive.
- You can enter partial (truncated) command keywords. For example, you can enter `int tengig int` for the `interface tengigabitethernet interface` command.
- To complete keywords in commands, use the TAB key.
- To display the last enabled command, use the up Arrow key.
- To erase the previous character, use either the Backspace key or Delete key.
- To navigate left or right in the Dell Networking OS command line, use the left and right Arrow keys.

The shortcut key combinations at the Dell Networking OS command line are as follows:

Key Combination Action

CNTL-A	Moves the cursor to the beginning of the command line.
CNTL-B	Moves the cursor back one character.
CNTL-D	Deletes the character at the cursor.
CNTL-E	Moves the cursor to the end of the line.
CNTL-F	Moves the cursor forward one character.
CNTL-I	Completes a keyword.
CNTL-K	Deletes all the characters from the cursor to the end of the command line.
CNTL-L	Re-enters the previous command.
CNTL-N	Returns to the more recent commands in the history buffer after recalling commands with Ctrl-P or the up Arrow key.
CNTL-P	Recalls commands, beginning with the last command.
CNTL-U	Deletes the line.
CNTL-W	Deletes the previous word.
CNTL-X	Deletes the line.
CNTL-Z	Comes back to EXEC mode from any CONFIGURATION mode.
Esc B	Moves the cursor back one word.
Esc F	Moves the cursor forward one word.
Esc D	Deletes all the characters from the cursor to the end of the word.

Using the Keyword no Command

To disable, delete or return to default values, use the `no` form of the commands.

For most commands, if you type the keyword `no` in front of the command, you disable that command or delete it from the running configuration. In this guide, the `no` form of the command is described in the Syntax portion of the command description. For example:

Syntax	<code>no {boot default enable ftp-server hardware hostname ip line logging monitor service io-aggregator broadcast storm-control snmp-server username}</code>	
Defaults	None	
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Filtering show Commands

To find specific information, display certain information only or begin the command output at the first instance of a regular expression or phrase, you can filter the display output of a `show` command.

When you execute a `show` command, and then enter a pipe (`|`), one of the following parameters, and a regular expression, the resulting output either excludes or includes those parameters.

NOTE: The Dell Networking OS accepts a space before or after the pipe, no space before or after the pipe, or any combination. For example: `Dell#command | grep TenGig|except regular-expression | find regular-expression.`

except	displays only the text that does not match the pattern (or regular expression)
find	searches for the first occurrence of a pattern
grep	displays text that matches a pattern.
no-more	does not paginate the display output
save	copies the output to a file for future use

The `grep` command option has an `ignore-case` sub-option that makes the search case-insensitive. For example, the commands:

- `show run | grep Ethernet` returns a search result with instances containing a capitalized "Ethernet," such as interface TenGigabitEthernet 0/1.
- `show run | grep ethernet` does not return the search result above because it only searches for instances containing a non-capitalized "ethernet".
- `show run | grep Ethernet ignore-case` returns instances containing both "Ethernet" and "ethernet".

Displaying All Output

To display the output all at once (not one screen at a time), use the `no-more` option after the pipe. This operation is similar to the terminal `length screen-length` command except that the `no-more` option affects the output of just the specified command. For example:

```
Dell#show running-config|no-more
```

Filtering the Command Output Multiple Times

You can filter a single command output multiple times. To filter a command output multiple times, place the `save` option as the last filter. For example:

```
Dell# command | grep regular-expression | except regular-expression | grep other-regular-expression | find regular-expression | no-more | save
```

Command Modes

To navigate and launch various CLI modes, use specific commands. Navigation to these modes is described in the following sections.

EXEC Mode

When you initially log in to the switch, by default, you are logged in to EXEC mode. This mode allows you to view settings and enter EXEC Privilege mode, which is used to configure the device.

When you are in EXEC mode, the `>` prompt is displayed following the host name prompt, which is “Dell” by default. You can change the host name prompt using the `hostname` command.

NOTE: Each mode prompt is preceded by the host name.

EXEC Privilege Mode

The `enable` command accesses EXEC Privilege mode. If an administrator has configured an “Enable” password, you are prompted to enter it.

EXEC Privilege mode allows you to access all the commands accessible in EXEC mode, plus other commands, such as to clear address resolution protocol (ARP) entries and IP addresses. In addition, you can access CONFIGURATION mode to configure interfaces, routes and protocols on the switch. While you are logged in to EXEC Privilege mode, the `#` prompt displays.

CONFIGURATION Mode

In EXEC Privilege mode, use the `configure` command to enter CONFIGURATION mode and configure routing protocols and access interfaces.

To enter CONFIGURATION mode:

- 1 Verify that you are logged in to EXEC Privilege mode.
- 2 Enter the `configure` command. The prompt changes to include (conf).

From this mode, you can enter INTERFACE mode by using the `interface` command.

INTERFACE Mode

To configure interfaces or IP services on those interfaces, use INTERFACE mode. An interface can be physical (for example, a TenGigabit Ethernet port) or virtual (for example, the VLAN interface).

To enter INTERFACE mode:

- 1 Verify that you are logged in to CONFIGURATION mode.
- 2 Enter the `interface` command and then enter an interface type and interface number that is available on the switch.

The prompt changes to include the designated interface and slot/port number. For example:

Prompt	Interface Type
Dell (conf-if-te-0/1) #	Ten-Gigabit Ethernet interface then slot/port information
Dell (conf-if-vl-1) #	VLAN Interface then VLAN number (range 1–4094)
Dell (conf-if-ma-0/0) #	Management Ethernet interface then slot/port information
Dell (conf-if-range) #	Designated interface range (used for bulk configuration)

LINE Mode

To configure the console or virtual terminal parameters, use LINE mode.

To enter LINE mode:

- 1 Verify that you are logged in to CONFIGURATION mode.
- 2 Enter the `line` command. Include the keywords `console` or `vty` and their line number available on the switch. The prompt changes to include `(config-line-console)` or `(config-line-vty)`.

You can exit this mode by using the `exit` command.

MONITOR SESSION Mode

In CONFIGURATION mode, use the `monitor session` command to enter MONITOR SESSION mode and configure port monitoring.

To enter MONITOR SESSION mode:

- 1 Verify that you are logged in to CONFIGURATION mode.
- 2 Use the `monitor session` command. Include the monitor session ID. The prompt changes to include `(conf-mon-sess)`.

You can return to CONFIGURATION mode by using the `exit` command.

PROTOCOL LLDP Mode

In CONFIGURATION mode, use the `protocol lldp` command to enter PROTOCOL LLDP mode and configure the LLDP protocol.

To enter PROTOCOL LLDP mode:

- 1 Verify that you are logged in to CONFIGURATION mode.
- 2 Enter the `protocol lldp` command. The prompt changes to include `Dell (config-lldp)`.

You can return to CONFIGURATION mode by using the `exit` command.

Track Login Activity

Dell Networking OS enables you to track the login activity of users and view the successful and unsuccessful login events.

When you log in using the console or VTY line, the system displays the last successful login details of the current user and the number of unsuccessful login attempts since your last successful login to the system. The system stores the number of unsuccessful login attempts that have occurred in the last 30 days by default. You can change the default value to any number of days from 1 to 30. By default, login activity tracking is disabled. You can enable it using the `login statistics enable` command from the configuration mode.

Restrictions for Tracking Login Activity

These restrictions apply for tracking login activity:

- Only the system and security administrators can configure login activity tracking and view the login activity details of other users.
- Login statistics is not applicable for login sessions that do not use user names for authentication. For example, the system does not report login activity for a telnet session that prompts only a password.

Configuring Login Activity Tracking

To enable and configure login activity tracking, follow these steps:

- 1 Enable login activity tracking.

CONFIGURATION mode

```
login statistics enable
```

After enabling login statistics, the system stores the login activity details for the last 30 days.

- 2 (Optional) Configure the number of days for which the system stores the user login statistics. The range is from 1 to 30.

CONFIGURATION mode

```
login statistics time-period days
```

Example of Configuring Login Activity Tracking

The following example enables login activity tracking. The system stores the login activity details for the last 30 days.

```
Dell(config)#login statistics enable
```

The following example enables login activity tracking and configures the system to store the login activity details for 12 days.

```
Dell(config)#login statistics enable  
Dell(config)#login statistics time-period 12
```

Display Login Statistics

To view the login statistics, use the `show login statistics` command.

Example of the `show login statistics` Command

The `show login statistics` command displays the successful and failed login details of the current user in the last 30 days or the custom defined time period.

```
Dell#show login statistics
```

```
-----  
User: admin  
Last login time: Mon Feb 16 04:40:00 2015  
Last login location: Line vty0 ( 10.14.1.97 )  
Unsuccessful login attempt(s) since the last successful login: 0  
Unsuccessful login attempt(s) in last 30 day(s): 3  
-----
```

Example of the `show login statistics all` command

The `show login statistics all` command displays the successful and failed login details of all users in the last 30 days or the custom defined time period.

```
Dell#show login statistics all  
  
-----  
User: admin  
Last login time: Mon Feb 16 04:40:00 2015  
Last login location: Line vty0 ( 10.14.1.97 )  
Unsuccessful login attempt(s) since the last successful login: 0  
Unsuccessful login attempt(s) in last 7 day(s): 3  
-----  
  
-----  
User: secadm  
Last login time: Mon Feb 16 04:45:29 2015  
Last login location: Line vty0 ( 10.14.1.97 )  
Unsuccessful login attempt(s) since the last successful login: 0  
Unsuccessful login attempt(s) in last 7 day(s): 0  
-----
```

Example of the `show login statistics user user-id` command

The `show login statistics user user-id` command displays the successful and failed login details of a specific user in the last 30 days or the custom defined time period.

```
Dell#show login statistics user admin  
  
-----  
User: admin  
Last login time: Mon Feb 16 04:40:00 2015  
Last login location: Line vty0 ( 10.14.1.97 )  
Unsuccessful login attempt(s) since the last successful login: 0  
Unsuccessful login attempt(s) in last 11 day(s): 3  
-----
```

Limit Concurrent Login Sessions

Dell Networking OS enables you to limit the number of concurrent login sessions of users on VTY, Aux, and console lines. You can also clear any of your existing sessions when you reach the maximum permitted number of concurrent sessions.

By default, you can use all 10 VTY lines, one console line, and one Aux line. You can limit the number of available sessions using the `login concurrent-session limit` command and so restrict users to that specific number of sessions. You can optionally configure the system to provide an option to the users to clear any of their existing sessions.

Restrictions for Limiting the Number of Concurrent Sessions

These restrictions apply for limiting the number of concurrent sessions:

- Only the system and security administrators can limit the number of concurrent sessions and enable the clear-line option.
- Users can clear their existing sessions only if the system is configured with the `login concurrent-session clear-line enable` command.

Configuring Concurrent Session Limit

To configure concurrent session limit, follow this procedure:

- Limit the number of concurrent sessions for all users.
CONFIGURATION mode

```
login concurrent-session limit number-of-sessions
```

Example of Configuring Concurrent Session Limit

The following example limits the permitted number of concurrent login sessions to 4.

```
Dell(config)#login concurrent-session limit 4
```

Enabling the System to Clear Existing Sessions

To enable the system to clear existing login sessions, follow this procedure:

- Use the following command.
CONFIGURATION mode

```
login concurrent-session clear-line enable
```

Example of Enabling the System to Clear Existing Sessions

The following example enables you to clear your existing login sessions.

```
Dell(config)#login concurrent-session clear-line enable
```

Example of Clearing Existing Sessions

When you try to login, the following message appears with all your existing concurrent sessions, providing an option to close any one of the existing sessions:

```
$ telnet 10.11.178.14
Trying 10.11.178.14...
Connected to 10.11.178.14.
Escape character is '^]'.
Login: admin
Password:
Current sessions for user admin:
Line      Location
2 vty 0    10.14.1.97
3 vty 1    10.14.1.97
Clear existing session? [line number/Enter to cancel]:
```

When you try to create more than the permitted number of sessions, the following message appears, prompting you to close one of the existing sessions. If you close any of the existing sessions, you are allowed to login. :

```
$ telnet 10.11.178.17
Trying 10.11.178.17...
Connected to 10.11.178.17.
Escape character is '^]'.
Login: admin
Password:
Maximum concurrent sessions for the user reached.
Current VTY sessions for user admin:
Line      Location
2 vty 0    10.14.1.97
```

```
3 vty 1      10.14.1.97
4 vty 2      10.14.1.97
5 vty 3      10.14.1.97
Kill existing session? [line number/Enter to cancel]:
```

File Management

This chapter contains commands needed to manage the configuration files and includes other file management commands.

boot system gateway

Specify the IP address of the default next-hop gateway for the management subnet.

Syntax	<code>boot system gateway ip-address</code>	
Parameters	<i>ip-address</i>	Enter an IP address in dotted decimal format.
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.
Usage Information	Saving the address to the startup configuration file preserves the address in NVRAM in case the startup configuration file is deleted.	

boot system stack-unit

Specify the location of the Dell Networking OS image to be used to boot the system.

Syntax	<code>boot system stack-unit <0-5 all> {default primary secondary}</code>	
Parameters	0-5	Enter the stack member unit identifier of the stack member.
	all	Enter the keyword <code>all</code> to set the primary, secondary, and default images for the system.
	default	Enter the keyword <code>default</code> to set the default image path for the system.
	primary	Enter the keyword <code>primary</code> to set the primary image path for the system.
	secondary	Enter the keyword <code>secondary</code> to set the secondary image path for the system.
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.
9.4(0.0)	Supported on the FN I/O aggregator.

Usage Information The system first attempts to load the image from the primary path. If it fails to boot, the system tries to load the image from the secondary path and if that also fails, the system loads the default image.

cd

Change to a different working directory.

Syntax `cd directory`

Parameters *directory* (OPTIONAL) Enter one of the following:

- `flash`: (internal Flash) or any sub-directory
- `usbflash`: (external Flash) or any sub-directory

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

copy

Copy one file to another location. The Dell Networking OS supports IPv4 addressing for FTP, TFTP, and SCP (in the *hostip* field).

Syntax `copy source-file-url destination-file-url`

Parameters *file-url* Enter the following location keywords and information:

- To copy a file from the internal FLASH, enter `flash://` then the filename.
- To copy the running configuration, enter the keywords `running-config`.
- To copy the startup configuration, enter the keywords `startup-config`.
- To copy a file on the external FLASH, enter `usbflash://` then the filename.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The Dell Networking OS supports a maximum of 100 files, at the root directory level, on both the internal and external Flash.

The `usbflash` commands are supported. For a list of approved USB vendors, refer to the *Dell Networking OS Release Notes*.

When copying a file to a remote location (for example, using Secure Copy [SCP]), enter only the keywords and Dell Networking OS prompts you for the rest of the information.

NOTE: Dell Networking OS imposes a length limit on the password you create for performing the secure copy operation. Your password can be no longer than 32 characters.

For example, when using SCP, you can enter the `copy running-config scp:` command. The `running-config` is the source and the target is specified in the ensuing prompts. Dell Networking OS prompts you to enter any required information, as needed for the named destination — remote destination, destination filename, user ID and password, and so forth.

When you use the `copy running-config startup-config` command to copy the running configuration to the startup configuration file, Dell Networking OS creates a backup file on the internal flash of the startup configuration.

When you load the startup configuration or a configuration file from a network server such as TFTP to the running configuration, the configuration is added to the running configuration. This does not replace the existing running configuration. Commands in the configuration file has precedence over commands in the running configuration.

The Dell Networking OS supports copying the running-configuration to a TFTP server or to an FTP server:

- `copy running-config tftp:`
- `copy running-config ftp:`

NOTE: Dell Networking OS imposes a length limit on the password you create for accessing the FTP server. Your password can be no longer than 32 characters.

In the `copy scp: flash:` example, specifying SCP in the first position indicates that the target to specify in the ensuing prompts. Entering `flash:` in the second position means that the target is the internal Flash. In this example, the source is on a secure server running SSH, so you are prompted for the UDP port of the SSH server on the remote host.

Example (running-config scp:)

```
Dell#copy running-config scp:
Address or name of remote host []: 10.10.10.1
Port number of the server [22]: 99
Destination file name [startup-config]: old_running
User name to login remote host: sburgess
Password to login remote host:
Password to login remote host? dilling
```

Example (copy scp:)

```
Dell#copy scp: flash:
Address or name of remote host []: 10.11.199.134
Port number of the server [22]: 99
Source file name []: test.cfg
User name to login remote host: admin
```

```
Password to login remote host:  
Destination file name [test.cfg]: test1.cfg
```

Related Commands `cd` — Changes the working directory.

copy running-config startup-config

Copy running configuration to the startup configuration.

Syntax `copy running-config startup-config {duplicate}`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command is useful for quickly making a change configuration on one chassis available on external flash to move it to another chassis.

delete

Delete a file from the flash. After deletion, files cannot be restored.

Syntax `delete flash: ([flash://]filepath) usbflash ([usbflash://]filepath)`

Parameters

flash-url	Enter the following location and keywords: <ul style="list-style-type: none">For a file or directory on the internal Flash, enter <code>flash://</code> then the filename or directory name.For a file or directory on an external USB drive, enter <code>usbflash://</code> then the filename or directory name.
no-confirm	(OPTIONAL) Enter the keywords <code>no-confirm</code> to specify that the Dell Networking OS does not require user input for each file prior to deletion.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

dir

Displays the files in a file system. The default is the current directory.

Syntax `dir [filename | directory name:]`

Parameters

filename | directory name: (OPTIONAL) Enter one of the following:

- For a file or directory on the internal Flash, enter `flash://` then the filename or directory name.
- For a file or directory on an external USB drive, enter `usbflash://` then the filename or directory name.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#dir
Directory of flash:

 1  drwx  4096      Jan 01 1980 00:00:00 +00:00 .
 2  drwx  2048      Mar 06 2010 00:36:21 +00:00 ..
 3  drwx  4096      Feb 25 2010 23:32:50 +00:00 TRACE_LOG_DIR
 4  drwx  4096      Feb 25 2010 23:32:50 +00:00 CORE_DUMP_DIR
 5  d---  4096      Feb 25 2010 23:32:50 +00:00 ADMIN_DIR
 6  -rwx  720969768 Mar 05 2010 03:25:40 +00:00 6gb
 7  -rwx  4260       Mar 03 2010 22:04:50 +00:00 prem-23-5-12
 8  -rwx  31969685   Mar 05 2010 17:56:26 +00:00
DellS-XL-8-3-16-148.bin
 9  -rwx  3951       Mar 06 2010 00:36:18 +00:00 startup-config

flash: 2143281152 bytes total (1389801472 bytes free)
Dell#
```

Related Commands `cd` — Changes the working directory.

format flash

Erase all existing files and reformat the filesystem in the internal flash memory. After the filesystem is formatted, files cannot be restored.

Syntax `format {flash: | usbflash:}`

Defaults **flash memory**

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

You must include the colon (:) when entering this command.

CAUTION: This command deletes all files, including the startup configuration file. So, after executing this command, consider saving the running config as the startup config (use the `write memory` command or `copy run start` command).

Related Commands

`copy` – copies the current configuration to either the startup-configuration file or the terminal.

`show file` – displays the contents of a text file in the local filesystem.

`show file-systems` – displays information about the file systems on the system.

HTTP Copy via CLI

Copy one file to another location. Dell Networking OS supports IPv4 and IPv6 addressing for FTP, TFTP, and SCP (in the `hostip` field).

Syntax

```
copy http://10.16.206.77/sample_file flash://sample_filecopy flash://  
sample_file http://10.16.206.77/sample_file
```

You can copy from the server to the switch and vice-versa.

Parameters

copy http: Address or name of remote host []: 10.16.206.77

flash: Port number of the server [80]:

Source file name []: sample_file

User name to login remote host: x

Password to login remote host:

Destination file name [sample_file]:

Defaults

None.

Command Modes

EXEC

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the FN I/O Aggregator.
9.3(0.1)	Introduced on the M I/O Aggregator.

Example `copy http://admin:admin123@10.16.206.77/sample_file flash://sample_file`

Related Commands `copy ftp:flash`
Copy files from FTP server to switch

logging coredump stack-unit

Enable the coredump.

Syntax `logging coredump stack-unit all`

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The Kernel core dump can be large and may take up to five to 30 minutes to upload. The Dell Networking OS does not overwrite application core dumps so delete them as necessary to conserve space on the flash; if the flash is out of memory, the coredump is aborted. The Dell Networking OS completes the coredump process and waits until the upload is complete before rebooting the system.

logging coredump server

Designate a server to upload core dumps.

Syntax `logging coredump server {ipv4-address} username name password [type] password`

Parameters

{ipv4-address }	Enter the server IPv4 address (A.B.C.D).
name	Enter a username to access the target server.
type	Enter the password type: <ul style="list-style-type: none">· Enter 0 to enter an unencrypted password.· Enter 7 to enter a password that has already been encrypted using a Type 7 hashing algorithm.
password	Enter a password to access the target server.

Defaults Crash kernel files are uploaded to flash by default.

Command Modes CONFIGURATION

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.4.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Because flash space may be limited, using this command ensures your entire crash kernel files are uploaded successfully and completely. Only a single coredump server can be configured. Configuration of a new coredump server over-writes any previously configured server.

NOTE: You must disable logging coredump before you designate a new server destination for your core dumps.

Related Commands `logging coredump` – disables the kernel coredump

pwd

Display the current working directory.

Syntax `pwd`
Command Modes EXEC Privilege
Supported Modes All Modes
Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example
Dell#pwd
flash:
Dell#

Related Commands `cd` – changes the directory.

rename

Rename a file in the local file system.

Syntax `rename url url`

Parameters `url` Enter the following keywords and a filename:

- For a file on the internal Flash, enter `flash://` then the filename.
- For a file on an external USB drive, enter `usbflash://` then the filename.

Command Modes EXEC Privilege
Supported Modes All Modes
Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

restore factory-defaults

Restore factory defaults.

Syntax `restore factory-defaults stack-unit id {clear-all | nvram}`

Parameters	factory-defaults	Return the system to its factory default mode.
	<i>id</i>	Enter the stack member unit identifier to restore the mentioned stack-unit. The range is from 0 to 6. Enter the keyword <code>all</code> to restore all units in the stack.
	clear-all	Enter the keywords <code>clear-all</code> to reset the NvRAM and the system startup configuration.
	nvram	Enter the keyword <code>nvram</code> to reset the NvRAM only.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Restoring factory defaults deletes the existing startup configuration and all persistent settings (stacking, fanout, and so forth).

When restoring all units in a stack, all the units in the stack are placed into stand-alone mode.

When restoring a single unit in a stack, that unit placed in stand-alone mode. No other units in the stack are affected.

When restoring units in stand-alone mode, the units remain in stand-alone mode after the restoration. After the restore is complete, the units power cycle immediately.

 **CAUTION: There is no undo for this command.**

Example

```
Dell#restore factory-defaults stack-unit 0 clear-all
*****
*Warning - Restoring factory defaults will delete the existing*
*startup-config and resets all persistent settings (stacking,*
*fanout, etc.) and boot environment variables (boot config, console*
*baud rate, management interface settings, etc.)*
*After restoration the unit(s) will be powercycled immediately.*
*Proceed with caution !*
*****

Proceed with factory settings? Confirm [yes/no]:yes

-- Restore status --
Unit   Nvram   Config   Bootvar
-----
  0     Success Success   Success
Dell#
```

Example (NvRAM, all)

```
Dell#restore factory-defaults stack-unit all nvram
*****
*Warning - Restoring factory defaults will delete the existing*
*persistent settings (stacking, fanout, etc.)*
*All the units in the stack will be split into standalone units.*
*After restoration the unit(s) will be powercycled immediately.*
*Proceed with caution ! *
*****
Proceed with factory settings? Confirm [yes/no]:yes
-- Restore status --
Unit Nvram      Config
-----
0      Success
1      Success
2      Success
3      Not present
4      Not present
5      Not present
Power-cycling the unit(s).
Dell#
```

Example (NvRAM, single unit)

```
Dell#restore factory-defaults stack-unit 1 nvram
*****
*Warning - Restoring factory defaults will delete the existing *
*persistent settings (stacking, fanout, etc.) *
*After restoration the unit(s) will be powercycled immediately. *
*Proceed with caution ! *
*****
Proceed with factory settings? Confirm [yes/no]:yes
-- Restore status --
Unit Nvram      Config
-----
1      Success
Power-cycling the unit(s).
Dell#
```

show boot system

Displays information about boot images currently configured on the system.

Syntax show boot system stack-unit {0-5 | all}

Parameters

0-5	Enter this information to display the boot image information of only the entered stack-unit.
all	Enter the keyword all to display the boot image information of all the stack-units in the stack.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show boot system stack-unit all
Current system image information in the system:
=====
Type          Boot Type          A          B
-----
Stack-unit 0 is not present.
Stack-unit 1 DOWNLOAD BOOT 9-1-0-218      9-1-0-202
Stack-unit 2 is not present.
Stack-unit 3 is not present.
Stack-unit 4 is not present.
Stack-unit 5 is not present.
```

show file

Displays contents of a text file in the local filesystem.

Syntax `show file url`

Parameters

url Enter one of the following:

- For a file on the internal Flash, enter `flash://` then the filename.
- For a file on the external Flash, enter `usbflash://` then the filename.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show file flash://startup-config
! Version E8-3-17-38
boot system stack-unit 1 primary tftp://10.11.9.21/dv-m1000e-2-b2
boot system stack-unit 1 default system: A:
boot system gateway 10.11.209.62
!
hostname FTOS
--More--
Dell#
```

Related Commands

[format flash](#) — erases all the existing files and reformats the filesystem in the internal flash memory.

[show file-systems](#) — displays information about the file systems on the system.

show file-systems

Displays information about the file systems on the system.

Syntax `show file-systems`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show file-systems
Size (b)      Free (b)      Feature  Type      Flags  Prefixes
2143281152   836874240    FAT32    USERFLASH rw    flash:
-            -            -        network  rw    ftp:
-            -            -        network  rw    tftp:
-            -            -        network  rw    scp:
Dell#
```

Command Fields

Field	Description
size(b)	Lists the size in bytes of the storage location. If the location is remote, no size is listed.
Free(b)	Lists the available size in bytes of the storage location. If the location is remote, no size is listed.
Feature	Displays the formatted DOS version of the device.
Type	Displays the type of storage. If the location is remote, the word <code>network</code> is listed.
Flags	Displays the access available to the storage location. The following letters indicate the level of access: <ul style="list-style-type: none">· <code>r</code> = read access· <code>w</code> = write access
Prefixes	Displays the name of the storage location.

Related Commands `format flash` – erases all the existing files and reformats the filesystem in the internal flash memory.

`show file` – displays the contents of a text file in the local filesystem.

show os-version

Displays the release and software image version information of the image file specified.

Syntax `show os-version [file-url]`

Parameters

file-url

(OPTIONAL) Enter the following location keywords and information:

- For a file on the internal Flash, enter `flash://` then the filename.
- For a file on an FTP server, enter `ftp://user:password@hostip/filepath`.
- For a file on a TFTP server, enter `tftp://hostip/filepath`.
- For a file on the external Flash, enter `usbflash://filepath` then the filename.

Defaults

none

Command Modes

EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

NOTE: A filepath that contains a dot (.) is not supported.

Example

```
Dell#show os-version

RELEASE IMAGE INFORMATION :
-----
Platform      Version      Size      ReleaseTime
IOM-Series: XL  8-3-17-38   31603078   Jul 19 2012 06:02:28

TARGET IMAGE INFORMATION :
-----
Type          Version      Target      checksum
runtime       8-3-17-38   Control Processor  passed

CPLD IMAGE INFORMATION :
-----
Card          CPLD Name    Version
Stack-unit 1  IOM SYSTEM CPLD    6
Dell#
```

show running-config

Displays the current configuration and display changes from the default values.

Syntax

```
show running-config [entity] [configured] [status]
```

Parameters

entity

(OPTIONAL) To display that entity's current (non-default) configuration, enter one of the following keywords:

NOTE: If you did not configure anything for that entity, nothing displays and the prompt returns.

boot for the current boot configuration

ftp	for the current FTP configuration
igmp	for the current IGMP configuration
interface	for the current interface configuration
line	for the current line configuration
lldp	for the current lldp configuration
logging	for the current logging configuration
management- route	for the current Management port forwarding configuration
monitor	for the current Monitor configuration
snmp	for the current SNMP configuration
uplink-state- group	for the uplink state group configuration
users	for the current users configuration

configured (OPTIONAL) Enter the keyword `configured` to display line card interfaces with non-default configurations only.

status (OPTIONAL) Enter the keyword `status` to display the checksum for the running configuration and the start-up configuration.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show running-config
Current Configuration ...
! Version 9-4(0-180)
!
boot system stack-unit 0 primary tftp://10.11.8.12/dv-ci-stomp-tc-1-a1
!
redundancy auto-synchronize full
!
hostname Dell
...
```

Example

```
Dell#show running-config status

running-config bytes 5063, checksum 0xF6F801AC
startup-config bytes 4835, checksum 0x764D3787
Dell#
```

Example

```
Dell#sh running-config interface vlan
!
interface Vlan 1
 ip address dhcp
 mtu 2500
```

```
no shutdown
Dell#
```

Usage Information The `status` option allows you to display the size and checksum of the running configuration and the startup configuration.

show startup-config

Display the startup configuration.

Syntax `show startup-config`

Command Modes EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show startup-config
! Version E8-3-16-29
! Last configuration change at Thu Apr 26 19:19:02 2012 by default
! Startup-config last updated at Thu Apr 26 19:19:04 2012 by default
!
boot system stack-unit 0 primary system: A:
boot system stack-unit 0 secondary tftp://10.11.200.241/
dt-m1000e-5-c2
boot system gateway 10.11.209.254
!
redundancy auto-synchronize full
redundancy disable-auto-reboot stack-unit
!
redundancy disable-auto-reboot stack-unit 0
redundancy disable-auto-reboot stack-unit 1
redundancy disable-auto-reboot stack-unit 2
redundancy disable-auto-reboot stack-unit 3
--More--
```

Related Commands [show running-config](#) — displays the current (running) configuration.

show version

Displays the current Dell Networking OS version information on the system.

Syntax `show version`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show version
Dell Force10 Real Time Operating System Software
Dell Force10 Operating System Version: 1.0
Dell Force10 Application Software Version: E8-3-17-38
Copyright (c) 1999-2012 by Dell Inc. All Rights Reserved.
Build Time: Thu Jul 19 05:59:59 PDT 2012
Build Path: /sites/sjc/work/swsystems01-2/ravisubramani/ravis-8317/SW/SRC/
Cp_src/Tacacs
FTOS uptime is 4 day(s), 4 hour(s), 3 minute(s)
System image file is "dv-m1000e-2-b2" System Type: I/O-Aggregator
Control Processor: MIPS RMI XLP with 2147483648 bytes of memory.

256M bytes of boot flash memory.

1 34-port GE/TE (XL)
56 Ten GigabitEthernet/IEEE 802.3 interface(s)
```

Command Fields

Lines Beginning With	Description
Dell Force10 Network...	Name of the operating system
Dell Force10 Operating...	OS version number
Dell Force10 Application...	Software version
Copyright (c)...	Copyright information
Build Time...	Software build's date stamp
Build Path...	Location of the software build files loaded on the system
Dell Force10 uptime is...	Amount of time the system has been up
System image...	Image file name
Chassis Type:	System type (M I/O Aggregator)
Control Processor:...	Control processor information and amount of memory on processor
256M bytes...	Amount of boot flash memory on the system
1 34 Port	Hardware configuration of the system, including the number and type of physical interfaces available

upgrade boot

Upgrade the bootflash image or bootselector image.

Syntax

```
upgrade boot {all | bootflash-image | bootselector-image} stack-unit {0-5 | all} {booted | flash: | ftp: | tftp: | usbflash:} (A: | B:)
```

Parameters

all	Enter the keyword <code>all</code> to change both the bootflash and bootselector images.
bootflash-image	Enter the keywords <code>bootflash-image</code> to change the bootflash image.
bootselector-image	Enter the keywords <code>bootselector-image</code> to change the bootselector image.

0-5	Enter the keyword 0-5 to upgrade only the mentioned stack-unit.
all	Enter the keyword all to upgrade all the member stack-units.
booted	Enter the keyword booted to upgrade from the current image in the M I/O Aggregator.
ftp:	After entering the keyword ftp:, you can either follow it with the location of the source file in this form: //userid:password@hostip/filepath or press Enter to launch a prompt sequence.
tftp:	After entering the keyword tftp:, you can either follow it with the location of the source file in this form: //hostlocation/filepath or press Enter to launch a prompt sequence.
flash:	After entering the keyword flash:, you can either follow it with the location of the source file in this form: //filepath or press Enter to launch a prompt sequence.
usbflash:	After entering the keyword usbflash:, you can either follow it with the location of the source file in this form: //filepath or press Enter to launch a prompt sequence.
A:	Enter this keyword to upgrade the bootflash partition A.
B:	Enter this keyword to upgrade the bootflash partition B.

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information You must reload the Dell Networking OS after executing this command.

Example

```
Dell#upgrade boot ?
all Upgrade both boot flash image and selector image
bootflash-image Upgrade boot flash image
bootselector-image Upgrade boot selector image
Dell#
```

upgrade system

Upgrade the bootflash image or system image.

Syntax upgrade system {flash: | ftp: | scp: | tftp: | usbflash: | stack-unit {0-5 | all} {A: | B:}}

Parameters	
0-5	Enter the keyword 0-5 to upgrade only the mentioned stack-unit.
all	Enter the keyword all to upgrade all the member units of the stack.

ftp	After entering the keyword <code>ftp</code> you can either follow it with the location of the source file in this form://userid:password@hostip/filepath, or press Enter to launch a prompt sequence.
scp	After entering the keyword <code>scp</code> you can either follow it with the location of the source file in this form://userid:password@hostip/filepath, or press Enter to launch a prompt sequence.
tftp	After entering the keyword <code>tftp</code> you can either follow it with the location of the source file in this form://hostlocation/filepath, or press Enter to launch a prompt sequence.
flash	After entering the keyword <code>flash</code> you can either follow it with the location of the source file in this form://filepath, or press Enter to launch a prompt sequence.
usbflash	After entering the keyword <code>usbflash</code> you can either follow it with the location of the source file in this form://filepath, or press Enter to launch a prompt sequence.
A:	Enter this keyword to upgrade the bootflash partition A.
B:	Enter this keyword to upgrade the bootflash partition B.

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information You must reload Dell Networking OS after executing this command. Use the command `upgrade system stack-unit` to copy Dell Networking OS from the management unit to one or more stack members.

Example

```
Dell#upgrade system ?
flash:          Copy from flash file system (flash://filepath)
ftp:            Copy from remote file system, IPv4 or IPv6, (ftp://
/userid:password@hostip/filepath)
scp:           Copy from remote file system, IPv4 or IPv6, (scp://
/userid:password@hostip/filepath)
stack-unit Sync image to the stack-unit
tftp:          Copy from remote file system, IPv4 or IPv6, (tftp://
/hostip/filepath)
usbflash:      Copy from usbflash file system (usbflash://
filepath)
Dell#
```

verify

Validate the software image on the flash drive after the image has been transferred to the system, but before the image has been installed.

Syntax `verify { md5 | sha256 } [flash://] img-file [hash-value]`

Parameters **md5** Enter the `md5` keyword to use the MD5 message-digest algorithm.

sha256	Enter the <code>sha256</code> keyword to use the SHA256 Secure Hash Algorithm
flash://	(Optional). Enter the <code>flash://</code> keyword. The default is to use the flash drive. You can just enter the image file name.
img-file	Enter the name the Dell Networking software image file to validate.
hash-value	(Optional). Enter the relevant hash published on i-Support.

Defaults flash drive

Command Modes EXEC mode

Command History

Version	Description
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information You can enter this command in the following ways:

- **verify md5 flash://img-file**
- **verify md5 flash://img-file <hash-value>**
- **verify sha256 flash://img-file**
- **verify sha256 flash://img-file <hash-value>**

Example

Without Entering the Hash Value for Verification using SHA256

```
Dell# verify sha256 flash://FTOS-SE-9.5.0.0.bin
SHA256 hash for FTOS-SE-9.5.0.0.bin:
e6328c06faf814e6899ceead219afbf9360e986d692988023b749e6b2093e933
```

Entering the Hash Value for Verification using SHA256

```
Dell# verify sha256 flash://FTOS-SE-9.5.0.0.bin
e6328c06faf814e6899ceead219afbf9360e986d692988023b749e6b2093e933
SHA256 hash VERIFIED for FTOS-SE-9.5.0.0.bin
```

Control and Monitoring

This chapter describes control and monitoring for the I/O Aggregator.

asf-mode

Enable alternate store and forward (ASF) mode and forward packets as soon as a threshold is reached.

Syntax `asf-mode stack-unit {unit-id | all} queue size`
To return to standard Store and Forward mode, use the `no asf-mode stack unit` command.

Parameters

unit-id	Enter the stack member unit identifier of the stack member to reset. The range is from 0 to 5 or all.
queue size	Enter the queue size of the stack member. The range is from 0 to 5.

Defaults Not configured

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You *must* save the configuration and reload the system to implement ASF. When you enter the command, the system sends a message stating that the new mode is enabled when the system reloads.

asset-tag

Assign and store a unique asset-tag to the stack member.

Syntax `asset-tag stack-unit unit id Asset-tag ID`
To remove the asset tag, use the `no stack-unit unit-id Asset-tag ID` command.

Parameters

stack-unit unit-id	Enter the keywords <code>stack-unit</code> then the <code>unit-id</code> to assign a tag to the specific member. The range is from 0 to 5.
Asset-tag ID	Enter a unique asset-tag ID to assign to the stack member. This option accepts a maximum of 10 characters, including all special characters except double quotes. To include a space in the asset-tag, enter a space within double quotes.

Defaults No asset-tag is assigned.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Related Commands [show system](#)— Displays the current status of all stack members or a specific member.

banner exec

Configure a message that is displayed when you enter EXEC mode.

Syntax `banner exec c line c`

Parameters

c	Enter the keywords <code>banner exec</code> , then enter a character delineator, represented here by the letter <code>c</code> . Press ENTER.
line	Enter a text string for your banner message ending the message with your delineator. In the following example, the delineator is a percent character (%); the banner message is “testing, testing”.

Defaults No banner is displayed.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Optionally, use the `banner exec` command to create a text string that displays when you accesses EXEC mode. The `exec-banner` command toggles that display.

Example

```
Dell(conf)#banner exec ?
LINE          c banner-text(max length 255) c, where 'c' is a delimiting
character

Dell(conf)#banner exec %
Enter TEXT message. End with the character '%'.
This is the banner%
Dell(conf)#end
Dell#exit
4d21h5m: %STKUNIT0-M P:CP %SEC-5-LOGOUT: Exec session is terminated for user on
line console

This is the banner

Dell Force10 con0 now available

Press RETURN to get started.
```

```
This is the banner
```

- Related Commands**
- `banner login` — sets a banner for login connections to the system.
 - `banner motd` — sets a Message of the Day banner.
 - `exec-banner` — Enables the display of a text string when you enter EXEC mode.
 - `line` — enables and configures the console and virtual terminal lines to the system.

banner login

Set a banner to display when logging on to the system.

Syntax `banner login {acknowledgement | keyboard-interactive | c line c}`
Enter `no banner login` to delete the banner text. Enter `no banner login keyboard-interactive` to automatically go to the banner message prompt (does not require a carriage return).

Parameters		
<code>keyboard-interactive</code>	Enter the keyword <code>keyboard-interactive</code> to require a carriage return (CR) to get the message banner prompt.	
<code>acknowledgement</code>	Enter the <code>acknowledgement</code> keyword to require a positive acknowledgement from the user while logging in to the system.	
<code>c</code>	Enter a delineator character to specify the limits of the text banner. The delineator is a percent character (%).	
<code>line</code>	Enter a text string for your text banner message ending the message with your delineator. The delineator is a percent character (%). Range: maximum of 50 lines, up to 255 characters per line	

Defaults No banner is configured and the CR is required when creating a banner.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.10(0.0)	Introduced the <code>acknowledgement</code> keyword.
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information A login banner message displays only in EXEC Privilege mode after entering the `enable` command then the password. These banners do not display to users in EXEC mode.

Example

```
Dell(conf)#banner login ?
acknowledgement      Require positive acknowledgment after login prompt
keyboard-interactive  Press enter key to get prompt
LINE                  c banner-text(max length 255) c, where 'c' is a
delimiting character
Dell(conf)#no banner login ?
acknowledgement      Disable positive acknowledgment required after login
```

```
prompt
keyboard-interactive      Prompt will be displayed by default
```

If you configure the `acknowledgement` keyword, the system requires a positive acknowledgement from the user while logging in to the system.

```
$ telnet 10.11.178.16
Trying 10.11.178.16...
Connected to 10.11.178.16.
Escape character is '^]'.
THIS IS A LOGIN BANNER. PRESS 'Y' TO ACKNOWLEDGE. ACKNOWLEDGE?

[y/n]: y
Login: admin
Password:
```

Related Commands [banner motd](#) — sets a Message of the Day banner.

[exec-banner](#) — enables the display of a text string when you enter EXEC mode.

banner motd

Set a message of the day (MOTD) banner.

Syntax `banner motd c line c`

Parameters

c Enter a delineator character to specify the limits of the text banner. The delineator is a percent character (%).

line Enter a text string for your message of the day banner message ending the message with your delineator. The delineator is a percent character (%).

Defaults No banner is configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information A MOTD banner message displays only in EXEC Privilege mode after entering the `enable` command then the password. These banners do not display to users in EXEC (non-privilege) mode.

Related Commands [banner exec](#) — enables the display of a text string when you enter EXEC mode.

[banner login](#) — sets a banner to display after successful login to the system.

clear alarms

Clear the alarms on the system.

Syntax `clear alarms`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command clears alarms that are no longer active. If an alarm situation is still active, it is seen in the system output.

clear command history

Clear the command history log.

Syntax `clear command history`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [show command-history](#)— displays a buffered log of all the commands all users enter along with a time stamp.

clear line

Reset a terminal line.

Syntax `clear line {line-number | console 0 | vty number}`

Parameters

<i>line-number</i>	Enter a number for one of the 12 terminal lines on the system. The range is from 0 to 11.
console 0	Enter the keywords <code>console 0</code> to reset the console port.
<i>vty number</i>	Enter the keyword <code>vty</code> then a number to clear a terminal line. The range is from 0 to 9.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

configure

Enter CONFIGURATION mode from EXEC Privilege mode.

Syntax	<code>configure [terminal]</code>	
Parameters	terminal	(OPTIONAL) Enter the keyword <code>terminal</code> to specify that you are configuring from the terminal.
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#configure
Dell (conf) #
```

debug cpu-traffic-stats

Enable the collection of computer processor unit (CPU) traffic statistics.

Syntax	<code>debug cpu-traffic-stats</code>	
Defaults	Disabled	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

This command enables (and disables) the collection of CPU traffic statistics from the time this command is executed (not from system boot). However, excessive traffic a CPU receives automatically triggers (turn on) the collection of CPU traffic statics.

To view the traffic statistics, use the `show cpu-traffic-stats` command.

If the CPU receives excessive traffic, traffic is rate controlled.

NOTE: You must enable this command before the `show cpu-traffic-stats` command displays traffic statistics. Dell Networking recommends disabling debugging (no `debug cpu-traffic-stats`) after troubleshooting is complete.

Related Commands `show cpu-traffic-stats`— displays the cpu traffic statistics.

debug ifm trace-flags

Turn on the IFM internal trace-flags.

Syntax `debug ifm trace-flags trace-flags`
To disable this command, use the `no debug ifm trace-flags` command.

Parameters `trace-flags` Enter a hexadecimal number representing the trace-flag.

Defaults None

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

NOTE: Use this command only when you are working directly with a technical support representative to troubleshoot a problem. Do not use this command unless a technical support representative instructs you to do so.

debug ftpserver

View transactions during an FTP session when a user is logged into the FTP server.

Syntax `debug ftpserver`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

disable

Return to EXEC mode.

Syntax `disable [level]`

Parameters	<i>level</i>	(OPTIONAL) Enter a number for a privilege level of the Dell Networking OS. The range is from 0 to 15. The default is 1 .
Defaults	1	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

do

Allows the execution of most EXEC-level commands from all CONFIGURATION levels without returning to the EXEC level.

Syntax	<i>do command</i>	
Parameters	<i>command</i>	Enter an EXEC-level command.
Defaults	none	
Command Modes	<ul style="list-style-type: none"> · CONFIGURATION · INTERFACE 	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following commands are *not* supported by the `do` command:

- enable
- disable
- exit
- config

Example

```
Dell(conf-if-te-3/1)#do clear counters
Clear counters on all interfaces [confirm]
Dell(conf-if-te-3/1)#
Dell(conf-if-te-3/1)#do clear logging
Clear logging buffer [confirm]
Dell(conf-if-te-3/1)#
Dell(conf-if-te-3/1)#do reload
System configuration has been modified. Save? [yes/no]: n
Proceed with reload [confirm yes/no]: n
Dell(conf-if-te-3/1)#
```

enable

Enter EXEC Privilege mode or any other privilege level configured. After entering this command, you may need to enter a password.

Syntax	<code>enable [level]</code>	
Parameters	<i>level</i>	(OPTIONAL) Enter a number for a privilege level of the Dell Networking OS. The range is from 0 to 15. The default is 15 .
Defaults	15	
Command Modes	EXEC	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.
Usage Information	Users entering EXEC Privilege mode or any other configured privilege level can access configuration commands. To protect against unauthorized access, use the <code>enable password</code> command to configure a password for the <code>enable</code> command at a specific privilege level. If no privilege level is specified, the default is privilege level 15 .	
Related Commands	enable password — configures a password for the <code>enable</code> command and to access a privilege level.	

exec-banner

Enable the display of a text string when the user enters EXEC mode.

Syntax	<code>exec-banner</code>	
Defaults	Enabled on all lines (if configured, the banner appears).	
Command Modes	LINE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Optionally, use the <code>banner exec</code> command to create a text string that is displayed when you access EXEC mode. This command toggles that display.	
Related Commands	banner exec — configures a banner to display when entering EXEC mode.	
	line — enables and configures console and virtual terminal lines to the system.	

enable optic-info-update interval

Enable polling intervals of optical information updates for simple network management protocol (SNMP).

Syntax `enable optic-info-update interval seconds`
To disable optical power information updates, use the `no enable optic-info-update interval` command.

Parameters `interval seconds` Enter the keyword `interval` then the polling interval in seconds. The range is from 120 to 6000 seconds. The default is **300 seconds** (5 minutes).

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Replaces the <code>enable xfp-power-updates</code> command.

Usage Information To enable polling and to configure the polling frequency, use this command.

enable secure

Creates configurable Full-Switch mode where Chassis Management Controller (CMC) access to FN IOM is bypassed for the elements critical to the security certifications.

Syntax `enable secure`
To disable the secure mode, use `no enable secure` command.

Parameters None

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

end

Return to EXEC Privilege mode from other command modes (for example, CONFIGURATION mode).

Syntax `end`

Command Modes

- CONFIGURATION
- LINE

- INTERFACE
- MONITOR SESSION
- PROTOCOL LLDP

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands `exit`— returns to the lower command mode.

exec-timeout

Set a time interval that the system waits for input on a line before disconnecting the session.

Syntax `exec-timeout minutes [seconds]`
To return to default settings, use the `no exec-timeout` command.

Parameters

<i>minutes</i>	Enter the number of minutes of inactivity on the system before disconnecting the current session. The range is from 0 to 35791. The default is 10 minutes for the console line and 30 minutes for the VTY line.
<i>seconds</i>	(OPTIONAL) Enter the number of seconds. The range is from 0 to 2147483. The default is 0 seconds .

Defaults **10 minutes** for console line; **30 minutes** for VTY lines; **0 seconds**

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To remove the time interval, use the `exec-timeout 0 0` command.

Example

```
Dell con0 is now available
Press RETURN to get started.
Dell>
```

exit

Return to the lower command mode.

Syntax `exit`

Command Modes

- EXEC Privilege
- CONFIGURATION
- LINE
- INTERFACE
- PROTOCOL LLDP

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [end](#) — returns to EXEC Privilege mode.

feature unique-name

Set a unique host name for the system.

Syntax `feature unique-name`

Defaults None

Command Modes CONFIGURATION

Supported Modes

- Standalone
- VLT
- Stacking
- PMUX
- STOMP Full Switch

Command History

Version	Description
9.10(0.0)	Introduced on the M I/O Aggregator, the FN IOM and MXL.

Usage Information

If you use the `feature unique-name` command, the system generates a host name using the platform type and system serial number. It overwrites any existing host name configured on the system using the `hostname` command. The `feature unique-name` command is also added to the running configuration.

If you disable the feature using the `no feature unique-name` command, the system reverts to the default host name of Dell.

If you use the `hostname` or the `no hostname` command after enabling the `feature unique-name` command, the system displays an error message stating that the `feature unique-name` is already enabled and provides an option to disable it.

Related Commands [hostname](#)

ftp-server enable

Enable FTP server functions on the system.

Syntax `ftp-server enable`

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
morpheus% ftp 10.31.1.111
Connected to 10.31.1.111.
220 FTOS (1.0) FTP server ready
Name (10.31.1.111:dch): dch
331 Password required
Password:
230 User logged in
ftp> pwd
257 Current directory is "flash:"
ftp> dir
200 Port set okay
150 Opening ASCII mode data connection
size  date           time name
-----
 512  Jul-20-2004   18:15:00 tgting
 512  Jul-20-2004   18:15:00 diagnostic
 512  Jul-20-2004   18:15:00 other
 512  Jul-20-2004   18:15:00 tgt
226 Transfer complete
329 bytes received in 0.018 seconds (17.95 Kbytes/s)
ftp>
```

Related Commands [ftp-server topdir](#)— sets the directory to be used for incoming FTP connections.

[ftp-server username](#)— sets a username and password for incoming FTP connections.

ftp-server topdir

Specify the top-level directory to be accessed when an incoming FTP connection request is made.

Syntax `ftp-server topdir directory`

Parameters *directory* Enter the directory path.

Defaults The internal flash is the default directory.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information After you enable FTP server functions with the `ftp-server enable` command, Dell Networking recommends specifying a top-level directory path. Without a top-level directory path specified, the Dell Networking OS directs users to the flash directory when logging in to the FTP server.

Related Commands `ftp-server enable` — enables FTP server functions on the M I/O Aggregator.

`ftp-server username`— sets a username and password for incoming FTP connections to the M I/O Aggregator.

ftp-server username

Create a user name and associated password for incoming FTP server sessions.

Syntax `ftp-server username username password [encryption-type] password`

Parameters

<i>username</i>	Enter a text string up to 40 characters long as the user name.
<i>password password</i>	Enter the keyword <code>password</code> then a string up to 40 characters long as the password. Without specifying an encryption type, the password is unencrypted.
<i>encryption-type</i>	(OPTIONAL) After the keyword <code>password</code> , enter one of the following numbers: <ul style="list-style-type: none">· 0 (zero) for an unencrypted (clear text) password· 7 (seven) for a hidden text password

Defaults Not enabled.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

hostname

Set the host name of the system.

Syntax `hostname name`

Parameters *name* Enter a text string, up to 32 characters long.

Defaults **Dell Networking Operating System (OS)**

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The host name is used in the prompt.

Related Commands [feature unique-name](#)

http-server

Disable / Enable the Blade I/O Manager Software.

Syntax `http-server blademgr`

Parameters **blademgr** Enter the keyword `blademgr` and specify the port for HTTP.

Defaults ENABLED

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the Stomp IOA and MXL-IOA

Usage Information By default, the Blade I/O Manager is enabled and there is no entry in the running configuration. Using the command `no http-server blademgr`, disables the Blade I/O Manager and also a “no http-server” entry is made in the running configuration. To re-enable the Blade I/O Manager, use the command `http-server blademgr` which enables the feature and also removes the entry from the running configuration. On reload, if the system detects a “no http-server” entry in the start-config, the feature will be disabled.

 **NOTE:** Please ensure to save and reload the configuration for the changes to take effect.

ip ftp password

Specify a password for outgoing FTP connections.

Syntax `ip ftp password [encryption-type] password`

Parameters **encryption-type** (OPTIONAL) Enter one of the following numbers:

- 0 (zero) for an unencrypted (clear text) password
- 7 (seven) for a hidden text password

password Enter a string up to 40 characters as the password.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The password is listed in the configuration file; you can view the password by entering the `show running-config ftp` command in EXEC mode.

Use the `ip ftp password` command when you use the `ftp: password` parameter in the `copy` command.

Related Commands `copy` — copy files.

`ftp-server username` — sets the user name for the FTP sessions.

ip ftp source-interface

Specify an interface's IP address as the source IP address for FTP connections.

Syntax `ip ftp source-interface interface`

Parameters

interface	Enter the following keywords and slot/port or number information:
	<ul style="list-style-type: none"> • For Loopback interfaces, enter the keyword <code>loopback</code> then a number from zero (0) to 16383. • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults The IP address on the system that is closest to the Telnet address is used in the outgoing packets.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `copy` — copies files from and to the switch.

ip telnet server enable

Enable the Telnet server on the switch.

Syntax `ip telnet server enable`
To disable the Telnet server, use the `no ip telnet server enable` command.

Defaults Enabled

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

ip telnet source-interface

Set an interface's IP address as the source address in outgoing packets for Telnet sessions.

Syntax `ip telnet source-interface interface`

Parameters

interface Enter the following keyword and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For VLAN interface, enter the keyword `vlan` then a number from 1 to 4094.

Defaults The IP address on the system that is closest to the Telnet address is used in the outgoing packets.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [telnet](#) — telnets to another device.

ip ftp username

Assign a user name for outgoing FTP connection requests.

Syntax	<code>ip ftp username <i>username</i></code>	
Parameters	<i>username</i>	Enter a text string as the user name up to 40 characters long.
Defaults	No user name is configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Configure a password with the <code>ip ftp password</code> command.	
Related Commands	ip ftp password — sets the password for FTP connections.	

line

Enable and configure console and virtual terminal lines to the system. This command accesses LINE mode, where you can set the access conditions for the designated line.

Syntax	<code>line {console 0 vty <i>number</i> [<i>end-number</i>]}</code>	
Parameters	<i>console 0</i>	Enter the keyword <code>console 0</code> to configure the console port. The console option is <0-0>.
	<i>vty number</i>	Enter the keyword <code>vty</code> followed by a number from 0 to 9 to configure a virtual terminal line for Telnet sessions. The system supports 10 Telnet sessions.
	<i>end-number</i>	(OPTIONAL) Enter a number from 1 to 9 as the last virtual terminal line to configure. You can configure multiple lines at one time.
Defaults	Not configured	
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information You cannot delete a terminal connection.

Related Commands [show memory](#)— View current memory usage on the M I/O Aggregator.

login concurrent-session

Configures the limit of concurrent sessions for all users on console and virtual terminal lines.

Syntax

```
login concurrent-session {limit number-of-sessions | clear-line enable}
no login concurrent session {limit number-of-sessions | clear-line enable}
```

Parameters		
limit <i>number-of-sessions</i>	Sets the number of concurrent sessions that any user can have on console and virtual terminal lines. The range is from 1 to 12 (10 VTY lines, one console, and one AUX line).	
clear-line enable	Enables you to clear your existing sessions.	

Defaults Not configured. You can use all the available sessions.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You must have either the System Administrator or Security Administrator privileges to configure login concurrent-session limit or to enable clear-line.

Use the `login concurrent-session limit number-of-sessions` command to limit the number of concurrent sessions that any user can have on console, aux, and virtual terminal lines.

If the `login concurrent-session clear-line enable` command is configured, you are provided with an option to clear any of your existing sessions after a successful login authentication. When you reach the maximum concurrent session limit, you can still login by clearing any of your existing sessions.

Example The following example shows how to limit the number of concurrent sessions that any user can have to four:

```
Dell(conf)#login concurrent-session limit 4
Dell(conf)#
```

The following example shows how to use the `login concurrent-session clear-line enable` command.

```
Dell(conf)#login concurrent-session clear-line enable
Dell(conf)#
```

When you try to login, the following message appears with all your existing concurrent sessions, providing an option to close any one of the existing sessions:

```
$ telnet 10.11.178.14
Trying 10.11.178.14...
Connected to 10.11.178.14.
Escape character is '^]'.
Login: admin
Password:
Current sessions for user admin:
Line          Location
2 vty 0       10.14.1.97
3 vty 1       10.14.1.97
Clear existing session? [line number/Enter to cancel]:
```

When you try to create more than the permitted number of sessions, the following message appears, prompting you to close one of your existing sessions. You must close any of your existing sessions to login to the system .

```
$ telnet 10.11.178.14
Trying 10.11.178.14...
Connected to 10.11.178.14.
Escape character is '^]'.
Login: admin
Password:
Maximum concurrent sessions for the user reached.
Current sessions for user admin:
Line          Location
2 vty 0       10.14.1.97
3 vty 1       10.14.1.97
4 vty 2       10.14.1.97
5 vty 3       10.14.1.97
Clear existing session? [line number/Enter to cancel]:
```

Related Commands [login statistics](#) — Enable and configure user login statistics on console and virtual terminal lines.

[show login statistics](#) — Displays login statistics of users who have used the console or virtual terminal lines to log in to the system.

login statistics

Enable and configure user login statistics on console and virtual terminal lines.

Syntax

```
login statistics {enable | time-period days}
no login statistics {enable | time-period days}
```

Parameters

enable	Enables user login statistics. By default, the system displays the login statistics for the last 30 days.
time-period <i>days</i>	Sets the number of days for which the system stores the user login statistics. The range is from 1 to 30.

Defaults Not configured

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Only the system and security administrators can configure login activity tracking and view the login activity details of other users.

If you enable user login statistics, the system displays the last successful login details of the current user and the details of any failed login attempts by others.

If you use the `login statistics time-period days` command to set a custom time period, the system only reports the login statistics during that interval.

NOTE: Login statistics is not applicable for login sessions that do not use user names for authentication. For example, the system does not report login activity for a telnet session that prompts only a password field.

Example

When you login to the system, it displays a message similar to the following:

```
$ telnet 10.11.178.14
Trying 10.11.178.14...
Connected to 10.11.178.14.
Escape character is '^]'.
Login: admin
Password:
Last successful login: Mon Feb 16 04:36:11 2015 Line vty0 ( 10.14.1.97 ).
There were 2 unsuccessful login attempt(s) since the last successful login.
There were 3 unsuccessful login attempt(s) for user admin in last 30 day(s).
```

The preceding message shows that the user had previously logged in to the system using the VTY line from 10.14.1.97. It also displays the number of unsuccessful login attempts since the last login and the number of unsuccessful login attempts in the last 30 days.

```
$ telnet 10.11.178.14
Trying 10.11.178.14...
Connected to 10.11.178.14.
Escape character is '^]'.
Login: admin
Password:
Last successful login: Wed Feb 5 14:05:28 IST 2015 on console
There were 2 unsuccessful login attempt(s) since the last successful login.
There were 3 unsuccessful login attempt(s) for user admin in last 12 day(s).
```

The preceding message shows that the user had previously logged in to the system using the console line. It also displays the number of unsuccessful login attempts since the last login and the number of unsuccessful login attempts during a custom time period.

Related Commands

[login concurrent-session](#) — Configures the limit of concurrent sessions for all users on console and virtual terminal lines.

[show login statistics](#) — Displays login statistics of users who have used the console or virtual terminal lines to log in to the system.

motd-banner

Enable a message of the day (MOTD) banner to appear when you log in to the system.

Syntax `motd-banner`

Defaults Enabled on all lines.

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show login statistics

Displays login statistics of users who have used the console or virtual terminal lines to log in to the system.

Syntax `show login statistics [all | [[successful-attempts | unsuccessful-attempts] [user login-id] [time-period days]] | user login-id]`

Parameters

all	(Optional)Displays the login statistics of all users in the last 30 days or the custom defined time period.
time-period days	(Optional)Displays the number of failed login attempts by the current user in the specified period.
successful-attempts	(Optional)Displays the number of successful login attempts by the current user in the last 30 days or the custom defined time period
unsuccessful-attempts	(Optional)Displays the number of failed login attempts by the current user in the last 30 days or the custom defined time period.
user login-id	(Optional)Displays the login statistics of a specific user in the last 30 days or the custom defined time period. When you use it with the <code>unsuccessful-attempts</code> keyword, the system displays the number of failed login attempts by a specific user in the last 30 days or the custom defined time period

Defaults None

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.10(0.0)	Introduced the <code>successful-attempts</code> keyword.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view the successful and failed login details of the current user in the last 30 days or the custom defined period, use the `show login statistics` command.

To view the successful and failed login details of all users in the last 30 days or the custom defined period, use the `show login statistics all` command. You can use this command only if you have system or security administrator rights.

To view the successful and failed login details of a specific user in the last 30 days or the custom defined time period, use the `show login statistics user user-id` command. If you have system or security administrator rights, you can view the login statistics of other users. If you do not have system or security administrator rights, you can view your login statistics but not the login statistics of others.

NOTE: By default, these commands display the details for the last 30 days. If you set a custom-defined time period for login statistics using the `login statistics time-period days` command, these commands display details only for that period.

Example

The following is sample output of the `show login statistics` command.

```
Dell#show login statistics
-----
User: admin
Last login time: 12:52:01 UTC Tue Mar 22 2016
Last login location: Line vty0 ( 10.16.127.143 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 0
Successful login attempt(s) in last 30 day(s): 1
-----
```

The following is sample output of the `show login statistics all` command.

```
Dell#show login statistics all
-----
User: admin
Last login time: 08:54:28 UTC Wed Mar 23 2016
Last login location: Line vty0 ( 10.16.127.145 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 3
Successful login attempt(s) in last 30 day(s): 4
-----
-----
User: admin1
Last login time: 12:49:19 UTC Tue Mar 22 2016
Last login location: Line vty0 ( 10.16.127.145 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 3
Successful login attempt(s) in last 30 day(s): 2
-----
-----
User: admin2
Last login time: 12:49:27 UTC Tue Mar 22 2016
Last login location: Line vty0 ( 10.16.127.145 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 3
Successful login attempt(s) in last 30 day(s): 2
-----
```

```
-----
User: admin3
Last login time: 13:18:42 UTC Tue Mar 22 2016
Last login location: Line vty0 ( 10.16.127.145 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 3
Successful login attempt(s) in last 30 day(s): 2
```

The following is sample output of the `show login statistics user user-id` command.

```
Dell# show login statistics user admin
-----
User: admin
Last login time: 12:52:01 UTC Tue Mar 22 2016
Last login location: Line vty0 ( 10.16.127.143 )
Unsuccessful login attempt(s) since the last successful login: 0
Unsuccessful login attempt(s) in last 30 day(s): 0
Successful login attempt(s) in last 30 day(s): 1
-----
```

The following is sample output of the `show login statistics unsuccessful-attempts` command.

```
Dell#show login statistics unsuccessful-attempts
There were 3 unsuccessful login attempt(s) for user admin in last 30 day(s).
```

The following is sample output of the `show login statistics unsuccessful-attempts time-period days` command.

```
Dell# show login statistics unsuccessful-attempts time-period 15
There were 0 unsuccessful login attempt(s) for user admin in last 15 day(s).
```

The following is sample output of the `show login statistics unsuccessful-attempts user login-id` command.

```
Dell# show login statistics unsuccessful-attempts user admin
There were 3 unsuccessful login attempt(s) for user admin in last 12 day(s).
```

The following is sample output of the `show login statistics successful-attempts` command.

```
Dell#show login statistics successful-attempts
There were 4 successful login attempt(s) for user admin in last 30 day(s).
```

Related Commands [login statistics](#) — Enable and configure user login statistics on console and virtual terminal lines.

[login concurrent-session](#) — Configures the limit of concurrent sessions for all users on console and virtual terminal lines.

show software ifm

Display interface management (IFM) data.

Syntax `show software ifm {clients [summary] | ifagt number | ifcb interface | stack-unit unit-ID | trace-flags}`

Parameters

clients	Enter the keyword <code>clients</code> to display IFM client information.
summary	(OPTIONAL) Enter the keyword <code>summary</code> to display brief information about IFM clients.

ifagt number	Enter the keyword <code>ifagt</code> then the number of an interface agent to display software pipe and IPC statistics.
ifcb interface	Enter the keyword <code>ifcb</code> then one of the following interface IDs then the slot/port information to display interface control block information for that interface: <ul style="list-style-type: none"> · For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. · For a 10G Ethernet interface, enter the keyword <code>TenGigabitEthernet</code>.
stack-unit unit-ID	Enter the keywords <code>stack-unit</code> then the stack member number to display IFM information for that unit. The range is from 0 to 5.
trace-flags	Enter the keyword <code>trace-flags</code> to display IFM information for internal trace flags.

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
DELL#show software ifm clients summary
ClntType Inst svcMask subSvcMask tlvSvcMask tlvSubSvc swp
IPM 0 0x00000000 0x00000000 0x90ff71f3 0xb98784a1 22
RTM 0 0x00000000 0x00000000 0x800010ff 0x0064c798 56
RIP 0 0x00000dfe 0x00000000 0x00000000 0x00000000 0
ISIS 0 0x00000002 0x00000000 0x00000000 0x00000000 0
VRRP 0 0x00000000 0x00000000 0x803330f3 0x0013c480 38
L2PM 0 0x00000000 0x00000000 0x87ff79ff 0xdb80c800 64
ACL 0 0x00000000 0x00000000 0x867f50c3 0x0103c018 81
OSPF 0 0x00000dfa 0x00100338 0x00000000 0x00000000 0
PIM 0 0x000e00f3 0x0000c000 0x00000000 0x00000000 0
IGMP 0 0x000e027f 0x00000000 0x00000000 0x00000000 0
SNMP 0 0x00000000 0x00000000 0x8000c2c0 0x00000002 21
EVTTERM 0 0x00000000 0x00000000 0x800002c0 0x0003c000 20
MRTM 0 0x00000000 0x00000000 0x81f7103f 0xc0600000 30
DSM 0 0x00000000 0x00000000 0x80771033 0x00000000 58
Mirror 0 0x00000000 0x00000000 0x80770003 0x00000000 25
LACP 0 0x00000000 0x00000000 0x8000383f 0x01000000 33
SFL_CP 0 0x00000000 0x00000000 0x807739ff 0x00000000 24
DHCP 0 0x00000000 0x00000000 0x807040f3 0x18001000 35
V6RAD 0 0x00000433 0x0000c000 0x00000000 0x00000000 0
Unidentified Client0 0x006e0002 0x00000000 0x00000000 0x00000000 0
Unidentified Client0 0x6066003f 0x00000000 0x6066003f 0x00000000 95
LLDP 0 0x007f2433 0x0408c000 0x007f2433 0x0408c000 60
--More--
```

ping

Test connectivity between the system and another device by sending echo requests and waiting for replies.

Syntax `ping host`

Parameters

host	Enter the host name or the destination IP address of the device to which you are testing connectivity.
-------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information When you enter the `ping` command without specifying an IP address (Extended Ping), you are prompted for a target IP address, a repeat count, a datagram size (up to 1500 bytes), a timeout (in seconds), and for Extended Commands. For information on the ICMP message codes that return from a `ping` command, refer to [Internet Control Message Protocol \(ICMP\) Message Types](#).

Example (IPv4)

```
Dell#ping 172.31.1.255
Type Ctrl-C to abort.

Sending 5, 100-byte ICMP Echos to 172.31.1.255, timeout is 2 seconds:
Reply to request 1 from 172.31.1.208 0 ms
Reply to request 1 from 172.31.1.216 0 ms
Reply to request 1 from 172.31.1.205 16 ms
::
Reply to request 5 from 172.31.1.209 0 ms
Reply to request 5 from 172.31.1.66 0 ms
Reply to request 5 from 172.31.1.87 0 ms
Dell#
```

reload

Reboot the Dell Networking OS.

Syntax `reload`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information If there is a change in the configuration, the Dell Networking OS prompts you to save the new configuration. Or you can save your running configuration with the `copy running-config` command.

Related Commands `reset stack-unit` — resets any designated stack member except the management unit.

service timestamps

Add time stamps to debug and log messages. This command adds either the uptime or the current time and date.

Syntax `service timestamps [debug | log] [datetime [localtime] [msec] [show-timezone] | uptime]`

Parameters	
debug	(OPTIONAL) Enter the keyword <code>debug</code> to add timestamps to debug messages.
log	(OPTIONAL) Enter the keyword <code>log</code> to add timestamps to log messages with severity from 0 to 6.
datetime	(OPTIONAL) Enter the keyword <code>datetime</code> to have the current time and date added to the message.
localtime	(OPTIONAL) Enter the keyword <code>localtime</code> to include the localtime in the timestamp.
msec	(OPTIONAL) Enter the keyword <code>msec</code> to include milliseconds in the timestamp.
show-timezone	(OPTIONAL) Enter the keyword <code>show-timezone</code> to include the time zone information in the timestamp.
uptime	(OPTIONAL) Enter the keyword <code>uptime</code> to have the timestamp based on time elapsed since system reboot.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information If you do not specify parameters and enter `service timestamps`, it appears as `service timestamps debug uptime` in the running-configuration.

To view the current options set for the `service timestamps` command, use the `show running-config` command.

show alarms

Display the active major and minor alarms on the system.

Syntax `show alarms [threshold]`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

```
Dell# show alarms
-- Minor Alarms --
Alarm Type      Duration
-----
No minor alarms

-- Major Alarms --
Alarm Type      Duration
-----
No major alarms

Dell#

Dell# show alarms threshold
-- Temperature Limits (deg C) --
-----
Ingress-Air Off  Ingress-Air Major Off  Major Shutdown
Unit0  58      61      84      86      90
Dell#
```

show command-history

Display a buffered log of all commands all users enter along with a time stamp.

Syntax `show command-history`

Defaults None

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information One trace log message is generated for each command. No password information is saved to this file.

Example

```
Dell#show command-history
[4/20 10:27:23]: CMD-(CLI):[enable]by default from console
[4/20 10:27:23]: CMD-(CLI):[configure terminal]by default from console
- Repeated 1 time.
[4/20 10:27:23]: CMD-(CLI):[snmp-server community public ro]by default from console
[4/20 10:27:23]: CMD-(CLI):[logging 172.16.1.162]by default from console
[4/20 10:27:23]: CMD-(CLI):[logging 10.10.10.4]by default from console
[4/20 10:27:24]: CMD-(CLI):[logging 10.1.2.4]by default from console
[4/20 10:27:24]: CMD-(CLI):[logging 172.31.1.4]by default from console
[4/20 10:27:24]: CMD-(CLI):[logging 133.33.33.4]by default from console
[4/20 10:27:24]: CMD-(CLI):[management route 172.16.1.0 /24 10.11.209.4]by default from console
[4/20 10:27:24]: CMD-(CLI):[service timestamps log datetime]by default from console
[4/20 10:27:24]: CMD-(CLI):[line console 0]by default from console
[4/20 10:27:24]: CMD-(CLI):[exec-timeout 0]by default from console
[4/20 10:27:24]: CMD-(CLI):[exit]by default from console
[4/20 10:27:29]: CMD-(CLI):[show version]by default from console
[4/20 10:27:56]: CMD-(CLI):[show interfaces tengigabitethernet 0/3]by default from console
[4/20 10:55:8]: CMD-(CLI):[show lldp neighbors]by default from console
[4/20 15:17:6]: CMD-(CLI):[show cam-acl]by default from console
[4/20 16:34:59]: CMD-(CLI):[show running-config interface tengigabitethernet 0/55]by default from console
[4/20 16:38:14]: CMD-(CLI):[show vlan]by default from console
[5/4 9:11:52]: CMD-(TELO):[show version]by admin from vty0 (10.11.68.14)
[5/4 9:12:9]: CMD-(TELO):[show hosts]by admin from vty0 (10.11.68.14)
[5/4 9:14:38]: CMD-(TELO):[show arp]by admin from vty0 (10.11.68.14)
[5/4 9:19:29]: CMD-(TELO):[enable]by admin from vty0 (10.11.68.14)
[5/4 9:19:35]: CMD-(TELO):[configure]by admin from vty0 (10.11.68.14)
- Repeated 1 time.
[5/4 9:19:50]: CMD-(TELO):[interface tengigabitethernet 0/16]by admin from vty0 (10.11.68.14)
[5/4 9:20:11]: CMD-(TELO):[exit]by admin from vty0 (10.11.68.14)
Dell#
```

Related Commands [clear command history](#) — clears the command history log.

show configuration lock

Display the configuration lock status.

Syntax `show configuration lock`

Defaults None

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The type may be auto, manual, or rollback. When set to auto, Dell Networking OS automatically denies access to CONFIGURATION mode to all other users every time the user on the listed VTY line enters CONFIGURATION mode. When set to manual, the user on the listed VTY line must explicitly set the lock each time before entering CONFIGURATION mode. Rollback indicates that Dell Networking OS is in a rollback process. The line number shown in the output can be used to send the messages to that session or release a lock on a VTY line.

Example

```
Dell#show configuration lock
Configure exclusively locked by the following line:
Line           : vty 0
Line number    : 2
User           : admin
Type           : AUTO
State          : LOCKED
Ip address     : 10.11.9.97
Dell#
```

show cpu-traffic-stats

Display the CPU traffic statistics.

Syntax `show cpu-traffic-stats [port number | all]`

Parameters

- port number** (OPTIONAL) Enter the port number to display traffic statistics on that port only. The range is from 1 to 1568.
- all** (OPTIONAL) Enter the keyword `all` to display traffic statistics on all the interfaces receiving traffic, sorted based on the traffic.

Defaults `all`

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Traffic statistics are sorted on a per-interface basis; the interface receiving the most traffic is displayed first. All CPU and port information is displayed unless a specific port or CPU is specified. Traffic information is displayed for router ports only; not for management interfaces. The traffic statistics are collected only after the `debug cpu-traffic-stats` command is executed; not from the system bootstrap.

NOTE: After debugging is complete, use the `no debug cpu-traffic-stats` command to shut off traffic statistics collection.

Example

```
Dell#show cpu-traffic-stats
Processor : CP
-----
```

```
Received 100% traffic on TenGigabitEthernet 8/2 Total packets:100
LLC:0, SNAP:0, IP:100, ARP:0, other:0
Unicast:100, Multicast:0, Broadcast:0
Dell#
```

Related Commands [debug cpu-traffic-stats](#) — enables CPU traffic statistics for debugging.

show debugging

View a list of all enabled debugging processes.

Syntax `show debugging`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show debug
Generic IP: (Access List: test)
  IP packet debugging is on for (Access List: test)
    TenGigabitEthernet 0/16
  ICMP packet debugging is on for
    TenGigabitEthernet 0/16
OSPF:1
  OSPF packet debugging is on
DHCP:
  DHCP debugging is on
Dell#
```

show diag

Display the diagnostics information.

Syntax `show diag {information | stack-unit number [detail | summary]] | testcase}`

Parameters

information	Enter the keyword <code>information</code> to view current diagnostics information in the system.
stack-unit <i>unit-id</i>	(OPTIONAL) Enter the keywords <code>stack-unit</code> then the <i>unit-id</i> to display information on a specific stack member. The range is from 0 to 5.
detail	(OPTIONAL) Enter the keyword <code>detail</code> to view detailed diagnostics information.
summary	(OPTIONAL) Enter the keyword <code>summary</code> to view a summary of the diagnostics information.
testcase	Enter the keyword <code>testcase</code> to view current diagnostics testcases available in the system.

Defaults Summary

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

show environment

Displays the system component status (for example, temperature or voltage).

Syntax `show environment [all | stack-unit unit-id]`

Parameters

all	Enter the keyword <code>all</code> to view all components.
stack-unit <i>unit-id</i>	Enter the keywords <code>stack-unit</code> then the <code>unit-id</code> to display information on a specific stack member. The range is from 0 to 5.
thermal sensor	Enter the keywords <code>thermal-sensor</code> to view all components.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (all)

```
Dell#show environment all

-- Unit Environment Status --
Unit  Status  Temp  Voltage  TempStatus
-----
* 1   online   66C   ok       2
* Management Unit
-- Thermal Sensor Readings (deg C) --
Unit  Sensor0  Sensor1  Sensor2  Sensor3  Sensor4  Sensor5  Sensor6  Sensor7
Sensor8  Sensor9
-----
1      51      51      63      61      61      61      67      61
64     66
Dell#
```

Example (stack-unit)

```
Dell#show environment stack-unit

-- Unit Environment Status --
Unit  Status  Temp  Voltage  TempStatus
-----
* 1   online   66C   ok       2
```

```
* Management Unit
Dell#
```

Example (thermal-sensor)

```
Dell#show environment thermal-sensor
-- Thermal Sensor Readings (deg C) --
Unit Sensor0 Sensor1 Sensor2 Sensor3 Sensor4 Sensor5 Sensor6 Sensor7
Sensor8 Sensor9
-----
1      51      51      64      61      61      61      67      61
64     66
Dell#
```

show inventory

Display the switch type, components (including media), and Dell Networking OS version including hardware identification numbers and configured protocols.

Syntax `show inventory [media slot]`

Parameters **media slot** (OPTIONAL) Enter the keyword `media` then the stack ID of the stack member you want to display pluggable media inventory.

Defaults none

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information If there are no fiber ports in the unit, just the header under `show inventory media` displays. If there are fiber ports but no optics inserted, the output displays "Media not present or accessible".

Example

```
Dell#show inventory
System Type      : PE-FN-410S-IOA
System Mode      : 1.0
Software Version : 1-0(0-1859)

Unit Type  Serial Number  Part Number  Rev  Piece Part ID  Rev
Svc Tag   Exprs  Svc Code
-----
* 0  PowerEdge-FN-410S-IOA  TW000000000020  07NVPVX01  X01
TW-07NVPV-00000-000-0020  X01  N/A      N/A

* - Management Unit

Software Protocol Configured
-----
DCBX
FIP Snooping
IGMP
iSCSI
LLDP
SNMP
Dell#
```

Example (media)

```
Dell#show inventory media ?
<0-5> Slot number
| Pipe through a command

Dell#show inventory media
Slot Port  Type  Media          Serial Number  F10Qualified
-----
0      9    SFP+  10GBASE-SR    AHJ0BU3       Yes
0      10   SFP+  10GBASE-CU5M  APF125100446U1  Yes
0      11   SFP+  10GBASE-SR    CD23FM12H     Yes
0      12   SFP+  10GBASE-SR    CD23FM0XT     Yes
```

```
Dell#
```

Related Commands `show config (from INTERFACE VLAN mode)` — displays information on a specific physical interface or virtual interface.

show memory

Display current memory usage on the M I/O Aggregator.

Syntax `show memory [stack-unit 0-5]`

Parameters

stack-unit 0-5 (OPTIONAL) Enter the keywords `stack-unit` then the stack unit ID of the stack member to display memory information on the designated stack member.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The output for `show memory` command displays the memory usage of LP part (sysdlp) of the system. The `sysdlp` is an aggregate task that handles all the tasks running on the CPU.

Example

```
Dell#show memory
  Statistics On Unit 0 Processor
  =====
  Total (b)   Used (b)   Free (b)   Lowest (b)   Largest (b)
268435456  4010354  264425102  264375410   264425102
```

show processes cpu

Displays CPU usage information based on processes running.

Syntax `show processes cpu [management-unit 1-99 [details] | stack-unit 0-5 | summary]`

Parameters

management-unit 1-99 [details] (OPTIONAL) Display processes running in the control processor. The 1-99 variable sets the number of tasks to display in order of the highest CPU usage in the past five (5) seconds. Add the keyword `details` to display all running processes (except `sysdlp`). Refer to Example (management-unit).

stack-unit 0-5 (OPTIONAL) Enter the keywords `stack-unit` then the stack member ID. The range is from 0 to 5.

As an option of the `show processes cpu` command, this option displays CPU usage for the designated stack member. Or, as an option of `memory`, this option limits the

output of memory statistics to the designated stack member. Refer to Example (stack-unit).

summary (OPTIONAL) Enter the keyword `summary` to view a summary view CPU utilization of processes related to line card processing. Refer to Example (summary).

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example (summary)

```
Dell#show processes cpu summary
CPU utilization   5Sec      1Min      5Min
-----
UNIT1             4%       3%       2%
```

Example (management-unit)

```
Dell#show processes cpu management-unit 5
CPU utilization for five seconds:4%/0%; one minute:4%; five minutes:4%
PID      Runtime(ms)  Invoked  uSecs   5Sec   1Min   5Min   TTY Process
0x00000000  2120      212      10000   3.77%  3.77%  3.77%  0 system
0x00000112  2472940   247294   10000   0.79%  0.61%  0.65%  0 sysdlp
0x000000e4  495560    49556    10000   0.20%  0.25%  0.24%  0 sysd
0x0000013d  34310     3431     10000   0.00%  0.02%  0.00%  0 lacp
0x00000121  4190     419      10000   0.00%  0.02%  0.00%  0 iscsiOpt

PID Runtime(ms)  Invoked  uSecs   5Sec   1Min   5Min   TTY Process
Dell#
```

Example (stack-unit)

```
Dell#show process cpu stack-unit 1
CPU utilization for five seconds:4%/0%; one minute:3%; five minutes:2%
PID      Runtime(ms)  Invoked  uSecs   5Sec   1Min   5Min   TTY Process
0x763a3000 17981680   1798168  10000   3.00%  2.67%  2.67%  0 KP
0x762ba000  0           0         0         0.00%  0.00%  0.00%  0 debugagt
0x762d9000  0           0         0         0.00%  0.00%  0.00%  0 F10StkMgr
0x762f8000  214590     21459    10000   0.00%  0.00%  0.00%  0 lcMgr
0x76319000  7890      789      10000   0.00%  0.00%  0.00%  0 dla
0x76344000  155770    15577    10000   0.00%  0.00%  0.02%  0 sysAdmTsk
0x76363000  583230    58323    10000   0.00%  0.00%  0.02%  0 timerMgr
0x76381000  658850    65885    10000   0.00%  0.17%  0.08%  0 PM
0x76299000  80110     8011     10000   0.00%  0.00%  0.00%  0 diagagt
0x763c3000  0         0         0         0.00%  0.00%  0.00%  0 evagt
--More--
```

Related Commands

- [show diag](#) — displays the data plane or management plane input and output statistics of the designated component of the designated stack member.
- [show hardware system-flow](#) — displays Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.
- [show interfaces stack-unit](#) — displays information on all interfaces on a specific stack member.

`show processes memory` — displays CPU usage information based on running processes.

show processes ipc flow-control

Displays the single window protocol queue (SWPQ) statistics.

Syntax `show processes ipc flow-control [cp]`

Parameters **cp** (OPTIONAL) Enter the keyword `cp` to view the control processor's SWPQ statistics.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

Field	Description
Source QID /Tx Process	Source Service Identifier
Destination QID/Rx Process	Destination Service Identifier
Cur Len	Current number of messages enqueued
High Mark	Highest number of packets in the queue at any time
#of to / Timeout	Timeout count
#of Retr /Retries	Number of retransmissions
#msg Sent/Msg Sent/	Number of messages sent
#msg Ackd/Ack Rcvd	Number of messages acknowledged
Retr /Available Retra	Number of retries left
Total/ Max Retra	Number of retries allowed

Important Points:

- The SWP provides flow control-based reliable communication between the sending and receiving software tasks.
- A sending task enqueues messages into the SWP queue for a receiving task and waits for an acknowledgement.

- If no response is received within a defined period of time, the SWP timeout mechanism resubmits the message at the head of the FIFO queue.
- After retrying a defined number of times, the SWP-2-NOMORETIMEOUT timeout message is generated.
- In the example, a retry (Retries) value of zero indicates that the SWP mechanism reached the maximum number of retransmissions without an acknowledgement.

Example

```
Dell#show processes ipc flow-control

Q Statistics on CP Processor
TxProcess RxProcess  Cur   High  Time  Retr Msg   Ack Aval  Max
          Len   Mark  Out   ies  Sent  Rcvd Retra Retra  ACL0  RTM0
          0    0    0    0    0    0    0    0    10   10
DIFFSERV0
ACL0     IGMP0  0    0    0    0    0    0    10   10
ACL0     PIM0   0    0    0    0    0    0    10   10
LACP0    IFMGRO 0   24    0    0    34    34   25   25
STP0     L2PM0  0    0    0    0    0    0    25   25
L2PM0    STP0   0    1    0    0    2    2    25   25
FRRP0    L2PM0  0    0    0    0    0    0    25   25
DHCP0    ACL0   0    0    0    0    0    0    25   25
DHCP0    IPMGRO 0    0    0    0    0    0    25   25
DHCP0    IFMGRO 0    0    0    0    0    0    25   25
SMUX0    IFMGRO 0   38    0    0    47    47   60   60
SMUX0    LACP0  0    1    0    0    3    3    60   60
--More--
Dell#
```

show processes memory

Display memory usage information based on processes running in the system.

Syntax `show processes memory {management-unit | stack unit {0-5 | all | summary}}`

Parameters

management-unit	Enter the keywords <code>management-unit</code> for CPU memory usage of the stack management unit.
stack unit 0-5	Enter the keywords <code>stack unit</code> then a stack unit ID of the member unit for which to display memory usage on the forwarding processor.
all	Enter the keyword <code>all</code> for detailed memory usage on all stack members.
summary	Enter the keyword <code>summary</code> for a brief summary of memory availability and usage on all stack members.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information `show processes memory output`

Field	Description
Total:	Total system memory available
MaxUsed:	Total maximum memory used ever (history indicated with time stamp)
CurrentUsed:	Total memory currently in use
CurrentFree:	Total system memory available
SharedUsed:	Total used shared memory
SharedFree:	Total free shared memory
PID	Process ID
Process	Process Name
ResSize	Actual resident size of the process in memory
Size	Process test, stack, and data size
Allocs	Total dynamic memory allocated
Frees	Total dynamic memory freed
Max	Maximum dynamic memory allocated
Current	Current dynamic memory in use

The output for the `show process memory` command displays the memory usage statistics running on CP part (sysd) of the system. The sysd is an aggregate task that handles all the tasks running on the M I/O Aggregator's CP.

The output of the `show memory` command and this command differ based on which the Dell Networking OS processes are counted.

- In the `show memory` output, the memory size is equal to the size of the application processes.
- In the output of this command, the memory size is equal to the size of the application processes plus the size of the system processes.

Example

```
Dell#show processes memory stack-unit 1
Total:2147483648, MaxUsed:499040256, CurrentUsed:499040256, CurrentFree:
1648443392
TaskName      TotalAllocated TotalFreed MaxHeld  CurrentHolding
f10appioserv  225280          0         0       192512
fcoecntrl     270336          0         0       9277440
f10appioserv  225280          0         0       192512
iscsiOpt      114688          0         0       7380992
dhclient      552960          0         0       1626112
f10appioserv  225280          0         0       192512
ndpm          618496          0         0       7389184
f10appioserv  225280          0         0       192512
vrrp          335872          0         0       7712768
f10appioserv  225280          0         0       192512
frp           180224          0         0       7192576
f10appioserv  225280          0         0       192512
xstp          2740224         0         0       9445376
f10appioserv  225280          0         0       192512
pim           1007616         0         0       7585792
f10appioserv  225280          0         0       192512
igmp          417792          0         0       14774272
f10appioserv  225280          0         0       192512
mrtm          5496832         0         0       12636160
```

```
--More--
```

Example
(management-unit)

```
Dell#show processes memory management-unit
Total:2147483648, MaxUsed:499093504 [07/23/2012 17:42:16]
CurrentUsed:499093504, CurrentFree:1648390144
SharedUsed:18470440, SharedFree:2501104

PID Process ResSize Size Allocs Frees Max Current
633 fcoecntrl 9277440 270336 1380528 132512 1281144 1248016
289 iscsiOpt 7380992 114688 23262 16564 23262 6698
476 dhclient 1626112 552960 0 0 0 0
521 ndpm 7389184 618496 4848 0 4848 4848
160 vrrp 7712768 335872 880 0 880 880
318 frrp 7192576 180224 71086 66256 21394 4830
218 xstp 9445376 2740224 21858 0 21858 21858
277 pim 7585792 1007616 62168 0 62168 62168
--More--
```

show reset-reason

Display the reason for the last system reboot.

Syntax

```
show reset-reason [stack-unit {stack-unit-number | all}]
```

Parameters

stack-unit unit-number (OPTIONAL) Enter the keyword `stack-unit` and the stack unit number to view the reason for the last system reboot for that stack unit.

all (OPTIONAL) Enter the keyword `stack-unit` and the keyword `all` to view the reason for the last system reboot of all stack units in the stack.

Command Modes

- EXEC
- EXEC Privilege

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.13(0.0)	Introduced on the S3048-ON, S3100 series, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, C9010, MXL, M-IOA, and FN-IOM.

Usage Information

You can use the `show reset-reason` without the `stack-unit` option to view the reason for the last system reboot of the local system.

Example — User-initiated reboot with the reload command

```
DellEMC#show reset-reason
Cause      : Reset by User through CLI command
Reset Time: 11/05/2017-08:36
```

Example — System reboot due to the upgrade command

```
DellEMC# show reset-reason
Cause: Reboot by Software upgrade Module.
Reset Time: 8/9/2017 1:39 PM.
```

Example — System reboot for unknown reasons

```
DellEMC# show reset-reason
Cause: N/A
Reload Time: N/A
```

Example — System reboot due to power loss or pressing the power button off and on. The example shows the reason for the last reboot as N/A for warm reset.

```
DellEMC#show reset-reason
Cause          : N/A
Reset Time     : N/A.
```

Example — System reboot due to watchdog timeout

```
DellEMC#show reset-reason
Cause: N/A.
Reset Time: N/A
```

Example — System reboot due to thermal shutdown. The example shows the reason for the last reboot as N/A for thermal shutdown.

```
DellEMC# show reset-reason
Cause: N/A
Reload Time: N/A
```

Example — System reboot due to BIOS boot fail

```
DellEMC#show reset-reason
Cause: NA
Reset Time: N/A.
```

Example — Unknown reason If the reason for the last system reboot is not available, the system displays the reason as N/A.

```
DellEMC# show reload-reason
Cause: N/A
Time: N/A
```

Example — Reset reason of a single stack unit

```
DellEMC# show reset-reason stack-unit 1
Cause      : Reset by User through CLI command
Reset Time: 11/05/2017-08:36
```

Example — Reset reason of all stack units

```
DellEMC#show reset-reason stack-unit all
```

```
Last Reset Reason:
-----
Type                Cause                                     Time
-----
stack-unit 1        Reboot by Software                        11/05/2017-09:04
stack-unit 2        Reboot by Software                        11/05/2017-09:04
stack-unit 3        Cold Reset                                N/A
stack-unit 4        N/A                                        N/A
stack-unit 5        N/A                                        N/A
stack-unit 6        N/A                                        N/A
```

show revision

Displays the revision numbers of all stack-units.

Syntax `show revision`

Command Modes

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (Command)

```
Dell#show revision
-- Stack unit 1 --
IOM SYSTEM CPLD : 1
Dell#
```

show server-interfaces

Displays server port information.

Syntax `show server-interfaces{brief|detail}`

Command Modes
· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (brief Command)

```
Dell#show server-interfaces brief
----- show server ports brief -----
Interface OK Status Protocol Description
TenGigabitEthernet 1/1 NO up down
TenGigabitEthernet 1/2 NO up down
TenGigabitEthernet 1/3 NO up down
TenGigabitEthernet 1/4 NO up down
TenGigabitEthernet 1/5 YES up up
TenGigabitEthernet 1/6 NO up down
TenGigabitEthernet 1/7 NO up down
TenGigabitEthernet 1/8 NO up down
TenGigabitEthernet 1/9 NO up down
TenGigabitEthernet 1/10 NO up down
TenGigabitEthernet 1/11 NO up down
TenGigabitEthernet 1/12 NO up down
TenGigabitEthernet 1/13 YES up up
TenGigabitEthernet 1/14 NO up down
TenGigabitEthernet 1/15 NO up down
TenGigabitEthernet 1/16 YES up up
--More--
Dell#
```

Example (detail Command)

```
Dell#show server-interfaces detail
----- show server ports detail -----
TenGigabitEthernet 0/1 is up, line protocol is down(error-disabled[UFD])
Hardware is DellForcel0Eth, address is 00:1e:c9:f1:00:99
Current address is 00:1e:c9:f1:00:99
Server Port AdminState is N/A
Pluggable media not present
```

```

Interface index is 34149121
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :tenG130001ec9f10099
MTU 12000 bytes, IP MTU 11982 bytes
LineSpeed auto
Flowcontrol rx on tx off
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 00:59:19
Queueing strategy: fifo
Input Statistics:
0 packets, 0 bytes
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts
0 runts, 0 giants, 0 throttles
0 CRC, 0 overrun, 0 discarded
Output Statistics:
0 packets, 0 bytes, 0 underruns
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts, 0 Unicasts
0 throttles, 0 discarded, 0 collisions, 0 wredrops
Rate info (interval 299 seconds):
Input 00.00 Mbits/sec, 0 packets/sec, 0.00% of line-rate
Output 00.00 Mbits/sec, 0 packets/sec, 0.00% of line-rate
Time since last interface status change: 00:58:08
TenGigabitEthernet 0/2 is up, line protocol is down(error-disabled[UFD])
Hardware is DellForce10Eth, address is 00:1e:c9:f1:00:99
Current address is 00:1e:c9:f1:00:99
Server Port AdminState is N/A
Pluggable media not present
Interface index is 34411265
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :tenG131001ec9f10099
--More--

```

show system

Displays the current status of all stack members or a specific stack member.

Syntax `show system [brief | stack-unit unit-id]`

Parameters

brief	(OPTIONAL) Enter the keyword <code>brief</code> to view an abbreviated list of system information.
stack unit <i>unit-id</i>	(OPTIONAL) Enter the keywords <code>stack unit</code> then the stack member ID for information on the stack member. The range is from 0 to 5.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.11(0.0)	Included the support for Stomp B1 chipset on FN IOM.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

Example (show system brief command)

```
Dell#show system brief
Stack MAC      : f4:8e:38:0e:e5:fc
Reload-Type    : normal-reload [Next boot : normal-reload]

-- Stack Info --
Unit UnitType  Status      ReqTyp      CurTyp      Version     Ports
-----
  0  Management  online      PE-FN-410S-IOM  PE-FN-410S-IOM  9.11(0.0)  12
  1  Member      not present
  2  Member      not present
  3  Member      not present
  4  Member      not present
  5  Member      not present
Dell#
```

Example (stack-unit command)

```
Dell#show system stack-unit 0
-- Unit 0 --
Unit Type      : Management Unit
Status         : online
Next Boot      : online
Required Type  : PE-FN-410S-IOM - 12-port GE/TE (FN)
Current Type   : PE-FN-410S-IOM - 12-port GE/TE (FN)
Master priority : 14
Hardware Rev   : A01
Num Ports      : 12
Up Time        : 22 min, 43 sec
Dell Networking OS Version : 9.11(0.0)
Jumbo Capable  : yes
POE Capable    : no
FIPS Mode      : disabled
Boot Flash     : A: 4.1.1.1 [booted]      B: 4.1.1.1
Boot Selector  : 4.1.0.1
Memory Size    : 2147483648 bytes
Temperature    : 55C
Voltage        : ok
Switch Power   : GOOD
Product Name   : Dell PowerEdge FN 410S IOM
Mfg By         : DELL
Mfg Date       : 2016-02-24
Serial Number  : CN282986200018
Part Number    : 0T6W0JA01
Piece Part ID  : CN-0T6W0J-28298-620-0018
PPID Revision  : A01
Service Tag    : N/A
Expr Svc Code  : N/A
Chassis Svce Tag : 0000000
Fabric Id      : A1
Asset tag      :
PSOC FW Rev    : 0xd
ICT Test Date  : 6-2-24
ICT Test Info  : 0x0
Max Power Req  : 16896
Fabric Type    : 0x3
Fabric Maj Ver : 0x1
Fabric Min Ver : 0x2
SW Manageability : 0x4
HW Manageability : 0xd
Max Boot Time  : 3 minutes
Link Tuning    : unsupported
Auto Reboot    : enabled
Burned In MAC  : f4:8e:38:0e:e6:14
```

```
No Of MACs          : 3
Dell#
```

- Related Commands**
- [asset-tag](#) — Assign and store unique asset-tag to the stack member.
 - [show version](#) — Displays the Dell version.
 - [show processes memory](#) — Displays the memory usage based on the running processes.
 - [show diag](#) — Displays the data plane and management plane input and output statistics of a particular stack member.

show tech-support

Displays a collection of data from other show commands, necessary for Dell Networking technical support to perform troubleshooting on Aggregators.

Syntax `show tech-support [stack-unit unit-id | page]`

- Parameters**
- stack-unit** (OPTIONAL) Enter the keyword `stack-unit` to view CPU memory usage for the stack member designated by `unit-id`. The range is 0 to 5.
 - page** (OPTIONAL) Enter the keyword `page` to view 24 lines of text at a time. Press the SPACE BAR to view the next 24 lines. Press the ENTER key to view the next line of text. When using the pipe command (`|`), enter one of these keywords to filter command output. Refer to [CLI Basics](#) for details on filtering commands.
 - save** Enter the keyword `save` to save the command output.
flash: Save to local flash drive (`flash://filename` (max 20 chars))

Command Modes
· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Without the `page` or `stack-unit` option, the command output is continuous, use Ctrl-z to interrupt the command output.

The `save` option works with other filtering commands. This allows you to save specific information of a show command. The `save` entry must always be the last option.

For example: `Dell#show tech-support |grep regular-expression |except regular-expression | find regular-expression | save flash://result`

This display output is an accumulation of the same information that is displayed when you execute one of the following showcommands:

- show cam
- show clock
- show environment
- show file
- show interfaces
- show inventory
- show processes cpu
- show processes memory
- show running-conf
- show version

Example (save)

```
Dell#show tech-support ?
page          Page through output
stack-unit    Unit Number
|            Pipe through a command
<cr>
Dell#show tech-support stack-unit 1 ?
page          Page through output
|            Pipe through a command
<cr>
Dell#show tech-support stack-unit 1 | ?
except S      how only text that does not match a pattern
find          Search for the first occurrence of a pattern
grep          Show only text that matches a pattern
no-more       Don't paginate output
save          Save output to a file
Dell#show tech-support stack-unit 1 | save ?
flash:        Save to local file system (flash://filename (max 20 chars) )
usbflash:     Save to local file system (usbflash://filename (max 20
chars) )
Dell#show tech-support stack-unit 1 | save flash://LauraSave
Start saving show command report .....
Dell#
Dell#dir
Directory of flash:
Directory of flash:
1 drwx 4096 Jan 01 1980 01:00:00 +01:00 .
2 drwx 2048 May 16 2012 10:49:01 +01:00 ..
3 drwx 4096 Jan 24 2012 19:38:32 +01:00 TRACE_LOG_DIR
4 drwx 4096 Jan 24 2012 19:38:32 +01:00 CORE_DUMP_DIR
5 d--- 4096 Jan 24 2012 19:38:34 +01:00 ADMIN_DIR
6 -rwx 10303 Mar 15 2012 18:37:20 +01:00 startup-config.bak
7 -rwx 7366 Apr 20 2012 10:57:02 +01:00 startup-config
8 -rwx 4 Feb 19 2012 07:05:02 +01:00 dhcpBindConflict
9 -rwx 12829 Feb 18 2012 02:24:14 +01:00 startup-config.backup
10 drwx 4096 Mar 08 2012 22:58:54 +01:00 WJ_running-config
11 -rwx 7689 Feb 21 2012 04:45:40 +01:00 stbkup
flash: 2143281152 bytes total (2131476480 bytes free)
Dell
```

Example (support)

```
Dell#show tech-support stack-unit 1
----- show version
-----
Dell Networking Real Time Operating System Software
Dell Networking Operating System Version: 1.0
Dell Networking Application Software Version: E8-3-17-38
Copyright (c) 1999-2012 by Dell Inc. All Rights Reserved.
Build Time: Thu Jul 19 05:59:59 PDT 2012
Build Path: /sites/sjc/work/swsystems01-2/ravisubramani/ravis-8317/SW/SRC/
```

```

Cp_src/
Tacacs
FTOS uptime is 4 day(s), 7 hour(s), 14 minute(s)
System image file is "dv-m1000e-2-b2"
System Type: I/O-Aggregator
Control Processor: MIPS RMI XLP with 2147483648 bytes of memory.
256M bytes of boot flash memory.
1 34-port GE/TE (XL)
56 Ten GigabitEthernet/IEEE 802.3 interface(s)
----- show clock -----
17:49:37.2 UTC Mon Jul 23 2012
----- show running-config
-----
Current Configuration ...
! Version E8-3-17-38
! Last configuration change at Mon Jul 23 17:10:18 2012 by default
!
boot system stack-unit 1 primary tftp://10.11.9.21/dv-m1000e-2-b2
boot system stack-unit 1 default system: A:
boot system gateway 10.11.209.62
!
redundancy auto-synchronize full
!
service timestamps log datetime
!
hostname FTOS
----- show ip management route
-----
Destination Gateway State
-----
1
--More--
Dell#

```

- Related Commands**
- [show version](#) — displays the Dell Networking OS version.
 - [show system](#) — displays the current switch status..
 - [show environment](#) — displays system component status.
 - [show processes memory](#) — displays memory usage based on the running processes.

show uplink brief

Displays the uplink port information.

Syntax `show uplink {brief|detail}`

Parameters

brief	Enter the keyword <code>brief</code> to display a brief summary of the uplink port information.
detail	Enter the keyword <code>detail</code> to display uplink port information with description.

Command Modes

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (brief)

```
Dell#show uplink brief
----- show uplink brief -----
Interface          OK Status   Protocol Description
TenGigabitEthernet 0/41 NO up      down
TenGigabitEthernet 0/43 NO up      down
TenGigabitEthernet 0/44 NO up      down
TenGigabitEthernet 0/45 NO up      down
TenGigabitEthernet 0/46 NO up      down
TenGigabitEthernet 0/47 NO up      down
TenGigabitEthernet 0/48 NO up      down
TenGigabitEthernet 0/49 NO up      down
TenGigabitEthernet 0/50 NO up      down
TenGigabitEthernet 0/51 NO up      down
TenGigabitEthernet 0/52 NO up      down
TenGigabitEthernet 0/53 NO up      down
TenGigabitEthernet 0/54 NO up      down
TenGigabitEthernet 0/55 NO up      down
TenGigabitEthernet 0/56 NO up      down
TenGigabitEthernet 1/41 NO up      down
TenGigabitEthernet 1/42 NO up      down
TenGigabitEthernet 1/43 NO up      down
--More--
4 www.forcel0networks.com (10.11.84.18) 000.000 ms 000.000 ms 000.000 ms
Dell#
```

Example (detail)

```
Dell#show uplink detail
----- show uplink detail -----
TenGigabitEthernet 0/41 is up, line protocol is down
Hardware is DellForce10Eth, address is 00:1e:c9:f1:00:99
Current address is 00:1e:c9:f1:00:99
Port is not present
Pluggable media not present
Interface index is 44634881
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :tenG170001ec9f10099
MTU 12000 bytes, IP MTU 11982 bytes
LineSpeed auto
Flowcontrol rx on tx off
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 2d19h53m
Queueing strategy: fifo
Input Statistics:
0 packets, 0 bytes
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts
--More--
```

show util-threshold cpu

Displays the set CPU utilization threshold values.

Syntax show util-threshold cpu

Command Modes

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command displays all CPU utilization thresholds of the management, standby, and stack-units.

show util-threshold memory

Displays the set memory utilization threshold values.

Syntax `show util-threshold memory`

Command Modes

· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command displays all memory utilization thresholds of the management, standby, and stack-units.

ssh-peer-stack-unit

Open an SSH connection to the peer stack-unit.

Syntax `ssh-peer-stack-unit [-| username]`

Parameters

`-| username` (OPTIONAL) Enter the keyword `-|` followed by your username.
Default: The username associated with the terminal.

Defaults Not configured.

Command Modes

· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.6(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

telnet

Connect through Telnet to a server. The Telnet client and server in Dell Networking OS support IPv4 connections. You can establish a Telnet session directly to the router or a connection can be initiated from the router.

Syntax `telnet {host | ip-address [/source-interface]}`

Parameters

host	Enter the name of a server.
ip-address	Enter the IPv4 address in dotted decimal format of the server.
source-interface	(OPTIONAL) Enter the keywords <code>/source-interface</code> then the interface information to include the source interface. Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults Not configured.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Telnet to link-local addresses is not supported.

telnet-peer-stack-unit

Open a telnet connection to the peer stack-unit.

Syntax `telnet-peer-stack-unit`

Defaults Not configured.

Command Modes

- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.6(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

terminal length

Configure the number of lines displayed on the terminal screen.

Syntax `terminal length screen-length`
 To return to the default values, use the `no terminal length` command.

Parameters

screen-length Enter a number of lines. Entering zero will cause the terminal to display without pausing. The range is from 0 to 512.

Default: 24 lines

Defaults 24 lines

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

terminal monitor

Configure the Dell Networking OS to display messages on the monitor/terminal.

Syntax `terminal monitor`
 To return to default settings, use the `no terminal monitor` command.

Defaults Disabled

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

terminal xml

Enable XML mode in Telnet and SSH client sessions.

Syntax `terminal xml`
 To exit the XML mode, use the `no terminal monitor` command.

Defaults Disabled

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command enables XML input mode where you can either cut and paste XML requests or enter the XML requests line-by-line.

trace route

View the packet path to a specific device.

Syntax `traceroute {host | ip-address}`

Parameters

host Enter the name of device.

ip-address Enter the IP address of the device in dotted decimal format.

Defaults Timeout = 5 seconds; Probe count = 3; 30 hops max; 40 byte packet size; UDP port = 33434

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

When you enter the traceroute command without specifying an IP address (Extended Traceroute), you are prompted for a target and source IP address, timeout in seconds (default is 5), a probe count (default is 3), minimum TTL (default is 1), maximum TTL (default is 30), and port number (default is 33434). To keep the default setting for those parameters, press the ENTER key.

Example (IPv4)

```
Dell#traceroute www.forcel0networks.com
Translating "www.forcel0networks.com"...domain server (10.11.0.1)
[OK]
Type Ctrl-C to abort.
-----
Tracing the route to www.forcel0networks.com (10.11.84.18),
 30 hops max, 40 byte packets
-----
TTL Hostname Probe1 Probe2 Probe3
 1 10.11.199.190 001.000 ms 001.000 ms 002.000 ms
 2 gwegress-sjc-02.forcel0networks.com (10.11.30.126)
   005.000 ms 001.000 ms 001.000 ms
 3 fw-sjc-01.forcel0networks.com (10.11.127.254)
   000.000 ms 000.000 ms 000.000 ms
 4 www.forcel0networks.com (10.11.84.18)
   000.000 ms 000.000 ms 000.000 ms
Dell#
```

Related Commands

undebug all

Disable all debug operations on the system.

Syntax	undebug all
Defaults	none
Command Modes	· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

virtual-ip

Configure a virtual IP address for the active management interface. You can configure virtual addresses both for IPv4 independently.

Syntax `virtual-ip {ipv4-address}`

Parameters **ipv4-address** Enter the IP address of the active management interface in a dotted decimal format (A.B.C.D.).

Defaults	none
Command Modes	CONFIGURATION
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Each time you issue this command, it replaces the previously configured address of the same family. The `no virtual-ip` command takes an address/prefix-length argument, so that the desired address only is removed. If you enter the `no virtual-ip` command without any specified address, the IPv4 virtual addresses are removed.

Example

```
Dell#virtual-ip 10.11.197.99/16
```

write

Copy the current configuration to either the startup-configuration file or the terminal.

Syntax `write {memory | terminal}`

Parameters

memory	Enter the keyword <code>memory</code> to copy the current running configuration to the startup configuration file. This command is similar to the <code>copy running-config startup-config</code> command.
terminal	Enter the keyword <code>terminal</code> to copy the current running configuration to the terminal. This command is similar to the <code>show running-config</code> command.

Command Modes . EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The `write memory` command saves the running-configuration to the file labeled startup-configuration. When using a LOCAL CONFIG FILE other than the startup-config not named "startup-configuration", the running-config is not saved to that file; use the `copy` command to save any running-configuration changes to that local file.

802.1X

An authentication server must authenticate a client connected to an 802.1X switch port. Until the authentication, only extensible authentication protocol over LAN (EAPOL) traffic is allowed through the port to which a client is connected. After authentication is successful, normal traffic passes through the port.

The Dell Networking operating software supports remote authentication dial-in service (RADIUS) and active directory environments using 802.1X Port Authentication.

Important Points to Remember

The system limits network access for certain users by using virtual local area network (VLAN) assignments. 802.1X with VLAN assignment has these characteristics when configured on the switch and the RADIUS server.

- If no VLAN is supplied by the RADIUS server or if you disable 802.1X authorization, the port configures in its access VLAN after successful authentication.
- If you enable 802.1X authorization but the VLAN information from the RADIUS server is not valid, the port returns to the Unauthorized state and remains in the configured access VLAN. This safeguard prevents ports from appearing unexpectedly in an inappropriate VLAN due to a configuration error. Configuration errors create an entry in Syslog.
- If you enable 802.1X authorization and all information from the RADIUS server is valid, the port is placed in the specified VLAN after authentication.
- If you enable port security on an 802.1X port with VLAN assignment, the port is placed in the RADIUS server assigned VLAN.
- If you disable 802.1X on the port, it returns to the configured access VLAN.
- When the port is in the Force Authorized, Force Unauthorized, or Shutdown state, it is placed in the configured access VLAN.
- If an 802.1X port is authenticated and put in the RADIUS server assigned VLAN, any change to the port access VLAN configuration does not take effect.
- The 802.1X with VLAN assignment feature is not supported on trunk ports, dynamic ports, or with dynamic-access port assignment through a VLAN membership.

Topics:

- [debug dot1x](#)
- [dot1x authentication \(Configuration\)](#)
- [dot1x authentication \(Interface\)](#)
- [dot1x auth-fail-vlan](#)
- [dot1x auth-server](#)
- [dot1x auth-type mab-only](#)
- [dot1x guest-vlan](#)
- [dot1x host-mode](#)
- [dot1x mac-auth-bypass](#)
- [dot1x max-eap-req](#)
- [dot1x max-suplicants](#)
- [dot1x port-control](#)
- [dot1x quiet-period](#)
- [dot1x reauthentication](#)

- [dot1x reauth-max](#)
- [dot1x server-timeout](#)
- [dot1x supplicant-timeout](#)
- [dot1x tx-period](#)
- [show dot1x cos-mapping interface](#)
- [show dot1x interface](#)

debug dot1x

Display 802.1X debugging information.

Syntax `debug dot1x [all | auth-pae-fsm | backend-fsm | eapol-pdu] [interface interface]`

Parameters	all	Enable all 802.1X debug messages.
	auth-pae-fsm	Enable authentication PAE FSM debug messages.
	backend-fsm	Enable backend FSM debug messages.
	eapol-pdu	Enable the EAPOL frame trace and related debug messages.
	interface <i>interface</i>	Restricts the debugging information to an interface.

Defaults Disabled

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x authentication (Configuration)

Enable dot1x globally. Enable dot1x both globally and at the interface level.

Syntax `dot1x authentication`
To disable dot1x on a globally, use the `no dot1x authentication` command.

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [dot1x authentication \(Interface\)](#) — Enables dot1x on an interface.

dot1x authentication (Interface)

Enable dot1x on an interface. Enable dot1x both globally and at the interface level.

Syntax `dot1x authentication`
To disable dot1x on an interface, use the `no dot1x authentication` command.

Defaults Disabled

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [dot1x authentication \(Configuration\)](#) — Enable dot1x globally.

dot1x auth-fail-vlan

Configure an authentication failure VLAN for users and devices that fail 802.1X authentication.

Syntax `dot1x auth-fail-vlan vlan-id [max-attempts number]`
To delete the authentication failure VLAN, use the `no dot1x auth-fail-vlan vlan-id [max-attempts number]` command.

Parameters

<i>vlan-id</i>	Enter the VLAN Identifier. The range is from 1 to 4094.
<i>max-attempts number</i>	(OPTIONAL) Enter the keywords <code>max-attempts</code> followed number of attempts desired before authentication fails. The range is from 1 to 5. The default is 3 .

Defaults **3** attempts

Command Modes CONFIGURATION (*conf-if-interface-slot/port*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If the host responds to 802.1X with an incorrect login/password, the login fails. The switch attempts to authenticate again until the maximum attempts configured is reached. If the authentication fails after all allowed attempts, the interface moves to the authentication failed VLAN.

After the authentication VLAN is assigned, the port-state must be toggled to restart authentication. Authentication occurs at the next reauthentication interval (`dot1x reauthentication`).

Related Commands

- [dot1x port-control](#) — Enables port control on an interface.
- [dot1x guest-vlan](#) — Configures a guest VLAN for limited access users or for devices that are not 802.1X capable.
- [show dot1x interface](#) — Displays the 802.1X configuration of an interface.

dot1x auth-server

Configure the authentication server to RADIUS.

Syntax `dot1x auth-server radius`

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x auth-type mab-only

To authenticate a device with MAC authentication bypass (MAB), only use the host MAC address.

Syntax `dot1x auth-type mab-only`

Defaults Disabled

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The prerequisites for enabling MAB-only authentication on a port are:

- Enable 802.1X authentication globally on the switch and on the port (the `dot1x authentication` command).
- Enable MAC authentication bypass on the port (the `dot1x mac-auth-bypass` command).

In MAB-only authentication mode, a port authenticates using the host MAC address even though 802.1x authentication is enabled. If the MAB-only authentication fails, the host is placed in the guest VLAN (if configured).

To disable MAB-only authentication on a port, enter the `no dot1x auth-type mab-only` command.

Related Commands [dot1x mac-auth-bypass](#) — Enables MAC authentication bypass.

dot1x guest-vlan

Configure a guest VLAN for limited access users or for devices that are not 802.1X capable.

Syntax `dot1x guest-vlan vlan-id`
To disable the guest VLAN, use the `no dot1x guest-vlan vlan-id` command.

Parameters

vlan-id	Enter the VLAN Identifier. The range is from 1 to 4094.
----------------	---

Defaults Not configured.

Command Modes CONFIGURATION (*conf-if-interface-slot/port*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information 1X authentication is enabled when an interface is connected to the switch. If the host fails to respond within a designated amount of time, the authenticator places the port in the guest VLAN.

If a device does not respond within 30 seconds, it is assumed that the device is not 802.1X capable. Therefore, a guest VLAN is allocated to the interface and authentication, for the device, occurs at the next reauthentication interval (`dot1x reauthentication`).

If the host fails authentication for the designated number of times, the authenticator places the port in authentication failed VLAN (`dot1x auth-fail-vlan`).

NOTE: You can create the Layer 3 portion of a guest VLAN and authentication fail VLANs regardless if the VLAN is assigned to an interface or not. After an interface is assigned a guest VLAN (which has an IP address), routing through the guest VLAN is the same as any other traffic. However, the interface may join/leave a VLAN dynamically.

Related Commands

- [dot1x auth-fail-vlan](#) — Configures an authentication failure VLAN.
- [dot1x reauthentication](#) — Enables periodic re-authentication of the client.
- [dot1x reauth-max](#) — Configure the maximum number of times to re-authenticate a port before it becomes unauthorized.

dot1x host-mode

Enable single-host or multi-host authentication.

Syntax `dot1x host-mode {single-host | multi-host | multi-auth}`

Parameters

single-host	Enable single-host authentication.
multi-host	Enable multi-host authentication.

	multi-auth	Enable multi-supPLICANT authentication.
Defaults	single-host	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History		

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

- Single-host mode authenticates only one host per authenticator port and drops all other traffic on the port.
- Multi-host mode authenticates the first host to respond to an Identity Request and then permits all other traffic on the port.
- Multi-supPLICANT mode authenticates every device attempting to connect to the network on the authenticator port.

dot1x mac-auth-bypass

Enable MAC authentication bypass. If 802.1X times out because the host did not respond to the Identity Request frame, the system attempts to authenticate the host based on its MAC address.

Syntax `dot1x mac-auth-bypass`
To disable MAC authentication bypass on a port, use the `no dot1x mac-auth-bypass` command.

Defaults	Disabled
Command Modes	INTERFACE
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x max-eap-req

Configure the maximum number of times an extensive authentication protocol (EAP) request is transmitted before the session times out.

Syntax `dot1x max-eap-req number`
To return to the default, use the `no dot1x max-eap-req` command.

Parameters *number* Enter the number of times an EAP request is transmitted before a session time-out. The range is from 1 to 10. The default is **2**.

Defaults **2**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x max-supPLICANTS

Restrict the number of supplicants that can be authenticated and permitted to access the network through the port. This configuration is only takes effect in Multi-Auth mode.

Syntax `dot1x max-supPLICANTS number`

Parameters

number Enter the number of supplicants that can be authenticated on a single port in Multi-Auth mode. The range is from 1 to 128. The default is **128**.

Defaults 128 hosts can be authenticated on a single authenticator port.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [dot1x host-mode](#) — Enables single-host or multi-host authentication.

dot1x port-control

Enable port control on an interface.

Syntax `dot1x port-control {force-authorized | auto | force-unauthorized}`

Parameters

force-authorized Enter the keywords `force-authorized` to forcibly authorize a port.

auto Enter the keyword `auto` to authorize a port based on the 802.1X operation result.

force-unauthorized Enter the keywords `force-unauthorized` to forcibly deauthorize a port.

Defaults none

Command Modes Auto

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The authenticator completes authentication only when `port-control` is set to `auto`.

dot1x quiet-period

Set the number of seconds that the authenticator remains quiet after a failed authentication with a client.

Syntax `dot1x quiet-period seconds`
 To disable quiet time, use the `no dot1x quiet-time` command.

Parameters **seconds** Enter the number of seconds. The range is from 1 to 65535. The default is **60**.

Defaults **60** seconds

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x reauthentication

Enable periodic reauthentication of the client.

Syntax `dot1x reauthentication [interval seconds]`
 To disable periodic reauthentication, use the `no dot1x reauthentication` command.

Parameters **interval seconds** (Optional) Enter the keyword `interval` then the interval time, in seconds, after which reauthentication is initiated. The range is from 1 to 31536000 (one year). The default is **3600** (1 hour).

Defaults **3600** seconds (1 hour)

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x reauth-max

Configure the maximum number of times a port can reauthenticate before the port becomes unauthorized.

Syntax `dot1x reauth-max number`
To return to the default, use the `no dot1x reauth-max` command.

Parameters **number** Enter the permitted number of reauthentications. The range is from 1 to 10. The default is **2**.

Defaults **2**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x server-timeout

Configure the amount of time after which exchanges with the server time-out.

Syntax `dot1x server-timeout seconds`
To return to the default, use the `no dot1x server-timeout` command.

Parameters **seconds** Enter a time-out value in seconds. The range is from 1 to 300, where 300 is implementation dependant. The default is **30**.

Defaults **30** seconds

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you configure the `dot1x server-timeout` value, take into account the communication medium used to communicate with an authentication server and the number of RADIUS servers configured. Ideally, the `dot1x server-timeout` value (in seconds) is based on the configured RADIUS-server timeout and retransmit values and calculated according to the following formula: `dot1x server-timeout seconds > (radius-server retransmit seconds + 1) * radius-server timeout seconds`.

Where the default values are as follows: `dot1x server-timeout` (30 seconds), `radius-server retransmit` (3 seconds), and `radius-server timeout` (5 seconds).

For example:

```
Dell(conf)#radius-server host 10.11.197.105 timeout 6
Dell(conf)#radius-server host 10.11.197.105 retransmit 4
Dell(conf)#interface tengigabitethernet 2/1
Dell(conf-if-te-2/1)#dot1x server-timeout 40
```

dot1x supplicant-timeout

Configure the amount of time after which exchanges with the supplicant time-out.

Syntax `dot1x supplicant-timeout seconds`
To return to the default, use the `no dot1x supplicant-timeout` command.

Parameters **seconds** Enter a time-out value in seconds. The range is from 1 to 300, where 300 is implementation dependant. The default is **30**.

Defaults **30** seconds

Command Modes INTERFACE

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

dot1x tx-period

Configure the intervals at which EAPOL PDUs the Authenticator PAE transmits.

Syntax `dot1x tx-period seconds`
To return to the default, use the `no dot1x tx-period` command.

Parameters **seconds** Enter the interval time, in seconds, that EAPOL PDUs are transmitted. The range is from 1 to 65535. The default is **30**.

Defaults **30** seconds

Command Modes INTERFACE

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show dot1x cos-mapping interface

Display the CoS priority-mapping table the RADIUS server provides and applies to authenticated supplicants on an 802.1X-enabled system.

Syntax `show dot1x cos-mapping interface interface [mac-address mac-address]`

Parameters

<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Ten-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
<i>mac-address</i>	(Optional) MAC address of an 802.1X-authenticated supplicant.

Defaults none

Command Modes

- EXEC
- EXEC privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To display CoS mapping information only for the specified supplicant, enter a supplicant's MAC address using the `mac-address` option.

You can display the CoS mapping information applied to traffic from authenticated supplicants on 802.1X-enabled ports that are in Single-Hot, Multi-Host, and Multi-Supplicant authentication modes.

Example

```
Dell#show dot1x cos-mapping interface tengigabitethernet 0/1
802.1p CoS re-map table on Te 0/1:
-----
Dot1p          Remapped Dot1p
0              7
1              6
2              5
3              4
4              3
5              2
6              1
7              0
Dell#

Dell#show dot1x cos-mapping interface tengigabitethernet 0/1 mac-address
00:00:00:00:00:10
Supplicant Mac: 0 0 0 0 0 10 Lookup for Mac:

802.1p CoS re-map table on Te 0/1:
-----
```

```

802.1p CoS re-map table for Supplicant: 00:00:00:00:00:10

Dot1p          Remapped Dot1p
0              7
1              6
2              5
3              4
4              3
5              2
6              1
7              0
Dell#

```

show dot1x interface

Display the 802.1X configuration of an interface.

Syntax `show dot1x interface interface [mac-address mac-address]`

Parameters

- interface*** Enter one of the following keywords and slot/port or number information:
- For a Ten-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- mac-address*** (Optional) MAC address of a supplicant.

Defaults none

Command Modes

- EXEC
- EXEC privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you enable 802.1X multi-supplicant authentication on a port, additional 802.1X configuration details (Port Authentication status, Untagged VLAN ID, Authentication PAE state, and Backend state) are displayed for each supplicant, as shown in the following example.

Example

```

Dell#show dot1x interface tengigabitethernet 0/1

802.1x information on Te 0/1:
-----
Dot1x Status:          Enable
Port Control:         AUTO
Port Auth Status:     AUTHORIZED (MAC-AUTH-BYPASS)
Re-Authentication:    Disable
Untagged VLAN id:     400
Guest VLAN:           Enable
Guest VLAN id:        100
Auth-Fail VLAN:       Disable
Auth-Fail VLAN id:    NONE
Auth-Fail Max-Attempts: NONE

```

```
Mac-Auth-Bypass: Enable
Mac-Auth-Bypass Only: Enable
Tx Period: 3 seconds
Quiet Period: 60 seconds
ReAuth Max: 2
Supplicant Timeout: 30 seconds
Server Timeout: 30 seconds
Re-Auth Interval: 3600 seconds
Max-EAP-Req: 2
Host Mode: SINGLE_HOST
Auth PAE State: Authenticated
Backend State: Idle
Dell#
```

```
Dell#show dot1x interface tengigabitethernet 0/1 mac-address 00:00:00:00:00:10
Supplicant Mac: 0 0 0 0 0 10 Lookup for Mac:
```

```
802.1x information on Te 0/1:
```

```
-----
Dot1x Status: Enable
Port Control: AUTO
Re-Authentication: Disable
Guest VLAN: Enable
Guest VLAN id: 100
Auth-Fail VLAN: Disable
Auth-Fail VLAN id: NONE
Auth-Fail Max-Attempts: NONE
Mac-Auth-Bypass: Enable
Mac-Auth-Bypass Only: Enable
Tx Period: 3 seconds
Quiet Period: 60 seconds
ReAuth Max: 2
Supplicant Timeout: 30 seconds
Server Timeout: 30 seconds
Re-Auth Interval: 3600 seconds
Max-EAP-Req: 2
Host Mode: MULTI_AUTH
Max-Supplicants: 128
```

```
Port status and State info for Supplicant: 00:00:00:00:00:10
```

```
Port Auth Status: AUTHORIZED (MAC-AUTH-BYPASS)
Untagged VLAN id: 400
Auth PAE State: Authenticated
Backend State: Idle
Dell#
```

Access Control Lists (ACL)

Access control lists (ACLs) are supported by the Dell Networking Operating System (OS).

The Dell Networking OS supports the following types of ACL, IP prefix list, and route maps:

- [Commands Common to all ACL Types](#)
- [Common IP ACL Commands](#)
- [Standard IP ACL Commands](#)
- [Extended IP ACL Commands](#)
- [Common MAC Access List Commands](#)
- [Standard MAC ACL Commands](#)
- [Extended MAC ACL Commands](#)
- [IP Prefix List Commands](#)
- [Route Map Commands](#)

NOTE: For ACL commands that use the Trace function, refer to the [Secure DHCP Commands](#) section in the [Security](#) chapter.

Topics:

- [Commands Common to all ACL Types](#)
- [description](#)
- [remark](#)
- [resequence access-list](#)
- [resequence prefix-list ipv4](#)
- [show config](#)
- [Common IP ACL Commands](#)
- [access-class](#)
- [clear counters ip access-group](#)
- [ip access-group](#)
- [show ip access-lists](#)
- [show ip accounting access-list](#)
- [Standard IP ACL Commands](#)
- [ip access-list standard](#)
- [permit \(for Standard IP ACLs\)](#)
- [seq](#)
- [Extended IP ACL Commands](#)
- [deny \(for Extended IP ACLs\)](#)
- [deny icmp](#)
- [deny tcp](#)
- [deny udp](#)
- [ip access-list extended](#)
- [permit \(for Extended IP ACLs\)](#)
- [permit icmp](#)

- permit tcp
- permit udp
- seq
- Common MAC Access List Commands
- clear counters mac access-group
- mac access-group
- show mac access-lists
- show mac accounting access-list
- Standard MAC ACL Commands
- deny
- deny
- mac access-list extended
- permit
- seq
- Extended MAC ACL Commands
- mac access-list standard
- permit
- seq
- IP Prefix List Commands
- clear ip prefix-list
- deny
- ip prefix-list
- permit
- seq
- show config
- show ip prefix-list detail
- show ip prefix-list summary
- Route Map Commands
- continue
- description
- match interface
- match ip address
- match ip next-hop
- match ip route-source
- match metric
- match route-type
- match tag
- route-map
- set automatic-tag
- set metric
- set metric-type
- set tag
- show config
- show route-map
- deny (for Standard IP ACLs)
- deny
- seq

- deny tcp
- deny udp
- deny arp (for Extended MAC ACLs)
- deny icmp
- deny ether-type (for Extended MAC ACLs)
- deny
- deny
- permit (for Standard IP ACLs)
- permit
- permit ether-type (for Extended MAC ACLs)
- permit icmp
- permit udp
- permit (for Extended IP ACLs)
- permit
- seq
- permit tcp
- seq arp
- seq ether-type
- seq
- seq
- permit udp
- permit tcp
- permit icmp
- permit
- deny udp (for IPv6 ACLs)
- deny tcp (for IPv6 ACLs)
- deny icmp (for Extended IPv6 ACLs)
- deny (for IPv6 ACLs)

Commands Common to all ACL Types

The following commands are available within each ACL mode and do not have mode-specific options. Some commands in this chapter may use similar names, but require different options to support the different ACL types (for example, the `deny` command).

description

Configure a short text string describing the ACL.

Syntax `description text`

Parameters `text` Enter a text string up to 80 characters long.

Defaults Not enabled.

Command Modes

- CONFIGURATION-IP ACCESS-LIST-STANDARD
- CONFIGURATION-IP ACCESS-LIST-EXTENDED
- CONFIGURATION-MAC ACCESS LIST-STANDARD

- CONFIGURATION-MAC ACCESS LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

remark

Enter a description for an ACL entry.

Syntax `remark [remark-number] [description]`

Parameters

remark-number Enter the remark number. The range is from 0 to 4294967290.

NOTE: You can use the same sequence number for the remark and an ACL rule.

description Enter a description of up to 80 characters.

Defaults Not configured.

Command Modes

- CONFIGURATION-IP ACCESS-LIST-STANDARD
- CONFIGURATION-IP ACCESS-LIST-EXTENDED
- CONFIGURATION-MAC ACCESS LIST-STANDARD
- CONFIGURATION-MAC ACCESS LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `remark` command is available in each ACL mode. You can configure up to 4294967290 remarks in a given ACL.

The following example shows the use of the `remark` command twice within CONFIGURATION-STANDARD-ACCESS-LIST mode. The same sequence number was used for the remark and for an associated ACL rule. The remark precedes the rule in the running-config because it is assumed that the remark is for the rule with the same sequence number, or the group of rules that follow the remark.

Example

```
Dell(conf-std-nacl)#remark 10 Deny rest of the traffic
Dell(conf-std-nacl)#remark 5 Permit traffic from XYZ Inc.
Dell(conf-std-nacl)#show config
!
ip access-list standard test
remark 5 Permit traffic from XYZ Inc.
seq 5 permit 1.1.1.0/24
remark 10 Deny rest of the traffic
```

```
seq 10 Deny any
Del (conf-std-nacl) #
```

Related Commands [resequence access-list](#) — Re-assigns sequence numbers to entries of an existing access-list.

resequence access-list

Re-assign sequence numbers to entries of an existing access-list.

Syntax `resequence access-list {ipv4 | mac} {access-list-name StartingSeqNum Step-to-Increment}`

Parameters

ipv4 mac	Enter the keyword <code>ipv4</code> or <code>mac</code> to identify the access list type to resequence.
access-list-name	Enter the name of a configured IP access list.
StartingSeqNum	Enter the starting sequence number to resequence. The range is from 0 to 4294967290.
Step-to-Increment	Enter the step to increment the sequence number. The range is from 1 to 4294967290.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you have exhausted all the sequence numbers, this feature permits re-assigning a new sequence number to entries of an existing access-list.

Related Commands [resequence prefix-list ipv4](#) — resequences a prefix list.

resequence prefix-list ipv4

Re-assign sequence numbers to entries of an existing prefix list.

Syntax `resequence prefix-list ipv4 {prefix-list-name StartingSeqNum Step-to-increment}`

Parameters

prefix-list-name	Enter the name of the configured prefix list, up to 140 characters long.
StartingSeqNum	Enter the starting sequence number to resequence. The range is from 0 to 65535.
Step-to-Increment	Enter the step to increment the sequence number. The range is from 1 to 65535.

Defaults none

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you have exhausted all the sequence numbers, this feature permits re-assigning a new sequence number to entries of an existing prefix list.

Related Commands [seq](#) — Assigns a sequence number to a deny or permit filter in an IP access list while creating the filter.

show config

Display the current ACL configuration.

Syntax `show config`

Command Modes

- CONFIGURATION-IP ACCESS-LIST-STANDARD
- CONFIGURATION-IP ACCESS-LIST-EXTENDED
- CONFIGURATION-MAC ACCESS LIST-STANDARD
- CONFIGURATION-MAC ACCESS LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(config-std-nacl)#show conf
!
ip access-list standard test
remark 5 Permit traffic from XYZ Inc.
seq 5 permit 1.1.1.0/24 count
remark 10 Deny traffic from ABC
seq 10 deny 2.1.1.0/24 count
Dell(config-std-nacl)#
```

Common IP ACL Commands

The following commands are available within both IP ACL modes (Standard and Extended) and do not have mode-specific options. When an ACL is created without a rule and then is applied to an interface, ACL behavior reflects an implicit permit.

The switch supports both Ingress and Egress IP ACLs.

NOTE: Also refer to the [Commands Common to all ACL Types](#) section.

access-class

Apply a standard ACL to a terminal line.

Syntax `access-class access-list-name [ipv4 | ipv6]`

Parameters

access-list-name	Enter the name of a configured Standard ACL, up to 140 characters.
ipv4	Enter the keyword <code>ipv4</code> to configure an IPv4 access class.
ipv6	Enter the keyword <code>ipv6</code> to configure an IPv6 access class.

Defaults Not configured.

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Added the <code>ipv4</code> and <code>ipv6</code> parameters to the command.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you use the `access-class access-list-name` command without specifying the `ipv4` or `ipv6` attribute, both IPv4 as well as IPv6 rules that are defined in that ACL are applied to the terminal. This is a generic way of configuring access restrictions.

To be able to filter access exclusively using either IPv4 or IPv6 rules, you must use either the `ipv4` or `ipv6` attribute along with the `access-class access-list-name` command. Depending on the attribute that you specify (`ipv4` or `ipv6`), the ACL processes either IPv4 or IPv6 rules, but not both. Using this configuration, you can set up two different types of access classes with each class processing either IPv4 or IPv6 rules separately.

However, if you already have configured generic IP ACL on a terminal line, then you cannot further apply IPv4 or IPv6 specific filtering on top of this configuration. Because, both IPv4 and IPv6 access classes are already configured on this terminal line. Before applying either IPv4 or IPv6 filtering, you must first undo the generic configuration using the `no access-class access-list-name` command.

Similarly, if you have configured either IPv4 or IPv6 specific filtering on a terminal line, you cannot apply generic IP ACLs on top of this configuration. Before applying the generic ACL configuration, you must first undo the existing configuration using the `no access-class access-list-name [ipv4 | ipv6]` command.

clear counters ip access-group

Erase all counters maintained for access lists.

Syntax `clear counters ip access-group [access-list-name]`

Parameters

access-list-name	(OPTIONAL) Enter the name of a configured access-list, up to 140 characters.
-------------------------	--

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip access-group

Apply an egress IP ACL to an interface.

Syntax `ip access-group access-list-name {in | out} [implicit-permit] [vlan vlan-id] [layer3]`

Parameters

access-list-name	Enter the name of a configured access list, up to 140 characters.
in	Enter the keyword <code>in</code> to apply the ACL to incoming traffic.
out	Enter the keyword <code>out</code> to apply the ACL to the outgoing traffic.
implicit-permit	(OPTIONAL) Enter the keyword <code>implicit-permit</code> to change the default action of the ACL from implicit-deny to implicit-permit (that is, if the traffic does not match the filters in the ACL, the traffic is permitted instead of dropped).
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> then the ID numbers of the VLANs.
layer3	(OPTIONAL) Enter the keyword <code>layer3</code> to enable layer 3 mode. It ensures that all the ACL rules in the access-group are applied only for L3 router packets.

Defaults Not enabled..

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information You can assign one ACL (standard or extended ACL) to an interface..

 **NOTE:** This command is *not* supported on the FN IOMSwitch Loopback interfaces.

 **NOTE:** If outbound(egress) IP ACL is applied on switch port, filter will be applied only for routed traffic egressing out of that port.

Related Commands

[ip access-list standard](#) — configures a standard ACL.

[ip access-list extended](#) — configures an extended ACL.

show ip access-lists

Display all of the IP ACLs configured in the system, whether or not they are applied to an interface, and the count of matches/mismatches against each ACL entry displayed.

Syntax	<code>show ip access-lists [access-list-name] [interface interface] [in]</code>	
Parameters	access-list-name	Enter the name of a configured MAC ACL, up to 140 characters.
	interface interface	Enter the keyword <code>interface</code> then the one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
	in	Identify whether ACL is applied on the ingress or egress side.
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip access-lists test in
Standard Ingress IP access list test
seq 5 permit 1.1.1.0/24 count (0 packets)
seq 10 deny 2.1.1.0/24 count (0 packets)
```

show ip accounting access-list

Display the IP access-lists created on the switch and the sequence of filters.

Syntax	<code>show ip accounting {access-list access-list-name cam_count} interface interface</code>	
Parameters	access-list-name	Enter the name of the ACL to be displayed.
	cam_count	List the count of the CAM rules for this ACL.
	interface interface	Enter the keyword <code>interface</code> then the one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

show ip accounting access-lists Field	Description
“Extended IP...”	Displays the name of the IP ACL.
“seq 5...”	Displays the filter. If the keywords <code>count</code> or <code>byte</code> were configured in the filter, the number of packets or bytes the filter processes is displayed at the end of the line.
“order 4”	Displays the QoS order of priority for the ACL entry.

Example

```
Dell#show ip accounting access-list
!
Standard Ingress IP access list test on TenGigabitEthernet 0/1
Total cam count 2
seq 5 permit 1.1.1.0/24 count (0 packets)
seq 10 deny 2.1.1.0/24 count (0 packets)
```

Standard IP ACL Commands

When you create an ACL without any rule and then apply it to an interface, the ACL behavior reflects an implicit permit.

The switch supports both Ingress and Egress IP ACLs.

 **NOTE:** Also refer to the [Commands Common to all ACL Types](#) and [Common IP ACL Commands](#) sections.

ip access-list standard

Create a standard IP access list (IP ACL) to filter based on IP address.

Syntax `ip access-list standard access-list-name`

Parameters `access-list-name` Enter a string up to 140 characters long as the ACL name.

Defaults All IP access lists contain an implicit `deny any`, that is, if no match occurs, the packet is dropped.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The Dell operating system supports one ingress and one egress IP ACL per interface.

The number of entries allowed per ACL is hardware-dependent. For detailed specifications on entries allowed per ACL, refer to your line card documentation.

Example

```
Dell (conf) # ip access-list standard TestList
Dell (config-std-nacl) #
```

Related Commands

[ip access-list extended](#) — creates an extended access list.

[resequence access-list](#) — Displays the current configuration.

permit (for Standard IP ACLs)

To permit packets from a specific source IP address to leave the switch, configure a filter.

Syntax

```
permit {source [mask] | any | host ip-address} [no-drop] [count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {source [mask] | any | host ip-address}` command.

Parameters

source	Enter the IP address in dotted decimal format of the network from which the packet was sent.
mask	(OPTIONAL) Enter a network <code>mask</code> in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address or hostname.
no-drop	Enter the keywords <code>no-drop</code> to match only the forwarded packets.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
bytes	(OPTIONAL) Enter the keyword <code>bytes</code> to count bytes processed by the filter.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.

threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-STANDARD-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands [deny](#) — assigns a IP ACL filter to deny IP packets.

[ip access-list standard](#) — creates a standard ACL.

seq

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

Syntax `seq sequence-number {deny | permit} {source [mask] | any | host ip-address} [count [byte] [dscp value] [order] [fragments] [threshold-in-msgs [count]]`

Parameters	sequence-number	Enter a number from 0 to 4294967290. The range is from 0 to 65534.
	deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
	permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
	source	Enter an IP address in dotted decimal format of the network from which the packet was received.
	mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
	any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
	count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
	byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
	dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
	order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
	fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
	threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same order value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same order.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — configures a filter to drop packets.

`permit` — configures a filter to forward packets.

`seq` — assigns a sequence number to a deny or permit filter in an IP access list while creating the filter.

Extended IP ACL Commands

When an ACL is created without any rule and then applied to an interface, ACL behavior reflects an implicit permit.

The following commands configure extended IP ACLs, which in addition to the IP address, also examine the packet's protocol type.

The switch supports both Ingress and Egress IP ACLs.

NOTE: Also refer to the [Commands Common to all ACL Types](#) and [Common IP ACL Commands](#) sections.

deny (for Extended IP ACLs)

Configure a filter that drops IP packets meeting the filter criteria.

Syntax

```
deny {ip | ip-protocol-number} {source mask | any | host ip-address}
{destination mask | any | host ip-address} [count [byte]] [dscp value] [order]
[monitor] [fragments] [log [interval minutes] [threshold-in-msgs [count]]
[monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {ip | ip-protocol-number} {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes

CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny tcp` — assigns a filter to deny TCP packets.

`deny udp` — assigns a filter to deny UDP packets.

`ip access-list extended` — creates an extended ACL.

deny icmp

To drop all or specific internet control message protocol (ICMP) messages, configure a filter.

Syntax `deny icmp {source mask | any | host ip-address} {destination mask | any | host ip-address} [dscp] [count [byte]] [order] [fragments][threshold-in-msgs] [count]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command, if you know the filter's sequence number.
- Use the `no deny icmp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.

order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added the support for logging ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead of all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

deny tcp

Configure a filter that drops transmission control protocol (TCP) packets meeting the filter criteria.

Syntax

```
deny tcp {source mask | any | host ip-address} [bit] [operator port [port]]  
{destination mask | any | host ip-address} [dscp] [bit] [operator port [port]]  
[count [byte] [order] [fragments] [threshold-in-msgs [count]]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
bit	Enter a flag or combination of bits: <ul style="list-style-type: none">• <code>ack</code>: acknowledgement field• <code>fin</code>: finish (no more data from the user)• <code>psh</code>: push function• <code>rst</code>: reset the connection• <code>syn</code>: synchronize sequence numbers• <code>urg</code>: urgent field
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than• <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> command)
port port	Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none">• 23 = Telnet• 20 and 21 = FTP• 25 = SMTP

- 169 = SNMP

destination	Enter the IP address of the network or host to which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly.

The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes

CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either `count` (packets) or `count` (bytes). However, for an ACL with multiple rules, you can configure some ACLs with `count` (packets) and others as `count` (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```

Dell# Data Mask From To #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1

Total Ports: 4001

```

Example

An ACL rule with a TCP port 1023 uses only one entry in the CAM.

```

Dell# Data Mask From To #Covered
1 0000000000000000 1111110000000000 0 1023 1024

Total Ports: 1024

```

Related Commands

`deny` — assigns a filter to deny IP traffic.

`deny udp` — assigns a filter to deny UDP traffic.

deny udp

To drop user datagram protocol (UDP) packets meeting the filter criteria, configure a filter.

Syntax

```

deny udp {source mask | any | host ip-address} [operator port [port]]
{destination mask | any | host ip-address} [dscp] [operator port [port]] [count
[byte]] [order] [fragments] [threshold-in-msgs [count]]

```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny udp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source Enter the IP address of the network or host from which the packets were sent.

mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> command)
port port	Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535.
destination	Enter the IP address of the network or host to which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword then a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs are terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which the ACL logs are generated is five minutes.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either count (packets) or count (bytes). However, for an ACL with multiple rules, you can configure some ACLs with count (packets) and others as count (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt` or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```
Dell# Data Mask From To #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1

Total Ports: 4001
```

Example

An ACL rule with a TCP port `lt 1023` uses only one entry in the CAM.

```
Dell# Data Mask From To #Covered
1 0000000000000000 1111110000000000 0 1023 1024

Total Ports: 1024
```

Related Commands

`deny` — assigns a filter to deny IP traffic.

`deny tcp` — assigns a filter to deny TCP traffic.

ip access-list extended

Name (or select) an extended IP access list (IP ACL) based on IP addresses or protocols.

Syntax

```
ip access-list extended access-list-name
```

To delete an access list, use the `no ip access-list extended access-list-name` command.

Parameters	<i>access-list-name</i> Enter a string up to 140 characters long as the access list name.						
Defaults	All access lists contain an implicit <i>deny any</i> ; that is, if no match occurs, the packet is dropped.						
Command Modes	CONFIGURATION						
Supported Modes	Full-Switch						
Command History	<table border="0"> <thead> <tr> <th>Version</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	The number of entries allowed per ACL is hardware-dependent. For detailed specification on entries allowed per ACL, refer to your line card documentation.						
Example	<pre>Dell(conf)#ip access-list extended TESTListEXTEND Dell(config-ext-nacl)#</pre>						
Related Commands	<p>ip access-list standard — configures a standard IP access list.</p> <p>resequence access-list — Displays the current configuration.</p>						

permit (for Extended IP ACLs)

To pass IP packets meeting the filter criteria, configure a filter.

Syntax	<pre>permit {source mask any host ip-address} {destination mask any host ip- address} [count [bytes]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]]] [monitor]</pre> <p>To remove this filter, you have two choices:</p> <ul style="list-style-type: none"> • Use the <code>no seq sequence-number</code> command if you know the filter's sequence number. • Use the <code>no deny {source mask any host ip-address} {destination mask any host ip-address}</code> command.
---------------	---

Parameters	<p>source Enter the IP address in dotted decimal format of the network from which the packet was sent.</p> <p>mask (OPTIONAL) Enter a network <code>mask</code> in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.</p> <p>any Enter the keyword <code>any</code> to specify that all routes are subject to the filter.</p> <p>host ip-address Enter the keyword <code>host</code> then the IP address to specify a host IP address or hostname.</p> <p>count (OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.</p> <p>bytes (OPTIONAL) Enter the keyword <code>bytes</code> to count bytes processed by the filter.</p> <p>dscp (OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.</p> <p>order (OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order</p>
-------------------	--

numbers have a higher priority). If you do not use the keyword `order`, the ACLs have the lowest order by default (**255**).

fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands [ip access-list extended](#) — creates an extended ACL.

[permit tcp](#) — assigns a permit filter for TCP packets.

`permit udp` — assigns a permit filter for UDP packets.

permit icmp

Configure a filter to allow all or specific ICMP messages.

Syntax `permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address} [dscp] [message-type] [count [byte]] [order] [fragments] [threshold-in-msgs [count]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or noncontiguous.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is 0 to 63.
message-type	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. The range is 0 to 255 for ICMP type and 0 to 255 for ICMP code.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

permit tcp

To pass TCP packets meeting the filter criteria, configure a filter.

Syntax

```
permit tcp {source mask | any | host ip-address} [bit] [operator port [port]]  
{destination mask | any | host ip-address} [bit] [dscp] [operator port [port]]  
[count [byte]] [order] [fragments][log [interval minutes] [threshold-in-msgs  
[count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.

host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
bit	Enter a flag or combination of bits: <ul style="list-style-type: none"> • <code>ack</code>: acknowledgement field • <code>fin</code>: finish (no more data from the user) • <code>push</code>: push function • <code>rst</code>: reset the connection • <code>syn</code>: synchronize sequence numbers • <code>urg</code>: urgent field
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the port parameter)
port port	Enter the application layer port number. Enter two port numbers if you are using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
destination	Enter the IP address of the network or host to which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.

monitor (OPTIONAL) Enter the keyword `monitor` when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Networking OS Configuration Guide*.

The switch cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```
Dell# Data          Mask          From To  #Covered
1 0000111110100000 111111111100000 4000 4031 32
2 0000111111000000 111111111100000 4032 4095 64
```

```

3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1

Total Ports: 4001

```

Example

An ACL rule with a TCP port lt 1023 uses only one entry in the CAM.

```

Dell# Data          Mask          From To    #Covered
1 0000000000000000 1111110000000000 0    1023 1024

Total Ports: 1024

```

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit udp](#) — assigns a permit filter for UDP packets.

permit udp

To pass UDP packets meeting the filter criteria, configure a filter.

Syntax

```

permit udp {source mask | any | host ip-address} [operator port [port]]
{destination mask | any | host ip-address} [dscp] [operator port [port]] [count
[byte]] [order] [fragments] [threshold-in-msgs [count]]

```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit udp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> parameter)

port port	Enter the application layer port number. Enter two port numbers if you are using the <code>range</code> logical operand. The range is 0 to 65535.
destination	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Operating System Configuration Guide*.

You can configure either `count` (packets) or `count` (bytes). However, for an ACL with multiple rules, you can configure some ACLs with `count` (packets) and others as `count` (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both

the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```

Dell# Data          Mask          From To  #Covered
1 0000111110100000 111111111100000 4000 4031 32
2 0000111110000000 111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 111111111111111 8000 8000 1

Total Ports: 4001

```

Example

An ACL rule with a TCP port lt 1023 uses only one entry in the CAM.

```

Dell# Data          Mask          From To  #Covered
1 0000000000000000 1111110000000000 0    1023 1024

Total Ports: 1024

```

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit tcp](#) — assigns a permit filter for TCP packets.

seq

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

Syntax

```

seq sequence-number {deny | permit} {ip-protocol-number | icmp | ip | tcp |
udp} {source mask | any | host ip-address} {destination mask | any | host ip-
address} [operator port [port]] [count [byte]] [dscp value] [order] [fragments]
[log [interval minutes] [threshold-in-msgs [count]] [monitor]

```

Parameters

- sequence-number*** Enter a number from 0 to 4294967290. The range is from 1 to 65534.
- deny** Enter the keyword `deny` to configure a filter to drop packets meeting this condition.
- permit** Enter the keyword `permit` to configure a filter to forward packets meeting this criteria.
- ip-protocol-number*** Enter a number from 0 to 255 to filter based on the protocol identified in the IP protocol header.
- icmp** Enter the keyword `icmp` to configure an ICMP access list filter.
- ip** Enter the keyword `ip` to configure a generic IP access list. The keyword `ip` specifies that the access list permits all IP protocols.

tcp	Enter the keyword <code>tcp</code> to configure a TCP access list filter.
udp	Enter the keyword <code>udp</code> to configure a UDP access list filter.
source	Enter an IP address in dotted decimal format of the network from which the packet was received.
mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address or hostname.
operator	(OPTIONAL) Enter one of the following logical operands: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> parameter.)
port port	(OPTIONAL) Enter the application layer port number. Enter two port numbers if you are using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
destination	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which the ACL logs must be generated. The interval range is from 1 to 10 minutes.

monitor (OPTIONAL) Enter the keyword `monitor` when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which the ACL logs are generated is five minutes. By default, the flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for the flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same order value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same order.

If you configure the `sequence-number`, the `sequence-number` is used as a tie breaker for rules with the same order.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — Configures a filter to drop packets.

`permit` — Configures a filter to forward packets.

Common MAC Access List Commands

The following commands are available within both MAC ACL modes (Standard and Extended) and do not have mode-specific options. These commands allow you to clear, display, and assign MAC ACL configurations. The MAC ACL can be applied on Physical, Port-channel and VLAN interfaces. As per the stipulated rules in the ACL, the traffic on the Interface/VLAN members or Port-channel members will be permitted or denied.

The switch supports both Ingress and Egress MAC ACLs.

clear counters mac access-group

Clear counters for all or a specific MAC ACL.

Syntax	<code>clear counters mac access-group [mac-list-name]</code>	
Parameters	<i>mac-list-name</i>	(OPTIONAL) Enter the name of a configured MAC access list.
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

mac access-group

Apply a MAC ACL to traffic entering or exiting an interface. Enter into the Interface mode and apply the MAC ACL in the following manner.

Syntax `mac access-group access-list-name {in [vlan vlan-range] | out}`
To delete a MAC access-group, use the `no mac access-group mac-list-name` command.

Parameters	<i>access-list-name</i>	Enter the name of a configured MAC access list, up to 140 characters.
	<i>vlan vlan-range</i>	(OPTIONAL) Enter the keyword <code>vlan</code> and then enter a range of VLANs. The range is from 1 to 4094 (you can use IDs 1 to 4094).
		 NOTE: This option is available only with the keyword <code>in</code> option.
	<i>in</i>	Enter the keyword <code>in</code> to configure the ACL to filter incoming traffic.
	<i>out</i>	Enter the keyword <code>out</code> to configure the ACL to filter outgoing traffic.
Defaults	none	
Command Modes	INTERFACE	

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can assign one ACL (standard or extended) to an interface.

In case of applying a MAC ACL to traffic entering or exiting a VLAN interface. Enter the VLAN interface mode and apply the `mac acl` in the following manner.

```
mac access-group access-list-name {in | out}
```

- 1 If the MAC ACL is applied on VLAN, none of the VLAN members should have an access list applied for that VLAN.
- 2 If the MAC ACL is applied on a Physical or Port Channel interface, the VLAN in which this port is associated should not have an access list applied.
- 3 If the MAC ACL is applied on a VLAN, then that VLAN should not belong to VLAN ACL group.
- 4 If the MAC ACL is applied on a VLAN ACL group, then none of the VLANs in that group should have an access list applied on it.

Related Commands

[mac access-list standard](#) — configures a standard MAC ACL.

[mac access-list extended](#) — configures an extended MAC ACL.

show mac access-lists

Display all of the Layer 2 ACLs configured in the system, whether or not they are applied to an interface, and the count of matches/mismatches against each ACL entry displayed.

Syntax

```
show mac access-lists [access-list-name] [interface interface] [in | out]
```

Parameters

<i>access-list-name</i>	Enter the name of a configured MAC ACL, up to 140 characters.
<i>interface interface</i>	Enter the keyword <code>interface</code> then the one of the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Port Channel interface, enter the keywords <code>port-channel</code> and then enter a number. The range is from 1 to 128.• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> and then enter the slot/port information.• For a VLAN interface enter the keyword <code>VLAN</code> and then the <i>vlan id</i>.
<i>in out</i>	Identify whether ACL is applied on ingress or egress side.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show mac accounting access-list

Display MAC access list configurations and counters (if configured).

Syntax	<code>show mac accounting access-list <i>access-list-name</i> interface <i>interface</i> in out</code>	
Parameters	<i>access-list-name</i>	Enter the name of a configured MAC ACL, up to 140 characters.
	<i>interface interface</i>	Enter the keyword <code>interface</code> then the one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> and then enter a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> and then enter the slot/port information. For a VLAN interface enter the keyword <code>VLAN</code> and then the <i>vlan id</i>
	<i>in out</i>	Identify whether ACL is applied on ingress or egress side.
Command Modes	<ul style="list-style-type: none"> EXEC EXEC Privilege 	

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The ACL hit counters in this command increment the counters for each matching rule, not just the first matching rule.

Example

```
Dell#show mac accounting access-list TestMac interface tengigabitethernet 0/1
in
Ingress Standard mac access-list TestMac on TenGigabitEthernet 0/1
Total cam count 2
seq 5 permit aa:aa:aa:aa:00:00 00:00:00:00:ff:ff count (0 packets)
seq 10 deny any count (20072594 packets)
Dell#
```

Standard MAC ACL Commands

When you create an access control list without any rule and then apply it to an interface, the ACL behavior reflects implicit permit. These commands configure standard MAC ACLs.

The switch supports both Ingress and Egress MAC ACLs.

NOTE: For more information, also refer to the [Commands Common to all ACL Types](#) and [Common MAC Access List Commands](#) sections.

deny

To drop packets that match the filter criteria, configure a filter.

Syntax `deny {any | host mac-address | mac-source-address mac-source-address-mask} {any | host mac-address | mac-destination-address mac-destination-address-mask} [ethertype-operator] [count [byte]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {any | host mac-address | mac-source-address mac-source-address-mask} {any | host mac-address | mac-destination-address mac-destination-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to drop all packets.
host <i>mac-address</i>	Enter the keyword <code>host</code> and then enter a MAC address to drop packets with that host address.
<i>mac-source-address</i>	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
<i>mac-source-address-mask</i>	Specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
<i>mac-destination-address</i>	Enter the destination MAC address and mask in <code>nn:nn:nn:nn:nn:nn</code> format.
<i>mac-destination-address-mask</i>	Specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
<i>ethertype operator</i>	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none">• <code>ev2</code> - is the Ethernet II frame format• <code>11c</code> - is the IEEE 802.3 frame format• <code>snap</code> - is the IEEE 802.3 SNAP frame format
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

[permit](#) — configures a MAC address filter to pass packets.

[seq](#) — configures a MAC address filter with a specified sequence number.

deny

To drop packets with a the MAC address specified, configure a filter.

Syntax

```
deny {any | mac-source-address [mac-source-address-mask]} [count [byte]] [log  
[interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {any | mac-source-address mac-source-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
mac-source-address	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of <code>00:00:00:00:00:00</code> is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated. with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes

CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`permit` — configures a MAC address filter to pass packets.

`seq` — configures a MAC address filter with a specified sequence number.

mac access-list extended

Name a new or existing extended MAC access control list (extended MAC ACL).

Syntax `mac access-list extended access-list-name [cpu-qos]`

Parameters

<i>access-list-name</i>	Enter a text string as the MAC access list name, up to 140 characters.
<i>cpu-qos</i>	Enter the keyword <code>cpu-qos</code> to assign this ACL to control plane traffic only (CoPP).

Defaults None

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The number of entries allowed per ACL is hardware-dependent. For detailed specifications on entries allowed per ACL, refer to your line card documentation.

Example

```
Dell(conf)#mac-access-list access-list extended TestMATExt
Dell(config-ext-macl)#remark 5 IPv4
Dell(config-ext-macl)#seq 10 permit any any ev2 eq 800 count bytes
Dell(config-ext-macl)#remark 15 ARP
Dell(config-ext-macl)#seq 20 permit any any ev2 eq 806 count bytes
Dell(config-ext-macl)#remark 25 IPv6
Dell(config-ext-macl)#seq 30 permit any any ev2 eq 86dd count bytes
Dell(config-ext-macl)#seq 40 permit any any count bytes
Dell(config-ext-macl)#exit
Dell(conf)#do show mac accounting access-list snickers interface g0/47 in
Extended mac access-list snickers on TenGigabitEthernet 0/12
seq 10 permit any any ev2 eq 800 count bytes (559851886 packets
191402152148bytes)seq 20 permit any any ev2 eq 806 count bytes
(74481486 packets 5031686754bytes)seq 30 permit any any ev2 eq 86dd count
bytes (7751519 packets 797843521 bytes)
```

Related Commands [mac access-list standard](#) — configures a standard MAC access list.

[show mac accounting access-list](#) — displays MAC access list configurations and counters (if configured).

permit

To forward packets from a specific source MAC address, configure a filter.

Syntax

```
permit {any | mac-source-address [mac-source-address-mask]} [count [byte]] |
log [interval minutes] [threshold-in-msgs[count] [monitor]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {any | mac-source-address mac-source-address-mask}` command.

Parameters	
any	Enter the keyword <code>any</code> to forward all packets received with a MAC address.
mac-source-address	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of <code>00:00:00:00:00:00</code> is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.

monitor (OPTIONAL) Enter the keyword `monitor` when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When the configured maximum threshold is exceeded, generation of logs are stopped.

When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, Pv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands [deny](#) — configures a MAC ACL filter to drop packets.

[seq](#) —configure a MAC ACL filter with a specified sequence number.

seq

To a deny or permit filter in a MAC access list while creating the filter, assign a sequence number.

Syntax `seq sequence-number {deny | permit} {any | mac-source-address [mac-source-address-mask]} [count [byte]] [log [interval minutes] [threshold-in-msgs [count]] [monitor]`

To remove this filter, use the `no seq sequence-number` command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 65535.
<i>deny</i>	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
<i>permit</i>	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
<i>any</i>	Enter the keyword <code>any</code> to filter all packets.
<i>mac-source-address</i>	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
<i>mac-source-address-mask</i>	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of <code>00:00:00:00:00:00</code> is applied (in other words, the filter allows only MAC addresses that match).
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
<i>threshold-in msgs count</i>	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
<i>interval minutes</i>	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes..
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes

CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — configures a filter to drop packets.
`permit` — configures a filter to forward packets.

Extended MAC ACL Commands

When an access-list is created without any rule and then applied to an interface, ACL behavior reflects implicit permit. The following commands configure Extended MAC ACLs.

The Switch supports both Ingress and Egress MAC ACLs.

mac access-list standard

To configure a standard MAC ACL, name a new or existing MAC access control list (MAC ACL) and enter MAC ACCESS LIST mode.

Syntax `mac access-list standard mac-list-name`

Parameters `mac-list-name` Enter a text string as the name of the standard MAC access list (140 character maximum).

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The Dell operating system supports one ingress and one egress MAC ACL per interface.

The number of entries allowed per ACL is hardware-dependent. For detailed specification about entries allowed per ACL, refer to your switch documentation.

The switch supports both ingress and egress ACLs.

Example

```
Dell(conf)#mac-access-list access-list standard TestMAC
Dell(config-std-macl)#permit 00:00:00:00:00:00 00:00:00:00:ff:ff count
Dell(config-std-macl)#deny any count
```

permit

To pass packets matching the criteria specified, configure a filter.

Syntax `permit {any | host mac-address | mac-source-address mac-source-address-mask | mac-destination-address mac-destination-address-mask} [ethertype operator] [count [byte]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {any | host mac-address | mac-source-address mac-source-address-mask | mac-destination-address mac-destination-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to forward all packets.
host	Enter the keyword <code>host</code> then a MAC address to forward packets with that host address.
mac-source-address	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
mac-destination-address	Enter the destination MAC address and mask in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-destination-address-mask	Specify which bits in the MAC address must be matched. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
ether type operator	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none">• <code>ev2</code> - is the Ethernet II frame format• <code>11c</code> - is the IEEE 802.3 frame format• <code>snap</code> - is the IEEE 802.3 SNAP frame format
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

`deny` — configures a MAC ACL filter to drop packets.

`seq` — configure a MAC ACL filter with a specified sequence number.

seq

Configure a filter with a specific sequence number.

Syntax

```
seq sequence-number {deny | permit} {any | host mac-address | mac-source-address mac-source-address-mask} {any | host mac-address | mac-destination-address mac-destination-address-mask} [ethertype operator] [count [byte]]
```

Parameters

sequence-number	Enter a number as the filter sequence number. The range is from zero (0) to 65535.
deny	Enter the keyword <code>deny</code> to drop any traffic matching this filter.
permit	Enter the keyword <code>permit</code> to forward any traffic matching this filter.
any	Enter the keyword <code>any</code> to filter all packets.
host mac-address	Enter the keyword <code>host</code> and then enter a MAC address to filter packets with that host address.
mac-source-address	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
mac-source-address-mask	Specify which bits in the MAC address must be matched.
mac-destination-address	Enter the destination MAC address and mask in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-destination-address-mask	Specify which bits in the MAC address must be matched. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00:00</code> only allows entries that match exactly.
ethertype operator	(OPTIONAL) To filter based on protocol type, enter one of the following Ethertypes: <ul style="list-style-type: none"> • <code>ev2</code> - is the Ethernet II frame format. • <code>11c</code> - is the IEEE 802.3 frame format. • <code>snap</code> - is the IEEE 802.3 SNAP frame format.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [deny](#) — configures a filter to drop packets.

[permit](#) — configures a filter to forward packets.

IP Prefix List Commands

When you create an access-list without any rule and then apply it to an interface, the ACL behavior reflects implicit permit. To configure or enable IP prefix lists, use these commands.

clear ip prefix-list

Reset the number of times traffic meets the conditions (“hit” counters) of the configured prefix lists.

Syntax `clear ip prefix-list [prefix-name]`

Parameters

<i>prefix-name</i>	(OPTIONAL) Enter the name of the configured prefix list to clear only counters for that prefix list, up to 140 characters long.
--------------------	---

Defaults Clears “hit” counters for all prefix lists unless a prefix list is specified.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip prefix-list](#) — configures a prefix list.

deny

To drop packets meeting the criteria specified, configure a filter.

Syntax `deny ip-prefix [ge min-prefix-length] [le max-prefix-length]`

Parameters

<i>ip-prefix</i>	Specify an IP prefix in the network/length format. For example, 35.0.0.0/ 8 means match the first 8 bits of address 35.0.0.0.
<i>ge min-prefix-length</i>	(OPTIONAL) Enter the keyword <i>ge</i> and then enter the minimum prefix length, which is a number from zero (0) to 32.

le *max-prefix-length* (OPTIONAL) Enter the keyword `le` and then enter the maximum prefix length, which is a number from zero (0) to 32.

Defaults Not configured.

Command Modes PREFIX-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Sequence numbers for this filter are automatically assigned starting at sequence number 5.
If you do not use the `ge` or `le` options, only packets with an exact match to the prefix are filtered.

Related Commands [permit](#) — configures a filter to pass packets.
[seq](#) — configures a drop or permit filter with a specified sequence number.

ip prefix-list

Enter the PREFIX-LIST mode and configure a prefix list.

Syntax `ip prefix-list prefix-name`

Parameters ***prefix-name*** Enter a string up to 16 characters long as the name of the prefix list, up to 140 characters long.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Prefix lists redistribute OSPF and RIP routes meeting specific criteria.

Related Commands [show ip route list](#) — displays IP routes in an IP prefix list.
[show ip prefix-list summary](#) — displays a summary of the configured prefix lists.

permit

Configure a filter that passes packets meeting the criteria specified.

Syntax `permit ip-prefix [ge min-prefix-length] [le max-prefix-length]`

Parameters	<i>ip-prefix</i>	Specify an IP prefix in the network/length format. For example, 35.0.0.0/8 means match the first 8 bits of address 35.0.0.0.
	<i>ge min-prefix-length</i>	(OPTIONAL) Enter the keyword <code>ge</code> and then enter the minimum prefix length, which is a number from zero (0) to 32.
	<i>le max-prefix-length</i>	(OPTIONAL) Enter the keyword <code>le</code> and then enter the maximum prefix length, which is a number from zero (0) to 32.
Command Modes	PREFIX-LIST	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Sequence numbers for this filter are automatically assigned starting at sequence number 5.	
	If you do not use the <code>ge</code> or <code>le</code> options, only packets with an exact match to the prefix are filtered.	
Related Commands	deny — configures a filter to drop packets.	
	seq — configures a drop or permit filter with a specified sequence number.	

seq

To a deny or permit filter in a prefix list while configuring the filter, assign a sequence number.

Syntax `seq sequence-number {deny | permit} {any} | [ip-prefix /nn {ge min-prefix-length} {le max-prefix-length}] | [bitmask number]`

Parameters	<i>sequence-number</i>	Enter a number. The range is from 1 to 4294967294.
	<i>deny</i>	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition..
	<i>permit</i>	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this condition.
	<i>any</i>	(OPTIONAL) Enter the keyword <code>any</code> to match any packets.
	<i>ip-prefix /nn</i>	(OPTIONAL) Specify an IP prefix in the network/length format. For example, 35.0.0.0/8 means match the first 8 bits of address 35.0.0.0.
	<i>ge min-prefix-length</i>	(OPTIONAL) Enter the keyword <code>ge</code> and then enter the minimum prefix length, which is a number from zero (0) to 32.
	<i>le max-prefix-length</i>	(OPTIONAL) Enter the keyword <code>le</code> and then enter the maximum prefix length, which is a number from zero (0) to 32.
	<i>bitmask number</i>	Enter the keyword <code>bitmask</code> then enter a bit mask number in dotted decimal format.

Defaults Not configured.

Command Modes PREFIX-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you do not use the `ge` or `le` options, only packets with an exact match to the prefix are filtered.

Related Commands `deny` — configures a filter to drop packets.
`permit` — configures a filter to pass packets.

show config

Display the current PREFIX-LIST configurations.

Syntax `show config`

Command Modes PREFIX-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-nprefixl)#show config
!
ip prefix-list snickers
Dell (conf-nprefixl)#
```

show ip prefix-list detail

Display details of the configured prefix lists.

Syntax `show ip prefix-list detail [prefix-name]`

Parameters

prefix-name (OPTIONAL) Enter a text string as the name of the prefix list, up to 140 characters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip prefix-list detail
Ip Prefix-list with the last deletion/insertion: PL_OSPF_to_RIP
ip prefix-list PL_OSPF_to_RIP:
count: 3, range entries: 1, sequences: 5 - 25
  seq 5 permit 1.1.1.0/24 (hit count: 0)
  seq 10 deny 2.1.0.0/16 ge 23 (hit count: 0)
  seq 25 permit 192.0.0.0 bitmask 192.0.0.0 (hit count: 800)
```

show ip prefix-list summary

Display a summary of the configured prefix lists.

Syntax `show ip prefix-list summary [prefix-name]`

Parameters *prefix-name* (OPTIONAL) Enter a text string as the name of the prefix list, up to 140 characters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip prefix-list summary
Ip Prefix-list with the last deletion/insertion: PL_OSPF_to_RIP
ip prefix-list PL_OSPF_to_RIP:
count: 3, range entries: 1, sequences: 5 - 25
```

Route Map Commands

When you create an access-list without any rule and then applied to an interface, the ACL behavior reflects implicit permit.

To configure route maps and their redistribution criteria, use the following commands.

continue

To a route-map entry with a higher sequence number, configure a route-map.

Syntax `continue [sequence-number]`

Parameters *sequence-number* (OPTIONAL) Enter the route map sequence number. The range is from 1 to 65535. The default is: no sequence number

Defaults	Not configured
Command Modes	ROUTE-MAP
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `continue` feature allows movement from one route-map entry to a specific route-map entry (the sequence number). If you do not specify the sequence number, the `continue` feature simply moves to the next sequence number (also known as an implied continue). If a match clause exists, the `continue` feature executes only after a successful match occurs. If there are no successful matches, the `continue` feature is ignored.

Match clause with Continue clause

The `continue` feature can exist without a match clause. A continue clause without a match clause executes and jumps to the specified route-map entry.

With a match clause and a continue clause, the match clause executes first and the continue clause next in a specified route map entry. The continue clause launches only after a successful match. The behavior is:

- A successful match with a continue clause, the route map executes the set clauses and then goes to the specified route map entry upon execution of the continue clause.
- If the next route map entry contains a continue clause, the route map executes the continue clause if a successful match occurs.
- If the next route map entry does not contain a continue clause, the route map evaluates normally. If a match does not occur, the route map does not continue and falls through to the next sequence number, if one exists.

Set Clause with Continue Clause

If the route-map entry contains sets with the continue clause, set actions are performed first then the continue clause jumps to the specified route map entry.

- If a set action occurs in the first route map entry and then the same set action occurs with a different value in a subsequent route map entry, the last set of actions overrides the previous set of actions with the same `set` command.
- If `set community additive` and `set as-path prepend` are configure, the communities and AS numbers are prepended.

Related Commands [set metric](#) — Specifies a COMMUNITY attribute
[set automatic-tag](#) — Configures a filter to modify the AS path

description

Add a description to this route map.

Syntax `description description`

Parameters `description` Enter a description to identify the route map (80 characters maximum).

Defaults none

Command Modes ROUTE-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [route-map](#) — Enables a route map.

match interface

To match routes whose next hop is on the interface specified, configure a filter.

Syntax

```
match interface interface
```

To remove a match, use the `no match interface interface` command.

Parameters

interface

Enter the following keywords and slot/port or number information:

- For the Loopback interface, enter the keyword `loopback` then a number from zero (0) to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a Ten Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults

Not configured.

Command Modes ROUTE-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.0	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [match ip address](#) — redistributes routes that match an IP address.

[match ip next-hop](#) — redistributes routes that match the next-hop IP address.

[match ip route-source](#) — redistributes routes that match routes advertised by other routers.

[match metric](#) — redistributes routes that match a specific metric.

[match route-type](#) — redistributes routes that match a route type.

[match tag](#) — redistributes routes that match a specific tag.

match ip address

To match routes based on IP addresses specified in an access list, configure a filter.

Syntax	<code>match ip address <i>prefix-list-name</i></code>	
Parameters	<i>prefix-list-name</i>	Enter the name of configured prefix list, up to 140 characters.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

- Related Commands**
- [match interface](#) — redistributes routes that match the next-hop interface.
 - [match ip next-hop](#) — redistributes routes that match the next-hop IP address.
 - [match ip route-source](#) — redistributes routes that match routes advertised by other routers.
 - [match metric](#) — redistributes routes that match a specific metric.
 - [match route-type](#) — redistributes routes that match a route type.
 - [match tag](#) — redistributes routes that match a specific tag.

match ip next-hop

To match based on the next-hop IP addresses specified in an IP access list or IP prefix list, configure a filter.

Syntax	<code>match ip next-hop {access-list prefix-list <i>prefix-list-name</i>}</code>	
Parameters	<i>access-list-name</i>	Enter the name of a configured IP access list, up to 140 characters.
	<i>prefix-list prefix-list-name</i>	Enter the keywords <code>prefix-list</code> and then enter the name of configured prefix list, up to 140 characters.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [match interface](#) — redistributes routes that match the next-hop interface.
- [match ip address](#) — redistributes routes that match an IP address.
- [match ip route-source](#) — redistributes routes that match routes advertised by other routers.
- [match metric](#) — redistributes routes that match a specific metric.
- [match route-type](#) — redistributes routes that match a route type.
- [match tag](#) — redistributes routes that match a specific tag.

match ip route-source

To match based on the routes advertised by routes specified in IP access lists or IP prefix lists, configure a filter.

Syntax `match ip route-source {access-list | prefix-list prefix-list-name}`

Parameters

<i>access-list-name</i>	Enter the name of a configured IP access list, up to 140 characters.
<i>prefix-list prefix-list-name</i>	Enter the keywords <code>prefix-list</code> and then enter the name of configured prefix list, up to 140 characters.

Defaults Not configured.

Command Modes ROUTE-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [match interface](#) — redistributes routes that match the next-hop interface.
- [match ip address](#) — redistributes routes that match an IP address.
- [match ip next-hop](#) — redistributes routes that match the next-hop IP address.
- [match metric](#) — redistributes routes that match a specific metric.
- [match route-type](#) — redistributes routes that match a route type.
- [match tag](#) — redistributes routes that match a specific tag.

match metric

To match on a specified value, configure a filter.

Syntax `match metric metric-value`

Parameters	<i>metric-value</i>	Enter a value to match. The range is from zero (0) to 4294967295.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	match interface — redistributes routes that match the next-hop interface. match ip address — redistributes routes that match an IP address. match ip next-hop — redistributes routes that match the next-hop IP address. match ip route-source — redistributes routes that match routes advertised by other routers. match route-type — redistributes routes that match a route type. match tag — redistributes routes that match a specific tag.	

match route-type

To match routes based on the how the route is defined, configure a filter.

Syntax	<code>match route-type {external [type-1 type-2] internal local}</code>	
Parameters	external [type-1 type-2]	Enter the keyword <code>external</code> then either <code>type-1</code> or <code>type-2</code> to match only on OSPF Type 1 routes or OSPF Type 2 routes.
	internal	Enter the keyword <code>internal</code> to match only on routes generated within OSPF areas.
	local	Enter the keyword <code>local</code> to match only on routes generated within the switch.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	match interface — redistributes routes that match the next-hop interface. match ip address — redistributes routes that match an IP address. match ip next-hop — redistributes routes that match the next-hop IP address.	

[match ip route-source](#) — redistributes routes that match routes advertised by other routers.

[match metric](#) — redistributes routes that match a specific metric.

[match tag](#) — redistributes routes that match a specific tag.

match tag

To redistribute only routes that match a specified tag value, configure a filter.

Syntax	<code>match tag tag-value</code>	
Parameters	tag-value	Enter a value as the tag on which to match. The range is from zero (0) to 4294967295.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands	match interface — redistributes routes that match the next-hop interface.
	match ip address — redistributes routes that match an IP address.
	match ip next-hop — redistributes routes that match the next-hop IP address.
	match ip route-source — redistributes routes that match routes advertised by other routers.
	match metric — redistributes routes that match a specific metric.
	match route-type — redistributes routes that match a route type.

route-map

Enable a route map statement and configure its action and sequence number. This command also places you in ROUTE-MAP mode.

Syntax	<code>route-map map-name [permit deny] [sequence-number]</code>	
Parameters	map-name	Enter a text string of up to 140 characters to name the route map for easy identification.
	permit	(OPTIONAL) Enter the keyword <code>permit</code> to set the route map default as permit. If you do not specify a keyword, the default is <code>permit</code> .
	deny	(OPTIONAL) Enter the keyword <code>deny</code> to set the route map default as deny.
	sequence-number	(OPTIONAL) Enter a number to identify the route map for editing and sequencing with other route maps. You are prompted for a sequence number if there are multiple instances of the route map. The range is from 1 to 65535.

Defaults	Not configured. If you do not define a keyword (<code>permit</code> or <code>deny</code>) for the route map, the <code>permit</code> action is the default.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module
Usage Information	Use caution when you delete route maps because if you do not specify a sequence number, all route maps with the same <code>map-name</code> are deleted when you use the <code>no route-map map-name</code> command.	
Example	<pre>Dell(conf)#route-map dempsey Dell(config-route-map)#</pre>	
Related Commands	show config2 — displays the current configuration.	

set automatic-tag

To automatically compute the tag value of the route, configure a filter.

Syntax `set automatic-tag`
To return to the default, use the `no set automatic-tag` command.

Defaults Not configured.

Command Modes ROUTE-MAP

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [set metric](#) — specify the metric value assigned to redistributed routes.

[set metric-type](#) — specify the metric type assigned to redistributed routes.

[set tag](#) — specify the tag assigned to redistributed routes.

set metric

To assign a new metric to redistributed routes, configure a filter.

Syntax `set metric [+ | -] metric-value`
To delete a setting, use the `no set metric` command.

Parameters	+	(OPTIONAL) Enter + to add a metric-value to the redistributed routes.
	-	(OPTIONAL) Enter - to subtract a metric-value from the redistributed routes.
	<i>metric-value</i>	Enter a number as the new metric value. The range is from zero (0) to 4294967295.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	set automatic-tag — computes the tag value of the route.	
	set metric-type — specifies the route type assigned to redistributed routes.	
	set tag — specifies the tag assigned to redistributed routes.	

set metric-type

To assign a new route type for routes redistributed to OSPF, configure a filter.

Syntax	<code>set metric-type {internal external type-1 type-2}</code>	
Parameters	internal	Enter the keyword <code>internal</code> to assign the Interior Gateway Protocol metric of the next hop as the route's BGP MULTI_EXIT_DES (MED) value.
	external	Enter the keyword <code>external</code> to assign the IS-IS external metric.
	type-1	Enter the keyword <code>type-1</code> to assign the OSPF Type 1 metric.
	type-2	Enter the keyword <code>type-2</code> to assign the OSPF Type 2 metric.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	set automatic-tag — computes the tag value of the route.	
	set metric — specifies the metric value assigned to redistributed routes.	
	set tag — specifies the tag assigned to redistributed routes.	

set tag

To specify a tag for redistributed routes, configure a filter.

Syntax	<code>set tag tag-value</code>	
Parameters	tag-value	Enter a number as the tag. The range is from zero (0) to 4294967295.
Defaults	Not configured.	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	set automatic-tag — computes the tag value of the route.	
	set metric — specifies the metric value assigned to redistributed routes.	
	set metric-type — specifies the route type assigned to redistributed routes.	

show config

Display the current route map configuration.

Syntax	<code>show config</code>	
Command Modes	ROUTE-MAP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on MXL 10/40GbE Switch IO Module

Example

```
Dell(config-route-map)#show config
!
route-map hopper permit 10
Dell(config-route-map)#
```

show route-map

Display the current route map configurations.

Syntax	<code>show route-map [map-name]</code>
---------------	--

Parameters *map-name* (OPTIONAL) Enter the name of a configured route map, up to 140 characters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show route-map
route-map firpo, permit, sequence 10
  Match clauses:
  Set clauses:
    tag 34
Dell#
```

Related Commands [route-map](#) — configures a route map.

deny (for Standard IP ACLs)

To drop packets with a certain IP address, configure a filter.

Syntax `deny {source | any | host {ip-address}}[count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {source [mask] | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-STANDARD-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands [ip access-list standard](#) — configures a standard ACL.

[permit](#) — configures a permit filter.

deny

To drop packets with a certain IP address, configure a filter.

Syntax `deny {any | host mac-address | mac-source-address mac-source-address-mask}{any | host mac-address | mac-destination-address mac-destination-address-mask [ether-type-operator] [count [byte]][log [interval minutes] [threshold-in-msgs count]] [monitor]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {any | host mac-address | mac-source-address mac-source-address-mask}{any | host mac-address | mac-destination-address mac-destination-address-mask}command.` command.

Parameters

source	Enter the IP address in dotted decimal format of the network from which the packet was sent.
mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous (discontiguous).
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address only.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated, if you do not specify the threshold explicitly.

The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either count (packets) or count (bytes). However, for an ACL with multiple rules, you can configure some ACLs with count (packets) and others as count (bytes) at any given time.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and s MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only the specified traffic instead of all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`ip access-list standard` — configures a standard ACL.

`permit` — configures a MAC address filter to pass packets.

`seq` — configures a MAC address filter with a specified sequence number.

seq

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

Syntax

```
seq sequence-number {deny | permit} {source [mask] | any | host ip-address}}
[count [byte] [dscp value] [order] [fragments] [threshold-in-msgs [count]
```

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290. The range is from 0 to 65534.
deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
<i>source</i>	Enter an IP address in dotted decimal format of the network from which the packet was received.

mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same order value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same order.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You

can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — configures a filter to drop packets.

`permit` — configures a filter to forward packets.

`seq` — assigns a sequence number to a deny or permit filter in an IP access list while creating the filter.

deny tcp

Configure a filter that drops transmission control protocol (TCP) packets meeting the filter criteria.

Syntax

```
deny tcp {source mask | any | host ip-address} [bit] [operator port [port]]
{destination mask | any | host ip-address} [dscp] [bit] [operator port [port]]
[count [byte] [order] [fragments] [threshold-in-msgs [count]]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
bit	Enter a flag or combination of bits: <ul style="list-style-type: none">• <code>ack</code>: acknowledgement field• <code>fin</code>: finish (no more data from the user)• <code>psh</code>: push function• <code>rst</code>: reset the connection• <code>syn</code>: synchronize sequence numbers• <code>urg</code>: urgent field
operator	(OPTIONAL) Enter one of the following logical operand:

- `eq` = equal to
- `neq` = not equal to
- `gt` = greater than
- `lt` = less than
- `range` = inclusive range of ports (you must specify two ports for the `port` command)

port port

Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535.

The following list includes some common TCP port numbers:

- 23 = Telnet
- 20 and 21 = FTP
- 25 = SMTP
- 169 = SNMP

destination

Enter the IP address of the network or host to which the packets are sent.

mask

Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.

count

(OPTIONAL) Enter the keyword `count` to count packets the filter processes.

byte

(OPTIONAL) Enter the keyword `byte` to count bytes the filter processes.

order

(OPTIONAL) Enter the keyword `order` to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority) If you did not use the keyword `order`, the ACLs have the lowest order by default (**255**).

fragments

Enter the keyword `fragments` to use ACLs to control packet fragments.

threshold-in-msgs count

(OPTIONAL) Enter the `threshold-in-msgs` keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the `seq`, `permit`, or `deny` commands. The threshold range is from 1 to 100.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly.

The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes

CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes

Full-Switch

Command History

Version

Description

9.9(0.0)

Introduced on the FN IOM.

9.4(0.0)

Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.

9.3(0.0)

Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either count (packets) or count (bytes). However, for an ACL with multiple rules, you can configure some ACLs with count (packets) and others as count (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```
Dell# Data Mask From To #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1
Total Ports: 4001
```

Example

An ACL rule with a TCP port `lt 1023` uses only one entry in the CAM.

```
Dell# Data Mask From To #Covered
1 0000000000000000 1111110000000000 0 1023 1024
Total Ports: 1024
```

Related Commands

`deny` — assigns a filter to deny IP traffic.

`deny udp` — assigns a filter to deny UDP traffic.

deny udp

To drop user datagram protocol (UDP) packets meeting the filter criteria, configure a filter.

Syntax

```
deny udp {source mask | any | host ip-address} [operator port [port]]
{destination mask | any | host ip-address} [dscp] [operator port [port]] [count
[byte]] [order] [fragments] [threshold-in-msgs [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny udp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than• <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> command)
port port	Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535.
destination	Enter the IP address of the network or host to which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

threshold-in-msgs count (OPTIONAL) Enter the `threshold-in-msgs` keyword then a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs are terminated with the `seq`, `permit`, or `deny` commands. The threshold range is from 1 to 100.

Defaults By default 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which the ACL logs are generated is five minutes.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either `count` (packets) or `count` (bytes). However, for an ACL with multiple rules, you can configure some ACLs with `count` (packets) and others as `count` (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt` or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces

Example An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```

Dell# Data Mask From To #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111000000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111110100000 1111111111111111 8000 8000 1

Total Ports: 4001

```

Example

An ACL rule with a TCP port lt 1023 uses only one entry in the CAM.

```
Dell# Data          Mask          From To    #Covered
1 0000000000000000 1111110000000000 0    1023 1024
Total Ports: 1024
```

Related Commands

`deny` — assigns a filter to deny IP traffic.

`deny tcp` — assigns a filter to deny TCP traffic.

deny arp (for Extended MAC ACLs)

Configure an egress filter that drops ARP packets on egress ACL supported line cards. (For more information, refer to your line card documentation).

Syntax

```
deny arp {destination-mac-address mac-address-mask | any} vlan vlan-id {ip-address | any | opcode code-number} [count [byte]] [order] [log [interval minutes]] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny arp {destination-mac-address mac-address-mask | any} vlan vlan-id {ip-address | any | opcode code-number}` command.

Parameters

destination-mac-address mac-address-mask

Enter a MAC address and mask in the nn:nn:nn:nn:nn format.

For the MAC address mask, specify which bits in the MAC address must match.

The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.

any

Enter the keyword `any` to match and drop any ARP traffic on the interface.

*vlan **vlan-id***

Enter the keyword `vlan` and then enter the VLAN ID to filter traffic associated with a specific VLAN. The range is 1 to 4094 and 1 to 2094 for ExaScale (you can use IDs 1 to 4094). To filter all VLAN traffic, specify VLAN 1.

ip-address

Enter an *IP address* in dotted decimal format (A.B.C.D) as the target IP address of the ARP.

*opcode **code-number***

Enter the keyword `opcode` and then enter the number of the ARP opcode. The range is from 1 to 23.

count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.
8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
8.1.1.0	Introduced on the E-Series ExaScale.
7.4.1.0	Added the support for the non-contiguous mask and the monitor option.
6.5.1.0	Expanded to include the optional QoS order priority for the ACL entry.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both

the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

The `monitor` option is relevant in the context of flow-based monitoring only. For more information, refer to the [Port Monitoring](#).

When you use the `log` option, the CP processor logs details the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

You cannot include IP, TCP or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs (ARP and Ether-type) to Layer 2 interfaces only.

NOTE: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

deny icmp

To drop all or specific internet control message protocol (ICMP) messages, configure a filter.

Syntax

```
deny icmp {source mask | any | host ip-address} {destination mask | any | host ip-address} [dscp] [count [byte]] [order] [fragments][threshold-in-msgs] [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command, if you know the filter's sequence number.
- Use the `no deny icmp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter this keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).

fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added the support for logging ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

deny ether-type (for Extended MAC ACLs)

Configure an egress filter that drops specified types of Ethernet packets on egress ACL supported line cards. (For more information, refer to your line card documentation).

Syntax

```
deny ether-type protocol-type-number {destination-mac-address mac-address-mask | any} vlan vlan-id {source-mac-address mac-address-mask | any} [count [byte]] [order] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny ether-type protocol-type-number {destination-mac-address mac-address-mask | any} vlan vlan-id {source-mac-address mac-address-mask | any}` command.

Parameters

<i>protocol-type-number</i>	Enter a number from 600 to FFFF as the specific Ethernet type traffic to drop.
<i>destination-mac-address mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>any</i>	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
<i>vlan vlan-id</i>	Enter the keyword <code>vlan</code> and then enter the VLAN ID to filter traffic associated with a specific VLAN. The range is 1 to 4094 and 1 to 2094 for ExaScale (you can use IDs 1 to 4094). To filter all VLAN traffic, specify <code>VLAN 1</code> .
<i>source-mac-address mac-address-mask</i>	Enter a MAC address and mask in the nn:nn:nn:nn:nn format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>order</i>	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority) If you did not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
<i>threshold-in-msgs count</i>	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
<i>interval minutes</i>	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from of 1 to 10 minutes.
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the flow-based `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

deny

To drop packets with a the MAC address specified, configure a filter.

Syntax `deny {any | mac-source-address [mac-source-address-mask]} [count [byte]] [log [interval minutes] [threshold-in-msgs [count]] [monitor]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {any | mac-source-address mac-source-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
mac-source-address	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.

log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated. with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `permit` — configures a MAC address filter to pass packets.

`seq` — configures a MAC address filter with a specified sequence number.

deny

To drop packets with a certain IP address, configure a filter.

Syntax

```
deny {any | host mac-address | mac-source-address mac-source-address-mask}{any | host mac-address | mac-destination-address mac-destination-address-mask}[ether-type-operator] [count [byte]][log [interval minutes] [threshold-in-msgs [count]]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {any | host mac-address | mac-source-address mac-source-address-mask}{any | host mac-address | mac-destination-address mac-destination-address-mask}command.` command.

Parameters

source	Enter the IP address in dotted decimal format of the network from which the packet was sent.
mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous (discontiguous).
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address only.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults

By default, 10 ACL logs are generated, if you do not specify the threshold explicitly.

The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

You can configure either count (packets) or count (bytes). However, for an ACL with multiple rules, you can configure some ACLs with count (packets) and others as count (bytes) at any given time.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and s MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only the specified traffic instead of all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`ip access-list standard` — configures a standard ACL.

`permit` — configures a MAC address filter to pass packets.

`seq` — configures a MAC address filter with a specified sequence number.

permit (for Standard IP ACLs)

To permit packets from a specific source IP address to leave the switch, configure a filter.

Syntax

```
permit {source [mask] | any | host ip-address} [no-drop] [count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {source [mask] | any | host ip-address}` command.

Parameters

source Enter the IP address in dotted decimal format of the network from which the packet was sent.

mask	(OPTIONAL) Enter a network <code>mask</code> in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address or hostname.
no-drop	Enter the keywords <code>no-drop</code> to match only the forwarded packets.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
bytes	(OPTIONAL) Enter the keyword <code>bytes</code> to count bytes processed by the filter.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-STANDARD-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platforms.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — assigns a IP ACL filter to deny IP packets.
`ip access-list standard` — creates a standard ACL.

permit

To forward packets from a specific source MAC address, configure a filter.

Syntax `permit {any | mac-source-address [mac-source-address-mask]} [count [byte]] | log [interval minutes] [threshold-in-msgs[count] [monitor]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {any | mac-source-address mac-source-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to forward all packets received with a MAC address.
mac-source-address	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When the configured maximum threshold is exceeded, generation of logs are stopped.

When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, Pv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`deny` — configures a MAC ACL filter to drop packets.

`seq` — configure a MAC ACL filter with a specified sequence number.

permit ether-type (for Extended MAC ACLs)

Configure a filter that allows traffic with specified types of Ethernet packets. This command is supported only on 12-port GE line cards with SFP optics. For specifications, refer to your line card documentation.

Syntax

```
permit ether-type protocol-type-number {destination-mac-address mac-address-mask | any} vlan vlan-id {source-mac-address mac-address-mask | any} [count [byte]] [order] [log [intervalminutes][threshold-in-msgs] [count]][monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit ether-type protocol-type-number {destination-mac-address mac-address-mask | any} vlan vlan-id {source-mac-address mac-address-mask | any} command.`

Parameters

protocol-type-number

Enter a number from 600 to FFF as the specific Ethernet type traffic to drop.

destination-mac-address mac-address-mask	<p>Enter a MAC address and mask in the nn:nn:nn:nn:nn format.</p> <p>For the MAC address mask, specify which bits in the MAC address must match.</p> <p>The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.</p>
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
vlan vlan-id	Enter the keyword <code>vlan</code> and then enter the VLAN ID to filter traffic associated with a specific VLAN. The range is 1 to 4094 and 1 to 2094 for ExaScale (you can use IDs 1 to 4094). To filter all VLAN traffic specify <code>VLAN 1</code> .
source-mac-address mac-address-mask	<p>Enter a MAC address and mask in the nn:nn:nn:nn:nn format.</p> <p>For the MAC address mask, specify which bits in the MAC address must match.</p> <p>The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.</p>
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. You can enter an interval in the range of 1-10 minutes.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated. with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

NOTE: For more information, refer to the **Flow-based Monitoring** section in the **Port Monitoring** chapter of the *Dell Networking OS Configuration Guide*.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
8.1.1.0	Introduced on the E-Series ExaScale.
7.4.1.0	Added the <code>monitor</code> option.
6.5.1.0	Expanded to include the optional QoS <code>order</code> priority for the ACL entry.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Networking OS Configuration Guide*.

NOTE: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

When you use the `log` option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets’ details.

The `monitor` option is relevant in the context of flow-based monitoring only. For more information, refer to [Port Monitoring](#).

You cannot include IP, TCP, or UDP filters in an ACL configured with ARP filters.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

permit icmp

Configure a filter to allow all or specific ICMP messages.

Syntax

```
permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address} [dscp] [message-type] [count [byte]] [order] [fragments] [threshold-in-msgs [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or noncontiguous.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is 0 to 63.
message-type	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. The range is 0 to 255 for ICMP type and 0 to 255 for ICMP code.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

permit udp

To pass UDP packets meeting the filter criteria, configure a filter.

Syntax

```
permit udp {source mask | any | host ip-address} [operator port [port]]  
{destination mask | any | host ip-address} [dscp] [operator port [port]] [count  
[byte]] [order] [fragments] [threshold-in-msgs [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit udp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than

- `range` = inclusive range of ports (you must specify two ports for the `port` parameter)

<i>port port</i>	Enter the application layer port number. Enter two port numbers if you are using the <code>range</code> logical operand. The range is 0 to 65535.
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
<i>order</i>	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
<i>fragments</i>	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
<i>threshold-in msgs count</i>	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Operating System Configuration Guide*.

You can configure either `count` (packets) or `count` (bytes). However, for an ACL with multiple rules, you can configure some ACLs with `count` (packets) and others as `count` (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

Dell#	Data	Mask	From	To	#Covered
1	0000111110100000	1111111111100000	4000	4031	32
2	0000111111000000	1111111111100000	4032	4095	64
3	0001000000000000	1111100000000000	4096	6143	2048
4	0001100000000000	1111110000000000	6144	7167	1024
5	0001110000000000	1111111000000000	7168	7679	512
6	0001111000000000	1111111100000000	7680	7935	256
7	0001111100000000	1111111110000000	7936	7999	64
8	0001111101000000	1111111111111111	8000	8000	1

Total Ports: 4001

Example

An ACL rule with a TCP port 1023 uses only one entry in the CAM.

Dell#	Data	Mask	From	To	#Covered
1	0000000000000000	1111110000000000	0	1023	1024

Total Ports: 1024

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit tcp](#) — assigns a permit filter for TCP packets.

permit (for Extended IP ACLs)

To pass IP packets meeting the filter criteria, configure a filter.

Syntax

```
permit {source mask | any | host ip-address} {destination mask | any | host ip-address} [count [bytes]] [dscp value] [order] [fragments] [log [interval minutes]] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no deny {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source Enter the IP address in dotted decimal format of the network from which the packet was sent.

mask	(OPTIONAL) Enter a network <code>mask</code> in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address or hostname.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
bytes	(OPTIONAL) Enter the keyword <code>bytes</code> to count bytes processed by the filter.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platforms.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

- `ip access-list extended` — creates an extended ACL.
- `permit tcp` — assigns a permit filter for TCP packets.
- `permit udp` — assigns a permit filter for UDP packets.

permit

To forward packets from a specific source MAC address, configure a filter.

Syntax

```
permit {any | mac-source-address [mac-source-address-mask]} [count [byte]] |  
log [interval minutes] [threshold-in-msgs[count] [monitor]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit {any | mac-source-address mac-source-address-mask}` command.

Parameters

any	Enter the keyword <code>any</code> to forward all packets received with a MAC address.
mac-source-address	Enter a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of <code>00:00:00:00:00:00</code> is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface

Defaults Not configured.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When the configured maximum threshold is exceeded, generation of logs are stopped.

When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, Pv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`deny` — configures a MAC ACL filter to drop packets.

`seq` — configure a MAC ACL filter with a specified sequence number.

seq

To a deny or permit filter in a MAC access list while creating the filter, assign a sequence number.

Syntax

```
seq sequence-number {deny | permit} {any | mac-source-address [mac-source-address-mask]} [count [byte]] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, use the `no seq sequence-number` command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 65535.
deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
any	Enter the keyword <code>any</code> to filter all packets.

mac-source-address	Enter a MAC address in nn:nn:nn:nn:nn:nn format.
mac-source-address-mask	(OPTIONAL) Specify which bits in the MAC address must match. If no mask is specified, a mask of 00:00:00:00:00:00 is applied (in other words, the filter allows only MAC addresses that match).
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes..
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-MAC ACCESS LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available

for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — configures a filter to drop packets.

`permit` — configures a filter to forward packets.

permit tcp

To pass TCP packets meeting the filter criteria, configure a filter.

Syntax

```
permit tcp {source mask | any | host ip-address} [bit] [operator port [port]]
{destination mask | any | host ip-address} [bit] [dscp] [operator port [port]]
[count [byte]] [order] [fragments][log [interval minutes] [threshold-in-msgs
[count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
bit	Enter a flag or combination of bits: <ul style="list-style-type: none">• <code>ack</code>: acknowledgement field• <code>fin</code>: finish (no more data from the user)• <code>push</code>: push function• <code>rst</code>: reset the connection• <code>syn</code>: synchronize sequence numbers• <code>urg</code>: urgent field
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than• <code>range</code> = inclusive range of ports (you must specify two ports for the port parameter)

<i>port port</i>	Enter the application layer port number. Enter two port numbers if you are using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none"> • 23 = Telnet • 20 and 21 = FTP • 25 = SMTP • 169 = SNMP
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>mask</i>	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
<i>count</i>	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
<i>byte</i>	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
<i>order</i>	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
<i>fragments</i>	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
<i>log</i>	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
<i>threshold-in msgs count</i>	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
<i>interval minutes</i>	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.
<i>monitor</i>	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Networking OS Configuration Guide*.

The switch cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```
Dell# Data          Mask          From To  #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111100000000000 6144 7167 1024
5 0001110000000000 1111110000000000 7168 7679 512
6 0001111000000000 1111111000000000 7680 7935 256
7 0001111100000000 1111111110000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1

Total Ports: 4001
```

Example

An ACL rule with a TCP port `lt 1023` uses only one entry in the CAM.

```
Dell# Data          Mask          From To  #Covered
1 0000000000000000 1111110000000000 0     1023 1024

Total Ports: 1024
```

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit udp](#) — assigns a permit filter for UDP packets.

seq arp

Configure an egress filter with a sequence number that filters ARP packets meeting this criteria. This command is supported only on 12-port GE line cards with SFP optics. For specifications, refer to your line card documentation.

Syntax `seq sequence-number {deny | permit} arp {destination-mac-address mac-address-mask | any} vlan vlan-id {ip-address | any | opcode code-number} [count [byte] [order] [log [interval minutes] [threshold-in-msgs[count]]] [monitor]`

To remove this filter, use the `no seq sequence-number` command.

Parameters

sequence-number	Enter a number from 0 to 4294967290.
deny	Enter the keyword <code>deny</code> to drop all traffic meeting the filter criteria..
permit	Enter the keyword <code>permit</code> to forward all traffic meeting the filter criteria.
destination-mac-address mac-address-mask	Enter a MAC address and mask in the <code>nn:nn:nn:nn:nn</code> format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00</code> only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop any ARP traffic on the interface.
vlan vlan-id	Enter the keyword <code>vlan</code> followed by the VLAN ID to filter traffic associated with a specific VLAN. The range is 1 to 4094 and 1 to 2094 for ExaScale (you can use IDs 1 to 4094). To filter all VLAN traffic specify <code>VLAN 1</code> .
ip-address	Enter an IP address in dotted decimal format (A.B.C.D) as the target IP address of the ARP.
opcode code-number	Enter the keyword <code>opcode</code> and then enter the number of the ARP opcode. The range is 1 to 16.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

monitor (OPTIONAL) Enter the keyword `monitor` when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

① **NOTE:** For more information, refer to the **Flow-based Monitoring** section in the **Port Monitoring** chapter of the *Dell Networking OS Configuration Guide*.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
8.1.1.0	Introduced on the E-Series ExaScale.
7.4.1.0	Added the <code>monitor</code> option.
6.5.1.0	Expanded to include the optional QoS <code>order</code> priority for the ACL entry.

Usage Information The `monitor` option is relevant in the context of flow-based monitoring only. For more information, refer to [Port Monitoring](#).

The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same order value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same order.

When you use the `log` option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

You cannot include IP, TCP, or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs to interfaces in Layer 2 mode.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You

can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

NOTE: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

seq ether-type

Configure an egress filter with a specific sequence number that filters traffic with specified types of Ethernet packets. This command is supported only on 12-port GE line cards with SFP optics. For specifications, refer to your line card documentation.

Syntax

```
seq sequence-number {deny | permit} ether-type protocol-type-number
{destination-mac-address mac-address-mask | any} vlan vlan-id {source-mac-
address mac-address-mask | any} [count [byte] [order] [log [interval minutes]
[threshold-in-msgs [count]]] [monitor]
```

To remove this filter, use the `no seq sequence-number` command.

Parameters

<i>sequence-number</i>	Enter a number from 0 to 4294967290.
deny	Enter the keyword <code>deny</code> to drop all traffic meeting the filter criteria..
permit	Enter the keyword <code>permit</code> to forward all traffic meeting the filter criteria.
<i>destination-mac-address mac-address-mask</i>	Enter a MAC address and mask in the <code>nn:nn:nn:nn:nn</code> format. For the MAC address mask, specify which bits in the MAC address must match. The MAC ACL supports an inverse mask; therefore, a mask of <code>ff:ff:ff:ff:ff</code> allows entries that do not match and a mask of <code>00:00:00:00:00</code> only allows entries that match exactly.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> and then enter the VLAN ID to filter traffic associated with a specific VLAN. The range is 1 to 4094 and 1 to 2094 for ExaScale (you can use IDs 1 to 4094). To filter all VLAN traffic specify <code>VLAN 1</code> .
<i>source-mac-address mac-address-mask</i>	Enter a MAC address and mask in the <code>nn:nn:nn:nn:nn</code> format. For the MAC address mask, specify which bits in the MAC address must match.

The MAC ACL supports an inverse mask; therefore, a mask of ff:ff:ff:ff:ff:ff allows entries that do not match and a mask of 00:00:00:00:00:00 only allows entries that match exactly.

count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
interval <i>minutes</i>	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
threshold-in msgs <i>count</i>	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

NOTE: For more information, refer to the **Flow-based Monitoring section in the Port Monitoring chapter of the *Dell Networking OS Configuration Guide*.**

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-EXTENDED-ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.2.1.0	Allows ACL control of fragmented packets for IP (Layer 3) ACLs.
8.1.1.0	Introduced on the E-Series ExaScale.
7.4.1.0	Added the <code>monitor</code> option.
6.5.10	Expanded to include the optional QoS <code>order</code> priority for the ACL entry.

Usage Information The `monitor` option is relevant in the context of flow-based monitoring only. For more information, refer to [Port Monitoring](#).

The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.

- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same `order` value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same `order`.

When you use the `log` option, the CP processor logs details about the packets that match. Depending on how many packets match the log entry and at what rate, the CP may become busy as it has to log these packets' details.

You cannot include IP, TCP, or UDP (Layer 3) filters in an ACL configured with ARP or Ether-type (Layer 2) filters. Apply Layer 2 ACLs to interfaces in Layer 2 mode.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

NOTE: When ACL logging and byte counters are configured simultaneously, byte counters may display an incorrect value. Configure packet counters with logging instead.

seq

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

Syntax `seq sequence-number {deny | permit} {source [mask] | any | host ip-address} [count [byte] [dscp value] [order] [fragments] [threshold-in-msgs [count]]`

Parameters	sequence-number	Enter a number from 0 to 4294967290. The range is from 0 to 65534.
	deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
	permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
	source	Enter an IP address in dotted decimal format of the network from which the packet was received.
	mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.

any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same `order` value are ordered according to their configuration order.
- If `sequence-number` is configured, the `sequence-number` is used as a tie breaker for rules with the same `order`.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` — configures a filter to drop packets.

`permit` — configures a filter to forward packets.

`seq` — assigns a sequence number to a deny or permit filter in an IP access list while creating the filter.

seq

Assign a sequence number to a deny or permit filter in an extended IP access list while creating the filter.

Syntax

```
seq sequence-number {deny | permit} {ipv6-protocol-number | icmp | ip | tcp |
udp} {source mask | any | host ipv6-address} {destination mask | any | host
ipv6-address} [operator port [port]] [count [byte]] [dscp value] [order]
[fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

Parameters

sequence-number	Enter a number from 0 to 4294967290. The range is from 1 to 65534.
deny	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
permit	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this criteria.
ipv6-protocol-number	Enter a number from 0 to 255 to filter based on the protocol identified in the IP protocol header.
icmp	Enter the keyword <code>icmp</code> to configure an ICMP access list filter.
ip	Enter the keyword <code>ip</code> to configure a generic IP access list. The keyword <code>ip</code> specifies that the access list permits all IP protocols.
tcp	Enter the keyword <code>tcp</code> to configure a TCP access list filter.
udp	Enter the keyword <code>udp</code> to configure a UDP access list filter.
source	Enter an IP address in dotted decimal format of the network from which the packet was received.
mask	(OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ipv6-address	Enter the keyword <code>host</code> and then enter the IPv6 address to specify a host IP address or hostname.
operator	(OPTIONAL) Enter one of the following logical operands: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than

- `lt` = less than
- `range` = inclusive range of ports (you must specify two ports for the `port` parameter.)

port port (OPTIONAL) Enter the application layer port number. Enter two port numbers if you are using the range logical operand. The range is from 0 to 65535.

The following list includes some common TCP port numbers:

- 23 = Telnet
- 20 and 21 = FTP
- 25 = SMTP
- 169 = SNMP

destination Enter the IP address of the network or host to which the packets are sent.

count (OPTIONAL) Enter the keyword `count` to count packets the filter processes.

byte (OPTIONAL) Enter the keyword `byte` to count bytes the filter processes.

dscp (OPTIONAL) Enter the keyword `dscp` to match to the IP DCSCP values.

order (OPTIONAL) Enter the keyword `order` to specify the QoS order for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword `order`, the ACLs have the lowest order by default (**255**).

fragments Enter the keyword `fragments` to use ACLs to control packet fragments.

log (OPTIONAL) Enter the keyword `log` to enable the triggering of ACL log messages.

threshold-in msgs count (OPTIONAL) Enter the `threshold-in-msgs` keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the `seq`, `permit`, or `deny` commands. The threshold range is from 1 to 100.

interval minutes (OPTIONAL) Enter the keyword `interval` followed by the time period in minutes at which the ACL logs must be generated. The interval range is from 1 to 10 minutes.

monitor (OPTIONAL) Enter the keyword `monitor` when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which the ACL logs are generated is five minutes. By default, the flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for the flow-based monitoring on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. The following applies:

- The `seq sequence-number` command is applicable only in an ACL group.
- The `order` option works across ACL groups that have been applied on an interface via the QoS policy framework.
- The `order` option takes precedence over `seq sequence-number`.
- If `sequence-number` is not configured, the rules with the same order value are ordered according to their configuration order.
- If `sequence-number` is configured, the sequence-number is used as a tie breaker for rules with the same order.

If you configure the `sequence-number`, the `sequence-number` is used as a tie breaker for rules with the same order.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands

`deny` — Configures a filter to drop packets.

`permit` — Configures a filter to forward packets.

permit udp

To pass UDP packets meeting the filter criteria, configure a filter.

Syntax

```
permit udp {source mask | any | host ip-address} [operator port [port]]  
{destination mask | any | host ip-address} [dscp] [operator port [port]] [count  
[byte]] [order] [fragments] [threshold-in-msgs [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit udp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source

Enter the IP address of the network or host from which the packets were sent.

mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> parameter)
port port	Enter the application layer port number. Enter two port numbers if you are using the <code>range</code> logical operand. The range is 0 to 65535.
destination	Enter the IP address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Operating System Configuration Guide*.

You can configure either `count` (packets) or `count` (bytes). However, for an ACL with multiple rules, you can configure some ACLs with `count` (packets) and others as `count` (bytes) at any given time.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, gt, lt, or range) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

```

Dell# Data                Mask                From To  #Covered
1 0000111110100000 1111111111100000 4000 4031 32
2 0000111111000000 1111111111100000 4032 4095 64
3 0001000000000000 1111100000000000 4096 6143 2048
4 0001100000000000 1111110000000000 6144 7167 1024
5 0001110000000000 1111111000000000 7168 7679 512
6 0001111000000000 1111111100000000 7680 7935 256
7 0001111100000000 1111111111000000 7936 7999 64
8 0001111101000000 1111111111111111 8000 8000 1
Total Ports: 4001

```

Example

An ACL rule with a TCP port lt 1023 uses only one entry in the CAM.

```

Dell# Data                Mask                From To  #Covered
1 0000000000000000 1111110000000000 0     1023 1024
Total Ports: 1024

```

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit tcp](#) — assigns a permit filter for TCP packets.

permit tcp

To pass TCP packets meeting the filter criteria, configure a filter.

Syntax

```
permit tcp {source mask | any | host ip-address} [bit] [operator port [port]]  
{destination mask | any | host ip-address} [bit] [dscp] [operator port [port]]  
[count [byte]] [order] [fragments][log [interval minutes] [threshold-in-msgs  
[count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit tcp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
bit	Enter a flag or combination of bits: <ul style="list-style-type: none">• <code>ack</code>: acknowledgement field• <code>fin</code>: finish (no more data from the user)• <code>psh</code>: push function• <code>rst</code>: reset the connection• <code>syn</code>: synchronize sequence numbers• <code>urg</code>: urgent field
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is from 0 to 63.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than• <code>range</code> = inclusive range of ports (you must specify two ports for the port parameter)
port port	Enter the application layer port number. Enter two port numbers if you are using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none">• 23 = Telnet• 20 and 21 = FTP• 25 = SMTP• 169 = SNMP

destination	Enter the IP address of the network or host to which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-EXTENDED

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the “Quality of Service” chapter of the *Dell Networking OS Configuration Guide*.

The switch cannot count both packets and bytes, so when you enter the count byte options, only bytes are incremented.

Most ACL rules require one entry in the CAM. However, rules with TCP and UDP port operators (for example, `gt`, `lt`, or `range`) may require more than one entry. The range of ports is configured in the CAM based on bit mask boundaries; the space required depends on exactly what ports are included in the range.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Example

An ACL rule with a TCP port range of 4000–8000 uses eight entries in the CAM.

Dell#	Data	Mask	From	To	#Covered
1	00001111110100000	11111111111100000	4000	4031	32
2	00001111111000000	11111111111000000	4032	4095	64
3	00010000000000000	11111000000000000	4096	6143	2048
4	00011000000000000	11111000000000000	6144	7167	1024
5	00011100000000000	11111100000000000	7168	7679	512
6	00011110000000000	11111110000000000	7680	7935	256
7	00011111000000000	11111111100000000	7936	7999	64
8	00011111010000000	11111111111111111	8000	8000	1
Total Ports: 4001					

Example

An ACL rule with a TCP port lt 1023 uses only one entry in the CAM.

Dell#	Data	Mask	From	To	#Covered
1	00000000000000000	11111100000000000	0	1023	1024
Total Ports: 1024					

Related Commands

[ip access-list extended](#) — creates an extended ACL.

[permit](#) — assigns a permit filter for IP packets.

[permit udp](#) — assigns a permit filter for UDP packets.

permit icmp

Configure a filter to allow all or specific ICMP messages.

Syntax

```
permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address} [dscp] [message-type] [count [byte]] [order] [fragments] [threshold-in-msgs [count]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit icmp {source mask | any | host ip-address} {destination mask | any | host ip-address}` command.

Parameters

source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or noncontiguous.
any	Enter the keyword <code>any</code> to match and drop specific Ethernet traffic on the interface.
host ip-address	Enter the keyword <code>host</code> and then enter the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
dscp	Enter the keyword <code>dscp</code> to deny a packet based on the DSCP value. The range is 0 to 63.
message-type	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. The range is 0 to 255 for ICMP type and 0 to 255 for ICMP code.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.

Defaults

By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes CONFIGURATION-IP ACCESS-LIST-STANDARD

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `order` option is relevant in the context of the Policy QoS feature only. For more information, refer to the Quality of Service chapter of the *Dell Networking OS Configuration Guide*.

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

permit

To configure a filter that matches the filter criteria, select an IPv6 protocol number, ICMP, IPv6, TCP, or UDP.

Syntax

```
permit {ipv6-protocol-number | icmp | ipv6 | tcp | udp} [count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no permit {ipv6-protocol-number | icmp | ipv6 | tcp | udp}` command

Parameters

<i>ip-protocol-number</i>	Enter an IPv6 protocol number. The range is from 0 to 255.
icmp	Enter the keyword <code>icmp</code> to filter internet Control Message Protocol version 6.
ipv6	Enter the keyword <code>ipv6</code> to filter any internet Protocol version 6.
tcp	Enter the keyword <code>tcp</code> to filter the Transmission Control protocol.
udp	Enter the keyword <code>udp</code> to filter the User Datagram Protocol.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

log	OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults Not configured.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

deny udp (for IPv6 ACLs)

Configure a filter to drop user datagram protocol (UDP) packets meeting the filter criteria.

Syntax

```
deny udp {source address mask | any | host ipv6-address} [operator port [port]]
{destination address | any | host ipv6-address} [operator port [port]] [count
[byte]] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no deny udp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command

Parameters

source	Enter the IP address of the network or host from which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ipv6-address	Enter the keyword <code>host</code> then the IPv6 address to specify a host IP address.
operator	(OPTIONAL) Enter one of the following logical operand. <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to

- `gt` = greater than
- `lt` = less than
- `range` = inclusive range of ports (you must specify two ports for the `port` command)

port	Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers:
	<ul style="list-style-type: none"> · 23 = Telnet · 20 and 21 = FTP · 25 = SMTP · 169 = SNMP
count	(OPTIONAL) Enter the keyword <code>count</code> to count the packets that filter the processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count the bytes that filter the processes.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The threshold range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs.

You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` – assigns a filter to deny IP traffic.

`deny tcp` – assigns a deny filter for TCP traffic.

deny tcp (for IPv6 ACLs)

Configure a filter that drops TCP packets that match the filter criteria.

Syntax `deny tcp {source address mask | any | host ipv6-address} [operator port [port]] {destination address | any | host ipv6-address} [bit] [operator port [port]] [count [byte]] [log [interval minutes] [threshold-in-msgs [count]] [monitor]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no deny tcp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command

Parameters

source	Enter the IP address of the network or host from which the packets are sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ipv6-address	Enter the keyword <code>host</code> then the IPv6 address to specify a host IP address.
operator	(OPTIONAL) Enter one of the following logical operand: <ul style="list-style-type: none">• <code>eq</code> = equal to• <code>neq</code> = not equal to• <code>gt</code> = greater than• <code>lt</code> = less than• <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> command)
port	Enter the application layer port number. Enter two port numbers if using the range logical operand. The range is from 0 to 65535. The following list includes some common TCP port numbers: <ul style="list-style-type: none">• 23 = Telnet• 20 and 21 = FTP

- 25 = SMTP
- 169 = SNMP

destination	Enter the IP address of the network or host to which the packets are sent.
bit	(OPTIONAL) Enter the keyword <code>bit</code> to count the bits that filter the processes.
count	(OPTIONAL) Enter the keyword <code>count</code> to count the packets that filter the processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count the bytes that filter the processes.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This

mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Related Commands `deny` – assigns a filter to deny IP traffic.

`deny udp` – assigns a filter to deny UDP traffic.

deny icmp (for Extended IPv6 ACLs)

Configure a filter to drop all or specific ICMP messages.

Syntax `deny icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address} [count [byte]] | [log [interval minutes] [threshold-in-msgs [count]] [monitor]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no deny icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command

Parameters

source	Enter the IPv6 address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x) or A.B.C.D. The mask, when specified in A.B.C.D format, may be either contiguous or non-contiguous.
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ipv6-address	Enter the keyword <code>host</code> then the IPv6 address to specify a host IP address.
destination	Enter the IPv6 address of the network or host to which the packets are sent.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

deny (for IPv6 ACLs)

Configure a filter that drops IPv6 packets that match the filter criteria.

Syntax

```
deny {ipv6-protocol-number | icmp | ipv6 | tcp | udp} [count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]
```

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no deny {ipv6-protocol-number | icmp | ipv6 | tcp | udp}` command

Parameters

count	OPTIONAL) Enter the keyword <code>count</code> to count packets processed by the filter.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes processed by the filter.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS order of priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower order numbers have a higher priority). If you do not use the <code>order</code> keyword, the ACLs have the lowest order by default as 255 .

fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated. with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The time interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform.
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform.

Usage Information

When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress directions. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

Access Control List (ACL) VLAN Groups and Content Addressable Memory (CAM)

This section describes the access control list (ACL) virtual local area network (VLAN) group, and content addressable memory (CAM) enhancements.

member vlan

Add VLAN members to an ACL VLAN group.

Syntax `member vlan {VLAN-range}`

Parameters

VLAN-range Enter the member VLANs using comma-separated VLAN IDs, a range of VLAN IDs, a single VLAN ID, or a combination. For example:

Comma-separated: 3, 4, 6

Range: 5-10

Combination: 3, 4, 5-10, 8

Default None

Command Modes CONFIGURATION (conf-acl-vl-grp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information

At a maximum, there can be only 32 VLAN members in all ACL VLAN groups. A VLAN can belong to only one group at any given time.

You can create an ACL VLAN group and attach the ACL with the VLAN members. The optimization is applicable only when you create an ACL VLAN group. If you apply an ACL separately on the VLAN interface, each ACL has a mapping with the VLAN and increased CAM space utilization occurs.

Attaching an ACL individually to VLAN interfaces is similar to the behavior of ACL-VLAN mapping storage in CAM prior to the implementation of the ACL VLAN group functionality.

ip access-group

Apply an egress IP ACL to the ACL VLAN group.

Syntax `ip access-group {group name} out implicit-permit`

Parameters

group-name	Enter the name of the ACL VLAN group where you want the egress IP ACLs applied, up to 140 characters.
out	Enter the keyword <code>out</code> to apply the ACL to outgoing traffic.
implicit-permit	Enter the keyword <code>implicit-permit</code> to change the default action of the ACL from <code>implicit-deny</code> to <code>implicit-permit</code> (that is, if the traffic does not match the filters in the ACL, the traffic is permitted instead of dropped).

Default None

Command Modes CONFIGURATION (conf-acl-vl-grp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information You can apply only an egress IP ACL on an ACL VLAN group.

show acl-vlan-group

Display all the ACL VLAN groups or display a specific ACL VLAN group, identified by name.

Syntax `show acl-vlan-group {group-name | detail}`

Parameters

group-name	(Optional) Display only the ACL VLAN group that is specified, up to 140 characters.
detail	Display information in a line-by-line format to display the names in their entirety. Without the detail option, the output displays in a table style and information may be truncated.

Default No default behavior or values

Command Modes EXEC

EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information When an ACL-VLAN-Group name or the Access List Group Name contains more than 30 characters, the name is truncated in the show `acl-vlan-group` command output.

Examples The following sample illustrates the output of the show `acl-vlan-group` command.

NOTE: Some group names and some access list names are truncated.

```
Dell#show running-config acl-vlan-group
!
acl-vlan-group Test
  member vlan 1-100
  ip access-group test in
Dell#show acl-vlan-group
Group Name          Egress IP Acl      Ingress IP
Acl                 Ingress V6 Acl     Vlan Members
Test                -
test                -                    1-100
```

The following sample output is displayed when using the show `acl-vlan-group group-name` option.

NOTE: The access list name is truncated.

```
Dell#show acl-vlan-group TestGroupSeventeenTwenty
Group Name          Egress IP Acl      Ingress IP
Acl                 Ingress IPV6 Acl   Vlan Members
Test                -
test                -                    1-100
Dell#
```

The following sample output shows the line-by-line style display when using the show `acl-vlan-group detail` option.

NOTE: No group or access list names are truncated

```
Dell#show acl-vlan-group detail

Group Name :
  Test
Egress IP Acl :
  -
Ingress IP Acl :
  test
Ingress IPV6 Acl :
  -
Vlan Members :
  1-100
```

show cam-acl-vlan

Display the number of flow processor (FP) blocks that is allocated for the different VLAN services.

Syntax `show cam-acl-vlan`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information

After CAM configuration for ACL VLAN groups is performed, you must reboot the system to enable the settings to be stored in nonvolatile storage. During the initialization of CAM, the chassis manager reads the NVRAM and allocates the dynamic VCAP regions.

The following table describes the output fields of this `show` command:

Field	Description
Chassis Vlan Cam ACL	Details about the CAM blocks allocated for ACLs for various VLAN operations at a system-wide, global level.
Stack Unit <number>	Details about the CAM blocks allocated for ACLs for various VLAN operations for a particular stack unit.
Current Settings(in block sizes)	Information about the number of FP blocks that are currently in use or allocated.
VlanOpenFlow	Number of FP blocks for VLAN open flow operations.
Vlaniscsi	Number of FP blocks for VLAN internet small computer system interface (iSCSI) counters.
VlanHp	Number of FP blocks for VLAN high performance processes.
VlanFcoe	Number of FP blocks for VLAN Fiber Channel over Ethernet (FCoE) operations.
VlanAclopt	Number of FP blocks for ACL VLAN optimization feature.

Example

```
Dell#show cam-acl-vlan
-- Chassis Vlan Cam ACL --
      Current Settings(in block sizes)
VlanOpenFlow :      0
VlanIscsi    :      0
VlanAclopt   :      2
VlanHp       :      1
VlanFcoe     :      1
```

cam-acl-vlan

Allocate the number of flow processor (FP) blocks or entries for VLAN services and processes.

Syntax `cam-acl-vlan { default | vlanopenflow <0-2> | vlaniscsi <0-2> | vlnaclopt <0-2>`

Parameters

default	Reset the number of FP blocks to default. By default, 0 groups are allocated for the ACL in VCAP. ACL VLAN groups or CAM optimization is not enabled by default, and you need to allocate the slices for CAM optimization.
vlanopenflow <0-2>	Allocate the number of FP blocks for VLAN open flow operations.
vlaniscsi <0-2>	Allocate the number of FP blocks for VLAN iSCSI counters.

vlanaclopt <0-2> Allocate the number of FP blocks for the ACL VLAN optimization feature.

Default If you use the `default` keyword with the `cam-acl-vlan` command, the FP blocks allocated for VLAN processes are restored to their default values. No FP blocks or dynamic VLAN Content Aware Processor (VCAP) groups are allocated for VLAN operations by default.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information The VLAN ContentAware Processor (VCAP) application is a pre-ingress CAP that modifies the VLAN settings before packets are forwarded. To support the ACL CAM optimization functionality, the CAM carving feature is enhanced. A total of four VACP groups are present, of which two are for fixed groups and the other two are for dynamic groups. Out of the total of two dynamic groups, you can allocate zero, one, or two flow processor (FP) blocks to iSCSI Counters, OpenFlow and ACL Optimization. You can configure only two of these features at a point in time.

show cam-usage

View the amount of CAM space available, used, and remaining in each partition (including IPv4Flow and Layer 2 ACL sub-partitions).

Syntax `show cam-usage [acl | router | switch]`

Parameters

acl	(OPTIONAL) Enter the keyword <code>acl</code> to display Layer 2 and Layer 3 ACL CAM usage.
router	(OPTIONAL) Enter the keyword <code>router</code> to display Layer 3 CAM usage.
switch	(OPTIONAL) Enter the keyword <code>switch</code> to display Layer 2 CAM usage.

Command Modes EXEC
EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.11.0.0	The <code>show cam-usage</code> command is updated to display the ECMP group count information.
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information The following regions must be provided in the `show cam-usage` output:

- L3AcCam

- L2AcCam
- V6AcCam

The following describes the output fields of this show command:

Field	Description
LineCard	Number of the line card that contains information on ACL VLAN groups
Portpipe	The hardware path that packets follow through a system for ACL optimization
CAM-Region	Type of area in the CAM block that is used for ACL VLAN groups
Total CAM space	Total amount of space in the CAM block
Used CAM	Amount of CAM space that is currently in use
Available CAM	Amount of CAM space that is free and remaining to be allocated for ACLs

Example:

```
Dell#show cam-usage
Stackunit|Portpipe|CAM Partition |Total CAM|Used CAM|AvailableCAM
=====|=====|=====|=====|=====|=====
      0 |      0 | IN-L3 ACL | 512 | 1 | 511
      |      | IN-L3 ECMP GRP | 1024 | 0 | 1024
      |      | IN-V6 ACL | 0 | 0 | 0
      |      | IN-L2 ACL | 512 | 0 | 512
      |      | IN-NLB ACL | 256 | 0 | 256
      |      | IPMAC ACL | 0 | 0 | 0
      |      | OUT-L3 ACL | 158 | 6 | 152
      |      | OUT-V6 ACL | 158 | 1 | 157
      1 |      0 | IN-L3 ACL | 512 | 1 | 511
      |      | IN-V6 ACL | 0 | 0 | 0
      |      | IN-L2 ACL | 512 | 0 | 512
      |      | IN-NLB ACL | 256 | 0 | 256
      |      | IPMAC ACL | 0 | 0 | 0
      |      | OUT-L3 ACL | 158 | 6 | 152
      |      | OUT-V6 ACL | 158 | 1 | 157
Codes: * - cam usage is above 90%.
Dell#
```

Example (show cam-usage router)

```
Dell#show cam-usage router
Stackunit|Portpipe|CAM Partition |Total CAM |Used CAM |Available CAM
=====|=====|=====|=====|=====|=====
      0 |      0 | IN-L3 ACL | 1024 | 1 | 1023
      |      | IN-L3 ECMP GRP | 1024 | 0 | 1024
      |      | IN-V6 ACL | 0 | 0 | 0
      |      | IN-L3-MIRR ACL | 0 | 0 | 0
      |      | IN-L3 FIB | 163840 | 15 | 163825
```

show running config acl-vlan-group

Display the running configuration of all or a given ACL VLAN group.

Syntax `show running config acl-vlan-group group name`

Parameters

group-name Display only the ACL VLAN group that is specified. The maximum group name is 140 characters.

Default None

Command Modes EXEC
EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Examples The following sample output shows the line-by-line style display when using the `show running-config acl-vlan-group` option. Note that no group or access list names are truncated

```
Dell#show running-config acl-vlan-group
!
acl-vlan-group Test
 member vlan 1-100
 ip access-group test in

Dell#show running-config acl-vlan-group Test
!
acl-vlan-group Test
 member vlan 1-100
 ip access-group test in
```

acl-vlan-group

Create an ACL VLAN group.

Syntax `acl-vlan-group {group name}`
To remove an ACL VLAN group, use the `no acl-vlan-group {group name}` command.

Parameters **group-name** Specify the name of the ACL VLAN group. The name can contain a maximum 140 characters.

Default No default behavior or values

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information You can have up to eight different ACL VLAN groups at any given time. When you configure an ACL VLAN group, you enter the ACL VLAN Group Configuration mode.

To avoid the problem of excessive consumption of CAM area, you can configure ACL VLAN groups that combines all the VLANs that are applied with the same ACL in a single group. A unique identifier for each of ACL attached to the VLAN is used as a handle or locator in the CAM area instead of the VLAN id. This method of processing significantly reduces the number of entries in the CAM area and saves memory space in CAM.

You can create an ACL VLAN group and attach the ACL with the VLAN members. Optimization is applicable only when you create an ACL VLAN group. If you apply an ACL separately on the VLAN interface, each ACL maps with the VLAN and increased CAM space utilization occurs.

Attaching an ACL individually to VLAN interfaces is similar to the behavior of ACL-VLAN mapping storage in CAM prior to the implementation of the ACL VLAN group functionality.

show acl-vlan-group detail

Display all the ACL VLAN Groups or display a specific ACL VLAN Group by name. To display the names in their entirety, the output displays in a line-by-line format.

Syntax `show acl-vlan-group detail`

Parameters

detail	Display information in a line-by-line format to display the names in their entirety.
	Without the detail option, the output is displayed in a table style and information may be truncated.

Default No default behavior or values

Command Modes

EXEC
EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information The output for this command displays in a line-by-line format. This allows the ACL-VLAN-Group names (or the Access List Group Names) to display in their entirety.

Examples The following sample output shows the line-by-line style display when using the `show acl-vlan-group detail` option. Note that no group or access list names are truncated

```
Dell#show acl-vlan-group detail

Group Name :
  Test
Egress IP Acl :
  -
Ingress IP Acl :
  test
Ingress IPV6 Acl :
  -
Vlan Members :
  1-100
```

description (ACL VLAN Group)

Add a description to the ACL VLAN group.

Syntax `description description`

Parameters *description* Enter a description to identify the ACL VLAN group (80 characters maximum).

Default No default behavior or values

Command Modes CONFIGURATION (conf-acl-vl-grp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information Enter a description for each ACL VLAN group that you create for effective and streamlined administrative and logging purposes.

Bidirectional Forwarding Detection (BFD)

Bidirectional forwarding detection (BFD) is a detection protocol that provides fast forwarding path failure detection.

The Dell Networking Operating System (OS) implementation is based on the standards specified in the IETF Draft draft-ietf-bfd-base-03 and supports BFD on all Layer 3 physical interfaces including virtual local area network (VLAN) interfaces and port-channels.

Topics:

- [bfd all-neighbors](#)
- [bfd disable](#)
- [bfd enable \(Configuration\)](#)
- [bfd enable \(Interface\)](#)
- [bfd interval](#)
- [bfd protocol-liveness](#)
- [ip route bfd](#)
- [ip ospf bfd all-neighbors](#)
- [ipv6 ospf bfd all-neighbors](#)
- [isis bfd all-neighbors](#)
- [neighbor bfd](#)
- [neighbor bfd disable](#)
- [show bfd neighbors](#)
- [vrrp bfd neighbor](#)

bfd all-neighbors

Enable BFD sessions with all neighbors discovered by Layer 3 protocols virtual router redundancy protocol (VRRP), intermediate system to intermediate system (IS-IS), open shortest path first (OSPF), OSPFv3, or border gateway protocol (BGP) on router interfaces, and (optionally) reconfigure the default timer values.

Syntax `bfd all-neighbors [interval interval min_rx min_rx multiplier value role {active | passive}]`

Parameters

interval <i>milliseconds</i>	(OPTIONAL) Enter the keyword <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 200 . Dell EMC recommends using more than 100 milliseconds.
min_rx <i>milliseconds</i>	Enter the keyword <code>min_rx</code> to specify the minimum rate at which the local system would like to receive control packets from the remote system. The range is from 50 to 1000. The default is 200 . Dell EMC recommends using more than 100 milliseconds.
multiplier <i>value</i>	Enter the keyword <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	Enter the role that the local system assumes:

- **Active** — The active system initiates the BFD session. Both systems can be active for the same session.
- **Passive** — The passive system does not initiate a session. It only responds to a request for session initialization from the active system.

The default is **active**.

Defaults See *Parameters*.

Command Modes ROUTER OSPF
 ROUTER OSPFv3
 ROUTER BGP
 ROUTER ISIS

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.13(0.0)	Introduced support for enabling BFD on non-default VRFs for IPv4 BGP, default, and non-default VRFs for IPv6 BGP on the S3048-ON, S4048-ON, S4048T-ON, S6010-ON, and Z9100-ON.
9.11(2.1P1)	Introduced support for enabling BFD on non-default VRFs for OSPFv2 on all the remaining Dell EMC Networking OS platforms. Introduced support for enabling BFD on non-default VRFs for OSPFv3 on all the Dell EMC Networking OS platforms.
9.10(0.2)	Introduced support for enabling BFD on non-default VRFs for OSPFv2 on the S3048-ON, S4048-ON, S4048T-ON, S6010-ON, Z9100-ON, and S6100-ON.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the S6100-ON.
9.8(2.0)	Introduced on the S3100 series.
9.8(1.0)	Introduced on the Z9100-ON.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.7(0.0)	Introduced on the S6000-ON.
9.0.2.0	Introduced on the S6000.
9.2(1.0)	Introduced on the Z9500.
9.2(0.0)	Introduced BFD for VRRP and OSPFv3 on Z9000, S4810, and S4820T.
9.0.0.0	Introduced BFD for BGP on the Z9000.
8.3.19.0	Introduced on the S4820T.
8.3.8.0	Introduced BFD for BGP on the S4810.

Version	Description
8.4.1.3	Introduced BFD for BGP on the E-Series.
8.2.1.0	Introduced BFD for OSPF and ISIS on the E-Series.
7.6.1.0	Introduced BFD for OSPF on the C-Series.
7.5.1.0	Introduced BFD for ISIS on the E-Series.
7.4.1.0	Introduced BFD for OSPF on the E-Series.

Usage Information

All neighbors inherit the timer values configured with the `bfd neighbor` command except in the following cases:

- Timer values configured with the `isis bfd all-neighbors` or `ip ospf bfd all-neighbors` commands in INTERFACE mode override timer values configured with the `bfd neighbor` command. Likewise, using the `no bfd neighbor` command does not disable BFD on an interface if you explicitly enable BFD using the `isis bfd all-neighbors` command.
- Neighbors that have been explicitly enabled or disabled for a BFD session with the `bfd neighbor` or `neighbor bfd disable` commands in ROUTER BGP mode do not inherit the global BFD enable/disable values configured with the `bfd neighbor` command or configured for the peer group to which a neighbor belongs. The neighbors inherit only the global timer values (configured with the `bfd neighbor` command).

You can only enable BFD for VRRP in INTERFACE command mode (`vrrp bfd all-neighbors`).

You can enable BFD on both default and nondefault VRFs for OSPF and BGP protocols for both IPv4 and IPv6 neighbors.

 **NOTE:** The `bfd all-neighbors` command is applicable for both IPv4 and IPv6 BGP sessions.

bfd disable

Disable BFD on an interface.

Syntax `bfd disable`
Re-enable BFD using the `no bfd disable` command.

Defaults BFD is disabled by default.

Command Modes INTERFACE VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

bfd enable (Configuration)

Enable BFD on all interfaces.

Syntax `bfd enable`

Disable BFD using the `no bfd enable` command.

Defaults BFD is disabled by default.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

bfd enable (Interface)

Enable BFD on an interface.

Syntax `bfd enable`

Defaults BFD is enabled on all interfaces when you enable BFD from CONFIGURATION mode.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

bfd interval

Specify non-default BFD session parameters beginning with the transmission interval.

Syntax `bfd interval interval min_rx min_rx multiplier value role {active | passive}`

Parameters

interval milliseconds	Enter the keywords <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 200 .
min_rx milliseconds	Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system would like to receive control packets from the remote system. The range is from 50 to 1000. The default is 200 .
multiplier value	Enter the keywords <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none">• Active — The active system initiates the BFD session. Both systems can be active for the same session.• Passive — The passive system does not initiate a session. It only responds to a request for session initialization from the active system.

The default is **Active**.

Defaults Refer to *Parameters*.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if-gi-0/3)#bfd interval 250 min_rx 300 multiplier 4 role passive
Dell(conf-if-gi-0/3)#
```

bfd protocol-liveness

Enable the BFD protocol liveness feature.

Syntax `bfd protocol-liveness`

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Protocol Liveness is a feature that notifies the BFD Manager when a client protocol (for example, OSPF and ISIS) is disabled. When a client is disabled, all BFD sessions for that protocol are torn down. Neighbors on the remote system receive an Admin Down control packet and are placed in the Down state. Peer routers might take corrective action by choosing alternative paths for the routes that originally pointed to this router.

ip route bfd

Enable BFD for all neighbors configured through static routes.

Syntax `ip route bfd [prefix-list prefix-list-name] [interval interval min_rx min_rx multiplier value role {active | passive}]`

To disable BFD for all neighbors configured through static routes, use the `no ip route bfd [prefix-list prefix-list-name] [interval interval min_rx min_rx multiplier value role {active | passive}]` command.

Parameters

prefix-list *prefix-list-name* (Optional) Enter the keyword `prefix-list` followed by the name of the prefix list to enable or disable BFD on specific neighbors.

interval milliseconds	(OPTIONAL) Enter the keywords <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 200 .
min_rx milliseconds	Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system receives control packets from the remote system. The range is from 50 to 1000. The default is 200 .
multiplier value	Enter the keywords <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	<p>Enter the role that the local system assumes:</p> <ul style="list-style-type: none"> • Active — The active system initiates the BFD session. Both systems can be active for the same session. • Passive — The passive system does not initiate a session. It only responds to a request for session initialization from the active system. <p>The default is Active.</p>

Defaults	See Parameters
Command Modes	CONFIGURATION
Supported Modes	Full-Switch
Command History	

Version	Description
9.11(0.0)	Introduced the <code>prefix-list</code> keyword.
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip ospf bfd all-neighbors

Establish BFD sessions with all OSPF neighbors on a single interface or use non-default BFD session parameters.

Syntax	<pre>ip ospf bfd all-neighbors [disable [interval interval min_rx min_rx multiplier value role {active passive}]]</pre> <p>To disable all BFD sessions on an OSPF interface implicitly, use the <code>no ip ospf bfd all-neighbors disable</code> command in interface mode.</p>
---------------	--

Parameters	<p>disable (OPTIONAL) Enter the keyword <code>disable</code> to disable BFD on this interface.</p> <p>interval milliseconds (OPTIONAL) Enter the keyword <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 200.</p> <p>min_rx milliseconds Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system receives control packets from the remote system. The range is from 50 to 1000. The default is 200.</p> <p>multiplier value Enter the keyword <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3.</p>
-------------------	--

role [active | passive]

Enter the role that the local system assumes:

- *Active* — active system initiates the BFD session. Both systems can be active for the same session.
- *Passive* — passive system does not initiate a session. It only responds to a request for session initialization from the active system.

The default is **Active**.

Defaults See *Parameters*.

Command Modes INTERFACE

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.2)	Introduced support for enabling BFD on non-default VRFs for OSPFv2.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.8(2.0)	Introduced on the S3100 series.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.2.0.0	Introduced on the Z9000, S4820T, and S4810.

Usage Information This command provides the flexibility to fine-tune the timer values based on individual interface needs when you configure `ip ospf bfd` in CONFIGURATION mode. Any timer values specified with this command overrides timers set using the `bfd all-neighbors` command. Using the `no` form of this command does not disable BFD if you configure BFD in CONFIGURATION mode.

To disable BFD on a specific interface while you configure BFD in CONFIGURATION mode, use the keyword `disable`.

ipv6 ospf bfd all-neighbors

Establish BFD sessions with all OSPFv3 neighbors on a single interface or use non-default BFD session parameters.

Syntax `ipv6 ospf bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role {active | passive}]]`

To disable all BFD sessions on an OSPFv3 interface implicitly, use the `no ipv6 ospf bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role {active | passive}]]` command in interface mode..

Parameters

disable (OPTIONAL) Enter the keyword `disable` to disable BFD on this interface.

interval milliseconds (OPTIONAL) Enter the keyword `interval` to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is **200**.

min_rx milliseconds	Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system receives control packets from the remote system. The range is from 50 to 1000. The default is 200 .
multiplier value	Enter the keyword <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none"> • <code>Active</code> — The active system initiates the BFD session. Both systems can be active for the same session. • <code>Passive</code> — The passive system does not initiate a session. It only responds to a request for session initialization from the active system. <p>The default is Active.</p>

Defaults See Parameters

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

isis bfd all-neighbors

Enable BFD on all IS-IS neighbors discovered on an interface.

Syntax

```
isis bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role {active | passive}]]
```

To remove all BFD sessions with IS-IS neighbors discovered on this interface, use the `no isis bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role {active | passive}]]` command.

Parameters

disable	(OPTIONAL) Enter the keyword <code>disable</code> to disable BFD on this interface.
interval milliseconds	(OPTIONAL) Enter the keywords <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 200 .
min_rx milliseconds	Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system would like to receive control packets from the remote system. The range is from 50 to 1000. The default is 200 .
multiplier value	Enter the keywords <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none"> • <code>Active</code> — The active system initiates the BFD session. Both systems can be active for the same session.

- *Passive* — The passive system does not initiate a session. It only responds to a request for session initialization from the active system.

The default is **Active**.

Defaults See Parameters

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command provides the flexibility to fine-tune the timer values based on individual interface needs when ISIS BFD is configured in CONFIGURATION mode. Any timer values specified with this command overrides timers set using the `bfd all-neighbors` command. Using the `no` form of this command does not disable BFD if BFD is configured in CONFIGURATION mode.

To disable BFD on a specific interface while BFD is configured in CONFIGURATION mode, use the keyword `disable`.

neighbor bfd

Explicitly enable a BFD session with a BGP neighbor or a BGP peer group.

Syntax `neighbor {ip-address | peer-group-name} bfd`

Parameters

<i>ip-address</i>	Enter the IP address of the BGP neighbor that you want to explicitly enable for BFD sessions in dotted decimal format (A.B.C.D).
<i>peer-group-name</i>	Enter the name of the peer group that you want to explicitly enable for BFD sessions.

Defaults none

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you enable a BFD session with a specified BGP neighbor or peer group using the `bfd neighbor` command, the default BFD session parameters are used (interval: **200** milliseconds, min_rx: **200** milliseconds, multiplier: **3** packets, and role: **active**) if you have not specified parameters with the `bfd neighbor` command.

When you explicitly enable a BGP neighbor for a BFD session with the `bfd neighbor` command:

- The neighbor does not inherit the global BFD enable values configured with the `bfd neighbor` command or configured for the peer group to which the neighbor belongs.

- The neighbor only inherits the global timer values configured with the `bfd neighbor` command: `interval`, `min_rx`, and `multiplier`.

Related Commands [neighbor bfd disable](#) — explicitly disables a BFD session with a BGP neighbor or a BGP peer group.

[show bfd neighbors](#) — displays the BFD neighbor information on all interfaces or a specified interface.

neighbor bfd disable

Explicitly disable a BFD session with a BGP neighbor or a BGP peer group.

Syntax `neighbor {ip-address | peer-group-name} bfd disable`

Parameters

ip-address Enter the IP address of the BGP neighbor that you want to explicitly disable for BFD sessions in dotted decimal format (A.B.C.D).

peer-group-name Enter the name of the peer group that you want to explicitly disable for BFD sessions.

Defaults none

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you explicitly disable a BGP neighbor for a BFD session with the `neighbor bfd disable` command:

- The neighbor does not inherit the global BFD disable values configured with the `bfd all-neighbor` command or configured for the peer group to which the neighbor belongs.
- The neighbor only inherits the global timer values configured with the `bfd all-neighbor` command: `interval`, `min_rx`, and `multiplier`.

When you remove the Disabled state of a BFD for a BGP session with a specified neighbor by entering the `no neighbor bfd disable` command, the BGP link with the neighbor returns to normal operation and uses the BFD session parameters globally configured with the `bfd all-neighbor` command or configured for the peer group to which the neighbor belongs.

Related Commands [bfd all-neighbors](#) — enables BFD sessions with all neighbors discovered by Layer 3 protocols.

[show bfd neighbors](#) — displays the BFD neighbor information on all interfaces or a specified interface.

show bfd neighbors

Display BFD neighbor information on all interfaces or a specified interface.

Syntax `show bfd [vrf vrf name] neighbors [interface] [detail]`

Parameters

vrf vrf name	(Optional) Enter the keyword <code>vrf</code> and then the name of the VRF to display the BFD sessions with all neighbors within the VRF.
interface	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a port channel interface, enter the keywords <code>port-channel</code> then a number.For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.
detail	(OPTIONAL) Enter the keyword <code>detail</code> to view detailed information about BFD neighbors.

Defaults

None

Command Modes

- EXEC
- EXEC Privilege

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(2.1P1)	Introduced the <code>vrf</code> keyword on all the remaining Dell EMC Networking OS platforms.
9.10(0.2)	Introduced the <code>vrf</code> keyword on the S3048-ON, S4048-ON, S4048T-ON, S6010-ON, Z9100-ON, and S6100-ON.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.8(2.0)	Introduced on the S3100 series.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.2(1.0)	Introduced on the Z9500.
9.0.0.0	Introduced on the Z9000.
8.3.19.0	Introduced on the S4820T.
8.3.8.0	Added support for BFD for BGP on the S4810.
8.4.1.3	Added support for BFD for BGP on the E-Series.
8.2.1.0	Introduced on the E-Series.
7.6.1.0	Introduced on the C-Series.
7.5.1.0	Added support for BFD for VLAN and port-channel interfaces on the E-Series.
7.4.1.0	Introduced BFD on physical ports on the E-Series.

Example

The following example shows the `show bfd neighbors` command output for the default VRF.

Example (Detail)

Related Commands

- [bfd all-neighbors](#) — establish BFD sessions with all neighbors discovered by the IS-IS protocol or OSPF protocol out of all interfaces.

vrrp bfd neighbor

Establish a BFD for VRRP session with a neighbor.

Syntax `vrrp bfd neighbor ip-address`

Parameters `neighbor ip-address` Enter the IP address of the BFD neighbor.

Defaults none

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Border Gateway Protocol IPv4 (BGPv4)

For detailed information about configuring BGP, refer to the BGP chapter in the *Dell Networking OS Configuration Guide*.

This chapter contains the following sections:

- [BGPv4 Commands](#)
- [MBGP Commands](#)
- [BGP Extended Communities \(RFC 4360\)](#)

BGP IPv6 Commands are listed in the following sections:

- [IPv6 BGP Commands](#)
- [IPv6 MBGP Commands](#)

Topics:

- [BGPv4 Commands](#)
- [address-family](#)
- [aggregate-address](#)
- [bgp add-path](#)
- [bgp always-compare-med](#)
- [bgp asnotation](#)
- [bgp bestpath as-path ignore](#)
- [bgp bestpath as-path multipath-relax](#)
- [bgp bestpath med confed](#)
- [bgp bestpath med missing-as-best](#)
- [bgp bestpath router-id ignore](#)
- [bgp client-to-client reflection](#)
- [bgp cluster-id](#)
- [bgp confederation identifier](#)
- [bgp confederation peers](#)
- [bgp dampening](#)
- [bgp default local-preference](#)
- [bgp enforce-first-as](#)
- [bgp fast-external-failover](#)
- [bgp four-octet-as-support](#)
- [bgp graceful-restart](#)
- [bgp non-deterministic-med](#)
- [bgp outbound-optimization](#)
- [bgp recursive-bgp-next-hop](#)
- [bgp regex-eval-optz-disable](#)
- [bgp router-id](#)
- [bgp soft-reconfig-backup](#)

- capture bgp-pdu neighbor
- capture bgp-pdu max-buffer-size
- clear ip bgp
- clear ip bgp dampening
- clear ip bgp flap-statistics
- clear ip bgp peer-group
- debug ip bgp
- debug ip bgp dampening
- debug ip bgp events
- debug ip bgp keepalives
- debug ip bgp notifications
- debug ip bgp soft-reconfiguration
- debug ip bgp updates
- default-metric
- description
- max-paths
- neighbor activate
- neighbor add-path
- neighbor advertisement-interval
- neighbor advertisement-start
- neighbor allowas-in
- neighbor default-originate
- neighbor description
- neighbor distribute-list
- neighbor ebgp-multihop
- neighbor fall-over
- neighbor graceful-restart
- neighbor local-as
- neighbor maximum-prefix
- neighbor password
- neighbor peer-group (assigning peers)
- neighbor peer-group (creating group)
- neighbor peer-group passive
- neighbor remote-as
- neighbor remove-private-as
- neighbor route-map
- neighbor route-reflector-client
- neighbor shutdown
- neighbor soft-reconfiguration inbound
- neighbor timers
- neighbor update-source
- neighbor weight
- network
- network backdoor
- redistribute
- redistribute ospf
- router bgp

- shutdown all
- shutdown address-family-ipv4-multicast
- shutdown address-family-ipv4-unicast
- shutdown address-family-ipv6-unicast
- show capture bgp-pdu neighbor
- show config
- show ip bgp
- show ip bgp cluster-list
- show ip bgp community
- show ip bgp community-list
- show ip bgp dampened-paths
- show ip bgp detail
- show ip bgp extcommunity-list
- show ip bgp filter-list
- show ip bgp flap-statistics
- show ip bgp inconsistent-as
- show ip bgp neighbors
- show ip bgp next-hop
- show ip bgp paths
- show ip bgp paths as-path
- show ip bgp paths community
- show ip bgp peer-group
- show ip bgp regexp
- show ip bgp summary
- show running-config bgp
- timers bgp
- MBGP Commands
- BGP Extended Communities (RFC 4360)
- set extcommunity rt
- set extcommunity soo
- show ip bgp paths extcommunity
- show ip bgp extcommunity-list
- IPv6 BGP Commands
- bgp soft-reconfig-backup
- clear ip bgp ipv6 unicast soft
- debug ip bgp ipv6 unicast soft-reconfiguration
- ipv6 prefix-list
- show ipv6 prefix-list
- IPv6 MBGP Commands
- show ipv6 mbgproutes

BGPv4 Commands

Border gateway protocol (BGP) is an external gateway protocol that transmits interdomain routing information within and between autonomous systems (AS).

BGP version 4 (BGPv4) supports classless interdomain routing (CIDR) and the aggregation of routes and AS paths. Basically, two routers (called neighbors or peers) exchange information including full routing tables and periodically send messages to update those routing tables.

- ① **NOTE:** Dell Networking OS Version 7.7.1 supports 2-Byte (16-bit) and 4-Byte (32-bit) format for autonomous system numbers (ASNs), where the 2-Byte format is 1-65535 and the 4-Byte format is 1-4294967295.
- ① **NOTE:** Dell Networking OS Version 8.3.1.0 supports dotted format as well as the traditional plain format for AS numbers. Display the dot format using the `show ip bgp` commands. To determine the comparable dot format for an ASN from a traditional format, use `ASN/65536`. `ASN%65536`. For more information about using the 2-Byte or 4-Byte format, refer to the *Dell Networking OS Configuration Guide*.

address-family

Enable the IPv4 multicast or the IPv6 address family.

Syntax	<code>address-family [ipv4 multicast ipv6unicast]</code>	
Parameters	<code>ipv4 multicast</code>	Enter BGPv4 multicast mode.
	<code>ipv6 unicast</code>	Enter BGPv6 mode.
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

aggregate-address

To minimize the number of entries in the routing table, summarize a range of prefixes.

Syntax	<code>aggregate-address ip-address mask [advertise-map map-name] [as-set] [attribute-map map-name] [summary-only] [suppress-map map-name]</code>	
Parameters	<code>ip-address mask</code>	Enter the IP address and mask of the route to be the aggregate address. Enter the IP address in dotted decimal format (A.B.C.D) and mask in /prefix format (/x).
	<code>advertise-map map-name</code>	(OPTIONAL) Enter the keywords <code>advertise-map</code> then the name of a configured route map to set filters for advertising an aggregate route.
	<code>as-set</code>	(OPTIONAL) Enter the keyword <code>as-set</code> to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.
	<code>attribute-map map-name</code>	(OPTIONAL) Enter the keywords <code>attribute-map</code> then the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.
	<code>summary-only</code>	(OPTIONAL) Enter the keyword <code>summary-only</code> to advertise only the aggregate address. Specific routes are not advertised.

suppress-map *map-name* (OPTIONAL) Enter the keywords `suppress-map` then the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults Not configured.

Command Modes

- ROUTER BGP ADDRESS FAMILY
- ROUTER BGP ADDRESS FAMILY IPv6

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.

If routes within the aggregate are constantly changing, do not add the `as-set` parameter to the aggregate as the aggregate flaps to keep track of the changes in the AS_PATH.

In route maps used in the `suppress-map` parameter, routes meeting the `deny` clause are not suppress; in other words, they are allowed. The opposite is also true: routes meeting the `permit` clause are suppressed.

If the route is injected via the `network` command, that route still appears in the routing table if the `summary-only` parameter is configured in the `aggregate-address` command.

The `summary-only` parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the `neighbor distribute-list` command.

In the `show ip bgp` command, aggregates contain an 'a' in the first column and routes suppressed by the aggregate contain an 's' in the first column.

bgp add-path

Allow the advertisement of multiple paths for the same address prefix without the new paths replacing any previous ones.

Syntax `bgp add-path [send | receive | both] path-count`

Parameters

send	Enter the keyword <code>send</code> to indicate that the system sends multiple paths to peers.
receive	Enter the keyword <code>receive</code> to indicate that the system accepts multiple paths from peers.
both	Enter the keyword <code>both</code> to indicate that the system sends and accepts multiple paths from peers.
path-count	Enter the number paths supported. The range is from 2 to 64.

Defaults Disabled

Command Modes

- ROUTER BGP

· ROUTER BGP-address-family

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [neighbor add-path](#) — specifies that this neighbor/peer group can send/receive multiple path advertisements.

bgp always-compare-med

Allows you to enable comparison of the MULTI_EXIT_DISC (MED) attributes in the paths from different external ASs.

Syntax `bgp always-compare-med`
To disable comparison of MED, enter `no bgp always-compare-med`.

Defaults Disabled (that is, the software only compares MEDs from neighbors within the same AS).

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Any update without a MED attribute is the least preferred route.

If you enable this command, use the `clear ip bgp *` command to recompute the best path.

bgp asnotation

Allows you to implement a method for AS number representation in the command line interface (CLI).

Syntax `bgp asnotation [asplain | asdot+ | asdot]`
To disable a dot or dot+ representation and return to ASPLAIN, enter the `no bgp asnotation` command.

Defaults **asplain**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Before enabling this feature, enable the `enable bgp four-octet-as-support` command. If you disable the `four-octet-as-support` command after using dot or dot+ format, the AS numbers revert to asplain text.

When you apply an asnotation, it is reflected in the running-configuration. If you change the notation type, the running-config updates dynamically and the new notation shows.

Example

```
Dell(conf)#router bgp 1
Dell(conf-router_bgp)#bgp asnotation asdot
Dell(conf-router_bgp)#ex
Dell(conf)#do show run | grep bgp

router bgp 1
  bgp four-octet-as-support
  bgp asnotation asdot

Dell(conf)#router bgp 1
Dell(conf-router_bgp)#bgp asnotation asdot+
Dell(conf-router_bgp)#ex

Dell(conf)#do show run | grep bgp
router bgp 1
  bgp four-octet-as-support
  bgp asnotation asdot+

Dell(conf)#router bgp 1
Dell(conf-router_bgp)#bgp asnotation asplain
Dell(conf-router_bgp)#ex
Dell(conf)#do show run |grep bgp
router bgp 1
  bgp four-octet-as-support

Dell(conf)#
```

Related Commands [bgp four-octet-as-support](#) — enables 4-byte support for the BGP process.

bgp bestpath as-path ignore

Ignore the AS PATH in BGP best path calculations.

Syntax

```
bgp bestpath as-path ignore
```

To return to the default, enter the `no bgp bestpath as-path ignore` command.

Defaults

Disabled (that is, the software considers the AS_PATH when choosing a route as best).

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you enable this command, use the `clear ip bgp *` command to recompute the best path.

bgp bestpath as-path multipath-relax

Include prefixes received from different AS paths during multipath calculation.

Syntax `bgp bestpath as-path multipath-relax`
To return to the default BGP routing process, use the `no bgp bestpath as-path multipath-relax` command.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `bestpath router bgp configuration mode` command changes the default bestpath selection algorithm. The `multipath-relax` option allows load-sharing across providers with different (but equal-length) autonomous system paths. Without this option, ECMP expects the AS paths to be identical for load-sharing.

bgp bestpath med confed

Enable MULTI_EXIT_DISC (MED) attribute comparison on paths learned from BGP confederations.

Syntax `bgp bestpath med confed`
To disable MED comparison on BGP confederation paths, enter the `no bgp bestpath med confed` command.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The software compares the MEDs only if the path contains no external autonomous system numbers. If you enable this command, use the `clear ip bgp *` command to recompute the best path.

bgp bestpath med missing-as-best

During path selection, indicate preference to paths with missing MED (MULTI_EXIT_DISC) over paths with an advertised MED attribute.

Syntax `bgp bestpath med missing-as-best`

To return to the default selection, use the `no bgp bestpath med missing-as-best` command.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The MED is a 4-byte unsigned integer value and the default behavior is to assume a missing MED as 4294967295. This command causes a missing MED to be treated as 0. During path selection, paths with a lower MED are preferred over paths with a higher MED.

bgp bestpath router-id ignore

Do not compare router-id information for external paths during best path selection.

Syntax `bgp bestpath router-id ignore`
To return to the default selection, use the `no bgp bestpath router-id ignore` command.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Configuring this option retains the current best-path. When sessions are then reset, the oldest received path is chosen as the best-path.

bgp client-to-client reflection

Allows you to enable route reflection between clients in a cluster.

Syntax `bgp client-to-client reflection`
To disable client-to-client reflection, use the `no bgp client-to-client reflection` command.

Defaults Enabled when a route reflector is configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Route reflection to clients is not necessary if all client routers are fully meshed.

Related Commands [bgp cluster-id](#) — assigns an ID to a BGP cluster with two or more route reflectors.
[neighbor route-reflector-client](#) — configures a route reflector and clients.

bgp cluster-id

Assign a cluster ID to a BGP cluster with more than one route reflector.

Syntax `bgp cluster-id {ip-address | number}`
 To delete a cluster ID, use the `no bgp cluster-id {ip-address | number}` command.

Parameters

<i>ip-address</i>	Enter an IP address as the route reflector cluster ID.
<i>number</i>	Enter a route reflector cluster ID as a number from 1 to 4294967295.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When a BGP cluster contains only one route reflector, the cluster ID is the route reflector's router ID. For redundancy, a BGP cluster may contain two or more route reflectors. Assign a cluster ID with the `bgp cluster-id` command. Without a cluster ID, the route reflector cannot recognize route updates from the other route reflectors within the cluster.

The default format for displaying the cluster-id is dotted decimal, but if you enter the cluster-id as an integer, it is displayed as an integer.

Related Commands [bgp client-to-client reflection](#) — enables route reflection between the route reflector and clients.
[neighbor route-reflector-client](#) — configures a route reflector and clients.
[show ip bgp cluster-list](#) — views paths with a cluster ID.

bgp confederation identifier

Configure an identifier for a BGP confederation.

Syntax `bgp confederation identifier as-number`

To delete a BGP confederation identifier, use the `no bgp confederation identifier as-number` command.

Parameters

<i>as-number</i>	Enter the AS number. The range is from 0 to 65535 (2 byte), from 1 to 4294967295 (4 byte), or from 0.1 to 65535.65535 (dotted format).
-------------------------	--

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To accept 4-byte formats before entering a 4-byte AS number, configure your system. All the routers in the Confederation must be 4 byte or 2 byte identified routers. You cannot mix them.

The autonomous systems configured in this command are visible to the EBGP neighbors. Each autonomous system is fully meshed and contains a few connections to other autonomous systems. The next hop, MED, and local preference information is preserved throughout the confederation.

The system accepts confederation EBGP peers without a LOCAL_PREF attribute. The software sends AS_CONFED_SET and accepts AS_CONFED_SET and AS_CONF_SEQ.

Related Commands [bgp four-octet-as-support](#) — enables 4-byte support for the BGP process.

bgp confederation peers

Specify the autonomous systems (ASs) that belong to the BGP confederation.

Syntax

```
bgp confederation peers as-number [...as-number]
```

To return to the default, use the `no bgp confederation peers` command.

Parameters

<i>as-number</i>	Enter the AS number. The range is from 0 to 65535 (2 byte), from 1 to 4294967295 (4 byte), or from 0.1 to 65535.65535 (dotted format).
<i>...as-number</i>	(OPTIONAL) Enter up to 16 confederation numbers. The range is from 0 to 65535 (2 byte), from 1 to 4294967295 (4 byte), or from 0.1 to 65535.65535 (dotted format).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information All the routers in the Confederation must be 4 byte or 2 byte identified routers. You cannot mix them.

The autonomous systems configured in this command are visible to the EBGp neighbors. Each autonomous system is fully meshed and contains a few connections to other autonomous systems.

After specifying autonomous systems numbers for the BGP confederation, recycle the peers to update their configuration.

Related Commands [bgp confederation identifier](#) — configures a confederation ID.

[bgp four-octet-as-support](#) — enables 4-byte support for the BGP process.

bgp dampening

Enable BGP route dampening and configure the dampening parameters.

Syntax `bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]`
 To disable route dampening, use the `no bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]` command.

Parameters

<i>half-life</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half after the half-life period expires. The range is from 1 to 45. The default is 15 minutes .
<i>reuse</i>	(OPTIONAL) Enter a number as the reuse value, which is compared to the flapping route's Penalty value. If the Penalty value is less than the reuse value, the flapping route is once again advertised (or no longer suppressed). The range is from 1 to 20000. The default is 750 .
<i>suppress</i>	(OPTIONAL) Enter a number as the suppress value, which is compared to the flapping route's Penalty value. If the Penalty value is greater than the suppress value, the flapping route is no longer advertised (that is, it is suppressed). The range is from 1 to 20000. The default is 2000 .
<i>max-suppress-time</i>	(OPTIONAL) Enter the maximum number of minutes a route can be suppressed. The default is four times the half-life value. The range is from 1 to 255. The default is 60 minutes .
<i>route-map map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> then the name of a configured route map. Only <code>match</code> commands in the configured route map are supported.

Defaults Disabled.

Command Modes

- ROUTER BGP
- ROUTER BGP-address-family

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you enter the `bgp dampening` command, the default values for *half-life*, *reuse*, *suppress*, and *max-suppress-time* are applied. The parameters are position-dependent; therefore, if you configure one parameter, configure the parameters in the order they appear in the CLI.

Related Commands [show ip bgp dampened-paths](#) — views the BGP paths.

bgp default local-preference

Change the default local preference value for routes exchanged between internal BGP peers.

Syntax

```
bgp default local-preference value
```

To return to the default value, use the `no bgp default local-preference` command.

Parameters

value

Enter a number to assign to routes as the degree of preference for those routes. When routes are compared, the higher the degree of preference or local preference value, the more the route is preferred. The range is from 0 to 4294967295. The default is **100**.

Defaults

100

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

All routers apply the `bgp default local-preference` command setting within the AS. To set the local preference for a specific route, use the `set local-preference` command in ROUTE-MAP mode.

Related Commands [set metric](#) — assigns a local preference value for a specific route.

bgp enforce-first-as

Disable (or enable) enforce-first-as check for updates received from EBGp peers.

Syntax

```
bgp enforce-first-as
```

To turn off the default, use the `no bgp enforce-first-as` command.

Defaults

Enabled

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command is enabled by default, that is for all updates received from EBGP peers, BGP ensures that the first AS of the first AS segment is always the AS of the peer. If not, the update is dropped and a counter is increments. To view the “failed enforce-first-as check” counter, use the `show ip bgp neighbors` command.

If you disable the `enforce-first-as` command, it can be viewed using the `show ip protocols` command.

Related Commands

`show ip bgp neighbors` — views the information the BGP neighbors exchange.

`show ip protocols` — views information on routing protocols.

bgp fast-external-failover

Enable the fast external failover feature, which immediately resets the BGP session if a link to a directly connected external peer fails.

Syntax

`bgp fast-external-failover`

To disable fast external failover, use the `no bgp fast-external-failover` command.

Defaults

Enabled

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `bgp fast-external-failover` command appears in the `show config` command output.

bgp four-octet-as-support

Enable 4-byte support for the BGP process.

Syntax

`bgp four-octet-as-support`

To disable fast external failover, use the `no bgp four-octet-as-support` command.

Defaults

Disabled (supports 2-byte format)

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Routers supporting 4-byte ASNs advertise that function in the OPEN message. The behavior of a 4-byte router is slightly different depending on whether it is speaking to a 2-byte router or a 4-byte router.

When creating Confederations, all the routers in the Confederation must be 4 byte or 2 byte identified routers. You cannot mix them.

Where the 2-byte format is from 1 to 65535, the 4-byte format is from 1 to 4294967295. Both formats are accepted and the advertisements reflect the entered format.

For more information about using the 2 byte or 4-byte format, refer to the *Dell Networking OS Configuration Guide*.

bgp graceful-restart

To support graceful restart as a receiver only, enable graceful restart on a BGP neighbor, a BGP node, or designate a local router.

Syntax

```
bgp graceful-restart [restart-time seconds] [stale-path-time seconds] [role receiver-only]
```

To return to the default, use the `no bgp graceful-restart` command.

Parameters

restart-time seconds	Enter the keyword <code>restart-time</code> then the maximum number of seconds to restart and bring-up all the peers. The range is from 1 to 3600 seconds. The default is 120 seconds .
stale-path-time seconds	Enter the keyword <code>stale-path-time</code> then the maximum number of seconds to wait before restarting a peer's stale paths. The default is 360 seconds .
role receiver-only	Enter the keyword <code>role receiver-only</code> to designate the local router to support graceful restart as a receiver only.

Defaults

as above

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This feature is advertised to BGP neighbors through a capability advertisement. In Receiver Only mode, BGP saves the advertised routes of peers that support this capability when they restart.

BGP graceful restart is active only when the neighbor becomes established. Otherwise it is disabled. Graceful-restart applies to all neighbors with established adjacency.

bgp non-deterministic-med

Compare MEDs of paths from different autonomous systems.

Syntax	<code>bgp non-deterministic-med</code> To return to the default, use the <code>no bgp non-deterministic-med</code> command.						
Defaults	Disabled (that is, paths/routes for the same destination but from different ASs do not have their MEDs compared).						
Command Modes	ROUTER BGP						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	<p>In Non-Deterministic mode, paths are compared in the order in which they arrive. This method can lead to the system choosing different best paths from a set of paths, depending on the order in which they are received from the neighbors because MED may or may not get compared between adjacent paths. In Deterministic mode (<code>no bgp non-deterministic-med</code>), the system compares MED between adjacent paths within an AS group because all paths in the AS group are from the same AS.</p> <p>When you change the path selection from Deterministic to Non-Deterministic, the path selection for the existing paths remains Deterministic until you enter the <code>clear ip bgp</code> command to clear existing paths.</p>						

bgp outbound-optimization

Enables outbound optimization for IBGP peer-group members.

Syntax	<code>bgp outbound-optimization</code> To disable outbound optimization, enter the <code>no bgp outbound-optimization</code> command.						
Defaults	Enabled.						
Command Modes	ROUTER BGP						
Command History	<p>This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell EMC Networking OS Command Line Reference Guide</i>.</p> <p>The following is a list of the Dell EMC Networking OS version history for this command.</p> <table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.4(0.0)</td><td>Introduced on the S4810.</td></tr><tr><td>9.2(1.0)</td><td>Introduced on the Z9500.</td></tr></tbody></table>	Version	Description	9.4(0.0)	Introduced on the S4810.	9.2(1.0)	Introduced on the Z9500.
Version	Description						
9.4(0.0)	Introduced on the S4810.						
9.2(1.0)	Introduced on the Z9500.						
Usage Information	The updates are sent to all the neighbors in the peer-group and all the neighbors have the same attributes including next-hop.						

Enabling or disabling outbound optimization dynamically resets all neighbor sessions.

When you enable outbound optimization, all peers receive the same update packets. Also, the next-hop address, which is chosen as one of the addresses of the neighbor's reachable interface, is the same for all peers.

bgp recursive-bgp-next-hop

Enable next-hop resolution through other routes learned by BGP.

Syntax `bgp recursive-bgp-next-hop`
To disable next-hop resolution, use the `no bgp recursive-bgp-next-hop` command.

Defaults Enabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is a *knob* to disable BGP next-hop resolution using BGP learned routes. During the next-hop resolution, only the first route that the next-hop resolves through is verified for the route's protocol source and is checked if the route is learned from BGP or not.

The `clear ip bgp` command is required for this command to take effect and to keep the BGP database consistent. Execute the `clear ip bgp` command right after executing this command.

Related Commands `clear ip bgp` — clears the ip bgp.

bgp regex-eval-optz-disable

Disables the Regex Performance engine that optimizes complex regular expression with BGP.

Syntax `bgp regex-eval-optz-disable`
To re-enable optimization engine, use the `no bgp regex-eval-optz-disable` command.

Defaults Enabled

Command Modes ROUTER BGP (conf-router_bgp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

BGP uses regular expressions (regex) to filter route information. In particular, the use of regular expressions to filter routes based on AS-PATHs and communities is common. In a large-scale configuration, filtering millions of routes based on regular expressions can be quite CPU intensive, as a regular expression evaluation involves generation and evaluation of complex finite state machines.

BGP policies, containing regular expressions to match as-path and communities, tend to use much CPU processing time, which in turn affects the BGP routing convergence. Additionally, the `show bgp` commands, which are filtered through regular expressions, use up CPU cycles particularly with large databases. The Regex Engine Performance Enhancement feature optimizes the CPU usage by caching and reusing regular expression evaluation results. This caching and reuse may be at the expensive of RP1 processor memory.

Examples

```
Dell(conf-router_bgp)#no bgp regex-eval-optz-disable
Dell(conf-router_bgp)#do show ip protocols
Routing Protocol is "ospf 22222"
  Router ID is 2.2.2.2
  Area           Routing for Networks
  51             10.10.10.0/00

Routing Protocol is "bgp 1"
  Cluster Id is set to 10.10.10.0
  Router Id is set to 10.10.10.0
  Fast-external-fallover enabled
  Regular expression evaluation optimization enabled
  Capable of ROUTE_REFRESH
  For Address Family IPv4 Unicast
    BGP table version is 0, main routing table version 0
    Distance: external 20 internal 200 local 200

Dell(conf-router_bgp)#
```

Related Commands [show ip protocols](#) — views information on all routing protocols enabled and active.

bgp router-id

Assign a user-given ID to a BGP router.

Syntax

```
bgp router-id ip-address
```

To delete a user-assigned IP address, use the `no bgp router-id` command.

Parameters

ip-address Enter an IP address in dotted decimal format to reset only that BGP neighbor.

Defaults

The router ID is the highest IP address of the Loopback interface or, if no Loopback interfaces are configured, the highest IP address of a physical interface on the router.

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Peering sessions are reset when you change the router ID of a BGP router.

bgp soft-reconfig-backup

To avoid the peer from resending messages, use this command *only* when route-refresh is *not* negotiated.

Syntax `bgp soft-reconfig-backup`
To return to the default setting, use the `no bgp soft-reconfig-backup` command.

Defaults **Off**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable soft-reconfiguration for a neighbor and you execute the `clear ip bgp soft in` command, the update database stored in the router is replayed and updates are re-evaluated. With this command, the replay and update process is triggered only if route-refresh request is not negotiated with the peer. If the request is indeed negotiated (after executing the `clear ip bgp soft in` command), BGP sends a route-refresh request to the neighbor and receives all of the peer's updates.

Related Commands `clear ip bgp` — activates inbound policies without resetting the BGP TCP session.

capture bgp-pdu neighbor

Enable capture of an IPv4 BGP neighbor packet.

Syntax `capture bgp-pdu neighbor ipv4-address direction {both | rx | tx}`
To disable capture of the IPv4 BGP neighbor packet, use the `no capture bgp-pdu neighbor ipv4-address` command.

Parameters

ipv4-address	Enter the IPv4 address of the target BGP neighbor.
direction {both rx tx}	Enter the keyword <code>direction</code> and a direction — either <code>rx</code> for inbound, <code>tx</code> for outbound, or <code>both</code> .

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [capture bgp-pdu max-buffer-size](#) — specifies a size for the capture buffer.
[show capture bgp-pdu neighbor](#) — displays BGP packet capture information.

capture bgp-pdu max-buffer-size

Set the size of the BGP packet capture buffer. This buffer size pertains to both IPv4 and IPv6 addresses.

Syntax `capture bgp-pdu max-buffer-size 100-102400000`

Parameters `100-102400000` Enter a size for the capture buffer.

Defaults **40960000 bytes.**

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [capture bgp-pdu neighbor](#) — enables capture of an IPv4 BGP neighbor packet.
[show capture bgp-pdu neighbor](#) — displays BGP packet capture information for an IPv6 address.

clear ip bgp

Reset BGP sessions. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax `clear ip bgp * | as-number | ip-address [flap-statistics | soft [in | out]]`

Parameters

- *** Enter an asterisk (*) to reset all BGP sessions.
- as-number** Enter the AS number to reset all neighbors belonging to that AS. The range is from 0 to 65535 (2 byte), from 1 to 4294967295 (4 byte), or from 0.1 to 65535.65535 (dotted format).
- ip-address** Enter an IP address in dotted decimal format to reset all prefixes from that neighbor.
- flap-statistics** (OPTIONAL) Enter the keyword `flap-statistics` to reset the flap statistics on all prefixes from that neighbor.
- soft** (OPTIONAL) Enter the keyword `soft` to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration.
NOTE: If you enter the `clear ip bgp ip-address soft` command, both inbound and outbound policies are reset.
- in** (OPTIONAL) Enter the keyword `in` to activate only inbound policies.
- out** (OPTIONAL) Enter the keyword `out` to activate only outbound policies.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [bgp recursive-bgp-next-hop](#) — disables next-hop resolution through other routes learned by the BGP.

[bgp soft-reconfig-backup](#) — turns on BGP Soft Reconfiguration.

clear ip bgp dampening

Clear information on route dampening and return the suppressed route to the Active state.

Syntax `clear ip bgp dampening [ip-address mask]`

Parameters

<i>ip-address mask</i>	(OPTIONAL) Enter an IP address in dotted decimal format and the prefix mask in slash format (/x) to clear dampening information only that BGP neighbor.
------------------------	---

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information After you enter this command, the software deletes the history routes and returns the suppressed routes to the Active state.

clear ip bgp flap-statistics

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

Syntax `clear ip bgp flap-statistics [ip-address mask | filter-list as-path-name | regexp regular-expression]`

Parameters

<i>ip-address mask</i>	(OPTIONAL) Enter an IP address in dotted decimal format and the prefix mask in slash format (/x) to reset only that prefix.
<i>filter-list as-path-name</i>	(OPTIONAL) Enter the keywords <code>filter-list</code> then the name of a configured AS-PATH list.
<i>regexp regular-expression</i>	(OPTIONAL) Enter the keyword <code>regexp</code> then regular expressions. Use one or a combination of the following: <ul style="list-style-type: none">• <code>.</code> = (period) any single character (including a white space).• <code>*</code> = (asterisk) the sequences in a pattern (0 or more sequences).

- + = (plus) the sequences in a pattern (1 or more sequences).
- ? = (question mark) sequences in a pattern (either 0 or 1 sequences).

NOTE: Enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- [] = (brackets) a range of single-character patterns.
- () = (parenthesis) groups a series of pattern elements to a single element.
- { } = (braces) minimum and the maximum match count.
- ^ = (caret) the beginning of the input string. If you use the caret at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you enter the `clear ip bgp flap-statistics` command without any parameters, all statistics are cleared.

Related Commands [show debugging](#) — views the enabled debugging operations.

[show ip bgp flap-statistics](#) — views the BGP flap statistics.

[undebug all](#) — disables all debugging operations.

clear ip bgp peer-group

Reset a peer-group's BGP sessions.

Syntax `clear ip bgp peer-group peer-group-name`

Parameters *peer-group-name* Enter the peer group name to reset the BGP sessions within that peer group.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip bgp

Display all information on BGP, including BGP events, keepalives, notifications, and updates.

Syntax `debug ip bgp [ip-address | peer-group peer-group-name] [in | out]`

To disable all BGP debugging, use the `no debug ip bgp` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group peer-group-name</i>	Enter the keywords <code>peer-group</code> then the name of the peer group to debug.
<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view only information on inbound BGP routes.
<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view only information on outbound BGP routes.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view information on both incoming and outgoing routes, do not include the `in` and `out` parameters in the debugging command. The `in` and `out` parameters cancel each other; for example, if you enter the `debug ip bgp in` command and then enter the `debug ip bgp out` command, you do not see information on the incoming routes.

Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

Related Commands

- [debug ip bgp events](#) — views information about BGP events.
- [debug ip bgp keepalives](#) — views information about BGP keepalives.
- [debug ip bgp notifications](#) — views information about BGP notifications.
- [debug ip bgp updates](#) — views information about BGP updates.
- [show debugging](#) — views enabled debugging operations.

debug ip bgp dampening

View information on routes being dampened.

Syntax `debug ip bgp dampening [in | out]`

To disable debugging, use the `no debug ip bgp dampening` command.

Parameters

<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view only inbound dampened routes.
------------------	--

out (OPTIONAL) Enter the keyword `out` to view only outbound dampened routes.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show debugging](#) — view enabled debugging operations.

[show ip bgp dampened-paths](#) — view BGP dampened routes.

debug ip bgp events

Display information on local BGP state changes and other BGP events.

Syntax `debug ip bgp [ip-address | peer-group peer-group-name] events [in | out]`
To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] events` command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keyword <code>peer-group</code> then the name of the peer group.
<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view only events on inbound BGP messages.
<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view only events on outbound BGP messages.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To remove all configured debug commands for BGP, enter the `no debug ip bgp` command.

debug ip bgp keepalives

Display information about BGP keepalive messages.

Syntax `debug ip bgp [ip-address | peer-group peer-group-name] keepalives [in | out]`

To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] keepalives [in | out]` command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keyword <code>peer-group</code> then the name of the peer group.
	<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view only inbound keepalive messages.
	<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view only outbound keepalive messages.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To remove all configured debug commands for BGP, enter the `no debug ip bgp` command.

debug ip bgp notifications

Allows you to view information about BGP notifications received from neighbors.

Syntax `debug ip bgp [ip-address | peer-group peer-group-name] notifications [in | out]`
To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] notifications [in | out]` command.

Parameters	<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keyword <code>peer-group</code> then the name of the peer group.
	<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view BGP notifications received from neighbors.
	<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view BGP notifications sent to neighbors

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To remove all configured debug commands for BGP, enter the `no debug ip bgp` command.

debug ip bgp soft-reconfiguration

Enable soft-reconfiguration debug.

Syntax	<code>debug ip bgp {ip-address peer-group-name} soft-reconfiguration</code> To disable, use the <code>no debug ip bgp {ip-address peer-group-name} soft-reconfiguration</code> command.	
Parameters	ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	peer-group-name	(OPTIONAL) Enter the name of the peer group to disable or enable all routers within the peer group..
Defaults	Disabled	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	This command turns on BGP soft-reconfiguration inbound debugging. If no neighbor is specified, debug turns on for all neighbors.	

debug ip bgp updates

Allows you to view information about BGP updates.

Syntax	<code>debug ip bgp updates [in out prefix-list prefix-list-name]</code> To disable debugging, use the <code>no debug ip bgp [ip-address peer-group peer-group-name] updates [in out]</code> command.	
Parameters	in	(OPTIONAL) Enter the keyword <code>in</code> to view only BGP updates received from neighbors.
	out	(OPTIONAL) Enter the keyword <code>out</code> to view only BGP updates sent to neighbors.
	prefix-list prefix-list-name	(OPTIONAL) Enter the keyword <code>prefix-list</code> then the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
	ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	peer-group-name	(OPTIONAL) Enter the name of the peer group to disable or enable all routers within the peer group.
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To remove all configured debug commands for BGP, enter the `no debug ip bgp` command.

default-metric

Allows you to change the metric of redistributed routes to locally originated routes. Use this command with the `redistribute` command.

Syntax

`default-metric number`

To return to the default setting, use the `no default-metric` command.

Parameters

number Enter a number as the metric to be assigned to routes from other protocols. The range is from 1 to 4294967295.

Defaults

0

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `default-metric` command in BGP sets the value of the BGP MULTI_EXIT_DISC (MED) attribute for redistributed routes only.

Related Commands

[bgp always-compare-med](#) — enables comparison of all BGP MED attributes.

[redistribute](#) — redistributes routes from other routing protocols into BGP.

description

Enter a description of the BGP routing protocol

Syntax

`description {description}`

To remove the description, use the `no description {description}` command.

Parameters

description Enter a description to identify the BGP protocol (80 characters maximum).

Defaults

none

Command Modes ROUTER BGP

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `router bgp` — enters ROUTER mode on the switch.

max-paths

Configure the maximum number of parallel routes (multipath support) BGP supports.

Syntax `max-paths {ebgp | ibgp} number`
To return to the default values, enter the `no maximum-paths` command.

Parameters

ebgp	Enter the keyword <code>ebgp</code> to enable multipath support for External BGP routes.
ibgp	Enter the keyword <code>ibgp</code> to enable multipath support for Internal BGP routes.
number	Enter a number as the maximum number of parallel paths. The range is from 2 to 64.

Defaults none

Command Modes ROUTER BGP

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you enable this command, use the `clear ip bgp *` command to recompute the best path.

neighbor activate

This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI (Address Family Identifier/Subsequent Address Family Identifier).

Syntax `neighbor [ip-address | peer-group-name] activate`
To disable, use the `no neighbor [ip-address | peer-group-name] activate` command.

Parameters

ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
peer-group-name	(OPTIONAL) Enter the name of the peer group.
activate	Enter the keyword <code>activate</code> to enable the neighbor/peer group in the new AFI/SAFI.

Defaults	Disabled	
Command Modes	CONFIGURATION-ROUTER-BGP-ADDRESS FAMILY	
Supported Modes	Full–Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	By default, when you create a neighbor/peer group configuration in the Router BGP context, this enables IPv4/Unicast AFI/SAFI. When you use <code>activate</code> in the new context, the neighbor/peer group enables for AFI/SAFI.	

neighbor add-path

This command allows the specified neighbor/peer group to send/receive multiple path advertisements.

Syntax `neighbor [ip-address | peer-group-name] add-path [send | receive | both] count`

Parameters	ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
	peer-group-name	(OPTIONAL) Enter the name of the peer group.
	send	Enter the keyword <code>send</code> to indicate that the system sends multiple paths to peers.
	receive	Enter the keyword <code>receive</code> to indicate that the system accepts multiple paths from peers.
	both	Enter the keyword <code>both</code> to indicate that the system sends and accepts multiple paths from peers.
	count	Enter the number paths supported. The range is from 2 to 64.

Defaults	none	
Command Modes	CONFIGURATION-ROUTER-BGP-ADDRESS FAMILY	
Supported Modes	Full–Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `bgp add-path` — allows the advertisement of multiple paths for the same address prefix without the new paths implicitly replacing any previous ones.

neighbor advertisement-interval

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax `neighbor {ip-address | peer-group-name} advertisement-interval seconds`

To return to the default value, use the `no neighbor {ip-address | peer-group-name} advertisement-interval` command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. The range is from 0 to 600 seconds. The default is 5 seconds for internal BGP peers and 30 seconds for external BGP peers.

Defaults

- seconds = **5 seconds** (internal peers)
- seconds = **30 seconds** (external peers)

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor advertisement-start

To send BGP routing updates, set the minimum interval before starting.

Syntax

```
neighbor {ip-address} advertisement-start seconds
```

To return to the default value, use the `no neighbor {ip-address} advertisement-start` command.

Parameters

<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
<i>seconds</i>	Enter a number as the time interval, in seconds, before BGP route updates are sent. The range is from 0 to 3600 seconds.

Defaults none

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor allowas-in

Set the number of times an AS number can occur in the AS path.

Syntax `neighbor {ip-address | peer-group-name} allowas-in number`
To return to the default value, use the `no neighbor {ip-address | peer-group-name} allowas-in` command.

Parameters

ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
peer-group-name	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
number	Enter a number of times to allow this neighbor ID to use the AS path. The range is from 1 to 10.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [bgp four-octet-as-support](#) — enables 4-byte support for the BGP process.

neighbor default-originate

Inject the default route to a BGP peer or neighbor.

Syntax `neighbor {ip-address | peer-group-name} default-originate [route-map map-name]`
To remove a default route, use the `no neighbor {ip-address | peer-group-name} default-originate` command.

Parameters

ip-address	(OPTIONAL) Enter the IP address of the neighbor in dotted decimal format.
peer-group-name	Enter the name of the peer group to set the default route of all routers in that peer group.
route-map map-name	(OPTIONAL) Enter the keyword <code>route-map</code> then the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you apply a route map to a BGP peer or neighbor with the `neighbor default-originate` command configured, the software does not apply the set filters in the route map to that BGP peer or neighbor.

neighbor description

Assign a character string describing the neighbor or group of neighbors (peer group).

Syntax `neighbor {ip-address | peer-group-name} description text`
 To delete a description, use the `no neighbor {ip-address | peer-group-name} description` command.

Parameters		
<i>ip-address</i>		Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>		Enter the name of the peer group.
<i>text</i>		Enter a continuous text string up to 80 characters.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor distribute-list

Distribute BGP information via an established prefix list.

Syntax `neighbor {ip-address | peer-group-name} distribute-list prefix-list-name {in | out}`
 To delete a neighbor distribution list, use the `no neighbor {ip-address | peer-group-name} distribute-list prefix-list-name {in | out}` command.

Parameters		
<i>ip-address</i>		Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>		Enter the name of the peer group to apply the distribute list filter to all routers in the peer group.
<i>prefix-list-name</i>		Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
<i>in</i>		Enter the keyword <code>in</code> to distribute only inbound traffic.

out Enter the keyword `out` to distribute only outbound traffic.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Other BGP filtering commands include: `neighbor filter-list`, `ip as-path access-list`, and `neighbor route-map`.

Related Commands [neighbor route-map](#) — assigns a route map to a neighbor or peer group.

neighbor ebgp-multihop

Attempt and accept BGP connections to external peers on networks that are not directly connected.

Syntax `neighbor {ip-address | peer-group-name} ebgp-multihop [ttl]`
To disallow and disconnect connections, use the `no neighbor {ip-address | peer-group-name} ebgp-multihop` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>ttl</i>	(OPTIONAL) Enter the number of hops as the Time to Live (ttl) value. The range is from 1 to 255. The default is 255 .

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To prevent loops, the `neighbor ebgp-multihop` command does not install the default routes of the multihop peer. Networks not directly connected are not considered valid for best-path selection.

neighbor fall-over

Enable or disable fast fall-over for BGP neighbors.

Syntax `neighbor {ipv4-address | peer-group-name} fall-over`

To disable, use the `no neighbor {ipv4-address | peer-group-name} fall-over` command.

Parameters	<i>ipv4-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group.

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable failover, BGP keeps track of IP or IPv6 ability to reach the peer remote address and the peer local address. Whenever either address becomes unreachable (for example, no active route exists in the routing table for the peer IP or IPv6 destination/local address), BGP brings down the session with the peer.

Related Commands [show ip bgp neighbors](#) — displays information on the BGP neighbors.

neighbor graceful-restart

Enable graceful restart on a BGP neighbor.

Syntax `neighbor {ip-address | peer-group-name} graceful-restart [restart-time seconds] [stale-path-time seconds] [role receiver-only]`
To return to the default, enter the `no bgp graceful-restart` command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
	<i>restart-time seconds</i>	Enter the keyword <code>restart-time</code> then the maximum number of seconds to restart and bring-up all the peers. The range is from 1 to 3600 seconds. The default is 120 seconds .
	<i>stale-path-time seconds</i>	Enter the keyword <code>stale-path-time</code> then the maximum number of seconds to wait before restarting a peer's stale paths. The default is 360 seconds .
	<i>role receiver-only</i>	Enter the keyword <code>role receiver-only</code> to designate the local router to support graceful restart as a receiver only.

Defaults as above

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This feature advertises to BGP neighbors through a capability advertisement. In Receiver Only mode, BGP saves the advertised routes of peers that support this capability when they restart.

neighbor local-as

To accept external routes from neighbors with a local AS number in the AS number path, configure Internal BGP (IBGP) routers.

Syntax `neighbor {ip-address | peer-group-name} local-as as-number [no-prepend]`
To return to the default value, use the `no neighbor {ip-address | peer-group-name} local-as` command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
	<i>as-number</i>	Enter the AS number to reset all neighbors belonging to that AS. The range is from 0 to 65535 (2 byte), from 1 to 4294967295 (4 byte) or from 0.1 to 65535.65535 (dotted format).
	<i>no prepend</i>	Specifies that local AS values do not prepend to announcements from the neighbor.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [bgp four-octet-as-support](#) — enables 4-byte support for the BGP process.

neighbor maximum-prefix

Control the number of network prefixes received.

Syntax `neighbor {ip-address | peer-group-name} maximum-prefix maximum [threshold] [warning-only]`
To return to the default values, use the `no neighbor {ip-address | peer-group-name} maximum-prefix maximum` command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
	<i>peer-group-name</i>	Enter the name of the peer group.
	<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. The range is from 1 to 4294967295.

threshold (OPTIONAL) Enter a number to be used as a percentage of the maximum value. When the number of prefixes reaches this percentage of the maximum value, the software sends a message. The range is from 1 to 100 percent. The default is **75**.

warning-only (OPTIONAL) Enter the keyword `warning-only` to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults threshold = **75**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you configure the `neighbor maximum-prefix` command and the neighbor receives more prefixes than the `neighbor maximum-prefix` command configuration allows, the neighbor goes down and the `show ip bgp summary` command displays (prfxd) in the State/PfxRcd column for that neighbor. The neighbor remains down until you enter the `clear ip bgp` command for the neighbor or the peer group to which the neighbor belongs or you enter the `neighbor shutdown` and `neighbor no shutdown` commands.

Related Commands [show ip bgp summary](#) — displays the current BGP configuration.

neighbor password

Enable message digest 5 (MD5) authentication on the TCP connection between two neighbors.

Syntax `neighbor {ip-address | peer-group-name} password [encryption-type] password`
 To delete a password, use the `no neighbor {ip-address | peer-group-name} password` command.

Parameters

ip-address Enter the IP address of the router to be included in the peer group.

peer-group-name Enter the name of a configured peer group.

encryption-type (OPTIONAL) Enter 7 as the encryption type for the password entered. 7 means that the password is encrypted and hidden.

password Enter a text string up to 80 characters long. The first character of the password must be a letter.

You cannot use spaces in the password.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Configure the same password on both BGP peers or a connection does not occur. When you configure MD5 authentication between two BGP peers, each segment of the TCP connection between them is verified and the MD5 digest is checked on every segment sent on the TCP connection.

Configuring a password for a neighbor causes an existing session to be torn down and a new one established.

If you specify a BGP peer group by using the `peer-group-name` parameter, all the members of the peer group inherit the characteristic configured with this command.

If you configure a password on one neighbor, but you have not configured a password for the neighboring router, the following message appears on the console while the routers attempt to establish a BGP session between them:

```
%RPM0-P:RP1 %KERN-6-INT: No BGP MD5 from [peer's IP address]
:179 to [local router's IP address]:65524
```

Also, if you configure different passwords on the two routers, the following message appears on the console:

```
%RPM0-P:RP1 %KERN-6-INT: BGP MD5 password mismatch from
[peer's IP address] : 11502 to [local router's IP address] :179
```

neighbor peer-group (assigning peers)

Allows you to assign one peer to an existing peer group.

Syntax

```
neighbor ip-address peer-group peer-group-name
```

To delete a peer from a peer group, use the `no neighbor ip-address peer-group peer-group-name` command.

Parameters

<i>ip-address</i>	Enter the IP address of the router to be included in the peer group.
<i>peer-group-name</i>	Enter the name of a configured peer group.

Defaults

Not configured.

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can assign up to 256 peers to one peer group.

When you add a peer to a peer group, it inherits all the peer group's configured parameters. A peer cannot become part of a peer group if any of the following commands are configured on the peer:

- [neighbor advertisement-interval](#)
- [neighbor distribute-list](#)

- [neighbor route-map](#)
- [neighbor route-reflector-client](#)
- [neighbor shutdown](#)

A neighbor may keep its configuration after it was added to a peer group if the neighbor's configuration is more specific than the peer group's, and the neighbor's configuration does not affect outgoing updates.

A peer group must exist before you add a peer to it. If the peer group is disabled (shutdown) the peers within the group are also disabled (shutdown).

Related Commands

- [clear ip bgp](#) — resets BGP sessions.
- [neighbor peer-group \(creating group\)](#) — creates a peer group.
- [show ip bgp peer-group](#) — views BGP peers.
- [show ip bgp neighbors](#) — views BGP neighbors configurations.

neighbor peer-group (creating group)

Allows you to create a peer group and assign it a name.

Syntax `neighbor peer-group-name peer-group`
 To delete a peer group, use the `no neighbor peer-group-name peer-group` command.

Parameters `peer-group-name` Enter a text string up to 16 characters long as the name of the peer group.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you create a peer group, it is disabled (Shut mode).

Related Commands

- [neighbor peer-group \(assigning peers\)](#) — assigns routers to a peer group.
- [neighbor remote-as](#) — assigns a indirectly connected AS to a neighbor or peer group.
- [neighbor shutdown](#) — disables a peer or peer group.

neighbor peer-group passive

Enable passive peering on a BGP peer group, that is, the peer group does not send an OPEN message, but responds to one.

Syntax `neighbor peer-group-name peer-group passive [limit sessions]`

To delete a passive peer-group, use the `no neighbor peer-group-name peer-group passive` command.

Parameters	<i>peer-group-name</i>	Enter a text string up to 16 characters long as the name of the peer group.
	limit	(Optional) Enter the keyword <code>limit</code> to constrain the numbers of sessions for this peer-group. The range is from 2 to 256. The default is 256 .
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	After you configure a peer group as passive, assign it a subnet using the <code>neighbor soft-reconfiguration inbound</code> command.	
	For passive eBGP limits, the Remote AS must be different from the AS for this neighbor.	
Related Commands	neighbor soft-reconfiguration inbound — assigns a subnet to a dynamically configured BGP neighbor.	
	neighbor remote-as — assigns an indirectly connected AS to a neighbor or peer group.	

neighbor remote-as

Create and specify the remote peer to the BGP neighbor.

Syntax `neighbor {ip-address | peer-group-name} remote-as number`
To delete a remote AS entry, use the `no neighbor {ip-address | peer-group-name} remote-as number` command.

Parameters	<i>ip-address</i>	Enter the IP address of the neighbor to enter the remote AS in its routing table.
	<i>peer-group-name</i>	Enter the name of the peer group to enter the remote AS into routing tables of all routers within the peer group.
	<i>number</i>	Enter a number of the AS. The range is from 0 to 65535 (2 byte) or from 1 to 4294967295 (4 byte).
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To accept 4-byte formats before entering a 4 byte AS Number, configure your system. If the `number` parameter is the same as the AS number used in the `router bgp` command, the remote AS entry in the neighbor is considered an internal BGP peer entry.

This command creates a peer and the newly created peer is disabled (Shutdown).

Related Commands `router bgp` — enters ROUTER BGP mode and configures routes in an AS.
`bgp four-octet-as-support` — enables 4-byte support for the BGP process.

neighbor remove-private-as

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax `neighbor {ip-address | peer-group-name} remove-private-as`
 To return to the default, use the `no neighbor {ip-address | peer-group-name} remove-private-as` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor to remove the private AS numbers.
<i>peer-group-name</i>	Enter the name of the peer group to remove the private AS numbers.

Defaults Disabled (that is, private AS number are not removed).

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Applies to EBGp neighbors only.

Configure your system to accept 4-byte formats before entering a 4 byte AS Number.

If the AS-PATH contains both public and private AS number or contains AS numbers of an EBGp neighbor, the private AS numbers are not removed.

If a confederation contains private AS numbers in its AS-PATH, the software removes the private AS numbers only if they follow the confederation numbers in the AS path.

Private AS numbers are from 64512 to 65535 (2 byte).

neighbor route-map

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax `neighbor {ip-address | peer-group-name} route-map map-name {in | out}`
To remove the route map, use the `no neighbor {ip-address | peer-group-name} route-map map-name {in | out}` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.
<i>map-name</i>	Enter the name of an established route map. If the Route map is not configured, the default is deny (to drop all routes).
in	Enter the keyword <code>in</code> to filter inbound routes.
out	Enter the keyword <code>out</code> to filter outbound routes.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

neighbor route-reflector-client

Configure the router as a route reflector and the specified neighbors as members of the cluster.

Syntax `neighbor {ip-address | peer-group-name} route-reflector-client`
To remove one or more neighbors from a cluster, use the `no neighbor {ip-address | peer-group-name} route-reflector-client` command. If you delete all members of a cluster, you also delete the route-reflector configuration on the router.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group.

All routers in the peer group receive routes from a route reflector.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

A route reflector reflects routes to the neighbors assigned to the cluster. Neighbors in the cluster do not need to be fully meshed. By default, when you use `no route reflector`, the internal BGP (IBGP) speakers in the network must be fully meshed.

The first time you enter this command, the router configures as a route reflector and the specified BGP neighbors configure as clients in the route-reflector cluster.

When you remove all clients of a route reflector using the `no neighbor route-reflector-client` command, the router no longer functions as a route reflector.

If the clients of a route reflector are fully meshed, you can configure the route reflector to not reflect routes to specified clients by using the `no bgp client-to-client reflection` command.

Related Commands [bgp client-to-client reflection](#) — enables route reflection between the route reflector and the clients.

neighbor shutdown

Disable a BGP neighbor or peer group.

Syntax

```
neighbor {ip-address | peer-group-name} shutdown
```

To enable a disabled neighbor or peer group, use the `neighbor {ip-address | peer-group-name} no shutdown` command.

Parameters

ip-address Enter the IP address of the neighbor in dotted decimal format.

peer-group-name Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults

Enabled (that is, BGP neighbors and peer groups are disabled.)

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Peers that are enabled within a peer group are disabled when their peer group is disabled.

The `neighbor shutdown` command terminates all BGP sessions on the BGP neighbor or BGP peer group. Use this command with caution as it terminates the specified BGP sessions. When a neighbor or peer group is shut down, use the `show ip bgp summary` command to confirm its status.

Related Commands `show ip bgp summary` — displays the current BGP configuration.

`show ip bgp neighbors` — displays the current BGP neighbors.

neighbor soft-reconfiguration inbound

Enable soft-reconfiguration for BGP.

Syntax `neighbor {ip-address | peer-group-name} soft-reconfiguration inbound`
To disable, use the `no neighbor {ip-address | peer-group-name} soft-reconfiguration inbound` command.

Parameters

<i>ip-address</i>	Enter the IP address of the neighbor in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command enables soft-reconfiguration for the BGP neighbor specified. BGP stores all the updates the neighbor receives but does not reset the peer-session.

 **CAUTION: Inbound update storage is a memory-intensive operation. The entire BGP update database from the neighbor is stored in memory regardless of the inbound policy results applied on the neighbor.**

 **NOTE: This command is supported in BGP Router Configuration mode for IPv4 Unicast address only.**

Related Commands `show ip bgp neighbors` — displays routes received by a neighbor.

neighbor timers

Set keepalive and hold time timers for a BGP neighbor or a peer group.

Syntax `neighbor {ip-address | peer-group-name} timers keepalive holdtime`
To return to the default values, use the `no neighbor {ip-address | peer-group-name} timers` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to set the timers for all routers within the peer group.
<i>keepalive</i>	Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. The range is from 1 to 65535. The default is 60 seconds .
<i>holdtime</i>	Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. The range is from 3 to 65535. The default is 180 seconds .

Defaults

- keepalive = **60 seconds**
- holdtime = **180 seconds**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Timer values configured with the `neighbor timers` command override the timer values configured with any other command.

When two neighbors, configured with different `keepalive` and `holdtime` values, negotiate for new values, the resulting values are as follows:

- the lower of the `holdtime` value is the new `holdtime` value, and
- whichever is the lower value; one-third of the new `holdtime` value, or the configured `keepalive` value, is the new `keepalive` value.

neighbor update-source

Enable the software to use Loopback interfaces for TCP connections for BGP sessions.

Syntax

```
neighbor {ip-address | peer-group-name} update-source interface
```

To use the closest interface, use the `no neighbor {ip-address | peer-group-name} update-source interface` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>interface</i>	Enter the keyword <code>loopback</code> then a number of the Loopback interface. The range is from 0 to 16383.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Loopback interfaces are up constantly and the BGP session may need one interface constantly up to stabilize the session. The `neighbor update-source` command is not necessary for directly connected internal BGP sessions.

neighbor weight

Assign a weight to the neighbor connection, which is used to determine the best path.

Syntax

```
neighbor {ip-address | peer-group-name} weight weight
```

To remove a weight value, use the `no neighbor {ip-address | peer-group-name} weight` command.

Parameters

<i>ip-address</i>	Enter the IP address of the peer router in dotted decimal format.
<i>peer-group-name</i>	Enter the name of the peer group to disable all routers within the peer group.
<i>weight</i>	Enter a number as the weight. The range is from 0 to 65535. The default is 0 .

Defaults

0

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

In the system best path selection process, the path with the highest weight value is preferred.

 **NOTE: In the system best-path selection process, the path with the highest weight value is preferred.**

If you configure the `set weight` command in a route map applied to this neighbor, the weight set in that command overrides the weight set in the `neighbor weight` command.

network

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

```
network ip-address mask [route-map map-name]
```

To remove a network, use the `no network ip-address mask [route-map map-name]` command.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format of the network.
-------------------	--

mask Enter the mask of the IP address in the slash prefix length format (for example, /24).
The mask appears in command outputs in dotted decimal format (A.B.C.D).

route-map map-name (OPTIONAL) Enter the keyword `route-map` then the name of an established route map.
Only the following ROUTE-MAP mode commands are supported:

- [match ip address](#)
- [set metric](#)
- [set tag](#)

If the route map is not configured, the default is **deny** (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The system software resolves the network address the `network` command configures with the routes in the main routing table to ensure that the networks are reachable using non-BGP routes and non-default routes.

Related Commands [redistribute](#) — redistributes routes into BGP.

network backdoor

Specify this IGP route as the preferred route.

Syntax `network ip-address mask backdoor`
To remove a network, use the `no network ip-address mask backdoor` command.

Parameters

ip-address Enter an IP address in dotted decimal format of the network.
mask Enter the mask of the IP address in the slash prefix length format (for example, /24).
The mask appears in command outputs in dotted decimal format (A.B.C.D).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Although the system does not generate a route due to the backdoor config, there is an option for injecting/sourcing a local route in the presence of network backdoor config on a learned route.

redistribute

Redistribute routes into BGP.

Syntax `redistribute {connected | static} [route-map map-name]`
 To disable redistribution, use the `no redistribution {connected | static}` command.

Parameters

connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
static	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
route-map <i>map-name</i>	(OPTIONAL) Enter the keyword <code>route-map</code> then the name of an established route map. Only the following ROUTE-MAP mode commands are supported: <ul style="list-style-type: none"> • match ip address • set metric • set tag If the route map is not configured, the default is deny (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information With the Dell Networking OS version 8.3.1.0 and later, you can use the `redistribute` command to advertise the IGP cost as the MED on redistributed routes. When you set the route-map with metric-type internal and applied outbound to an EBGp peer/peer-group, the advertised routes corresponding to those peer/peer-groups have the IGP cost set as **MED**.

If you do not configure the `default-metric` command, in addition to the `redistribute` command, or there is no route map to set the metric, the metric for redistributed static and connected is "0".

To redistribute the default route (0.0.0.0/0), configure the `neighbor default-originate` command.

Related Commands [neighbor default-originate](#) — injects the default route.

redistribute ospf

Redistribute OSPF routes into BGP.

Syntax `redistribute ospf process-id [[match external {1 | 2}] [match internal]] [route-map map-name]`

To stop redistribution of OSPF routes, use the `no redistribute ospf process-id` command.

Parameters

process-id	Enter the number of the OSPF process. The range is from 1 to 65535.
match external {1 2}	(OPTIONAL) Enter the keywords <code>match external</code> to redistribute OSPF external routes. You can specify 1 or 2 to redistribute those routes only.
match internal	(OPTIONAL) Enter the keywords <code>match internal</code> to redistribute OSPF internal routes only.
route-map map-name	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

With the Dell Networking OS version 8.3.1.0 and later, you can use the `redistribute` command to advertise the IGP cost as the MED on redistributed routes. When you set the route-map with metric-type internal and apply outbound to an EBGp peer/peer-group, the advertised routes corresponding to those peer/peer-groups have the IGP cost set as **MED**.

When you enter the `redistribute isis process-id` command without any other parameters, the system redistributes all OSPF internal routes, external type 1 routes, and external type 2 routes. RFC does not support this feature.

router bgp

To configure and enable BGP, enter ROUTER BGP mode.

Syntax `router bgp as-number`

To disable BGP, use the `no router bgp as-number` command.

Parameters

as-number	Enter the AS number. The range is from 1 to 65535 (2 byte), from 1 to 4294967295 (4 byte), or from 0.1 to 65535.65535 (dotted format).
------------------	--

Defaults Not enabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information At least one interface must be in Layer 3 mode for the `router bgp` command to be accepted. If no interfaces are enabled for Layer 3, an error message appears:

```
% Error: No router id
configured
```

Example

```
Dell(conf)#router bgp 3
Dell(conf-router_bgp)#
```

shutdown all

Disables all the BGP neighbors.

Syntax `shutdown all`
Use the `no shutdown all` command to enable all the configured BGP neighbors.

Command Modes ROUTER BGP

Command History

Version	Description
9.11.0.0	Introduced on the S-Series, Z-Series, MXL, and IOM.

Usage Information You can use this command to disable all the configured BGP neighbors.

This command is global for all VRFs.

shutdown address-family-ipv4-multicast

Disables all the BGP neighbors corresponding to the multicast IPv4 address families.

Syntax `shutdown address-family-ipv4-unicast`
Use the `no shutdown address-family-ipv4-unicast` command to enable all the configured BGP neighbors corresponding to the multicast IPv4 address families.

Command Modes ROUTER BGP

CONFIGURATION

Command History

Version	Description
---------	-------------

9.11.0.0 Introduced on the S-Series, Z-Series, MXL, and IOM.

Usage Information You can use this command to disable all the configured BGP neighbors corresponding to the multicast IPv4 address families.

This command is global for all VRFs.

shutdown address-family-ipv4-unicast

Disables all the BGP neighbors corresponding to the unicast IPv4 address families.

Syntax `shutdown address-family-ipv4-unicast`
Use the `no shutdown address-family-ipv4-unicast` command to enable all the configured BGP neighbors corresponding to the unicast IPv4 address families.

Command Modes ROUTER BGP
CONFIGURATION

Command History

Version	Description
9.11.0.0	Introduced on the S-Series, Z-Series, MXL, and IOM.

Usage Information You can use this command to disable all the configured BGP neighbors corresponding to the unicast IPv4 address families.

This command is global for all VRFs.

shutdown address-family-ipv6-unicast

Disables all the BGP neighbors corresponding to the unicast IPv6 address families.

Syntax `shutdown address-family-ipv6-unicast`
Use the `no shutdown address-family-ipv6-unicast` command to enable all the configured BGP neighbors corresponding to the unicast IPv6 address families.

Command Modes ROUTER BGP
CONFIGURATION

Command History

Version	Description
9.11.0.0	Introduced on the S-Series, Z-Series, MXL, and IOM.

Usage Information You can use this command to disable all the configured BGP neighbors corresponding to the unicast IPv6 address families.

This command is global for all VRFs.

show capture bgp-pdu neighbor

Display BGP packet capture information for an IPv4 address on the system.

Syntax	<code>show capture bgp-pdu neighbor <i>ipv4-address</i></code>	
Parameters	<i>ipv4-address</i>	Enter the IPv4 address (in dotted decimal format) of the BGP address to display packet information for that address.
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-router_bgp)#show capture bgp-pdu neighbor 20.20.20.2

Incoming packet capture enabled for BGP neighbor 20.20.20.2
Available buffer size 40958758, 26 packet(s) captured using 680 bytes
  PDU[1] : len 101, captured 00:34:51 ago
    ffffffff ffffffff ffffffff ffffffff 00650100 00000013 00000000
00000000 419ef06c 00000000
    00000000 00000000 00000000 00000000 0181a1e4 0181a25c 41af92c0
00000000 00000000 00000000
    00000000 00000001 0181a1e4 0181a25c 41af9400 00000000
  PDU[2] : len 19, captured 00:34:51 ago
    ffffffff ffffffff ffffffff ffffffff 00130400
  PDU[3] : len 19, captured 00:34:51 ago
    ffffffff ffffffff ffffffff ffffffff 00130400
[. . .]

Outgoing packet capture enabled for BGP neighbor 20.20.20.2
Available buffer size 40958758, 27 packet(s) captured using 562 bytes
  PDU[1] : len 41, captured 00:34:52 ago
    ffffffff ffffffff ffffffff ffffffff 00290104 000100b4 14141401
0c020a01 04000100 01020080
    00000000
  PDU[2] : len 19, captured 00:34:51 ago
    ffffffff ffffffff ffffffff ffffffff 00130400
  PDU[3] : len 19, captured 00:34:50 ago
    ffffffff ffffffff ffffffff ffffffff 00130400
[. . .]
Dell#
```

Related Commands [capture bgp-pdu max-buffer-size](#) — specifies a size for the capture buffer.

show config

View the current ROUTER BGP configuration.

Syntax `show config`

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-router_bgp) #show config
!
router bgp 45
 neighbor suzanne peer-group
 neighbor suzanne no shutdown
 neighbor sara peer-group
 neighbor sara shutdown
 neighbor 13.14.15.20 peer-group suzanne
 neighbor 13.14.15.20 shutdown
 neighbor 123.34.55.123 peer-group suzanne
 neighbor 123.34.55.123 shutdown
Dell (conf-router_bgp) #
```

Related Commands [capture bgp-pdu max-buffer-size](#) — specifies a size for the capture buffer.

show ip bgp

View the current BGP IPv4 routing table for the system.

Syntax `show ip bgp [ipv4 unicast] [network [network-mask] [longer-prefixes]]`

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the keywords <i>ipv4 unicast</i> to view information only related to ipv4 unicast routes.
<i>network</i>	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
<i>network-mask</i>	(OPTIONAL) Enter the network mask (in slash prefix format) of the BGP network address.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keywords <i>longer-prefixes</i> to view all routes with a common prefix.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you enable the `bgp non-deterministic-med` command, the `show ip bgp` command output for a BGP route does not list the INACTIVE reason.

The following describes the `show ip bgp` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell>show ip bgp
BGP table version is 847562, local router ID is 63.114.8.131
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network          Next Hop      Metric LocPrf Weight Path
*> 0.0.0.0/0        63.114.8.33          0 18508 i
*  3.0.0.0/8        63.114.8.33          0 18508 209 701 80 i
*>                  63.114.8.33          0 18508 701 80 i
*> 3.3.0.0/16       0.0.0.0            22   32768 ?
                        63.114.8.33          0 18508 ?
*> 4.0.0.0/8        63.114.8.33          0 18508 701 1 i
*> 4.2.49.12/30     63.114.8.33          0 18508 209 i
*  4.17.250.0/24    63.114.8.33          0 18508 209 1239 13716 i
*> 63.114.8.33      63.114.8.33          0 18508 701 1239 13716 i
*  4.21.132.0/23    63.114.8.33          0 18508 209 6461 16422 i
*>                  63.114.8.33          0 18508 701 6461 16422 i
*> 4.24.118.16/30   63.114.8.33          0 18508 209 i
*> 4.24.145.0/30    63.114.8.33          0 18508 209 i
*> 4.24.187.12/30   63.114.8.33          0 18508 209 i
*> 4.24.202.0/30    63.114.8.33          0 18508 209 i
*> 4.25.88.0/30     63.114.8.33          0 18508 209 3561 3908 i
*> 5.0.0.0/9        63.114.8.33          0 18508 ?
*> 5.0.0.0/10       63.114.8.33          0 18508 ?
*> 5.0.0.0/11       63.114.8.33          0 18508 ?
--More--
```

Related Commands `show ip bgp community` — views the BGP communities.

`neighbor maximum-prefix` — controls the number of network prefixes received.

show ip bgp cluster-list

View BGP neighbors in a specific cluster.

Syntax `show ip bgp [ipv4 unicast] cluster-list [cluster-id]`

Parameters `ipv4 unicast` (OPTIONAL) Enter the keywords `ipv4 unicast` to view information only related to `ipv4 unicast` routes.

cluster-id (OPTIONAL) Enter the cluster id in dotted decimal format. The range is 1 — 4294967295.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp cluster-list` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell#show ip bgp cluster-list
BGP table version is 64444683, local router ID is 120.1.1.1
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n
- network
Origin codes: i - IGP, e - EGP, ? - incomplete

      Network          Next Hop      Metric LocPrf Weight Path
* I 10.10.10.1/32      192.68.16.1    0     100     0  i
* I                    192.68.16.1    0     100     0  i
*>I                    192.68.16.1    0     100     0  i
* I                    192.68.16.1    0     100     0  i
* I                    192.68.16.1    0     100     0  i
* I                    192.68.16.1    0     100     0  i
* I 10.19.75.5/32     192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
*>I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
* I 10.30.1.0/24      192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
*>I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
* I                    192.68.16.1    0     100     0  ?
```

show ip bgp community

View information on all routes with Community attributes or view specific BGP community groups.

Syntax	<code>show ip bgp [ipv4 unicast] community [community-number] [local-as] [no-export] [no-advertise]</code>	
Parameters	ipv4 unicast	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to ipv4 unicast routes.
	community-number	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
	local-AS	Enter the keywords <code>local-as</code> to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
	no-advertise	Enter the keywords <code>no-advertise</code> to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
	no-export	Enter the keywords <code>no-export</code> to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.
Command Modes	<ul style="list-style-type: none">EXECEXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	To view the total number of COMMUNITY attributes found, use the <code>show ip bgp summary</code> command. The text line above the route table states the number of COMMUNITY attributes found. The <code>show ip bgp community</code> command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the <code>show ip bgp</code> command output.	

The following describes the `show ip bgp community` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell>show ip bgp community
BGP table version is 3762622, local router ID is 63.114.8.48
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

Network          Next Hop      Metric LocPrf Weight Path
* i 3.0.0.0/8    205.171.0.16      100    0 209 701 80 i
*>i 4.2.49.12/30 205.171.0.16      100    0 209 i
* i 4.21.132.0/23 205.171.0.16      100    0 209 6461 16422 i
*>i 4.24.118.16/3 205.171.0.16      100    0 209 i
*>i 4.24.145.0/30 205.171.0.16      100    0 209 i
*>i 4.24.187.12/30 205.171.0.16      100    0 209 i
*>i 4.24.202.0/30 205.171.0.16      100    0 209 i
*>i 4.25.88.0/30 205.171.0.16      100    0 209 3561 3908 i
*>i 6.1.0.0/16   205.171.0.16      100    0 209 7170 1455 i
*>i 6.2.0.0/22   205.171.0.16      100    0 209 7170 1455 i
*>i 6.3.0.0/18   205.171.0.16      100    0 209 7170 1455 i
*>i 6.4.0.0/16   205.171.0.16      100    0 209 7170 1455 i
*>i 6.5.0.0/19   205.171.0.16      100    0 209 7170 1455 i
*>i 6.8.0.0/20   205.171.0.16      100    0 209 7170 1455 i
*>i 6.9.0.0/20   205.171.0.16      100    0 209 7170 1455 i
*>i 6.10.0.0/15  205.171.0.16      100    0 209 7170 1455 i
*>i 6.14.0.0/15  205.171.0.16      100    0 209 7170 1455 i
*>i 6.133.0.0/21 205.171.0.16      100    0 209 7170 1455 i
*>i 6.151.0.0/1  205.171.0.16      100    0 209 7170 1455 i
--More--
```

show ip bgp community-list

View routes that a specific community list affects.

Syntax `show ip bgp [ipv4 unicast] community-list community-list-name [exact-match]`

Parameters

ipv4 unicast	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to ipv4 unicast routes.
community-list-name	Enter the name of a configured IP community list (maximum 140 characters).
exact-match	Enter the keyword for an exact match of the communities.

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `show ip bgp community-list` command without any parameters lists BGP routes matching the Community List and the output is the same as for the `show ip bgp` command output.

The following describes the `show ip bgp community-list pass` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell#show ip bgp community-list pass
BGP table version is 0, local router ID is 10.101.15.13
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

Network      Next Hop      Metric      LocPrf      Weight Path
Dell#
```

show ip bgp dampened-paths

View BGP routes that are dampened (non-active).

Syntax `show ip bgp [ipv4 unicast] dampened-paths`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip bgp damp` command shown in the following example.

Field	Description
Network	Displays the network ID to which the route is dampened.
From	Displays the IP address of the neighbor advertising the dampened route.
Reuse	Displays the hour:minutes:seconds until the dampened route is available.
Path	Lists all the ASs the dampened route passed through to reach the destination network.

Example

```
Dell>show ip bgp dampened-paths
BGP table version is 210708, local router ID is 63.114.8.2
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network      From      Reuse      Path
Dell>
```

show ip bgp detail

Display BGP internal information for the IPv4 Unicast address family.

Syntax `show ip bgp [ipv4 unicast] detail`

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip bgp detail
Detail information for BGP Node
bgpNdP 0x41a17000 : NdTmrP 0x41a17000 : NdKATmrP 0x41a17014 : NdTics 74857 :
NhLocAS 1 : NdState 2 : NdRPMPrim 1 : NdListSoc 13
NdAuto 1 : NdEqCost 1 : NdSync 0 : NdDefOrg 0
NdV6ListSoc 14 NdDefDid 0 : NdConfedId 0 : NdMedConfed 0 : NdMedMissVal -1 :
NdIgnrIllId 0 : NdRRC2C 1 : NdClstId 33686273 : NdPaTblP 0x41a19088
NdASPTblP 0x41a19090 : NdCommTblP 0x41a19098 : NhOptTransTblP 0x41a190a0 :
NdRRClstTblP 0x41a190a8
NdPktPA 0 : NdLocCBP 0x41a6f000 : NdTmpPAP 0x419efc80 : NdTmpASPAP 0x41a25000 :
NdTmpCommP 0x41a25800
NdTmpRRC1P 0x41a4b000 : NdTmpOptP 0x41a4b800 : NdTmpNHP : NdOrigPAP 0
NdOrgNHP 0 : NdModPathP 0x419efcc0 : NdModASPAP 0x41a4c000 : NdModCommP
0x41a4c800
NdModOptP 0x41a4d000 : NdModNHP : NdComSortBufP 0x41a19110 : NdComSortHdP
0x41a19d04 : NdUpdAFMsk 0 : AFRstSet 0x41a1a298 : NHopDfrdHdP 0x41a1a3e0 :
NumNhDfrd 0 : CfgHdrAFMsk 1
AFChkNetTmrP 0x41ee705c : AFRtDamp 0 : AlwaysCmpMed 0 : LocrHld 10 : LocrRem
10 :
```

```

softReconfig 0x41a1a58c
DefMet 0 : AutoSumm 1 : NhopsP 0x41a0d100 : Starts 0 : Stops 0 : Opens 0
Closes 0 : Fails 0 : FataIs 0 : ConnExps 0 : HldExps 0 : KeepExps 0
RxOpens 0 : RxKeeps 0 : RxUpds 0 : RxNotifs 0 : TxUpds 0 : TxNotifs 0
BadEvts 0 : SynFails 0 : RxeCodeP 0x41a1b6b8 : RxHdrCodeP 0x41a1b6d4 :
RxOpCodeP
0x41a1b6e4
RxUpdCodeP 0x41a1b704 : TxEcodeP 0x41a1b734 : TxHdrCodeP 0x41a1b750 : TxOpCodeP
0x41a1b760
TxUpdCodeP 0x41a1b780 : TrEvt 0 : LocPref 100 : tmpPathP 0x41a1b7b8 :
LogNbrChgs 1
RecursiveNH 1 : PgCfgId 0 : KeepAlive 0 : HldTime 0 : DioHdl 0 : AggrValTmrP
0x41ee7024
UpdNetTmrP 0 : RedistTmrP 0x41ee7094 : PeerChgTmrP 0 : CleanRibTmrP 0x41ee7104
PeerUpdTmrP 0x41ee70cc : DfrdNHTmrP 0x41ee7174 : DfrdRtselTmrP 0x41ee713c :
FastExtFallover 1 : FastIntFallover 0 : Enforce1stAS 1
PeerIdBitsP 0x41967120 : softOutSz 16 : RibUpdCtxCBP 0
UpdPeerCtxCBP 0 : UpdPeerCtxAFI 0 : TcpcioCtxCB 0 : RedistBlk 1
NextCBPurg 1101119536 : NumPeerToPurge 0 : PeerIBGPCnt 0 : NonDet 0 :
DfrdPathSel 0
BGP Rst 0 : NumGrCfg 1 : DfrdTmestmp 0 : SnmpTrps 0 : IgnrBestPthASP 0
RstOn 1 : RstMod 1 : RstRole 2 : AFFalgs 7 : RstInt 120 : MaxeorExtInt 361
FixedPartCrt 1 : VarParCrt 1
Packet Capture max allowed length 40960000 : current length 0

Peer Grp List
Nbr List
Confed Peer List
Address Family specific Information
AFIndex 0
NdSpFlag 0x41a190b0 : AFRttP 0x41a0d200 : NdRTMMkrP 0x41a19d28 : NdRTMAFTblVer
0 :
NdRibCtxAddr 1101110688
NdRibCtxAddrLen 255 : NdAFPprefix 0 : NdAfNLRIP 0 : NdAFNLRILen 0 : NdAFWPtrP 0
NdAFWLen 0 : NdAfNH : NdAFRedRttP 0x41a0d400 : NdRecCtxAdd 1101110868
NdRedCtxAddrLen 255 : NdAfRedMkrP 0x41a19e88 : AFAggRttP 0x41a0d600 :
AfAggCtxAddr
1101111028 : AfAggrCtxAddrLen 255
AfNumAggrPfx 0 : AfNumAggrASSet 0 : AfNumSuppmap 0 : AfNumAggrValidPfx 0 :
AfMPathRttP 0x41a0d700
MpathCtxAddr 1101111140 : MpathCtxAddrLen 255 : AfEorSet 0x41a19f98 :
NumDfrdPfx 0
AfActPeerHd 0x41a1a3a4 : AfExtDist 1101112312 : AfIntDist 200 : AfLocDist 200
AfNumRRc 0 : AfRR 0 : AfNetRttP 0x41a0d300 : AfNetCtxAddr 1101112392 :
AfNetCtxAddrLen 255
AfNwCtxAddr 1101112443 : AfNwCtxAddrLen 255 : AfNetBKDrRttP 0x41a0d500 :
AfNetBKDRcnt 0 : AfDampHLife 0
AfDampReuse 0 : AfDampSupp 0 : AfDampMaxHld 0 : AfDampCeiling 0 : AfDampRmapP

```

show ip bgp extcommunity-list

View information on all routes with Extended Community attributes.

Syntax `show ip bgp [ipv4 unicast] extcommunity-list [list name]`

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to <code>ipv4 unicast</code> routes.
<i>list name</i>	Enter the extended community list name you wish to view. The range is 140 characters.

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view the total number of COMMUNITY attributes found, use the `show ip bgp summary` command. The text line above the route table states the number of COMMUNITY attributes found.

The `show ip bgp community` command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the `show ip bgp` command output.

show ip bgp filter-list

View the routes that match the filter lists.

Syntax `show ip bgp [ipv4 unicast] filter-list as-path-name`

Parameters

ipv4 unicast	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to ipv4 unicast routes.
as-path-name	Enter an AS-PATH access list name. The range is 140 characters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp filter-list hello` command shown in the following example.

Field	Description
Path source codes	Lists the path sources shown to the right of the last AS number in the Path column: <ul style="list-style-type: none"> · i = internal route entry · a = aggregate route entry · c = external confederation route entry · n = network route entry · r = redistributed route entry
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.

Field	Description
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell#show ip bgp filter-list hello
BGP table version is 80227, local router ID is 120.1.1.1
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n -
network
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network        Next Hop           Metric LocPrf Weight Path
* I 6.1.5.0/24    192.100.11.2       20000  9999   0 ?
* I              192.100.8.2        20000  9999   0 ?
* I              192.100.9.2        20000  9999   0 ?
* I              192.100.10.2       20000  9999   0 ?
*>I             6.1.5.1            20000  9999   0 ?
* I              6.1.6.1            20000  9999   0 ?
* I              6.1.20.1           20000  9999   0 ?
* I              6.1.6.0/24 192.100.11.2     20000  9999   0 ?
* I              192.100.8.2        20000  9999   0 ?
* I              192.100.9.2        20000  9999   0 ?
* I              192.100.10.2       20000  9999   0 ?
*>I             6.1.5.1            20000  9999   0 ?
* I              6.1.6.1            20000  9999   0 ?
* I              6.1.20.1           20000  9999   0 ?
* I              6.1.20.0/24 192.100.11.2     20000  9999   0 ?
* I              192.100.8.2        20000  9999   0 ?
* I              192.100.9.2        20000  9999   0 ?
* I              192.100.10.2       20000  9999   0 ?
Dell#
```

show ip bgp flap-statistics

View flap statistics on BGP routes.

Syntax `show ip bgp [ipv4 unicast] flap-statistics [ip-address [mask]] [filter-list as-path-name] [regexp regular-expression]`

Parameters	Description
ipv4 unicast	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to ipv4 unicast routes.
ip-address	(OPTIONAL) Enter the IP address (in dotted decimal format) of the BGP network to view information only on that network.
mask	(OPTIONAL) Enter the network mask (in slash prefix (/x) format) of the BGP network address.
filter-list as-path-name	(OPTIONAL) Enter the keyword <code>filter-list</code> then the name of a configured AS-PATH ACL. The range is 140 characters.
regexp regular-expression	Enter a regular expression then use one or a combination of the following characters to match. The range is 256 characters. <ul style="list-style-type: none"> <code>.</code> = (period) any single character (including a white space).

- * = (asterisk) the sequences in a pattern (zero or more sequences).
- + = (plus) the sequences in a pattern (one or more sequences).
- ? = (question mark) sequences in a pattern (either zero or one sequences).

NOTE: Enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- [] = (brackets) a range of single-character patterns.
- () = (parenthesis) groups a series of pattern elements to a single element.
- { } = (braces) minimum and the maximum match count.
- ^ = (caret) the beginning of the input string. If you use the caret at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp flap` command shown in the following example.

Field	Description
Network	Displays the network ID to which the route is flapping.
From	Displays the IP address of the neighbor advertising the flapping route.
Flaps	Displays the number of times the route flapped.
Duration	Displays the hours:minutes:seconds since the route first flapped.
Reuse	Displays the hours:minutes:seconds until the flapped route is available.
Path	Lists all the ASs the flapping route passed through to reach the destination network.

Example

```
Dell>show ip bgp flap-statistics
BGP table version is 210851, local router ID is 63.114.8.2
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external,
              r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

  Network      From      Flaps      Duration      Reuse      Path
Dell>
```

show ip bgp inconsistent-as

View routes with inconsistent originating autonomous system (AS) numbers; that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax `show ip bgp [ipv4 unicast] inconsistent-as`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip bgp inconsistent-as` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then local routes exist in the routing table.
Metric	Displays the BGP route's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.
Weight	Displays the route's weight.
Path	Lists all the ASs the route passed through to reach the destination network.

Example

```
Dell>show ip bgp inconsistent-as
BGP table version is 280852, local router ID is 10.1.2.100
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, c - confed-external, r - redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network Next Hop          Metric LocPrf Weight Path
*   3.0.0.0/8 63.114.8.33              0 18508 209 7018 80 i
*                   63.114.8.34              0 18508 209 7018 80 i
*                   63.114.8.60              0 18508 209 7018 80 i
*>                   63.114.8.33              0 18508 701 80 i
*> 3.18.135.0/24 63.114.8.60              0 18508 209 7018 ?
*                   63.114.8.34              0 18508 209 7018 ?
*                   63.114.8.33              0 18508 701 7018 ?
*                   63.114.8.33              0 18508 209 7018 ?
*> 4.0.0.0/8    63.114.8.60              0 18508 209 1 i
*                   63.114.8.34              0 18508 209 1 i
*                   63.114.8.33              0 18508 701 1 i
*                   63.114.8.33              0 18508 209 1 i
*   6.0.0.0/20 63.114.8.60              0 18508 209 3549 i
*                   63.114.8.34              0 18508 209 3549 i
*>                   63.114.8.33              0 18508 ?
*                   63.114.8.33              0 18508 209 3549 i
*   9.2.0.0/16 63.114.8.60              0 18508 209 701 i
```

```
* 63.114.8.34 0 18508 209 701 i
--More--
```

show ip bgp neighbors

Allows you to view the information BGP neighbors exchange.

Syntax `show ip bgp [ipv4 unicast] neighbors [ip-address [advertised-routes | dampened-routes | detail | flap-statistics | routes | {received-routes [network [network-mask]}] | {denied-routes [network [network-mask]}]}`

Parameters

<i>ipv4 unicast</i>	(OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to ipv4 unicast routes.
<i>ip-address</i>	(OPTIONAL) Enter the IP address of the neighbor to view only BGP information exchanged with that neighbor.
<i>advertised-routes</i>	(OPTIONAL) Enter the keywords <code>advertised-routes</code> to view only the routes the neighbor sent.
<i>dampened-routes</i>	(OPTIONAL) Enter the keywords <code>dampened-routes</code> to view information on dampened routes from the BGP neighbor.
<i>detail</i>	(OPTIONAL) Enter the keyword <code>detail</code> to view neighbor-specific internal information for the IPv4 Unicast address family.
<i>flap-statistics</i>	(OPTIONAL) Enter the keywords <code>flap-statistics</code> to view flap statistics on the neighbor's routes.
<i>routes</i>	(OPTIONAL) Enter the keyword <code>routes</code> to view only the neighbor's feasible routes.
<i>received-routes</i> [<i>network</i> [<i>network-mask</i>]	(OPTIONAL) Enter the keywords <code>received-routes</code> then either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information received from neighbors.
	NOTE: Configure the neighbor <code>soft-reconfiguration inbound</code> command prior to viewing all the information received from the neighbors.
<i>denied-routes</i> [<i>network</i> [<i>network-mask</i>]	(OPTIONAL) Enter the keywords <code>denied-routes</code> then either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information on routes denied via neighbor inbound filters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

After a peer reset, the contents of the notification log messages is displayed in hex values for debugging.

The following describes the `show ip bgp neighbors` command shown in the following examples.

The Lines Beginning with:	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, the link is internal; otherwise the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information: <ul style="list-style-type: none"> last read is the time (hours:minutes:seconds) the router read a message from its neighbor hold time is the number of seconds configured between messages from its neighbor keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive.
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Soft reconfiguration	This line indicates that soft reconfiguration inbound is configured.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(list of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL, or Prefix list configured for the policy.
For address family:	Displays the IPv4 Unicast as the address family.
BGP table version	Displays which version of the primary BGP routing table the router and the neighbor are using.
accepted prefixes	Displays the number of network prefixes the router accepts and the amount of memory used to process those prefixes.
Prefix advertised	Displays the number of network prefixes advertised, the number rejected, and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word never is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Example ()

```
Dell#show ip bgp neighbors
BGP neighbor is 10.10.10.1, remote AS 23456, external link
  BGP version 4, remote router ID 10.10.10.1
  BGP state ESTABLISHED, in this state for 00:00:35
  . . .
  Capabilities received from neighbor for IPv4 Unicast :
    MULTIPROTO_EXT(1)
```

```
ROUTE_REFRESH(2)
4_OJECT_AS(65)
ADD_PATH_(69)
CISCO_ROUTE_REFRESH(128)
```

Example

```
Dell#show ip bgp neighbors

BGP neighbor is 100.10.10.2, remote AS 200, external link
  BGP version 4, remote router ID 192.168.2.101
  BGP state ESTABLISHED, in this state for 00:16:12
  Last read 00:00:12, last write 00:00:03
  Hold time is 180, keepalive interval is 60 seconds
Received 1404 messages, 0 in queue
  3 opens, 1 notifications, 1394 updates
  6 keepalives, 0 route refresh requests
Sent 48 messages, 0 in queue
  3 opens, 2 notifications, 0 updates
  43 keepalives, 0 route refresh requests
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv4 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

Capabilities advertised to neighbor for IPv4 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  ROUTE_REFRESH(2)
  GRACEFUL_RESTART(64)
  CISCO_ROUTE_REFRESH(128)

Route map for incoming advertisements is test
Maximum prefix set to 4 with threshold 75

For address family: IPv4 Unicast
BGP table version 34, neighbor version 34
5 accepted prefixes consume 20 bytes
Prefix advertised 0, denied 4, withdrawn 0

Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer

Connections established 2; dropped 1
Last reset 00:18:21, due to Maximum prefix limit reached
```

Example (Advertised-Routes)

```
Dell>show ip bgp neighbors 192.14.1.5 advertised-routes

BGP table version is 74103, local router ID is 33.33.33.33
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed,
n - network
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network Next          Hop              Metric LocPrf  Weight Path
*>r 1.10.1.0/24          0.0.0.0           5000             32768 ?
*>r 1.11.0.0/16          0.0.0.0           5000             32768 ?
.....
...
*>I 223.94.249.0/24     223.100.4.249     0                100         0 ?
*>I 223.94.250.0/24     223.100.4.250     0                100         0 ?
*>I 223.100.0.0/16      223.100.255.254  0                100         0 ?
Total number of prefixes: 74102
```

Example (Received-Routes)

```
BGP table version is 13, local router ID is 120.10.10.1
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed
n - network, D - denied, S - stale
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network          Next Hop          Metric LocPrf  Weight Path
D   70.70.21.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.22.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.23.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.24.0/24    100.10.10.2              0     0 100 200 ?
*> 70.70.25.0/24    100.10.10.2              0     0 100 200 ?
*> 70.70.26.0/24    100.10.10.2              0     0 100 200 ?
*> 70.70.27.0/24    100.10.10.2              0     0 100 200 ?
*> 70.70.28.0/24    100.10.10.2              0     0 100 200 ?
*> 70.70.29.0/24    100.10.10.2              0     0 100 200 ?
Dell#
```

Example (denied-routes)

```
Dell#show ip bgp neighbors 100.10.10.2 denied-routes
4 denied paths using 205 bytes of memory
BGP table version is 34, local router ID is 100.10.10.2
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed
n - network, D - denied, S - stale
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network          Next Hop          Metric LocPrf  Weight Path
D   70.70.21.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.22.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.23.0/24    100.10.10.2              0     0 100 200 ?
D   70.70.24.0/24    100.10.10.2              0     0 100 200 ?
Dell#
```

Related Commands [show ip bgp](#) — views the current BGP routing table.

show ip bgp next-hop

View all next hops (using learned routes only) with current reachability and flap status. This command only displays one path, even if the next hop is reachable by multiple paths.

Syntax `show ip bgp next-hop`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp next-hop` command shown in the following example.

Field	Description
Next-hop	Displays the next-hop IP address.

Field	Description
Via	Displays the IP address and interface used to reach the next hop.
RefCount	Displays the number of BGP routes using this next hop.
Cost	Displays the cost associated with using this next hop.
Flaps	Displays the number of times the next hop has flapped.
Time Elapsed	Displays the time elapsed since the next hop was learned. If the route is down, this field displays time elapsed since the route went down.

Example

```
Dell>show ip bgp next-hop
  Next-hop      Via                               RefCount Cost Flaps Time Elapsed
 63.114.8.33    63.114.8.33, Gi 12/22          240984   0    0 00:18:25
 63.114.8.34    63.114.8.34, Gi 12/22          135152   0    0 00:18:13
 63.114.8.35    63.114.8.35, Gi 12/22           1    0    0 00:18:07
 63.114.8.60    63.114.8.60, Gi 12/22          135155   0    0 00:18:11
Dell>
```

show ip bgp paths

View all the BGP path attributes in the BGP database.

Syntax `show ip bgp paths [regex regular-expression]`

Parameters

regex *regular-expression* Enter a regular expression then use one or a combination of the following characters to match:

- `.` = (period) any single character (including a white space).
- `*` = (asterisk) the sequences in a pattern (zero or more sequences).
- `+` = (plus) the sequences in a pattern (one or more sequences).
- `?` = (question mark) sequences in a pattern (either zero or one sequences).

NOTE: Enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- `[]` = (brackets) a range of single-character patterns.
- `()` = (parenthesis) groups a series of pattern elements to a single element.
- `{ }` = (braces) minimum and the maximum match count.
- `^` = (caret) the beginning of the input string. If you use the caret at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- `$` = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp path` command shown in the following example.

Field	Description
Total	Displays the total number of BGP path attributes.
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcount	Displays the number of BGP routes using this path attribute.
Metric	Displays the MED attribute for this path attribute.
Path	Displays the AS path for the route, with the origin code for the route listed last. Numbers listed between braces {} are AS_SET information.

Example

```
Dell#show ip bgp path
Total 16 Paths
Address      Hash  Refcount  Metric  Path
0x1efe7e5c  15    10000    32     ?
0x1efe7e1c  71    10000    23     ?
0x1efe7ddc  127   10000    22     ?
0x1efe7d9c  183   10000    43     ?
0x1efe7d5c  239   10000    42     ?
0x1efe7c9c  283    6        {102 103} ?
0x1efe7b1c  287   336 20000  ?
0x1efe7d1c  295   10000    13     ?
0x1efe7c5c  339    6        {92 93} ?
0x1efe7cdc  351   10000    12     ?
0x1efe7c1c  395    6        {82 83} ?
0x1efe7bdc  451    6        {72 73} ?
0x1efe7b5c  491    78       0     ?
0x1efe7adc  883    2       120   i
0x1efe7e9c  983   10000    33     ?
0x1efe7b9c 1003    6        0     i
Dell#
```

show ip bgp paths as-path

View all unique AS-PATHs in the BGP database.

Syntax `show ip bgp paths as-path`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp paths as-path` command shown in the following example.

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcount	Displays the number of BGP routes using these AS-Paths.
AS-Path	Displays the AS paths for this route, with the origin code for the route listed last. Numbers listed between braces {} are AS_SET information.

Example

```
Dell#show ip bgp paths as-path
Total 13 AS-Paths
Address      Hash Refcount AS-Path
0xlea3c1ec  251      1      42
0xlea3c25c  251      1      22
0xlea3c1b4  507      1      13
0xlea3c304  507      1      33
0xlea3c10c  763      1      {92 93}
0xlea3c144  763      1      {102 103}
0xlea3c17c  763      1      12
0xlea3c2cc  763      1      32
0xlea3c09c  764      1      {72 73}
0xlea3c0d4  764      1      {82 83}
0xlea3c224  1019     1      43
0xlea3c294  1019     1      23
0xlea3c02c  1021     4
Dell#
```

show ip bgp paths community

View all unique COMMUNITY numbers in the BGP database.

Syntax `show ip bgp paths community`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip bgp paths community` command shown in the following example.

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcount	Displays the number of BGP routes using these communities.
Community	Displays the community attributes in this BGP path.

Example

```
E1200-BGP>show ip bgp paths community
Total 293 Communities
```

```

Address      Hash    Refcount Community
0x1ec88a5c   3       4 209:209 209:6059 209:31272 3908:900 19092:300
0x1e0f10ec   15      4 209:209 209:3039 209:31272 3908:900 19092:300
0x1c902234   37      2 209:209 209:7193 209:21362 3908:900 19092:300
0x1f588cd4   41     24 209:209 209:6253 209:21362 3908:900 19092:300
0x1e805884   46      2 209:209 209:21226 286:777 286:3033 1899:3033
64675:21092
0x1e433f4c   46      8 209:209 209:5097 209:21362 3908:900 19092:300
0x1f173294   48     16 209:209 209:21226 286:40 286:777 286:3040 5606:40
12955:5606
0x1c9f8e24   50      6 209:209 209:4069 209:21362 3908:900 19092:300
0x1c9f88e4   53      4 209:209 209:3193 209:21362 3908:900 19092:300
0x1f58a944   57      6 209:209 209:2073 209:21362 3908:900 19092:300
0x1ce6be44   80      2 209:209 209:999 209:40832
0x1c6e2374   80      2 209:777 209:41528
0x1f58ad6c   82     46 209:209 209:41528
0x1c6e2064   83      2 209:777 209:40832
0x1f588ecc   85     570 209:209 209:40832
0x1f57cc0c   98      2 209:209 209:21226 286:3031 13646:1044 13646:1124
13646:1154 13646:1164 13646:1184 13646:1194 13646:1204 13646:1214 13646:1224
13646:1234 13646:1244 13646:1254 13646:1264 13646:3000
0x1d65b2ac   117     6 209:209 209:999 209:31272
0x1f5854ac   119    18 209:209 209:21226 286:108 286:111 286:777 286:3033
517:5104

```

show ip bgp peer-group

Allows you to view information on the BGP peers in a peer group.

Syntax `show ip bgp [ipv4 unicast] peer-group [peer-group-name [detail | summary]]`

Parameters	<p><i>ipv4 unicast</i> (OPTIONAL) Enter the keywords <code>ipv4 unicast</code> to view information only related to <code>ipv4 unicast</code> routes.</p> <p><i>peer-group-name</i> (OPTIONAL) Enter the name of a peer group to view information about that peer group only.</p> <p><i>detail</i> (OPTIONAL) Enter the keyword <code>detail</code> to view detailed status information of the peers in that peer group.</p> <p><i>summary</i> (OPTIONAL) Enter the keyword <code>summary</code> to view status information of the peers in that peer group. The output is the same as that found in the <code>show ip bgp summary</code> command.</p>
-------------------	---

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.2(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information The following describes the `show ip bgp peer-group` command shown in the following example.

Line beginning with:	Description
Peer-group	Displays the peer group's name.
Administratively shut	Displays the peer group's status if the peer group is not enabled. If you enable the peer group, this line is not displayed.
BGP version	Displays the BGP version supported.
Minimum time	Displays the time interval between BGP advertisements.
For address family	Displays IPv4 Unicast as the address family.
BGP neighbor	Displays the name of the BGP neighbor.
Number of peers	Displays the number of peers currently configured for this peer group.
Peer-group members:	Lists the IP addresses of the peers in the peer group. If the address is outbound optimized, an * is displayed next to the IP address.

Example ()

```
Dell#show ip bgp peer-group

Peer-group pgl
  BGP version 4
  Minimum time between advertisement runs is 30 seconds

  For address family: IPv4 Unicast
  BGP neighbor is pgl
Number of peers in this group 4
  Update packing has 4_OCTECT_AS support enabled
  Add-path support enabled
  Peer-group members (* - outbound optimized):
    1.1.1.5
    1.1.1.6
    10.10.10.2*
    20.20.20.100
```

Example

```
Dell#show ip bgp peer-group

Peer-group RT-PEERS
Description: ***peering-with-RT***
BGP version 4
Minimum time between advertisement runs is 30 seconds

For address family: IPv4 Unicast
BGP neighbor is RT-PEERS
Number of peers in this group 20
Peer-group members (* - outbound optimized):
  12.1.1.2*
  12.1.1.3*
  12.1.1.4*
  12.1.1.5*
  12.1.1.6*
  12.2.1.2*
  12.2.1.3*
  12.2.1.4*
  12.2.1.5*
  12.2.1.6*
  12.3.1.2*
  12.3.1.3*
  12.3.1.4*
  12.3.1.5*
  12.3.1.6*
  12.4.1.2*
  12.4.1.3*
  12.4.1.4*
```

```
12.4.1.5*
12.4.1.6*
```

Related Commands [neighbor peer-group \(assigning peers\)](#) — assigns a peer to a peer-group.
[neighbor peer-group \(creating group\)](#) — creates a peer group.

show ip bgp regexp

Display the subset of the BGP routing table matching the regular expressions specified.

Syntax `show ip bgp regexp regular-expression [character]`

Parameters

regular-expression Enter a regular expression then use one or a combination of the following characters to match:
[character]

- `.` = (period) any single character (including a white space).
- `*` = (asterisk) the sequences in a pattern (zero or more sequences).
- `+` = (plus) the sequences in a pattern (one or more sequences).
- `?` = (question mark) sequences in a pattern (either zero or one sequences).

NOTE: Enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- `[]` = (brackets) a range of single-character patterns.
- `()` = (parenthesis) groups a series of pattern elements to a single element.
- `{ }` = (braces) minimum and the maximum match count.
- `^` = (caret) the beginning of the input string. If you use the caret at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- `$` = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp regexp` command shown in the following example.

Field	Description
Network	Displays the destination network prefix of each BGP route.
Next Hop	Displays the next hop address of the BGP router. If 0.0.0.0 is listed in this column, then non-BGP routes exist in the router's routing table.
Metric	Displays the BGP router's metric, if assigned.
LocPrf	Displays the BGP LOCAL_PREF attribute for the route.

Field	Description
Weight	Displays the route's weight
Path	Lists all the AS paths the route passed through to reach the destination network.

Example (S4810)

```
Dell#show ip bgp regexp ^2914+
BGP table version is 3700481, local router ID is 63.114.8.35
Status codes: s suppressed, S stale, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network        Next Hop      Metric LocPrf Weight Path
*>I 3.0.0.0/8     1.1.1.2       0 100      0 2914 1239 80 i
*>I 4.0.0.0/8     1.1.1.2       0 100      0 2914 3356 i
*>I 4.17.225.0/24 1.1.1.2       0 100      0 2914 11853 11853 11853 11853
11853 6496
*>I 4.17.226.0/23 1.1.1.2       0 100      0 2914 11853 11853 11853 11853
11853 6496
*>I 4.17.251.0/24 1.1.1.2       0 100      0 2914 11853 11853 11853 11853
11853 6496
*>I 4.17.252.0/23 1.1.1.2       0 100      0 2914 11853 11853 11853 11853
11853 6496
*>I 4.19.2.0/23   1.1.1.2       0 100      0 2914 701 6167 6167 6167 i
*>I 4.19.16.0/23  1.1.1.2       0 100      0 2914 701 6167 6167 6167 i
*>I 4.21.80.0/22  1.1.1.2       0 100      0 2914 174 4200 16559 i
*>I 4.21.82.0/24  1.1.1.2       0 100      0 2914 174 4200 16559 i
*>I 4.21.252.0/23 1.1.1.2       0 100      0 2914 701 6389 8063 19198 i
*>I 4.23.180.0/24 1.1.1.2       0 100      0 2914 3561 6128 30576 i
*>I 4.36.200.0/21 1.1.1.2       0 100      0 2914 14742 11854 14135 i
*>I 4.67.64.0/22  1.1.1.2       0 100      0 2914 11608 19281 i
*>I 4.78.32.0/21  1.1.1.2       0 100      0 2914 3491 29748 i
*>I 6.1.0.0/16    1.1.1.2       0 100      0 2914 701 668 i
*>I 6.2.0.0/22    1.1.1.2       0 100      0 2914 701 668 i
*>I 6.3.0.0/18    1.1.1.2       0 100      0 2914 701 668 i
```

show ip bgp summary

Allows you to view the status of all BGP connections.

Syntax `show ip bgp [ipv4 unicast] summary`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip bgp summary` command shown in the following example.

Field	Description
BGP router identifier	Displays the local router ID and the AS number.

Field	Description
BGP table version	Displays the BGP table version and the main routing table version.
network entries	Displays the number of network entries, route paths, and the amount of memory used to process those entries.
paths	Displays the number of paths and the amount of memory used.
denied paths	Displays the number of denied paths and the amount of memory used.
BGP path attribute entries	Displays the number of BGP path attributes and the amount of memory used to process them.
BGP AS-PATH entries	Displays the number of BGP AS_PATH attributes processed and the amount of memory used to process them.
BGP community entries	Displays the number of BGP COMMUNITY attributes processed and the amount of memory used to process them. The <code>show ip bgp community</code> command provides more details on the COMMUNITY attributes.
Dampening enabled	Displayed only when you enable dampening. Displays the number of paths designated as history, dampened, or penalized.
Neighbor	Displays the BGP neighbor address.
AS	Displays the AS number of the neighbor.
MsgRcvd	Displays the number of BGP messages that neighbor received.
MsgSent	Displays the number of BGP messages that neighbor sent.
TblVer	Displays the version of the BGP table that was sent to that neighbor.
InQ	Displays the number of messages from that neighbor waiting to be processed.
OutQ	Displays the number of messages waiting to be sent to that neighbor. If a number appears in parentheses, the number represents the number of messages waiting to be sent to the peer group.
Up/Down	Displays the amount of time that the neighbor is in the Established stage. If the neighbor has never moved into the Established stage, the word never is displayed.

The output format is:

Time	Display Example
Established	
< 1 day	00:12:23 (hours:minutes:seconds)
< 1 week	1d21h (DaysHours)
> 1 week	11w2d (WeeksDays)

State/Pfxrcd	<p>If the neighbor is in Established stage, the number of network prefixes received.</p> <p>If a maximum limit was configured with the <code>neighbor maximum-prefix</code> command, (prfxd) appears in this column.</p> <p>If the neighbor is not in Established stage, the current stage is displayed (Idle, Connect, Active, OpenSent, OpenConfirm). When the peer is transitioning between states and clearing the routes received, the phrase (Purging) may appear in this column.</p>
---------------------	---

Field	Description
	If the neighbor is disabled, the phrase (Admin shut) appears in this column.

Example (S4810)

```
Dell#show ip bgp summary
BGP router identifier 120.10.10.1, local AS number 100
BGP table version is 34, main routing table version 34
9 network entrie(s) using 1372 bytes of memory
5 paths using 380 bytes of memory
4 denied paths using 164 bytes of memory
BGP-RIB over all using 385 bytes of memory
2 BGP path attribute entrie(s) using 168 bytes of memory
1 BGP AS-PATH entrie(s) using 39 bytes of memory
1 BGP community entrie(s) using 43 bytes of memory
2 neighbor(s) using 7232 bytes of memory

Neighbor  AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/Pfx
100.10.10.2 200    46      41      34     0    0 00:14:33    5
120.10.10.2 300    40      47      34     0    0 00:37:10    0
Dell#
```

show running-config bgp

To display the current BGP configuration, use this feature.

Syntax `show running-config bgp`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

timers bgp

Adjust the BGP Keep Alive and Hold Time timers.

Syntax `timers bgp keepalive holdtime`
 To return to the default, use the `no timers bgp` command.

Parameters

<i>keepalive</i>	Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. The range is from 1 to 65535. The default is 60 seconds .
<i>holdtime</i>	Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. The range is from 3 to 65535. The default is 180 seconds .

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

MBGP Commands

Multiprotocol BGP (MBGP) is an enhanced BGP that enables multicast routing policy throughout the internet and connecting multicast topologies between BGP and autonomous systems (ASs).

MBGP is implemented as per IETF RFC 1858.

debug ip bgp dampening

View information on routes being dampened.

Syntax `debug ip bgp ipv4 multicast dampening`
To disable debugging, use the `no debug ip bgp ipv4 multicast dampening` command.

Parameters **dampening** Enter the keyword `dampening` to clear route flap dampening information.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

distance bgp

Define an administrative distance for routes.

Syntax `distance bgp external-distance internal-distance local-distance`
To return to default values, use the `no distance bgp` command.

Parameters

- external-distance** Enter a number to assign to routes learned from a neighbor external to the AS. The range is from 1 to 255. The default is **20**.
- internal-distance** Enter a number to assign to routes learned from a router within the AS. The range is from 1 to 255. The default is **200**.
- local-distance** Enter a number to assign to routes learned from networks listed in the `network` command. The range is from 1 to 255. The default is **200**.

Defaults

- external-distance = **20**
- internal-distance = **200**
- local-distance = **200**

Command Modes ROUTER BGP (conf-router_bgp_af)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

 **CAUTION: Dell Networking OS recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.**

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table. Routes from confederations are treated as internal BGP routes.

show ip bgp dampened-paths

View BGP routes that are dampened (non-active).

Syntax `show ip bgp [ipv4 unicast] dampened-paths`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp damp` command shown in the following example.

Field	Description
Network	Displays the network ID to which the route is dampened.
From	Displays the IP address of the neighbor advertising the dampened route.
Reuse	Displays the hour:minutes:seconds until the dampened route is available.
Path	Lists all the ASs the dampened route passed through to reach the destination network.

Example

```
Dell>show ip bgp dampened-paths
BGP table version is 210708, local router ID is 63.114.8.2
Status codes: s suppressed, d damped, h history, * valid, > best
Path source: I - internal, a - aggregate, c - confed-external, r -
redistributed, n - network
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
              Network      From      Reuse      Path
Dell>
```

BGP Extended Communities (RFC 4360)

BGP Extended Communities, as defined in RFC 4360, is an optional transitive BGP attribute.

BGP Extended Communities provides two major advantages over Standard Communities:

- The range is extended from 4-octet (AA:NN) to 8-octet (Type:Value) to provide enough number communities.
- Communities are structured using a new “Type” field (1 or 2-octets), allowing you to provide granular control/filter routing information based on the type of extended communities.

set extcommunity rt

To set Route Origin community attributes in Route Map, use this feature.

Syntax `set extcommunity rt {as4 ASN4:NN [non-trans] | ASN:N4NNN [non-trans] | IPADDR:NN [non-trans]} [additive]`

To delete the Route Origin community, use the `no set extcommunity` command.

Parameters

as4 ASN4:NN	Enter the keyword <code>as4</code> then the 4-octet AS specific extended community number in the format ASN4:NN (4-byte AS number:2-byte community value).
ASN:N4NNN	Enter the 2-octet AS specific extended community number in the format ASN:N4NNN (2-byte AS number:4-byte community value).
IPADDR:NN	Enter the IP address specific extended community in the format IPADDR:NN (4-byte IPv4 Unicast Address:2-byte community value).
additive	(OPTIONAL) Enter the keyword <code>additive</code> to add to the existing extended community.
non-trans	(OPTIONAL) Enter the keywords <code>non-trans</code> to indicate a non-transitive BGP extended community.

Defaults none

Command Modes ROUTE MAP (config-route-map)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If the `set community rt` and `soo` are in the same route-map entry, the behavior defines as:

- If the `rt` option comes before `soo`, with or without the `additive` option, `soo` overrides the communities `rt` sets.
- If the `rt` option comes after `soo`, without the `additive` option, `rt` overrides the communities `soo` sets.
- If the `rt` with the `additive` option comes after `soo`, `rt` adds the communities `soo` sets.

Related Commands [set extcommunity soo](#) — sets the extended community site-of-origin in the route-map.

set extcommunity soo

To set extended community site-of-origin in Route Map, use this feature.

Syntax `set extcommunity soo {as4 ASN4:NN | ASN:NNNN | IPADDR:NN [non-trans]}`
To delete the site-of-origin community, use the `no set extcommunity` command.

Parameters		
as4 ASN4:NN	Enter the keyword <code>as4</code> then the 4-octet AS specific extended community number in the format <code>ASN4:NN</code> (4-byte AS number:2-byte community value).	
ASN:NNNN	Enter the 2-octet AS specific extended community number in the format <code>ASN:NNNN</code> (2-byte AS number:4-byte community value).	
IPADDR:NN	Enter the IP address specific extended community in the format <code>IPADDR:NN</code> (4-byte IPv4 Unicast Address:2-byte community value).	
non-trans	(OPTIONAL) Enter the keywords <code>non-trans</code> to indicate a non-transitive BGP extended community.	

Defaults none

Command Modes ROUTE MAP (config-route-map)

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If the `set community rt` and `soo` are in the same route-map entry, the behavior defines as:

- If the `rt` option comes before `soo`, with or without the `additive` option, `soo` overrides the communities `rt` sets.
- If the `rt` option comes after `soo`, without the `additive` option, `rt` overrides the communities `soo` sets.
- If the `rt` with the `additive` option comes after `soo`, `rt` adds the communities `soo` sets.

Related Commands [set extcommunity rt](#) — sets the extended community route origins using the route-map.

show ip bgp paths extcommunity

To display all BGP paths having extended community attributes, use this feature.

Syntax `show ip bgp paths extcommunity`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp paths extcommunity` command shown in the following example.

Field	Description
Address	Displays the internal address where the path attribute is stored.
Hash	Displays the hash bucket where the path attribute is stored.
Refcount	Displays the number of BGP routes using these extended communities.
Community	Displays the extended community attributes in this BGP path.

Example

```
Dell#show ip bgp paths extcommunity
Total 1 Extended Communities

Address      Hash  Refcount  Extended Community
0x41d57024  12272  1          RT:7:200 SoO:5:300 SoO:0.0.0.3:1285
Dell#
```

show ip bgp extcommunity-list

View information on all routes with Extended Community attributes.

Syntax `show ip bgp [ipv4 unicast] extcommunity-list [list name]`

Parameters

- ipv4 unicast*** (OPTIONAL) Enter the keywords `ipv4 unicast` to view information only related to `ipv4 unicast` routes.
- list name*** Enter the extended community list name you wish to view. The range is 140 characters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view the total number of COMMUNITY attributes found, use the `show ip bgp summary` command. The text line above the route table states the number of COMMUNITY attributes found.

The `show ip bgp community` command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the `show ip bgp` command output.

IPv6 BGP Commands

IPv6 Border Gateway Protocol (IPv6 BGP) is supported on the switch.

Border gateway protocol (BGP) is an external gateway protocol that transmits interdomain routing information within and between autonomous systems (AS). BGP version 4 (BGPv4) supports classless interdomain routing and the aggregation of routes and AS paths. Basically, two routers (called neighbors or peers) exchange information including full routing tables and periodically send messages to update those routing tables.

bgp soft-reconfig-backup

To avoid the peer from resending messages, use this command *only* when route-refresh is *not* negotiated.

Syntax `bgp soft-reconfig-backup`
To return to the default setting, use the `no bgp soft-reconfig-backup` command.

Defaults Disabled

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable soft-reconfiguration for a neighbor and you execute the `clear ip bgp soft in` command, the update database stored in the router is replayed and updates are re-evaluated. With this command, the replay and update process is triggered only if route-refresh request is not negotiated with the peer. If the request is indeed negotiated (after executing the `clear ip bgp soft in` command), BGP sends a route-refresh request to the neighbor and receives all of the peer's updates.

Related Commands `clear ip bgp` — activates inbound policies without resetting the BGP TCP session.

clear ip bgp ipv6 unicast soft

Clear and reapply policies for IPv6 unicast routes without resetting the TCP connection; that is, perform BGP soft reconfiguration.

Syntax `clear ip bgp { * | as-number | ipv4-neighbor-addr | ipv6-neighbor-addr | peer-group name } ipv6 unicast soft [in | out]`

Parameters

*	Clear and reapply an asterisk (*) for all BGP sessions.
as-number	Clear and reapply policies for all neighbors belonging to the AS. The range is from 0 to 65535 (2 Byte), from 1 to 4294967295 (4 Byte), or from 0.1 to 0.65535.65535 (Dotted format).
ipv4-neighbor-addr ipv6-neighbor-addr	Clear and reapply policies for a neighbor.

<i>peer-group name</i>	Clear and reapply policies for all BGP routers in the specified peer group.
<i>ipv6 unicast soft</i>	Clear and reapply policies for all IPv6 unicast routes.
<i>in</i>	Reapply only inbound policies.
	NOTE: If you enter <i>soft</i>, without an <i>in</i> or <i>out</i> option, both inbound and outbound policies are reset.
<i>out</i>	Reapply only outbound policies.
	NOTE: If you enter <i>soft</i>, without an <i>in</i> or <i>out</i> option, both inbound and outbound policies are reset.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip bgp ipv6 unicast soft-reconfiguration

Enable soft-reconfiguration debugging for IPv6 unicast routes.

Syntax `debug ip bgp [ipv4-address | ipv6-address | peer-group-name] ipv6 unicast soft-reconfiguration`
 To disable debugging, use the `no debug ip bgp [ipv4-address | ipv6-address | peer-group-name] ipv6 unicast soft-reconfiguration` command.

Parameters

<i>ipv4-address</i> <i>ipv6-address</i>	Enter the IP address of the neighbor on which you want to enable soft-reconfiguration debugging.
<i>peer-group-name</i>	Enter the name of the peer group on which you want to enable soft-reconfiguration debugging.
<i>ipv6 unicast</i>	Debug soft reconfiguration for IPv6 unicast routes.

Defaults Disabled.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command turns on BGP soft-reconfiguration inbound debugging for IPv6 unicast routes. If no neighbor is specified, debug is turned on for all neighbors.

ipv6 prefix-list

Configure an IPv6 prefix list.

Syntax `ipv6 prefix-list prefix-list name`

Parameters `prefix-list name` Enter the name of the prefix list.

NOTE: There is a 140-character limit for prefix list names.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ipv6 prefix-list](#) — View the selected IPv6 prefix-list.

show ipv6 prefix-list

Displays the specified IPv6 prefix list.

Syntax `show ipv6 prefix-list detail {prefix-list name} | summary`

Parameters `detail` Display a detailed description of the selected IPv6 prefix list.

`prefix-list name` Enter the name of the prefix list.

NOTE: There is a 140-character limit for prefix list names.

`summary` Display a summary of RPF routes.

Command Modes EXEC

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Command History **Version 9.2(0.0)** Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ipv6 prefix-list](#) — configures an IPv6 prefix-list.

IPv6 MBGP Commands

Multiprotocol BGP (MBGP) is an enhanced BGP that enables multicast routing policy throughout the Internet and connecting multicast topologies between BGP and autonomous systems (AS).

MBGP is implemented as per IETF RFC 1858.

show ipv6 mbgproutes

Display the selected IPv6 MBGP route or a summary of all MBGP routes in the table.

Syntax `show ipv6 mbgproutes ipv6-address prefix-length | summary`

Parameters

ipv6-address prefix-length (OPTIONAL) Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

 **NOTE:** The :: notation specifies successive hexadecimal fields of zeros.

summary Display a summary of RPF routes.

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Configuration Cloning

Configuration Cloning enables you to clone the configuration from one aggregator to the other. It identifies a source aggregator where running configuration is check-pointed, extracted and downloaded to the target aggregator for further use. The target aggregator checks the compatibility of the cloning file regarding the mode, port types and optional modules. The target aggregator further takes care of the conflicting configurations and appropriately proceeds with the application of the cloning configuration.

clone-config apply

Apply the cloning configuration file on the target aggregator.

Syntax `clone-config apply [file-name filename][output xml]`

Parameters	apply	Enter the keyword <code>apply</code> to apply the cloning configuration.
	file-name <i>filename</i>	Enter the keywords <code>file-name</code> to specify the user-defined cloning configuration file name in flash. By default, the file name is <code>cloning-config</code> .
	output xml	Enter the keywords <code>output xml</code> to enable the command output status to be displayed in the XML format.

Defaults `cloning-config`

Command Modes EXEC

Command History

Version	Description
9.10(0.0)	Introduced on the FN IOM and M I/O Aggregator.

clone-config check

Check the cloning configuration file compatibility with the current configurations on the target aggregator.

Syntax `clone-config check [file-name filename][output xml]`

Parameters	check	Enter the keyword <code>check</code> to check the cloning configuration compatibility.
	file-name <i>filename</i>	Enter the keywords <code>file-name</code> to specify the user-defined cloning configuration file name in flash. By default, the file name is <code>cloning-config</code> .
	output xml	Enter the keywords <code>output xml</code> to enable the command output status to be displayed in the XML format.

Defaults `cloning-config`

Command Modes EXEC

Command History

Version	Description
9.10(0.0)	Introduced on the FN IOM and M I/O Aggregator.

clone-config create

Create the cloning configuration.

Syntax `clone-config create [file-name filename][output xml]`

Parameters

create	Enter the keyword <code>create</code> to create the cloning configuration file.
file-name <i>filename</i>	Enter the keywords <code>file-name</code> to save the cloning configuration in user-defined filename. By default, it gets stored in flash under the filename <code>cloning-config</code> .
output xml	Enter the keywords <code>output xml</code> to enable the command output status to be displayed in the XML format.

Defaults cloning-config

Command Modes EXEC

Command History

Version	Description
9.10(0.0)	Introduced on the FN IOM and M I/O Aggregator.

Content Addressable Memory (CAM)

Content addressable memory (CAM) commands are supported on the Dell Networking operating software on the platform.

⚠ WARNING: If you are using these features for the first time, contact Dell Networking Technical Assistance Center (TAC) for guidance.

Topics:

- [CAM Profile Commands](#)
- [cam-acl \(Configuration\)](#)
- [cam-optimization](#)
- [cam-threshold](#)
- [show cam-acl](#)
- [show cam-acl-egress](#)

CAM Profile Commands

The CAM profiling feature allows you to partition the CAM to best suit your application. For example:

- Configure more Layer 2 forwarding information base (FIB) entries when the system is deployed as a switch.
- Configure more Layer 3 FIB entries when the system is deployed as a router.
- Configure more access control lists (ACLs).
- Optimize the virtual local area network (VLAN) ACL Group feature, which permits group VLANs for IP egress ACLs.

Important Points to Remember

- The Dell Networking Operating System (OS) versions supports CAM allocations.
- The CAM configuration is applied to the entire system when you use the CONFIGURATION mode commands. Save the running-configuration to affect the change.
- When budgeting your CAM allocations for ACLs and quality of service (QoS) configurations, remember that ACL and QoS rules might consume more than one CAM entry depending on complexity. For example, transmission control protocol (TCP) and user datagram protocol (UDP) rules with `port range` options might require more than one CAM entry.
- After you install a secondary RPM, copy the running-configuration to the startup-configuration so that the new RPM has the correct CAM profile.
- You MUST save your changes and reboot the system for CAM profiling or allocations to take effect.

cam-acl (Configuration)

Select the default CAM allocation settings or reconfigure a new CAM allocation for Layer 2, IPv4, and IPv6 ACLs, Layer 2 and Layer 3 (IPv4) QoS, Layer 2 Protocol Tunneling (L2PT), IP and MAC source address validation for DHCP, Ethernet Connectivity Fault Management (CFM) ACLs, and Policy-based Routing (PBR).

Syntax

```
cam-acl {default | l2acl number ipv4acl number ipv6acl number ipv4qos number l2qos number l2pt number ipmacacl number [vman-qos | vman-qos-dual- number | vman-qos-dual-fp number] ipv4pbr number} ecfmac1 number [nlbclusteraclnumber]fcoeacl number iscsiop1acl number}
```

Parameters

default	Use the default CAM profile settings and set the CAM as follows: <ul style="list-style-type: none">• L3 ACL (ipv4acl): 4• L2 ACL(l2acl): 5• IPv6 L3 ACL (ipv6acl): 0• L3 QoS (ipv4qos): 1• L2 QoS (l2qos): 1• L2PT (L2PT): 0• MAC ACL (IpMacAcl): 0• VmanDualQos: 0• EcfmAcl: 0• nlbclusteracl: 0• FcoeAcl: 4• iscsiOptAcl: 2
l2acl <i>number</i>	Enter the keyword <code>l2acl</code> and then the number of l2acl blocks. The range is from 1 to 8.
ipv4acl <i>number</i>	Enter the keyword <code>ipv4acl</code> and then the number of FP blocks for IPv4. The range is from 0 to 8.
ipv6acl <i>number</i>	Enter the keyword <code>ipv6acl</code> and then the number of FP blocks for IPv6. The range is from 0 to 4.
ipv4qos <i>number</i>	Enter the keyword <code>ipv4qos</code> and then the number of FP blocks for IPv4. The range is from 0 to 8.
l2qos <i>number</i>	Enter the keyword <code>l2qos</code> and then the number of FP blocks for l2 qos. The range is from 1 to 8.
l2pt <i>number</i>	Enter the keyword <code>l2pt</code> and then the number of FP blocks for l2 protocol tunnelling. The range is from 0 to 1.
ipmacacl <i>number</i>	Enter the keyword <code>ipmacacl</code> and then the number of FP blocks for IP and MAC ACL. The range is from 0 to 6.
ecfmac1 <i>number</i>	Enter the keyword <code>ecfmacacl</code> and then the number of FP blocks for ECFM ACL. The range is from 0 to 5.
nlbclusteracl <i>number</i>	Enter the keyword <code>nlbclusteracl</code> and then the number of FP blocks for nlbcluster ACL. The range is from 0 to 2. By default the value is 0 and it supports eight NLB arp entries reserved for internal functionality.

NOTE: When you reconfigure CAM allocation, use the `nlbclusteracl number` command to change the number of NLB ARP entries. The range is from 0 to 2. The default value is 0. At the default value of 0, eight NLB ARP entries are available for use. This platform supports upto 256 CAM entries. Select 1 to configure 128 entries. Select 2 to configure 256 entries. Even though you can perform CAM carving to allocate the maximum number of NLB entries, Dell Networking recommends that you use a maximum of 64 NLB ARP entries.

<code>vman-qos vman-dual-qos number</code>	Enter the keyword <code>vman-qos</code> and then the number of FP blocks for VMAN QoS. The range is from 0 to 6.
<code>vman-dual-qos number</code>	Enter the keyword <code>vman-dual-qos</code> and then the number of FP blocks for VMAN dual QoS. The range is from 0 to 4.
<code>ipv4pbr number</code>	Enter the keyword <code>ipv4pbr</code> and then the number of FP blocks for ipv4pbr ACL. The range is from 0 to 8.
<code>Openflow number</code>	Enter the keyword <code>openflow</code> and then the number of FP blocks for open flow (multiples of 4). The range is from 0 to 8.
<code>fcoeacl number</code>	Enter the keyword <code>fcoeacl</code> and then the number of FP blocks for FCOE ACL. The range is from 0 to 6.
<code>iscsiptacl number</code>	Enter the keyword <code>iscsiptacl</code> and then the number of FP blocks for iSCSI optimization ACL. The range is from 0 to 2.
<code>l2acl number</code> <code>ipv4acl number</code> <code>ipv6acl number</code> , <code>ipv4qos number</code> , <code>l2pt number</code> <code>ipmacacl number</code> <code>ecfmacl number</code> [<code>vman-qos</code> <code>vman--qos-dual number</code> <code>vman-qos-dual-fp number</code>] <code>ipv4pbr number</code>	Allocate space to each CAM region. Enter the CAM profile name then the amount of CAM space to be allotted. The total space allocated must equal 13. The range for <code>ipv4acl</code> is from 1 to 4. The <code>ipv6acl</code> range must be a factor of 2. The total space allocated must equal 13. The range for <code>ipv4acl</code> is 1 to 4. The <code>ipv6acl</code> range must be a factor of 2. The <code>vman-qos-dual-fp number</code> must be entered as a multiple of 4.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Added the keyword <code>nlbcluster ACL</code> .
9.4.(0.0)	Added support for PBR.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Save the new CAM settings to the startup-config (`write-mem` or `copy run start`) then reload the system for the new settings to take effect.

The total amount of space allowed is 16 FP Blocks. System flow requires three blocks; these blocks cannot be reallocated. The `ipv4acl` profile range is from 1 to 4.

When configuring space for IPv6 ACLs, the total number of Blocks must equal 13.

On the switch, there can be only one odd number of Blocks in the CLI configuration; the other Blocks must be in factors of two. For example, a CLI configuration of 5+4+2+1+1 Blocks is not supported; a configuration of 6+4+2+1 Blocks is supported.

Ranges for the CAM profiles are from 1 to 10, except for the `ipv6acl` profile which is from 0 to 10. The `ipv6acl` allocation must be a factor of two (2, 4, 6, 8, 10).

cam-optimization

Optimize CAM utilization for QoS Entries by minimizing require policy-map CAM space.

Syntax	<code>cam-optimization [qos]</code>	
Parameters	qos	Optimize CAM usage for QoS.
Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description

9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable this command, if a Policy Map containing classification rules (ACL and/or dscp/ ip-precedence rules) is applied to more than one physical interface on the same port pipe, only a single copy of the policy is written (only one FP entry is used).

NOTE: An ACL itself may still require more than a single FP entry, regardless of the number of interfaces. For more information, refer to the *IP Access Control Lists, Prefix Lists, and Route-mapsections* in the *Dell Networking Operating System Configuration Guide*.

cam-threshold

Configure CAM threshold value for sending the syslog message on CAM usage. Configure silence period for stop receiving syslog message on CAM usage.

Syntax	<code>cam-threshold threshold {default <i>threshold-percent</i>} silence-period {default <i>silence-period-value</i>}</code>
---------------	--

NOTE: This command is applicable only in Full-Switch mode.

Defaults	Enabled	
Parameters		
	threshold default	Enter the keyword <code>default</code> for CAM usage threshold for notification of the CAM usage through syslog message. The default threshold value is 90 percent.
	threshold threshold-percent	Enter the threshold percent for notification of the CAM usage through syslog message. The range is from 1 to 100 percent.
	silence-period default	Enter the keyword <code>default</code> to set the silence period for receiving syslog message regarding CAM usage for CAM region, slot/portpipe. The default silence period is 0 seconds.
	silence-period silence-period-value	Enter the silence period for stop receiving syslog message for the respective CAM region, slot/portpipe. The range is from 0 to 65535 seconds.
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.13.0.0	Introduced on the MXL, FN IOM, S5000, S4048-ON, S6000, S6000-ON, S3048-ON, S3100 Series, C9010, S4048T-ON, Z9500, Z9100-ON, S6100-ON, S6010-ON.
Usage Information	The <code>no cam-threshold</code> command will set the CAM threshold to 90 percent and silence period to 0.	
	The CAM threshold and silence period configuration is applicable only for Ingress L2, IPv4, IPv6 and Egress L2, IPv4, and IPv6 ACL CAM groups. For other ACL CAM regions, the CAM threshold and silence period is not configurable and the values are fixed to 90 percent and 0 respectively.	
Example	<pre>DellEMC(conf)#cam-threshold threshold 2 silence-period 2 DellEMC(conf)#do show running-config g cam-threshold cam-threshold threshold 2 silence-period 2</pre>	

show cam-acl

Display the details of the CAM profiles on the chassis and all stack units.

Syntax	<code>show cam-acl</code>	
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The display reflects the settings implemented with the `cam-acl` command.

Example (Default)

```
Dell#show cam-acl

-- Chassis Cam ACL --
      Current Settings(in block sizes)
      1 block = 128 entries
L2Acl      :      6
Ipv4Acl    :      4
Ipv6Acl    :      0
Ipv4Qos    :      2
L2Qos      :      1
L2PT       :      0
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos :    0
EcfmAcl    :      0
FcoeAcl    :      0
iscsiOptAcl :    0
ipv4pbr    :      0
vrfv4Acl   :      0
Openflow   :      0
fedgovacl  :      0
nlbclusteracl:    0

-- stack-unit 0 --
      Current Settings(in block sizes)
      1 block = 128 entries
L2Acl      :      6
Ipv4Acl    :      4
Ipv6Acl    :      0
Ipv4Qos    :      2
L2Qos      :      1
L2PT       :      0
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos :    0
EcfmAcl    :      0
FcoeAcl    :      0
iscsiOptAcl :    0
ipv4pbr    :      0
vrfv4Acl   :      0
Openflow   :      0
fedgovacl  :      0
nlbclusteracl:    0

-- stack-unit 1 --
      Current Settings(in block sizes)
      1 block = 128 entries
L2Acl      :      6
Ipv4Acl    :      4
Ipv6Acl    :      0
Ipv4Qos    :      2
L2Qos      :      1
L2PT       :      0
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos :    0
EcfmAcl    :      0
FcoeAcl    :      0
iscsiOptAcl :    0
ipv4pbr    :      0
vrfv4Acl   :      0
Openflow   :      0
fedgovacl  :      0
nlbclusteracl:    0
```

show cam-acl-egress

Display the details of the FP groups allocated for the egress ACL.

Syntax `show cam-acl-egress`

Defaults `none`

Command Modes `Configuration`

Supported Modes `Full-Switch`

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The display reflects the settings implemented with the `cam-acl-egress` command.

Example

```
Dell#show cam-acl-egress
-- Chassis Egress Cam ACL --
      Current Settings(in block sizes)
L2Acl   :      1
Ipv4Acl :      1
Ipv6Acl :      2
-- Stack unit 0 --
      Current Settings(in block sizes)
L2Acl   :      1
Ipv4Acl :      1
Ipv6Acl :      2
Dell#
```

Control Plane Policing (CoPP)

The Dell Networking OS supports the following CoPP commands.

control-plane-cpuqos

To manage control-plane traffic, enter control-plane mode and configure the switch.

Syntax	<code>control-plane-cpuqos</code>	
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

service-policy rate-limit-cpu-queues

Apply a policy map for the system to rate limit control traffic on a per-queue basis.

Syntax	<code>service-policy rate-limit-cpu-queues <i>policy-name</i></code>	
Parameters	<i>policy-name</i>	Enter the service-policy name, using a string up to 32 characters.
Defaults	Not configured.	
Command Modes	CONTROL-PLANE-CPUQOS	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Create a policy-map by associating a queue number with the qos-policy.	
	Create QoS policies prior to enabling this command.	
	For CoPP, do not use the keywords <code>cpu-qos</code> when creating qos-policy-input.	

Related Commands [qos-policy-input](#) — creates a QoS input policy map.
[policy-map-input](#) — creates an input policy map.

service-policy rate-limit-protocols

Apply a policy for the system to rate limit control protocols on a per-protocol basis.

Syntax `service-policy rate-limit-protocols policy-name`

Parameters *policy-name* Enter the service-policy name, using a string up to 32 characters.

Defaults Not configured.

Command Modes CONTROL-PLANE-CPUQOS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command applies the service-policy based on the type of protocol defined in the ACL rules.
Create ACL and QoS policies prior to enabling this command.
For CoPP, do not use the keywords `cpu-qos` when creating `qos-policy-input`.

Related Commands [ip access-list extended](#) — creates an extended IP ACL.
[mac access-list extended](#) — creates an extended MAC ACL.
[qos-policy-input](#) — creates a QoS input policy map.
[class-map](#) — creates a QoS class map.
[policy-map-input](#) — creates an input policy map.

show cpu-queue rate cp

Display the rates for each queue.

Syntax `show cpu-queue rate cp`

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command applies the service-policy based on the type of protocol defined in the ACL rules.

Create ACL and QoS policies prior to enabling this command.

Example

```
Dell#show cpu-queue rate cp
Service-Queue          Rate (PPS)          Burst ( )
-----
Q0                      1300                512
Q1                      300                 50
Q2                      300                 50
Q3                      400                 50
Q4                      2000                50
Q5                      300                 50
Q6                      400                 50
Q7                      400                 50
Q8                      400                 50
Q9                      600                 50
Q10                     300                 50
Q11                     300                 50
```

show ip protocol-queue-mapping

Display the queue mapping for each configured protocol.

Syntax show ip protocol-queue-mapping

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip protocol-queue-mapping
Protocol  Src-Port  Dst-Port  TcpFlag  Queue  EgPort  Rate (kbps)
-----
TCP (BGP)  any/179   179/any   -        Q9     -        -
UDP (DHCP) 67/68     68/67     -        Q10    -        -
UDP (DHCP-R) 67        67        -        Q10    -        -
TCP (FTP)   any       21        -        Q6     -        -
ICMP       any       any       -        Q6     -        -
IGMP       any       any       -        Q11    -        -
TCP (MSDP) any/639   639/any   -        Q11    -        -
UDP (NTP)   any       123       -        Q6     -        -
OSPF       any       any       -        Q9     -        -
PIM        any       any       -        Q11    -        -
UDP (RIP)   any       520       -        Q9     -        -
TCP (SSH)   any       22        -        Q6     -        -
TCP (TELNET) any       23        -        Q6     -        -
```

VRRP	any	any	—	Q10	—	—
Dell#						

show ipv6 protocol-queue-mapping

Display the queue mapping for each configured IPv6 protocol.

Syntax `show ipv6 protocol-queue-mapping`

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ipv6 protocol-queue-mapping
Protocol Src-Port Dst-Port TcpFlag Queue EgPort Rate (kbps)
-----
TCP (BGP) any/179 179/any — Q9 — —
ICMPV6 NA any any — Q6 — —
ICMPV6 RA any any — Q6 — —
ICMPV6 NS any any — Q5 — —
ICMPV6 RS any any — Q5 — —
ICMPV6 any any — Q6 — —
VRRPV6 any any — Q10 — —
OSPFV3 any any — Q9 — —
Dell#
```

show mac protocol-queue-mapping

Display the queue mapping for the MAC protocols.

Syntax `show mac protocol-queue-mapping`

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show mac protocol-queue-mapping
Protocol Destination Mac EtherType Queue EgPort Rate (kbps)
-----
ARP any 0x0806 Q5/Q6 CP —
FRRP 01:01:e8:00:00:10/11 any Q7 CP —
LACP 01:80:c2:00:00:02 0x8809 Q7 CP —
Dell#
```

LLDP	any	0x88cc	Q8	CP	—
GVRP	01:80:c2:00:00:21	any	Q8	CP	—
STP	01:80:c2:00:00:00	any	Q7	CP	—
ISIS	01:80:c2:00:00:14/15	any	Q9	CP	—
	09:00:2b:00:00:04/05	any	Q9	CP	—
Dell#					

u-Boot

All commands in this chapter are in u-Boot mode. These commands are supported on the Dell Networking Aggregator only. To access this mode, hit any key when the following line appears on the console during a system boot: Hit any key to stop autoboot:

You enter u-Boot immediately, as indicated by the `BOOT_USER#` prompt.

NOTE: Only the most frequently used commands available in uBoot mode are described in this chapter. In uBoot mode, you cannot use the Tab key for command completion.

Topics:

- [boot change](#)
- [boot show net config retries](#)
- [boot write net config retries](#)
- [boot zero](#)
- [default gateway](#)
- [enable](#)
- [help](#)
- [ignore enable password](#)
- [ignore startup-config](#)
- [interface management ethernet ip address](#)
- [no default gateway](#)
- [no interface management ethernet ip address](#)
- [reload](#)
- [show boot blc](#)
- [show boot selection](#)
- [show bootflash](#)
- [show bootvar](#)
- [show default gateway](#)
- [show interface management ethernet](#)
- [show interface management port config](#)
- [syntax help](#)

boot change

Change the operating system boot parameters.

Syntax `boot change [primary | secondary | default]`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

boot show net config retries

Show the number of retries for network boot configuration failure.

Syntax `boot show net config retries`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER# boot show net config retries
Number of Network Boot Config Retries is : 0
BOOT_USER #
```

boot write net config retries

Set the number of retries for network boot configuration failure.

Syntax `boot write net config retries <int>`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # boot write net config retries 2
Updated number of Network Boot Config retries to 2.
BOOT_USER #
```

boot zero

Clears the primary, secondary, or default boot parameters.

Syntax `boot zero [primary| secondary| default]`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

default gateway

Set the default gateway IP address.

Syntax `default-gateway <ip-address>`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

enable

Change the access privilege level.

Syntax `enable [user| admin]`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

help

Displays the help menu.

Syntax	help
Command Modes	uBoot
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # help
**** Dell Force10 Boot Interface Help Information ****
Current access level: USER LEVEL
Use "syntax help" for more information on syntax.
Available command list (22 commands total):
boot change [primary|secondary|default]
    change operating system boot parameters
boot selection [a|b]
    change the rom bootstrap bootflash partition
boot show net config retries
    show number of retries for network boot config failure
boot write net config retries <int>
    write number of retries for network boot config failure
boot zero [primary|secondary|default]
    zero operating system boot parameters
default-gateway <ip-address>
    default-gateway - set the default gateway ip address
enable [user|admin]
    change access privilege level
help
    display help menu
-(36%)-Use <CR> to continue, q to stop:
BOOT_USER #
```

ignore enable password

Ignore the enabled password.

Syntax	ignore enable-password
Command Modes	uBoot
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

ignore startup-config

Ignore the system startup configuration.

Syntax `ignore startup-config`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

interface management ethernet ip address

Set the management port IP address and mask.

Syntax `interface management ethernet ip address <ip/mask>`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

no default gateway

Clear the default gateway IP address.

Syntax `no default-gateway`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

no interface management ethernet ip address

Clear the management port IP address and mask.

Syntax `no interface management ethernet ip address`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

reload

Reload the switch.

Syntax `reload`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

show boot blc

Show the boot loop counter value.

Syntax `show boot blc`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT USER # show boot blc ?
Total 1 possible command found.
Possible command list:
```

```
show boot blc
    show the boot loop counter value
BOOT_USER # show boot blc
Boot Loop Counter : 10

BOOT_USER #
```

show boot selection

Displays the ROM bootstrap bootflash partition.

Syntax show boot selection

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # show boot blc ?
Total 1 possible command found.
Possible command list:
show boot blc
    show the boot loop counter value
BOOT_USER # show boot blc
Boot Loop Counter : 10

BOOT_USER #
```

show bootflash

Show the summary of boot flash information.

Syntax show bootflash

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # show bootflash

GENERAL BOOTFLASH INFO
=====
Bootflash Partition A:
  Dell Force10 Networks System Boot
  Official IOM_LP_IMG_BOOT_LOADER, BSP Release 4.0.1.0bt1
```

```

Created Tue May 1 10:56:16 2012 by build on login-sjc-01

Bootflash Partition B:
Dell Force10 Networks System Boot
Official IOM_LP_IMG_BOOT_LOADER, BSP Release 4.0.1.0bt1
Created Tue May 1 10:56:16 2012 by build on login-sjc-01

Boot Selector Partition:
Dell Force10 Networks System Boot
Official IOM_XLOAD_LP_IMG_BOOT_SELECTOR, BSP Release 4.0.0.0bt1
Created Tue May 1 10:56:34 2012 by build on login-sjc-01

BOOT_USER #

```

show bootvar

Show the summary of operating system boot parameters.

Syntax show bootvar

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```

BOOT_USER # show bootvar

PRIMARY OPERATING SYSTEM BOOT PARAMETERS:
=====
boot device           : tftp
file name             : premnath
Management Ethernet IP address : 10.16.130.134/16
Server IP address    : 10.16.127.35
Default Gateway IP address : 15.0.0.1
Management Ethernet MAC address : 00:01:E8:43:DE:DF

SECONDARY OPERATING SYSTEM BOOT PARAMETERS:
=====
No Operating System boot parameters specified!

DEFAULT OPERATING SYSTEM BOOT PARAMETERS:
=====
boot device           : tftp
file name             : FTOS-XL-8-3-16-99.bin
Management Ethernet IP address : 10.16.130.134/16
Server IP address    : 10.16.127.53
Default Gateway IP address : 15.0.0.1
Management Ethernet MAC address : 00:01:E8:43:DE:DF

BOOT_USER #

```

show default gateway

Displays the default gateway IP address.

Syntax `show default-gateway`

Command Modes uBoot

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # show default-gateway
Gateway IP address: 15.0.0.1
BOOT_USER #
```

show interface management ethernet

Show the management port IP address and mask.

Syntax `show interface management ethernet`

Command Modes uBoot

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # show interface management ethernet
Management ethernet IP address: 10.16.130.134/16
BOOT_USER #
```

show interface management port config

Show the management port boot characteristics.

Syntax `show interface management port config`

Command Modes uBoot

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
BOOT_USER # show interface management port config
Management ethernet Port Configuration: no Auto Negotiate
Management ethernet Port Configuration: 100M
Management ethernet Port Configuration: full duplex
BOOT_USER #
```

syntax help

Show the syntax information.

Syntax	help
Command Modes	uBoot
Supported Modes	All Modes
Command History	
Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Data Center Bridging (DCB)

Data center bridging (DCB) refers to a set of IEEE Ethernet enhancements that provide data centers with a single, robust, converged network to support multiple traffic types, including local area network (LAN), server, and storage traffic. DCB features are auto-configured in standalone mode.

The Dell Networking OS commands for DCB features include 802.1Qbb priority-based flow control (PFC), 802.1Qaz enhanced transmission selection (ETS), and the data center bridging exchange (DCBX) protocol.

CLI commands for individual DCB features are as follows:

DCB command

- `dcb enable auto-detect on-next-reload`
- `show qos dcb-map`

PFC Commands

- `clear pfc counters`
- `show interface pfc`
- `show interface pfc statistics`

ETS Commands

- `clear ets counters`
- `show interface ets`

DCBX Commands

- `dcbx version`
- `clear dcbx counters`
- `show dcb`
- `show interface dcbx detail`

Topics:

- `advertise dcbx-appln-tlv`
- `advertise dcbx-tlv`
- `bandwidth-percentage`
- `dcb-enable`
- `dcb-policy buffer-threshold (Global Configuration)`
- `dcb-policy buffer-threshold (Interface Configuration)`
- `clear dcbx counters`
- `clear ets counters`
- `clear pfc counters`
- `dcb enable pfc-queues`
- `dcb enable auto-detect on-next-reload`
- `dcb-map stack-unit all stack-ports all`

- dcbx-port role
- dcbx version
- debug dcbx
- description
- fc-map
- fcoe-map
- fcoe priority-bits
- iscsi priority-bits
- keepalive
- interface vlan (NPIV proxy gateway)
- pfc mode on
- pfc no-drop queues
- priority
- priority-group bandwidth pfc
- priority-pgid
- qos-policy-output ets
- qos-policy-buffer
- priority-list
- scheduler
- show dcb
- show interface dcbx detail
- show interface ets
- show interface pfc
- show interface pfc statistics
- show qos priority-groups
- show qos dcb-map
- show stack-unit stack-ports ets details
- dcb pfc-shared-buffer-size
- dcb pfc-total-buffer-size
- dcb-buffer-threshold
- dcb enable pfc-queues
- dcb {ets | pfc} enable
- service-class buffer shared-threshold-weight
- show stack-unit stack-ports pfc details

advertise dcbx-appln-tlv

On a DCBX port with a manual role, configure the application priority TLVs advertised on the interface to DCBX peers.

Syntax `advertise dcbx-appln-tlv {fcoe | iscsi}`
 To remove the application priority TLVs, use the `no advertise dcbx-appln-tlv {fcoe | iscsi}` command.

Parameters `{fcoe | iscsi}` Enter the application priority TLVs, where:

- `fcoe`: enables the advertisement of FCoE in application priority TLVs.

- `iscsi`: enables the advertisement of iSCSI in application priority TLVs.

Defaults Application priority TLVs are enabled to advertise FCoE and iSCSI.

Command Modes PROTOCOL LLDP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To disable TLV transmission, use the `no` form of the command; for example, `no advertise dcbx-appln-tlv iscsi`.

advertise dcbx-tlv

On a DCBX port with a manual role, configure the PFC and ETS TLVs advertised to DCBX peers.

Syntax `advertise dcbx-tlv {ets-conf | ets-reco | pfc} [ets-conf | ets-reco | pfc]`
`[ets-conf | ets-reco | pfc]`

To remove the advertised ETS TLVs, use the `no advertise dcbx-tlv` command.

Parameters

{ets-conf | ets-reco | pfc} Enter the PFC and ETS TLVs advertised, where:

- `ets-conf`: enables the advertisement of ETS configuration TLVs.
- `ets-reco`: enables the advertisement of ETS recommend TLVs.
- `pfc`: enables the advertisement of PFC TLVs.

Defaults All PFC and ETS TLVs are advertised.

Command Modes PROTOCOL LLDP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can configure the transmission of more than one TLV type at a time; for example: `advertise dcbx-tlv ets-conf ets-reco`.

You can enable ETS recommend TLVs (`ets-reco`) only if you enable ETS configuration TLVs (`ets-conf`). To disable TLV transmission, use the `no` form of the command; for example, `no advertise dcbx-tlv pfc ets-reco`.

DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.

Configure DCBX operation at the INTERFACE level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the `show interface dcbx detail` command.

bandwidth-percentage

Assign a percentage of weight to the class/queue.

Syntax `bandwidth-percentage percentage`
To remove the bandwidth percentage, use the `no bandwidth-percentage` command.

Parameters *percentage* Enter the percentage assignment of weight to the class/queue. The range is from 1 to 100% (granularity 1%).

Defaults none

Command Modes CONFIGURATION (conf-qos-policy-out)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The unit of bandwidth percentage is 1%. A bandwidth percentage of 0 is allowed and disables the scheduling of that class. If the sum of the bandwidth percentages given to all eight classes exceeds 100%, the bandwidth percentage automatically scales down to 100%.

Related Commands [qos-policy-output](#) — creates a QoS output policy.

dcb-enable

Enable data center bridging.

Syntax `dcb enable`

To disable DCB, use the `no dcb enable` command.

Defaults	none
Command Modes	CONFIGURATION
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.4(0.0)</td><td>Supported on the FN I/O Aggregator.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the M I/O Aggregator.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.4(0.0)	Supported on the FN I/O Aggregator.	9.2(0.0)	Introduced on the M I/O Aggregator.
Version	Description								
9.9(0.0)	Introduced on the FN IOM.								
9.4(0.0)	Supported on the FN I/O Aggregator.								
9.2(0.0)	Introduced on the M I/O Aggregator.								

Usage Information DCB is not supported if you enable `link-level flow control` on one or more interfaces.

dcb-policy buffer-threshold (Global Configuration)

Assign the dcb buffer threshold policy on the stack ports. To apply the dcb buffer threshold policy on the stack-units, use the configuration mode. To apply on front-end ports, use the interface mode.

Syntax `dcb-policy buffer-threshold stack-unit all stack-ports all profile-name`

Parameters	<table><tr><td>dcb-buffer-threshold</td><td>Configure the profile name for the DCB buffer threshold.</td></tr><tr><td>profile-name</td><td>Enter the name of the profile, which can be a string of up to 32 characters in length.</td></tr><tr><td>stack-unit all</td><td>Enter the stack unit identification. Indicates the specific the stack unit or units. Entering all shows the status for all stacks.</td></tr><tr><td>stack-port all</td><td>Enter the port number of a port in a switch stack.</td></tr></table>	dcb-buffer-threshold	Configure the profile name for the DCB buffer threshold.	profile-name	Enter the name of the profile, which can be a string of up to 32 characters in length.	stack-unit all	Enter the stack unit identification. Indicates the specific the stack unit or units. Entering all shows the status for all stacks.	stack-port all	Enter the port number of a port in a switch stack.
dcb-buffer-threshold	Configure the profile name for the DCB buffer threshold.								
profile-name	Enter the name of the profile, which can be a string of up to 32 characters in length.								
stack-unit all	Enter the stack unit identification. Indicates the specific the stack unit or units. Entering all shows the status for all stacks.								
stack-port all	Enter the port number of a port in a switch stack.								

Default None

Command Modes CONFIGURATION mode

Supported Modes Full-Switch

Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.3(0.0)</td><td>Introduced on the MXL platform.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.3(0.0)	Introduced on the MXL platform.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.3(0.0)	Introduced on the MXL platform.						

Usage Information You can configure up to a maximum of four lossless (PFC) queues. By configuring four lossless queues, you can configure four different priorities and assign a particular priority to each application that your network is used to process. For example, you can assign a higher priority for time-sensitive applications and a lower priority for other services, such as file transfers. You can configure the amount of buffer space for each priority and the pause or resume thresholds for the buffer. This method of configuration enables you to manage and administer the behavior of lossless queues.

Example for Configuration Mode `Dell(conf)# dcb-policy buffer-threshold stack-unit all stack-ports all test`

Example for
Interface Mode

```
Dell(conf-if-te-1/1)#dcb-policy buffer-threshold test
```

dcb-policy buffer-threshold (Interface Configuration)

Assign the DCB policy to the DCB buffer threshold profile on interfaces. This setting takes precedence over the global buffer-threshold setting.

Syntax `dcb-policy buffer-threshold profile-name`

Parameters

buffer-threshold Configure the profile name for the DCB buffer threshold

profile-name Enter the name of the profile, which can be a string of up to 32 characters in length.

Default None

Command Modes INTERFACE mode

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information

You can configure a maximum of four lossless (PFC) queues. By configuring four lossless queues, you can configure four different priorities and assign a particular priority to each application that your network is used to process. For example, you can assign a higher priority for time-sensitive applications and a lower priority for other services, such as file transfers. You can configure the amount of buffer space to be allocated for each priority and the pause or resume thresholds for the buffer. This method of configuration enables you to effectively manage and administer the behavior of lossless queues.

Example

```
Dell(conf-if-te-0/0)#dcb-policy buffer-threshold test
```

clear dcbx counters

Clear all DCBx TLV counters on an interface.

Syntax `clear dcbx counters tengigabitethernet slot/port`

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

clear ets counters

Clear ETS TLV counters.

Syntax `clear ets counters [tengigabitethernet slot/port]`

Parameters
slot/port Enter the slot/port number.

Command Modes
· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

clear pfc counters

Clear the PFC TLV counters and PFC statistics on an interface or stack unit.

Syntax `clear pfc counters [port-type slot/port [statistics]]| [stack-unit {unit-number | all} stack-ports all]`

Parameters

- port-type** Enter the keywords `port-type` then the slot/port information.
- stack-unit *unit number*** Enter the keywords `stack-unit` then the stack-unit number to clear. The range is from 0 to 5.
- all stack-ports all** Enter the keywords `all stack-ports all` to clear the counters on all interfaces.
- statistics** Enter the keyword `statistics` to clear only the hardware PFC counters.

Defaults None

Command Modes
· EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage information If you do not use the `statistics` parameter, both hardware and DCBx counters clear.

dcb enable pfc-queues

Configure the number of PFC queues.

Syntax `dcb enable pfc-queues value`

Parameters **value** Enter the number of PFC queues. The range is from 1 to 4. The number of ports supported based on lossless queues configured will depend on the buffer.

Default 2

Command Modes CONFIGURATION mode

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.
9.3(0.0)	Supported on the MXL 10/40GbE Switch IO Module platform.

Usage Information You can configure up to a maximum of four lossless (PFC) queues. By configuring four lossless queues, you can configure four different priorities and assign a particular priority to each application that your network is used to process. For example, you can assign a higher priority for time-sensitive applications and a lower priority for other services, such as file transfers. You can configure the amount of buffer space to be allocated for each priority and the pause or resume thresholds for the buffer. This method of configuration enables you to effectively manage and administer the behavior of lossless queues.

Example `Dell(conf)#dcb pfc-queues 4`

dcb enable auto-detect on-next-reload

Enables or disables global DCB on a subsequent reload. Also internally configures PFC buffers based on DCB enable or disable. You must save and reload for the configurations to take effect. You can use the `auto-detect` keyword to re-enable IOA with the port-wise DCB auto detect feature.

Syntax `dcb enable [auto-detect | on-next-reload]`
To disable global DCB on a subsequent reload, use the `no dcb enable on-next-reload` command.

Parameters **auto-detect** Enter the keywords `auto-detect` to re-enable the Aggregator with port wise DCB auto detect feature.
on-next-reload Enter the keywords `on-next-reload` to apply DCB configurations on subsequent reload.

Defaults DCB is globally enabled with auto-detect feature.

Command Modes

· CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.3	Added auto-detect parameter on the M I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (Disable)

```
Dell#show dcb stack-unit 0 port-set 0
stack-unit 0 port-set 0
DCB Status: Enabled, PFC Queue Count: 4

stack-unit Total Buffer PFC Total Buffer PFC Shared Buffer PFC Available Buffer
PP          (KB)      (KB)      (KB)      (KB)      (KB)
-----
0           0      3822      1912      832      450
Dell(conf)#
Dell#
Dell#
Dell#conf
Dell(conf)#no dcb enable on-next-reload
Dell(conf)#end
Dell#
Dell#write memory
!
Mar 18 00:21:49: %STKUNIT0-M:CP %FILEMGR-5-FILESAVED:
  Copied running-config to startup-config in flash by default

Dell#reload

Proceed with reload [confirm yes/no]: y
syncing disks... done
unmounting file systems...
unmounting /f10/flash (/dev/ld0e)...
unmounting /usr (mfs:35)...
unmounting /lib (mfs:24)...
unmounting /f10 (mfs:21)...
unmounting /tmp (mfs:15)...
unmounting /kern (kernfs)...
unmounting / (/dev/md0a)... done
rebooting...

Dell#show dcb stack-unit 0 port-set 0
stack-unit 0 port-set 0
DCB Status: Enabled, PFC Queue Count: 4

stack-unit Total Buffer PFC Total Buffer PFC Shared Buffer PFC Available Buffer
P          (KB)      (KB)      (KB)      (KB)      (KB)
-----
0           0      3822      1912      832      450
Dell(conf)#
Dell#
```

Example (Enable)

```
Dell#show dcb stack-unit 0 port-set 0
stack-unit 0 port-set 0
DCB Status: Enabled, PFC Queue Count: 4

stack-unit Total Buffer PFC Total Buffer PFC Shared Buffer PFC Available Buffer
PP          (KB)      (KB)      (KB)      (KB)      (KB)
-----
0           0      3822      1912      832      450
Dell(conf)#
Dell#
Dell#
Dell#
Dell#conf
Dell(conf)#dcb enable on-next-reload
Dell(conf)#end
Dell#Mar 18 00:26:07: %STKUNIT0-M:CP %SYS-5-CONFIG_I:
  Configured from console

Dell#write memory
!
Mar 18 00:26:11: %STKUNIT0-M:CP %FILEMGR-5-FILESAVED:
  Copied running-config to startup-config in flash by default

Dell#
Dell#reload

Proceed with reload [confirm yes/no]: y
syncing disks... done
unmounting file systems...
unmounting /f10/flash (/dev/ld0e)...
unmounting /usr (mfs:35)...
unmounting /lib (mfs:24)...
unmounting /f10 (mfs:21)...
unmounting /tmp (mfs:15)...
unmounting /kern (kernfs)...
unmounting / (/dev/md0a)... done
rebooting...
Dell#show dcb stack-unit 0 port-set 0
```

```
stack-unit 0 port-set 0
DCB Status: Enabled, PFC Queue Count: 4

stack-unit Total Buffer PFC Total Buffer PFC Shared Buffer PFC Available Buffer
PP          (KB)          (KB)          (KB)          (KB)
-----
0           0           3822          1912          832          450
Dell(conf)#
```

Example (Enable DCB with Auto-Detect)

```
Dell#show dcb
stack-unit 0 port-set 0
DCB Status : Disabled
PFC Queue Count : 2
Total Buffer[lossy + lossless] (in KB) : 3822
PFC Total Buffer (in KB) : 1912
PFC Shared Buffer (in KB) : 832
PFC Available Buffer (in KB) : 1080
Dell#
Dell#
Dell#con
Dell(conf)#dcb enable auto-detect on-next-reload
Dell(conf)#end
Dell#Mar 18 00:35:19: %STKUNIT0-M:CP %SYS-5-CONFIG_I
: Configured from console

Dell#write memory
!
Mar 18 00:35:24: %STKUNIT0-M:CP %FILEMGR-5-FILESAVED:
Copied running-config to startup-config in flash by default

Dell#
Dell#reload

Proceed with reload [confirm yes/no]: y
syncing disks... done
unmounting file systems...
unmounting /f10/flash (/dev/ld0e)...
unmounting /usr (mfs:35)...
unmounting /lib (mfs:24)...
unmounting /f10 (mfs:21)...
unmounting /tmp (mfs:15)...
unmounting /kern (kernfs)...
unmounting / (/dev/md0a)... done
rebooting...
Dell#show dcb stack-unit 0 port-set 0
stack-unit 0 port-set 0
DCB Status: Enabled, PFC Queue Count: 4

stack-unit Total Buffer PFC Total Buffer PFC Shared Buffer PFC Available Buffer
PP          (KB)          (KB)          (KB)          (KB)
-----
0           0           3822          1912          832          450
Dell(conf)#
```

dcb-map stack-unit all stack-ports all

Apply the specified DCB map on all ports of the switch stack.

Syntax

```
dcb-map stack-unit all stack-ports all dcb-map-name
```

To remove the PFC and ETS settings in a DCB map from all stack units, use the `no dcb-map stack-unit all stack-ports all` command.

Parameters

dcb-map-name Enter the name of the DCB map.

Defaults

None

Command Modes

CONFIGURATION

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Introduced on the FC Flex IO Modules with I/O Aggregator.

Usage Information The `dcb-map stack-unit all stack-ports all` command overwrites any previous DCB maps applied to stack ports.

dcbx-port role

Configure the DCBX port role the interface uses to exchange DCB information.

Syntax `dcbx port-role {config-source | auto-downstream | auto-upstream | manual}`
To remove DCBX port role, use the `no dcbx port-role {config-source | auto-downstream | auto-upstream | manual}` command.

Parameters

config-source auto-downstream auto-upstream manual	Enter the DCBX port role, where:
	<ul style="list-style-type: none">• <code>config-source</code>: configures the port to serve as the configuration source on the switch.• <code>auto-upstream</code>: configures the port to receive a peer configuration. The configuration source is elected from auto-upstream ports.• <code>auto-downstream</code>: configures the port to accept the internally propagated DCB configuration from a configuration source.• <code>manual</code>: configures the port to operate only on administer-configured DCB parameters. The port does not accept a DCB configuration received from a peer or a local configuration source.

Defaults **Manual**

Command Modes INTERFACE PROTOCOL LLDP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.

Usage Information DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.

Configure DCBX operation at the INTERFACE level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the `show interface dcbx detail` command.

dcbx version

Configure the DCBX version used on the interface.

Syntax `dcbx version {auto | cee | cin | ieee-v2.5}`
To remove the DCBX version, use the `no dcbx version {auto | cee | cin | ieee-v2.5}` command.

Parameters

**auto | cee | cin |
ieee-v2.5**

Enter the DCBX version type used on the interface, where:

- `auto`: configures the port to operate using the DCBX version received from a peer.
- `cee`: configures the port to use CEE (Intel 1.01).
- `cin`: configures the port to use Cisco-Intel-Nuova (DCBX 1.0).
- `ieee-v2.5`: configures the port to use IEEE 802.1az (Draft 2.5).

Defaults

Auto

Command Modes

INTERFACE PROTOCOL LLDP

Supported Modes

All Modes

Command History

Version

Description

9.9(0.0)

Introduced on the FN IOM.

9.4(0.0)

Supported on the FN I/O Aggregator.

9.3(0.0)

Introduced on the FC Flex IO module installed in the M I/O Aggregator.

Usage Information

DCBX requires that you enable LLDP to advertise DCBX TLVs to peers.

Configure DCBX operation at the INTERFACE level on a switch or globally on the switch. To verify the DCBX configuration on a port, use the `show interface dcbx detail` command.

debug dcbx

Enable DCBX debugging.

Syntax

```
debug dcbx {all | auto-detect-timer | config-exchng | fail | mgmt | resource |  
sem | tlv}
```

To disable DCBX debugging, use the `no debug dcbx` command.

Parameters

**{all | auto-detect-
timer | config-
exchng | fail | mgmt
| resource | sem |
tlv}**

Enter the type of debugging, where:

- `all`: enables all DCBX debugging operations.
- `auto-detect-timer`: enables traces for DCBX auto-detect timers.
- `config-exchng`: enables traces for DCBX configuration exchanges.
- `fail`: enables traces for DCBX failures.
- `mgmt`: enables traces for DCBX management frames.
- `resource`: enables traces for DCBX system resource frames.
- `sem`: enables traces for the DCBX state machine.
- `tlv`: enables traces for DCBX TLVs.

Defaults

none

Command Modes

EXEC Privilege

Supported Modes

Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.

description

Enter a text description of the DCB policy (PFC input or ETS output).

Syntax `description text`
To remove the text description, use the `no description` command.

Parameters `text` Enter the description of the output policy. The maximum is 32 characters.

Defaults none

Command Modes

- DCB INPUT POLICY
- DCB OUTPUT POLICY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

fc-map

In an FCoE map, configure the FCoE mapped address prefix (FC-MAP) value which is used to identify FCoE traffic transmitted on the FCoE VLAN for the specified fabric.

Syntax `fc-map fc-map-value`

Parameters `fc-map-value` Enter the unique MAC address prefix used by a SAN fabric.
The range of FC-MAP values is from 0EFC00 to 0EFCFF.

Defaults None

Command Modes FCoE MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

The FC-MAP value you enter must match the FC-MAP value used by an FC switch or FCoE forwarder (FCF) in the fabric. An FCF switch accepts only FCoE traffic that uses the correct FC-MAP value.

The FC-MAP value is used to generate the fabric-provided MAC address (FP-MAC). The FPMA is used by servers to transmit FCoE traffic to the fabric. An FC-MAP can be associated with only one FCoE VLAN and vice versa.

In an FCoE map, the FC-MAP value, fabric ID, and FCoE VLAN parameters must be unique.

To remove a configured FC-MAP value from an FCoE map, enter the `no fcoe-map` command.

Related Commands

`fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

fcoe-map

Create an FCoE map which contains the parameters used to configure the links between server CNAs and a SAN fabric. Apply the FCoE map on a server-facing Ethernet port.

Syntax

`fcoe-map map-name`

Parameters

map-name Maximum: 32 alphanumeric characters.

Defaults

On the FN2210S Aggregator with PMUX modules, the following parameters are applied on all the PMUX module interfaces:

- Description: SAN_FABRIC
- Fabric-id: 1002
- Fcoe-vlan: 1002
- Fc-map: 0x0efc00
- Fcf-priority: 128
- Fka-adv-period: 8000mSec
- Keepalive: enable
- Vlan priority: 3

Command Modes

CONFIGURATION
INTERFACE

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator.

Usage Information

An FCoE map is a template used to map FCoE and FC parameters in a converged fabric. An FCoE map is used to virtualize upstream FC ports on an FN2210S Aggregator with the PMUX module NPIV proxy gateway so that they appear to downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network by providing FCoE-enabled servers and switches with the necessary parameters to log in to a SAN fabric.

On an FN2210S Aggregator with the PMUX module NPIV proxy gateway, you cannot apply an FCoE map applied on fabric-facing FC ports and server-facing 10-Gigabit Ethernet ports.

An FCoE map consists of the following parameters: the dedicated FCoE VLAN used for storage traffic, the destination SAN fabric (FC-MAP value), FCF priority used by a server, and the FIP keepalive (FKA) advertisement timeout.

In each FCoE map, the fabric ID, FC-MAP value, and FCoE VLAN parameters must be unique. Use one FCoE map to access one SAN fabric. You cannot use the same FCoE map to access different fabrics.

To remove an FCoE map from an Ethernet interface, enter the `no fcoe-map map-name` command in Interface configuration mode.

fcoe priority-bits

Configure the FCoE priority advertised for the FCoE protocol in application priority TLVs.

Syntax

```
fcoe priority-bits priority-bitmap
```

To remove the configured FCoE priority, use the `no fcoe priority-bits` command.

Parameters

priority-bitmap Enter the priority-bitmap range. The range is from 1 to FF.

Defaults

0x8

Command Modes

PROTOCOL LLDP

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.

Usage Information

This command is available at the global level only.

iscsi priority-bits

Configure the iSCSI priority advertised for the iSCSI protocol in application priority TLVs.

Syntax	<code>iscsi priority-bits <i>priority-bitmap</i></code> To remove the configured iSCSI priority, use the <code>no iscsi priority-bits</code> command.	
Parameters	<i>priority-bitmap</i>	Enter the priority-bitmap range. The range is from 1 to FF.
Defaults	0x10	
Command Modes	PROTOCOL LLDP	
Supported Modes	Programmable-Mux (PMUX) Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.
Usage Information	This command is available at the global level only.	

keepalive

Send keepalive packets periodically to keep an interface alive when it is not transmitting data.

Syntax	<code>keepalive [<i>seconds</i>]</code> To stop sending keepalive packets, use the <code>no keepalive</code> command.	
Parameters	<i>seconds</i>	(OPTIONAL) For interfaces with PPP encapsulation enabled, enter the number of seconds between keepalive packets. The range is from 0 to 23767. The default is 10 seconds .
Defaults	Enabled.	
Command Modes	INTERFACE	
Supported Modes	Programmable-Mux (PMUX) Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Introduced on the M I/O Aggregator.

Usage Information When you configure `keepalive`, the system sends a self-addressed packet out of the configured interface to verify that the far end of a WAN link is up. When you configure `no keepalive`, the system does not send keepalive packets and so the local end of a WAN link remains up even if the remote end is down.

interface vlan (NPIV proxy gateway)

Create a dedicated VLAN to be used to send and receive Fibre Channel traffic over FCoE links between servers and a fabric over an Aggregator with the PMUX module of NPIV proxy gateway.

Syntax `interface vlan vlan-id`

Parameters `vlan-id` Enter a number as the VLAN Identifier. The range is 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the FN I/O Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator.

Usage Information

FCoE storage traffic received from servers on an M I/O Aggregator with the PMUX module NPIV proxy gateway is de-capsulated into Fibre Channel packets and forwarded over FC links to SAN switches in a specified fabric. You must configure a separate FCoE VLAN for each fabric to which FCoE traffic is forwarded. Any non-FCoE traffic sent on a dedicated FCoE VLAN will be dropped.

You configure the association between a dedicated VLAN, which carries FCoE traffic from server CNAs over the NPIV proxy gateway to a SAN fabric in which destination storage arrays are installed, in an FCoE map by using the `fabric id vlan` command.

When you apply an FCoE map to a server-facing Ethernet port, the port is automatically configured as a tagged member of the FCoE VLAN.

For more information about VLANs and the commands to configure them, refer to the [Virtual LAN \(VLAN\) Commands](#) section.

Example (Single Range)

```
Dell(conf)#interface vlan 10
Dell(conf-if-vl-3)#
```

pfc mode on

Enable the PFC configuration on the port so that the priorities are included in DCBX negotiation with peer PFC devices.

Syntax `pfc mode on`

To disable the PFC configuration, use the `no pfc mode on` command.

Defaults PFC mode is on.

Command Modes DCB MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information

By applying a DCB input policy with PFC enabled, you enable PFC operation on ingress port traffic. To achieve complete lossless handling of traffic, also enable PFC on all DCB egress ports or configure the dot1p priority-queue assignment of PFC priorities to lossless queues (refer to `pfc no-drop queues`).

To disable PFC operation on an interface, enter the `no pfc mode on` command in DCB Input Policy Configuration mode. PFC is enabled and disabled as global DCB operation is enabled (`dcb-enable`) or disabled (`no dcb-enable`).

You cannot enable PFC and link-level flow control at the same time on an interface.

pfc no-drop queues

Configure the port queues that still function as no-drop queues for lossless traffic.

Syntax `pfc no-drop queues queue-range`
To remove the no-drop port queues, use the `no pfc no-drop queues` command.

Parameters *queue-range* Enter the queue range. Separate the queue values with a comma; specify a priority range with a dash; for example, `pfc no-drop queues 1,3` or `pfc no-drop queues 2-3`. The range is from 0 to 3.

Defaults No lossless queues are configured.

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The maximum number of lossless queues globally supported on the switch is two.

The following lists the dot1p priority-queue assignments.

dot1p Value in the Incoming Frame	Description heading
0	0
1	0
2	0
3	1
4	2
5	3
6	3
7	3

priority

Configure the priority for the PFC threshold to be allocated to the buffer space parameters.

Syntax

```
priority value buffer-size size pause-threshold threshold-value resume-offset
threshold-value shared-threshold-weight size
```

Parameters

priority	Specify the priority of the queue for which the buffer space settings apply
value	Enter a number in the range of 0 to 7 to denote the priority to be allocated to the dynamic buffer control mechanism
buffer-size	Ingress buffer size
size	Size of the ingress buffer in KB. Enter a number in the range of 0 to 7787. The default is 45 KB.
pause-threshold	Buffer limit for pause frames to be sent
threshold-value	Buffer limit at which the port sends the pause to peer in KB. Enter a number in the range of 0 to 7787. The default is 10 KB.
resume-offset	Buffer offset limit for resuming in KB
threshold-value	Buffer offset limit at which the port resumes the peer in KB. Enter a number in the range of 1 to 7787. The default is 10 KB.
shared-threshold-weight	Buffer shared threshold weight
size	Weightage of the priorities on the shared buffer size in the system. Enter a number in the range of 0 to 9. The default shared threshold weight is 10.

Default The default size of the ingress buffer is 45 KB. The default buffer limit at which the port sends the pause to peer and recommences the sending of packets to the peer is 10 KB. The default threshold weight of the shared buffer space is 10.

Command Modes DCB-BUFFER-THRESHOLD mode

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information For each priority, you can specify the shared buffer threshold limit, the ingress buffer size, buffer limit for pausing the acceptance of packets, and the buffer offset limit for resuming the acceptance of received packets. When PFC detects congestion on a queue for a specified priority, it sends a pause frame for the 802.1p priority traffic to the transmitting device.

You can use the `priority` command to set up both the administrative and peer-related PFC priorities. For example, you can configure the intended buffer configuration for all 8 priorities. If you configure the number of lossless queues as 4 and if the administrator-configured priorities configured within the DCB input policy is applied, then the configuration for those priorities are pre-designed. However, if the peer-provided priorities are applied, although a DCB input policy is present, the peer-provided priorities become effective for buffer configuration. This method of configuration provides an easy and flexible technique to accommodate both administratively-configured and peer-configured priorities.

Example

```
Dell (conf-dcb-buffer-thr)#priority 0 buffer-size 52 pause-threshold 16 resume-offset 10 shared-threshold-weight 7
```

priority-group bandwidth pfc

Configure the ETS bandwidth allocation and PFC mode used to manage port traffic in an 802.1p priority group.

Syntax `priority-group group-num {bandwidth percentage| strict-priority} pfc {on | off}`

Parameters

priority-group group-num	Enter the keyword <code>priority-group</code> followed by the number of an 802.1p priority group. Use the <code>priority-pgid</code> command to create the priority groups in a DCB map.
bandwidth percentage	Enter the keyword <code>bandwidth</code> followed by a bandwidth percentage allocated to the priority group. The range of valid values is 1 to 100. The sum of all allocated bandwidth percentages in priority groups in a DCB map must be 100%.
strict-priority	Configure the priority-group traffic to be handled with strict priority scheduling. Strict-priority traffic is serviced first, before bandwidth allocated to other priority groups is made available.
pfc {on off}	Configure whether priority-based flow control is enabled (on) or disabled (off) for port traffic in the priority group.

Defaults None

Command Modes DCB MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.

Usage Information

Use the `dcb-map` command to configure priority groups with PFC and/or ETS settings and apply them to Ethernet interfaces.

Use the `priority-pgid` command to map 802.1p priorities to a priority group. You can assign each 802.1p priority to only one priority group. A priority group consists of 802.1p priority values that are grouped together for similar bandwidth allocation and scheduling, and that share latency and loss requirements. All 802.1p priorities mapped to the same queue must be in the same priority group.

Repeat the `priority-group bandwidth pfc` command to configure PFC and ETS traffic handling for each priority group in a DCB map.

You can enable PFC on a maximum of two priority queues.

If you configure more than one priority group as strict priority, the higher numbered priority queue is given preference when scheduling data traffic.

If a priority group does not use its allocated bandwidth, the unused bandwidth is made available to other priority groups.

To remove a priority-group configuration in a DCB map, enter the `no priority-group bandwidth pfc` command.

By default, equal bandwidth is assigned to each dot1p priority in a priority group. Use the `bandwidth` parameter to configure the bandwidth percentage assigned to a priority group. The sum of the bandwidth allocated to all priority groups in a DCB map must be 100% of the bandwidth on the link. You must allocate at least 1% of the total port bandwidth to each priority group.

Related Commands [priority-pgid](#) – Configures the 802.1p priority traffic in a priority group for a DCB map.

priority-pgid

Assign 802.1p priority traffic to a priority group in a DCB map.

Syntax `priority-pgid dot1p0_group-num dot1p1_group-num dot1p2_group-num dot1p3_group-num dot1p4_group-num dot1p5_group-num dot1p6_group-num dot1p7_group-num`

Parameters

- `dot1p0_group-num` Enter the priority group number for each 802.1p class of traffic in a DCB map.
- `dot1p1_group-num`
- `dot1p2_group-num`
- `dot1p3_group-num`
- `dot1p4_group-num`
- `dot1p5_group-num`

dot1p6_group-num

dot1p7_group-num

Defaults	None
Command Modes	DCB MAP
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Introduced on the FC Flex IO module installed in the M I/O Aggregator.

Usage Information PFC and ETS settings are not pre-configured on Ethernet ports. You must use the `dcb-map` command to configure different groups of 802.1p priorities with PFC and ETS settings.

Using the `priority-pgid` command, you assign each 802.1p priority to one priority group. A priority group consists of 802.1p priority values that are grouped together for similar bandwidth allocation and scheduling, and that share latency and loss requirements. All 802.1p priorities mapped to the same queue must be in the same priority group. For example, the `priority-pgid 0 0 0 1 2 4 4 4` command creates the following groups of 802.1p priority traffic:

- Priority group 0 contains traffic with dot1p priorities 0, 1, and 2.
- Priority group 1 contains traffic with dot1p priority 3.
- Priority group 2 contains traffic with dot1p priority 4.
- Priority group 4 contains traffic with dot1p priority 5, 6, and 7.

To remove a `priority-pgid` configuration from a DCB map, enter the `no priority-pgid` command.

Related Commands [priority-group bandwidth pfc](#)— Configures the ETS bandwidth allocation and the PFC setting used to manage the port traffic in an 802.1p priority group.

qos-policy-output ets

To configure the ETS bandwidth allocation and scheduling for priority traffic, create a QoS output policy.

Syntax `qos-policy-output policy-name ets`
To remove the QoS output policy, use the `no qos-policy-output ets` command.

Parameters *policy-name* Enter the policy name. The maximum is 32 characters.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If an error occurs in an ETS output-policy configuration, the configuration is ignored and the scheduler and bandwidth allocation settings are reset to the ETS default values (all priorities are in the same ETS priority group and bandwidth is allocated equally to each priority).

If an error occurs when a port receives a peer's ETS configuration, the port's configuration is reset to the previously configured ETS output policy. If no ETS output policy was previously applied, the port is reset to the default ETS parameters.

Related Commands

- [scheduler](#) — schedules the priority traffic in port queues.
- [bandwidth-percentage](#) — bandwidth percentage allocated to the priority traffic in port queues.

qos-policy-buffer

Create a QoS policy buffer and enter the configuration mode to configure the no-drop queues, ingress buffer size, buffer limit for pausing, and buffer offset limit for resuming.

Syntax

```
qos-policy-buffer queue queue-num pause no-drop queue buffer-size size pause-  
threshold threshold-value resume-offset threshold-value shared-threshold-weight  
size
```

Parameters

policy-name	Name of the QoS policy buffer that is applied to an interface for this setting to be effective in conjunction with the DCB input policy. You can specify the shared buffer threshold limit, the ingress buffer size, buffer limit for pausing the acceptance of packets, and the buffer offset limit for resuming the acceptance of received packets. This method of configuration enables different peer-provided and administrative priorities to be set up because the intended queue is directly configured instead of determining the priority to queue mapping for local and remote parameters.
queue 0 to queue 7	Specify the queue number to which the QoS policy buffer parameters apply
pause	Pause frames to be sent at the specified buffer limit levels and pause packet settings
no-drop	The packets for this queue must not be dropped
value	Enter a number in the range of 0 to 7 to denote the priority to be allocated to the dynamic buffer control mechanism
buffer-size	Ingress buffer size
size	Size of the ingress buffer in KB. Enter a number in the range of 0 to 7787. The default is 45 KB.
pause-threshold	Buffer limit for pause frames to be sent
threshold-value	Buffer limit at which the port sends the pause to peer in KB. Enter a number in the range of 0 to 7787. The default is 10 KB.

resume-offset	Buffer offset limit for resuming in KB
threshold-value	Buffer offset limit at which the port resumes the peer in KB. Enter a number in the range of 1 to 7787. The default is 10 KB.
shared-threshold-weight	Buffer shared threshold weight
size	Weightage of the priorities on the shared buffer size in the system. Enter a number in the range from 0 to 9. The default shared threshold weight is 10.

Default The default size of the ingress buffer is 45 KB. The default buffer limit at which the port sends the pause to peer and recommences the sending of packets to the peer is 10 KB. The default threshold weight of the shared buffer space is 10.

Command Modes DCB-BUFFER-THRESHOLD mode

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information You must apply this buffer policy at the interface level for the attributes to be applicable in conjunction with the DCB input policy.

For each QoS policy buffer, you can specify the shared buffer threshold limit, the ingress buffer size, buffer limit for pausing the acceptance of packets, and the buffer offset limit for resuming the acceptance of received packets. When PFC detects congestion on a queue for a specified priority, it sends a pause frame for the 802.1p priority traffic to the transmitting device.

You can use set up both the administrative and peer-related PFC priorities. For example, you can configure the intended buffer configuration for all 8 priorities. If you configure the number of lossless queues as 4 and if the administrator-configured priorities configured within the DCB input policy is applied, then the configuration for those priorities are pre-designed. However, if the peer-provided priorities are applied, although a DCB input policy is present, the peer-provided priorities become effective for buffer configuration. This method of configuration provides an easy and flexible technique to accommodate both administratively-configured and peer-configured priorities.

Example

```
Dell(conf)# qos-policy-buffer test
Dell (conf-qos-policy-buffer)#queue 0 pause no-drop buffer-size 128000 pause-
threshold 103360 resume-threshold 83520

Dell(conf-qos-policy-buffer)# queue 4 pause no-drop buffer-size 128000 pause-
threshold 103360 resume-threshold 83520
```

priority-list

Configure the 802.1p priorities for the traffic on which you want to apply an ETS output policy.

Syntax

`priority-list value`

To remove the priority list, use the `no priority-list` command.

Parameters	value	Enter the priority list value. Separate priority values with a comma; specify a priority range with a dash; for example, priority-list 3,5-7. The range is from 0 to 7.
Defaults	none	
Command Modes	PRIORITY-GROUP	
Supported Modes	Full-Switch	
Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	By default:	
		<ul style="list-style-type: none"> · All 802.1p priorities are grouped in priority group 0. · 100% of the port bandwidth is assigned to priority group 0. The complete bandwidth is equally assigned to each priority class so that each class has 12 to 13%.
		<p>NOTE: Please note that Dell Networking does not recommend to use this command as it has been deprecated in the current 9.4(0.0) release. A warning message appears when you try to run this command indicating that you have to use the <code>dcb-map</code> commands in the future.</p>

scheduler

Configure the method used to schedule priority traffic in port queues.

Syntax `scheduler value`
 To remove the configured priority schedule, use the `no scheduler` command.

Parameters **value** Enter schedule priority value. The valid values are:

- `strict`: strict-priority traffic is serviced before any other queued traffic.
- `werr`: weighted elastic round robin (werr) provides low-latency scheduling for priority traffic on port queues.

Defaults Weighted elastic round robin (WERR) scheduling is used to queue priority traffic.

Command Modes POLICY-MAP-OUT-ETS

Supported Modes Programmable-Mux (PMUX)
 Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

dot1p priority traffic on the switch is scheduled to the current queue mapping. dot1p priorities within the same queue must have the same traffic properties and scheduling method.

ETS-assigned scheduling applies only to data queues, not to control queues.

The configuration of bandwidth allocation and strict-queue scheduling is not supported at the same time for a priority group. If you configure both, the configured bandwidth allocation is ignored for priority-group traffic when you apply the output policy on an interface.

Related Commands

- [bandwidth-percentage](#) — bandwidth percentage allocated to priority traffic in port queues.

show dcb

Displays the data center bridging status, the number of PFC-enabled ports, and the number of PFC-enabled queues.

Syntax `show dcb [stack-unit unit-number]`

Parameters *unit number* Enter the DCB unit number. The range is from 0 to 5.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Specify a stack-unit number on the Master switch in a stack.

Example

```
Dell#show dcb
stack-unit 0 port-set 0
DCB Status                : Enabled
PFC Queue Count           : 2
Total Buffer[lossy + lossless] (in KB) : 3822
PFC Total Buffer (in KB)   : 1912
PFC Shared Buffer (in KB)  : 832
PFC Available Buffer (in KB) : 1080
```

show interface dcbx detail

Displays the DCBX configuration on an interface.

Syntax `show interface port-type slot/port dcbx detail`

Parameters

<i>port-type</i>	Enter the port type.
<i>slot/port</i>	Enter the slot/port number.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as *slot/port-range*. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To clear DCBX frame counters, use the `clear dcbx counters interface stack-unit/port` command.

The following describes the `show interface dcbx detail` command shown in the following example.

Field	Description
Interface	Interface type with chassis slot and port number.
Port-Role	Configured the DCBX port role: auto-upstream, auto-downstream, config-source, or manual.
DCBX Operational Status	Operational status (enabled or disabled) used to elect a configuration source and internally propagate a DCB configuration. The DCBX operational status is the combination of PFC and ETS operational status.
Configuration Source	Specifies whether the port serves as the DCBX configuration source on the switch: true (yes) or false (no).
Local DCBX Compatibility mode	DCBX version accepted in a DCB configuration as compatible. In auto-upstream mode, a port can only receive a DCBX version supported on the remote peer.
Local DCBX Configured mode	DCBX version configured on the port: CEE, CIN, IEEE v2.5, or Auto (port auto-configures to use the DCBX version received from a peer).
Peer Operating version	DCBX version that the peer uses to exchange DCB parameters.
Local DCBX TLVs Transmitted	Transmission status (enabled or disabled) of advertised DCB TLVs (see TLV code at the top of the show command output).
Local DCBX Status: DCBX Operational Version	DCBX version advertised in Control TLVs.

Field	Description
Local DCBX Status: DCBX Max Version Supported	Highest DCBX version supported in Control TLVs.
Local DCBX Status: Sequence Number	Sequence number transmitted in Control TLVs.
Local DCBX Status: Acknowledgment Number	Acknowledgement number transmitted in Control TLVs.
Local DCBX Status: Protocol State	Current operational state of the DCBX protocol: ACK or IN-SYNC.
Peer DCBX Status: DCBX Operational Version	DCBX version advertised in Control TLVs received from the peer device.
Peer DCBX Status: DCBX Max Version Supported	Highest DCBX version supported in Control TLVs received from the peer device.
Peer DCBX Status: Sequence Number	Sequence number transmitted in Control TLVs received from the peer device.
Peer DCBX Status: Acknowledgment Number	Acknowledgement number transmitted in Control TLVs received from the peer device.
Total DCBX Frames transmitted	Number of DCBX frames sent from the local port.
Total DCBX Frames received	Number of DCBX frames received from the remote peer port.
Total DCBX Frame errors	Number of DCBX frames with errors received.
Total DCBX Frames unrecognized	Number of unrecognizable DCBX frames received.

Example

```
Dell(conf)# show interface tengigabitethernet 0/49 dcbx detail
Dell#show interface te 0/49 dcbx detail

E-ETS Configuration TLV enabled
  e-ETS Configuration TLV disabled
R-ETS Recommendation TLV enabled
  r-ETS Recommendation TLV disabled
P-PFC Configuration TLV enabled
  p-PFC Configuration TLV disabled
F-Application priority for FCOE enabled
  f-Application Priority for FCOE disabled
I-Application priority for iSCSI enabled
  i-Application Priority for iSCSI disabled
-----

Interface TenGigabitEthernet 0/49
  Remote Mac Address 00:00:00:00:00:11
  Port Role is Auto-Upstream
  DCBX Operational Status is Enabled
  Is Configuration Source? TRUE

Local DCBX Compatibility mode is CEE
```

```

Local DCBX Configured mode is CEE
Peer Operating version is CEE
Local DCBX TLVs Transmitted: ErPfi

Local DCBX Status
-----
DCBX Operational Version is 0
DCBX Max Version Supported is 0
Sequence Number: 2
Acknowledgment Number: 2
Protocol State: In-Sync

Peer DCBX Status:
-----
DCBX Operational Version is 0
DCBX Max Version Supported is 255
Sequence Number: 2
Acknowledgment Number: 2
Total DCBX Frames transmitted 27
Total DCBX Frames received 6
Total DCBX Frame errors 0
Total DCBX Frames unrecognized 0

```

show interface ets

Displays the ETS configuration applied to egress traffic on an interface, including priority groups with priorities and bandwidth allocation.

Syntax `show interface port-type slot/port ets {summary | detail}`

Parameters

port-type slot/port Enter the port-type slot and port ETS information.

ets

{summary | detail} Enter the keyword `summary` for a summary list of results or enter the keyword `detail` for a full list of results.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To clear ETS TLV counters, use the `clear ets counters interface port-type slot/port` command.

The following describes the `show interface summary` command shown in the following example.

Field	Description
Interface	Interface type with stack-unit and port number.
Max Supported TC Group	Maximum number of priority groups supported.
Number of Traffic Classes	Number of 802.1p priorities currently configured.
Admin mode	ETS mode: on or off. When on, the scheduling and bandwidth allocation configured in an ETS output policy or received in a DCBX TLV from a peer can take effect on an interface.
Admin Parameters	ETS configuration on local port, including priority groups, assigned dot1p priorities, and bandwidth allocation.
Remote Parameters	ETS configuration on remote peer port, including admin mode (enabled if a valid TLV was received or disabled), priority groups, assigned dot1p priorities, and bandwidth allocation. If ETS admin mode is enabled on the remote port for DCBX exchange, the Willing bit received in ETS TLVs from the remote peer is included.
Local Parameters	ETS configuration on local port, including admin mode (enabled when a valid TLV is received from a peer), priority groups, assigned dot1p priorities, and bandwidth allocation.
Operational status (local port)	Port state for current operational ETS configuration: <ul style="list-style-type: none"> · <code>Init</code>: Local ETS configuration parameters were exchanged with the peer. · <code>Recommend</code>: Remote ETS configuration parameters were received from the peer. · <code>Internally propagated</code>: ETS configuration parameters were received from the configuration source.
ETS DCBX Oper status	Operational status of the ETS configuration on the local port: match or mismatch.
Reason	Reason displayed when the DCBx operational status for ETS on a port is down.
State Machine Type	Type of state machine used for DCBX exchanges of ETS parameters: Feature — for legacy DCBX versions; Asymmetric — for an IEEE version.
Conf TLV Tx Status	Status of ETS Configuration TLV advertisements: enabled or disabled.
ETS TLV Statistic: Input Conf TLV pkts	Number of ETS Configuration TLVs received.
ETS TLV Statistic: Output Conf TLV pkts	Number of ETS Configuration TLVs transmitted.
ETS TLV Statistic: Error Conf TLV pkts	Number of ETS Error Configuration TLVs received.

Example (Summary)

```
Dell(conf)# show interfaces te 0/1 ets summary
Interface TenGigabitEthernet 0/1
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on
Admin Parameters:
-----
Admin is enabled
TC-grp Priority#      Bandwidth TSA
0       0,1,2,3,4,5,6,7 100%      ETS
1              0%        ETS
2              0%        ETS
3              0%        ETS
```

```

4          0%      ETS
5          0%      ETS
6          0%      ETS
7          0%      ETS
Priority#      Bandwidth  TSA
0          13%      ETS
1          13%      ETS
2          13%      ETS
3          13%      ETS
4          12%      ETS
5          12%      ETS
6          12%      ETS
7          12%      ETS
Remote Parameters:
-----
Remote is disabled
Local Parameters:
-----
Local is enabled
TC-grp Priority#      Bandwidth  TSA
0          0,1,2,3,4,5,6,7  100%      ETS
1          0%      ETS
2          0%      ETS
3          0%      ETS
4          0%      ETS
5          0%      ETS
6          0%      ETS
7          0%      ETS
Priority#      Bandwidth  TSA
0          13%      ETS
1          13%      ETS
2          13%      ETS
3          13%      ETS
4          12%      ETS
5          12%      ETS
6          12%      ETS
7          12%      ETS
Oper status is init
Conf TLV Tx Status is disabled
Traffic Class TLV Tx Status is disabled

```

Example (Detail)

```

Dell(conf)# show interfaces tengigabitethernet 0/1 ets detail
Interface TenGigabitEthernet 0/1
Max Supported TC Groups is 4
Number of Traffic Classes is 8
Admin mode is on
Admin Parameters :
-----
Admin is enabled
TC-grp Priority#      Bandwidth  TSA
0          0,1,2,3,4,5,6,7  100%      ETS
1          0%      ETS
2          0%      ETS
3          0%      ETS
4          0%      ETS
5          0%      ETS
6          0%      ETS
7          0%      ETS

Priority#      Bandwidth  TSA
0          13%      ETS
1          13%      ETS
2          13%      ETS
3          13%      ETS
4          12%      ETS
5          12%      ETS
6          12%      ETS
7          12%      ETS

```

```

Remote Parameters:
-----
Remote is disabled

Local Parameters :
-----
Local is enabled
TC-grp Priority#      Bandwidth TSA
0          0,1,2,3,4,5,6,7  100%    ETS
1          0%              ETS
2          0%              ETS
3          0%              ETS
4          0%              ETS
5          0%              ETS
6          0%              ETS
7          0%              ETS

Priority#           Bandwidth TSA
0                   13%      ETS
1                   13%      ETS
2                   13%      ETS
3                   13%      ETS
4                   12%      ETS
5                   12%      ETS
6                   12%      ETS
7                   12%      ETS

Oper status is init
ETS DCBX Oper status is Down
Reason: Port Shutdown
State Machine Type is Asymmetric
Conf TLV Tx Status is enabled
Reco TLV Tx Status is enabled
0 Input Conf TLV Pkts, 0 Output Conf TLV Pkts, 0 Error Conf TLV Pkts
0 Input Traffic Class TLV Pkts, 0 Output Traffic Class TLV Pkts, 0 Error
Traffic Class
TLV Pkts

```

show interface pfc

Displays the PFC configuration applied to ingress traffic on an interface, including priorities and link delay.

Syntax `show interface port-type slot/port pfc {summary | detail}`

Parameters

port-type slot/ port Enter the port-type slot and port PFC information.
pfc

{summary | detail} Enter the keyword `summary` for a summary list of results or enter the keyword `detail` for a full list of results.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To clear the PFC TLV counters, use the `clear pfc counters interface port-type slot/port` command.

The following describes the `show interface pfc summary` command shown in the following example.

Field	Description
Interface	Interface type with stack-unit and port number.
Admin mode is on Admin is enabled	PFC admin mode is on or off with a list of the configured PFC priorities. When the PFC admin mode is on, PFC advertisements are enabled to be sent and received from peers; received PFC configuration take effect. The admin operational status for a DCBX exchange of PFC configuration is enabled or disabled.
Remote is enabled, Priority list Remote Willing Status is enabled	Operational status (enabled or disabled) of peer device for DCBX exchange of PFC configuration with a list of the configured PFC priorities. Willing status of peer device for DCBX exchange (Willing bit received in PFC TLV): enabled or disable.
Local is enabled	DCBX operational status (enabled or disabled) with a list of the configured PFC priorities.
Operational status (local port)	Port state for current operational PFC configuration: <ul style="list-style-type: none">· <code>Init</code>: Local PFC configuration parameters were exchanged with the peer.· <code>Recommend</code>: Remote PFC configuration parameters were received from the peer.· <code>Internally propagated</code>: PFC configuration parameters were received from the configuration source.
PFC DCBX Oper status	Operational status for the exchange of the PFC configuration on the local port: match (up) or mismatch (down).
Reason	Reason displayed when the DCBx operational status for PFC on a port is down.
State Machine Type	Type of state machine used for DCBX exchanges of the PFC parameters: Feature — for legacy DCBX versions; Symmetric — for an IEEE version.
TLV Tx Status	Status of the PFC TLV advertisements: enabled or disabled.
PFC Link Delay	Link delay (in quanta) used to pause specified priority traffic.
Application Priority TLV: FCOE TLV Tx Status	Status of FCoE advertisements in application priority TLVs from the local DCBX port: enabled or disabled.
Application Priority TLV: SCSI TLV Tx Status	Status of iSCSI advertisements in application priority TLVs from the local DCBX port: enabled or disabled.

Field	Description
Application Priority TLV: Local FCOE Priority Map	Priority bitmap the local DCBX port uses in FCoE advertisements in application priority TLVs.
Application Priority TLV: Local ISCSI Priority Map	Priority bitmap the local DCBX port uses in iSCSI advertisements in application priority TLVs.
Application Priority TLV: Remote FCOE Priority Map	Status of FCoE advertisements in application priority TLVs from the remote peer port: enabled or disabled.
Application Priority TLV: Remote ISCSI Priority Map	Status of iSCSI advertisements in application priority TLVs from the remote peer port: enabled or disabled.
PFC TLV Statistics: Input TLV pkts	Number of PFC TLVs received.
PFC TLV Statistics: Output TLV pkts	Number of PFC TLVs transmitted.
PFC TLV Statistics: Error pkts	Number of PFC error packets received.
PFC TLV Statistics: Pause Tx pkts	Number of PFC pause frames transmitted.
PFC TLV Statistics: Pause Rx pkts	Number of PFC pause frames received.

Example (Summary)

```
Dell# show interfaces tengigabitethernet 0/4 pfc summary
Interface TenGigabitEthernet 0/4
  Admin mode is on
  Admin is enabled
  Remote is enabled, Priority list is 4
  Remote Willing Status is enabled
  Local is enabled
  Oper status is Recommended
  PFC DCBX Oper status is Up
  State Machine Type is Feature
  TLV Tx Status is enabled
  PFC Link Delay 45556 pause quantams
  Application Priority TLV Parameters :
  -----
  FCOE TLV Tx Status is disabled
  ISCSI TLV Tx Status is disabled
  Local FCOE PriorityMap is 0x8
  Local ISCSI PriorityMap is 0x10
  Remote FCOE PriorityMap is 0x8
  Remote ISCSI PriorityMap is 0x8

Dell# show interfaces tengigabitethernet 0/4 pfc detail
Interface TenGigabitEthernet 0/4
  Admin mode is on
  Admin is enabled
  Remote is enabled
  Remote Willing Status is enabled
  Local is enabled
  Oper status is recommended
  PFC DCBX Oper status is Up
  State Machine Type is Feature
  TLV Tx Status is enabled
```

```
PFC Link Delay 45556 pause quanta
Application Priority TLV Parameters :
-----
FCOE TLV Tx Status is disabled
ISCSI TLV Tx Status is disabled
Local FCOE PriorityMap is 0x8
Local ISCSI PriorityMap is 0x10
Remote FCOE PriorityMap is 0x8
Remote ISCSI PriorityMap is 0x8
0 Input TLV pkts, 1 Output TLV pkts, 0 Error pkts,
0 Pause Tx pkts, 0 Pause Rx pkts
```

show interface pfc statistics

Displays counters for the PFC frames received and transmitted (by dot1p priority class) on an interface.

Syntax `show interface port-type slot/port pfc statistics`

Parameters

port-type Enter the port type.

slot/port Enter the slot/port number.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O aggregator. This command is supported in Programmable-Mux (PMUX) mode only.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Summary)

```
Dell#show interfaces te 0/3 pfc statistics
Interface TenGigabitEthernet 0/3

Priority Rx XOFF Frames Rx Total Frames Tx Total Frames
-----
0          0          0          0          0
1          0          0          0          0
2          0          0          0          0
3          0          0          0          0
4          0          0          0          0
5          0          0          0          0
6          0          0          0          0
7          0          0          0          0
```

show qos priority-groups

Displays the ETS priority groups configured on the switch, including the 802.1p priority classes and ID of each group.

Syntax `show qos priority-groups`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

NOTE: Please note that Dell Networking does not recommend to use this command as it has been deprecated in the current 9.4(0.0) release. A warning message appears when you try to run this command indicating that you have to use the `dcb-map` commands in the future.

Example

```
Dell#show qos priority-groups
priority-group ipc
  priority-list 4
  set-pgid 2
```

show qos dcb-map

Display the DCB parameters configured in a specified DCB map.

Syntax `show qos dcb-map map-name`

Parameters `map-name` Displays the PFC and ETS parameters configured in the specified map.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information

Use the `show qos dcb-map` command to display the enhanced transmission selection (ETS) and priority-based flow control (PFC) parameters used to configure server-facing Ethernet ports.

The following table describes the `show qos dcb-map` output shown in the example below.

Field	Description
State	Complete: All mandatory DCB parameters are correctly configured. In progress: The DCB map configuration is not complete. Some mandatory parameters are not configured.
PFC Mode	PFC configuration in DCB map: On (enabled) or Off.
PG	Priority group configured in the DCB map.
TSA	Transmission scheduling algorithm used by the priority group: Enhanced Transmission Selection (ETS).
BW	Percentage of bandwidth allocated to the priority group.
PFC	PFC setting for the priority group: On (enabled) or Off.
Priorities	802.1p priorities configured in the priority group.

Example

```
Dell# show qos dcb-map dcbmap2

State      :Complete
PfcMode:ON
-----
PG:0 TSA:ETS BW:50 PFC:OFF
Priorities:0 1 2 4 5 6 7

PG:1 TSA:ETS BW:50 PFC:ON
Priorities:3
```

show stack-unit stack-ports ets details

Displays the ETS configuration applied to egress traffic on stacked ports, including ETS Operational mode on each unit and the configured priority groups with dot1p priorities, bandwidth allocation, and scheduler type.

Syntax `show stack-unit {all | stack-unit} stack-ports {all | port-number} ets details`

Parameters

stack-unit Enter the stack unit identification.

port-number Enter the port number.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)# show stack-unit all stack-ports all ets details

Stack unit 0 stack port all
Max Supported TC Groups is 4
Number of Traffic Classes is 1
Admin mode is on
```

```

Admin Parameters:
-----
Admin is enabled
TC-grp Priority#           Bandwidth TSA
-----
0          0,1,2,3,4,5,6,7  100%      ETS
1          - - -
2          - - -
3          - - -
4          - - -
5          - - -
6          - - -
7          - - -
8          - - -

Stack unit 1 stack port all
Max Supported TC Groups is 4
Number of Traffic Classes is 1
Admin mode is on
Admin Parameters:
-----
Admin is enabled
TC-grp Priority#           Bandwidth TSA
-----
0          0,1,2,3,4,5,6,7  100%      ETS
1          - - -
2          - - -
3          - - -
4          - - -
5          - - -
6          - - -
7          - - -
8          - - -

```

dcb pfc-shared-buffer-size

Configure the maximum amount of shared buffer size for PFC packets in kilobytes.

Syntax	<code>dcb pfc-shared-buffer-size KB</code>	
Parameters	KB	Enter a number in the range of 0 to 7787.
Default	None.	
Command Modes	CONFIGURATION mode	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL platform.

Usage Information Configure the maximum shared buffer available for PFC traffic. You can choose to increase or decrease the shared buffer that is allocated in the system by default. Configure the shared buffer size less than the total PFC buffer size. If the buffer size and DCB buffer threshold settings are applied on one or more ports, a validation is performed to determine whether following condition is satisfied: If the shared buffer size is more than the total PFC buffer size value, the configuration is not saved and a system logging message is generated as follows:
 Shared-pfc-buffer-size <= (Total-pfc-buffer-size — Σpfc priority <> buffer-size on each port, priority).

```
Dell(conf)#dcb pfc-shared-buffer-size 2000
%ERROR: pfc shared buffer size configured cannot accommodate existing buffer
requirement in the system.
```

Enter a smaller value for the shared buffer size or increase the total buffer size appropriately by using the `dcb pfc-total- buffer-size` command.

Example `Dell(conf)#dcb pfc-shared-buffer-size 5000`

dcb pfc-total-buffer-size

Configure the total buffer size for PFC in kilobytes.

Syntax `dcb pfc-total-buffer-size KB`

Parameters **KB** Enter a number in the range of 0 to 7787.

Default The default is 6592KB.

Command Modes CONFIGURATION mode

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.9(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Configure the maximum buffer available for PFC traffic. You can choose to increase or decrease the buffer size that is allocated in the system by default. However, if you modify the PFC buffer size lower than the previously configured size, the system determines whether this reduction in size is valid without disrupting the existing configuration. In such a scenario, disable and re-enable DCB. For example, if you modify the total buffer size as 4000 KB from the previous size of 5000 KB, an error message is displayed that this reduction cannot be performed owing to existing system configuration because of queues that are being currently in process.

The lossless queue limit per port is validated based on the `dcb pfc-queues` command. PFC queue configuration identifies the maximum number of queues a port can support. Although the queue limit per port is a baseline when dynamic buffering is enabled, the limit per port for queues depends on the availability of the buffer.

d.

Example

```
Dell(conf)#dcb pfc-total-buffer-size 5000
```

```
Dell(conf)#dcb pfc-total-buffer-size 4000
```

```
%ERROR: Total pfc buffer size configured cannot accommodate existing buffer
requirement in the system.
```

dcb-buffer-threshold

Configure the profile name for the DCB buffer threshold.

Syntax `dcb buffer-threshold profile-name`

Parameters	<i>profile-name</i>	Enter the name of the profile, which can be a string of up to 32 characters in length.
Default	None	
Command Modes	CONFIGURATION mode	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL platform.
Usage Information	When you enter the profile name, you enter the DCB buffer threshold configuration mode. You can specify the shared buffer threshold limit, the ingress buffer size, buffer limit for pausing the acceptance of packets, and the buffer offset limit for resuming the acceptance of received packets.	
Example	Dell(conf)#dcb buffer-threshold test	
Example of commands in dcb buffer-threshold mode	<pre> qos-policy-buffer queue queue-num pause no-drop queue buffer-size size pause- threshold threshold-value resume-offset threshold-value shared-threshold-weight size Dell(conf)# qos-policy-buffer test Dell(conf-qos-policy-buffer)#queue 0 pause no-drop buffer-size 128000 pause-threshold 103360 resume-threshold 83520 Dell(conf-qos-policy-buffer)# queue 4 pause no-drop buffer-size 128000 pause-threshold 103360 resume-threshold 83520 priority value buffer-size size pause-threshold threshold-value resume-offset threshold-value shared-threshold-weight size Dell(conf-dcb-buffer-thr)#priority 0 buffer-size 52 pause-threshold 16 resume- offset 10 shared-threshold-weight 7 </pre>	

dcb enable pfc-queues

Configure the number of PFC queues.

Syntax	<code>dcb enable pfc-queues value</code>	
Parameters	<i>value</i>	Enter the number of PFC queues. The range is from 1 to 4. The number of ports supported based on lossless queues configured will depend on the buffer.
Command Modes	CONFIGURATION mode	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL platform.
Usage Information	You can configure up to a maximum of four lossless (PFC) queues. By configuring four lossless queues, you can configure four different priorities and assign a particular priority to each application that your network is used to process. For example, you can assign a higher priority for time-sensitive applications and a lower priority for other	

services, such as file transfers. You can configure the amount of buffer space to be allocated for each priority and the pause or resume thresholds for the buffer. This method of configuration enables you to effectively manage and administer the behavior of lossless queues.

Example `Dell(conf)#dcb pfc-queues 4`

dcb {ets | pfc} enable

Enable priority flow control or enhanced transmission selection on interface.

Syntax `dcb {ets | pfc} enable`

- To disable ETS on interface, use “**no dcb ets enable**” command.
- To disable PFC on interface, use “**no dcb pfc enable**” command.

Defaults Enable

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3 (0.1)	Introduced on S6000, S4810, and S4820T.

Usage Information PFC and ETS are enabled by default on the interfaces when DCB is globally enabled (refer to `dcb enable`). In some network topology, you may want to disable PFC on an interface and apply link level flow control; Similarly you may want to disable ETS on an interface and apply QoS bandwidth configurations.

Limitations

- “`dcb-map`” CLI on interface is mutually exclusive to “`no dcb ets enable`” and “`no dcb pfc enable`”.
- “`pfc priority`” CLI is mutually exclusive to “`no dcb pfc enable`” command.
- Deprecated CLI “`dcb-policy input`” and “`no dcb pfc enable`” cannot coexist at interface level.
- Deprecated CLI “`dcb-policy output`” and “`no dcb ets enable`” cannot coexist at interface level.

service-class buffer shared-threshold-weight

Create a service class and associate the threshold weight of the shared buffer with each of the queues per port in the egress direction.

Syntax `[No] Service-class buffer shared-threshold-weight {[queue0 number] || [queue1 number] || [queue2 number] || [queue3 number] || [queue4 number] || [queue5 number] || [queue6 number] || [queue7 number]}`

Parameters

buffer	Define the shared buffer settings.
shared-threshold-weight	Specify the weight of a queue for the shared buffer space.
queue 0 to queue 7	To apply the shared-threshold weight, specify the queue number .

number Enter a weight for the queue on the shared buffer as a number in the range of 1 to 11.

Default The default threshold weight on the shared buffer for each queue is 9. Therefore, each queue can consume up to 66.67 percent of available shared buffer by default.

Command Modes INTERFACE mode

Supported Modes Full-Switch

Usage Information You can configure all the data queues. You can configure queues 0-7. The following table describes the mapping between the threshold weight of the shared buffer on the queue. It also shows the percentage of the available shared buffer used by the queues for each of the corresponding threshold weights of the shared buffer:

shared-threshold-weight on the queue	% of available shared buffer that can be consumed by the queue.
0	No dynamic sharing; shared buffer = 0.
1	0.77%
2	1.54%
3	3.03%
4	5.88%
5	11.11%
6	20%
7	33.33%
8	50%
9	66.67%
10	80%
11	88.89%

Command History

Version	Description
9.9(0.0)	Introduced on the MXL.

Example

```
Dell (conf-if-te-1/8) #Service-class buffer shared-threshold-weight queue5 4
queue7 6
```

show stack-unit stack-ports pfc details

Displays the PFC configuration applied to ingress traffic on stacked ports, including PFC Operational mode on each unit with the configured priorities, link delay, and number of pause packets sent and received.

Syntax `show stack-unit {all | stack-unit} stack-ports {all | port-number} pfc details`

Parameters

<i>stack-unit</i>	Enter the stack unit.
<i>port-number</i>	Enter the port number.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)# show stack-unit all stack-ports all pfc details

stack unit 0 stack-port all
  Admin mode is On
  Admin is enabled, Priority list is 4-5
  Local is enabled, Priority list is 4-5
  Link Delay 45556 pause quantum
  0 Pause Tx pkts, 0 Pause Rx pkts

stack unit 1 stack-port all
  Admin mode is On
  Admin is enabled, Priority list is 4-5
  Local is enabled, Priority list is 4-5
  Link Delay 45556 pause quantum
  0 Pause Tx pkts, 0 Pause Rx pkts
```

Dynamic Host Configuration Protocol

Dynamic host configuration protocol (DHCP) is an application layer protocol that dynamically assigns IP addresses and other configuration parameters to network end-stations (hosts) based on configuration policies determined by network administrators.

An Aggregator can operate as a DHCP client. As a DHCP client, the Aggregator requests an IP address from a DHCP server.

The following types of DHCP commands are described in this chapter:

- DHCP Client Commands
- Other Commands supported by DHCP Client

DHCP Client Commands

- `clear ip dhcp client statistics`
- `ip address dhcp`
- `release dhcp interface`
- `renew dhcp interface`
- `show ip dhcp client statistics`
- `show ip dhcp lease`

Other Commands supported by DHCP Client

- `debug ip dhcp client events`
- `debug ip dhcp client packets`

Topics:

- [Commands to Configure the System to be a DHCP Server](#)
- [Commands to Configure the System to be a DHCP Client](#)
- [Other Commands Supported by the DHCP Client](#)
- [Commands to Configure Secure DHCP](#)

Commands to Configure the System to be a DHCP Server

To configure the system to be a DHCP server, use the following commands.

clear ip dhcp

Reset the DHCP counters.

Syntax `clear ip dhcp [binding {address} | conflict | server statistics]`

Parameters	binding	Enter the keyword <code>binding</code> to delete all entries in the binding table.
	address	Enter the IP address to clear the binding entry for a single IP address.
	conflicts	Enter the keyword <code>conflicts</code> to delete all of the log entries created for IP address conflicts.
	server statistics	Enter the keywords <code>server statistics</code> to clear all the server counter information.
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Entering <CR> after the <code>clear ip dhcp binding</code> command clears all the IPs from the binding table.	

debug ip dhcp server

Display the Dell Networking OS debugging messages for DHCP.

Syntax `debug ip dhcp server [events | packets]`

Parameters	events	Enter the keyword <code>events</code> to display the DHCP state changes.
	packet	Enter the keyword <code>packet</code> to display packet transmission/reception.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

debug ipv6 dhcp

To enable debug logs for DHCPv6 relay agent transactions.

Syntax `debug ipv6 dhcp`
To disable the debug logs for DHCPv6 relay agent transactions, use the `debug ipv6 dhcp` command.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

default-router

Assign a default gateway to clients based on the address pool.

Syntax `default-router address [address2...address8]`

Parameters

address Enter a list of routers that may be the default gateway for clients on the subnet. You may specify up to eight routers. List them in order of preference.

Defaults none

Command Modes DHCP <POOL>

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

disable

Disable the DHCP server.

Syntax `disable`

DHCP Server is disabled by default. To enable the system to be a DHCP server, use the `no disable` command.

Defaults Disabled

Command Modes DHCP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

dns-server

Assign a DNS server to clients based on address pool.

Syntax	<code>dns-server address [address2...address8]</code>	
Parameters	<i>address</i>	Enter a list of DNS servers that may service clients on the subnet. You may list up to eight servers, in order of preference.
Defaults	none	
Command Modes	DHCP <POOL>	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

domain-name

Assign a domain to clients based on the address pool.

Syntax	<code>domain-name name</code>	
Parameters	<i>name</i>	Give a name to the group of addresses in a pool.
Defaults	none	
Command Modes	DHCP <POOL>	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

excluded-address

Prevent the server from leasing an address or range of addresses in the pool.

Syntax	<code>excluded-address [address low-address high-address]</code>	
Parameters	<i>address</i>	Enter a single address to be excluded from the pool.
	<i>low-address</i>	Enter the lowest address in a range of addresses to be excluded from the pool.
	<i>high-address</i>	Enter the highest address in a range of addresses to be excluded from the pool.

Defaults	none
Command Modes	DHCP
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

hardware-address

For manual configurations, specify the client hardware address.

Syntax `hardware-address address`

Parameters

address	Enter the hardware address of the client.
----------------	---

Defaults none

Command Modes DHCP <POOL>

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

host

For manual (rather than automatic) configurations, assign a host to a single-address pool.

Syntax `host address`

Parameters

address/mask	Enter the host IP address and subnet mask.
---------------------	--

Defaults none

Command Modes DHCP <POOL>

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

lease

Specify a lease time for the addresses in a pool.

Syntax `lease {days [hours] [minutes] | infinite}`

Parameters

<i>days</i>	Enter the number of days of the lease. The range is from 0 to 31.
<i>hours</i>	Enter the number of hours of the lease. The range is from 0 to 23.
<i>minutes</i>	Enter the number of minutes of the lease. The range is from 0 to 59.
<i>infinite</i>	Specify that the lease never expires.

Defaults **24 hours**

Command Modes DHCP <POOL>

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

netbios-name-server

Specify the NetBIOS windows internet naming service (WINS) name servers, in order of preference, that are available to Microsoft dynamic host configuration protocol (DHCP) clients.

Syntax `netbios-name-server address [address2...address8]`

Parameters

<i>address</i>	Enter the address of the NETBIOS name server. You may enter up to eight, in order of preference.
----------------	--

Defaults none

Command Modes DHCP <POOL>

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

netbios-node-type

Specify the NetBIOS node type for a Microsoft DHCP client. Dell Networking Operating System (OS) recommends specifying clients as `hybrid`.

Syntax	<code>netbios-node-type type</code>	
Parameters	type	Enter the NETBIOS node type: <ul style="list-style-type: none">• Broadcast: Enter the keyword <code>b-node</code>.• Hybrid: Enter the keyword <code>h-node</code>.• Mixed: Enter the keyword <code>m-node</code>.• Peer-to-peer: Enter the keyword <code>p-node</code>.
Defaults	Hybrid	
Command Modes	DHCP <POOL>	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

network

Specify the range of addresses in an address pool.

Syntax	<code>network network /prefix-length</code>	
Parameters	network/ prefix-length	Specify a range of addresses. Prefix-length range is from 17 to 31.
Defaults	none	
Command Modes	DHCP <POOL>	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show ip dhcp binding

Display the DHCP binding table.

Syntax `show ip dhcp binding`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show ip dhcp configuration

Display the DHCP configuration.

Syntax `show ip dhcp configuration [global | pool name]`

Parameters

pool <i>name</i>	Display the configuration for a DHCP pool.
global	Display the DHCP configuration for the entire system.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show ip dhcp conflict

Display the address conflict log.

Syntax `show ip dhcp conflict address`

Parameters

<i>address</i>	Display a particular conflict log entry.
-----------------------	--

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show ip dhcp server

Display the DHCP server statistics.

Syntax	<code>show ip dhcp server statistics</code>	
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Commands to Configure the System to be a DHCP Client

To configure the system to be a DHCP client, use the following commands.

ip address dhcp

Acquire an IP address dynamically on an interface from the DHCP server.

Syntax	<code>ip address dhcp [relay vendor-class-identifier]</code> To disable DHCP Client on an interface, use the <code>no ip address dhcp</code> command.
---------------	--

Command Modes	INTERFACE
Supported Modes	All Modes
Default	Enabled

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information In the I/O Aggregator, the DHCP client is enabled only on the default VLAN and management interface 0/0. Use the `ip address` command to assign a static IP address that overwrites the dynamically assigned IP address.

Other Commands Supported by the DHCP Client

The following commands are supported by the DHCP client.

clear ip dhcp client statistics

Displays DHCP client statistics, including the number of DHCP messages sent and received on an interface.

Syntax `clear ip dhcp client statistics interface type slot/port`

Parameters

interface <i>type slot/port</i>	Clear DHCP client statistics on the specified interface.
	<ul style="list-style-type: none">For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes All Modes

Default None

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

debug ip dhcp client events

Enable the display of log messages for the following events on DHCP client interfaces:

- IP address acquisition
- IP address release
- Renewal of IP address and lease time
- Release of an IP address

Syntax `debug ip dhcp client events [interface type slot/port]`

Parameters

interface <i>type slot/port</i>	Display log messages for DHCP packets sent and received on the specified interface.
	<ul style="list-style-type: none">For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Command Modes	EXEC Privilege
Supported Modes	All Modes
Default	None
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

debug ip dhcp client packets

Enable the display of log messages for all DHCP packets sent and received on DHCP client interfaces.

Syntax `debug ip dhcp client packets [interface type slot/port]`

Parameters

- | | |
|---------------------------------|---|
| interface type slot/port | Display log messages for DHCP packets sent and received on the specified interface. |
|---------------------------------|---|
- For the management interface on the stack-unit, enter the keyword `managementethernet` followed by slot/port information. The slot and port range is 0
 - For a VLAN, enter the keyword `vlan` followed by a number from 1 to 4094.

Command Modes	EXEC Privilege
Supported Modes	All Modes
Default	None
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

release dhcp interface

Release the dynamically-acquired IP address on an Ethernet interface while retaining the DHCP client configuration on the interface.

Syntax `release dhcp interface type slot/port`

Parameters

- | | |
|---------------------------------|--|
| interface type slot/port | <ul style="list-style-type: none"> • For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0. • For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094. |
|---------------------------------|--|

Command Modes	EXEC Privilege
----------------------	----------------

Supported Modes All Modes

Default None

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information

When you enter the `release dhcp` command, although the IP address that was dynamically-acquired from a DHCP server is released from an interface, the ability to acquire a new DHCP server-assigned address remains in the running configuration for the interface. To acquire a new IP address, enter either the `renew dhcp` command at the EXEC privilege level or the `ip address dhcp` command at the interface configuration level.

renew dhcp interface

Re-acquire a dynamic IP address on an Ethernet interface enabled as a DHCP client.

Syntax `renew dhcp interface type slot/port}`

Parameters

interface type slot/ port	Enter any of the following keywords and slot/port or number to clear counters from a specified interface: <ul style="list-style-type: none">For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
--------------------------------------	---

Command Modes EXEC Privilege

Supported Modes All Modes

Default None.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage information

The `renew dhcp` command is used to renew the lease of IP address obtained through dhcp.

To display the currently configure dynamic IP address and lease time, enter the `show ip dhcp lease` command.

show ip dhcp client statistics

Displays DHCP client statistics, including the number of DHCP messages sent and received on an interface.

Syntax `show ip dhcp client statistics interface type slot/port`

Parameters

interface type <i>slot/</i> <i>port</i>	Display DHCP client statistics on the specified interface.
	<ul style="list-style-type: none">For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes All Modes

Default None.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

show ip dhcp lease

Displays lease information about the dynamic IP address currently assigned to a DHCP client-enabled interface.

Syntax `show ip dhcp lease[interface type slot/port]`

Parameters

interface type <i>slot/</i> <i>port</i>	Display DHCP client statistics on the specified interface.
	<ul style="list-style-type: none">For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes All Modes

Default Display DHCP lease information on all DHCP client-enabled interfaces on the switch.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Commands to Configure Secure DHCP

DHCP, as defined by RFC 2131, provides no authentication or security mechanisms. Secure DHCP is a suite of features that protects networks that use dynamic address allocation from spoofing and attacks.

arp inspection

Enable dynamic arp inspection (DAI) on a VLAN.

Syntax `arp inspection`

Defaults Disabled

Command Modes INTERFACE VLAN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [arp inspection-trust](#) — specifies a port as trusted so that ARP frames are not validated against the binding table.

arp inspection-trust

Specify a port as trusted so that ARP frames are not validated against the binding table.

Syntax `arp inspection-trust`

Defaults Disabled

Command Modes

- INTERFACE
- INTERFACE PORT-CHANNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [arp inspection](#) — enables dynamic ARP inspection on a VLAN.

clear ip dhcp snooping

Clear the DHCP binding table.

Syntax `clear ip dhcp snooping binding`

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip dhcp snooping](#) — displays the contents of the DHCP binding table.

clear ipv6 dhcp snooping binding

Clear all the DHCPv6 snooping binding database entries.

Syntax	<code>clear ipv6 dhcp snooping binding</code>
Defaults	none
Command Modes	EXEC Privilege
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM

Example

```
Dell# clear ipv6 dhcp snooping?
binding Clear the snooping binding database
```

ip dhcp snooping

Enable DHCP snooping globally.

Syntax	<code>[no] ip dhcp snooping</code>
Defaults	Disabled
Command Modes	CONFIGURATION
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When enabled, no learning takes place until you enable snooping on a VLAN. After disabling DHCP snooping, the binding table is deleted, and Option 82, IP Source Guard, and Dynamic ARP Inspection are disabled.

Introduced in the Dell Networking OS version 7.8.1.0, DHCP snooping was available for Layer 3 only and dependent on DHCP Relay Agent (ip helper-address). The Dell Networking OS version 8.2.1.0 extends DHCP Snooping to Layer 2, and you do not have to enable relay agent to snoop on Layer 2 interfaces.

Related Commands `ip dhcp snooping vlan` — enables DHCP snooping on one or more VLANs.

ipv6 dhcp snooping

Enable DHCPv6 snooping globally for ipv6.

Syntax `[no] ipv6 dhcp snooping`
To disable the snooping globally, use the `no ipv6 dhcp snooping` command.

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

ip dhcp snooping database

Delay writing the binding table for a specified time.

Syntax `ip dhcp snooping database write-delay minutes`

Parameters `minutes` The range is from 5 to 21600.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 dhcp snooping database write-delay

To set time interval for storing the snooping binding entries in a file.

Syntax `[no] ipv6 dhcp snooping database write-delay value`

To disable the storing of snooping binding entries in a file, use the `no ipv6 dhcp snooping write-delay` command.

Parameters	value	The range is from 5 to 21600. The value of the minutes range is from 5 min. to 15 days.
Defaults	none	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.7(0.0)	Introduced on the MXL.

ip dhcp snooping binding

Create a static entry in the DHCP binding table.

Syntax `[no] ip dhcp snooping binding mac address vlan-id vlan-id ip ip-address interface type slot/port lease number`

Parameters	mac address	Enter the keyword <code>mac</code> then the MAC address of the host to which the server is leasing the IP address.
	vlan-id vlan-id	Enter the keywords <code>vlan-id</code> then the VLAN to which the host belongs. The range is from 2 to 4094.
	ip ip-address	Enter the keyword <code>ip</code> then the IP address that the server is leasing.
	interface type	Enter the keyword <code>interface</code> then the type of interface to which the host is connected: <ul style="list-style-type: none">For a Ten-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code>.
	slot/port	Enter the slot and port number of the interface.
	lease time	Enter the keyword <code>lease</code> then the amount of time the IP address are leased. The range is from 1 to 4294967295.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.13(0.0)	Enhanced the command to map multiple IP addresses to one MAC address. Enhanced to support DHCP snooping in a VLT setup.
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Instructions You can map multiple IP addresses to the same MAC address.

Related Commands [show ip dhcp snooping](#) — displays the contents of the DHCP binding table.

ip dhcp snooping database renew

Renew the binding table.

Syntax `ip dhcp snooping database renew`

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp snooping trust

Configure an interface as trusted.

Syntax `[no] ip dhcp snooping trust`

Defaults **Untrusted**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 dhcp snooping trust

Configure an interface as trusted for DHCP snooping.

Syntax `[no] ipv6 dhcp snooping trust`

To disable dhcp snooping trusted capability on this interface, use the `no ipv6 dhcp snooping trust` command.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

ip dhcp source-address-validation

Enable the IP Source Guard.

Syntax `[no] ip dhcp source-address-validation [ipmac]`

Parameters

ipmac	Enable IP+MAC Source Address Validation.
--------------	--

Defaults Disabled

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Allocate at least one FP block to `ipmacac1` before you can enable IP+MAC Source Address Validation.

- 1 Use the `cam-ac1 l2ac1` command from CONFIGURATION mode.
- 2 Save the running-config to the startup-config.
- 3 Reload the system.

ip dhcp snooping vlan

Enable DHCP Snooping on one or more VLANs.

Syntax `[no] ip dhcp snooping vlan name`

Parameters

<i>name</i>	Enter the name of a VLAN on which to enable DHCP Snooping.
--------------------	--

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When enabled, the system begins creating entries in the binding table for the specified VLANs.

 **NOTE: Learning only happens if there is a trusted port in the VLAN.**

Related Commands [ip dhcp snooping trust](#) — configures an interface as trusted.

ipv6 dhcp snooping vlan

Enable ipv6 DHCP Snooping on VLAN or range of VLANs.

Syntax

```
[no] ip dhcp snooping vlan vlan-id
```

To disable the ipv6 dhcp snooping on VLAN basis or range of VLAN, use the `no ipv6 dhcp snooping vlan <vlan-id>` command.

Parameters

vlan-id Enter the name of a VLAN id or list of the VLANs to enable DHCP Snooping.

Defaults

Disabled

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

ip dhcp relay

Enable Option 82.

Syntax

```
ip dhcp relay information-option [remote-id | trust-downstream]
```

Parameters

remote-id Configure the system to enable the *remote-id* string in option-82.

trust-downstream Configure the system to trust Option 82 when it is received from the previous-hop router.

Defaults

Disabled

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show ip dhcp snooping

Display the contents of the DHCP binding table or display the interfaces configured with IP Source Guard.

Syntax `show ip dhcp snooping [binding | source-address-validation]`

Parameters

binding	Display the interfaces configured with IP Source Guard.
source-address-validation	Display the interfaces configured with IP Source Guard.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [clear ip dhcp snooping](#) — clears the contents of the DHCP binding table.

show ipv6 DHCP snooping

Display the DHCPv6 snooping database.

Syntax `show ipv6 dhcp snooping`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

Example

```
Dell#show ipv6 dhcp snooping
IPv6 DHCP Snooping : Enabled.
IPv6 DHCP Snooping Mac Verification : Disabled.

Database write-delay (In minutes) : 5

DHCP packets information
Snooping packets : 0
```

```

Snooping packets processed on L2 vlans      : 0
DHCP Binding File Details
Invalid File                               : 0
Invalid Binding Entry                       : 0
Binding Entry lease expired                 : 0
Dell#

```

ip dhcp snooping verify mac-address

Validate a DHCP packet's source hardware address against the client hardware address field (CHADDR) in the payload.

Syntax `[no] ip dhcp snooping verify mac-address`

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 DHCP snooping verify mac-address

Configure to enable verify source mac-address against ipv6 DHCP packet mac address.

Syntax `[no] ipv6 dhcp snooping verify mac-address`

To disable verify source mac-address against ipv6 DHCP packet mac address, use the `no ipv6 dhcp snooping verify mac-address` command.

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL.

Equal Cost Multi-Path (ECMP)

Equal cost multi-path (ECMP) is supported on the Dell Networking OS.

ecmp-group

Provides a mechanism to monitor traffic distribution on an ECMP link bundle. A system log is generated when the standard deviation of traffic distribution on a member link exceeds a defined threshold.

Syntax `ecmp-group {ecmp-group-id interface interface | link-bundle-monitor}`
 To remove the selected interface, use the `ecmp-group no interface` command.
 To disable link bundle monitoring, use the `ecmp-group no link-bundle-monitor` command.

Parameters

<i>ecmp-group ID</i>	Enter the identifier number for the ECMP group. The range is from 2 to 64.
<i>interface</i>	Enter the following keywords and slot/port to add the interface to the ECMP group: <ul style="list-style-type: none"> 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
<i>link-bundle-monitor</i>	Enter the keywords <code>link-bundle-monitor</code> to enable link bundle monitoring.

Defaults Off

Command Modes

- CONFIGURATION
- CONFIGURATION ECMP-GROUP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

hash-algorithm

Changes the hash algorithm used to distribute traffic flows across a Port Channel.

Syntax `hash-algorithm {algorithm-number | {ecmp {crc16 | crc16cc | crc32MSB | crc32LSB | crc-upper | dest-ip | lsb | xor1 | xor2 | xor4 | xor8 | xor16} [number] lag {checksum | crc | xor} [number] nh-ecmp {checksum | crc | xor} [number] linecard number ip-sa-mask value ip-da-mask value | seed seed-value }hash-algorithm {ecmp {crc16 | crc16cc | crc32MSB | crc32LSB | crc-upper | dest-ip | flow-based-hashing {crc16|crc16cc|crc32MSB|crc32LSB|xor1|xor2|xor4|xor8|xor16}|lsb |`

```
xor1 | xor2 | xor4 | xor8 | xor16}[[hg {crc16 | crc16cc | crc32MSB | crc32LSB |
xor1 | xor2 | xor4 | xor8 | xor16}]] [lag {crc16 | crc16cc | crc32MSB |
crc32LSB | xor1 | xor2 | xor4 | xor8 | xor16 }][stack-unit|linecard number |
port-set number] | [hg-seed value] | [seedvalue]
```

To return to the default hash algorithm, use the `no hash-algorithm` command.

To return to the default ECMP hash algorithm, use the `no hash-algorithm ecmp algorithm-value` command.

To remove the hash algorithm on a particular stack-unit / line-card, use the `no hash-algorithm linecard number` command.

Parameters

algorithm-number	Enter the algorithm number. The range is from 0 to 47.
ecmp {<i>crc16</i> <i>crc16cc</i> <i>crc32MSB</i> <i>crc32LSB</i> <i>crc-upper</i> <i>dest-ip</i> <i>lsb</i> <i>xor1</i> <i>xor2</i> <i>xor4</i> <i>xor8</i> <i>xor16</i>}	<p>TeraScale and ExaScale Only: Enter the keyword <code>ecmp</code> then one of the following options:</p> <ul style="list-style-type: none"> • <i>crc16</i>: Use CRC16_BISYNC — 16 bit CRC16-bisync polynomial (default) • <i>crc16cc</i>: Use CRC16_CCITT — 16 bit CRC16 using CRC16-CCITT polynomial • <i>crc32MSB</i>: Use CRC32_UPPER — MSB 16 bits of computed CRC32 • <i>crc32LSB</i>: Use CRC32_LOWER — LSB 16 bits of computed CRC32 • <i>crc-upper</i>: Uses the upper 32 bits of the key for the hash computation • <i>dest-ip</i>: Uses the destination IP for ECMP hashing • <i>lsb</i>: Returns the LSB of the key as the hash • <i>xor1</i>: Use CRC16_BISYNC_AND_XOR1 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor1 • <i>xor2</i>: Use CRC16_BISYNC_AND_XOR2 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor2 • <i>xor4</i>: Use CRC16_BISYNC_AND_XOR4 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor4 • <i>xor8</i>: Use CRC16_BISYNC_AND_XOR8 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor8 • <i>xor16</i>: Use CR16 — 16 bit XOR
lag hash algorithm value	Enter the keyword <code>lag</code> then the LAG hash algorithm value. The range is from 0 to 47.
nh-ecmp hash algorithm value	(OPTIONAL) Enter the keyword <code>nh-ecmp</code> then the ECMP hash algorithm value.
linecard number	(OPTIONAL) Enter the keyword <code>linecard</code> then the linecard slot number.
ip-sa-mask value	(OPTIONAL) Enter the keywords <code>ip-sa-mask</code> then the ECMP/LAG hash mask value. The range is from 0 to FF. The default is FF .
ip-da-mask value	(OPTIONAL) Enter the keywords <code>ip-da-mask</code> then the ECMP/LAG hash mask value. The range is from 0 to FF. The default is FF .
ecmp <i>crc16</i> <i>crc16cc</i> <i>crc32MSB</i> <i>crc32LSB</i> <i>crc-upper</i> <i>dest-ip</i> <i>flow-based-hashing</i> <i>crc16</i> <i>crc16cc</i> <i>crc32MSB</i> <i>crc32LSB</i> <i>xor1</i> 	<p>Enter the keyword <code>ecmp</code> then one of the following options:</p> <ul style="list-style-type: none"> • <i>crc16</i>: Use CRC16_BISYNC — 16 bit CRC16-bisync polynomial (default) • <i>crc16cc</i>: Use CRC16_CCITT — 16 bit CRC16 using CRC16-CCITT polynomial • <i>crc32MSB</i>: Use CRC32_UPPER — MSB 16 bits of computed CRC32 • <i>crc32LSB</i>: Use CRC32_LOWER — LSB 16 bits of computed CRC32 • <i>crc-upper</i>: Uses the upper 32 bits of the key for the hash computation • <i>dest-ip</i>: Uses the destination IP for ECMP hashing • <i>flow-based-hashing</i>: Enter the keywords <code>flow-based-hashing</code> followed by the algorithm

xor2 | xor4 | xor8 | xor16 | *lsb | xor1 | xor2 | xor4 | xor8 | xor16*

- *lsb*: Returns the LSB of the key as the hash
- *xor1*: Use CRC16_BISYNC_AND_XOR1 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor1
- *xor2*: Use CRC16_BISYNC_AND_XOR2 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor2
- *xor4*: Use CRC16_BISYNC_AND_XOR4 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor4
- *xor8*: Use CRC16_BISYNC_AND_XOR8 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor8
- *xor16*: Use CR16 — 16 bit XOR

hg {*crc16 | crc16cc | crc32MSB | crc32LSB | xor1 | xor2 | xor4 | xor8 | xor16*}

Enter the keyword **hg** then one of the following options available in the stack-unit and linecard provisioned devices:

- *crc16*: Use CRC16_BISYNC — 16 bit CRC16-bisync polynomial (default)
- *crc16cc*: Use CRC16_CCITT — 16 bit CRC16 using CRC16-CCITT polynomial
- *crc32MSB*: Use CRC32_UPPER — MSB 16 bits of computed CRC32
- *crc32LSB*: Use CRC32_LOWER — LSB 16 bits of computed CRC32
- *xor1*: Use CRC16_BISYNC_AND_XOR1 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor1
- *xor2*: Use CRC16_BISYNC_AND_XOR2 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor2
- *xor4*: Use CRC16_BISYNC_AND_XOR4 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor4
- *xor8*: Use CRC16_BISYNC_AND_XOR8 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor8
- *xor16*: Use CR16 — 16 bit XOR

lag {*crc16 | crc16cc | crc32MSB | crc32LSB | xor1 | xor2 | xor4 | xor8 | xor16*}

Enter the keyword **hg** then one of the following options available in the stack-unit and linecard provisioned devices::

- *crc16*: Use CRC16_BISYNC — 16 bit CRC16-bisync polynomial (default)
- *crc16cc*: Use CRC16_CCITT — 16 bit CRC16 using CRC16-CCITT polynomial
- *crc32MSB*: Use CRC32_UPPER — MSB 16 bits of computed CRC32
- *crc32LSB*: Use CRC32_LOWER — LSB 16 bits of computed CRC32
- *xor1*: Use CRC16_BISYNC_AND_XOR1 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor1
- *xor2*: Use CRC16_BISYNC_AND_XOR2 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor2
- *xor4*: Use CRC16_BISYNC_AND_XOR4 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor4
- *xor8*: Use CRC16_BISYNC_AND_XOR8 — Upper 8 bits of CRC16-BISYNC and lower 8 bits of xor8
- *xor16*: Use CR16 — 16 bit XOR

hg-seed *seed-value* (This option is available in stack-unit and linecard provisioned devices): Enter the keywords **hg-seed** then the hash algorithm seed value. The range is from 0 to 2147483646.

stack-unit *number* (OPTIONAL) : Enter the keyword **stack-unit** then the stack-unit slot number.

linecard number (OPTIONAL) : Enter the keyword **linecard** then the linecard slot number.

port-set number (OPTIONAL) Enter the keyword **port-set** then the port-set slot number.

Defaults **0** for hash-algorithm value on TeraScale and ExaScale IPSA and IPDA mask value is **FF** for a line card.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM. Added flow-based-hashing support for hashing on ECMP.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To ensure that CRC is not used for LAG, set the default hash-algorithm method on ExaScale systems. For example, `hash-algorithm ecmp xor lag checksum nh-ecmp checksum`.
To achieve the functionality of hash-align on the ExaScale platform, do not use CRC as a hash-algorithm method.

The hash value calculated with the `hash-algorithm` command is unique to the entire chassis. The hash algorithm command with the line card option changes the hash for a particular line card by applying the mask specified in the IPSA and IPDA fields.

The line card option is applicable with the lag-hash-align microcode only (refer to [CAM Profile Commands](#)). Any other microcode returns an error message as follows:

- `Dell(conf)#hash-algorithm linecard 5 ip-sa-mask ff ip-da-mask ff`
- `% Error: This command is not supported in the current microcode configuration`

In addition, the `linecard number ip-sa-mask value ip-da-mask value` option has the following behavior to maintain bi-directionality:

- When hashing is done on both IPSA and IPDA, the `ip-sa-mask` and `ip-da-mask` values must be equal. (Single Linecard).
- When hashing is done only on IPSA or IPDA, the Dell Networking OS maintains bi-directionality with masks set to `XX 00` for line card 1 and `00 XX` for line card 2 (`ip-sa-mask` and `ip-da-mask`). The mask value must be the same for both line cards when using multiple line cards as ingress (where `XX` is any value from `00` to `FF` for both line cards). For example, assume that traffic is flowing between linecard 1 and linecard 2:
 - `hash-algorithm linecard 1 ip-sa-mask aa ip-da-mask 00`
 - `hash-algorithm linecard 2 ip-sa-mask 00 ip-da-mask aa`

The different hash algorithms are based on the number of Port Channel members and packet values. The default hash algorithm (number 0) yields the most balanced results in various test scenarios, but if the default algorithm does not provide a satisfactory distribution of traffic, use the `hash-algorithm` command to designate another algorithm.

When a Port Channel member leaves or is added to the Port Channel, the hash algorithm is recalculated to balance traffic across the members.

On TeraScale, if you do not enter the keyword `ECMP` or `LAG`, the Dell Networking OS assumes it to be common for both. If the keyword `ECMP` or `LAG` is entered separately, both should fall in the range of 0 to 23 or 24 to 47 since compression enable/disable is common for both TeraScale and ExaScale support the range 0-47. The default for ExaScale is **24**.

hash-algorithm ecmp

Change the hash algorithm used to distribute traffic flows across an ECMP (equal-cost multipath routing) group.

Syntax `hash-algorithm ecmp {crc-upper} | {dest-ip} | {lsb}`
To return to the default hash algorithm, use the `no hash-algorithm ecmp` command.

Parameters

crc-upper	Uses the upper 32 bits of the key for the hash computation. The default is crc-lower .
dest-ip	Uses the destination IP for ECMP hashing. The default is enabled .
lsb	Returns the LSB of the key as the hash. The default is crc-lower .

Defaults

- **crc-lower**
- **dest-ip enabled**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The hash value calculated with the `hash-algorithm` command is unique to the entire chassis. The default ECMP hash configuration is **crc-lower**. This command takes the lower 32 bits of the hash key to compute the egress port and is the “fall-back” configuration if you have not configured anything else.

The different hash algorithms are based on the number of ECMP group members and packet values. The default hash algorithm yields the most balanced results in various test scenarios, but if the default algorithm does not provide satisfactory distribution of traffic, use this command to designate another algorithm.

When a member leaves or is added to the ECMP group, the hash algorithm is recalculated to balance traffic across the members.

hash-algorithm seed

Select the seed value for the ECMP, LAG, and NH hashing algorithm.

Syntax `hash-algorithm seed value [linecard slot] [port-set number]`

Parameters

seed value	Enter the keyword <code>seed</code> then the seed value. The range is from 0 to 4095.
linecard slot	Enter the keyword <code>linecard</code> then the linecard slot number.
port-set number	Enter the keywords <code>port-set</code> then the linecard port-pipe number.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Deterministic ECMP sorts ECMPs in order even though RTM provides them in a random order. However, the hash algorithm uses as a seed the lower 12 bits of the chassis MAC, which yields a different hash result for every chassis. This behavior means that for a given flow, even though the prefixes are sorted, two unrelated chassis select different hops.

The Dell Networking OS provides a CLI-based solution for modifying the hash seed to ensure that on each configured system, the ECMP selection is same. When configured, the same seed is set for ECMP, LAG, and NH, and is used for incoming traffic only.

NOTE: While the seed is stored separately on each port-pipe, the same seed is used across all CAMs.
You cannot separate LAG and ECMP but you can use different algorithms across the chassis with the same seed. If LAG member ports span multiple port-pipes and line cards, set the seed to the same value on each port-pipe to achieve deterministic behavior.

If the hash algorithm configuration is removed, the hash seed does not go to the original factory default setting.

ip ecmp-group

Enable and specify the maximum number of ecmp that the L3 CAM hold for a route. By default, when maximum paths are not configured, the CAM can hold a maximum of 16 ecmp per route.

Syntax `ip ecmp-group {maximum-paths | {number} {path-fallback}`
To negate a command, use the `no ip ecmp-group maximum-paths` command.

Parameters

maximum-paths	Specify the maximum number of ECMP for a route. The range is 2 to 64.
path-fallback	Use the keywords <code>path-fallback</code> to enable this feature. If you enable the feature, re-enter this keyword to disable the feature.

Defaults 16

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You must save the new ECMP settings to the startup-config (`write mem`) then reload the system for the new settings to take effect.

Related Commands [show ip cam stack-unit](#) — Display content-addressable memory (CAM) entries.

link-bundle-distribution trigger-threshold

Provides a mechanism to set the threshold to trigger when traffic distribution begins being monitored on an ECMP link bundle.

Syntax	<code>link-bundle-distribution trigger-threshold [percent]</code>	
Parameters	<i>percent</i>	Indicate the threshold value when traffic distribution starts being monitored on an ECMP link bundle. The range is from 1 to 90%. The default is 60% .
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

link-bundle-monitor enable

Provides a mechanism to enable monitoring of traffic distribution on an ECMP link bundle.

Syntax	<code>link-bundle-monitor enable</code> To exit from ECMP group mode, use the <code>exit</code> command.	
Command Modes	<ul style="list-style-type: none">· ECMP-GROUP· PORT-CHANNEL INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show config

Display the ECMP configuration.

Syntax	<code>show config</code>	
Command Modes	CONFIGURATION-ECMP-GROUP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show link-bundle distribution

Display the link-bundle distribution for the interfaces in the bundle, type of bundle (LAG or ECMP), and the most recently calculated interface utilization (either bytes per second rate or maximum rate) for each interface.

Syntax `show link-bundle-distribution`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History


Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show link-bundle-distribution
Link-bundle trigger threshold - 60
ECMP bundle - 5 Utilization[In Percent] - 0 Alarm State - Inactive
Interface Line Protocol Utilization[In Percent]
Te 0/4 Up 5
Te 0/3 Up 30
```

FC FLEXIO FPORT

The switch is a blade switch which is plugged into the Dell M1000 Blade server chassis. The blade module contains two slots for pluggable flexible module. With single FC Flex IO module, 4 ports are supported, whereas 8 ports are supported with both FC Flex IO modules. Each port can operate in 2G, 4G or 8G Fiber Channel speed. The topology-wise, FC Flex IOM is directly connected to a FC Storage. In the following topology, the FC flex IOM model offers local connectivity without a SAN switch or fabric.

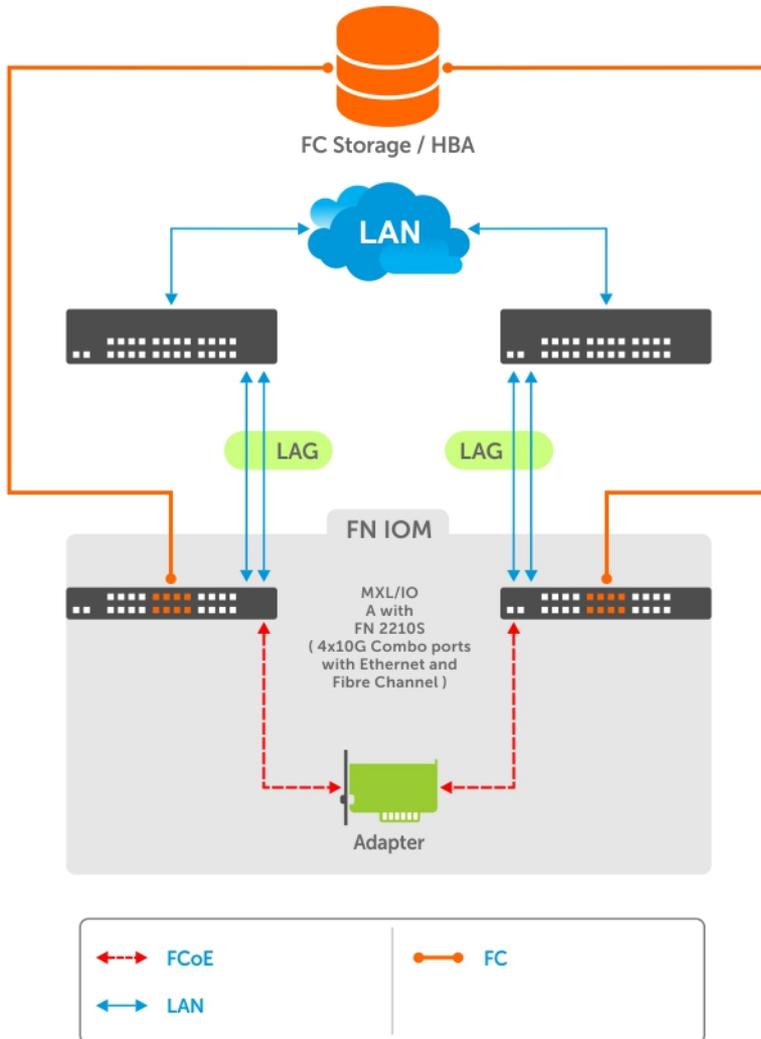

Topics:

- [feature fc](#)
- [fc zone](#)
- [fc alias](#)
- [fc zoneset](#)

- [fcoe-map](#)
- [fabric](#)
- [active-zoneset](#)
- [stack-unit port-group port portmode](#)
- [show fc ns](#)
- [show fc switch](#)
- [show fc zoneset](#)
- [show fc zone](#)
- [show fc alias](#)
- [show fcoe-map](#)
- [show system stack-unit port-group portmode](#)

feature fc

Enable feature fc with FPort functionality.

Syntax `feature fc fport domain-id range`

Parameters

Range	Enter the range from 1 to 239.
--------------	--------------------------------

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Enable `remote-fault-signaling rx off` command in FCF FPort mode on interfaces connected to the Compellent and MDF storage devices.

Example `Dell(conf)#feature fc fport domain-id`

fc zone

Create a zone.

Syntax `fc zone zonename member`
 To delete a zone, use the `no fc zone zonename member` command.

Parameters

zonename	Enter the zone name.
member	Enter the WWPN, port ID, or domain/port.

Command Modes ALIAS CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example without member

```
Dell(conf)# fc zone z1
Dell(conf-fc-zone-z1)#
```

Example with member

```
Dell(conf)#fc zone test
Dell(conf-fc-zone-test)#member ?
WORD                               WWN(00:00:00:00:00:00:00:00), portID(000000), or Alias
name(word)
Dell(conf-fc-zone-test)#member
```

Related Commands

[show fc zone](#) — displays the configured zone.

[show fcoe-map](#) — displays the fabric parameters.

fc alias

Create a zone alias name.

Syntax

```
fc alias ZoneAliasName member name
```

To delete a zone alias name, use the `no fc zone ZoneAliasName` command.

Parameters

ZoneAliasName Enter the zone alias name.
member name Enter the WWPN, port ID, or domain/port.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL and IOA.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell(conf)#fc alias test12
Dell(conf-fc-alias-test12)#?
end                               Exit from configuration mode
exit                               Exit from Alias config mode
member                             Add Alias member
no                                 Negate a command or set its defaults
show                               Show alias profile configuration
Dell(conf-fc-alias-test12)#member ?
WORD                               WWN(00:00:00:00:00:00:00:00), or portID(123000)
```

Related Commands [show fc alias](#) — displays the configured alias.

fc zoneset

Create a zoneset.

Syntax `fc zoneset zoneset_name [member]`
To delete a zoneset, use the `no fc zoneset zoneset_name [member]` command.

Parameters

zoneset_name	Enter the zoneset name.
member	Enter the WWPN, FC-ID, or Alias name.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell(conf)#fc zoneset test1
Dell(conf-fc-zoneset-test1)#member ?
WORD                Zone Name
Dell(conf-fc-zoneset-test1)#member
```

Related Commands [show fc zoneset](#) — displays the configured and active zoneset.

[show fcoe-map](#) — displays the fabric parameters.

fcoe-map

Create an FCoE map which contains the parameters used to configure the links between server CNAs and a SAN fabric. Apply the FCoE map on a server-facing Ethernet port.

Syntax `fcoe-map map-name`

Parameters

map-name	Maximum: 32 alphanumeric characters.
-----------------	--------------------------------------

Defaults None

Command Modes CONFIGURATION
INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.0(1.3)	Introduced on the S5000.

Usage Information

An FCoE map is a template to map FCoE and FC parameters in a converged fabric. An FCoE map virtualizes upstream FC ports on an NPIV proxy gateway to appear to downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network. It provides necessary parameters to FCoE-enabled servers and switches to log in to a SAN fabric.

On an FN IOM NPIV proxy gateway, an FCoE map is applied on fabric-facing FC ports and server-facing Ethernet ports. Use the `fcoe-map` command to apply an FCoE map on an Ethernet port. Use the `fabric` command to apply an FCoE map on an FC port.

An FCoE map consists of the following parameters: the dedicated FCoE VLAN for storage traffic, the destination SAN fabric (FC-MAP value), FCF priority, and the FIP keepalive (FKA) advertisement timeout.

To remove an FCoE map from an Ethernet interface, enter the `no fcoe-map map-name` command in Interface configuration mode.

NOTE: In FCF F mode, you can create only 1 FCoE map. It doesn't get created automatically. If you try to create more than 1 map, an error message is displayed.

Related Commands `show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fabric

Apply an FCoE map on a fabric-facing Fibre Channel (FC) port.

Syntax `fabric map-name`

Parameters `map-name` Maximum: 32 alphanumeric characters.

Defaults None

Command Modes INTERFACE FIBRE_CHANNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.0(1.3)	Introduced on the S5000.

Usage Information

An FCoE map is a template used to map FCoE and FC parameters in a converged fabric. An FCoE map virtualizes the upstream FC ports on an NPIV proxy gateway to appear to downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE

map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network. It provides necessary parameters to FCoE-enabled servers and switches to log in to a SAN fabric. Use the `fcoe-map` command to create an FCoE map.

On an FN IOM NPIV proxy gateway, an FCoE map is applied on fabric-facing FC ports and server-facing Ethernet ports. Use the `fabric` command to apply an FCoE map on an FC port. Use the `fcoe-map` command to apply an FCoE map on an Ethernet port.

After you apply an FCoE map on an FC interface, when the port is enabled (`no shutdown`), the NPIV proxy gateway starts sending FIP multicast advertisements on behalf of the FC port to downstream servers to advertise the availability of a new FCF port on the FCoE VLAN.

To remove an FCoE map from an FC interface, enter the `no fabric map-name` command in Interface configuration mode.

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

active-zoneset

Activate the zoneset.

Syntax `active-zoneset zoneset_name`
To change to the default zone behavior, use the `no active-zoneset zoneset_name` command.

Parameters `zoneset_name` Enter the zoneset name.

Command Modes FC FABRIC CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell(conf)# fcoe-map default_full_fabric
Dell(conf-fcoe-default_full_fabric)# fc-fabric
Dell(conf-fmap-default_full_fabric-fcfabric)# active-zoneset zs1
```

Related Commands `show fc zoneset` — displays the configured and active zoneset.

stack-unit port-group port portmode

Convert the external ports to Fibre Channel or Ethernet mode.

Syntax `stack-unit unit number port-group 0-1 port 9-12 portmode {ethernet | fc}`

Parameters	stack-unit	Enter the keywords <code>stack-unit</code> then the stack member number to select the stack unit. The range is from 0 to 5.
	port-group	Enter the keywords <code>port-group</code> then the port group number. The range is from 0 to 1.
	port	Enter the keyword <code>port</code> then the port number. The range is from 9 to 12. The port numbers 9 to 10 map to port-group 0 and the port numbers 11 to 12 map to port-group 1.
	portmode	Enter the keyword <code>portmode</code> to set the port mode. The options are: <ul style="list-style-type: none">• <code>ethernet</code> – convert to Ethernet mode.• <code>fc</code> – convert to Fibre Channel mode.

Defaults Ports 9, 10 – Fibre Channel mode
Ports 11, 12 – Ethernet mode

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.11(0.0)	Included support for all external ports.
9.6(0.0)	Supported on the FN2210S Aggregator.

Related Commands [show system stack-unit port-group portmode](#) — displays the port-group port mode information.

show fc ns

Display the devices in the name server database.

Syntax `show fc ns { switch } [brief]`

Parameters	switch	Enter the keyword <code>switch</code> to display all the devices in the name server database of the switch.
	brief	Enter the keyword <code>brief</code> to display in brief devices in the name server database.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell#show fc ns switch
Total number of devices = 1
Switch Name                10:00:5c:f9:dd:ef:0a:00
Domain Id                  1
Switch Port                53
Port Id                    01:35:00
Port Name                  10:00:8c:7c:ff:17:f8:01
Node Name                  20:00:8c:7c:ff:17:f8:01
Class of Service           8
IP Address
Symbolic Port Name         Brocade-1860 | 3.0.3.0 | DV-SP-SERVER2 | |
Symbolic Node Name         (NULL)
Port Type                  Node port
Registered with NameServer Yes
Registered for SCN         Yes
Display of local name server entries - brief version
Dell#

Dell#show fc ns switch brief
Total number of devices = 1
Intf#   Domain  FC-ID          Enode-WWPN          Enode-WWNN
53      1       01:35:00      10:00:8c:7c:ff:17:f8:01 20:00:8c:7c:ff:17:f8:01
Dell#

Dell#show fc ns fabric
Total number of devices = 3
Switch Name                10:00:5c:f9:dd:ef:0a:80
Domain Id                  2
Switch Port                9
Port Id                    02:09:00
Port Name                  32:11:0e:fc:00:00:00:88
Node Name                  22:11:0e:fc:00:00:00:88
Class of Service           8
IP Address
Symbolic Port Name         (NULL)
Symbolic Node Name         (NULL)
Port Type                  Node port
Registered with NameServer No
Registered for SCN         No
Switch Name                10:00:5c:f9:dd:ef:0a:80
Domain Id                  2
Switch Port                11
Port Id                    02:0b:00
Port Name                  31:11:0e:fc:00:00:00:77
Node Name                  21:11:0e:fc:00:00:00:77
Class of Service           8
IP Address
Symbolic Port Name         (NULL)
Symbolic Node Name         (NULL)
Port Type                  Node port
Registered with NameServer No
Registered for SCN         No
Switch Name                10:00:5c:f9:dd:ef:0a:00
Domain Id                  1
Switch Port                53
Port Id                    01:35:00
Port Name                  10:00:8c:7c:ff:17:f8:01
```

```

Node Name                20:00:8c:7c:ff:17:f8:01
Class of Service         8
IP Address
Symbolic Port Name      Brocade-1860 | 3.0.3.0 | DV-SP-SERVER2 | |
Symbolic Node Name      (NULL)
Port Type                Node port
Registered with NameServer Yes
Registered for SCN      Yes
Dell#

Dell#show fc ns fabric brief
Total number of devices = 2
Intf#   Domain  FC-ID          Enode-WWPN          Enode-WWNN
9       2        02:09:00      32:11:0e:fc:00:00:00:88 22:11:0e:fc:00:00:00:88
11      2        02:0b:00      31:11:0e:fc:00:00:00:77 21:11:0e:fc:00:00:00:77
Dell#

```

show fc switch

Display the switch configuration for Fibre Channel capability.

Syntax `show fc switch`

Parameters None

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.0(1.3)	Introduced on the S5000.

Usage Information The following table describes the `show fc switch` output shown in the following example.

Switch Mode	Fibre Channel mode of operation of an FN IOM switch.
Switch WWN	Factory-assigned worldwide node (WWN) name of the MXL. The MXL WWN name is not user-configurable.

Example

```

Dell(conf)#do show fc switch
Switch Mode : FPORT
Switch WWN  : 10:00:aa:00:00:00:00:ac
Dell(conf)#

```

show fc zoneset

Display the configured and active zoneset.

Syntax `show fc zoneset [zoneset_name | active]`

Parameters

- zoneset_name** Enter the zoneset name to display the zoneset name
- active** Enter the keyword `active` to display the active zonesets.
- merged** Enter the keyword `merged` to display the merge active zones.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell#show fc zoneset

ZoneSetName          ZoneName          ZoneMember
=====
fcoe_srv_fc_tgt
                    brcd_sanb
                                brcd_cna1_wwpn1
                                sanb_p2tgt1_wwpn

Active Zoneset: fcoe_srv_fc_tgt

ZoneName              ZoneMember
=====
brcd_sanb
                    10:00:8c:7c:ff:21:5f:8d
                    20:02:00:11:0d:03:00:00

Dell#

Dell#show fc zoneset active

Active Zoneset: fcoe_srv_fc_tgt

ZoneName              ZoneMember
=====
brcd_sanb
                    10:00:8c:7c:ff:21:5f:8d
                    20:02:00:11:0d:03:00:00

Dell#
```

Related Commands `fc zone` — creates a zone.
`fc zoneset` — creates a zoneset.
`active-zoneset` — activates the zoneset.

show fc zone

Display the configured zone.

Syntax `show fc zone [zonename]`

Parameters **zonename** Enter the zone name to display the details.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell#show fc zone
ZoneName                ZoneMember
=====
brcd_sanb                brcd_cna1_wwpn1
                        sanb_p2tgt1_wwpn
Dell#
```

Related Commands `fc zone` — creates a zone.

show fc alias

Display the configured alias.

Syntax `show fc alias [ZoneAliasName]`

Parameters **ZoneAliasName** Enter the zone alias name to display the details.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1(1.0)	Introduced on the S5000.

Example

```
Dell#show fc alias
Zone Alias Name      all
0x030303
Dell#
```

Related Commands [fc alias](#) — creates a zone alias name.

show fcoe-map

Display the Fibre Channel and FCoE configuration parameters in FCoE maps.

Syntax `show fcoe-map`

Parameters None

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.1.1.0	Introduced on the S5000.

Usage Information

Use the `show fcoe-map` command to display the FC and FCoE parameters used to configure server-facing Ethernet (FCoE) and fabric-facing FC ports in all FCoE maps on the switch.

In each FCoE map, the values for the fabric ID and FC-MAP that identify the SAN fabric to which FC storage traffic is sent, and the FCoE VLAN to be used must be unique.

An FCoE map is used to identify the SAN fabric to which FCoE storage traffic is sent. It also virtualizes the switch with FC Flex IO module FC ports, so that they appear to downstream server CNA ports as FCoE Forwarder (FCF) ports on an FCoE network.

Example

```
Dell#show system stack-unit 0 iom-mode
Unit      Boot-Mode      Next-Boot
-----
0         standalone     standalone
Dell#show fcoe-map
Fabric Name      SAN_FABRIC
Fabric Type      npiv
Fabric Id        1002
```

```

Vlan Id          1002
Vlan priority    3
FC-MAP          0efc00
FKA-ADV-Period  8
Fcf Priority     128
Config-State    ACTIVE
Oper-State      DOWN
=====
Members
Fc 0/9 Fc 0/10
=====
=====
Dell#

```

Related Commands [fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

show system stack-unit port-group portmode

Display the port-group port mode information.

Syntax `show system stack-unit unit-number port-group portmode`

Parameters

stack-unit <i>unit-number</i>	Enter the keywords <code>stack-unit</code> then the unit number. The range is from 0 to 11.
--------------------------------------	---

Command Modes

- EXEC
- EXEC Privilege

Command History

Version	Description
9.11(0.0)	Included support for all external ports.
9.6(0.0)	Supported on the FN2210S Aggregator.

Example

```

Dell#show system stack-unit 0 port-group portmode
PortGroupId      Ports      Mode(Curr Boot)  Mode(Next Boot)
0                 9          FC               FC
0                 10         FC               FC
1                 11         ETH              ETH
1                 12         FC               FC
Dell#

```

Related Commands [stack-unit port-group port portmode](#) — converts the external ports to Fibre Channel or Ethernet mode.

FIPS Cryptography

To configure federal information processing standards (FIPS) cryptography, use the following commands on the switch.

Topics:

- [fips mode enable](#)
- [show fips status](#)
- [show ip ssh](#)
- [ssh](#)

fips mode enable

Enable the FIPS cryptography mode on the platform.

Syntax `fips mode enable`
To disable the FIPS cryptography mode, use the `no fips mode enable` command.

Default Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf)#fips mode enable
WARNING: Enabling FIPS mode will close all SSH/Telnet connection, restart
those servers, and destroy all configured host keys.
proceed (y/n) ? y
Dell (conf)#
```

Related Commands `ssh` — opens an SSH connection specifying the hostname, username, port number, and version of the SSH client.

show fips status

Displays the status of the FIPS mode.

Syntax `show fips status`

Defaults None

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show fips status
FIPS Mode      : Disabled
Dell#

Dell#show fips status
FIPS Mode      : Enabled
Dell#
```

show ip ssh

Display information about established SSH sessions

Syntax	show ip ssh
Defaults	none
Command Modes	EXEC EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip ssh
SSH server                : enabled.
SSH server version        : v1 and v2.
Password Authentication   : enabled.
Hostbased Authentication  : disabled.
RSA Authentication       : disabled.
Vty      Encryption      HMAC      Remote IP
1        3des-cbc        hmac-md5 10.1.20.48
2        3des-cbc        hmac-md5 10.1.20.48
```

With FIPS Mode enabled:

```
Dell#show ip ssh
SSH server                : enabled.
SSH server version        : v2.
Password Authentication   : enabled.
Hostbased Authentication  : disabled.
RSA Authentication       : disabled.
Vty      Encryption      HMAC      Remote IP
0        aes128-cbc      hmac-sha1 10.11.8.13
1        aes128-cbc      hmac-sha1 10.1.20.48
```

ssh

Open an SSH connection specifying the hostname, username, port number, and version of the SSH client.

Syntax `ssh {hostname | ipv4 address | ipv6 address} [-c encryption cipher | -l username | -m HMAC algorithm | -p port-number | -v {1|2}]`

Parameters

hostname (OPTIONAL) Enter the IP address or the hostname of the remote device.

ipv4 address (OPTIONAL) Enter the IP address in dotted decimal format A.B.C.D.

ipv6 address prefix-length (OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

-c encryption cipher Enter the following encryption cipher to use. (For v2 clients only.) Without the FIPS mode enabled:

- `3des-cbc`: Force ssh to use 3des-cbc encryption cipher.

With the FIPS mode enabled:

- `aes128-cbc`: Force ssh to use the aes128-cbc encryption cipher.
- `aes256-cbc`: Force ssh to use the aes256-cbc encryption cipher.

-l username (OPTIONAL) Enter the keyword `-l` then the user name used in this SSH session. The default is the user name of the user associated with the terminal.

-m HMAC algorithm Enter one of the following HMAC algorithms to use. (For v2 clients only.): Without the FIPS mode enabled:

- `hmac-sha1`: Force ssh to use the hmac-sha1 HMAC algorithm.
- `hmac-sha1-96`: Force ssh to use the hmac-sha1-96 HMAC algorithm.
- `hmac-md5`: Force ssh to use the hmac-md5 HMAC algorithm.
- `hmac-md5-96`: Force ssh to use the hmac-md5-96 HMAC algorithm.

With the FIPS mode enabled:

- `hmac-sha1`: Force ssh to use the hmac-sha1 HMAC algorithm.
- `hmac-sha1-96`: Force ssh to use the hmac-sha1-96 HMAC algorithm.

-p port-number (OPTIONAL) Enter the keyword `-p` then the port number. The range is 1 to 65536

The default is 22

-v {1|2} (OPTIONAL) Enter the keyword `-v` then the SSH version 1 or 2. The default: The version from the protocol negotiation.

NOTE: If the FIPS mode is enabled, this option does not display in the output.

Defaults

As indicated above.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

If FIPS mode is not enabled:

```
Dell#ssh 10.11.8.12 ?
-c          Encryption cipher to use (for v2 client
-l          User name option
-m          HMAC algorithm to use (for v2 clients only)
-p          SSH server port option (default 22)
-v          SSH protocol version
<cr>
Dell#ssh 10.11.8.12 -c ?
3des-cbc    Force ssh to use 3des-cbc encryption cipher
Dell#ssh 10.11.8.12 -m ?
hmac-sha1   Force ssh to use hmac-sha1 HMAC algorithm
hmac-sha1-96 Force ssh to use hmac-sha1-96 HMAC algorithm
hmac-md5    Force ssh to use hmac-md5 HMAC algorithm
hmac-md5-96 Force ssh to use hmac-md5-96 HMAC algorithm
```

With FIPS mode enabled:

```
Dell#ssh 10.11.8.12 ?
-c          Encryption cipher to use (for v2 client
-l          User name option
-m          HMAC algorithm to use (for v2 clients only)
-p          SSH server port option (default 22)
<cr>
Dell#ssh 10.11.8.12 -c ?
aes128-cbc  Force ssh to use aes128-cbc encryption cipher
aes256-cbc  Force ssh to use aes256-cbc encryption cipher
Dell#ssh 10.11.8.12 -m ?
hmac-sha1   Force ssh to use hmac-sha1 HMAC algorithm
hmac-sha1-96 Force ssh to use hmac-sha1-96 HMAC algorithm
```

FIP Snooping

In a converged Ethernet network, an Aggregator can operate as an intermediate Ethernet bridge to snoop on Fibre Channel over Ethernet Initialization Protocol (FIP) packets during the login process on Fibre Channel over Ethernet (FCoE) forwarders (FCFs). Acting as a transit FIP snooping bridge, the switch uses dynamically-created ACLs to permit only authorized FCoE traffic to be transmitted between an FCoE end-device and an FCF.

This chapter describes the FIP snooping commands.

Topics:

- [clear fip-snooping database interface vlan](#)
- [show fip-snooping statistics](#)
- [debug fip-snooping](#)
- [show fip-snooping config](#)
- [show fip-snooping enode](#)
- [show fip-snooping fcf](#)
- [show fip-snooping sessions](#)
- [show fip-snooping statistics](#)
- [show fip-snooping system](#)
- [show fip-snooping vlan](#)

clear fip-snooping database interface vlan

Clear FIP snooping information on a VLAN for a specified FCoE MAC address, ENode MAC address, or FCF MAC address, and remove the corresponding ACLs FIP snooping generates.

Syntax `clear fip-snooping database interface vlan vlan-id {fcoe-mac-address | enode-mac-address | fcf-mac-address}`

Parameters

<i>fcoe-mac-address</i>	Enter the FCoE MAC address to be cleared of FIP snooping information.
<i>enode-mac-address</i>	Enter the ENode MAC address to be cleared of FIP snooping information.
<i>fcf-mac-address</i>	Enter the FCF MAC address to be cleared of FIP snooping information.

Command Modes EXEC Privilege

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear fip-snooping statistics

Clear the statistics on the FIP packets snooped on all VLANs, a specified VLAN, or a specified port interface.

Syntax `clear fip-snooping statistics [interface vlan Vlan-id | interface port-type port/slot | interface port-channel port-channel-number]`

Parameters

- vlan-id** Enter the VLAN ID of the FIP packet statistics to be cleared.
- port type port/slot** Enter the port-type and slot number of the FIP packet statistics to be cleared.
- port-channel-number** Enter the port channel number of the FIP packet statistics to be cleared.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

feature fip-snooping

Enable FCoE transit and FIP snooping on a switch.

Syntax `feature fip-snooping`
To disable the FCoE transit feature, use the `no feature fip-snooping` command.

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

fip-snooping enable

Enable FIP snooping on all VLANs or on a specified VLAN.

Syntax `fip-snooping enable`
To disable the FIP snooping feature on all or a specified VLAN, use the `no fip-snooping enable` command.

Defaults FIP snooping is disabled on all VLANs.

Command Modes

- CONFIGURATION
- VLAN INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The maximum number of FCFs supported per FIP snooping-enabled VLAN is four. The maximum number of FIP snooping sessions supported per ENode server is 16.

fip-snooping fc-map

Configure the FC-MAP value FIP snooping uses on all VLANs.

Syntax `fip-snooping fc-map fc-map-value`
To return the configured FM-MAP value to the default value, use the `no fip-snooping fc-map` command.

Parameters `fc-map-value` Enter the FC-MAP value FIP snooping uses. The range is from 0EFC00 to 0EFCFF.

Defaults **0x0EFC00**

Command Modes

- CONFIGURATION
- VLAN INTERFACE

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

fip-snooping port-mode fcf

Configure the port for bridge-to-FCF links.

Syntax `fip-snooping port-mode fcf`
To disable the bridge-to-FCF link on a port, use the `no fip-snooping port-mode fcf` command.

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The maximum number of FCFs supported per FIP snooping-enabled VLAN is four.

show fip-snooping statistics

Displays statistics on the FIP packets snooped on all interfaces, including VLANs, physical ports, and port channels..

Syntax `show fip-snooping statistics [interface vlan vlan-id | interface port-type port/slot | interface port-channel port-channel-number]`

Parameters

<i>vlan-id</i>	Enter the VLAN ID of the FIP packet statistics to be displayed.
<i>port-type port/slot</i>	Enter the port-type and slot number of the FIP packet statistics to be displayed.
<i>port-channel-number</i>	Enter the port channel number of the FIP packet statistics to be displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following table describes the `show fip-snooping statistics` command.

Field	Description
Number of Vlan Requests	Number of FIP-snooped VLAN request frames received on the interface.
Number of VLAN Notifications	Number of FIP-snooped VLAN notification frames received on the interface
Number of Multicast Discovery Solicits	Number of FIP-snooped multicast discovery solicit frames received on the interface.
Number of Unicast Discovery	Number of FIP-snooped unicast discovery solicit frames received on the interface.
Number of FLOGI	Number of FIP-snooped FLOGI request frames received on the interface.
Number of FDISC	Number of FIP-snooped FDISC request frames received on the interface
Number of FLOGO	Number of FIP-snooped FLOGO frames received on the interface
Number of ENode Keep Alives	Number of FIP-snooped ENode keep-alive frames received on the interface
Number of VN Port Keep Alives	Number of FIP-snooped VN port keep-alive frames received on the interface
Number of Multicast Discovery Advertisements	Number of FIP-snooped multicast discovery advertisements received on the interface
Number of Unicast Discovery Advertisements	Number of FIP-snooped unicast discovery advertisements received on the interface
Number of FLOGI Accepts	Number of FIP FLOGI accept frames received on the interface
Number of FLOGI Rejects	Number of FIP FLOGI reject frames received on the interface
Number of FDISC Accepts	Number of FIP FDISC accept frames received on the interface
Number of FDISC Rejects	Number of FIP FDISC reject frames received on the interface

Field	Description
Number of FLOGO Accepts	Number of FIP FLOGO accept frames received on the interface
Number of FLOGO Rejects	Number of FIP FLOGO reject frames received on the interface
Number of CVLs	Number of FIP clear virtual link frames received on the interface
Number of FCF Discovery	Number of FCF discovery timeouts that occurred on the interface
Number of VN Port Session	Number of VN port session timeouts that occurred on the interface
Number of Session failures due to Hardware Config	Number of session failures due to hardware configuration that occurred on the interface

Example

```

Dell# show fip-snooping statistics interface vlan 100
Number of Vlan Requests                :0
Number of Vlan Notifications           :0
Number of Multicast Discovery Solicits  :2
Number of Unicast Discovery Solicits    :0
Number of FLOGI                       :2
Number of FDISC                       :16
Number of FLOGO                       :0
Number of Enode Keep Alive             :9021
Number of VN Port Keep Alive           :3349
Number of Multicast Discovery Advertisement :4437
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts                :2
Number of FLOGI Rejects                :0
Number of FDISC Accepts                :16
Number of FDISC Rejects                :0
Number of FLOGO Accepts                :0
Number of FLOGO Rejects                :0
Number of CVL                         :0
Number of FCF Discovery Timeouts        :0
Number of VN Port Session Timeouts     :0
Number of Session failures due to Hardware Config :0
Dell(conf)#

Dell# show fip-snooping statistics int tengigabitethernet 0/11
Number of Vlan Requests                :1
Number of Vlan Notifications           :0
Number of Multicast Discovery Solicits  :1
Number of Unicast Discovery Solicits    :0
Number of FLOGI                       :1
Number of FDISC                       :16
Number of FLOGO                       :0
Number of Enode Keep Alive             :4416
Number of VN Port Keep Alive           :3136
Number of Multicast Discovery Advertisement :0
Number of Unicast Discovery Advertisement :0
Number of FLOGI Accepts                :0
Number of FLOGI Rejects                :0
Number of FDISC Accepts                :0
Number of FDISC Rejects                :0
Number of FLOGO Accepts                :0
Number of FLOGO Rejects                :0
Number of CVL                         :0
Number of FCF Discovery Timeouts        :0
Number of VN Port Session Timeouts     :0

```

```
Number of Session failures due to Hardware Config :0
```

Example (port channel)

```
Dell# show fip-snooping statistics interface port-channel 22
Number of Vlan Requests :0
Number of Vlan Notifications :2
Number of Multicast Discovery Solicits :0
Number of Unicast Discovery Solicits :0
Number of FLOGI :0
Number of FDISC :0
Number of FLOGO :0
Number of Enode Keep Alive :0
Number of VN Port Keep Alive :0
Number of Multicast Discovery Advertisement :4451
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts :2
Number of FLOGI Rejects :0
Number of FDISC Accepts :16
Number of FDISC Rejects :0
Number of FLOGO Accepts :0
Number of FLOGO Rejects :0
Number of CVL :0
Number of FCF Discovery Timeouts :0
Number of VN Port Session Timeouts :0
Number of Session failures due to Hardware Config :0
```

debug fip-snooping

Enable the debug FIP protocol specific messages.

Syntax

```
debug fip-snooping [all | acl | error | ifm | info | ipc | rx { packet-type
{ all | discovery | virtual-link-instantiation | virtual-link-maintenance |
vlan-discovery } { port-channel | tengigabitethernet } } | tx ]
```

Parameters

all	Enable all the debug options.
acl	Enable for ACL specific debugs.
error	Enable for Error specific debugs.
ifm	Enable for IFM specific debugs.
info	Enable for Information specific debugs.
ipc	Enable for IPC specific debugs.
rx	Enable for packet receive specific debugs.
packet-type	Specify the packet type. Options are: <ul style="list-style-type: none">· all· discovery· virtual-link-instantiation· virtual-link-maintenance· vlan-discovery
all	Enable for all the packet types.
discovery	Enable for FIP discovery solicits (enodes) and adverts (fcf).

virtual-link-instantiation	Enable for flogi, fdisc and flogo packets.
virtual-link-maintenance	Enable for clear virtual link and keepalive packets.
vlan-discovery	Enable for FIP VLAN requests and notifications.
port-channel	Port-channel interface.
tengigabitethernet	TenGigabit Ethernet interface.
tx	Enable for packet transmit specific debugs.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.

show fip-snooping config

Displays the FIP snooping status and configured FC-MAP values.

Syntax `show fip-snooping config`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

show fip-snooping enode

Displays information on the ENodes in FIP-snooped sessions, including the ENode interface and MAC address, FCF MAC address, VLAN ID, and FC-ID.

Syntax `show fip-snooping enode [enode-mac-address]`

Parameters

enode-mac-address Enter the MAC address of the ENodes to be displayed.

Command Modes

- EXEC

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following table describes the `show fip-snooping enode` command.

Field	Description
ENode MAC	MAC address of the ENode
ENode Interface	Slot/ port number of the interface connected to the ENode.
FCF MAC	MAC address of the FCF
VLAN	VLAN ID number used by the session
FC-ID	Fibre Channel session ID assigned by the FCF.

Example

```
Dell# show fip-snooping enode
Enode MAC          Enode Interface      FCF MAC
VLAN              FC-ID
-----          -
-----          -----
54:7f:ee:37:34:40  100                  d4:ae:52:1b:e3:cd  Te 0/11
62:00:11
```

show fip-snooping fcf

Displays information on the FCFs in FIP-snooped sessions, including the FCF interface and MAC address, FCF interface, VLAN ID, FC-MAP value, FKA advertisement period, and number of ENodes connected.

Syntax `show fip-snooping fcf[fcf-mac-address]`

Parameters

fcf-mac-address Enter the MAC address of the FCF to be displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following table describes the `show fip-snooping fcf` command.

Field	Description
FCF MAC	MAC address of the FCF
FCF Interface	Slot/ port number of the interface to which the FCF is connected.
VLAN	VLAN ID number used by the session
FC-MAP	FC-MAP value advertised by the FCF.
FKA_ADV_PERIOD	Period of time (in milliseconds) during which FIP keep-alive advertisements are transmitted.
No of ENodes	Number of ENodes connected to the FCF

Example

```
Dell# show fip-snooping fcf
FCF MAC          FCF Interface    VLAN    FC-MAP    FKA_ADV_PERIOD  No. of
Enodes
-----          -
54:7f:ee:37:34:40  Po 128          100    0e:fc:00    4000           1
```

show fip-snooping sessions

Displays information on FIP-snooped sessions on all VLANs or a specified VLAN, including the ENode interface and MAC address, the FCF interface and MAC address, VLAN ID, FCoE MAC address and FCoE session ID number (FC-ID), worldwide node name (WWNN) and the worldwide port name (WWPN).

Syntax `show fip-snooping sessions[interface vlan vlan-id]`

Parameters *vlan-id* Enter the *vlan-id* of the specified VLAN to be displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The following table describes the `show fip-snooping sessions` command.

Field	Description
ENode MAC	MAC address of the ENode.
ENode Interface	Slot/ port number of the interface connected to the ENode.
FCF MAC	MAC address of the FCF.
FC Interface	Slot/ port number of the interface to which the FCF is connected.
VLAN	VLAN ID number used by the session.

Field	Description
FCoE MAC	MAC address of the FCoE session assigned by the FCF.
FC-ID	Fibre Channel ID assigned by the FCF.
Port WWPN	Worldwide port name of the CNA port.
Port WWNN	Worldwide node name of the CNA port.

Example

```
Dell#show fip-snooping sessions
Enode MAC          Enode Intf      FCF MAC      FCF Intf VLAN FCoE MAC      FC-
ID
00:0e:1e:0c:54:a6 Te 0/14 00:05:73:f2:4f:ae Po128 100 0e:fc:00:9a:00:27 9a:
00:27 20:01:00:0e:1e:0c:54:a6
00:0e:1e:06:01:5e Te 0/16 00:05:73:f2:4f:af Po128 100 0e:fc:00:9a:01:18 9a:
01:18 20:01:00:0e:1e:06:01:5
Port WWNN
20:00:00:0e:1e:0c:54:a6
20:00:00:0e:1e:0c:54:a6
```

show fip-snooping statistics

Displays statistics on the FIP packets snooped on all interfaces, including VLANs, physical ports, and port channels..

Syntax `show fip-snooping statistics [interface vlan vlan-id | interface port-type port/slot | interface port-channel port-channel-number]`

Parameters

<i>vlan-id</i>	Enter the VLAN ID of the FIP packet statistics to be displayed.
<i>port-type port/slot</i>	Enter the port-type and slot number of the FIP packet statistics to be displayed.
<i>port-channel-number</i>	Enter the port channel number of the FIP packet statistics to be displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following table describes the `show fip-snooping statistics` command.

Field	Description
Number of Vlan Requests	Number of FIP-snooped VLAN request frames received on the interface.
Number of VLAN Notifications	Number of FIP-snooped VLAN notification frames received on the interface

Field	Description
Number of Multicast Discovery Solicits	Number of FIP-snooped multicast discovery solicit frames received on the interface.
Number of Unicast Discovery	Number of FIP-snooped unicast discovery solicit frames received on the interface.
Number of FLOGI	Number of FIP-snooped FLOGI request frames received on the interface.
Number of FDISC	Number of FIP-snooped FDISC request frames received on the interface
Number of FLOGO	Number of FIP-snooped FLOGO frames received on the interface
Number of ENode Keep Alives	Number of FIP-snooped ENode keep-alive frames received on the interface
Number of VN Port Keep Alives	Number of FIP-snooped VN port keep-alive frames received on the interface
Number of Multicast Discovery Advertisements	Number of FIP-snooped multicast discovery advertisements received on the interface
Number of Unicast Discovery Advertisements	Number of FIP-snooped unicast discovery advertisements received on the interface
Number of FLOGI Accepts	Number of FIP FLOGI accept frames received on the interface
Number of FLOGI Rejects	Number of FIP FLOGI reject frames received on the interface
Number of FDISC Accepts	Number of FIP FDISC accept frames received on the interface
Number of FDISC Rejects	Number of FIP FDISC reject frames received on the interface
Number of FLOGO Accepts	Number of FIP FLOGO accept frames received on the interface
Number of FLOGO Rejects	Number of FIP FLOGO reject frames received on the interface
Number of CVLs	Number of FIP clear virtual link frames received on the interface
Number of FCF Discovery	Number of FCF discovery timeouts that occurred on the interface
Number of VN Port Session	Number of VN port session timeouts that occurred on the interface
Number of Session failures due to Hardware Config	Number of session failures due to hardware configuration that occurred on the interface

Example

```
Dell# show fip-snooping statistics interface vlan 100
Number of Vlan Requests :0
Number of Vlan Notifications :0
Number of Multicast Discovery Solicits :2
Number of Unicast Discovery Solicits :0
Number of FLOGI :2
Number of FDISC :16
Number of FLOGO :0
Number of Enode Keep Alive :9021
Number of VN Port Keep Alive :3349
Number of Multicast Discovery Advertisement :4437
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts :2
Number of FLOGI Rejects :0
Number of FDISC Accepts :16
Number of FDISC Rejects :0
Number of FLOGO Accepts :0
Number of FLOGO Rejects :0
Number of CVL :0
Number of FCF Discovery Timeouts :0
Number of VN Port Session Timeouts :0
Number of Session failures due to Hardware Config :0
Dell(conf)#

Dell# show fip-snooping statistics int tengigabitethernet 0/11
Number of Vlan Requests :1
Number of Vlan Notifications :0
Number of Multicast Discovery Solicits :1
Number of Unicast Discovery Solicits :0
Number of FLOGI :1
Number of FDISC :16
Number of FLOGO :0
Number of Enode Keep Alive :4416
Number of VN Port Keep Alive :3136
Number of Multicast Discovery Advertisement :0
Number of Unicast Discovery Advertisement :0
Number of FLOGI Accepts :0
Number of FLOGI Rejects :0
Number of FDISC Accepts :0
Number of FDISC Rejects :0
Number of FLOGO Accepts :0
Number of FLOGO Rejects :0
Number of CVL :0
Number of FCF Discovery Timeouts :0
Number of VN Port Session Timeouts :0
Number of Session failures due to Hardware Config :0
```

Example (port channel)

```
Dell# show fip-snooping statistics interface port-channel 22
Number of Vlan Requests :0
Number of Vlan Notifications :2
Number of Multicast Discovery Solicits :0
Number of Unicast Discovery Solicits :0
Number of FLOGI :0
Number of FDISC :0
Number of FLOGO :0
Number of Enode Keep Alive :0
Number of VN Port Keep Alive :0
Number of Multicast Discovery Advertisement :4451
Number of Unicast Discovery Advertisement :2
Number of FLOGI Accepts :2
Number of FLOGI Rejects :0
Number of FDISC Accepts :16
Number of FDISC Rejects :0
Number of FLOGO Accepts :0
Number of FLOGO Rejects :0
Number of CVL :0
Number of FCF Discovery Timeouts :0
```

```
Number of VN Port Session Timeouts :0
Number of Session failures due to Hardware Config :0
```

show fip-snooping system

Displays information on the status of FIP snooping on the switch (enabled or disabled), including the number of FCoE VLANs, FCFs, ENodes, and currently active sessions.

Syntax `show fip-snooping system`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell# show fip-snooping system
Global Mode : Enabled
FCOE VLAN List (Operational) : 1, 100
FCFs : 1
Enodes : 2
Sessions : 17
```

show fip-snooping vlan

Display information on the FIP snooping operational VLANs.

Syntax `show fip-snooping vlan`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Introduced on the M I/O Aggregator.

Example

```
Dell# show fip-snooping vlan
* = Default VLAN

VLAN    FC-MAP    FCFs    Enodes    Sessions
----    -

```

*1	-	-	-	-
1002	0X0EFC00	1	1	1

Force10 Resilient Ring Protocol (FRRP)

FRRP is a proprietary protocol for that offers fast convergence in a Layer 2 network without having to run the spanning tree protocol (STP). The resilient ring protocol is an efficient protocol that transmits a high-speed token across a ring to verify the link status. All the intelligence is contained in the master node with practically no intelligence required of the transit mode.

Important Points to Remember

- FRRP is media- and speed-independent.
- FRRP is a Dell Networking proprietary protocol that does not interoperate with any other vendor.
- Spanning Tree must be disabled on both primary and secondary interfaces before Resilient Ring protocol is enabled.
- A virtual local area network (VLAN) configured as the control VLAN for a ring cannot be configured as a control or member VLAN for any other ring.
- Member VLANs across multiple rings are not supported in Master nodes.
- If multiple rings share one or more member VLANs, they cannot share any links between them.
- Each ring can have only one Master node; all others are Transit nodes.

Topics:

- [clear frrp](#)
- [debug frrp](#)
- [description](#)
- [disable](#)
- [interface](#)
- [member-vlan](#)
- [mode](#)
- [protocol frrp](#)
- [show frrp](#)
- [timer](#)

clear frrp

Clear the FRRP statistics counters.

Syntax `clear frrp [ring-id]`

Parameters **ring-id** (Optional) Enter the ring identification number. The range is from 1 to 255.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN MXL.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Executing this command without the optional `ring-id` command clears the statistics counters on all the available rings. The system requires a command line confirmation before the command executes. This command clears the following counters:

- hello Rx and Tx counters
- Topology change Rx and Tx counters
- The number of state change counters

Example

```
Dell#clear frrp
Clear frrp statistics counter on all ring [confirm] yes
Dell#clear frrp 4
Clear frrp statistics counter for ring 4 [confirm] yes
Dell#
```

Related Commands [show frrp](#) — displays the resilient ring protocol configuration.

debug frrp

Clear the FRRP statistics counters.

Syntax

```
debug frrp {event | packet | detail} [ring-id] [count number]
To disable debugging, use the no debug frrp {event | packet | detail} {ring-id}
[countnumber] command.
```

Parameters

event	Enter the keyword <code>event</code> to display debug information related to ring protocol transitions.
packet	Enter the keyword <code>packet</code> to display brief debug information related to control packets.
detail	Enter the keyword <code>detail</code> to display detailed debug information related to the entire ring protocol packets.
ring-id	(Optional) Enter the ring identification number. The range is from 1 to 255.
count number	Enter the keyword <code>count</code> then the number of debug outputs. The range is from 1 to 65534.

Defaults

Disabled.

Command Modes

CONFIGURATION (conf-frrp)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

9.2(0.0) Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Because the resilient ring protocol can potentially transmit 20 packets per interface, restrict debug information.

description

Enter an identifying description of the ring.

Syntax `description Word`
To remove the ring description, use the `no description [Word]` command.

Parameters **Word** Enter a description of the ring. Maximum: 255 characters.

Defaults none

Command Modes CONFIGURATION (conf-frrp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

disable

Disable the resilient ring protocol.

Syntax `disable`
To enable the Resilient Ring Protocol, use the `no disable` command.

Defaults **Disabled**

Command Modes CONFIGURATION (conf-frrp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

interface

Configure the primary, secondary, and control-vlan interfaces.

Syntax `interface {primary interface secondary interface control-vlan vlan-id}`

To return to the default, use the `no interface {primary interface secondary interface control-vlan vlan-id}` command.

Parameters

primary interface	Enter the keyword <code>primary</code> to configure the primary interface then one of the following interfaces and slot/port information: <ul style="list-style-type: none">• <code>Fast Ethernet interface</code>: enter the keyword <code>FastEthernet</code> then the slot/port information.• <code>Port Channel interface</code>: enter the keyword <code>port-channel</code> then a number. The range is from 1 to 128.• <code>10-Gigabit Ethernet interface</code>: enter the keyword <code>TenGigabitEthernet</code> then the slot/port information
secondary interface	Enter the keyword <code>secondary</code> to configure the secondary interface then one of the following interfaces and slot/port information: <ul style="list-style-type: none">• <code>Fast Ethernet interface</code>: enter the keyword <code>FastEthernet</code> then the slot/port information.• <code>Port Channel interface</code>: enter the keyword <code>port-channel</code> then a number. The range is from 1 to 128.• <code>10-Gigabit Ethernet interface</code>: enter the keyword <code>TenGigabitEthernet</code> then the slot/port information
control-vlan vlan-id	Enter the keyword <code>control-vlan</code> then the VLAN ID. The range is from 1 to 4094.

Defaults

none

Command Modes

CONFIGURATION (conf-frpp)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command causes the Ring Manager to take ownership of the two ports after IFM validates the configuration. Ownership is relinquished for a port only when the interface does not play a part in any control VLAN, that is, the interface does not belong to any ring.

Related Commands

[show frpp](#) — displays the resilient ring protocol configuration information.

member-vlan

Specify the member VLAN identification numbers.

Syntax

`member-vlan {vlan-range}`

To return to the default, use the `no member-vlan [vlan-range]` command.

Parameters

vlan-range	Enter the member VLANs using VLAN IDs (separated by commas), a range of VLAN IDs (separated by a hyphen), a single VLAN ID, or a combination. For example: VLAN IDs (comma-separated): 3, 4, 6. Range (hyphen-separated): 5-10. Combination: 3, 4, 5-10, 8.
-------------------	---

Defaults	none	
Command Modes	CONFIGURATION (conf-frrp)	
Supported Modes	Full-Switch	
Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

mode

Set the Master or Transit mode of the ring.

Syntax	<code>mode {master transit}</code>	
	To reset the mode, use the <code>no mode {master transit}</code> command.	

Parameters	master	Enter the keyword <code>master</code> to set the Ring node to Master mode.
	transit	Enter the keyword <code>transit</code> to set the Ring node to Transit mode.

Defaults	Mode None	
Command Modes	CONFIGURATION (conf-frrp)	
Supported Modes	Full-Switch	
Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

protocol frrp

Enter the Resilient Ring Protocol and designate a ring identification.

Syntax	<code>protocol frrp {ring-id}</code>	
	To exit the ring protocol, use the <code>no protocol frrp {ring-id}</code> command.	

Parameters	<i>ring-id</i>	Enter the ring identification number. The range is from 1 to 255.
-------------------	-----------------------	---

Defaults	none	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

9.2(0.0) Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command places you into the resilient ring protocol. After executing this command, the command line prompt changes to `conf-frrp`.

show frrp

Display the resilient ring protocol configuration.

Syntax `show frrp [ring-id [summary]] | [summary]`

Parameters

ring-id	Enter the ring identification number. The range is from 1 to 255
summary	(OPTIONAL) Enter the keyword <code>summary</code> to view just a summarized version of the Ring configuration.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Executing this command without the optional `ring-id` command clears the statistics counters on all the available rings. The system requires a command line confirmation before the command executes. This command clears the following counters:

- hello Rx and Tx counters
- Topology change Rx and Tx counters
- The number of state change counters

Example (Summary) Dell#show frrp summary

```
Ring-ID State Mode Ctrl_Vlan Member_Vlans
-----
2       UP   Master  2       11-20, 25,27-30
31      UP   Transit 31      40-41
50      Down Transit 50      32
Dell#
```

Example (1)

```
Dell#show frrp 1
Ring protocol 1 is in Master mode
Ring Protocol Interface:
Primary : TenGigabitEthernet 0/6 State: Forwarding
Secondary: Port-channel 100 State: Blocking
Control Vlan: 1
Ring protocol Timers: Hello-Interval 50 msec Dead-Interval 150 msec
Ring Master's MAC Address is 00:01:e8:13:a3:19
Topology Change Statistics: Tx:110 Rx:45
Hello Statistics: Tx:13028 Rx:12348
Number of state Changes: 34
Member Vlans: 1000-1009
Dell#
```

Example (2 Summary)

```
Dell#show frrp 2 summary
Ring-ID State Mode Ctrl_Vlan Member_Vlans
-----
2      Up   Master 2      11-20, 25, 27-30
Dell#
```

Related Commands `protocol frrp` — enters the resilient ring protocol and designate a ring identification.

timer

Set the hello interval or dead interval for the Ring control packets.

Syntax

```
timer {hello-interval milliseconds}| {dead-interval milliseconds}
To remove the timer, use the no timer {hello-interval [milliseconds] | {dead-interval milliseconds} command.
```

Parameters

hello-interval <i>milliseconds</i>	Enter the keyword <code>hello-interval</code> then the time, in milliseconds, to set the hello interval of the control packets. The milliseconds must be entered in increments of 50 millisecond; for example, 50, 100, 150, and so on. If an invalid value is entered, an error message is generated. The range is from 50 to 2000 ms. Default: 500 ms .
dead-interval <i>milliseconds</i>	Enter the keyword <code>dead-interval</code> then the time, in milliseconds, to set the dead interval of the control packets. The range is from 50 to 6000 ms. Default: 1500 ms .

NOTE: The configured dead interval must be at least three times the hello interval.

Defaults

- **500 ms** for `hello-interval milliseconds`
- **1500 ms** for `dead-intervalmilliseconds`

Command Modes CONFIGURATION (conf-frrp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `hello interval` command is the interval at which ring frames are generated from the primary interface of the master node. The `dead interval` command is the time that elapses before a time-out occurs.

GARP VLAN Registration (GVRP)

The Dell Networking Operating System (OS) supports the basic GVRP commands.

The generic attribute registration protocol (GARP) mechanism allows the configuration of a GARP participant to propagate through a network quickly. A GARP participant registers or de-registers its attributes with other participants by making or withdrawing declarations of attributes. At the same time, based on received declarations or withdrawals, GARP handles attributes of other participants.

GVRP enables a device to propagate local virtual local area network (VLAN) registration information to other participant devices and dynamically update the VLAN registration information from other devices. The registration information updates local databases regarding active VLAN members and through which port the VLANs can be reached.

GVRP ensures that all participants on a bridged LAN maintain the same VLAN registration information. The VLAN registration information propagated by GVRP includes both manually configured local static entries and dynamic entries from other devices.

GVRP participants have the following components:

- The GVRP application
- GARP information propagation (GIP)
- GARP information declaration (GID)

Important Points to Remember

- GVRP is supported on Layer 2 ports only.
- All VLAN ports added by GVRP are tagged.
- GVRP is supported on untagged ports belonging to a default VLAN and tagged ports.
- GVRP cannot be enabled on untagged ports belonging to a non-default VLAN *unless* native VLAN is turned on.
- GVRP requires end stations with dynamic access network interface controller (NICs).
- Based on updates from GVRP-enabled devices, GVRP allows the system to dynamically create a port-based VLAN (unspecified) with a specific VLAN ID and a specific port.
- On a port-by-port basis, GVRP allows the system to learn about GVRP updates to an existing port-based VLAN with that VLAN ID and IEEE 802.1Q tagging.
- GVRP allows the system to send dynamic GVRP updates about your existing port-based VLAN.
- GVRP updates are not sent to any blocked spanning tree protocol (STP) ports. GVRP operates only on ports that are in the forwarding state.
- GVRP operates only on ports that are in the STP forwarding state. If you enable GVRP, a port that changes to the STP Forwarding state automatically begin to participate in GVRP. A port that changes to an STP state other than forwarding no longer participates in GVRP.
- VLANs created dynamically with GVRP exist only as long as a GVRP-enabled device is sending updates. If the devices no longer send updates, or GVRP is disabled, or the system is rebooted, all dynamic VLANs are removed.
- GVRP manages the active topology, not non-topological data such as VLAN protocols. If a local bridge must classify and analyze packets by VLAN protocols, manually configure protocol-based VLANs, and simply rely on GVRP for VLAN updates. But if the local bridge must know only how to reach a given VLAN, then GVRP provides all necessary information.
- The VLAN topologies that GVRP learns are treated differently from VLANs that are statically configured. The GVRP dynamic updates are not saved in NVRAM, while static updates are saved in NVRAM. When GVRP is disabled, the system deletes all VLAN interfaces that were learned through GVRP and leaves unchanged all VLANs that were manually configured.

Topics:

- [clear gvrp statistics](#)
- [debug gvrp](#)
- [disable](#)
- [garp timers](#)
- [gvrp enable](#)
- [gvrp registration](#)
- [protocol gvrp](#)
- [show config](#)
- [show garp timers](#)
- [show gvrp](#)
- [clear gvrp statistics](#)
- [show vlan](#)

clear gvrp statistics

Clear GVRP statistics on an interface.

Syntax `clear gvrp statistics interface interface`

Parameters

interface *interface* Enter the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show gvrp statistics](#) — displays the GVRP statistics.

debug gvrp

Enable debugging on GVRP.

Syntax `debug gvrp {config | events | pdu}`
To disable debugging, use the `no debug gvrp {config | events | pdu}` command.

Parameters

config Enter the keyword `config` to enable debugging on the GVRP configuration.

event	Enter the keyword <code>event</code> to enable debugging on the JOIN/LEAVE events.
pdu	Enter the keyword <code>pdu</code> then one of the following Interface keywords and slot/port or number information: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.

Defaults	Disabled.
Command Modes	EXEC
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

disable

Globally disable GVRP.

Syntax	<code>disable</code> To re-enable GVRP, use the <code>no disable</code> command.
---------------	---

Defaults	Enabled.
Command Modes	CONFIGURATION-GVRP
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands	gvrp enable — enables GVRP on physical interfaces and LAGs. protocol gvrp — access GVRP protocol.
-------------------------	--

garp timers

Set the intervals (in milliseconds) for sending GARP messages.

Syntax	<code>garp timers {join leave leave-all}</code> To return to the previous setting, use the <code>no garp timers {join leave leave-all}</code> command.
---------------	---

Parameters

<code>join</code>	Enter the keyword <code>join</code> then the number of milliseconds to configure the join time. The range is from 100 to 147483647 milliseconds. The default is 200 milliseconds .  NOTE: Designate the milliseconds in multiples of 100.
<code>leave</code>	Enter the keyword <code>leave</code> then the number of milliseconds to configure the leave time. The range is from 100 to 2147483647 milliseconds. The default is 600 milliseconds .  NOTE: Designate the milliseconds in multiples of 100.
<code>leave-all</code>	Enter the keywords <code>leave-all</code> then the number of milliseconds to configure the leave-all time. The range is from 100 to 2147483647 milliseconds. The default is 1000 milliseconds.  NOTE: Designate the milliseconds in multiples of 100.

Defaults

As above.

Command Modes

CONFIGURATION-GVRP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

- **Join Timer** — `Join` messages announce the willingness to register some attributes with other participants. For reliability, each GARP application entity sends a `Join` message twice and uses a join timer to set the sending interval.
- **Leave Timer** — `Leave` announces the willingness to de-register with other participants. Together with `Join`, `Leave` messages help GARP participants complete attribute reregistration and de-registration. The leave timer starts after receipt of a leave message sent for de-registering some attribute information. If a `Join` message is *not* received before the `Leave` time expires, the GARP application entity removes the attribute information as requested.
- **Leave All Timer** — The `Leave All` timer starts when a GARP application entity starts. When this timer expires, the entity sends a `Leave-all` message so that other entities can reregister their attribute information. Then the `Leave-all` time begins again.

Related Commands `show garp timers` — displays the current GARP times.

gvrp enable

Enable GVRP on physical interfaces and LAGs.

Syntax

`gvrp enable`

To disable GVRP on the interface, use the `no gvrp enable` command.

Defaults

Disabled.

Command Modes

CONFIGURATION-INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [disable](#) — globally disables GVRP.

gvrp registration

Configure the GVRP register type.

Syntax `gvrp registration {fixed | normal | forbidden}`
To return to the default, use the `gvrp register normal` command.

Parameters

fixed	Enter the keyword <code>fixed</code> then the VLAN range in a comma-separated VLAN ID set.
normal	Enter the keyword <code>normal</code> then the VLAN range in a comma-separated VLAN ID set. This setting is the default.
forbidden	Enter the keyword <code>forbidden</code> then the VLAN range in a comma-separated VLAN ID set.

Defaults **normal**

Command Modes CONFIGURATION-INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

`Fixed` registration prevents an interface, configured using the command line, to belong to a VLAN (static configuration) from being unconfigured when it receives a `Leave` message. Therefore, Registration mode on that interface is `fixed`.

`Normal` registration is the default registration. The port's membership in the VLAN depends on GVRP. The interface becomes a member of a VLAN after learning about the VLAN through GVRP. If the VLAN is removed from the port that sends GVRP advertisements to this device, the port stops being a member of the VLAN.

To advertise or learn about VLANs through GVRP, use the `forbidden` command when you do not want the interface.

Related Commands [show gvrp](#) — displays the GVRP configuration including the registration.

protocol gvrp

Access GVRP protocol — (config-gvrp)#.

Syntax `protocol gvrp`

Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	disable — globally disables GVRP.	

show config

Display the global GVRP configuration.

Syntax	<code>show config</code>	
Command Modes	CONFIGURATION-GVRP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	gvrp enable — enables GVRP on physical interfaces and LAGs.	
	protocol gvrp — accesses the GVRP protocol.	

show garp timers

Display the GARP timer settings for sending GARP messages.

Syntax	<code>show garp timers</code>	
Defaults	none	
Command Modes	<ul style="list-style-type: none"> · EXEC · EXEC Privilege 	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show garp timers
GARP Timers      Value (milliseconds)
-----
```

```

Join Timer      200
Leave Timer     600
LeaveAll Timer  10000
Dell#

```

Related Commands [garp timers](#) — sets the intervals (in milliseconds) for sending GARP messages.

show gvrp

Display the GVRP configuration.

Syntax `show gvrp [brief | interface]`

Parameters

- brief** (OPTIONAL) Enter the keyword `brief` to display a brief summary of the GVRP configuration.
- interface** (OPTIONAL) Enter the following keywords and slot/port or number information:
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
 - For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If no ports are GVRP participants, the message output changes from `GVRP Participants running on <port_list>` to `GVRP Participants running on no ports`.

Example

```

R3#show gvrp brief
GVRP Feature is currently enabled.
Port                GVRP Status    Edge-Port
-----
Te 3/0              Disabled       No
Te 3/1              Disabled       No
Te 3/2              Enabled        No
Te 3/3              Disabled       No
Te 3/4              Disabled       No
Te 3/5              Disabled       No
Te 3/6              Disabled       No
Te 3/7              Disabled       No
Te 3/8              Disabled       No

```

Related Commands [show gvrp statistics](#) — displays the GVRP statistics.

clear gvrp statistics

Clear GVRP statistics on an interface.

Syntax `clear gvrp statistics {interface interface | summary}`

Parameters

interface *interface* Enter the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

summary Enter the keyword `summary` to display just a summary of the GVRP statistics.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Invalid messages/attributes skipped can occur in the following cases:

- The incoming GVRP PDU has an incorrect length.
- "End of PDU" was reached before the complete attribute could be parsed.
- The Attribute Type of the attribute that was being parsed was not the GVRP VID Attribute Type (0x01).
- The attribute that was being parsed had an invalid attribute length.
- The attribute that was being parsed had an invalid GARP event.
- The attribute that was being parsed had an invalid VLAN ID. The valid range is 1 - 4095.

A failed registration can occur for the following reasons:

- Join requests were received on a port that was blocked from learning dynamic VLANs (GVRP Blocking state).
- An entry for a new GVRP VLAN could not be created in the GVRP database.

Example

```
Dell#show gvrp statistics int tengig 1/0
```

```
Join Empty Received: 0
Join In Received: 0
Empty Received: 0
LeaveIn Received: 0
Leave Empty Received: 0
Leave All Received: 40
Join Empty Transmitted: 156
Join In Transmitted: 0
Empty Transmitted: 0
Leave In Transmitted: 0
Leave Empty Transmitted: 0
```

```
Leave All Transmitted: 41
Invalid Messages/Attributes skipped: 0
Failed Registrations: 0
Dell#
```

Related Commands [show gvrp](#) — displays the GVRP configuration.

show vlan

Display the global VLAN configuration.

Syntax `show vlan`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell# show vlan
Codes: * - Default VLAN, G - GVRP VLANs, R - Remote Port Mirroring VLANs, P -
Primary, C - Community, I - Isolated
Q: U - Untagged, T - Tagged
   x - Dot1x untagged, X - Dot1x tagged
   G - GVRP tagged, M - Vlan-stack, H - VSN tagged
   i - Internal untagged, I - Internal tagged, v - VLT untagged, V - VLT tagged
   NUM Status Description      Q Ports
*    1   Active                U Te 3/7
                                   U Te 5/7-8

G    10  Active                G Po128(Te 5/10) (dynamically
learned vlan)
Dell
```

Related Commands [show gvrp statistics](#) — displays the GVRP statistics.

Internet Group Management Protocol (IGMP)

The Dell Networking OS supports IGMP snooping version 2 and 3 on all Dell Networking systems.

IGMP Commands

The Dell Networking OS supports the following IGMP commands:

- `clear ip igmp groups`
- `debug ip igmp`
- `ip igmp group-join-limit`
- `ip igmp querier-timeout`
- `ip igmp query-interval`
- `ip igmp query-max-resp-time`
- `ip igmp snooping enable`
- `ip igmp snooping fast-leave`
- `ip igmp snooping flood`
- `ip igmp snooping last-member-query-interval`
- `ip igmp snooping mrouter`
- `ip igmp snooping querier`
- `ip igmp version`
- `show ip igmp groups`
- `show ip igmp interface`
- `show ip igmp snooping mrouter`

Important Points to Remember

- Dell Networking OS supports version 1, version 2, and version 3 hosts.
- Dell Networking OS IGMP snooping implementation is based on IP multicast address (not based on Layer 2 multicast mac-address) and the IGMP snooping entries are in Layer 3 flow table not in Layer 2 forwarding information base (FIB).
- Dell Networking OS IGMP snooping implementation is based on draft-ietf-magma-snoop-10.
- IGMP snooping is enabled by default on the switch.
- A maximum of 2k groups and 4k virtual local area networks (VLAN) are supported.
- IGMP snooping is not supported on default VLAN interface.
- Flooding of unregistered multicast traffic is enabled by default.
- Queries are not accepted from the server side ports and are only accepted from the uplink LAG.
- Reports and Leaves are flooded by default to the uplink LAG irrespective of whether it is an mrouter port or not.

IGMP Snooping Commands

Dell Networking OS supports IGMP Snooping version 2 and 3 on all Dell Networking systems.

Important Points to Remember for IGMP Snooping

- Dell Networking OS supports version 1, version 2, and version 3 hosts.
- Dell Networking OS IGMP snooping implementation is based on IP multicast address (not based on Layer 2 multicast mac address) and the IGMP snooping entries are in Layer 3 flow table not in Layer 2 forwarding information base (FIB).
- Dell Networking OS IGMP snooping implementation is based on draft-ietf-magma-snoop-10.
- Dell Networking OS supports IGMP snooping on JUMBO-enabled cards.
- IGMP snooping is not enabled by default on the switch.
- A maximum of 1800 groups and 600 VLAN are supported.
- IGMP snooping is not supported on a default VLAN interface.
- IGMP snooping is not supported over VLAN-Stack-enabled VLAN interfaces (you must disable IGMP snooping on a VLAN interface before configuring VLAN-Stack-related commands).

clear ip igmp groups

Clear entries from the group cache table.

Syntax `clear ip igmp groups [group-address | interface]`

Parameters

group-address	(OPTIONAL) Enter the IP multicast group address in dotted decimal format.
interface	(OPTIONAL) Enter the interface type and slot/port information: For a VLAN interface enter the keyword <code>vlan</code> followed by a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

debug ip igmp

Enable debugging of IGMP packets.

Syntax `debug ip igmp [group address | interface]`
To disable IGMP debugging, enter the `no ip igmp` command. To disable all debugging, enter the `undebug all` command.

Defaults Disabled

Parameters	group-address	(OPTIONAL) Enter the IP multicast group address in dotted decimal format.
	interface	(OPTIONAL) Enter the interface type and slot/port information: For a VLAN interface enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

ip igmp access-group

To specify access control for packets, use this feature.

Syntax `ip igmp access-group access-list`
To remove the feature, use the `no ip igmp access-group access-list` command.

Parameters **access-list** Enter the name of the extended ACL (16 characters maximum).

Defaults Not configured

Command Modes INTERFACE (*conf-if-interface-slot/port*)

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The access list accepted is an extended ACL. To block IGMP reports from hosts, on a per-interface basis based on the group address and source address that you specify in the access list, use this feature.

ip igmp group-join-limit

To limit the number of IGMP groups that can be joined in a second, use this feature.

Syntax `ip igmp group-join-limit number`

Parameters **number** Enter the number of IGMP groups permitted to join in a second. The range is from 1 to 10000.

Defaults none

Command Modes CONFIGURATION (*conf-if-interface-slot/port*)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

ip igmp querier-timeout

Change the interval that must pass before a multicast router decides that there is no longer another multicast router that should be the querier.

Syntax `ip igmp querier-timeout seconds`
To return to the default value, use the `no ip igmp querier-timeout` command.

Parameters **seconds** Enter the number of seconds the router must wait to become the new querier. The range is from 60 to 300. The default is **125 seconds**.

Defaults **125 seconds**

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

ip igmp query-interval

Change the transmission frequency of IGMP general queries the Querier sends.

Syntax `ip igmp query-interval seconds`
To return to the default values, use the `no ip igmp query-interval` command.

Parameters **seconds** Enter the number of seconds between queries sent out. The range is from 1 to 18000. The default is **60 seconds**.

Defaults **60 seconds**

Command Modes	INTERFACE
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

ip igmp query-max-resp-time

Set the maximum query response time advertised in general queries.

Syntax `ip igmp query-max-resp-time seconds`
To return to the default values, use the `no ip igmp query-max-resp-time` command.

Parameters `seconds` Enter the number of seconds for the maximum response time. The range is from 1 to 25. The default is **10 seconds**.

Defaults **10 seconds**

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

ip igmp snooping enable

Enable IGMP snooping on all or a single VLAN. This command is the master on/off switch to enable IGMP snooping.

Syntax `ip igmp snooping enable`
To disable IGMP snooping, use the `no ip igmp snooping enable` command.

Defaults Disabled.

Command Modes

- CONFIGURATION
- INTERFACE VLAN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information To enable IGMP snooping, enter this command. When you enable this command from CONFIGURATION mode, IGMP snooping enables on all VLAN interfaces (except the default VLAN).

 **NOTE:** Execute the `no shutdown` command on the VLAN interface for IGMP Snooping to function.

ip igmp snooping fast-leave

Enable IGMP snooping fast-leave for this VLAN.

Syntax `ip igmp snooping fast-leave`
To disable IGMP snooping fast leave, use the `no igmp snooping fast-leave` command.

Defaults Not configured.

Command Modes INTERFACE VLAN — (conf-if-vl-n)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information Queriers normally send some queries when a leave message is received prior to deleting a group from the membership database. There may be situations when you require a fast deletion of a group. When you enable IGMP fast leave processing, the switch removes an interface from the multicast group as soon as it detects an IGMP version 2 leave message on the interface.

ip igmp snooping flood

This command controls the flooding behavior of unregistered multicast data packets. When flooding is disabled, unregistered multicast data traffic is forwarded to *only* multicast router ports in a VLAN. If there is no multicast router port in a VLAN, unregistered multicast data traffic is dropped.

Syntax `ip igmp snooping flood`
To disable the flooding, use the `no ip igmp snooping flood` command.

Parameters	Enabled
Command Modes	CONFIGURATION
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

ip igmp snooping last-member-query-interval

The last member query interval is the maximum response time inserted into Group-Specific queries sent in response to Group-Leave messages.

Syntax `ip igmp snooping last-member-query-interval milliseconds`
 To return to the default value, use the `no ip igmp snooping last-member-query-interval` command.

Parameters `milliseconds` Enter the interval in milliseconds. The range is from 100 to 65535. The default is **1000 milliseconds**.

Defaults **1000 milliseconds**

Command Modes INTERFACE VLAN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information This last-member-query-interval is also the interval between successive Group-Specific Query messages. To change the last-member-query interval, use this command.

ip igmp snooping mrouter

Statically configure a VLAN member port as a multicast router interface.

Syntax `ip igmp snooping mrouter interface interface`
 To delete a specific multicast router interface, use the `no igmp snooping mrouter interface interface` command.

Parameters

- interface *interface*** Enter the following keywords and slot/port or number information:
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
 - For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.

Defaults

Not configured.

Command Modes

INTERFACE VLAN — (conf-if-vl-n)

Supported Modes

Programmable-Mux (PMUX)

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

Dell Networking OS provides the capability of statically configuring the interface to which a multicast router is attached. To configure a static connection to the multicast router, enter the `ip igmp snooping mrouter interface` command in the VLAN context. The interface to the router must be a part of the VLAN where you are entering the command.

ip igmp snooping querier

Enable IGMP querier processing for the VLAN interface.

Syntax

`ip igmp snooping querier`

To disable IGMP querier processing for the VLAN interface, use the `no ip igmp snooping querier` command.

Defaults

Not configured.

Command Modes

INTERFACE VLAN — (conf-if-vl-n)

Supported Modes

Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information

This command enables the IGMP switch to send General Queries periodically. This behavior is useful when there is no multicast router present in the VLAN because the multicast traffic is not routed. Assign an IP address to the VLAN interface for the switch to act as a querier for this VLAN.

ip igmp version

Manually set the version of the router to IGMPv2 or IGMPv3.

Syntax	<code>ip igmp version {2 3}</code>	
Parameters	2	Enter the number 2 to set the IGMP version number to IGMPv2.
	3	Enter the number 3 to set the IGMP version number to IGMPv3.
Defaults	2 (that is, IGMPv2)	
Command Modes	INTERFACE	
Supported Modes	Programmable-Mux (PMUX)	
	Full-Switch	

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

show ip igmp groups

View the IGMP groups.

Syntax	<code>show ip igmp groups [group-address [detail] detail interface [group-address [detail]]]</code>	
Parameters	group-address	(OPTIONAL) Enter the group address in dotted decimal format to view information on that group only.
	interface	(OPTIONAL) Enter the interface type and slot/port information: For a VLAN interface enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
	detail	(OPTIONAL) Enter the keyword <code>detail</code> to display the IGMPv3 source information.
Command Modes	<ul style="list-style-type: none">· EXEC· EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show ip igmp groups
Total Number of Groups: 5
IGMP Connected Group Membership
Group Address Interface Mode Uptime
Expires Last Reporter
225.0.0.0 Vlan 100 IGMPv2 00:00:05
00:02:04 3.0.0.51
Member Ports: Po 2
225.0.0.2 Vlan 100 IGMPv2 00:00:05
00:02:04 3.0.0.51
Member Ports: Po 2
225.0.0.3 Vlan 100 IGMPv2 00:00:05
00:02:04 3.0.0.51
Member Ports: Po 2
225.0.0.4 Vlan 100 IGMPv2 00:00:05
00:02:04 3.0.0.51
Member Ports: Po 2
```

Field	Description
Group Address	Lists the multicast address for the IGMP group.
Interface	Lists the interface type, slot and port number.
Mode	Displays the IGMP version used.
Uptime	Displays the amount of time the group has been operational.
Expires	Displays the amount of time until the entry expires.
Last Reporter	Displays the IP address of the last host to be a member of the IGMP group.
Member Ports	Indicates the member ports of the port channel. If the port channel is VLT, an asterisk (*) after the port channel number indicates the port channel is locally down and that a remote VLT port is up.

show ip igmp interface

View information on the interfaces participating in IGMP.

Syntax `show ip igmp interface [interface]`

Parameters

interface	(OPTIONAL) Enter any of the following keywords and slot/port or number to clear counters from a specified interface: <ul style="list-style-type: none"> For a Port Channel interface, enter the keyword port-channel followed by a number. Range: 1-128 For a 10-Gigabit Ethernet interface, enter the keyword TenGigabitEthernet followed by the slot/port information. For a VLAN, enter the keyword vlan followed by a number from 1 to 4094.
------------------	---

Command Modes

- EXEC

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show ip igmp interface
Vlan 2 is up, line protocol is down
Inbound IGMP access group is not set
Interface IGMP group join rate limit is not set
IGMP snooping is enabled on interface
IGMP Snooping query interval is 60 seconds
IGMP Snooping querier timeout is 125 seconds
IGMP Snooping last member query response interval is 1000 ms
IGMP snooping fast-leave is disabled on this interface
IGMP snooping querier is disabled on this interface
Vlan 3 is up, line protocol is down
Inbound IGMP access group is not set
Interface IGMP group join rate limit is not set
IGMP snooping is enabled on interface
IGMP Snooping query interval is 60 seconds
IGMP Snooping querier timeout is 125 seconds
IGMP Snooping last member query response interval is 1000 ms
IGMP snooping fast-leave is disabled on this interface
IGMP snooping querier is disabled on this interface
--More--
```

show ip igmp snooping mrouter

Displays multicast router interfaces.

Syntax `show ip igmp snooping mrouter [vlan number]`

Parameters

vlan number	Enter the keyword vlan followed by the vlan number. Range: 1 to 4094
--------------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show ip igmp snooping mrouter vlan 2
Interface Router Ports
```

```
Vlan 2 Po 128  
Dell#
```

Related Commands [show ip igmp groups](#) — Use this IGMP command to view groups.

Interfaces

This chapter defines the interface commands on the Aggregator switch.

Basic Interface Commands

The following commands are for Physical, Loopback, and Null interfaces.

clear counters

Clear the counters used in the `show interfaces` commands for VLANs, and physical interfaces, or selected ones.

Syntax `clear counters interface`

Defaults Without a specific interface specified, the command clears all interface counters.

Parameters

interface	(OPTIONAL) Enter any of the following keywords and slot/port or number to clear counters from a specified interface:
------------------	--

- For the management interface on the stack-unit, enter the keyword `managementethernet` followed by slot/port information. The slot and port range is 0.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For a Port Channel interface, enter the keyword `port-channel` followed by a number. Range: 1-128

NOTE: This command also enables you to clear the port configurations corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to clear the port configurations corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to clear the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#clear counters
Clear counters on all interfaces [confirm]
```

clear dampening

Clear the dampening counters on all the interfaces or just the specified interface.

Syntax `clear dampening [interface]`

Parameters

interface (OPTIONAL) Enter any of the following keywords and slot/port or number to clear counters from a specified interface:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults Without an interface specified, the command clears all interface dampening counters.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

On the switch, after you enter the `clear counters` command and verify the results with the `show interfaces` command, the line rate is not reset to 0.00%.

Example

```
Dell#clear dampening tengigabitethernet 1/2
Clear dampening counters on tengig 1/2 [confirm] y
Dell#
```

Related Commands [show interfaces dampening](#) — displays interface dampening information.

[dampening](#) — configures dampening on an interface.

cx4-cable-length

Configure the length of the cable to be connected to the selected CX4 port.

Syntax `[no] cx4-cable-length {long | medium | short}`

Parameters

long | medium | short Enter the keyword that matches the cable length to be used at the selected port:

- `short` = For 1-meter and 3-meter cable lengths.
- `medium` = For 5-meter cable length.

- long = For 10-meter and 15-meter cable lengths.

Defaults	medium
Command Modes	INTERFACE
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command only works on ports that the system recognizes as CX4 ports. The figures below shows an attempt to configure an XFP port with the command after inserting a CX4 converter into the port. For details about using XFP ports with CX4 cables, refer to your FN IOM switch hardware guide.

Example (Unsuccessful)

```
Dell#show interfaces tengigabitethernet 0/26 | grep "XFP type"
Pluggable media present, XFP type is 10GBASE-CX4

Dell(conf-if-te-0/26)#cx4-cable-length short
% Error: Unsupported command.
Dell(conf-if-te-0/26)#cx4-cable-length medium
% Error: Unsupported command.
Dell(conf-if-te-0/26)#cx4-cable-length long
% Error: Unsupported command.
Dell(conf-if-te-0/26)#
```

Example (Successful)

```
Dell#config
Dell(config)#interface tengigabitethernet 0/5
Dell(conf-if-0/5)#cx4-cable-length long
Dell(conf-if-0/5)#show config
!
interface TenGigabitEthernet 0/4
  no ip address
  cx4-cable-length long
  shutdown
Dell(conf-if-0/5)#exit
Dell(config)#
```

Related Commands [show config](#) – displays the configuration of the selected interface.

dampening

Configure dampening on an interface.

Syntax

```
dampening [[[half-life] [reuse-threshold]] [suppress-threshold]] [max-suppress-time]]
```

To disable dampening, use the `no dampening [[[half-life] [reuse-threshold]] [suppress-threshold]] [max-suppress-time]]` command.

Parameters

<i>half-life</i>	Enter the number of seconds after which the penalty is decreased. The penalty decreases half after the half-life period expires. The range is from 1 to 30 seconds. The default is 5 seconds .
<i>reuse-threshold</i>	Enter a number as the reuse threshold, the penalty value below which the interface state is changed to “up”. The range is from 1 to 20000. The default is 750 .
<i>suppress-threshold</i>	Enter a number as the suppress threshold, the penalty value above which the interface state is changed to “error disabled”. The range is from 1 to 20000. The default is 2500 .
<i>max-suppress-time</i>	Enter the maximum number for which a route can be suppressed. The default is four times the half-life value. The range is from 1 to 86400. The default is 20 seconds .

Defaults Disabled.

Command Modes INTERFACE (conf-if-)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

With each flap, the Dell Networking OS penalizes the interface by assigning a penalty (1024) that decays exponentially depending on the configured half-life. After the accumulated penalty exceeds the suppress threshold value, the interface moves to the Error-Disabled state. This interface state is deemed as “down” by all static/dynamic Layer 2 and Layer 3 protocols. The penalty is exponentially decayed based on the half-life timer. After the penalty decays below the reuse threshold, the interface enables. The configured parameters are as follows:

- *suppress-threshold* should be greater than *reuse-threshold*
- *max-suppress-time* should be at least 4 times *half-life*

 **NOTE:** You cannot apply dampening on an interface that is monitoring traffic for other interfaces.

Example

```
Dell(conf-if-te-3/2)#dampening 20 800 4500 120
Dell(conf-if-te-3/2)#
```

Related Commands

[clear dampening](#) — clears the dampening counters on all the interfaces or just the specified interface.

[show interfaces dampening](#) — displays interface dampening information.

description

Assign a descriptive text string to the interface.

Syntax

```
description desc_text
```

To delete a description, enter `no description` command.

Parameters

desc_text Enter a text string up to 240 characters long.

Defaults No description is defined.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

- Spaces between characters are not preserved after entering this command unless you enclose the entire description in quotation marks ("desc_text").
- Entering a text string after the `default vlan-id` command overwrites any previous text string configured as the description.
- The `show tdr` and `default vlan-id` commands are the only commands that you can configure on an interface that is a member of a port-channel.
- Use the `show interfaces description` command to display descriptions configured for each interface.

Related commands [show interfaces description](#) — Displays the description field of interfaces.

flowcontrol

Controls how the system responds to and generates 802.3x pause frames on 10G and 40Gig stack units.

Syntax `flowcontrol rx {off | on} tx {off | on} pause-threshold value [monitor session-ID]`

Parameters

rx on	Enter the keywords <code>rx on</code> to process the received flow control frames on this port. This is the default value for the receive side.
rx off	Enter the keywords <code>rx off</code> to ignore the received flow control frames on this port.
tx on	Enter the keywords <code>tx on</code> to send control frames from this port to the connected device when a higher rate of traffic is received. This is the default value on the send side.
tx off	Enter the keywords <code>tx off</code> so that flow control frames are not sent from this port to the connected device when a higher rate of traffic is received.
pause-threshold	Enter the buffer threshold limit for generating PAUSE frames.
monitor	Enter the keyword <code>monitor</code> then the session-ID to enable mirror flow control frames on the interface. The range is from 0 to 65535.

Defaults

- `rx off`
- `tx off`

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.11(0.0)	Added support for monitor session.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The globally assigned 48-bit Multicast address 01-80-C2-00-00-01 is used to send and receive pause frames. To allow full-duplex flow control, stations implementing the pause operation instruct the MAC to enable the reception of frames with a destination address equal to this multicast address.

The pause:

- Starts when *either* the packet pointer or the buffer threshold is met (whichever is met first). When the discard threshold is met, packets are dropped.
- Ends when *both* the packet pointer and the buffer threshold fall below 50% of the threshold settings.

The *discard threshold* defines when the interface starts dropping the packet on the interface. This may be necessary when a connected device does not honor the flow control frame sent by the switch. The discard threshold should be larger than the *buffer threshold* so that the buffer holds at least hold at least three packets.

Important Points to Remember

- Do not enable `tx pause` when buffer carving is enabled. For information and assistance, consult Dell Networking TAC.
- Asymmetric flow control (`rx on tx off`, or `rx off tx on`) setting for the interface port less than 100 Mb/s speed is not permitted. The following error is returned:
`Can't configure Asymmetric flowcontrol when speed <1G, config ignored`
- The only configuration applicable to half duplex ports is `rx off tx off`. The following error is returned:
`Cannot configure Asymmetric flowcontrol when speed <1G, config ignored`
- You cannot configure half duplex when the flow control configuration is on (default is `rx on tx on`). The following error is returned: `Cannot configure half duplex when flowcontrol is on, config ignored`

 **NOTE: The flow control must be off (`rx off tx off`) before configuring the half duplex.**

Example (partial)

```
Dell(conf-if-tengig-0/1)#show config
!
interface TenGigabitEthernet 0/1
no ip address
switchport
no negotiation auto
flowcontrol monitor session 5 rx off tx on
no shutdown
...
```

Example (Values)

This Example shows how the Dell Networking OS negotiates the flow control values between two Dell Networking chassis connected back-to-back using 1G copper ports.

```
Configured
LocRxConf LocTxConf RemoteRxConf RemoteTxConf
off        off        off        off
           off        off        on
```

		on	off
		on	on
off	on	off	off
		off	on
		on	off
		on	on
on	off	off	off
		off	on
		on	off
		on	on
on	on	off	off
		off	on
		on	off
		on	on
LocNegRx	LocNegTx	RemNegRx	RemNegTx
off	off	off	off
off	off	off	off
off	off	off	off
off	off	off	off
off	off	off	off
off	off	off	off
off	off	off	off
off	on	on	off
off	off	off	off
off	off	off	off
on	off	off	on
on	on	on	on
on	on	on	on
off	off	off	off
off	off	off	off
on	on	on	on
on	on	on	on

Related Commands `show running-config` — displays the flow configuration parameters (non-default values only).

interface

Configure a physical interface on the switch.

Syntax `interface interface`

Parameters `interface` Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information You cannot delete a physical interface.

By default, physical interfaces are disabled (`shutdown`) and are in Layer 3 mode. To place an interface in mode, ensure that the interface's configuration does not contain an IP address and enter the `Port Channel Commands` command. By default, the interface is shut down when the `portmode hybrid` and `switchport` are enabled.

The tunnel interface operates as an ECMP (equal cost multipath) only when the next hop to the tunnel destination is over a physical interface. If you select any other interface as the next hop to the tunnel destination, the tunnel interface does not operate as an ECMP.

Example

```
Dell(conf)#interface tengig 0/1
Dell(conf-if-te-0/1)#exit#
```

Related Commands [interface port-channel](#) — configures a port channel.

[interface vlan](#) — configures a VLAN.

interface loopback

Configure a Loopback interface.

Syntax `interface loopback number`
To remove a loopback interface, use the `no interface loopback number` command.

Parameters *number* Enter a number as the interface number. The range is from 0 to 16383.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)#interface loopback 1655
Dell(conf-if-lo-1655)#
```

Related Commands [interface](#) — configures a physical interface.

[interface null](#) — configures a Null interface.

`interface port-channel` — configures a port channel.

`interface vlan` — configures a VLAN.

interface ManagementEthernet

Configure the Management port on the system.

Syntax `interface ManagementEthernet slot/port`

Parameters

<i>slot/port</i>	Enter the keyword <code>ManagementEthernet</code> , then the slot number (0) and port number zero (0).
-------------------------	--

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4.(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

Usage Information You cannot delete a Management port.

The Management port is enabled by default (`no shutdown`). To assign an IP address to the Management port, use the `ip address` command.

Example

```
Dell(conf)#interface managementethernet 0/0
Dell(conf-if-ma-0/0)#
```

interface null

Configure a Null interface on the switch.

Syntax `interface null number`

Parameters

<i>number</i>	Enter zero (0) as the Null interface number.
----------------------	--

Defaults Not configured; number = **0**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You cannot delete the Null interface. The only configuration command possible in a Null interface is `ip unreachable`s.

Example

```
Dell(conf)#interface null 0
Dell(conf-if-nu-0)#
```

Related Commands

- `interface` — configures a physical interface.
- `interface loopback` — configures a Loopback interface.
- `interface port-channel` — configures a port channel.
- `interface vlan` — configures a VLAN.
- `ip unreachable` — enables generation of internet control message protocol (ICMP) unreachable messages.

interface range

This command permits configuration of a range of interfaces to which subsequent commands are applied (bulk configuration). Using the interface range command, you can enter identical commands for a range of interface.

Syntax `interface range interface, interface,...`
To delete a description, enter `no description` command.

Parameters

interface, interface,... Enter the keyword interface range and one of the interfaces — slot/port, port-channel or VLAN number. Select the range of interfaces for bulk configuration. You can enter up to six comma separated ranges—spaces are not required between the commas. Comma-separated ranges can include VLANs, port-channels and physical interfaces.

Slot/Port information must contain a space before and after the dash. For example, `interface range tengigabitethernet 0/1 - 5` is valid; `interface range tengigabitethernet 0/1-5` is not valid.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For a VLAN, enter the keyword `vlan` followed by a number from 1 to 4094.

Defaults none

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

When creating an interface range, interfaces appear in the order they are entered; they are not sorted. The command verifies that interfaces are present (physical) or configured (logical). Important things to remember:

- Bulk configuration is created if at least one interface is valid.
- Non-existing interfaces are excluded from the bulk configuration with a warning message.
- The interface range prompt includes interface types with slot/port information for valid interfaces. The prompt allows for a maximum of 32 characters. If the bulk configuration exceeds 32 characters, it is represented by an ellipsis (...).
- When the interface range prompt has multiple port ranges, the smaller port range is excluded from the prompt.
- If overlapping port ranges are specified, the port range is extended to the smallest start port and the biggest end port.

Example-Bulk Configuration Warning Message

```
Dell(conf)#interface range tengig 0/1 - 2 , tengig 0/4 , tengig 0/7
, fa 0/0
% Warning: Non-existing ports (not configured) are ignored by
interface-range
```

Example-Interface Range prompt with Multiple Ports

```
Dell(conf)#interface range tengig 0/1 - 2 , tengig 0/3 - 5
Dell(conf-if-range-te-0/1-5) #
```

Example-Interface Range prompt Overlapping Port Ranges

```
Dell(conf)#interface range tengig 0/1 - 2 , tengig 0/1 - 5
Dell(conf-if-range-te-0/1-5) #
```

Only VLAN and port-channel interfaces created using the `interface vlan` and `vlan tagged` commands can be used in the `interface range` command.

Use the `show running-config` command to display the VLAN and port-channel interfaces. VLAN or port-channel interfaces that are not displayed in the `show running-config` command cannot be used with the bulk configuration feature of the `interface range` command. You cannot create virtual interfaces (VLAN, Port-channel) using the interface range command.

NOTE: If a range has VLAN, physical, and port-channel interfaces, only commands related to physical interfaces can be bulk configured. To configure commands specific to VLAN or port-channel, only those respective interfaces should be configured in a particular range.

Example-Single Range Bulk Configuration

```
Dell(conf)# interface range tengigabitethernet 0/1 - 5
Dell(conf-if-range-te-0/1-5) # no shutdown
Dell(conf-if-range-te-0/1-5) #
```

Example-Multiple Range Bulk Configuration with VLAN and port channel

The following example shows how to use commas to add VLAN and port-channel interfaces to the range.

```
Dell(conf-if)# interface range tengigabitethernet 0/1 - 5, vlan 2 - 10, port-
channel 1 - 25
Dell(conf-if-range-te-0/1-5,vl-2-10,po-1-25) # no shutdown
Dell(conf-if-range-te-0/1-5,vl-2-10,po-1-25) #
```

Related commands

[show config \(from INTERFACE RANGE mode\)](#) — Shows the bulk configuration interfaces.
[show interfaces status](#) — Displays a summary of interface information.

interface range macro (define)

Defines a macro for an interface range and then saves the macro in the running configuration.

Syntax `define interface range macro name interface , interface , ...`

Parameters

name Enter up to 16 characters for the macro name.

***interface*,
interface,...** Enter the keywords `interface range` and one of the interfaces — slot/port, port-channel, or VLAN number. Select the range of interfaces for bulk configuration. You can enter up to six comma-separated ranges. Spaces are not required between the commas. Comma-separated ranges can include VLANs, port-channels, and physical interfaces.

Slot/Port information must contain a space before and after the dash. For example, `interface range tengigabitethernet 0/1 - 5` is valid; `interface range tengigabitethernet 0/1-5` is NOT valid.

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Single Range)

This example shows how to define an interface range macro named `test`. Execute the `show running-config` command to display the macro definition.

```
Dell(config)# define interface-range test tengigabitethernet0/0-3,  
tengigabitethernet 5/0-7  
  
Dell# show running-config | grep define  
define interface-range test tengigabitethernet0/0-3, tengigabitethernet5/0-7,  
Dell(config)#interface range macro test  
Dell(config-if-range-te-0/0-3,te-5/0-7) #
```

Related Commands [interface range](#) – configures a range of command (bulk configuration)

[interface range macro name](#) – runs an interface range macro.

interface range macro name

Run the interface-range macro to automatically configure the pre-defined range of interfaces.

Syntax	<code>interface range macro <i>name</i></code>	
Parameters	<i>name</i>	Enter the name of an existing macro.
Defaults	none	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Single Range) This example shows the macro named *test* that was defined earlier.

```
Dell(config)#interface range macro test
Dell(config-if-range-te-0/0-3,te-5/0-8) #
```

Related Commands [interface range](#) — configures a range of command (bulk configuration).
[interface range macro \(define\)](#) — defines a macro for an interface range (bulk configuration).

interface vlan

Configure a VLAN. Configure the default VLAN to enable Static or DHCP IP configuration. You can configure up to 4094 VLANs.

Syntax	<code>interface vlan <i>vlan-id</i></code> To delete a VLAN, use the <code>no interface vlan <i>vlan-id</i></code> command.	
Parameters	<i>vlan-id</i>	Enter 1 for the default VLAN. Enter a number as the VLAN identifier. The range is from 1 to 4096.
Defaults	Not configured, except for the default VLAN, which is configured as VLAN 1.	
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information For more information about VLANs and the commands to configure them, refer to [Virtual LAN \(VLAN\) Commands](#).

FTP, TFTP, and SNMP operations are not supported on a VLAN. MAC/IP ACLs are not supported.

Examples

```
Dell (conf) #int vlan 1
Dell (conf-if-vl-1) #
```

```
Dell (conf) #int vlan 3
Dell (conf-if-vl-3) #
```

Related commands [show vlan](#) — Displays the current VLAN configuration on the switch.

[vlan tagged](#) — Adds a Layer 2 interface to a VLAN as a tagged interface.

[vlan untagged](#) — Adds a Layer 2 interface to a VLAN as an untagged interface.

intf-type cr4 autoneg

Set the interface type as CR4 with auto-negotiation enabled.

Syntax

```
intf-type cr4 autoneg
```

If you configure `intf-type cr4 autoneg`, use the `no intf-type cr4 autoneg` command to set the interface type as cr4 with autonegotiation disabled.

Defaults

Not configured

Command Modes

CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

If you configure `interface type` as CR4 with auto-negotiation enabled, also configure CR4 with auto-negotiation. Many DAC cable link issues are resolved by setting the interface type as CR4.

Related Commands

[interface](#) — configures a physical interface.

[interface port-channel](#) — configures a port channel group.

keepalive

Send keepalive packets periodically to keep an interface alive when it is not transmitting data.

Syntax `keepalive [seconds]`
To stop sending keepalive packets, use the `no keepalive` command.

Parameters

seconds	(OPTIONAL) For interfaces with PPP encapsulation enabled, enter the number of seconds between keepalive packets. The range is from 0 to 23767. The default is 10 seconds .
----------------	---

Defaults Enabled.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you configure `keepalive`, the system sends a self-addressed packet out of the configured interface to verify that the far end of a WAN link is up. When you configure `no keepalive`, the system does not send keepalive packets and so the local end of a WAN link remains up even if the remote end is down.

load-balance

By default, Dell Networking OS uses an IP 4-tuple (IP SA, IP DA, Source Port, and Destination Port) to distribute IP traffic over members of a Port Channel as well as equal-cost paths. To designate another method to balance traffic over Port Channel members, use the `load-balance` command.

Syntax `load-balance {ip-selection [dest-ip | source-ip]} | {mac [dest-mac | source-dest-mac | source-mac]} | {tcp-udp | ingress-port [enable]}`
To return to the default setting (IP 4-tuple), use the `no load-balance {ip-selection [dest-ip | source-ip]} | {mac [dest-mac | source-dest-mac | source-mac]} | {tcp-udp | ingress-port [enable]}` command.

Parameters

ip-selection {dest-ip source-ip}	Enter the keywords to distribute IP traffic based on the following criteria: ① NOTE: The hashing mechanism returns a 3-bit index indicating which port the packet should be forwarded. <code>dest-ip</code> — Uses destination IP address and destination port fields to hash. <code>source-ip</code> — Uses source IP address and source port fields to hash.
---	--

mac {dest-mac source-dest-mac source-mac}	<p>Enter the keywords to distribute MAC traffic based on the following criteria:</p> <p><i>dest-mac</i> — Uses the destination MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash.</p> <p><i>source-dest-mac</i> — Uses the destination and source MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash.</p> <p><i>source-mac</i> — Uses the source MAC address, VLAN, Ethertype, source module ID and source port ID fields to hash.</p>
tcp-udp enable	<p>Enter the keywords to distribute traffic based on the following:</p> <p><i>enable</i> — Takes the TCP/UDP source and destination ports into consideration when doing hash computations. This option is enabled by default.</p> <p><i>ingress-port enable</i>—Enter the keywords to distribute traffic based on the following: <i>enable</i> — Takes the source port into consideration when doing hash computations. This option is disabled by default.</p>

Defaults IP 4-tuple (IP SA, IP DA, Source Port, Destination Port)

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, Dell Networking OS distributes incoming traffic based on a hash algorithm using the following criteria:

- IP source address
- IP destination address
- TCP/UDP source port
- TCP/UDP destination port

load-balance hg

Choose the traffic flow parameters the hash calculation uses while distributing the traffic across internal higit links.

Syntax `[no] load-balance hg { ip-selection | ipv6-selection [source-ip | source-ipv6 | source-port-id | source-module-id | dest-ip | dest-ipv6 | dest-port-id | dest-module-id | protocol | vlan | L4-source-port | L4-dest-port] | mac [source-mac | source-port-id | source-module-id | dest-mac | dest-port-id | dest-module-id | vlan | ethertype | source-dest-mac] | tunnel [ipv4-over-ipv4 | ipv4-over-gre-ipv4 | mac-in-mac]}`

Parameters

ip-selection | ipv6-selection [source-ip | source-ipv6 | source-port-id | source-module-id | dest-ip | dest-ipv6 | dest-port-id | dest-module-id | protocol | vlan | L4-source-port | L4-dest-port] | mac [source-mac | source-port-id | source-module-id | dest-mac | dest-port-id | dest-module-id | vlan | ethertype | source-dest-mac] | tunnel [ipv4-over-ipv4 | ipv4-over-gre-ipv4 | mac-in-mac]}

To use IPv4 key fields in hash computation, enter the keyword *ip-selection* then one of the parameters. To use IPv6 key fields in hash computation, enter the keyword *ipv6-selection* then one of the parameters.

- *source-ip* — Use IPv4 *src-ip* field in hash calculation.

source-module-id | dest-ip | dest-ipv6 | dest-port-id | dest-module-id | protocol | vlan | L4-source-port | L4-dest-port]

- source-ipv6 — Use IPv6 src-ip field in hash calculation
- source-port-id — Use src-port-id field in hash calculation.
- source-module-id — Use src-module-id field in hash calculation.
- dest-ip — Use IPv4 dest-ip field in hash calculation
- dest-ipv6 — Use IPv6 dest-ip field in hash calculation
- dest-port-id — Use dest-port-id field in hash calculation.
- dest-module-id — Use dest-module-id field in hash calculation.
- protocol — Use IPv4 protocol field in hash calculation.
- vlan — Use vlan field in hash calculation.
- L4-source-port — Use IPv4 L4-source-port field in hash calculation.
- L4-dest-port — Use IPv4 L4-dest-port field in hash calculation.

mac [source-mac | source-port-id | source-module-id | dest-mac | dest-port-id | dest-module-id | vlan | ethertype | source-dest-mac]

To use MAC key fields in hash computation, enter the keyword `mac` then one of the parameters:

- source-mac — Use source-mac field in hash calculation.
- source-port-id — Use src-port-id field in hash calculation.
- source-module-id — Use src-module-id field in hash calculation.
- dest-mac — Use dest-mac field in hash calculation.
- dest-port-id — Use dest-port-id field in hash calculation.
- dest-module-id — Use dest-module-id field in hash calculation.
- vlan — Use vlan field in hash calculation .
- ethertype — Use Ethertype field in hash calculation.
- source-dest-mac — Use SMAC and DMAC fields in hash calculation.

tunnel [ipv4-over-ipv4 | ipv4-over-gre-ipv4 | mac-in-mac]

To use tunnel key fields in hash computation, enter the keyword `tunnel` then one of the parameters:

- ipv4-over-ipv4 — Use ipv4-over-ipv4 field in hash calculation.
- ipv4-over-gre-ipv4 — Use ipv4-over-gre-ipv4 field in hash calculation.
- mac-in-mac — Use mac-in-mac field in hash calculation.

Defaults IP selection 5-tuples (source-ip dest-ip vlan protocol L4-source-port L4-dest-port).

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

monitor interface

Monitor counters on a single interface or all interfaces on a line card. The screen is refreshed every five seconds and the CLI prompt disappears.

Syntax `monitor interface [interface]`

To disable monitoring and return to the CLI prompt, press the `q` key.

Parameters

- interface** (OPTIONAL) Enter the following keywords and slot/port or number information:
- For the management port, enter the keyword `managementethernet` then the slot (0 or 1) and the port (0).
 - For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

In the Example, the delta column displays changes since the last screen refresh. The following are the `monitor` command menu options.

Key	Description
<code>systest-3</code>	Displays the host name assigned to the system.
<code>monitor time</code>	Displays the amount of time since the <code>monitor interface</code> command was entered.
<code>time</code>	Displays the amount of time the chassis is up (since last reboot).
<code>m</code>	Change the view from a single interface to all interfaces on the line card or visa-versa.
<code>c</code>	Refresh the view.
<code>b</code>	Change the counters displayed from Packets on the interface to Bytes.
<code>r</code>	Change the [delta] column from change in the number of packets/bytes in the last interval to rate per second.
<code>l</code>	Change the view to the next interface on the line card, or if in line card mode, the next line card in the chassis.
<code>a</code>	Change the view to the previous interface on the line card, or if in line card mode, the previous line card in the chassis.
<code>T</code>	Increase the screen refresh rate.
<code>t</code>	Decrease the screen refresh rate.
<code>q</code>	Return to the CLI prompt.

Example (Single Interface)

```
systest-3 Monitor time: 00:00:06 Refresh Intvl.: 2s Time: 03:26:26
Interface: Te 0/3, Enabled, Link is Up, Linespeed is 1000 Mbit
Traffic statistics:      Current      Rate      Delta
      Input bytes:      9069828    43 Bps    86
      Output bytes:     606915800  43 Bps    86
      Input packets:      54001      0 pps     1
```

```

Output packets:      9401589    0 pps    1
   64B packets:      67        0 pps    0
Over 64B packets:   49166    0 pps    1
Over 127B packets:  350      0 pps    0
Over 255B packets: 1351     0 pps    0
Over 511B packets:  286     0 pps    0
Over 1023B packets: 2781    0 pps    0
Error statistics:
  Input underruns:   0        0 pps    0
    Input giants:   0        0 pps    0
  Input throttles:  0        0 pps    0
    Input CRC:      0        0 pps    0
Input IP checksum:  0        0 pps    0
  Input overrun:    0        0 pps    0
Output underruns:  0        0 pps    0
Output throttles:  0        0 pps    0

m - Change mode          c - Clear screen
l - Page up              a - Page down
T - Increase refresh interval t - Decrease refresh interval
q - Quit

```

mtu

Set the link maximum transmission unit (MTU) (frame size) for an Ethernet interface.

Syntax

```
mtu value
```

To return to the default MTU value, use the `no mtu` command.

Parameters

value

Enter a maximum frame size in bytes. The range is from 594 to 9252. The default is **1554**.

Defaults

1554

Command Modes

INTERFACE

Supported Modes

Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If the packet includes a Layer 2 header, the difference between the link MTU and IP MTU (`ip mtu` command) must be enough bytes to include the Layer 2 header.

- The IP MTU is adjusted automatically when you configure the Layer 2 MTU with the `mtu` command.

When you enter the `no mtu` command, The Dell Networking OS reduces the IP MTU value to 1536 bytes.

Link MTU and IP MTU considerations for port channels and VLANs are as follows.

port channels:

- All members must have the same link MTU value and the same IP MTU value.
- The port channel link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the channel members. For example, if the members have a link MTU of 2100 and an IP MTU 2000, the port channel's MTU values cannot be higher than 2100 for link MTU or 2000 bytes for IP MTU.

VLANs:

- All members of a VLAN must have same IP MTU value.
- Members can have different Link MTU values. Tagged members must have a link MTU 4 bytes higher than untagged members to account for the packet tag.
- The VLAN link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the VLAN members. For example, the VLAN contains tagged members with Link MTU of 1522 and IP MTU of 1500 and untagged members with Link MTU of 1518 and IP MTU of 1500. The VLAN's Link MTU cannot be higher than 1518 bytes and its IP MTU cannot be higher than 1500 bytes.

The following shows the difference between Link MTU and IP MTU.

Layer 2 Overhead	Link MTU and IP MTU Delta
Ethernet (untagged)	18 bytes
VLAN Tag	22 bytes
Untagged Packet with VLAN-Stack Header	22 bytes
Tagged Packet with VLAN-Stack Header	26 bytes

negotiation auto

Enable auto-negotiation on an interface.

Syntax `negotiation auto`
To disable auto-negotiation, enter `no negotiation auto` command.

Defaults Enabled.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information The `no negotiation auto` command is only available if you first manually set the speed of a port to **10Mbits** or **100Mbits**.

**Example
(Configured)**

```
Dell#show interfaces configured
TenGigabitEthernet 0/1 is up, line protocol is up
Hardware is DellEth, address is 00:1e:c9:de:04:9c
  Current address is 00:1e:c9:de:04:9c
Server Port AdminState is N/A
Pluggable media not present
Interface index is 33886978
Internet address is not set
Mode of IPv4 Address Assignment : NONE
DHCP Client-ID :001ec9de049c
MTU 12000 bytes, IP MTU 11982 bytes
LineSpeed 10000 Mbit
Flowcontrol rx on tx off
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 03:56:48
Queueing strategy: fifo
Input Statistics:
```

User Information

Both sides of the link must have auto-negotiation enabled or disabled for the link to come up.

The following details the possible speed and auto-negotiation combinations for a line between two 10/100/1000 Base-T Ethernet interfaces.

Port 0

- auto-negotiation enabled* speed 1000 or auto
- auto-negotiation enabled speed 100
- auto-negotiation disabled speed 100
- auto-negotiation disabled speed 100
- auto-negotiation enabled* speed 1000 or auto

Port 1

- auto-negotiation enabled* speed 1000 or auto
- auto-negotiation enabled speed 100
- auto-negotiation disabled speed 100
- auto-negotiation enabled speed 100
- auto-negotiation disabled speed 100

Link Status Between Port 1 and Port 2

- Up at 1000 Mb/s
- Up at 100 Mb/s
- Up at 100 Mb/s
- Down
- Down

* You cannot disable auto-negotiation when the speed is set to 1000 or auto.

Related Commands [speed \(for 1000/10000 interfaces\)](#) — sets the link speed to 10, 100, 1000 or auto-negotiate the speed.

portmode hybrid

To accept *both* tagged and untagged frames, set a physical port or port-channel. A port configured this way is identified as a hybrid port in report displays.

Syntax `portmode hybrid`
To return a port to accept *either* tagged or untagged frames (non-hybrid), use the `no portmode hybrid` command.

Defaults non-hybrid

Command Modes INTERFACE (conf-if-interface-slot/port)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `interface` command shown in the following example. This example sets a port as hybrid, makes the port a tagged member of VLAN 20, and an untagged member of VLAN 10, which becomes the native VLAN of the port. The port now accepts:

- untagged frames and classify them as VLAN 10 frames
- VLAN 20 tagged frames

The following describes the `do show interfaces` command shown in the following example. This example shows output with “Hybrid” as the newly added value for 802.1QTagged. The options for this field are:

- True — port is tagged
- False — port is untagged
- Hybrid — port accepts both tagged and untagged frames

The following describes the `interface vlan` command shown in the following example. This example shows unconfiguration of the hybrid port using the `no portmode hybrid` command.

NOTE: Remove all other configurations on the port before you can remove the hybrid configuration from the port.

Example

```
Dell(conf)#interface tengig 0/2
Dell(conf-if-te-0/2)#no shut
Dell(conf-if-te-0/2)#portmode hybrid
Dell(conf-if-te-0/2)#sw
Dell(conf-if-te-0/2)#int vlan 10
Dell(conf-if-vl-10)#tag tengig 0/2
Dell(conf-if-vl-10)#int vlan 20
Dell(conf-if-vl-20)#untag tengig 0/2
Dell(conf-if-vl-20)#
```

Example (tagged hybrid)

```
Dell(conf)#interface tengig 0/2
Dell(conf-if-te-0/2)#no shut
Dell(conf-if-te-0/2)#portmode hybrid
Dell(conf-if-te-0/2)#sw
```

```

Dell(conf-if-te-0/2)#int vlan 10
Dell(conf-if-vl-10)#int tengig 0/2
Dell(conf-if-vl-20)# untag tengig 0/2

Dell (conf-if-vl-20)#

Dell(conf)#do show interfaces switchport tengigabitethernet 3/2

Codes: U - Untagged, T - Tagged
       x - Dot1x untagged, X - Dot1x tagged
       G - GVRP tagged, M - Trunk, H - VSN tagged
       i - Internal untagged, I - Internal tagged, v - VLT untagged,
       V - VLT tagged

Name: TenGigabitEthernet 3/2

802.1QTagged: Hybrid
Vlan membership:
Q   Vlans
U   20
T   10

Native VlanId: 20.

Dell(conf)#

```

Example
(unconfigure the hybrid port)

```

Dell(conf-if-vl-20)#interface vlan 10
Dell(conf-if-vl-10)#no untagged tengig 0/2
Dell(conf-if-vl-10)#interface vlan 20
Dell(conf-if-vl-20)#no tagged tengig 0/2
Dell(conf-if-vl-20)#interface tengig 0/2
Dell(conf-if-te-0/2)#no portmode hybrid
Dell(conf-if-vl-20)#

```

Related Commands [show interfaces switchport](#) — displays the configuration of switchport (Layer 2) interfaces on the switch.

[vlan-stack trunk](#)— specifies an interface as a trunk port to the Stackable VLAN network.

rate-interval

Configure the traffic sampling interval on the selected interface.

Syntax `rate-interval seconds`

Parameters `seconds` Enter the number of seconds for which to collect traffic data. The range is from 5 to 299 seconds.

NOTE: For 0 to 5 seconds, polling occurs every 5 seconds. For 6 to 10 seconds, polling occurs every 10 seconds. For any other value, polling occurs every 15 seconds.

Defaults `299 seconds`

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The output of the `show interfaces` command displays the configured rate interval, along with the collected traffic data.

Related Commands [show interfaces](#) — displays information on physical and virtual interfaces.

rate-interval (Configuration Mode)

Configure the traffic sampling interval for all physical and logical port-channel interfaces globally. The support to configure rate-interval globally enables you to modify the default interval rate for all physical and logical interfaces at one time.

Syntax

`rate-interval seconds`

Use the `no rate-interval` command to remove the sampling interval configuration.

Parameters

seconds

Enter the number of seconds for which to collect traffic data. The range is from 5 to 299 seconds.



NOTE: Because polling occurs every 15 seconds, the number of seconds designated here round to the multiple of 15 seconds lower than the entered value. For example, if 44 seconds is designated, it rounds to 30; 45 to 59 seconds rounds to 45. If you configure this value to be less than 5, then the entire buffer is cleared; the `show int stats` command shows the rate information to be 0 as the polling interval is less than 5.

Defaults

299 seconds

Command Modes

CONFIGURATION

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version

Description

9.11.0.0

Introduced on all Dell Networking OS platforms.

Usage Information

The output of the `show interfaces` command displays the configured rate interval, along with the collected traffic data.

When rate-interval is not configured in the global configuration mode or interface mode, the default value of 299 seconds is applied.

When rate-interval is configured only in the global configuration mode and not in the interface mode, the global rate-interval value is applied at the interface level also.

When rate-interval is configured at the interface level and not in the global configuration mode, the interface level rate-interval value is applied for an interface.

When rate interval is configured in both global configuration mode as well as interface mode, then the rate-interval value configured at interface level is applied as it takes precedence over the global value.

remote-fault-signaling rx

Brings the interface up or down when a Remote Fault Indication (RFI) error is detected.

Syntax `remote-fault-signaling rx {on | off}`

Parameters

on	Brings the interface up when an RFI error is detected.
off	Brings the interface down when an RFI error is detected.

Defaults ON.

Command Modes INTERFACE CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL switch.

Usage Information By default, the switch processes the RFI errors transmitted by remote peers and brings down the interface when an RFI error is detected.

Example

```
Dell(conf-if-te-1/3)#remote-fault-signaling rx ?
on Enable
off Disable
```

show config

Display the interface configuration.

Syntax `show config`

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if)#show conf
!
interface TenGigabitEthernet 1/7
 no ip address
 switchport
```

```
no shutdown
Dell (conf-if) #
```

show config (from INTERFACE RANGE mode)

Display the bulk configured interfaces (group).

Syntax	<code>show config</code>	
Command Modes	CONFIGURATION INTERFACE (conf-if-range)	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

show interfaces

Displays information on a specific physical interface or virtual interface.

Syntax	<code>show interfaces <i>interface</i></code>	
Parameters	<i>interface</i>	Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none">• For the management interface on the stack-unit, enter the keyword <code>managementethernet</code> followed by slot/port information. The slot and port range is 0.• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.• For a VLAN interface, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.• For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number. The range is from 1 to 128.
Command Modes	<ul style="list-style-type: none">• EXEC• EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

Use this `show interfaces` command for details on a specific interface. Use the `show interfaces stack-unit` command for details on all interfaces on the designated stack unit.

On the I/O Aggregator, the `show interface` output displays incorrect rate information details over time for link monitoring when the `rate-interval` is configured for 5 seconds. Dell Networking recommends using higher rate-intervals such as 15 to 299 seconds to minimize the errors seen.

NOTE: In the CLI output, the power value will be rounded to a 3-digit value. For receive/transmit power that is less than 0.000, an `snmp query` will return the corresponding dbm value even though the CLI displays as 0.000.

NOTE: After the counters are cleared, the line-rate continues to increase until it reaches the maximum line rate. When the maximum line rate is reached, there will be no change in the line-rate.

User Information

The following describes the `show interfaces` command shown in the 10G example below.

Line	Description
TenGigabitEthernet 0/0...	Displays the interface's type, slot/port, and administrative and line protocol status.
Hardware is...	Displays the interface hardware information and its assigned MAC address.
Interface index...	Displays the interface index number used by SNMP to identify the interface.
Internet address...	States whether an IP address is assigned to the interface. If an IP address is assigned, that address is displayed.
MTU 1554...	Displays link and IP MTU information. If the chassis is in Jumbo mode, this number can range from 576 to 12000.
LineSpeed	Displays the interface's line speed.
ARP type:...	Displays the ARP type and the ARP timeout value for the interface.
Last clearing...	Displays the time when the <code>show interfaces</code> counters were cleared.
Queuing strategy...	States the packet queuing strategy. FIFO means first in first out.
Input Statistics:	Displays all the input statistics including: <ul style="list-style-type: none">• Number of packets and bytes into the interface• Number of packets with IP headers and VLAN tagged headers. <p>NOTE: The sum of the number of packets may not be as expected since a VLAN tagged IP packet counts as both a VLAN packet and an IP packet.</p> <ul style="list-style-type: none">• Packet size and the number of those packets inbound to the interface• Number of symbol errors, runts, giants, and throttles packets:<ul style="list-style-type: none">• symbol errors = number packets containing bad data. That is, the port MAC detected a physical coding error in the packet.• runts = number of packets that are less than 64B• giants = packets that are greater than the MTU size• throttles = packets containing PAUSE frames• Number of CRC, IP Checksum, overrun, and discarded packets:<ul style="list-style-type: none">• CRC = packets with CRC/FCS errors• IP Checksum = packets with IP Checksum errors• overrun = number of packets discarded due to FIFO overrun conditions

Line	Description
	<ul style="list-style-type: none"> · discarded = the sum of runts, giants, CRC, IP Checksum, and overrun packets discarded without any processing
Output Statistics:	Displays output statistics sent out of the interface including: <ul style="list-style-type: none"> · Number of packets, bytes, and underruns out of the interface <ul style="list-style-type: none"> · packets = total number of packets · bytes = total number of bytes · underruns = number of packets with FIFO underrun conditions · Number of Multicast, Broadcast, and Unicast packets: <ul style="list-style-type: none"> · Multicasts = number of MAC multicast packets · Broadcasts = number of MAC broadcast packets · Unicasts = number of MAC unicast packets · Number of throttles and discards packets:: <ul style="list-style-type: none"> · throttles = packets containing PAUSE frames · discarded = number of packets discarded without any processing
Rate information...	Estimate of the input and output traffic rate over a designated interval (30 to 299 seconds). Traffic rate is displayed in bits, packets per second, and percent of line rate.
Time since...	Elapsed time since the last interface status change (hh:mm:ss format).

Usage Information The interface counter "over 1023-byte pkts" does not increment for packets in the range $9216 > x < 1023$.

The Management port is enabled by default (`no shutdown`). If necessary, use the `ip address` command to assign an IP address to the Management port.

Example
(ManagementEthernet)

```
Dell#show interface managementethernet ?
0/0 Management Ethernet interface number
Dell#show interface managementethernet 0/0
ManagementEthernet 0/0 is up, line protocol is up
Hardware is DellForce10Eth, address is 00:1e:c9:f1:00:05
Current address is 00:1e:c9:f1:00:05
Pluggable media not present
Interface index is 235159752
Internet address is 10.11.209.87/16
Mode of IP Address Assignment : MANUAL
DHCP Client-ID: mgmt001ec9f10005
Virtual-IP is not set
Virtual-IP IPv6 address is not set
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed 100 Mbit, Mode full duplex
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 5d4h57m
Queueing strategy: fifo
Input 3448753 packets, 950008323 bytes, 3442163 multicast
Received 0 errors, 0 discarded
Output 4627 packets, 814226 bytes, 0 multicast
Output 0 errors, 0 invalid protocol
```

Related Commands [show interfaces configured](#) — Displays any interface with a non-default configuration.

[show interfaces port-channel](#) — Displays information on all interfaces on a specific stack unit.

[show interfaces switchport](#) — Displays Layer 2 information about the interfaces.

`show inventory` — Displays the I/O Aggregator type, components (including media), Dell Networking OS version including hardware identification numbers and configured protocols.

`show ip interface` — Displays Layer 3 information about the interfaces.

`show memory` — Displays the stack unit(s) status.

`show interfaces status` — Displays all interfaces configured using the interface range command.

show interfaces configured

Displays any interface with a non-default configuration.

Syntax `show interfaces configured`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example
(ManagementEthernet)

show interfaces dampening

Display interface dampening information.

Syntax `show interfaces dampening [[interface] [summary] [detail]]`

Parameters

interface (Optional) Enter one of the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

NOTE: This command also enables you to view information corresponding to a range of ports. However, for Open Networking (ON) platforms the notation for specifying port range in the command is different from how you specify in non-ON platforms.

- For non-ON platforms, you can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.
- For ON platforms, you can specify multiple ports as `slot/port/[subport] - slot/port/[subport]`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1/1 - 1/4/1`.

summary (OPTIONAL) Enter the keyword `summary` to display the current summary of dampening data, including the number of interfaces configured and the number of interfaces suppressed, if any.

detail (OPTIONAL) Enter the keyword `detail` to display detailed interface dampening data.

Defaults	none
Command Modes	EXEC
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show interfaces dampening
Interface Supp Flaps Penalty Half-Life Reuse Suppress Max-Sup
          State
Te 3/2    Up    0    0    20    800    4500    120
Te 3/8    Up    0    0    5     750    2500    20
Dell#
```

Related Commands [dampening](#) — configures dampening on an interface.

[show interfaces](#) — displays information on a specific physical interface or virtual interface.

[show interfaces configured](#) — displays any interface with a non-default configuration.

show interfaces description

Display the descriptions configured on the interface.

Syntax `show interfaces [interface] description`

Parameters *interface* Enter one of the following keywords and slot/port or number information:

- For the management interface on the stack unit enter the keyword `ManagementEthernet` followed by the slot/port information. The slot range is 0-0 and the port range is 0.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.
- For VLAN interfaces, enter the keyword `vlan` followed by a number from 1 to 4094.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following describes the `show interfaces description` command shown in the Example below.

Field	Description
Interface	Displays the type of interface and associated slot and port number.
OK?	Indicates if the hardware is functioning properly.
Status	States whether the interface is enabled (up) or disabled (administratively down).
Protocol	States whether IP is enabled (up) or disabled (down) on the interface.
Description	Displays the description (if any) manually configured for the interface.

Example

```
Dell#show interface description
Interface          OK Status      Protocol      Description
TenGigabitEthernet 0/1 NO  admin down   down
TenGigabitEthernet 0/2 NO  admin up     down
TenGigabitEthernet 0/3 NO  admin up     down
TenGigabitEthernet 0/4 NO  admin up     down
TenGigabitEthernet 0/5 NO  admin up     down
TenGigabitEthernet 0/6 NO  admin up     down
TenGigabitEthernet 0/7 NO  up down
TenGigabitEthernet 0/8 YES up up
```

show interfaces stack-unit

Display information on all interfaces on a specific Aggregator stack member.

Syntax `show interfaces stack-unit unit-number`

Parameters *unit-number* Enter the stack member number (0 to 5).

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show interfaces stack-unit 0
TenGigabitEthernet 0/1 is down, line protocol is down
Hardware is DellForce10Eth, address is 00:1e:c9:f1:00:05
Current address is 00:1e:c9:f1:00:05
Server Port AdminState is Down
Pluggable media not present
Interface index is 34148609
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :tenG130001ec9f10005
MTU 1554 bytes, IP MTU 1500 bytes
LineSpeed auto
Flowcontrol rx off tx off
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 5d5h24m
Queueing strategy: fifo
Input Statistics:
0 packets, 0 bytes
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts
0 runts, 0 giants, 0 throttles
0 CRC, 0 overrun, 0 discarded
Output Statistics:
0 packets, 0 bytes, 0 underruns
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts, 0 Unicasts
0 throttles, 0 discarded, 0 collisions
Rate info (interval 299 seconds):
Input 00.00 Mbits/sec, 0 packets/sec, 0.00% of line-rate
Output 00.00 Mbits/sec, 0 packets/sec, 0.00% of line-rate
Time since last interface status change: 5d5h23m
!-----output truncated -----!
```

Related Commands [show diag](#) — Displays data plane and management plane input/output statistics.

show interfaces status

Displays a summary of interface information or specify a stack unit and interface to display status information for that specific interface only.

Syntax `show interfaces [interface | stack-unit unit-number] status`

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

unit-number Enter the stack unit's ID number. The range is from 0 to 5.

NOTE: This command also enables you to view information corresponding to a range of ports.

- You can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#sh interfaces status
Port      Description  Status  Speed    Duplex  Vlan
Te 2/1    Down        Auto    Auto     --
Te 2/2    Down        Auto    Auto     --
Te 2/3    Down        Auto    Auto     --
Te 2/4    Down        Auto    Auto     --
Te 2/5    Down        Auto    Auto     --
Te 2/6    Down        Auto    Auto     --
Te 2/7    Down        Auto    Auto     --
Te 2/8    Down        Auto    Auto     --
Te 2/9    Up          10000  Mbit Full 1001
Te 2/10   Down        Auto    Auto     --
Te 2/11   Up          10000  Mbit Full 1001
Te 2/12   Down        Auto    Auto     --
Dell#
```

show interfaces switchport

Display only virtual and physical interfaces in Layer 2 mode. This command displays the Layer 2 mode interfaces' IEEE 802.1Q tag status and VLAN membership.

Syntax

```
show interfaces switchport [interface | stack-unit unit-id ]
```

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

- Enter the keyword `backup` to view the backup interface for this interface.

NOTE: This command also enables you to view information corresponding to a range of ports.

- For physical interfaces, you can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.
- For port-channel interfaces, you can specify multiple ports as `port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces port-channel 1 - 4`.

stack-unit *unit-id* (OPTIONAL) Enter the keywords `stack-unit` followed by the stack member number. The range is from 0 to 5.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following describes the `show interfaces switchport` command for the following example.

Items	Description
Name	Displays the interface's type, slot, and port number.
802.1QTagged	Displays whether if the VLAN tagged ("True"), untagged ("False"), or hybrid ("Hybrid"), which supports both untagged and tagged VLANs by port 13/0.
Vlan membership	Lists the VLANs to which the interface is a member. Starting with Dell Networking OS version 7.6.1, this field can display native VLAN membership by port 13/0.

Example

```
Dell#sh interfaces switchport

Codes:  U - Untagged, T - Tagged
        x - Dot1x untagged, X - Dot1x tagged
        G - GVRP tagged, M - Trunk, H - VSN tagged
        i - Internal untagged, I - Internal tagged, v - VLT untagged, V - VLT
tagged

Name: TenGigabitEthernet 2/9
802.1QTagged: True
Vlan membership:
Q      Vlans
T      1001

Name: TenGigabitEthernet 2/11
802.1QTagged: True
Vlan membership:
```

```
Q      Vlans
T      1001

Dell#
```

Related Commands `show ip interface` — displays Layer 3 information about the interfaces.

show interfaces transceiver

Display the physical status and operational status of an installed transceiver. The output also displays the transceiver’s serial number.

Syntax `show interfaces tengigabitethernet slot/port transceiver`

Parameters `tengigabitethernet` For a 10G interface, enter the keyword `tengigabitethernet` then the `slot/port` information.

NOTE: This command also enables you to view information corresponding to a range of ports. However, for Open Networking (ON) platforms the notation for specifying port range in the command is different from how you specify in non-ON platforms.

- For non-ON platforms, you can specify multiple ports as `slot/port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1 - 4`.
- For ON platforms, you can specify multiple ports as `slot/port/[subport] - slot/port/[subport]`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces interface-type 1/1/1 - 1/4/1`.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show interfaces transceiver` command shown in the following example.

Line	Description
Rx Power measurement type	Output depends on the vendor, typically either “Average” or “OMA” (Receiver optical modulation amplitude).
Temp High Alarm threshold	Factory-defined setting, typically in Centigrade. Value differs between SFPs and SFP+.
Voltage High Alarm threshold	Displays the interface index number used by SNMP to identify the interface.

Line	Description
Bias High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power High Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Voltage Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power Low Alarm threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Voltage High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
RX Power High Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temp Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Voltage Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Bias Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
TX Power Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Power Low Warning threshold	Factory-defined setting. Value can differ between SFP and SFP+.
Temperature	Current temperature of the SFPs. If this temperature crosses Temp High alarm/warning thresholds, the temperature high alarm/warning flag is set to true.
Voltage	Current voltage of the SFPs. If this voltage crosses voltage high alarm/warning thresholds, the voltage high alarm/warning flag is set to true.
Tx Bias Current	Present transmission (Tx) bias current of the SFP. If this crosses bias high alarm/warning thresholds, the TX bias high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, the TX bias low alarm/warning flag is set to true.

Line	Description
Tx Power	Present Tx power of the SFP. If this crosses Tx power alarm/warning thresholds, the Tx power high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, the Tx power low alarm/ warning flag is set to true.
Rx Power	Present receiving (Rx) power of the SFP. This value is either average Rx power or OMA. This depends on the Rx Power measurement type displayed above. If this crosses Rx power alarm/warning thresholds, the Rx power high alarm/warning flag is set to true. If it falls below the low alarm/warning thresholds, the Rx power low alarm/warning flag is set to true.
Data Ready state Bar	This field indicates that the transceiver has achieved power up and data is ready. This is set to true if data is ready to be sent and set to false if data is being transmitted.
Rx LOS state	This is the digital state of the Rx_LOS output pin. This is set to true if the operating status is down.
Tx Fault state	This is the digital state of the Tx Fault output pin.
Rate Select state	This is the digital state of the SFP rate_select input pin.
RS state	This is the reserved digital state of the pin AS(1) per SFF-8079 and RS(1) per SFF-8431.
Tx Disable state	If the admin status of the port is down then this flag is set to true.
Temperature High Alarm Flag	This can be either true or false, depending on the Current voltage value displayed above.
Voltage High Alarm Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Tx Bias High Alarm Flag	This can be either true or false, depending on the present Tx bias current value displayed above.
Tx Power High Alarm Flag	This can be either true or false, depending on the Current Tx bias power value displayed above.
Rx Power High Alarm Flag	This can be either true or false, depending on the Current Rx power value displayed above.
Temperature Low Alarm Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage Low Alarm Flag	This can be either true or false, depending on the Current voltage value displayed above.
Tx Bias Low Alarm Flag	This can be either true or false, depending on the Tx bias current value displayed above.
Tx Power Low Alarm Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power Low Alarm Flag	This can be either true or false, depending on the Current Rx power value displayed above.
Temperature High Warning Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage High Warning Flag	This can be either true or false, depending on the Current Voltage value displayed above.
Tx Bias High Warning Flag	This can be either true or false, depending on the Tx bias current value displayed above.

Line	Description
Tx Power High Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power High Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Temperature Low Warning Flag	This can be either true or false, depending on the Current Temperature value displayed above.
Voltage Low Warning Flag	This can be either true or false, depending on the Current Voltage value displayed above.
Tx Bias Low Warning Flag	This can be either true or false, depending on the present Tx bias current value displayed above.
Tx Power Low Warning Flag	This can be either true or false, depending on the Current Tx power value displayed above.
Rx Power Low Warning Flag	This can be either true or false, depending on the Current Rx power value displayed above.

Example

```
Dell#show interfaces tengigabitethernet 1/1 transceiver
SFP is present.

SFP 0 Serial Base ID fields
SFP 0 Id = 0x03
SFP 0 Ext Id = 0x04
SFP 0 Connector = 0x07
SFP 0 Transceiver Code = 0x00 0x00 0x00 0x01 0x20 0x40 0x0c 0x05
SFP 0 Encoding = 0x01
SFP 0 BR Nominal = 0x15
SFP 0 Length(9um) Km = 0x00
SFP 0 Length(9um) 100m = 0x00
SFP 0 Length(50um) 10m = 0x1e
SFP 0 Length(62.5um) 10m = 0x0f
SFP 0 Length(Copper) 10m = 0x00
SFP 0 Vendor Rev = A
SFP 0 Laser Wavelength = 850 nm
SFP 0 CheckCodeBase = 0x66
SFP 0 Serial Extended ID fields
SFP 0 Options = 0x00 0x12
SFP 0 BR max= 0
SFP 0 BR min= 0
SFP 0 Vendor SN= P5N1ACE
SFP 0 Datecode = 040528
SFP 0 CheckCodeExt = 0x5b

SFP 1 Diagnostic Information
=====
SFP 1 Rx Power measurement type = Average
=====
SFP 1 Temp High Alarm threshold = 95.000C
SFP 1 Voltage High Alarm threshold = 3.900V
SFP 1 Bias High Alarm threshold = 17.000mA
SFP 1 TX Power High Alarm threshold = 0.631mW
SFP 1 RX Power High Alarm threshold = 1.259mW
SFP 1 Temp Low Alarm threshold = -25.000C
SFP 1 Voltage Low Alarm threshold = 2.700V
SFP 1 Bias Low Alarm threshold = 1.000mA
SFP 1 TX Power Low Alarm threshold = 0.067mW
SFP 1 RX Power Low Alarm threshold = 0.010mW
=====
SFP 1 Temp High Warning threshold = 90.000C
SFP 1 Voltage High Warning threshold = 3.700V
SFP 1 Bias High Warning threshold = 14.000mA
```

```

SFP 1 TX Power High Warning threshold = 0.631mW
SFP 1 RX Power High Warning threshold = 0.794mW
SFP 1 Temp Low Warning threshold      = -20.000C
SFP 1 Voltage Low Warning threshold   = 2.900V
SFP 1 Bias Low Warning threshold      = 2.000mA
SFP 1 TX Power Low Warning threshold  = 0.079mW
SFP 1 RX Power Low Warning threshold  = 0.016mW
=====
SFP 1 Temperature                     = 39.930C
SFP 1 Voltage                         = 3.293V
SFP 1 Tx Bias Current                 = 6.894mA
SFP 1 Tx Power                        = 0.328mW
SFP 1 Rx Power                        = 0.000mW
=====
SFP 1 Data Ready state Bar            = False
SFP 1 Rx LOS state                    = True
SFP 1 Tx Fault state                  = False
SFP 1 Rate Select state               = False
SFP 1 RS state                        = False
SFP 1 Tx Disable state               = False
=====
SFP 1 Temperature High Alarm Flag     = False
SFP 1 Voltage High Alarm Flag         = False
SFP 1 Tx Bias High Alarm Flag         = False
SFP 1 Tx Power High Alarm Flag        = False
SFP 1 Rx Power High Alarm Flag        = False
SFP 1 Temperature Low Alarm Flag      = False
SFP 1 Voltage Low Alarm Flag          = False
SFP 1 Tx Bias Low Alarm Flag          = False
SFP 1 Tx Power Low Alarm Flag         = False
SFP 1 Rx Power Low Alarm Flag         = True
=====
!-----output truncated -----!

```

Related Commands [interface](#) — configures a physical interface on the switch.

[show ip interface](#) — displays Layer 3 information about the interfaces.

[show interfaces](#) — displays information on a specific physical interface or virtual interface.

[show inventory](#) — displays the switch type, components (including media), the Dell Networking OS version including hardware identification numbers, and configured protocols.

show range

Display all interfaces configured using the `interface range` command.

Syntax `show range`

Command Modes INTERFACE RANGE (config-if-range)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if-range-te-0/6)#show range
interface tengigabitethernet 0/6
Dell(conf-if-range-te-0/6)#
```

Related Commands

[interface](#) — configures a physical interface on the switch.

[show ip interface](#) — displays Layer 3 information about the interfaces.

[show interfaces](#) — displays information on a specific physical interface or virtual interface.

shutdown

Disable an interface.

Syntax

`shutdown`

To activate an interface, use the `no shutdown` command.

Defaults

The interface is disabled.

Command Modes

INTERFACE

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The `shutdown` command marks a physical interface as unavailable for traffic. To discover if an interface is disabled, use the `show ip interface` command. Disabled interfaces are listed as down.

Disabling a VLAN or a port channel causes different behavior. When a VLAN is disabled, the Layer 3 functions within that VLAN are disabled. Layer 2 traffic continues to flow. Entering the `shutdown` command on a port channel disables all traffic on the port channel and the individual interfaces within the port channel. To enable a port channel, you must enter `no shutdown` on the port channel interface and at least one interface within that port channel.

The `shutdown` and `description` commands are the only commands that you can configure on an interface that is a member of a port channel.

Related Commands

[vlan tagged](#) — Test the condition of copper cables on 100/1000/10G Base-T modules.

[interface vlan](#) — Creates a VLAN.

[show ip interface](#) — Displays the interface routing status. Add the keyword `brief` to display a table of interfaces and their status.

speed (for 1000/10000/auto interfaces)

Set the speed for 1000/10000 Base-T Ethernet interfaces. Set both sides of a link to the same speed (1000/10000) or to auto or the link may not come up.

Syntax `speed {1000 | 10000 | auto}`

To return to the default setting, use the `no speed {1000 | 10000 | auto}` command.

Parameters

1000	Enter the keyword <code>1000</code> to set the interface's speed to 1000 Mb/s.
10000	Enter the keyword <code>10000</code> to set the interface's speed to 10000 Mb/s. Auto-negotiation is enabled. For more information, refer to <code>negotiation auto</code> .
auto	Enter the keyword <code>auto</code> to set the interface to auto-negotiate its speed. Auto-negotiation is enabled. For more information, refer to <code>negotiation auto</code> .

Defaults **auto**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.10(0.0)	Added support for fanned-out 1 Gigabit SFP port.
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command is found on the 1000/10000 Base-T Ethernet interfaces.

When you enable `auto`, the system performs an automatic discovery to determine the optics installed and configure the appropriate speed.

When you configure a speed for the 1000/10000 interface, confirm the `negotiation auto` command setting. Both sides of the link must have auto-negotiation either enabled or disabled. For speed settings of 1000 or auto, the software sets the link to auto-negotiation and you cannot change that setting.

If you use an active optical cable (AOC), you can convert the QSFP+ port to a 10 Gigabit SFP+ port or 1 Gigabit SFP port. You can use the `speed` command to enable the required speed.

Related Commands

- [negotiation auto](#) — enables or disables auto-negotiation on an interface.

stack-unit portmode

Split a single 40G port into 4-10G ports on the switch.

Syntax `stack-unit stack-unit-number port number portmode quad`

Parameters

stack-unit Enter the stack member unit identifier of the stack member to reset. The range is 0 to 5.



NOTE: The switch commands accept Unit ID numbers from 0 to 5, though the switch supports stacking up to three units only with the Dell Networking OS version 8.3.7.1.

number Enter the port number of the 40G port to be split. Enter one of the following port numbers for the switch: 48, 52, 56, or 60.

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Splitting a 40G port into 4x10G port is supported on standalone and stacked units.

- You cannot use split ports as stack-link to stack a switch.
- The split ports switch unit cannot be a part of any stacked system.
- The unit number with the split ports must be the default (stack-unit 0).
- This set up can be verified using `show system brief` command. If the unit ID is different than 0, it must be renumbered to 0 before ports are split by using the `stackunit id renumber 0` command in EXEC mode.

The quad port must be in a default configuration before it can be split into 4x10G ports. The 40G port is lost in the config when the port is split, so be sure that the port is also removed from other L2/L3 feature configurations.

The system must be reloaded after issuing the CLI for the change to take effect.

wavelength

Set the wavelength for tunable 10-Gigabit SFP+ optics.

Syntax `wavelength`
To retain the existing wavelength, use the `no wavelength` command.

Defaults none

Command Modes INTERFACE

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.0)	Introduced on the S6000, S6000-ON, S5000, S4810, S4820T, S3048-ON, S4048-ON, M I/O Aggregator, FN I/O Module, MXL, C9010, S3100 series, and Z9100-ON.

Usage Information The wavelength can be configured only on a tunable 10-Gigabit SFP+ optic. The wavelength range is from 1528.3 nm to 1568.77nm.

If you configure the wavelength on a non-tunable optic, there is no change to the existing wavelength. The configured wavelength is saved in the running configuration and is applicable, when a tunable optic is used.

If you do not configure the wavelength on an inserted tunable optic, the existing wavelength is used.

Example The following example shows the wavelength set for a tunable 10-Gigabit SFP+ optic:

Related Commands

- `show config` — displays the interface configuration.

Port Channel Commands

A Link Aggregation Group (LAG) is a group of links that appear to a MAC client as if they were a single link according to IEEE 802.3ad. In Dell Networking OS, a LAG is referred to as a Port Channel.

- For the Aggregator, the maximum port channel ID is 128 and the maximum members per port channel is 4.

Because each port can be assigned to only one Port Channel, and each Port Channel must have at least one port, some of those nominally available Port Channels might have no function because they could have no members if there are not enough ports installed.

NOTE: For information about Dell Networking OS link aggregation control protocol (LACP) for dynamic LAGs, refer to the [Link Aggregation Control Protocol \(LACP\) chapter](#). For more information about configuring and using Port Channels, refer to the *Dell PowerEdge FN I/O Aggregator Configuration Guide*

channel-member

Add an interface to the Port Channel, while in INTERFACE PORTCHANNEL mode.

Syntax `channel-member interface`
To delete an interface from a Port Channel, use the `no channel-member interface` command.

Parameters `interface` (OPTIONAL) Enter the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults Not configured.

Command Modes INTERFACE PORTCHANNEL

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information Use the `interface port-channel` command to access this command.

You cannot add an interface to a Port Channel if the interface contains an IP address in its configuration.

Link MTU and IP MTU considerations for Port Channels are:

- All members must have the same link MTU value and the same IP MTU value.
- The Port Channel link MTU and IP MTU must be less than or equal to the link MTU and IP MTU values configured on the channel members. For example, if the members have a link MTU of 2100 and an IP MTU 2000, the Port Channel's MTU values cannot be higher than 2100 for link MTU or 2000 bytes for IP MTU.

When an interface is removed from a Port Channel with the `no channel-member` command, the interface reverts to its configuration prior to joining the Port Channel.

An interface can belong to only one Port Channel.

You can add up to 16 interfaces to a Port Channel on the switch. The interfaces can be located on different line cards but must be the same physical type and speed (for example, all 10-Gigabit Ethernet interfaces). However, you can combine 100/1000 interfaces and GE interfaces in the same Port Channel.

If the Port Channel contains a mix of interfaces with 100 Mb/s speed and 1000 Mb/s speed, the software disables those interfaces whose speed does not match the speed of the first interface configured and enabled in the Port Channel. If that first interface goes down, the Port Channel does not change its designated speed; disable and re-enable the Port Channel or change the order of the channel members configuration to change the designated speed. If the Port Channel contains a mix of interfaces with 100 Mb/s speed and 1000 Mb/s speed, the software disables those interfaces whose speed does not match the speed of the first interface configured and enabled in the Port Channel. If that first interface goes down, the Port Channel does not change its designated speed; disable and re-enable the Port Channel or change the order of the channel members configuration to change the designated speed. For more information about Port Channels, refer to the *Dell Networking OS Configuration Guide*.

Related Commands `interface port-channel` — creates a Port Channel interface.

group

Group two LAGs in a supergroup ("fate-sharing group" or "failover group").

Syntax `group group_number port-channel number port-channel number`
To remove an existing LAG supergroup, use the `no group group_number` command.

Parameters

group_number	Enter an integer from 1 to 32 that uniquely identifies this LAG fate-sharing group.
port-channel number	Enter the keywords <code>port-channel</code> then an existing LAG number. Enter this keyword/variable combination twice, identifying the two paired LAGs.

Defaults none

Command Modes PORT-CHANNEL FAILOVER-GROUP (conf-po-failover-grp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.

Example

```
Dell (conf) #port-channel failover-group
Dell (conf-po-failover-grp) #group 1 port-channel 1 port-channel 2
Dell (conf-po-failover-grp) #
```

Related Commands

[port-channel failover-group](#) — accesses PORT-CHANNEL FAILOVER-GROUP mode to configure a LAG failover group.

[show interfaces port-channel](#) — displays information on configured Port Channel groups.

interface port-channel

Create a Port Channel interface, which is a link aggregation group (LAG) containing physical interfaces on the Aggregator.

Syntax

```
interface port-channel channel-number
```

To delete a Port Channel, use the `no interface port-channel channel-number` command.

Parameters

channel-number For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.

Defaults

Not configured.

Command Modes

CONFIGURATION

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Port Channel interfaces are logical interfaces and can be either in Layer 2 mode (by using the `switchport` command) or Layer 3 mode (by configuring an IP address). You can add a Port Channel in Layer 2 mode to a VLAN.

A Port Channel can contain both 100/1000 interfaces and GE interfaces. Based on the first interface configured in the Port Channel and enabled, the Dell Networking OS determines if the Port Channel uses 100 Mb/s or 1000 Mb/s as the common speed. For more information, refer to .

If the line card is in a Jumbo mode chassis, you can also configure the `mtu` and `ip mtu` commands. The Link MTU and IP MTU values configured on the channel members must be greater than the Link MTU and IP MTU values configured on the Port Channel interface.

NOTE: In a Jumbo-enabled system, you must configure all members of a Port Channel with the same link MTU values and the same IP MTU values.

Example

```
Dell(conf)#int port-channel 2
Dell(conf-if-po-2)#
```

Related Commands `interface` — configures a physical interface.

`interface vlan` — configures a VLAN.

minimum-links

Configure the minimum number of links in a LAG (Port Channel) that must be in “oper up” status for the LAG to be also in “oper up” status.

Syntax `minimum-links number`

Parameters `number` Enter the number of links in a LAG that must be in “oper up” status. The range is from 1 to 16. The default is **1**.

Defaults **1**

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you use this command to configure the minimum number of links in a LAG that must be in “oper up” status, the LAG must have at least that number of “oper up” links before it can be declared as up. For example, if the required minimum is four, and only three are up, the LAG is considered down.

port-channel failover-group

To configure a LAG failover group, access PORT-CHANNEL FAILOVER-GROUP mode.

Syntax `port-channel failover-group`

To remove all LAG failover groups, use the `no port-channel failover-group` command.

Defaults	none
Command Modes	CONFIGURATION
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This feature groups two LAGs to work in tandem as a supergroup. For example, if one LAG goes down, the other LAG is taken down automatically, providing an alternate path to reroute traffic, avoiding oversubscription on the other LAG. You can use both static and dynamic (LACP) LAGs to configure failover groups. For more information, refer to the *Port Channel* chapter in the *Dell Networking OS Configuration Guide*.

Related Command `group` — groups two LAGs in a supergroup (“fate-sharing group”).
`show interfaces port-channel` — displays information on configured Port Channel groups.

show config

Display the current configuration of the selected LAG.

Syntax	<code>show config</code>
Command Modes	INTERFACE PORTCHANNEL
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if-po-1)#show config
!
interface Port-channel 1
  no ip address
  shutdown
Dell(conf-if-po-1)#
```

show interfaces port-channel

Display information on configured Port Channel groups.

Syntax	<code>show interfaces port-channel [channel-number] [brief description]</code>	
Parameters	channel-number	For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number. The range is from 1 to 128.

- brief** (OPTIONAL) Enter the keyword `brief` to display only the port channel number, the state of the port channel, and the number of interfaces in the port channel.
- description** (OPTIONAL) Enter the keyword `description` to display interface information with description.

NOTE: This command also enables you to view information corresponding to a range of ports.

- For port-channel interfaces, you can specify multiple ports as `port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces port-channel 1 - 4`.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.7(0.0)	Introduced on the M I/O Aggregator.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

The following describes the `show interfaces port-channel` command shown in the following example.

Field	Description
Port-Channel 1...	Displays the status of LAG. In the Example, the status of the LAG, LAG fate-sharing group ("Failover-group") is listed.
Hardware is...	Displays the interface's hardware information and its assigned MAC address.
Port-channel is part...	Indicates whether the LAG is part of a LAG fate-sharing group ("Failover-group").
Internet address...	States whether an IP address is assigned to the interface. If an IP address is assigned, that address is displayed.
MTU 1554...	Displays link and IP MTU.
LineSpeed	Displays the interface's line speed. For a port channel interface, it is the line speed of the interfaces in the port channel.
Members in this...	Displays the interfaces belonging to this port channel.
ARP type:...	Displays the ARP type and the ARP timeout value for the interface.
Last clearing...	Displays the time when the <code>show interfaces</code> counters were cleared.
Queueing strategy.	States the packet queuing strategy. FIFO means first in first out.
packets input...	Displays the number of packets and bytes into the interface.
Input 0 IP packets...	Displays the number of packets with IP headers, VLAN tagged headers, and MPLS headers. The number of packets may not add correctly because a VLAN tagged IP packet counts as both a VLAN packet and an IP packet.
0 64-byte...	Displays the size of packets and the number of those packets entering that interface. This information is displayed over two lines.

Field	Description
Received 0...	Displays the type and number of errors or other specific packets received. This information is displayed over three lines.
Output 0...	Displays the type and number of packets sent out the interface. This information is displayed over three lines.
Rate information...	Displays the traffic rate information into and out of the interface. Traffic rate is displayed in bits and packets per second.
Time since...	Displays the time since the last change in the configuration of this interface.

**Example
(EtherScale)**

```
Dell#show interfaces port-channel
Port-channel 1 is down, line protocol is down
Hardware address is 00:1e:c9:f1:00:05, Current address is 00:1e:c9:f1:00:05
Interface index is 1107755009
Minimum number of links to bring Port-channel up is 1
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :lag1001ec9f10005
MTU 12000 bytes, IP MTU 1500 bytes
LineSpeed auto
Members in this channel:
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 03:28:00
Queueing strategy: fifo
Input Statistics:
0 packets, 0 bytes
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts
0 runts, 0 giants, 0 throttles
0 CRC, 0 overrun, 0 discarded
Output Statistics:
0 packets, 0 bytes, 0 underruns
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts, 0 Unicasts
0 throttles, 0 discarded, 0 collisions
```

User Information

The following describes the `show interfaces port-channel brief` command shown in the following example.

Field	Description
LAG	Lists the port channel number.
Mode	Lists the mode: <ul style="list-style-type: none"> · L3 — for Layer 3 · L2 — for Layer 2
Status	Displays the status of the port channel. <ul style="list-style-type: none"> · down — if the port channel is disabled (shutdown) · up — if the port channel is enabled (no shutdown)
Uptime	Displays the age of the port channel in hours:minutes:seconds.
Ports	Lists the interfaces assigned to this port channel.
(untitled)	Displays the status of the physical interfaces (up or down).

Field	Description
	<ul style="list-style-type: none"> In Layer 2 port channels, an * (asterisk) indicates which interface is the primary port of the port channel. The primary port sends out interface PDU. In Layer 3 port channels, the primary port is not indicated.

Example

```
Dell#show int po bri
Codes: L - LACP Port-channel
       O - OpenFlow Controller Port-channel
       A - Auto Port-channel
       I - Internally Lagged
LAG Mode Status Uptime Ports
L    128 L3 down 00:00:00
Dell#
```

To indicate the LACP fallback, `Internally lagged` is added to the list. When the LAG auto-configures itself, the LAG status describes as 'I'.

Related Commands `show lacp` — displays the LACP matrix.

Time Domain Reflectometer (TDR) Commands

TDR is useful for troubleshooting an interface that is not establishing a link; either it is flapping or not coming up at all. TDR detects open or short conditions of copper cables on 100/1000/10G Base-T modules.

- `tdr-cable-test`
- `show tdr`

Important Points to Remember

- The interface and port must be enabled (configured—see the `interface` command) before running TDR. An error message is generated if you have not enabled the interface.
- The interface on the far-end device must be shut down before running TDR.
- Because TDR is an intrusive test on an interface that is not establishing a link, do not run TDR on an interface that is passing traffic.
- When testing between two devices, do not run the test on both ends of the cable.

tdr-cable-test

Test the condition of copper cables on 100/1000/10GBase-T modules.

Syntax `tdr-cable-test interface`

Parameters *interface* Enter the keyword `TenGigabitEthernet` followed by the slot/port information for the 100/1000/10GBase-T Ethernet interface.

Defaults none

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The interface must be enabled to run the test or an error message is generated:

Related Commands

`show tdr` — Displays the results of the TDR test.

show tdr

Displays the TDR test results.

Syntax

```
show tdr interface
```

Parameters

interface Enter the keyword `TenGigabitEthernet` followed by the slot/port information for the 100/1000/10 GbaseT Ethernet interface.

Defaults

none

Command Modes

EXEC

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

If the TDR test has not been run, an error message is generated:

```
%Error: Please run the TDR test first
```

The following describes the TDR test status.

Status

Definition

**OK Status:
Terminated**

TDR test is complete, no fault is detected on the cable, and the test is terminated.

**Length: 92 (+/- 1)
meters, Status:
Shorted**

A short is detected on the cable. The location, in this Example is 92 meters. The short is accurate to plus or minus one meter.

**Length: 93 (+/- 1)
meters, Status:
Open**

An opening is detected on the cable. The location, in this Example is 93 meters. The open is accurate to plus or minus one meter.

**Status: Impedance
Mismatch**

There is an impedance mismatch in the cables.

Example

Related Commands [tdr-cable-test](#) — Runs the TDR test.

Enhanced Validation of Interface Ranges

You can avoid specifying spaces between the range of interfaces, separated by commas, that you configure by using the `interface range` command. For example, if you enter a list of interface ranges, such as `interface range fo 2/0-1,te 10/0,fa 0/0`, this configuration is considered valid. The comma-separated list is not required to be separated by spaces in between the ranges. You can associate multicast MAC or hardware addresses to an interface range and VLANs by using the `mac-address-table static multicast-mac-address vlan vlan-id output-range interface` command.

UDP Broadcast

The user datagram protocol (UDP) broadcast feature is a software-based method to forward low throughput (not to exceed 200 pps) IP/UDP broadcast traffic arriving on a physical or VLAN interface.

Important Points to Remember

- Routing information protocol (RIP) is not supported with the UDP Broadcast feature.
- If you configure this feature on an interface using the `ip udp-helper udp-port` command, the `ip directed-broadcast` command becomes ineffective on that interface.
- The existing `show interface` command has been modified to display the configured broadcast address.

debug ip udp-helper

Enable UDP debug and display the debug information on a console.

Syntax `debug ip udp-helper`
To disable debug information, use the `no debug ip udp-helper` command.

Defaults Debug disabled.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#debug ip udp-helper
UDP helper debugging is on

01:20:22: Pkt rcvd on Te 4/1 with IP DA (0xffffffff) will be sent on Te 4/2 Te
4/3
Vlan 3
```

```
01:44:54: Pkt rcvd on Te 5/1 is handed over for DHCP processing.
```

- Related Commands**
- [ip udp-broadcast-address](#) — configures a UDP IP address for broadcast.
 - [ip udp-helper udp-port](#) — enables the UDP broadcast feature on an interface.
 - [show ip udp-helper](#) — displays the configured UDP helper(s) on all interfaces.

ip udp-broadcast-address

Configure an IP UDP address for broadcast.

Syntax `ip udp-broadcast-address address`
To delete the configuration, use the `no ip udp-broadcast-address address` command.

Parameters *address* Enter an IP broadcast address in dotted decimal format (A.B.C.D).

Defaults Not configured.

Command Modes INTERFACE (config-if)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Enter an IP broadcast address in dotted decimal format (A.B.C.D).

Usage Information When a UDP broadcast packet is flooded out of an interface, and the outgoing interface is configured using this command, the outgoing packet's IP destination address is replaced with the configured broadcast address.

- Related Commands**
- [debug ip udp-helper](#) — enables debug and displays the debug information on a console.
 - [show ip udp-helper](#) — displays the configured UDP helpers on all interfaces.

ip udp-helper udp-port

Enable the UDP broadcast feature on an interface either for all UDP ports or a specified list of UDP ports.

Syntax `ip udp-helper udp-port [udp-port-list]`
To disable the UDP broadcast on a port, use the `no ip udp-helper udp-port [udp-port-list]` command.

Parameters *udp-port-list* (OPTIONAL) Enter up to 16 comma-separated UDP port numbers.

NOTE: If you do not use this option, all UDP ports are considered by default.

Defaults none

Command Modes INTERFACE (config-if)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you configure the `ip helper-address` command and `ip udp-helper udp-port` command, the behavior is that the UDP broadcast traffic with port numbers 67/68 is unicast relayed to the DHCP server per the `ip helper-address` configuration. This occurs regardless if the `ip udp-helper udp-port` command contains port numbers 67/68 or not.

If you only configure the `ip udp-helper udp-port` command, all the UDP broadcast traffic is flooded, including ports 67/68 traffic if those ports are part of the `udp-port-list`.

Related Commands

[ip helper-address](#) — configures the destination broadcast or host address for the DHCP server.

[debug ip udp-helper](#) — enables debug and displays the debug information on a console.

[show ip udp-helper](#) — displays the configured UDP helpers on all interfaces.

show ip udp-helper

Display the configured UDP helpers on all interfaces.

Syntax `show ip udp-helper`

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip udp-helper
-----
Port      UDP  port  list
-----
Te 1/1    656, 658
Te 1/2    All
```

Related Commands

[debug ip udp-helper](#) — enables debug and displays the debug information on a console.

[ip udp-broadcast-address](#) — configures a UDP IP address for broadcast.

[ip udp-helper udp-port](#) — enables the UDP broadcast feature on an interface either for all UDP ports or a specified list of UDP ports.

Port Interface Commands

The following commands are for physical, loopback, and null interfaces:

- `clear counters`
- `clear mac-address-table dynamic`
- `interface range`
- `interface vlan`
- `keepalive`
- `name`
- `show config (INTERFACE mode)`
- `show config (from INTERFACE RANGE mode)`
- `show config (from INTERFACE VLAN mode)`
- `show interfaces configured`
- `show interfaces description`
- `show interfaces stack-unit`
- `show interfaces port-channel`
- `show interfaces status`
- `show interfaces switchport`
- `show vlan`
- `shutdown`
- `speed (for 1000/10000 interfaces)`

Virtual LAN (VLAN) Commands

The following commands configure and monitor virtual local area networks (VLANs). VLANs are a virtual interface and use many of the same commands as physical interfaces.

You can configure an IP address only on the default VLAN. FTP, TFTP, ACLs, and SNMP are not supported on a VLAN.

Occasionally, while sending broadcast traffic over multiple VLANs, state of a VLAN interface may continually switch between Master and Backup.

- `auto vlan`
- `default vlan-id`
- `name`
- `show config (from INTERFACE VLAN mode)`
- `show vlan`
- `vlan tagged`
- `vlan untagged`

auto vlan

Change the port to auto or admin vlan mode (enable or disable all auto VLANs).

Syntax

```
auto vlan
```

To remove membership from 4K VLAN, use the `no auto vlan` command.

Defaults	none	
Parameters	description	Enter a text string description to identify the VLAN (80 characters maximum).
Command Modes	INTERFACE	
Supported Modes	Standalone Mode	
Usage Information	The <code>auto vlan</code> command adds the port as untagged to default vlan and tagged to all other 4094 VLAN.	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

clear mac-address-table dynamic

Clear the MAC address table of all MAC addresses learned dynamically.

Syntax `clear mac-address-table dynamic {interface tengigabitethernet slot/port-id}`

Parameters

interface Enter the keyword `interface range` and one of the interfaces — slot/port, port-channel or VLAN number. Select the range of interfaces for bulk configuration. You can enter up to six comma separated ranges—spaces are not required between the commas. Comma-separated ranges can include VLANs, port-channels and physical interfaces. Slot/Port information must contain a space before and after the dash. For example, `interface range tengigabitethernet 0/1 - 5` is valid; `interface range tengigabitethernet 0/1-5` is not valid.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

default vlan-id

Set the default VLAN ID.

Syntax `default vlan-id <vlan-id>`
 To reset the default VLAN ID, use the `no default vlan-id` command.

Defaults none

Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.
Related commands	show vlan — Displays VLAN configuration.	

feature fc

Enables the Fibre channel communication via the NPG functionality.

Syntax	<code>feature fc</code>	
Command Modes	CONFIGURATION	
Default	Enabled	
Supported Modes	Programmable-Mux (PMUX)	
Command History	Version	Description
	9.6(0.0)	Supported on the FN 2210S Aggregator and M I/O Aggregator.

monitor interface

Monitor counters on a single interface or all interfaces on a stack unit. The screen is refreshed every five seconds and the CLI prompt disappears.

Syntax	<code>monitor interface [interface]</code>	
	To disable monitoring and return to the CLI prompt, press the <code>q</code> key.	

Parameters	interface	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For the management port, enter the keyword <code>managementethernet</code> followed by the slot (0) and the port (0). For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number. The range is from 1 to 128.
-------------------	------------------	--

Command Modes	<ul style="list-style-type: none"> EXEC EXEC Privilege
----------------------	--

Supported Modes	All Modes
------------------------	-----------

Command History

Version	Description
94(0.0)	Supported on the FN I/O Aggregator.

Usage Information

The delta column displays changes since the last screen refresh.

The following are the `monitor` command menu options.

Key	Description
<code>systemst-3</code>	Displays the host name assigned to the system.
<code>monitor time</code>	Displays the amount of time since the <code>monitor interface</code> command was entered.
<code>time</code>	Displays the amount of time the chassis is up (since last reboot).
<code>m</code>	Change the view from a single interface to all interfaces on the stack unit or visa-versa.
<code>c</code>	Refresh the view.
<code>b</code>	Change the counters displayed from Packets on the interface to Bytes.
<code>r</code>	Change the [delta] column from change in the number of packets/bytes in the last interval to rate per second.
<code>l</code>	Change the view to the next interface on the stack unit, or if in the stack unit mode, the next stack unit in the chassis.
<code>a</code>	Change the view to the previous interface on the stack unit, or if in line stack unit mode, the previous stack unit in the chassis.
<code>T</code>	Increase the screen refresh rate.
<code>t</code>	Decrease the screen refresh rate.
<code>q</code>	Return to the CLI prompt.

Example (Single Interface)

```
systemst-3 Monitor time: 00:00:06 Refresh Intvl.: 2s Time: 03:26:26
Interface: tengig 0/3, Enabled, Link is Up, Linespeed is 1000 Mbit

Traffic statistics:      Current      Rate      Delta
      Input bytes:      9069828    43 Bps    86
      Output bytes:     606915800  43 Bps    86
      Input packets:      54001     0 pps     1
      Output packets:     9401589   0 pps     1
      64B packets:         67        0 pps     0
      Over 64B packets:   49166     0 pps     1
      Over 127B packets:    350       0 pps     0
      Over 255B packets:   1351     0 pps     0
      Over 511B packets:    286      0 pps     0
      Over 1023B packets:  2781     0 pps     0
      Error statistics:
      Input underruns:      0         0 pps     0
      Input giants:        0         0 pps     0
      Input throttles:     0         0 pps     0
      Input CRC:           0         0 pps     0
      Input IP checksum:   0         0 pps     0
      Input overrun:       0         0 pps     0
      Output underruns:    0         0 pps     0
      Output throttles:    0         0 pps     0

      m - Change mode          c - Clear screen
      l - Page up              a - Page down
      T - Increase refresh interval  t - Decrease refresh interval
      q - Quit
```

Example (All Interfaces)

```
sysstest-3 Monitor time: 00:01:31 Refresh Intvl.: 2s Time: 03:54:14
Interface  Link    In Packets  [delta] Out Packets
[delta]
  Gi 0/0   Down          0         0           0           0
  Gi 0/1   Down          0         0           0           0
  Gi 0/2   Up           61512     52        66160        42
  Gi 0/3   Up           63086     20       9405888       24
  Gi 0/4   Up       14697471418  2661481  13392989657
2661385
  Gi 0/5   Up           3759      3       161959604    832816
  Gi 0/6   Up           4070      3        8680346      5
  Gi 0/7   Up           61934     34     138734357     72
  Gi 0/8   Up           61427      1        59960         1
  Gi 0/9   Up           62039     53     104239232     3
  Gi 0/10  Up       17740044091  372     7373849244    79
  Gi 0/11  Up       18182889225  44     7184747584   138
  Gi 0/12  Up       18182682056  0         3682         1
  Gi 0/13  Up       18182681434  43     6592378911  144
  Gi 0/14  Up           61349     55     86281941     15
  Gi 0/15  Up           59808     58        62060        27
  Gi 0/16  Up           59889      1        61616         1
  Gi 0/17  Up           0          0     14950126    81293
  Gi 0/18  Up           0          0           0           0
  Gi 0/19  Down         0          0           0           0
  Gi 0/20  Up           62734     54        62766        18
  Gi 0/21  Up           60198      9       200899         9
  Gi 0/22  Up       17304741100  3157554  10102508511
1114221
  Gi 0/23  Up       17304769659  3139507  7133354895
523329
  m - Change mode          c - Clear screen
  b - Display bytes        r - Display pkts/bytes per sec
  l - Page up              a - Page down
```

name

Assign a name to the Default VLAN.

Syntax `name vlan-name`

To remove the name from the VLAN, use the `no name` command.

Parameters `vlan-name` Enter up to 32 characters as the name of the VLAN.

Defaults Not configured.

Command Modes INTERFACE VLAN

Supported Modes All Modes

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This CLI applies only to the Default VLAN.

To display information about a named VLAN, enter the `show vlan` command with the name parameter or the `show interfaces description` command.

Related commands

- `default vlan-id` — Assigns a descriptive text string to the interface.
- `interface vlan` — Configures a VLAN.
- `show vlan` — Displays the current VLAN configurations on the switch.

show config (INTERFACE mode)

Displays the interface configuration.

Syntax	<code>show config</code>	
Command Modes	INTERFACE	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

show config (from INTERFACE VLAN mode)

Displays the current configuration of the Default VLAN.

Syntax	<code>show config</code>	
Command Modes	INTERFACE VLAN	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell(conf-if-vl-1)#show config
!
interface Vlan 1
description a
no ip address
mtu 2500
shutdown
Dell(conf-if-vl-1)#
```

show config (from PROTOCOL LLDP mode)

Displays the LLDP configuration.

Syntax `show config`

Command Modes PROTOCOL LLDP

Supported Modes All Modes

Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell(conf-lldp)#show conf
!
protocol lldp
Dell(conf-lldp)#
```

show vlan

Displays the current VLAN configurations on the switch.

Syntax `show vlan [brief | id vlan-id | name vlan-name]`

Parameters

brief	(OPTIONAL) Enter the keyword <code>brief</code> to display the following information: <ul style="list-style-type: none">• VLAN ID• VLAN name (left blank if none is configured.)• Spanning Tree Group ID• MAC address aging time• IP address
id <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>id</code> followed by a number from 1 to 4094. Only information on the VLAN specified is displayed
name <i>vlan-name</i>	(OPTIONAL) Enter the keyword <code>name</code> followed by the name configured for the VLAN. Only information on the VLAN named is displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The following describes the `show vlan` command information given in the following example

Column Heading Description

(Column 1 — no heading)

- asterisk symbol (*) = Default VLAN
- G = GVRP VLAN
- P = primary VLAN
- C = community VLAN
- I = isolated VLAN

NUM Displays existing VLAN IDs.

Status Displays the word Inactive for inactive VLANs and the word Active for active VLANs.

Q Displays G for GVRP tagged, M for member of a VLAN-Stack VLAN, T for tagged interface, U (for untagged interface), x (uncapitalized x) for Dot1x untagged, or X (capitalized X) for Dot1x tagged.

Ports

Example

```
Dell# show vlan id 40
Codes: * - Default VLAN, G - GVRP VLANs, R - Remote Port Mirroring
VLANs, P - Primary, C - Community, I - Isolated
Q: U - Untagged, T - Tagged
x - Dot1x untagged, X - Dot1x tagged
G - GVRP tagged, M - Vlan-stack, H - VSN tagged
i - Internal untagged, I - Internal tagged, v - VLT untagged, V
- VLT tagged
NUM Status Description Q Ports
1 Inactive a
Dell#
```

Example (Brief)

```
Dell#show vlan brief
VLAN Name                               STG MAC Aging   IP Address
-----
1                               0      0      unassigned
2                               0      0      unassigned
20                              0      0      unassigned
1002                            0      0      unassigned
Dell#
```

Example (Using a VLAN Name)

```
Dellconf)#interface vlan 222
Dell(conf-if-vl-222)#name test
Dell(conf-if-vl-222)#do show vlan name test
Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
x - Dot1x untagged, X - Dot1x tagged
G - GVRP tagged, M - Vlan-stack
NUM Status Description Q Ports
222 Inactive U TenGig 1/22
Dell(conf-if-vl-222)#
Dell#
```

Related Commands [interface vlan](#) — Configures a VLAN.

speed (for 1000/10000 interfaces)

Set the speed for 1000/10000 interfaces. Both sides of a link must be set to the same speed (1000/10000) or to auto or the link may not come up.

Syntax `speed {1000 | 10000 | auto}`

To return to the default setting, use the `no speed {1000 | 10000 | auto}` command.

Parameters

1000	Enter the keyword <code>1000</code> to set the interface's speed to 1000 Mb/s.
10000	Enter the keyword <code>10000</code> to set the interface's speed to 10000 Mb/s. Auto-negotiation is enabled.
auto	Enter the keyword <code>auto</code> to set the interface to auto-negotiate its speed. Auto-negotiation is enabled. For more information, refer to <code>name</code> .

Defaults

auto

Command Modes

INTERFACE

Supported Modes

All Modes

Command History

Version	Description
9.10(0.0)	Added support for fanned-out 1 Gigabit SFP port.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

This command is found on the 1000/10000 Base-T Ethernet interfaces.

When you enable `auto`, the system performs an automatic discovery to determine the optics installed and configure the appropriate speed.

When you configure a speed for the 1000/10000 interface, confirm the `negotiation auto` command setting. Both sides of the link must have auto-negotiation either enabled or disabled. For speed settings of 1000 or auto, the software sets the link to auto-negotiation and you cannot change that setting.

If you use an active optical cable (AOC), you can convert the QSFP+ port to a 10 Gigabit SFP+ port or 1 Gigabit SFP port. You can use the `speed` command to enable the required speed.

Related Commands

stack-unit port-group port mode ethernet

Converts the interfaces 9 and 10 from Fibre Channel mode to Ethernet.

Syntax `stack-unit unit number port-group 0 portmode ethernet`

To convert the interfaces 9 and 10 from Ethernet to Fibre Channel mode, use the `no stack-unit unit number port-group 0 portmode ethernet`.

Parameters	stack-unit	Enter the keyword <code>stack-unit</code> followed by a stack member number to select the stack unit. The range is 0 to 5.
	port-group	Enter the keyword <code>port-group</code> followed by 0.
	portmode ethernet	Enter the keyword <code>portmode ethernet</code> to convert the interfaces from Fibre Channel mode to Ethernet.
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.6(0.0)	Supported on the FN2210S Aggregator.

vlan tagged (CMC)

Add a Layer 2 interface to a VLAN as a tagged interface.

Syntax `vlan tagged [vlan-id]`
 To remove a tagged interface from a VLAN, use the `no vlan tagged vlan-id` command.

Parameters `vlan-id` Enter the VLAN ID. The range is from 1 to 4094.

Defaults **All interfaces in Layer 2 mode are untagged.**

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information If the interface belongs to several VLANs, you must remove it from all VLANs to change it to an untagged interface.

Tagged interfaces can belong to multiple VLANs, while untagged interfaces can only belong to one VLAN at a time.

When two or more ports configured for VLANs form a LAG, the resulting LAG is a tagged member of all the configured VLANs and an untagged member of the VLAN to which the port with the lowest port ID belongs.

For example, if port 0/1-32 is an untagged member of VLAN 2 and port 0/41 is an untagged member of VLAN 3, the resulting LAG consisting of the two ports is an untagged member of VLAN 2 and a tagged member of VLAN3.

Example

```
Dell(conf-if-te-0/2)#vlan tagged ?
VLAN-RANGE          Comma/Hyphen separated VLAN ID set
Dell(conf-if-te-0/2)#vlan tagged 2,3-4
Dell(conf-if-te-0/2)#show config
!
interface TenGigabitEthernet 0/2
mtu 12000
```

```

vlan tagged 2-4
!
port-channel-protocol LACP
port-channel 1 mode active
!
protocol lldp
advertise management-tlv system-name
dcbx port-role auto-downstream
no shutdown
Dell(conf-if-te-0/2)#

```

Related Commands [interface vlan](#) — Configures a VLAN.

[vlan untagged](#) — Specifies which interfaces in a VLAN are untagged.

vlan untagged (CMC)

Add a Layer 2 interface to a VLAN as an untagged interface.

Syntax `vlan untagged [vlan-id]`
 To remove a untagged interface from a VLAN, use the `no vlan untagged [vlan-id]` command.

Parameters `vlan-id` Enter the VLAN ID. The range is from 1 to 4094.

Defaults All interfaces in Layer 2 mode are untagged.

Command Modes INTERFACE

Supported Modes All Modes

Command History

Version	Description
94(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Untagged interfaces can only belong to one VLAN.

In the default VLAN, you cannot use the `no untagged interface` command. To remove an untagged interface from all VLANs, including the default VLAN, enter INTERFACE mode and use the `no vlan tagged` command.

Tagged interfaces can belong to multiple VLANs, while untagged interfaces can only belong to one VLAN at a time.

When two or more ports configured for VLANs form a LAG, the resulting LAG is a tagged member of all the configured VLANs and an untagged member of the VLAN to which the port with the lowest port ID belongs.

For example, if port 0/33 is an untagged member of VLAN 2 and port 0/41 is an untagged member of VLAN 3, the resulting LAG consisting of the two ports is an untagged member of VLAN 2 and a tagged member of VLANs 2 and 3.

Example

```

Dell(conf-if-te-0/2)#vlan untagged ?
<1-4094> Untagged VLAN id
Dell(conf-if-te-0/2)#
Dell(conf-if-te-0/2)#vlan untagged 4094
Dell(conf-if-te-0/2)#show config

```

```
!  
interface TenGigabitEthernet 0/2  
mtu 12000  
vlan untagged 4094  
!  
port-channel-protocol LACP  
port-channel 1 mode active  
!  
protocol lldp  
advertise management-tlv system-name  
dcbx port-role auto-downstream  
no shutdown  
Dell(conf-if-te-0/2)#
```

Related Commands [interface vlan](#) — Configures a VLAN.

[vlan tagged](#) — Specifies which interfaces in a VLAN are tagged.

IPv4 Routing

The aggregator supports both IPv4 and IPv6 routing and these are used only for the management purpose.

This chapter describes the IPv4 related commands. They are:

- `clear tcp statistics`
- `debug ip dhcp`
- `debug ip icmp`
- `show ip management-route`
- `show ip multicast-cam stack-unit`
- `show ip interface`
- `show ip route`
- `show tcp statistics`

Topics:

- `arp`
- `arp learn-enable`
- `arp retries`
- `arp timeout`
- `clear arp-cache`
- `clear host`
- `clear ip fib stack-unit`
- `clear ip route`
- `clear tcp statistics`
- `debug arp`
- `debug ip dhcp`
- `debug ip icmp`
- `debug ip packet`
- `ip address`
- `ip directed-broadcast`
- `ip domain-list`
- `ip domain-lookup`
- `ip domain-name`
- `ip helper-address`
- `ip helper-address hop-count disable`
- `ip host`
- `ip icmp source-interface`
- `ipv6 icmp source-interface`
- `ip max-frag-count`
- `ip name-server`
- `ip proxy-arp`

- ip route
- ip source-route
- ip tcp initial-time
- show ip tcp initial-time
- ip unreachable
- management route
- show arp
- show arp retries
- show hosts
- show ip cam stack-unit
- show ip fib stack-unit
- show ip interface
- show ip management-route
- show ip multicast-cam stack-unit
- show ip protocols
- show ip route
- show ip route list
- show ip route summary
- show ip traffic
- show tcp statistics

arp

To associate an IP address with a multicast MAC address in the switch when you configure multicast mode of the network load balancing (NLB), use the address resolution protocol (ARP).

Syntax `arp ip-address multicast-mac-address interface`
 To remove an ARP address, use the `no arp ip-address` command.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format.
<i>multicast-mac-address</i>	Enter a 48-bit hexadecimal address in MAC address in nn:nn:nn:nn:nn:nn format for the static MAC address to be used to switch multicast traffic..
<i>interface</i>	(OPTIONAL) Enter any of the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For the Management interface, enter the keyword <code>ManagementEthernet</code> then the slot/port information. The slot range is from 0 to 1 and the port range is 0. • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • The interface specified here must be one of the interfaces configured using the <code>{output-range output} interface</code> option with the <code>mac-address-table static</code> command.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Added the support for association of an IP address with multicast MAC address on the MXL platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

For multicast mode of NLB, to associate an IP address with a multicast MAC address in the switch, use address resolution protocol (ARP) by entering the `arp ip-address multicast-mac-address` command in Global configuration mode. This setting causes the multicast MAC address to be mapped to the cluster IP address for NLB mode of operation of the switch.

You cannot use Class D or Class E IP addresses or zero IP address (0.0.0.0) when creating a static ARP. Zero MAC addresses (00:00:00:00:00:00) are also invalid.

Although static ARP entries take precedence over dynamically-learned ARP entries, a static ARP entry that points to a wrong port is not included in the FIB or ARP entries.

Related Commands

`clear arp-cache` — clears dynamic ARP entries from the ARP table.

`show arp` — displays the ARP table.

arp learn-enable

Enable ARP learning using gratuitous ARP.

Syntax `arp learn-enable`

Defaults Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

arp retries

Set the number of ARP retries in case the system does not receive an ARP reply in response to an ARP request.

Syntax `arp retries number`

Parameters *number* Enter the number of retries. The range is from 5 to 20. The default is **5**.

Defaults **5**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Retries are 20 seconds apart.

Related Commands [show arp retries](#) — displays the configured number of ARP retries.

arp timeout

Set the time interval for an ARP entry to remain in the ARP cache.

Syntax `arp timeout minutes`

Parameters *minutes* Enter the number of minutes. The range is from 0 to 35790. The default is **240 minutes**.

Defaults **240 minutes** (4 hours)

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show interfaces](#) — displays the ARP timeout value for all available interfaces.

clear arp-cache

Clear the dynamic ARP entries from a specific interface or optionally delete (`no-refresh`) ARP entries from the content addressable memory (CAM).

Syntax `clear arp-cache [interface | ip ip-address] [no-refresh]`

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For the Management interface, enter the keyword <code>ManagementEthernet</code> then the slot/port information. The slot range is from 0 to 1 and the port range is 0.• For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.• For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
<i>ip ip-address</i>	(OPTIONAL) Enter the keyword <code>ip</code> then the IP address of the ARP entry you wish to clear.

no-refresh

(OPTIONAL) Enter the keywords `no-refresh` to delete the ARP entry from CAM. Or use this option with `interface` or `ip ip-address` to specify which dynamic ARP entries you want to delete.



NOTE: Transit traffic may not be forwarded during the period when deleted ARP entries are resolved again and re-installed in CAM. Use this option with extreme caution.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear host

Remove one or all dynamically learned host table entries.

Syntax `clear host name`

Parameters *name* Enter the name of the host to delete. Enter * to delete all host table entries.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip fib stack-unit

Clear all forwarding information base (FIB) entries in the specified stack unit (use this command with caution, refer to *Usage Information*.)

Syntax `clear ip fib stack-unit unit-number`

Parameters *unit-number* Enter the number of the stack unit. The range is from 0 to 5.

Command Modes EXEC

EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To clear Layer 3 CAM inconsistencies, use this command.

 **CAUTION: Executing this command causes traffic disruption.**

Related Commands [show ip fib stack-unit](#) — shows FIB entries.

clear ip route

Clear one or all routes in the routing table.

Syntax `clear ip route { * | ip-address mask }`

Parameters

- *** Enter an asterisk (*) to clear all learned IP routes.
- ip-address mask** Enter a specific IP address and mask in dotted decimal format to clear that IP address from the routing table.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip route](#) — assigns an IP route to the switch.

[show ip route](#) — views the routing table.

[show ip route summary](#) — views a summary of the routing table.

clear tcp statistics

Clear the TCP counters.

Syntax `clear tcp statistics`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
8.3.17.0	Supported on the M I/O Aggregator.

debug arp

View information on ARP transactions.

Syntax `debug arp [interface] [count value]`
 To stop debugging ARP transactions, use the `no debug arp` command.

Parameters

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For the Management interface, enter the keyword `ManagementEthernet` then the slot/port information. The slot range is from 0 to 1 and the port range is 0.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

count value (OPTIONAL) Enter the keyword `count` then the count value. The range is from 1 to 65534.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To stop packets from flooding the user terminal when debugging is turned on, use the `count` option.

debug ip dhcp

Enable debug information for DHCP relay transactions and display the information on the console.

Syntax `debug ip dhcp`

Parameters **debug ip dhcp** To disable debug, use the `no debug ip dhcp` command.

Defaults Debug disabled

Command Mode EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
FTOS#debug ip dhcp
00:12:21 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP
Request, hops = 0, XID = 0xbf05140f, secs = 0, hwaddr = 00:60:CF:20:7B:8C,
giaddr = 0.0.0.0
00:12:21 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:26 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP
Request, hops = 0, XID = 0xbf05140f, secs = 5, hwaddr = 00:60:CF:20:7B:8C,
giaddr = 0.0.0.0
00:12:26 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:40 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP
Request, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr = 00:60:CF:20:7B:8C,
giaddr = 0.0.0.0
00:12:40 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:42 : %RELAY-I-PACKET: BOOTP REPLY (Unicast) received at interface
14.4.4.1 BOOTP Reply,
hops = 0, XID = 0xda4f9503, secs = 0, hwaddr = 00:60:CF:20:7B:8C, giaddr =
113.3.3.17
00:12:42 : %RELAY-I-BOOTREPLY: Forwarded BOOTREPLY for 00:60:CF:20:7B:8C to
113.3.3.254
00:12:42 : %RELAY-I-PACKET: BOOTP REQUEST (Unicast) received at interface
113.3.3.17 BOOTP
Request, hops = 0, XID = 0xda4f9503, secs = 0, hwaddr = 00:60:CF:20:7B:8C,
giaddr = 0.0.0.0
00:12:42 : %RELAY-I-BOOTREQUEST: Forwarded BOOTREQUEST for 00:60:CF:20:7B:8C
to 14.4.4.2
00:12:42 : %RELAY-I-PACKET: BOOTP REPLY (Unicast) received at interface
14.4.4.1 BOOTP Reply,
hops = 0, XID = 0xda4f9503, secs = 0, hwaddr = 00:60:CF:20:7B:8C, giaddr =
113.3.3.17
00:12:42 : %RELAY-I-BOOTREPLY: Forwarded BOOTREPLY for 00:60:CF:20:7B:8C to
113.3.3.254
FTOS#
```

debug ip icmp

View information on the internal control message protocol (ICMP).

Syntax `debug ip icmp [interface] [count value]`
To disable debugging, use the `no debug ip icmp` command.

Parameters

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For the management interface, enter the keyword `ManagementEthernet` then the slot/port information. The slot range is 0 and the port range is 0.
- For a 10 Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

- For VLAN, enter the keyword `vlan` then by a number from 1 to 4094.

count value (OPTIONAL) Enter the keywords `count` then the count value. The ranges from 1 to 65534. The default is **Infinity**.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information To stop packets from flooding the user terminal when debugging is turned on, use the `count` option.

Example

```
ICMP: echo request rcvd from src 40.40.40.40
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: echo request sent to dst 40.40.40.40
ICMP: echo request rcvd from src 40.40.40.40
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: src 40.40.40.40, dst 40.40.40.40, echo reply
ICMP: echo request sent to dst 40.40.40.40:
```

debug ip packet

View a log of IP packets sent and received.

Syntax `debug ip packet [access-group name] [count value] [interface]`
 To disable debugging, use the `no debug ip packet [access-group name] [count value] [interface]` command.

Parameters

access-group name Enter the keywords `access-group` then the access list name (maximum 16 characters) to limit the debug output based on the defined rules in the ACL.

count value (OPTIONAL) Enter the keyword `count` then the count value. The range is from 1 to 65534. The default is **Infinity**.

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For the Management interface, enter the keyword `ManagementEthernet` then the slot/port information. The slot range is from 0 to 1 and the port range is 0.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `debug ip packet` command in the following example.

Field	Description
<code>s=</code>	Lists the source address of the packet and the name of the interface (in parentheses) that received the packet.
<code>d=</code>	Lists the destination address of the packet and the name of the interface (in parentheses) through which the packet is being sent out on the network.
<code>len</code>	Displays the packet's length.
<code>sending, rcvd, fragment, sending broad/multicast proto, unroutable</code>	The last part of each line lists the status of the packet.
<code>TCP src=</code>	Displays the source and destination ports, the sequence number, the acknowledgement number, and the window size of the packets in that TCP packets.
<code>UDP src=</code>	Displays the source and destination ports for the UDP packets.
<code>ICMP type=</code>	Displays the ICMP type and code.
<code>IP Fragment</code>	States that it is a fragment and displays the unique number identifying the fragment (Ident) and the offset (in 8-byte units) of this fragment (fragment offset) from the beginning of the original datagram.

Example

```
IP: s=10.1.2.62 (local), d=10.1.2.206 (Ma 0/0), len 54, sending
TCP src=23, dst=40869, seq=2112994894, ack=606901739, win=8191 ACK PUSH
IP: s=10.1.2.206 (Ma 0/0), d=10.1.2.62, len 40, rcvd
TCP src=0, dst=0, seq=0, ack=0, win=0
IP: s=10.1.2.62 (local), d=10.1.2.206 (Ma 0/0), len 226, sending
TCP src=23, dst=40869, seq=2112994896, ack=606901739, win=8192 ACK PUSH
IP: s=10.1.2.216 (Ma 0/0), d=10.1.2.255, len 78, rcvd
UDP src=0, dst=0
IP: s=10.1.2.62 (local), d=10.1.2.3 (Ma 0/0), len 1500, sending fragment
IP Fragment, Ident = 4741, fragment offset = 0
ICMP type=0, code=0
IP: s=10.1.2.62 (local), d=10.1.2.3 (Ma 0/0), len 1500, sending fragment
IP Fragment, Ident = 4741, fragment offset = 1480
IP: s=40.40.40.40 (local), d=224.0.0.5 (Te 1/8), len 64, sending broad/
multicast
proto=89
IP: s=40.40.40.40 (local), d=224.0.0.6 (Te 1/8), len 28, sending broad/
multicast
proto=2
IP: s=0.0.0.0, d=30.30.30.30, len 100, unroutable
ICMP type=8, code=0
IP: s=0.0.0.0, d=30.30.30.30, len 100, unroutable
ICMP type=8, code=0
```

Usage Information

To stop packets from flooding the user terminal when debugging is turned on, use the `count` option.

The `access-group` option supports only the equal to (`eq`) operator in TCP ACL rules. Port operators not equal to (`neq`), greater than (`gt`), less than (`lt`), or `range` are not supported in `access-group` option (refer to the

following example). ARP packets (`arp`) and Ether-type (`ether-type`) are also not supported in the `access-group` option. The entire rule is skipped to compose the filter.

The `access-group` option pertains to:

- IP protocol number: from 0 to 255
- Internet control message protocol (`icmp`) but not the ICMP message type (from 0 to 255)
- Any internet protocol (`ip`)
- Transmission Control Protocol (`tcp`) but not on the `rst`, `syn`, or `urg` bits
- User Datagram Protocol (`udp`)

In the case of ambiguous access control list rules, the `debug ip packet access-control` command is disabled. A message appears identifying the error (refer to the Example below).

Example (Error Messages)

```
Dell#debug ip packet access-group test
%Error: port operator GT not supported in access-list debug
%Error: port operator LT not supported in access-list debug
%Error: port operator RANGE not supported in access-list debug
%Error: port operator NEQ not supported in access-list debug

Dell#00:10:45: %RPM0-P:CP
%IPMGR-3-DEBUG_IP_PACKET_ACL_AMBIGUOUS_EXP: Ambiguous rules not
supported in access-list debug, access-list debugging is turned off
Dell#
```

ip address

Assign a primary and secondary IP address to the interface.

Syntax `ip address ip-address mask [secondary]`
To delete an IP address from an interface, use the `no ip address [ip-address]` command.

Parameters

<i>ip-address</i>	Enter an IP address in dotted decimal format.
<i>mask</i>	Enter the mask of the IP address in slash prefix format (for example, /24).
<i>secondary</i>	(OPTIONAL) Enter the keyword <code>secondary</code> to designate the IP address as the secondary address.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You must be in INTERFACE mode before you add an IP address to an interface. Assign an IP address to an interface prior to entering ROUTER OSPF mode.

ip directed-broadcast

Enables the interface to receive directed broadcast packets.

Syntax `ip directed-broadcast`
To disable the interface from receiving directed broadcast packets, use the `no ip directed-broadcast` command.

Defaults Disabled (that is, the interface does not receive directed broadcast packets)

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip domain-list

Configure names to complete unqualified host names.

Syntax `ip domain-list name`
To remove the name, use the `no ip domain-list name` command.

Parameters

<i>name</i>	Enter a domain name to be used to complete unqualified names (that is, incomplete domain names that cannot be resolved).
--------------------	--

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To configure a list of possible domain names, configure the `ip domain-list` command up to six times. If you configure both the `ip domain-name` and `ip domain-list` commands, the software tries to resolve the name using the `ip domain-name` command. If the name is not resolved, the software goes through the list of names configured with the `ip domain-list` command to find a match.

To enable dynamic resolution of hosts, use the following steps:

- specify a domain name server with the `ip name-server` command
- enable DNS with the `ip domain-lookup` command

To view current bindings, use the `show hosts` command. To view a DNS-related configuration, use the `show running-config resolve` command.

Related Commands `ip domain-name` — specifies a DNS server.

ip domain-lookup

To address resolution (that is, DNS), enable dynamic host-name.

Syntax `ip domain-lookup`
To disable DNS lookup, use the `no ip domain-lookup` command.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To fully enable DNS, also specify one or more domain name servers with the `ip name-server` command.

The Dell Networking OS does not support sending DNS queries over a VLAN. DNS queries are sent out all other interfaces, including the Management port.

To view current bindings, use the `show hosts` command.

Related Commands `ip name-server` — specifies a DNS server.

`show hosts` — Views the current bindings.

ip domain-name

Configure one domain name for the switch.

Syntax `ip domain-name name`
To remove the domain name, use the `no ip domain-name` command.

Parameters

<i>name</i>	Enter one domain name to be used to complete unqualified names (that is, incomplete domain names that cannot be resolved).
--------------------	--

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can only configure one domain name with the `ip domain-name` command. To configure more than one domain name, configure the `ip domain-list` command up to six times.

To enable dynamic resolution of hosts, use the following steps:

- specify a domain name server with the `ip name-server` command
- enable DNS with the `ip domain-lookup` command

To view current bindings, use the `show hosts` command.

Related Commands [ip domain-list](#) — configures additional names.

ip helper-address

Specify the address of a DHCP server so that DHCP broadcast messages can be forwarded when the DHCP server is not on the same subnet as the client.

Syntax

```
ip helper-address ip-address
```

To remove a DHCP server address, use the `no ip helper-address` command.

Parameters

ip-address Enter an IP address in dotted decimal format (A.B.C.D).

Defaults

Not configured.

Command Modes

INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can add multiple DHCP servers by entering the `ip helper-address` command multiple times. If multiple servers are defined, an incoming request is sent simultaneously to all configured servers and the reply is forwarded to the DHCP client.

The Dell Networking OS uses standard DHCP ports, that is UDP ports 67 (server) and 68 (client) for DHCP relay services. It listens on port 67 and if it receives a broadcast, the software converts it to unicast, and forwards to it to the DHCP-server with source port=68 and destination port=67.

The server replies with source port=67, destination port=67 and the system forwards to the client with source port=67, destination port=68.

ip helper-address hop-count disable

Disable the hop-count increment for the DHCP relay agent.

Syntax `ip helper-address hop-count disable`
To re-enable the hop-count increment, use the `no ip helper-address hop-count disable` command.

Defaults Enabled; the hops field in the DHCP message header is incremented by default.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command disables the incrementing of the hops field when boot requests are relayed to a DHCP server through the Dell Networking OS. If the incoming boot request already has a non-zero hops field, the message is relayed with the same value for hops. However, the message is discarded if the hops field exceeds 16, to comply with the relay agent behavior specified in RFC 1542.

Related Commands [ip helper-address](#) — specifies the destination broadcast or host address for DHCP server requests.
[show running-config](#) — displays the current configuration and changes from the default values.

ip host

Assign a name and IP address to be used by the host-to-IP address mapping table.

Syntax `ip host name ip-address`
To remove an IP host, use the `no ip host name [ip-address]` command.

Parameters

<i>name</i>	Enter a text string to associate with one IP address.
<i>ip-address</i>	Enter an IP address, in dotted decimal format, to be mapped to the name.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip icmp source-interface

Enable the ICMP error and unreachable messages to be sent with the source interface IP address, such as the loopback address, instead of the hops of the preceding devices along the network path to be used for easy debugging and diagnosis of network disconnections and reachability problems with IPv4 packets.

Syntax `ip icmp source-interface interface`

Parameters `interface` Enter one of the following keywords and slot/port or number information:

- For a Management Ethernet interface, enter the keyword `managementethernet`.



NOTE: When you configure the capability to enable the loopback IP address to be sent for easy debugging and diagnosis (IP addresses of the devices for which the ICMP source interface is configured), the source IP address of the outgoing ICMP error message is modified, although the packets are not sent out using the configured interface. Because the management interface is configured without any parameters such as the IP address, it is treated to the management interface of the primary unit or the existing unit.

- For a Loopback interface, enter the keyword `loopback`. The range is from 0 to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet`.
- For a VLAN interface, enter the keyword `vlan`. The range is from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information You can enable the mechanism to configure the source or the originating interface from which the packet (the device that generates the ICMP error messages) is received by the switch to send the loopback address instead of its source IP address to be used in the ICMP unreachable messages and in the `traceroute` command output. The loopback address must be unique in a particular domain.

In network environments that contain a large number of devices, ranging up to thousands of systems, and with each device configured for equal-cost multipath (ECMP) links, you cannot effectively and optimally use the `traceroute` and `ping` applications to examine the network reachability and identify any broken links for diagnostic purposes. In such cases, if the reply that is obtained from each hop on the network path contains the IP address of the adjacent, neighboring interface from which the packet is received, it is difficult to employ the `ping` and `traceroute` utilities. You can enable the ICMP unreachable messages to contain the loopback address of the source device instead of the previous hop's IP address to be able to easily and quickly identify the device and devices along the path because the DNS server maps the loopback IP address to the hostname and does not translate the IP address of every interface of the switch to the hostname.

Example

```
Dell(conf)#ip icmp source-interface tengigabitethernet 0/1
Dell(conf)#
```

ipv6 icmp source-interface

Enable the ICMP error and unreachable messages to be sent with the source interface IP address, such as the loopback address, instead of the hops of the preceding devices along the network path to be used for easy debugging and diagnosis of network disconnections and reachability problems with IPv6 packets.

Syntax `ipv6 icmp source-interface interface`

Parameters

interface

Enter one of the following keywords and slot/port or number information:

- For a Management Ethernet interface, enter the keyword `managementethernet`.



NOTE: When you configure the capability to enable the loopback IP address to be sent for easy debugging and diagnosis (IP addresses of the devices for which the ICMP source interface is configured), the source IP address of the outgoing ICMP error message is modified, although the packets are not sent out using the configured interface. Because the management interface is configurable only without any parameters such as the IP address, it is treated to the management interface of the primary unit or the existing unit.

- For a Loopback interface, enter the keyword `loopback`. The range is from 0 to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet`.
- For a VLAN interface, enter the keyword `vlan`. The range is from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL platform.

Usage Information

You can enable the mechanism to configure the source or the originating interface from which the packet (the device that generates the ICMP error messages) is received by the switch to send the loopback address instead of its source IP address to be used in the ICMP unreachable messages and in the `traceroute` command output. The loopback address must be unique in a particular domain.

In network environments that contain a large number of devices, ranging up to thousands of systems, and with each device configured for equal-cost multipath (ECMP) links, you cannot effectively and optimally use the `traceroute` and `ping` applications to examine the network reachability and identify any broken links for diagnostic purposes. In such cases, if the reply that is obtained from each hop on the network path contains the IP address of the adjacent, neighboring interface from which the packet is received, it is difficult to employ the `ping` and `traceroute` utilities. You can enable the ICMP unreachable messages to contain the loopback address of the source device instead of the previous hop's IP address to be able to easily and quickly identify the device and devices

along the path because the DNS server maps the loopback IP address to the hostname and does not translate the IP address of every interface of the switch to the hostname.

Example

```
Dell(conf)#ipv6 icmp source-interface tengigabitethernet 0/1
Dell(conf)#
```

ip max-frag-count

Set the maximum number of fragments allowed in one packet for packet re-assembly.

Syntax

```
ip max-frag-count count
```

To place no limit on the number of fragments allowed, use the `no ip max-frag-count` command.

Parameters

<i>count</i>	Enter a number for the number of fragments allowed for re-assembly. The range is from 2 to 256.
---------------------	---

Defaults

No limit is set on number of fragments allowed.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To avoid denial of service (DOS) attacks, keep the number of fragments allowed for re-assembly low.

ip name-server

Enter up to six IPv4 addresses of name servers. The order you enter the addresses determines the order of their use.

Syntax

```
ip name-server ipv4-address [ipv4-address2...ipv4-address6]
```

To remove a name server, use the `no ip name-server ip-address` command.

Parameters

<i>ipv4-address</i>	Enter the IPv4 address, in dotted decimal format, of the name server to be used.
<i>ipv4-address2... ipv4-address6</i>	(OPTIONAL) Enter up five more IPv4 addresses, in dotted decimal format, of name servers to be used. Separate the addresses with a space.

Defaults

No name servers are configured.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The system does not support sending DNS queries over a VLAN. DNS queries are sent out on all other interfaces, including the Management port.

ip proxy-arp

Enable proxy ARP on an interface.

Syntax `ip proxy-arp`
To disable proxy ARP, use the `no ip proxy-arp` command.

Defaults Enabled.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip interface](#) — displays the interface routing status and configuration.

ip route

Assign a static route to the switch.

Syntax `ip route destination mask {ip-address | interface [ip-address]} [distance]`
To delete a specific static route, use the `no ip route destination mask {address | interface [ip-address]}` command.

To delete all routes matching a certain route, use the `no ip route destination mask` command.

Parameters

<i>destination</i>	Enter the IP address in dotted decimal format of the destination device.
<i>mask</i>	Enter the mask in the slash prefix format (/x) of the destination device's IP address.
<i>ip-address</i>	Enter the IP address in dotted decimal format of the forwarding router.
<i>interface</i>	For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>distance</i>	(OPTIONAL) Enter a number as the distance metric assigned to the route. The range is from 1 to 255.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

Using the following example of a static route: `ip route 33.33.33.0 /24 tengigabitethernet 0/0 172.31.5.43`

- The software installs a next hop that is not on the directly connected subnet but which recursively resolves to a next hop on the interface's configured subnet. In the example, if gig 0/0 has an ip address on subnet 2.2.2.0 and if 172.31.5.43 recursively resolves to 2.2.2.0, Dell Networking OS installs the static route.
- When the interface goes down, Dell Networking OS withdraws the route.
- When the interface comes up, Dell Networking OS re-installs the route.
- When recursive resolution is "broken," Dell Networking OS withdraws the route.
- When recursive resolution is satisfied, Dell Networking OS re-installs the route.

Related Commands `show ip route` — views the switch routing table.

ip source-route

Enable the system to forward IP packets with source route information in the header.

Syntax `ip source-route`
To drop packets with source route information, use the `no ip route-source` command.

Defaults Enabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip tcp initial-time

Define the wait duration in seconds for the TCP connection to be established.

Syntax `ip tcp initial-time <8-75>`
To restore the default behavior, which causes the wait period to be set as eight seconds, use the `no ip tcp initial-time` command.

Parameters `<8-75>` Wait duration in seconds for the TCP connection to be established.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL platform.

Usage Information You can configure the amount of time for which the device must wait before it attempts to establish a TCP connection. Using this capability, you can limit the wait times for TCP connection requests. Upon responding to the initial SYN packet that requests a connection to the router for a specific service (such as SSH or BGP) with a SYN ACK, the router waits for a period of time for the ACK packet to be sent from the requesting host that will establish the TCP connection.

show ip tcp initial-time

Displays the interval that you configured for the device to wait before the TCP connection is attempted to be established.

Syntax `show ip tcp initial-time`

Command Modes EXEC
EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

ip unreachable

Enable the generation of internet control message protocol (ICMP) unreachable messages.

Syntax `ip unreachable`
To disable the generation of ICMP messages, use the `no ip unreachable` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

management route

Configure a static route that points to the Management interface or a forwarding router.

Syntax `management route {ipv4-address | ipv6-address}/mask{forwarding-router-address | managementethernet}`

Parameters

<code>{ipv4-address ipv6-address}/mask</code>	Enter an IPv4 address (A.B.C.D) or the IPv6 address followed by the prefix-length for the IP address of the management interface.
<code>forwarding-router-address</code>	Enter an IPv4 address of a forwarding router.
<code>managementethernet</code>	Enter the keyword <code>managementethernet</code> for the Management interface.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information When a static route (or a protocol route) overlaps with Management static route, the static route (or a protocol route) is preferred over the Management Static route. Also, Management static routes and the Management Connected prefix are not reflected in the hardware routing tables. Separate routing tables are maintained for IPv4 management routes. This command manages both tables.

show arp

Displays the ARP table.

Syntax `show arp [interface interface] [dynamic] [summary]`

Parameters

<code>interface interface</code>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For the Management interface, enter the keyword <code>managementethernet</code> followed by the slot/port information.For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<code>dynamic</code>	(OPTIONAL) Enter the keyword <code>dynamic</code> to view dynamic entries.
<code>summary</code>	(OPTIONAL) Enter the keyword <code>summary</code> to view a summary of ARP entries.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

The following describes the `show arp` command shown in the following example.

Row Heading	Description
Protocol	Displays the protocol type.
Address	Displays the IP address of the ARP entry.
Age(min)	Displays the age (in minutes) of the ARP entry.
Hardware Address	Displays the MAC address associated with the ARP entry.
Interface	Displays the first two letters of the interfaces type and the slot/port associated with the ARP entry.
VLAN	Displays the VLAN ID, if any, associated with the ARP entry.
CPU	Lists which CPU the entries are stored on.

Example

```
Dell#show arp
Protocol Address   Age(min) Hardware Address Interface VLAN CPU
-----
Internet 10.11.8.6      167 00:01:e9:45:00:03 Ma 0/0 - CP
Internet 10.11.68.14 124 00:01:e9:45:00:03 Ma 0/0 - CP
Internet 10.11.209.254 0 00:01:e9:45:00:03 Ma 0/0 - CP
```

Example (Private VLAN)

NOTE: In this example, Line 1 shows community VLAN 200 (in primary VLAN 10) in a PVLAN. Line 2 shows primary VLAN 10.

```
Dell#show arp
Protocol Address   Age(min) Hardware Address Interface VLAN CPU
-----
Internet 5.5.5.1      - 00:01:e8:43:96:5e - Vl 10 pv 200 CP
Internet 5.5.5.10 - 00:01:e8:44:99:55 - Vl 10 CP
Internet 10.1.2.4 1 00:01:e8:d5:9e:e2 Ma 0/0 - CP
Internet 10.10.10.4 1 00:01:e8:d5:9e:e2 Ma 0/0 - CP
Internet 10.16.127.53 1 00:01:e8:d5:9e:e2 Ma 0/0 - CP
Internet 10.16.134.254 20 00:01:e8:d5:9e:e2 Ma 0/0 - CP
Internet 133.33.33.4 1 00:01:e8:d5:9e:e2 Ma 0/0 - CP
```

Usage Information

The following describes the `show arp summary` command shown in the following example.

Row Heading	Description
Total Entries	Lists the total number of ARP entries in the ARP table.
Static Entries	Lists the total number of configured or static ARP entries.
Dynamic Entries	Lists the total number of learned or dynamic ARP entries.
CPU	Lists which CPU the entries are stored on.

Example (Summary)

```
Dell#show arp summary
TotalEntries Static Entries Dynamic Entries CPU
-----
3              0              3              CP
Dell#
```

show arp retries

Display the configured number of ARP retries.

Syntax `show arp retries`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on MXL 10/40GbE Switch IO Module

Related Commands `arp retries` — sets the number of ARP retries in case the system does not receive an ARP reply in response to an ARP request.

show hosts

View the host table and DNS configuration.

Syntax `show hosts`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show hosts` command in the following example.

Field	Description
Default domain...	Displays the domain name (if configured).
Name/address lookup...	States if DNS is enabled on the system. <ul style="list-style-type: none">· If DNS is enabled, the Name/Address lookup is domain service.· If DNS is not enabled, the Name/Address lookup is static mapping
Name servers are...	Lists the name servers, if configured.
Host	Displays the host name assigned to the IP address.
Flags	Classifies the entry as one of the following:

Field	Description
	<ul style="list-style-type: none"> perm — the entry was manually configured and will not time out temp — the entry was learned and will time out after 72 hours of inactivity. <p>Also included in the flag is an indication of the validity of the route:</p> <ul style="list-style-type: none"> ok — the entry is valid. ex — the entry expired. ?? — the entry is suspect.
TTL	Displays the amount of time until the entry ages out of the cache. For dynamically learned entries only.
Type	Displays IP as the type of entry.
Address	Displays the IP addresses assigned to the host.

Example

```
Dell#show hosts
Default domain is not set
Name/address lookup uses static mappings
Name servers are not set
Host      Flags      TTL  Type  Address
-----
ks        (perm, OK) -    IP    2.2.2.2
4200-1    (perm, OK) -    IP    192.68.69.2
1230-3    (perm, OK) -    IP    192.68.99.2
ZZr       (perm, OK) -    IP    192.71.18.2
Z10-3     (perm, OK) -    IP    192.71.23.1
Dell#
```

Related Commands [traceroute](#) — views the DNS resolution.

[ip host](#) — configures a host.

show ip cam stack-unit

Display CAM entries.

Syntax `show ip cam stack-unit {0-5} [port-set {pipe-number} | {ip-address mask [longer-prefixes]}| detail | member-info | summary]`

Parameters

0-5	Enter the stack-unit ID from 0 to 5
pipe-number	Enter the number of the Port-Pipe number. The range is from 0 to 0
ip-address mask [longer-prefixes]	(OPTIONAL) Enter the IP address and mask of a route to CAM entries for that route only. Enter the keywords <code>longer-prefixes</code> to view routes with a common prefix.
detail	Enter the keyword <code>detail</code> to display the group index ID used by the ecmp routes in the CAM.
member-info	Enter the keywords <code>member-info</code> to display the group index used by the ecmp, the number of egress ports (members) for the ecmp, and the port details of each member. The detail information under <code>member-info</code> gives the MAC address, VLAN ID, and gateway of every member port of the ecmp.

summary (OPTIONAL) Enter the keyword `summary` to view a table listing route prefixes and the total number routes which can be entered in to CAM.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip cam` command shown in the following example.

Field	Description
Destination	Displays the destination route of the index.
EC	Displays the number of equal cost multipaths (ECMP) available for the default route for non-Jumbo line cards. For Jumbo line cards, displays 0,1 when ECMP is more than eight.
CG	Displays 0.
V	Displays a 1 if the entry is valid and a 0 otherwise.
C	Displays the CPU bit. 1 indicates that a packet hitting this entry is forwarded to the CP or RP2, depending on Egress port.
V Id	Displays the VLAN ID. If the entry is 0, the entry is not part of a VLAN.
Mac Addr	Displays the next-hop router's MAC address.
Port	Displays the egress interface. Use the second half of the entry to determine the interface. For example, in the entry <code>17cl CP</code> , the <code>CP</code> is the pertinent portion. <ul style="list-style-type: none">· CP = control processor· Gi = Gigabit Ethernet interface· Te = 10-Gigabit Ethernet interface

Example

```
Dell#show ip cam stack-unit 0 port-set 0 10.10.10.10/32 longer-prefixes
Destination      EC CG V C VId  Mac-Addr          Port
-----
10.10.10.10      0 0 1 1 0    00:00:00:00:00:00  3f01 CP
Dell#
```

Usage Information

The following describes the `show ip cam ecmp-group` command shown in the following example.

Field	Description
Prefix Length	Displays the prefix-length or mask for the IP address configured on the linecard 0 port pipe 0.
Current Use	Displays the number of routes currently configured for the corresponding prefix or mask on the linecard 0 port pipe 0.

Field	Description
Initial Size	Displays the CAM size the system allocates for the corresponding mask. The system adjusts the CAM size if the number of routes for the mask exceeds the initial allocation.

Example (ECMP-Group)

```
Dell#show ip cam stack-unit 0 po 0 ecmp-group detail
```

Destination	EC	CG	V	C	VId	Mac-Addr	Port	ECMP	Group-Index
1.1.1.2	0	0	1	0	0	00:01:e8:8a:d6:58	0004 Te	0/3	-
2.1.1.2	0	0	1	0	0	00:01:e8:8a:d6:58	0009 Te	0/8	-
1.1.1.1	0	0	1	1	0	00:00:00:00:00:00	3f01 CP		-
2.1.1.1	0	0	1	1	0	00:00:00:00:00:00	3f01 CP		-
1.1.1.0	0	0	1	1	0	00:00:00:00:00:00	3f01 CP		-
2.1.1.0	0	0	1	1	0	00:00:00:00:00:00	3f01 CP		-
100.1.1.1	0	1	0	1	0	00:01:e8:8a:d6:58	0004 Te	0/3	0
100.1.1.1	0	1	0	1	0	00:01:e8:8a:d6:58	0009 Te	0/8	0
0.0.0.0	0	0	1	1	0	00:00:00:00:00:00	3f01 CP		-

```
Dell#
```

Example (Member-Info)

```
Dell#show ip cam stack-unit 0 po 0 ecmp-group member-info detail
```

Group	Index	Member	Count	Mac-Addr	Port	Vlan ID	Gateway
0		2		00:01:e8:8a:d6:58	Te 0/3	0	1.1.1.2
				00:01:e8:8a:d6:58	Te 0/8	0	2.1.1.2

```
Dell#
```

show ip fib stack-unit

View all FIB entries.

Syntax

```
show ip fib stack-unit 0-5 [ip-address [mask] [longer-prefixes] | summary]
```

Parameters

0-5	Enter the unit ID, from 0 to 5.
<i>ip-address mask</i>	(OPTIONAL) Enter the IP address of the network destination to view only information on that destination. Enter the IP address in dotted decimal format (A.B.C.D). Enter the mask in slash prefix format (/X).
<i>longer-prefixes</i>	(OPTIONAL) Enter the keywords <i>longer-prefixes</i> to view all routes with a common prefix.
<i>summary</i>	(OPTIONAL) Enter the keyword <i>summary</i> to view the total number of prefixes in the FIB.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip fib stack-unit` command shown in the following example.

Field	Description
Destination	Lists the destination IP address.
Gateway	Displays either the word "direct" and an interface for a directly connected route or the remote IP address used to forward the traffic.
First-Hop	Displays the first hop IP address.
Mac-Addr	Displays the MAC address.
Port	Displays the egress-port information.
Vid	Displays the VLAN ID. If no VLAN is assigned, zero (0) is listed.
EC	Displays the number of ECMP paths.

Example

```
Dell#show ip fib stack-unit 0
Destination      Gateway      First-Hop    Mac-Addr      Port Vid EC
-----
10.10.10.10/32  Direct, Nu 0  0.0.0.0  00:00:00:00:00:00  BLK HOLE 0 0
Dell>
```

Related Commands [clear ip fib stack-unit](#) — clear FIB entries on a specified stack-unit.

show ip interface

View IP-related information on all interfaces.

Syntax `show ip interface [interface | brief] [configuration]`

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For the Management interface, enter the keyword <code>ManagementEthernet</code> followed by zero (0). For a Port Channel interface, enter the keywords <code>port-channel</code> followed by a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information. For a VLAN, enter the keyword <code>vlan</code> followed by a number from 1 to 4094.
<i>brief</i>	(OPTIONAL) Enter the keyword <code>brief</code> to view a brief summary of the interfaces and whether an IP address is assigned.
<i>configuration</i>	(OPTIONAL) Enter the keyword <code>configuration</code> to display the physical interfaces with non-default configurations only.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.11(0.0)	Updated the command output to include the unicast reverse path forwarding (uRPF) status.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following describes the `show ip interface` command shown in the following example.

Lines	Description
TenGigabitEthernet 0/0...	Displays the interface's type, slot/port and physical and line protocol
Internet address...	States whether an IP address is assigned to the interface. If one is, that address is displayed.
IP MTU is...	Displays IP MTU value.
Inbound access...	Displays the name of the any configured incoming access list. If none is configured, the phrase "not set" is displayed.
Proxy ARP...	States whether proxy ARP is enabled on the interface.
Split horizon...	States whether split horizon for RIP is enabled on the interface.
Poison Reverse...	States whether poison for RIP is enabled on the interface
ICMP redirects...	States if ICMP redirects are sent.
ICMP unreachable...	States if ICMP unreachable messages are sent.

Example

```
Dell#show ip interface tengigabitethernet 0/0
TenGigabitEthernet 0/0 is down, line protocol is down
Internet address is not set
IP MTU is 1500 bytes
Inbound access list is not set
Proxy ARP is enabled
Split Horizon is enabled
Poison Reverse is disabled
ICMP redirects are not sent
ICMP unreachable are not sent
IP unicast RPF check is not supported
Dell#
```

Usage Information

The following describes the `show ip interface brief` command shown in the following example.

Fields	Description
Interface	Displays type of interface and the associated slot and port number.
IP-Address	Displays the IP address for the interface, if configured.
Ok?	Indicates if the hardware is functioning properly.
Method	Displays "Manual" if the configuration is read from the saved configuration.
Status	States whether the interface is enabled (up) or disabled (administratively down).
Protocol	States whether IP is enabled (up) or disabled (down) on the interface.

Example (Brief)

```
Dell#show ip interface brief
Interface          IP-Address  OK? Method Status Protocol
TenGigabitEthernet 0/1 unassigned NO None up down
TenGigabitEthernet 0/2 unassigned YES None up up
TenGigabitEthernet 0/3 unassigned YES None up up
TenGigabitEthernet 0/4 unassigned NO None up down
TenGigabitEthernet 0/5 unassigned NO None up down
TenGigabitEthernet 0/6 unassigned NO None up down
TenGigabitEthernet 0/7 unassigned NO None up down
TenGigabitEthernet 0/8 unassigned NO None up down
TenGigabitEthernet 0/9 unassigned NO None up down
```

show ip management-route

View the IP addresses assigned to the Management interface.

Syntax `show ip management-route [all | connected | summary | static]`

Parameters

- all** (OPTIONAL) Enter the keyword `all` to view all IP addresses assigned to all Management interfaces on the switch.
- connected** (OPTIONAL) Enter the keyword `connected` to view only routes directly connected to the Management interface.
- summary** (OPTIONAL) Enter the keyword `summary` to view a table listing the number of active and non-active routes and their sources.
- static** (OPTIONAL) Enter the keyword `static` to view non-active routes also.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show ip management-route
Destination      Gateway                State
-----
10.1.2.0/24      ManagementEthernet 0/0 Connected
172.16.1.0/24    10.1.2.4              Active
Dell#
```

show ip multicast-cam stack-unit

Displays content-addressable memory (CAM) entries.

Syntax `show ip multicast-cam stack-unit 0-5 port-set pipe-number [ip-address mask [longer-prefixes] | detail | member-info | summary]`

Parameters

0-5	Enter the stack-unit ID, from 0 to 5.
pipe-number	Enter the number of the Port-Pipe number. The range is from 0 to 0.
ip-address mask [longer-prefix]	(OPTIONAL) Enter the IP address and mask of a route to CAM entries for that route only. Enter the keyword <code>longer-prefixes</code> to view routes with a common prefix.
detail	Enter the keyword <code>detail</code> to display the group index ID used by the ecmp routes in the CAM.
member-info	Enter the keyword <code>member-info</code> to display the group index used by the ecmp, the number of egress ports (members) for the ecmp, and the port details of each member. The detail information under <code>member-info</code> will give the MAC address, VLAN ID and gateway of every member port of the ecmp.
summary	(OPTIONAL) Enter the keyword <code>summary</code> to view a table listing route prefixes and the total number routes which can be entered in to CAM.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The following describes the `show ip fib stack-unit` command shown in the following example.

Field	Description
Destination	Displays the destination route of the index.
CG	Displays 0.
V	Displays a 1 if the entry is valid and a 0 otherwise.
C	Displays the CPU bit. 1 indicates that a packet hitting this entry is forwarded to the control processor, depending on Egress port.
V Id	Displays the VLAN ID. If the entry is 0, the entry is not part of a VLAN.
Mac Addr	Displays the next-hop router's MAC address.
Port	Displays the egress interface. Use the second half of the entry to determine the interface. For example, in the entry <code>17cl CP</code> , the <code>CP</code> is the pertinent portion. <ul style="list-style-type: none">• CP = control processor• Fo= 40 Gigabit Ethernet interface

Field	Description
	· Te = 10 Gigabit Ethernet interface

Example

```
Dell#show ip multicast-cam stack-unit 0 port-set 0 10.10.10.10/32
longer-prefixes
Destination      EC      CG      V      C      VId      Mac-Addr      Port
-----
10.10.10.10      0       0       0       1       1 0 00:00:00:00:00:00      3f01 CP
Dell#
```

show ip protocols

View information on all routing protocols enabled and active on the switch.

Syntax `show ip protocols`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip protocols
Routing Protocol is "bgp 1"
Cluster Id is set to 20.20.20.3
Router Id is set to 20.20.20.3
Fast-external-fallover enabled
Regular expression evaluation optimization enabled
Capable of ROUTE_REFRESH
For Address Family IPv4 Unicast
BGP table version is 0, main routing table version 0
Distance: external 20 internal 200 local 200
Neighbor(s):
Address : 20.20.20.2
Filter-list in : foo
Route-map in : foo
Weight : 0
Address : 5::6
Weight : 0
Dell#
```

show ip route

View information, including how they were learned, about the IP routes on the switch.

Syntax

`show ip route [hostname | ip-address [mask] [longer-prefixes] | list prefix-list [process-id] | connected | static | summary]`

Parameters

<i>ip-address</i>	(OPTIONAL) Specify a name of a device or the IP address of the device to view more detailed information about the route.
<i>mask</i>	(OPTIONAL) Specify the network mask of the route. Use this parameter with the IP address parameter.
<i>longer-prefixes</i>	(OPTIONAL) Enter the keywords <i>longer-prefixes</i> to view all routes with a common prefix.
<i>list prefix-list</i>	(OPTIONAL) Enter the keyword <i>list</i> and the name of a configured prefix list.
<i>process-id</i>	(OPTIONAL) Specify that only OSPF routes with a certain process ID must be displayed.
<i>connected</i>	(OPTIONAL) Enter the keyword <i>connected</i> to view only the directly connected routes.
<i>static</i>	(OPTIONAL) Enter the keyword <i>static</i> to view only routes configured by the <i>ip route</i> command.
<i>summary</i>	(OPTIONAL) Enter the keyword <i>summary</i> .

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information The following describes the `show ip route all` command in the following example.

Field	Description
(undefined)	Identifies the type of route: <ul style="list-style-type: none">· C = connected· S = static· R = RIP· B = BGP· IN = internal BGP· EX = external BGP· LO = Locally Originated· O = OSPF· IA = OSPF inter area· N1 = OSPF NSSA external type 1· N2 = OSPF NSSA external type 2· E1 = OSPF external type 1· E2 = OSPF external type 2· i = IS-IS· L1 = IS-IS level-1· L2 = IS-IS level-2

Field	Description
	<ul style="list-style-type: none"> · IA = IS-IS inter-area · * = candidate default · > = non-active route · + = summary routes
Destination	Identifies the route's destination IP address.
Gateway	Identifies whether the route is directly connected and on which interface the route is configured.
Dist/Metric	Identifies if the route has a specified distance or metric.
Last Change	Identifies when the route was last changed or configured.

Example

Example (Summary)

```
Dell#show ip route summary
Route Source      Active Routes   Non-active Routes
connected         2                0
static            1                0
Total             3                0
Total 3 active route(s) using 612 bytes
Dell#show ip route static ?
|                Pipe through a command
<cr>
Dell#show ip route static
          Destination      Gateway                Dist/Metric  Last Change
          -----
*s      0.0.0.0/0            via 10.10.91.9, Te 1/2      1/0          3d2h
Dell#
```

show ip route list

Display IP routes in an IP prefix list.

Syntax `show ip route list prefix-list`

Parameters *prefix-list* Enter the name of a configured prefix list.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip route list test

Codes:C- connected, S - static, R - RIP,
      B- BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated,
      O- OSPF, IA - OSPF inter area, N1 - OSPF NSSA external type 1,
      N2- OSPF NSSA external type 2, E1 - OSPF external type 1,
```

```
E2- OSPF external type 2, i - IS-IS, L1 - IS-IS level-1,
L2- IS-IS level-2, IA - IS-IS inter area, * - candidate default,
>- non-active route, + - summary route
```

Gateway of last resort is not set

	Destination	Gateway	Dist/Metric	Last Change
R	2.1.0.0/24	via 2.1.4.1, Te 4/4	120/2	3d0h
R	2.1.1.0/24	via 2.1.4.1, Te 4/4	120/2	3d1h
R	2.1.2.0/24	via 2.1.4.1, Te 4/4	120/1	3d0h
R	2.1.3.0/24	via 2.1.4.1, Te 4/4	120/1	3d1h
C	2.1.4.0/24	Direct, Te 4/4	0/0	3d1h

Related Commands

- [ip prefix-list](#) — enters CONFIGURATION-IP PREFIX-LIST mode and configures a prefix list.
- [show ip prefix-list summary](#) — displays a summary of the configured prefix lists.

show ip route summary

View a table summarizing the IP routes in the switch.

Syntax `show ip route summary`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip route summary` shown in the following example.

Column Heading	Description
Route Source	Identifies how the route is configured in the system.
Active Routes	Identifies the best route if a route is learned from two protocol sources.
Non-active Routes	Identifies the back-up routes when a route is learned by two different protocols. If the best route or active route goes down, the non-active route becomes the best route.
ospf 100	If routing protocols (OSPF, RIP) are configured and routes are advertised, then information on those routes is displayed.
Total 1388 active...	Displays the number of active and non-active routes and the memory usage of those routes. If there are no routes configured in the the system, this line does not appear.

Example

```
Dell>show ip route summary

Route Source   Active Routes   Non-active Routes
connected      17              0
static         3               0
ospf 100       1368            2
Intra-area: 762 Inter-area: 1 External-1: 600 External-2: 5
Total          1388            2
```

```
Total 1388 active route(s) using 222440 bytes
Total 2 non-active route(s) using 128 bytes
Dell>
```

Related Commands `show ip route` — displays information about the routes found in the switch.

show ip traffic

View IP, ICMP, UDP, TCP and ARP traffic statistics.

Syntax `show ip traffic`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip traffic` summary shown in the following example.

Keyword	Definition
unknown protocol...	No receiver for these packets. Counts packets whose protocol type field is not recognized by the system.
not a gateway...	Packets can not be routed; the host/network is unreachable.
security failures...	Counts the number of received unicast/multicast packets that could not be forwarded due to: <ul style="list-style-type: none">· route not found for unicast/multicast; ingress interfaces do not belong to the destination multicast group· destination IP address belongs to reserved prefixes; the host/network is unreachable
bad options...	Unrecognized IP option on a received packet.
Frgs:	IP fragments received.
... reassembled	Number of IP fragments that were reassembled.
... timeouts	Number of times a timer expired on a reassembled queue.
... too big	Number of invalid IP fragments received.
... couldn't fragment	Number of packets that could not be fragmented and forwarded.
...encapsulation failed	Counts packets which could not be forwarded due to ARP resolution failure. The system sends an arp request prior to forwarding an IP packet. If a reply is not received, the system repeats the request three times. These packets are counted in encapsulation failed.
Rcvd:	
...short packets	The number of bytes in the packet are too small.
...bad length	The length of the packet was not correct.

Keyword	Definition
...no port broadcasts	The incoming broadcast/multicast packet did not have any listener.
...socket full	The applications buffer is full and the incoming packet are dropped.

The F10 Monitoring MIB provides access to the following statistics.

- **IP Statistics: Bcast: Received:** Object = f10BcastPktRecv, OIDs = 1.3.6.1.4.1.6027.3.3.5.1.1
- **IP Statistics: Bcast: Sent:** Object = f10BcastPktSent, OIDs = 1.3.6.1.4.1.6027.3.3.5.1.2
- **IP Statistics: Mcast: Received:** Object = f10McastPktRecv, OIDs = 1.3.6.1.4.1.6027.3.3.5.1.3
- **IP Statistics: Mcast: Sent:** Object = f10McastPktSent, OIDs = 1.3.6.1.4.1.6027.3.3.5.1.4
- **ARP Statistics: Rcvd: Request:** Object = f10ArpReqRecv, OIDs = 1.3.6.1.4.1.6027.3.3.5.2.1
- **ARP Statistics: Rcvd: Replies:** Object = f10ArpReplyRecv, OIDs = 1.3.6.1.4.1.6027.3.3.5.2.3
- **ARP Statistics: Sent: Request:** Object = f10ArpReqSent, OIDs = 1.3.6.1.4.1.6027.3.3.5.2.2
- **ARP Statistics: Sent: Replies:** Object = f10ArpReplySent, OIDs = 1.3.6.1.4.1.6027.3.3.5.2.4
- **ARP Statistics: Sent: Proxy:** Object = f10ArpProxySent, OIDs = 1.3.6.1.4.1.6027.3.3.5.2.5

Example

```
Dell#show ip traffic
IP statistics:
  Rcvd: 10021161 total, 3197480 local destination
        2501 format errors, 390 checksum errors, 0 bad hop count
        0 unknown protocol, 0 not a gateway
        115 security failures, 0 bad options
  Frags: 0 reassembled, 0 timeouts, 0 too big
        0 fragmented, 0 couldn't fragment
  Bcast: 6281 received, 0 sent; Mcast: 500 received, 0 sent
  Sent: 6573260 generated, 0 forwarded
        3830 encapsulation failed, 0 no route

ICMP statistics:
  Rcvd: 0 format errors, 0 checksum errors, 0 redirects, 3 unreachable
        0 echo, 0 echo reply, 0 mask requests, 0 mask replies, 0 quench
        0 parameter, 0 timestamp, 0 info request, 0 other
  Sent: 0 redirects, 1 unreachable, 0 echo, 0 echo reply
        0 mask requests, 0 mask replies, 0 quench, 0 timestamp
        0 info reply, 0 time exceeded, 0 parameter problem

UDP statistics:
  Rcvd: 2938110 total, 14 checksum errors, 1 no port
        0 short packets, 0 bad length, 1883908 no port broadcasts, 0 socket full
  Sent: 329731 total, 1883908 forwarded broadcasts
--More--
```

show tcp statistics

View information on TCP traffic through the switch.

Syntax	show tcp statistics	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

The following describes the `show tcp statistics cp` command shown in the following example.

Field	Description
Rcvd:	Displays the number and types of TCP packets received by the switch. <ul style="list-style-type: none"> Total = total packets received no port = number of packets received with no designated port
0 checksum error...	Displays the number of packets received with the following: <ul style="list-style-type: none"> checksum errors bad offset to data too short
329 packets...	Displays the number of packets and bytes received in sequence.
17 dup...	Displays the number of duplicate packets and bytes received.
0 partially...	Displays the number of partially duplicated packets and bytes received.
7 out-of-order...	Displays the number of packets and bytes received out of order.
0 packets with data after window	Displays the number of packets and bytes received that exceed the switch's window size.
0 packets after close	Displays the number of packet received after the TCP connection was closed.
0 window probe packets...	Displays the number of window probe and update packets received.
41 dup ack...	Displays the number of duplicate acknowledgement packets and acknowledgement packets with data received.
10184 ack...	Displays the number of acknowledgement packets and bytes received.
Sent:	Displays the total number of TCP packets sent and the number of urgent packets sent.
25 control packets...	Displays the number of control packets sent and the number retransmitted.
11603 data packets...	Displays the number of data packets sent.
24 data packets retransmitted	Displays the number of data packets resent.
355 ack..	Displays the number of acknowledgement packets sent and the number of packet delayed.
0 window probe...	Displays the number of window probe and update packets sent.
7 Connections initiated...	Displays the number of TCP connections initiated, accepted, and established.
14 Connections closed...	Displays the number of TCP connections closed, dropped.

Field	Description
20 Total rxmt...	Displays the number of times the switch tried to re-send data and the number of connections dropped during the TCP retransmit timeout period.
0 Keepalive...	Lists the number of keepalive packets in timeout, the number keepalive probes and the number of TCP connections dropped during keepalive.

Example

```
Dell#show tcp statistics
Rcvd: 9849 Total, 0 no port
0 checksum error, 0 bad offset, 0 too short
5735 packets (7919 bytes) in sequence
20 dup packets (2 bytes)
0 partially dup packets (0 bytes)
1 out-of-order packets (0 bytes)
0 packets ( 0 bytes) with data after window
0 packets after close
0 window probe packets, 0 window update packets
0 dup ack packets, 0 ack packets with unsend data
6671 ack packets (152813 bytes)
Sent: 6778 Total, 0 urgent packets
7 control packets
6674 data packets (152822 bytes)
12 data packets (1222 bytes) retransmitted
85 ack only packets (5677 delayed)
0 window probe packets, 0 window update packets
0 Connections initiated, 7 connections accepted, 7 connections established
8 Connections closed (including 4 dropped, 0 embryonic dropped)
12 Total rxmt timeout, 1 connections dropped in rxmt timeout
26 Keepalive timeout, 25 keepalive probe, 1 Connections dropped in keepalive
Dell#
```

Internet Protocol Security (IPSec)

Internet protocol security (IPSec) is an end-to-end security scheme for securing IP communications by authenticating and encrypting all packets in a session. Use IPSec between hosts, gateways, or hosts and gateways.

IPSec uses a series of protocol functions to achieve information security:

- **Authentication Headers (AH)** — Connectionless integrity and origin authentication for IP packets.
- **Encapsulating Security Payloads (ESP)** — Confidentiality, authentication, and data integrity for IP packets.
- **Security Associations (SA)** — Algorithm-provided parameters required for AH and ESP protocols.

IPSec capability is available on control (protocol) and management traffic; end-node support is required.

IPSec supports two operational modes: Transport and Tunnel.

- Transport is the default mode for IPSec and encrypts only the payload of the packet. Routing information is unchanged.
- Tunnel mode is used to encrypt the entire packet, including the routing information in the IP header. Tunnel mode is typically used in creating virtual private networks (VPNs).

Transport mode provides IP packet payload protection using ESP. You can use ESP alone or in combination with AH to provide additional authentication. AH protects data from modification but does not provide confidentiality.

SA is the configuration information that specifies the type of security provided to the IPSec flow. The SA is a set of algorithms and keys used to authenticate and encrypt the traffic flow. The AH and ESP use SA to provide traffic protection for the IPSec flow.

NOTE:

The Dell EMC Networking OS supports IPSec only for FTP and telnet protocols (ports 20, 21, and 23). The system rejects if you configure IPSec for other protocols.

Topics:

- [crypto ipsec transform-set](#)
- [crypto ipsec policy](#)
- [management crypto-policy](#)
- [match](#)
- [session-key](#)
- [show crypto ipsec transform-set](#)
- [show crypto ipsec policy](#)
- [transform-set](#)

crypto ipsec transform-set

Create a transform set, or combination of security algorithms and protocols, of cryptos.

Syntax

```
crypto ipsec transform-set name {ah-authentication {md5|sha1|null} | esp-
authentication {md5|sha1|null} | esp-encryption {3des|cbc|des|null}}
```

To delete a transform set, use the `no crypto ipsec transform-set name {ah-authentication {md5|sha1|null} | esp-authentication {md5|sha1|null} | esp-encryption {3des|cbc|des|null}}` command.

Parameters

name	Enter the name for the transform set.
ah-authentication	Enter the keywords <code>ah-authentication</code> then the transform type of operation to apply to traffic. The transform type represents the encryption or authentication applied to traffic. <ul style="list-style-type: none">• <code>md5</code> — Use Message Digest 5 (MD5) authentication.• <code>sha1</code> — Use Secure Hash Algorithm 1 (SHA-1) authentication.• <code>null</code> — Causes an encryption policy configured for the area to not be inherited on the interface.
esp-authentication	Enter the keywords <code>esp-authentication</code> then the transform type of operation to apply to traffic. The transform type represents the encryption or authentication applied to traffic. <ul style="list-style-type: none">• <code>md5</code> — Use Message Digest 5 (MD5) authentication.• <code>sha1</code> — Use Secure Hash Algorithm 1 (SHA-1) authentication.• <code>null</code> — Causes an encryption policy configured for the area to not be inherited on the interface.
esp-encryption	Enter the keywords <code>esp-encryption</code> then the transform type of operation to apply to traffic. The transform type represents the encryption or authentication applied to traffic. <ul style="list-style-type: none">• <code>3des</code> — Use 3DES encryption.• <code>cbc</code> — Use CDC encryption.• <code>des</code> — Use DES encryption.• <code>null</code> — Causes an encryption policy configured for the area to not be inherited on the interface.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

- Both sides of the link must specify the same transform set.
- You can create up to 64 transform sets.

Example

```
Dell(conf)#int ten 0/4
Dell(conf-if-te-0/4)#ipv6 address 200:1::/64 eui64
Dell(conf)#int ten 0/6
Dell(conf-if-te-0/6)#ipv6 address 801:10::/64 eui64
```

crypto ipsec policy

Create a crypto policy used by ipsec.

Syntax `crypto ipsec policy name seq-num ipsec-manual`
To delete a crypto policy entry, use the `no crypto ipsec policy name seq-num ipsec-manual` command.

Parameters

<i>name</i>	Enter the name for the crypto policy set.
<i>seq-num</i>	Enter the sequence number assigned to the crypto policy entry.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command creates a crypto policy entry and enters the crypto policy configuration mode for configuring the flow parameters.

Example

```
Dell(conf)#crypto ipsec policy West 10 ipsec-manual
Dell(conf-crypto-policy)#
```

management crypto-policy

Apply the crypto policy to management traffic.

Syntax `management crypto-policy name`
To remove the management traffic crypto policy, use the `no management crypto-policy name` command.

Parameters

<i>name</i>	Enter the name for the crypto policy.
--------------------	---------------------------------------

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

match

Match a sequence number to the transmission control protocol (TCP)/user datagram protocol (UDP) packets.

Syntax `match seq-num {tcp | udp} {ipv6 | ip} port-num dest-ip dest-port-num`
To remove the match filter for the crypto map, use the `no match seq-num` command.

Parameters

seq-num	Enter the match command sequence number. The range is from 0 to 255.
tcp	Enter the keyword <code>tcp</code> to configure a TCP access list filter.
udp	Enter the keyword <code>udp</code> to configure a UDP access list filter.
ipv6	Enter the source IPv6 address.
ip	Enter the source IPv4 address.
port-num	Enter the source port number. The range is from 0 to 65535
dest-ip	Enter the destination IP address.
dest-port-num	Enter the destination port number. The range is from 0 to 65535.

Defaults none

Command Modes CONFIG-CRYPTO-POLICY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information UDP is not supported. Only TCP 23 telnet and 21 FTP are supported.

Example

```
Dell(conf-crypto-policy)#match 0 tcp a::1 /128 0 a::2 /128 23
Dell(conf-crypto-policy)#match 1 tcp a::1 /128 23 a::2 /128 0
Dell(conf-crypto-policy)#match 2 tcp a::1 /128 0 a::2 /128 21
Dell(conf-crypto-policy)#match 3 tcp a::1 /128 21 a::2 /128 0
Dell(conf-crypto-policy)#match 4 tcp 1.1.1.1 /32 0 1.1.1.2 /32 23
Dell(conf-crypto-policy)#match 5 tcp 1.1.1.1 /32 23 1.1.1.2 /32 0
Dell(conf-crypto-policy)#match 6 tcp 1.1.1.1 /32 0 1.1.1.2 /32 21
Dell(conf-crypto-policy)#match 7 tcp 1.1.1.1 /32 21 1.1.1.2 /32 0
```

session-key

Specify the session keys used in the crypto policy entry.

Syntax `session-key {inbound | outbound} {ah spi hex-key-string | esp spi encrypt hex-key-string auth hex-key-string}`
To delete the session key information from the crypto policy, use the `no session-key {inbound | outbound} {ah | esp}` command.

Parameters

<i>name</i>	Enter the name of the host to delete. Enter * to delete all host table entries.
<i>inbound</i>	Specify the inbound session key for IPSec.
<i>outbound</i>	Specify the outbound session key for IPSec.
<i>ah</i>	Use the AH protocol when you select the AH transform set in the crypto policy.
<i>esp</i>	Use the ESP protocol when you select the ESP transform set in the crypto policy.
<i>spi</i>	Enter the security parameter index number.
<i>hex-key-string</i>	Enter the session key in hex format (a string of 8, 16, or 20 bytes). For DES algorithms, specify at least 16 bytes per key. For SHA algorithms, specify at least 20 bytes per key.
<i>encrypt</i>	Indicates the ESP encryption transform set key string.
<i>auth</i>	Indicates the ESP authentication transform set key string.

Defaults

none

Command Modes

CONF-CRYPTO-POLICY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

- This command is only available in the ipsec-manual model.
- The key information entry is associated with the global method for enabling clear text or encrypted display in the running config.

show crypto ipsec transform-set

Display the transform set configuration.

Syntax

```
show crypto ipsec transform-set name
```

Parameters

<i>name</i>	Enter the name of the transform set.
-------------	--------------------------------------

Command Modes

EXEC

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.2)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)#do show crypto ipsec transform-set
Transform-Set Name      : ts1
Transform-Set refCnt    : 0
AH Transform            : md5
ESP Auth Transform      :
```

```
ESP Encry Transform :  
Dell(conf)#
```

show crypto ipsec policy

Display the crypto policy configuration.

Syntax `show crypto ipsec policy name`

Parameters

<i>name</i>	Enter the name for the crypto policy set.
--------------------	---

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-crypto-policy)#do show crypto ipsec policy  
  
Policy name           : poll  
Policy refcount      : 0  
Sequence Num         : 1  
SA Mode              : IPSEC-MANUAL  
Transform-Set Name   :  
Peer IP Address      :  
Inbound AH SPI       : 0  
Inbound ESP Auth SPI : 0  
Inbound ESP Encry SPI : 0  
Inbound AH Key       : [0]::  
Inbound ESP Auth Key : [0]::  
Inbound ESP Encry Key : [0]::  
Outbound AH SPI      : 0  
Outbound ESP Auth SPI : 0  
Outbound ESP Encry SPI : 0  
Outbound AH Key      : [0]::  
Outbound ESP Auth Key : [0]::  
Outbound ESP Encry Key : [0]::  
  
Match sequence Num   : 2  
Protocol type        : tcp  
IP or IPv6           : IP  
Source address       : 1.1.1.1  
Source mask          : /32  
Source port          : 0  
Destination address  : 1.1.1.2  
Destination mask     : /32  
Destination port     : 23  
source-interface name :  
source-interface num :  
  
Dell(conf-crypto-policy)#
```

transform-set

Specify the transform set the crypto policy uses.

Syntax

`transform-set transform-set-name`

To delete a transform set from the crypto policy, use the `no transform-set transform-set-name` command.

Parameters

transform-set-name Enter the name for the crypto policy transform set.

Defaults

none

Command Modes

CONFIG-CRYPTO-POLICY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

IPv6 Access Control Lists (IPv6 ACLs)

IPv6 ACLs and IPv6 Route Map commands are supported on Dell Networking switch.

① **NOTE:** For IPv4 ACL commands, refer to the [Access Control Lists \(ACL\) chapter](#).

Important Points to Remember

- Certain platforms require manual CAM usage space allotment. For more information, refer to the [cam-acl \(Configuration\)](#) command.
- Egress IPv6 ACL and IPv6 ACL on the Loopback interface is not supported.
- Reference to an empty ACL permits any traffic.
- ACLs are not applied to self-originated traffic (for example, Control Protocol traffic not affected by IPv6 ACL because the routed bit is not set for Control Protocol traffic and for egress ACLs the routed bit must be set).
- You can use the same access list name for both IPv4 and IPv6 ACLs.
- You can apply both IPv4 and IPv6 ACLs on an interface at the same time.
- You can apply IPv6 ACLs on physical interfaces and a logical interfaces (Port-channel/VLAN).
- Non-contiguous masks are not supported in source or destination addresses in IPv6 ACL entries.
- Because the prefix mask is specified in /x format in IPv6 ACLs, inverse mask is not supported.

IPv6 ACL Commands

The following commands configure IPv6 ACLs.

cam-acl

Allocate space for IPv6 ACLs.

Syntax `cam-acl {default | l2acl 1-10 ipv4acl 1-10 ipv6acl 0-10 ipv4qos 1-10 l2qos 1-10}`

Parameters

default

Use the default CAM profile settings, and set the CAM as follows:

- L3 ACL (ipv4acl): **6**
- L2 ACL(l2acl): **5**
- IPv6 L3 ACL (ipv6acl): **0**
- L3 QoS (ipv4qos): **1**
- L2 QoS (l2qos): **1**

l2acl 1-10 ipv4acl 1-10 ipv6acl 0-10

Allocate space to support IPv6 ACLs. Enter all of the profiles and a range. Enter the CAM profile name then the amount to be allotted. The total space allocated must equal 13. The `ipv6acl` range must be a factor of 2.

ipv4qos 1-10 l2qos 1-10

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

For the new settings to take effect, save the new CAM settings to the startup-config (`write mem` or `copy run start`), then reload the system.

The total amount of space allowed is 16 FP blocks. System flow requires three blocks and these blocks cannot be reallocated.

When configuring space for IPv6 ACLs, the total number of Blocks must equal 13.

Ranges for the CAM profiles are from 1 to 10, except for the `ipv6acl profile` which is from 0 to 10. The `ipv6acl` allocation must be a factor of 2 (2, 4, 6, 8, 10).

cam-acl-egress

Allocate space for IPv6 egress ACLs.

Syntax `cam-acl-egress {default | l2acl 1-4 ipv4acl 1-4 ipv6acl 0-4}`

Parameters

default Use the default CAM profile settings, and set the CAM as follows:

- L2 ACL(l2acl): **1**
- L3 ACL (ipv4acl): **1**
- IPv6 L3 ACL (ipv6acl): **2**

l2acl 1-4 ipv4acl 1-4 ipv6acl 0-4 Allocate space to support IPv6 ACLs. Enter all of the profiles and a range. Enter the CAM profile name then the amount to be allotted. The total space allocated must equal 13. The `ipv6acl` range must be a factor of 2.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

For the new settings to take effect, save the new CAM settings to the startup-config (`write mem` or `copy run start`), then reload the system.

The total amount of space allowed is 16 FP Blocks. System flow requires three blocks and these blocks cannot be reallocated.

When configuring space for IPv6 ACLs, the total number of Blocks must equal 13.

Ranges for the CAM profiles are from 1 to 10, except for the `ipv6acl` profile which is from 0 to 10. The `ipv6acl` allocation must be a factor of 2 (2, 4, 6, 8, 10).

Example

```
Dell#
Dell#configure
Dell(conf)#cam-acl-egress ?
default      Reset Egress CAM ACL entries to default setting
l2acl        Set L2-ACL entries
Dell(conf)#cam-acl-egress l2acl ?
<1-4>        Number of FP blocks for l2acl
Dell(conf)#cam-acl-egress l2acl 1 ?
ipv4acl      Set IPV4-ACL entries
Dell(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ?
ipv6acl      Set IPV6-ACL entries
Dell(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ipv6acl ?
<0-4>        Number of FP blocks for IPV6 (multiples of 2)
Dell(conf)#cam-acl-egress l2acl 1 ipv4acl 1 ipv6acl 2
```

ipv6 access-list

Configure an access list based on IPv6 addresses or protocols.

Syntax `ipv6 access-list access-list-name cpu-qos {permit | deny} ospfv3`
To delete an access list, use the `no ipv6 access-list access-list-name` command.

Parameters

<i>access-list-name</i>	Enter the access list name as a string, up to 140 characters.
<i>cpu-qos</i>	Enter the keyword <code>cpu-qos</code> to assign this ACL to control plane traffic only (CoPP).
<i>permit</i>	Enter the keyword <code>permit</code> to configure a filter to forward packets meeting this condition.
<i>deny</i>	Enter the keyword <code>deny</code> to configure a filter to drop packets meeting this condition.
<i>ospfv3</i>	Specify that this ACL is for OSPFv3 control plane traffic

Defaults All access lists contain an implicit “deny any”; that is, if no match occurs, the packet is dropped.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for CoPP for OSPFv3 on the MXL 10/40GbE Switch IO Module.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The number of entries allowed per ACL is hardware-dependent. For detailed specification on entries allowed per ACL, refer to your line card documentation. You can create an IPv6 ACL for control-plane traffic policing for

OSPFv3, in addition to the CoPP support for VRRP, BGP, and ICMP that existed in Dell Networking OS releases 9.3(0.0) and earlier

Related Commands `show config` — views the current configuration.

ipv6 control-plane egress-filter

Enable egress Layer 3 ACL lookup for IPv6 CPU traffic.

Syntax `ipv6 control-plane egress-filter`

Defaults Not enabled.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

permit

To configure a filter that matches the filter criteria, select an IPv6 protocol number, ICMP, IPv6, TCP, or UDP.

Syntax `permit {ipv6-protocol-number | icmp | ipv6 | tcp | udp} [count [byte]] [dscp value] [order] [fragments] [log [interval minutes] [threshold-in-msgs [count]] [monitor]]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command syntax if you know the filter's sequence number
- Use the `no permit {ipv6-protocol-number | icmp | ipv6 | tcp | udp}` command

Parameters

<i>ip-protocol-number</i>	Enter an IPv6 protocol number. The range is from 0 to 255.
icmp	Enter the keyword <code>icmp</code> to filter internet Control Message Protocol version 6.
ipv6	Enter the keyword <code>ipv6</code> to filter any internet Protocol version 6.
tcp	Enter the keyword <code>tcp</code> to filter the Transmission Control protocol.
udp	Enter the keyword <code>udp</code> to filter the User Datagram Protocol.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
dscp	(OPTIONAL) Enter the keyword <code>dscp</code> to match to the IP DCSCP values.
order	(OPTIONAL) Enter the keyword <code>order</code> to specify the QoS priority for the ACL entry. The range is from 0 to 254 (where 0 is the highest priority and 254 is the lowest; lower-order numbers have a higher priority). If you do not use the keyword <code>order</code> , the ACLs have the lowest order by default (255).
fragments	Enter the keyword <code>fragments</code> to use ACLs to control packet fragments.

log	OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> when the rule is describing the traffic that you want to monitor and the ACL in which you are creating the rule is applied to the monitored interface.

Defaults Not configured.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
9.3(0.0)	Added support for logging of ACLs on the MXL 10/40GbE Switch IO Module.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

permit icmp

To allow all or specific internet control message protocol (ICMP) messages, configure a filter.

Syntax `permit icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address} [message-type] [count [byte]] | [log] [interval minutes] [threshold-in-msgs [count]][monitor]`

To remove this filter, you have two choices:

- Use the `no seq sequence-number` command if you know the filter's sequence number.
- Use the `no permit icmp {source address mask | any | host ipv6-address} {destination address | any | host ipv6-address}` command.

Parameters

source address	Enter the IPv6 address of the network or host from which the packets were sent in the <code>x:x:x:x</code> format then the prefix length in the <code>/x</code> format. The range is from <code>/0</code> to <code>/128</code> . The <code>::</code> notation specifies successive hexadecimal fields of zero.
mask	Enter a network mask in <code>/prefix</code> format (<code>/x</code>).
any	Enter the keyword <code>any</code> to specify that all routes are subject to the filter.
host ipv6-address	Enter the keyword <code>host</code> then the IPv6 address of the host in the <code>x:x:x:x</code> format. The <code>::</code> notation specifies successive hexadecimal fields of zero.
destination address	Enter the IPv6 address of the network or host to which the packets are sent in the <code>x:x:x:x</code> format then the prefix length in the <code>/x</code> format. The range is from <code>/0</code> to <code>/128</code> . The <code>::</code> notation specifies successive hexadecimal fields of zero.

message-type	(OPTIONAL) Enter an ICMP message type, either with the type (and code, if necessary) numbers or with the name of the message type. The range is from 0 to 255 for ICMP type and from 0 to 255 for ICMP code.
count	(OPTIONAL) Enter the keyword <code>count</code> to count packets the filter processes.
byte	(OPTIONAL) Enter the keyword <code>byte</code> to count bytes the filter processes.
log	(OPTIONAL) Enter the keyword <code>log</code> to enable the triggering of ACL log messages.
threshold-in-msgs count	(OPTIONAL) Enter the <code>threshold-in-msgs</code> keyword followed by a value to indicate the maximum number of ACL logs that can be generated, exceeding which the generation of ACL logs is terminated with the <code>seq</code> , <code>permit</code> , or <code>deny</code> commands. The threshold range is from 1 to 100.
interval minutes	(OPTIONAL) Enter the keyword <code>interval</code> followed by the time period in minutes at which ACL logs must be generated. The interval range is from 1 to 10 minutes.
monitor	(OPTIONAL) Enter the keyword <code>monitor</code> to monitor traffic on the monitoring interface specified in the flow-based monitoring session along with the filter operation.

Defaults By default, 10 ACL logs are generated if you do not specify the threshold explicitly. The default frequency at which ACL logs are generated is five minutes. By default, flow-based monitoring is not enabled.

Command Modes ACCESS-LIST

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the support for flow-based monitoring on the MXL 10/40GbE Switch IO Module platform
9.3(0.0)	Added the support for logging of ACLs on the MXL 10/40GbE Switch IO Module platform
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information When the configured maximum threshold is exceeded, generation of logs is stopped. When the interval at which ACL logs are configured to be recorded expires, the subsequent, fresh interval timer is started and the packet count for that new interval commences from zero. If ACL logging was stopped previously because the configured threshold is exceeded, it is re-enabled for this new interval.

If ACL logging is stopped because the configured threshold is exceeded, it is re-enabled after the logging interval period elapses. ACL logging is supported for standard and extended IPv4 ACLs, IPv6 ACLs, and MAC ACLs. You can configure ACL logging only on ACLs that are applied to ingress interfaces; you cannot enable logging for ACLs that are associated with egress interfaces.

You can activate flow-based monitoring for a monitoring session by entering the `flow-based enable` command in the Monitor Session mode. When you enable this capability, traffic with particular flows that are traversing through the ingress and egress interfaces are examined and, appropriate ACLs can be applied in both the ingress and egress direction. Flow-based monitoring conserves bandwidth by monitoring only specified traffic instead all traffic on the interface. This feature is particularly useful when looking for malicious traffic. It is available for Layer 2 and Layer 3 ingress and egress traffic. You may specify traffic using standard or extended access-lists. This mechanism copies all incoming or outgoing packets on one port and forwards (mirrors) them to another port. The source port is the monitored port (MD) and the destination port is the monitoring port (MG).

show cam-acl

Show space allocated for IPv6 ACLs.

Syntax show cam-acl

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
show cam-acl (non default)
Dell(conf)#cam-acl l2acl 2 ipv4acl 4 ipv6acl 4 ipv4qos 2 l2qos 1 l2pt 0
ipmacacl 0 vman-qos 0 ecfmacl 0
Dell#show cam-acl

-- Chassis Cam ACL --
      Current Settings(in block sizes)
      1 block = 128 entries
L2Acl      :      2
Ipv4Acl    :      4
Ipv6Acl    :      4
Ipv4Qos    :      2
L2Qos      :      1
L2PT       :      0
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos :      0
EcfmAcl    :      0
FcoeAcl    :      0
iscsiOptAcl :      0
ipv4pbr    :      0
vrfv4Acl   :      0
Openflow   :      0
fedgovacl  :      F3940

-- stack-unit 0 --
      Current Settings(in block sizes)
      1 block = 128 entries
L2Acl      :      2
Ipv4Acl    :      4
Ipv6Acl    :      4
Ipv4Qos    :      2
L2Qos      :      1
L2PT       :      0+F394
IpMacAcl   :      0
VmanQos    :      0
VmanDualQos :      0
EcfmAcl    :      0
FcoeAcl    :      0
iscsiOptAcl :      0
ipv4pbr    :      0
vrfv4Acl   :      0
Openflow   :      0
fedgovacl  :      0
```

```
Dell#
```

Related Commands [cam-acl](#) — configures CAM profiles to support IPv6 ACLs.

show cam-acl-egress

Show information on FP groups allocated for egress ACLs.

Syntax `show cam-acl-egress`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show cam-acl-egress
-- Chassis Egress Cam ACL --
      Current Settings(in block sizes)
      1 block = 256 entries
L2Acl      :          1
Ipv4Acl    :          1
Ipv6Acl    :          2
-- stack-unit 0 --
      Current Settings(in block sizes)
L2Acl      :          1
Ipv4Acl    :          1
Ipv6Acl    :          2
```

Related Commands [cam-acl](#) — configures CAM profiles to support IPv6 ACLs.

IPv6 Basics

This chapter describes IPv6 basic commands.

Topics:

- `clear ipv6 fib`
- `clear ipv6 route`
- `clear ipv6 mld_host`
- `ipv6 address autoconfig`
- `ipv6 address`
- `ipv6 address eui64`
- `ipv6 control-plane icmp error-rate-limit`
- `ipv6 flowlabel-zero`
- `ipv6 host`
- `ipv6 name-server`
- `ipv6 nd dad attempts`
- `ipv6 nd disable-reachable-timer`
- `ipv6 nd dns-server`
- `ipv6 nd prefix`
- `ipv6 route`
- `ipv6 unicast-routing`
- `show ipv6 cam stack-unit`
- `show ipv6 control-plane icmp`
- `show ipv6 fib stack-unit`
- `show ipv6 flowlabel-zero`
- `show ipv6 interface`
- `show ipv6 mld_host`
- `show ipv6 route`
- `trust ipv6-diffserv`

clear ipv6 fib

Clear (refresh) all forwarding information base (FIB) entries on a linecard or stack unit.

Syntax `clear ipv6 fib linecard slot | stack-unit unit-number`

Parameters

<i>slot</i>	Enter the slot number to clear the FIB for a linecard.
<i>unit-number</i>	Enter the stack member number.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ipv6 route

Clear (refresh) all or a specific route from the IPv6 routing table.

Syntax `clear ipv6 route { * | ipv6-address prefix-length }`

Parameters

*	Enter the * to clear (refresh) all routes from the IPv6 routing table.
ipv6-address prefix-length	Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128.

 **NOTE:** The :: notation specifies successive hexadecimal fields of zeros.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ipv6 mld_host

Clear the IPv6 MLD host counters and reset the elapsed time.

Syntax `clear ipv6 mld_host`

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 address autoconfig

Configure IPv6 address auto-configuration for the management interface.

Syntax `ipv6 address autoconfig`

To disable the address autoconfig operation on the management interface, use the `no ipv6 address autoconfig` command.

Default	Disabled
Command Modes	INTERFACE (management interface only)
Supported Modes	Full-Switch

Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information

- SAA can configure up to two addresses. If any preferred prefix or valid timers time out, the corresponding address are deprecated or removed. If an address is removed due to a time-out, an address from the current unused prefix is used to create a new address. If there are no remaining prefixes, the software waits to receive a new prefix from the RA.
- If auto-configuration is enabled, all IPv6 addresses on that management interface are auto-configured. Manual and auto-configurations are not supported on a single management interface.
- Removing auto-configuration removes all auto-configured IPv6 addresses and the link-local IPv6 address from that management interface.
- IPv6 addresses on a single management interface cannot be members of the same subnet.
- IPv6 secondary addresses on management interfaces across a platform must be members of the same subnet.
- IPv6 secondary addresses on management interfaces should not match the virtual IP address and should not be in the same subnet as the virtual IP.

ipv6 address

Configure an IPv6 address to an interface.

Syntax `ipv6 address {ipv6-address prefix-length}`
To remove the IPv6 address, use the `no ipv6 address {ipv6-address prefix-length}` command.

Parameters *ipv6-address prefix-length* Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

Defaults	none
Command Modes	INTERFACE
Supported Modes	Full-Switch

Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information

- If two addresses are configured, delete an existing address before configuring a new address.
- If the last manually-configured global IPv6 address is removed using the “no” form of the command, the link-local IPv6 address is removed automatically.
- IPv6 addresses on a single management interface cannot be members of the same subnet.
- IPv6 secondary addresses on management interfaces across platform must be members of the same subnet.
- IPv6 secondary addresses on management interfaces should not match the virtual IP address and should not be in the same subnet as the virtual IP.

NOTE: Do not use the /128 prefix length on physical or port channel interfaces. You can use the /128 prefix length on loopback interfaces.

Example

```
Dell(conf)#interface tengigabitethernet x/x
Dell(conf-if-te-x/x)#ipv6 address ?
X:X:X:X::X IPv6 address
Dell(conf-if-te-x/x)#ipv6 address 2002:1:2::3 ?
<0-128> Prefix length in bits
Dell(conf-if-te-x/x)#ipv6 address 2002:1:2::3 /96 ?
Dell(conf-if-te-x/x)#ipv6 address 2002:1:2::3 /96
Dell(conf-if-te-x/x)#show config
```

ipv6 address eui64

Configure IPv6 EUI64 address configuration on the interface.

Syntax

```
ipv6 address {ipv6-address prefix-length} eui64
```

To disable IPv6 EUI64 address autoconfiguration, use the `no ipv6 address {ipv6-address prefix-length} eui64` command.

Parameters

ipv6-address prefix-length Enter the IPv6 prefix in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command allows you to create an EUI64 address based on the specified prefix and MAC address only. Prefixes may be configured on the interface using the `ipv6 nd prefix` command without creating an EUI64 address.

Example

```
Dell(conf)#int ten 0/4
Dell(conf-if-te-0/4)#ipv6 address 200:1::/64 eui64
Dell(conf)#int ten 0/6
Dell(conf-if-te-0/6)#ipv6 address 801:10::/64 eui64
```

ipv6 control-plane icmp error-rate-limit

Configure the maximum number of ICMP error packets per second that can be sent per second.

Syntax `ipv6 control-plane icmp error-rate-limit {1-200}`
To restore the default value, use the `no ipv6 control-plane icmp error-rate-limit` command.

Parameters

pps	Enter the maximum number of error packets generated per second. The range is from 1 to 200, where 0 disables the rate-limiting.
------------	---

Default 100 pps

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 flowlabel-zero

Configure system to set the flow label field in the packets to zero.

Syntax `ipv6 flowlabel-zero`
To disable the 0 from being set in the field and allow the rotocol operations to fill the field, use the `no ipv6 flowlabel-zero` command.

Default Disabled

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If the flowlabel value is already set for BGP or SSH, the system defaults to the already configured value. All packets on the same connection are considered part of the same flow by the system. For new connections, set the new flowlabel to zero.

ipv6 host

Assign a name and IPv6 address the host-to-IPv6 address mapping table uses.

Syntax `ipv6 host name ipv6-address`

To remove an IP host, use the `no ipv6 host name {ipv6-address}`.

Parameters	<i>name</i>	Enter a text string to associate with one IP address.
	<i>ipv6-address</i>	Enter the IPv6 address (X:X:X::X) to be mapped to the name.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 name-server

Enter up to six IPv6 addresses of name servers. The order you enter the addresses determines the order of their use.

Syntax `ipv6 name-server ipv6-address [ipv6-address2... ipv6-address6]`
To remove a name server, use the `no ipv6 name-server ipv6-address` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address (X:X:X::X) of the name server to be used.
	<i>ipv6-address2... ipv6-address6</i>	(OPTIONAL) Enter up to five more IPv6 addresses, in the x:x:x::x format, of name servers to be used. Separate the IPv6 addresses with a space.

 **NOTE: The :: notation specifics successive hexadecimal fields of zeros.**

Defaults	none	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can separately configure both IPv4 and IPv6 domain name servers.

ipv6 nd dad attempts

To perform duplicate address detection (DAD) on the management interface, configure the number of neighbor solicitation messages that are sent.

Syntax `ipv6 nd dad attempts {number of attempts}`

To restore the default value, use the `no ipv6 nd dad attempts` command.

Parameters	<i>number of attempts</i>	Enter the number of attempts to be made to detect a duplicate address. The range is from 0 to 15. Setting the value to 0 disables DAD on the interface.
Default	3 attempts	
Command Modes	INTERFACE (management interface only)	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 nd disable-reachable-timer

Keep the learnt neighbor discovery entries stateless so that the entries do not time out.

Syntax	<code>ipv6 nd disable-reachable-timer</code> To restore to default, use the <code>no ipv6 nd disable-reachable-timer</code> command.	
Default	Disabled	
Command Modes	INTERFACE	
Command History	This guide is platform-specific. For command information about other platforms, see the relevant <i>Dell EMC Networking OS Command Line Reference Guide</i> .	
	Version	Description
	9.11.0.1	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S4810, S4820, S5000, S6000, S6010-ON, S6000-ON, S6100-ON, Z9100-ON, C9010, Z9500, MXL, and FN IOM.

ipv6 nd dns-server

Configures Recursive DNS Server (RDNSS) addresses to be distributed via IPv6 router advertisements to an IPv6 device.

Syntax	<code>ipv6 nd dns-server {ipv6-RDNSS-address} {lifetime infinite}</code> To remove the IPv6 RDSS configuration, use <code>no ipv6 nd dns-server {ipv6-RDNSS-address} {lifetime infinite}</code>
---------------	--

Parameters	<i>ipv6-RDNSS-address</i>	Enter the IPv6 Recursive DNS Server's (RDNSS) address. You can specify up to 4 IPv6 RDNSS server addresses.
	<i>lifetime</i>	Enter the lifetime in seconds. The amount of time the IPv6 host can use the IPv6 RDNSS address for name resolution. The range is 0 to 4294967295 seconds. When you specify the maximum lifetime value of 4294967295 or <i>infinite</i> , the lifetime does not expire.

A value of 0 indicates to the host that the RDNSS address should not be used. You must specify a lifetime using the `lifetime` or `infinite` parameter.

infinite Enter the keyword `infinite` to specify that the RDNSS lifetime does not expire.

Defaults Not Configured

Command Modes INTERFACE CONFIG

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced on the MXL.

Usage Information Use this command to add, edit, or delete an IPv6 RDNSS address and lifetime value. You can configure up to four IPv6 RDNSS addresses. You must specify a lifetime using the `lifetime` or `infinite` parameter.

Example

ipv6 nd prefix

Specify which IPv6 prefixes are included in Neighbor Advertisements.

Syntax `ipv6 nd prefix {ipv6-prefix | prefix-length | default} [no-advertise] | [no-autoconfig] [no-rtr-address] [off-link] [lifetime {valid | infinite} {preferred | infinite}]`

Parameters

<i>ipv6-prefix</i>	Enter an IPv6 prefix.
<i>prefix-length</i>	Enter the prefix then the prefix length. The length range is from 0 to 128.
default	Enter the keyword <code>default</code> to set default parameters for all prefixes.
no-advertise	Enter the keyword <code>no-advertise</code> to prevent the specified prefix from being advertised.
no-autoconfig	Enter the keywords <code>no-autoconfig</code> to disable Stateless Address Autoconfiguration.
no-rtr-address	Enter the keyword <code>no-rtr-address</code> to exclude the full router address from router advertisements (the R bit is not set).
off-link	Enter the keywords <code>off-link</code> to advertise the prefix without stating to recipients that the prefix is either on-link or off-link.
<i>valid-lifetime</i> infinite	Enter the amount of time that the prefix is advertised, or enter <code>infinite</code> for an unlimited amount of time. The range is from 0 to 4294967295. The default is 2592000 . The maximum value means that the preferred lifetime does not expire for the valid-life time parameter.
<i>preferred-lifetime</i> infinite	Enter the amount of time that the prefix is preferred, or enter <code>infinite</code> for an unlimited amount of time. The range is from 0 to 4294967295. The default is 2592000 . The maximum value means that the preferred lifetime and does not expire.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

By default, all prefixes configured as addresses on the interface are advertised. This command allows control over the individual parameters per prefix; you can use the `default` keyword to use the default parameters for all prefixes. If a prefix has been configured with lifetime parameter values, the default values cannot be applied using the `ipv6 nd prefix default no-autoconfig` command.

ipv6 route

Establish a static IPv6 route.

Syntax

```
ipv6 route ipv6-address prefix-length {ipv6-address | interface | interface  
ipv6-address} [distance] [tag value] [permanent]
```

To remove the IPv6 route, use the `no ipv6 route ipv6-address prefix-length {ipv6-address | interface | interface ipv6-address} [distance] [tag value] [permanent]` command.

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

interface

(OPTIONAL) Enter the following keywords and slot/port or number information:

- For a loopback interface, enter the keyword `loopback` then a number from zero (0) to 16383.
- For the null interface, enter the keyword `null` then zero (0).
- For a port channel interface, enter the keyword `port-channel` then the port channel number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a tunnel interface, enter the keyword `tunnel` then the tunnel interface number. The range is from 1 to 16383.
- For a VLAN interface, enter the keyword `VLAN` then the vlan number. The range is from 1 to 4094.

If you configure a static IPv6 route using an egress interface and enter the `ping` command to reach the destination IPv6 address, the ping operation may not work. Configure the IPv6 route using a next-hop IPv6 address in order for the `ping` command to detect the destination address.

ipv6-address

(OPTIONAL) Enter the forwarding router IPv6 address in the x:x:x:x format.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

distance

(OPTIONAL) Enter a number as the metric distance assigned to the route. The range is from 1 to 255.

tag value

(OPTIONAL) Enter the keyword `tag` then a tag value number. The range is from 1 to 4294967295.

permanent (OPTIONAL) Enter the keyword `permanent` to specify that the route is not to be removed, even if the interface assigned to that route goes down.

① **NOTE:** If you disable the interface with an IPv6 address associated with the keyword `permanent`, the route disappears from the routing table.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When the interface goes down, the system withdraws the route. The route is re-installed by the system when the interface comes back up. When a recursive resolution is “broken,” the system withdraws the route. The route is re-installed by the system when the recursive resolution is satisfied.

After an IPv6 static route interface is created, if an IP address is not assigned to a peer interface, the peer must be manually pinged to resolve the neighbor information.

Example

```
Dell(conf)#ipv6 route ?
X:X:X:X::X          IPv6 prefix x:x::y
Dell(conf)#ipv6 route 44::0 ?
/nn                 /nn Mask in slash format
Dell(conf)#ipv6 route 44::0 /64 ?
X:X:X:X::X          Forwarding router's address
gigabitethernet     Gigabit Ethernet interface
loopback            Loopback interface
null                Null interface
port-channel        Port-Channel interface
tenGigabitethernet  TenGigabit Ethernet interface
fortyGigE           FortyGigabit Ethernet interface
tunnel              Tunnel interface
vlan                Vlan interface
Dell(conf)#ipv6 route 44::0 /64 33::1 ?
<1-255>             Distance metric for this route
permanent          Permanent route
tag                Set tag for this route

Dell(conf)#ipv6 route 44::0 /64 33::1
Dell(conf)#ipv6 route 44::0 /64 tengigabitethernet 0/1 ?
X:X:X:X::X          Forwarding router's address
Dell(conf)#ipv6 route 44::0 /64 tengigabitethernet 0/1 66::1
Dell(conf)#
```

Related Commands `show ipv6 route` — views the IPv6 configured routes.

ipv6 unicast-routing

Enable IPv6 Unicast routing.

Syntax `ipv6 unicast-routing`

To disable unicast routing, use the `no ipv6 unicast-routing` command.

Defaults	Enabled
Command Modes	CONFIGURATION
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Because this command is enabled by default, it does not appear in the running configuration. When you disable unicast routing, the `no ipv6 unicast-routing` command is included in the running configuration. Whenever unicast routing is disabled or re-enabled, the system generates a syslog message indicating the action.

Disabling unicast routing on a chassis causes the following behavior:

- static and protocol learned routes are removed from RTM and from the CAM; packet forwarding to these routes is terminated
- connected routes and resolved neighbors remain in the CAM and new IPv6 neighbors are still discoverable
- additional protocol adjacencies (OSPFv3 and BGP4) are brought down and no new adjacencies are formed
- the IPv6 address family configuration (under `router bgp`) is deleted
- IPv6 Multicast traffic continues to flow unhindered

show ipv6 cam stack-unit

Displays the IPv6 CAM entries for the specified stack-unit.

Syntax `show ipv6 cam stack-unit unit-number port-set {0-0} [summary | index | ipv6 address]`

Parameters	<i>unit-number</i>	Enter the stack unit's ID number. The range is from 0 to 5.
	<i>port-set</i>	Enter the keyword <code>Port Set</code> .
	<i>summary</i>	(OPTIONAL) Enter the keyword <code>summary</code> to display a table listing network prefixes and the total number prefixes which can be entered into the IPv6 CAM.
	<i>index</i>	(OPTIONAL) Enter the index in the IPv6 CAM.
	<i>ipv6-address</i>	Enter the IPv6 address in the <code>x::x::x/n</code> format to display networks that have more specific prefixes. The range is from <code>/0</code> to <code>/128</code> .

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

Defaults	none
Command Modes	<ul style="list-style-type: none"> • EXEC • EXEC Privilege
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

NOTE: If a route has a mask greater than 64, no output is displayed and no output is displayed for `show ipv6 cam stack-unit unit-number port-set {0-1} ipv6-address`, but an equivalent /64 entry would be listed in the `show ipv6 cam stack-unit unit-number port-set {0-0}` output. Similarly, if there is more than one ECMP object with a destination route that has a mask greater than 64, if the first 64 bits in the destination routes of the ECMP objects are the same, only one route is installed in CAM even though multiple ECMP path entries exist.

show ipv6 control-plane icmp

Displays the status of the icmp control-plane setting for the error eate limit setting.

Syntax	<code>show ipv6 control-plane icmp</code>	
Default	100	
Command Modes	EXEC	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `ipv6 flowlabel-zero` — Configure IPv6 address auto-configuration for the management interface.

show ipv6 fib stack-unit

View all FIB entries.

Syntax `show ipv6 fib stack-unit unit-number [summary | ipv6-address]`

Parameters	<i>slot-number</i>	Enter the number of the stack unit. The range is from 0 to 5.
	<i>summary</i>	(OPTIONAL) Enter the keyword <code>summary</code> to view a summary of entries in IPv6 cam.
	<i>ipv6-address</i>	Enter the IPv6 address in the <code>x:x:x::x/n</code> format to display networks that have more specific prefixes. The range is from /0 to /128.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

Command Modes	· EXEC
	· EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Host tables are not stored in CAM tables. Entries for `camIndex` displays as zero (0) on the `show ipv6 fib stack-unit` output for neighbor entries, such as address resolution protocol (ARP) entries.

show ipv6 flowlabel-zero

Display the flow label zero setting.

Syntax	<code>show ipv6 flowlabel-zero</code>
Default	Disabled
Command Modes	EXEC
Supported Modes	Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ipv6 nd dad attempts](#) — Configure system to set the flow label field in the packets to zero.

show ipv6 interface

Display the status of interfaces configured for IPv6.

Syntax	<code>show ipv6 interface <i>interface</i> [brief] [configured] [gigabitethernet <i>slot</i> <i>slot/port</i>] [linecard <i>slot-number</i>][loopback <i>interface-number</i>] [managementethernet <i>slot/port</i>] [port-channel <i>number</i>] [tengigabitethernet <i>slot</i> <i>slot/port</i>] [fortyGigE <i>slot</i> <i>slot/port</i>] [vlan <i>vlan-id</i>]</code>
---------------	---

Parameters

<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Loopback interface, enter the keyword <code>Loopback</code> then a number from 0 to 16383.• For the Null interface, enter the keyword <code>null</code> then zero (0).• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.• For stacking, enter the keywords <code>stack-unit</code> then the stack-unit ID.• For a tunnel interface, enter the keyword <code>tunnel</code> then the tunnel ID.• For a VLAN interface, enter the keyword <code>VLAN</code>.• For a port channel interface, enter the keywords <code>port-channel</code>.
<i>brief</i>	(OPTIONAL) View a summary of IPv6 interfaces.
<i>configured</i>	(OPTIONAL) View information on all IPv6 configured interfaces.

gigabitethernet	(OPTIONAL) View information for an IPv6 gigabitethernet interface.
linecard slot/ port	(OPTIONAL) View information for a specific IPv6 linecard or stack-unit. The range is 0 to 11.
managementethernet slot/ port	(OPTIONAL) View information on an IPv6 Management port. Enter the slot number (0-1) and port number zero (0).
loopback	(OPTIONAL) View information for IPv6 Loopback interfaces.
port-channel	(OPTIONAL) View information for IPv6 port channels.
tengigabitethernet	(OPTIONAL) View information for an IPv6 tengigabitethernet interface.
fortyGigE	(OPTIONAL) View information for an IPv6 fortygigabitethernet interface.
vlan	(OPTIONAL) View information for IPv6 VLANs.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.11(0.0)	Updated the command output to include the unicast reverse path forwarding (uRPF) status.
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The Management port is enabled by default (`no shutdown`). If necessary, use the `ipv6 address` command to assign an IPv6 address to the Management port.

Example

```
Dell#show ipv6 interface tengigabitethernet 0/2
TenGigabitEthernet 0/2 is up, line protocol is up
  IPV6 is enabled
  Link Local address: fe80::201:e8ff:fea7:497e
  Global Unicast address(es):
    100::2, subnet is 100::/64 (MANUAL)
    Remaining lifetime: infinite
  Global Anycast address(es):
  Joined Group address(es):
    ff02::1
    ff02::2
    ff02::1:ff00:2
    ff02::1:ffa7:497e
  ND MTU is 0
  ICMP redirects are not sent
  DAD is enabled, number of DAD attempts: 3
  ND reachable time is 39610 milliseconds
  ND base reachable time is 30000 milliseconds
  ND advertised reachable time is 0 milliseconds
  ND advertised retransmit interval is 0 milliseconds
  ND router advertisements are sent every 198 to 600 seconds
  ND router advertisements live for 1800 seconds
  ND advertised hop limit is 64
  IPv6 hop limit for originated packets is 64
  IPv6 unicast RPF check is not supported
Dell#
```

**Example
(Managementethernet)**

```
Dell#show ipv6 interface managementethernet 0/0
ManagementEthernet 0/0 is up, line protocol is up
  IPV6 is enabled
  Link Local address: fe80::201:e8ff:fea7:497e
  Global Unicast address(es):
    Actual address is 300::1, subnet is 300::/64 (MANUAL)
    Remaining lifetime: infinite
    Virtual-IP IPv6 address is not set
  Global Anycast address(es):
  Joined Group address(es):
    ff02::1
    ff02::1:ff00:1
    ff02::1:ffa7:497e
  ND MTU is 0
  ICMP redirects are not sent
  DAD is enabled, number of DAD attempts: 3
  ND reachable time is 20410 milliseconds
  ND base reachable time is 30000 milliseconds
  ND retransmit interval is 1000 milliseconds
  ND hop limit is 64
Dell#
```

Example (Brief)

```
Dell#show ipv6 interface brief
TenGigabitEthernet 0/2          [administratively down/down]
  fe80::201:e8ff:fea7:497e
  2002:1:2::3/96
TenGigabitEthernet 0/8          [up/up]
  fe80::201:e8ff:fea7:497e
  100::2/64
ManagementEthernet 0/0         [up/up]
  fe80::201:e8ff:fea7:497e
  300::1/64
Dell#
```

Example (tunnel)

```
Dell#show ipv6 interface tun 1
Tunnel 1 is up, line protocol is up
  IPV6 is enabled
  Link Local address: fe80::201:e8ff:fea7:497e
  Global Unicast address(es):
    400::1, subnet is 400::/64 (MANUAL)
    Remaining lifetime: infinite
  Global Anycast address(es):
  Joined Group address(es):
    ff02::1
    ff02::2
    ff02::1:ff00:1
    ff02::1:ffa7:497e
  ND MTU is 0
  ICMP redirects are not sent
  DAD is enabled, number of DAD attempts: 3
  ND reachable time is 20410 milliseconds
  ND base reachable time is 30000 milliseconds
  ND advertised reachable time is 0 milliseconds
  ND advertised retransmit interval is 0 milliseconds
  ND router advertisements are sent every 198 to 600 seconds
  ND router advertisements live for 1800 seconds
  ND advertised hop limit is 64
  IPv6 hop limit for originated packets is 64
  IPv6 unicast RPF check is not supported
Dell#
```

show ipv6 mld_host

Display the IPv6 MLD host counters.

Syntax `show ipv6 mld_host`

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ipv6 mld-host` command shown in the following example.

Field	Description
Valid MLD Packets	The total number of packets received and sent from the last time the elapsed time was cleared.
Reports	The total number of reports (queries and unsolicited reports generated from joins or leaves) that have been received or sent.
Leaves	The number of Multicast leaves that have been sent.
MLDv1 queries	The number of MLDv1 queries that have been received.
MLDv2 queries	The number of MLDv2 queries that have been received.
Malformed Packets	The number of MLDv1 and MLDv2 packets that do not match the requirement for a valid MLD packet.

Example

```
MLD Host Traffic Counters
Elapsed time since counters cleared: 0028:33:52
Received      Sent
Valid MLD Packets 97962      18036
Reports        79962      18034
Leaves         ----       0
MLDv2 Queries  18000      ----
MLDv1 Queries   0          ----
Errors:
Malformed Packets: 4510
```

show ipv6 route

Displays the IPv6 routes.

Syntax `show ipv6 route [ipv6-address prefix-length] [hostname] [all] [bgp as number] [connected] [isis tag] [list prefix-list name] [ospf process-id] [rip] [static] [summary]`

Parameters

ipv6-address prefix-length (OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

hostname	(OPTIONAL) View information for this IPv6 routes with Host Name.
all	(OPTIONAL) View information for all IPv6 routes.
bgp	(OPTIONAL) View information for all IPv6 BGP routes.
connected	(OPTIONAL) View only the directly connected IPv6 routes.
isis	(OPTIONAL) View information for all IPv6 IS-IS routes.
list	(OPTIONAL) View the IPv6 prefix list.
ospf	(OPTIONAL) View information for all IPv6 OSPF routes.
rip	(OPTIONAL) View information for all IPv6 RIP routes.
static	(OPTIONAL) View only routes configured by the <code>ipv6 route</code> command.
summary	(OPTIONAL) View a brief list of the configured IPv6 routes.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ipv6 route` command shown in the following examples.

Field	Description
(undefined)	Identifies the type of route: <ul style="list-style-type: none"> L = Local C = connected S = static R = RIP B = BGP IN = internal BGP EX = external BGP LO = Locally Originated O = OSPF IA = OSPF inter-area N1 = OSPF NSSA external type 1 N2 = OSPF NSSA external type 2 E1 = OSPF external type 1 E2 = OSPF external type 2 i = IS-IS L1 = IS-IS level-1

Field	Description
	<ul style="list-style-type: none"> · L2 = IS-IS level-2 · IA = IS-IS inter-area · * = candidate default · > = non-active route · + = summary routes
Destination	Identifies the route's destination IPv6 address.
Gateway	Identifies whether the route is directly connected and on which interface the route is configured.
Dist/Metric	Identifies if the route has a specified distance or metric.
Last Change	Identifies when the route was last changed or configured.

Example

```
Dell#show ipv6 route
Codes: C - connected, S - static, R - RIP,
       B - BGP, IN - internal BGP, EX - external BGP, LO - Locally Originated,
       O - OSPF, IA - OSPF inter area, N1 - OSPF NSSA external type 1,
       N2 - OSPF NSSA external type 2, E1 - OSPF external type 1,
       E2 - OSPF external type 2, i - IS-IS, L1 - IS-IS level-1,
       L2 - IS-IS level-2, IA - IS-IS inter area, * - candidate default,
Gateway of last resort is not set
Destination  Dist/Metric,      Gateway,    Last Change
-----
C    100::/64 [0/0]
      Direct, Te 0/8, 20:00:18
C    400::/64 [0/0]
      Direct, Tu 1, 00:09:02
S    800::/64 [1/0]
      via 100::1, Te 0/8, 00:00:50
L    fe80::/10 [0/0]
      Direct, Nu 0, 20:00:18
Dell#
```

Example (Summary)

```
Dell#show ipv6 route summary
Route Source      Active Routes  Non-active Routes
connected         3              0
static            1              0
Total             4              0
Total 4 active route(s) using 928 bytes
Dell#
```

trust ipv6-diffserv

Allows the dynamic classification of IPv6 DSCP.

Syntax

`trust ipv6-diffserv`

To remove the definition, use the `no trust ipv6-diffserv` command.

Defaults

none

Command Modes

CONFIGURATION-POLICY-MAP-IN

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you configure trust IPv6 diffserv, matched bytes/packets counters are not incremented in the `show qos statistics` command.

Trust diffserv (IPv4) can co-exist with trust ipv6-diffserv in an Input Policy Map. Dynamic classification happens based on the mapping as shown:

IPv6 Service Class Field	Queue ID
111XXXXX	7
110XXXXX	6
101XXXXX	5
100XXXXX	4
011XXXXX	3
010XXXXX	2
001XXXXX	1
000XXXXX	0

IPv6 Border Gateway Protocol (IPv6 BGP)

IPv6 Border Gateway Protocol (IPv6 BGP) is supported on Dell Networking platforms.

This chapter includes the following sections:

- [IPv6 BGP Commands](#)
- [IPv6 MBGP Commands](#)

Topics:

- [IPv6 BGP Commands](#)
- [IPv6 MBGP Commands](#)

IPv6 BGP Commands

BGP is an external gateway protocol that transmits interdomain routing information within and between autonomous systems (AS). BGP version 4 (BGPv4) supports classless interdomain routing and the aggregation of routes and AS paths. Basically, two routers (called neighbors or peers) exchange information including full routing tables and periodically send messages to update those routing tables.

The following commands allow you to configure and enable BGP.

address family

This command changes the context to subsequent address family identifier (SAFI).

Syntax `address family ipv6 unicast`
To remove SAFI context, use the `no address family ipv6 unicast` command.

Parameters

ipv6	Enter the keyword <code>ipv6</code> to specify the address family as IPv6.
unicast	Enter the keyword <code>unicast</code> to specify multicast as SAFI.

Defaults IPv6 Unicast

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

After this command is executed, all subsequent commands apply to this address family. You can exit from this AFI/SAFI to the IPv6 Unicast (the default) family by entering the `exit` command and returning to the Router BGP context.

aggregate-address

Summarize a range of prefixes to minimize the number of entries in the routing table.

Syntax `aggregate-address ipv6-address prefix-length [advertise-map map-name] [as-set] [attribute-map map-name] [summary-only] [suppress-map map-name]`

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x:x format then the prefix length in the / x format. The range is from /0 to /128.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

advertise-map map-name (OPTIONAL) Enter the keywords `advertise-map` then the name of a configured route map to set filters for advertising an aggregate route.

as-set (OPTIONAL) Enter the keywords `as-set` to generate path attribute information and include it in the aggregate. AS_SET includes AS_PATH and community information from the routes included in the aggregated route.

attribute-map map-name (OPTIONAL) Enter the keywords `attribute-map` then the name of a configured route map to modify attributes of the aggregate, excluding AS_PATH and NEXT_HOP attributes.

summary-only (OPTIONAL) Enter the keywords `summary-only` to advertise only the aggregate address. Specific routes are not advertised.

suppress-map map-name (OPTIONAL) Enter the keywords `suppress-map` then the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults

Not configured.

Command Modes

- ROUTER BGP ADDRESS FAMILY
- ROUTER BGP ADDRESS FAMILY IPv6

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.

Do not add the `as-set` parameter to the aggregate if routes within the aggregate are constantly changing as the aggregate will flap to keep track of the changes in the AS_PATH.

In route maps used in the `suppress-map` parameter, routes meeting the `deny` clause are not suppress; in other words, they are allowed. The opposite is true: routes meeting the `permit` clause are suppressed.

If the route is injected using the `network` command, that route still appears in the routing table if you configure the `summary-only` parameter in the `aggregate-address` command.

The `summary-only` parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the `neighbor distribute-list` command.

In the `show ip bgp ipv6 unicast` command, aggregates contain an 'a' in the first column and routes suppressed by the aggregate contain an 's' in the first column.

bgp always-compare-med

Allows you to enable comparison of the MULTI_EXIT_DISC (MED) attributes in the paths from different external ASs.

Syntax `bgp always-compare-med`
To disable comparison of MED, use the `no bgp always-compare-med` command.

Defaults Disabled (that is, the software only compares MEDs from neighbors within the same AS).

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Any update without a MED attribute is the least preferred route.

If you enable this command, use the `capture bgp-pdu max-buffer-size *` command to recompute the best path.

bgp bestpath as-path ignore

Ignore the AS PATH in BGP best path calculations.

Syntax `bgp bestpath as-path ignore`
To return to the default, use the `no bgp bestpath as-path ignore` command.

Defaults Disabled (that is, the software considers the AS_PATH when choosing a route as best).

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you enable this command, use the `capture bgp-pdu max-buffer-size *` command to recompute the best path.

bgp bestpath med confed

Enable MULTI_EXIT_DISC (MED) attribute comparison on paths learned from BGP confederations.

Syntax `bgp bestpath med confed`
To disable MED comparison on BGP confederation paths, use the `no bgp bestpath med confed` command.

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The software compares the MEDs only if the path contains no external autonomous system numbers.

If you enable this command, use the `capture bgp-pdu max-buffer-size *` command to recompute the best path.

bgp bestpath med missing-as-best

During path selection, indicate a preference to paths with missing MED (MULTI_EXIT_DISC) over those paths with an advertised MED attribute.

Syntax `bgp bestpath med missing-as-best`
To return to the default selection, use the `no bgp bestpath med missing-as-best` command.

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The MED is a 4-byte unsigned integer value and the default behavior is to assume a missing MED as 4294967295. This command causes a missing MED to be treated as 0. During path selection, paths with a lower MED are preferred over those with a higher MED.

bgp client-to-client reflection

Allows you to enable route reflection between clients in a cluster.

Syntax `bgp client-to-client reflection`
To disable client-to-client reflection, use the `no bgp client-to-client reflection` command.

Defaults Enabled when a route reflector is configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Route reflection to clients is not necessary if all client routers are fully meshed.

Related Commands [bgp cluster-id](#) — assigns an ID to a BGP cluster with two or more route reflectors.
[neighbor route-reflector-client](#) — configures a route reflector and clients.

bgp cluster-id

Assign a cluster ID to a BGP cluster with more than one route reflector.

Syntax `bgp cluster-id {ip-address | number}`
To delete a cluster ID, use the `no bgp cluster-id {ip-address | number}` command.

Parameters

<i>ip-address</i>	Enter an IP address as the route reflector cluster ID.
<i>number</i>	Enter a route reflector cluster ID as a number from 1 to 4294967295.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When a BGP cluster contains only one route reflector, the cluster ID is the route reflector's router ID. For redundancy, a BGP cluster may contain two or more route reflectors and you assign a cluster ID with the `bgp cluster-id` command. Without a cluster ID, the route reflector cannot recognize route updates from the other route reflectors within the cluster.

The default format for displaying the cluster-id is dotted decimal, but if you enter the cluster-id as an integer, it displays as an integer.

Related Commands `bgp client-to-client reflection` — enables route reflection between the route reflector and the clients.
`neighbor route-reflector-client` — configures a route reflector and clients.
`show ip bgp ipv6 unicast cluster-list` — views paths with a cluster ID.

bgp confederation identifier

Configure an identifier for a BGP confederation.

Syntax `bgp confederation identifier as-number`
To delete a BGP confederation identifier, use the `no bgp confederation identifier as-number` command.

Parameters `as-number` Enter the AS number. The range is from 1 to 65535.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The autonomous systems configured in this command are visible to the EBGp neighbors. Each autonomous system is fully meshed and contains a few connections to other autonomous systems. The next hop, MED, and local preference information is preserved throughout the confederation.

The system accepts confederation EBGp peers without a LOCAL_PREF attribute. The software sends AS_CONFED_SET and accepts AS_CONFED_SET and AS_CONF_SEQ.

bgp confederation peers

Specify the autonomous systems (ASs) that belong to the BGP confederation.

Syntax `bgp confederation peers as-number [...as-number]`
To remove bgp confederation peers, use the `no bgp confederation peer` command.

Parameters	<i>as-number</i>	Enter the AS number. The range is 1 to 65535.
	<i>...as-number</i>	(OPTIONAL) Enter up to 16 confederation numbers. The range is from 1 to 65535.
Defaults	Not configured.	
Command Modes	ROUTER BGP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The Autonomous Systems configured in this command are visible to the EBGp neighbors. Each Autonomous System is fully meshed and contains a few connections to other Autonomous Systems.	
	After specifying autonomous systems numbers for the BGP confederation, recycle the peers to update their configuration.	
Related Commands	bgp confederation identifier — configures a confederation ID.	

bgp dampening

Enable BGP route dampening and configure the dampening parameters.

Syntax `bgp dampening [half-life reuse suppress max-suppress-time] [route-map map-name]`

Parameters	<i>half-life</i>	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half, after the half-life period expires. The range is from 1 to 45. The default is 15 minutes .
	<i>reuse</i>	(OPTIONAL) Enter a number as the reuse value, which is compared to the flapping route's Penalty value. If the Penalty value is less than the reuse value, the flapping route is once again advertised (or no longer suppressed). The range is from 1 to 20000. The default is 750 .
	<i>suppress</i>	(OPTIONAL) Enter a number as the suppress value, which is compared to the flapping route's Penalty value. If the Penalty value is greater than the suppress value, the flapping route is no longer advertised (that is, it is suppressed). The range is from 1 to 20000. The default is 2000 .
	<i>max-suppress-time</i>	(OPTIONAL) Enter the maximum number of minutes a route can be suppressed. The default is four times the half-life value. The range is from 1 to 255. The default is 60 minutes .
	<i>route-map map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route map. Only match commands in the configured route map are supported.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you enter `bgp dampening`, the default values for `half-life`, `reuse`, `suppress`, and `max-suppress-time` are applied. The parameters are position-dependent; therefore, if you configure one parameter, you must configure the parameters in the order they appear in the command.

Related Commands [show ip bgp ipv6 unicast dampened-paths](#) — views the BGP paths.

bgp default local-preference

Change the default local preference value for routes exchanged between internal BGP peers.

Syntax

```
bgp default local-preference value
```

To return to the default value, use the `no bgp default local-preference` command.

Parameters

value	Enter a number to assign to routes as the degree of preference for those routes. When routes are compared, the higher the degree of preference or local preference value, the more the route is preferred. The range is from 0 to 4294967295. The default is 100 .
--------------	---

Defaults

100

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

bgp enforce-first-as

Disable (or enable) `enforce-first-as` check for updates received from EBGp peers.

Syntax

```
bgp enforce-first-as
```

To turn off the default, use the `no bgp enforce-first-as` command.

Defaults

Enabled.

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the 10/40GbE Switch IO Module.

Usage Information This is enabled by default; that is, for all updates received from EBGP peers, BGP ensures that the first AS of the first AS segment is always the AS of the peer. If not, the update is dropped and a counter is incremented. To view the failed enforce-first-as check counter, use the `show ip bgp ipv6 unicast neighbors` command.

If you disable `enforce-first-as`, view it using the `show ip protocols` command.

Related Commands [show ip bgp ipv6 unicast neighbors](#) — displays IPv6 routing information exchanged by BGP neighbors.

[show ip protocols](#) — views information on routing protocols.

bgp fast-external-fallover

Enable the fast external fallover feature, which immediately resets the BGP session if a link to a directly connected external peer fails.

Syntax `bgp fast-external-fallover`
To disable fast external fallover, use the `no bgp fast-external-fallover` command.

Defaults Enabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `bgp fast-external-fallover` command appears in the `show config` command output.

bgp four-octet-as-support

Enable 4-byte support for the BGP process.

Syntax `bgp four-octet-as-support`
To disable fast external fallover, use the `no bgp four-octet-as-support` command.

Defaults Disabled (supports 2-Byte format)

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Routers supporting 4-Byte ASNs advertise that function in the OPEN message. The behavior of a 4-Byte router is slightly different depending on whether it is speaking to a 2-Byte router or a 4-Byte router.

When creating Confederations, all the routers in the Confederation must be 4- or 2-byte identified routers. You cannot mix them.

Where the 2-Byte format is from 1 to 65535, the 4-Byte format is from 1 to 4294967295. Both formats are accepted, and the advertisements reflect the entered format.

For more information about using the 2- or 4-Byte format, refer to the *Dell Networking OS Configuration Guide*.

bgp graceful-restart

Enable graceful restart on a BGP neighbor, a BGP node, or designate a local router to support graceful restart as a receiver only.

Syntax `bgp graceful-restart [restart-time seconds] [stale-path-time seconds] [role receiver-only]`

To return to the default, enter the `no bgp graceful-restart` command.

Parameters

neighbor ip-address / peer-group-name Enter the keyword `neighbor` then one of the options:

- `ip-address` of the neighbor in IP address format of the neighbor
- `peer-group-name` of the neighbor peer group

restart-time seconds Enter the keywords `restart-time` then the maximum number of seconds needed to restart and bring up all peers. The range is from 1 to 3600 seconds. The default is **120 seconds**.

stale-path-time seconds Enter the keywords `stale-path-time` then the maximum number of seconds to wait before restarting a peer's stale paths. The default is **360 seconds**.

role receiver-only Enter the keywords `role receiver-only` to designate the local router to support graceful restart as a receiver only.

Defaults As above

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This feature is advertised to BGP neighbors through a capability advertisement. In Receiver Only mode, BGP saves the advertised routes of peers that support this capability when they restart.

bgp log-neighbor-changes

Enable logging of BGP neighbor resets.

Syntax `bgp log-neighbor-changes`

To disable logging, use the `no bgp log-neighbor-changes` command.

Defaults Enabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `bgp log-neighbor-changes` command appears in the `show config` command output.

Related Commands [show config](#) — views the current configuration.

bgp non-deterministic-med

Compare MEDs of paths from different autonomous systems (ASs).

Syntax `bgp non-deterministic-med`

To return to the default, use the `no bgp non-deterministic-med` command.

Defaults Disabled (that is, paths/routes for the same destination but from different ASs does not have their MEDs compared).

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information In Non-Deterministic mode, paths are compared in the order in which they arrive. This method can lead to the system choosing different best paths from a set of paths, depending on the order in which they are received from the neighbors because MED may or may not get compared between adjacent paths. In Deterministic mode (`no bgp non-deterministic-med`), the system compares MED between adjacent paths within an AS group because all paths in the AS group are from the same AS.

When you change the path selection from Deterministic to Non-Deterministic mode, the path selection for existing paths remains Deterministic until you enter the `capture bgp-pdu max-buffer-size` command to clear existing paths.

bgp recursive-bgp-next-hop

Enable next-hop resolution through other routes learned by BGP.

Syntax `bgp recursive-bgp-next-hop`

To disable next-hop resolution, use the `no bgp recursive-bgp-next-hop` command.

Defaults	Enabled.
Command Modes	ROUTER BGP
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is a knob to disable BGP next-hop resolution using BGP learned routes. During the next-hop resolution, only the first route that the next-hop resolves through is verified for the route's protocol source and is checked if the route is learned from BGP or not.

For this command to take effect and to keep the BGP database consistent, you need the `clear ip bgp` command. Execute the `clear ip bgp` command right after executing this command.

Related Commands [capture bgp-pdu max-buffer-size](#)

bgp regex-eval-optz-disable

Disables the Regex Performance engine that optimizes complex regular expression with BGP.

Syntax `bgp regex-eval-optz-disable`
To re-enable optimization engine, use the `no bgp regex-eval-optz-disable` command.

Defaults	Enabled.
Command Modes	ROUTER BGP (conf-router_bgp)
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information BGP uses regular expressions (regex) to filter route information. In particular, the use of regular expressions to filter routes based on AS-PATHs and communities is quite common. In a large scale configuration, filtering millions of routes based on regular expressions can be quite CPU intensive, as a regular expression evaluation involves generation and evaluation of complex finite state machines.

BGP policies, containing regular expressions to match as-path and communities, tend to use a lot of CPU processing time, which in turn affects the BGP routing convergence. Additionally, the `show bgp` commands, which are filtered through regular expressions, use up CPU cycles particularly with large databases. The Regex Engine Performance Enhancement feature optimizes the CPU usage by caching and reusing regular expression evaluation results. This caching and reuse may be at the expensive of RP1 processor memory.

Related Commands [show ip protocols](#) — views information on all routing protocols enabled and active.

bgp router-id

Assign a user-given ID to a BGP router.

Syntax	<code>bgp router-id ip-address</code> To delete a user-assigned IP address, use the <code>no bgp router-id</code> command.						
Parameters	<i>ip-address</i> Enter an IP address in dotted decimal format to reset only that BGP neighbor.						
Defaults	The router ID is the highest IP address of the Loopback interface or, if no Loopback interfaces are configured, the highest IP address of a physical interface on the router.						
Command Modes	ROUTER BGP						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	Peering sessions are reset when you change the router ID of a BGP router.						

bgp soft-reconfig-backup

Use this command *only* when route-refresh is *not* negotiated between peers to avoid having a peer re-send BGP updates.

Syntax	<code>bgp soft-reconfig-backup</code> To return to the default setting, use the <code>no bgp soft-reconfig-backup</code> command.						
Defaults	Off						
Command Modes	ROUTER BGPV6 ADDRESS FAMILY (conf-router_bgpv6_af)						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	When you enable soft-reconfiguration for a neighbor and you execute the <code>clear ip bgp soft in</code> command, the update database stored in the router replays and updates are reevaluated. With this command, the replay and update process is triggered only if route-refresh request is <i>not</i> negotiated with the peer. If the request is negotiated (after execution of <code>clear ip bgp soft in</code>), BGP sends a route-refresh request to the neighbor and receives all of the peer's updates.						
Related Commands	<code>clear ip bgp ipv6 unicast soft</code> — activates inbound policies for IPv6 routes without resetting the BGP TCP session.						

capture bgp-pdu neighbor (ipv6)

Enable capture of an IPv6 BGP neighbor packet.

Syntax `capture bgp-pdu neighbor ipv6-address direction {both | rx | tx}`
To disable capture of the IPv6 BGP neighbor packet, use the `no capture bgp-pdu neighbor ipv6-address` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address of the target BGP neighbor.
direction {both rx tx}	Enter the keyword <code>direction</code> and a direction — either <code>rx</code> for inbound, <code>tx</code> for outbound, or <code>both</code> .

Defaults Not configured.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [capture bgp-pdu max-buffer-size](#) — enables route reflection between the route reflector and the clients.
[show capture bgp-pdu neighbor](#) — configures a route reflector and clients.

capture bgp-pdu max-buffer-size

Set the size of the BGP packet capture buffer. This buffer size pertains to both IPv4 and IPv6 addresses.

Syntax `capture bgp-pdu max-buffer-size 100-102400000`

Parameters

100-102400000	Enter a size for the capture buffer.
----------------------	--------------------------------------

Defaults **40960000 bytes**

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `capture bgp-pdu neighbor (ipv6)` — enables route reflection between the route reflector and the clients.

`show capture bgp-pdu neighbor` — configures a route reflector and clients.

clear ip bgp * (asterisk)

Reset all BGP sessions in the specified category. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax `clear ip bgp * [ipv4 multicast soft [in | out] | ipv6 unicast soft [in | out] | soft [in | out]]`

Parameters	
*	Enter an asterisk (*) to reset all BGP sessions.
ipv4 multicast soft [in out]	(OPTIONAL) Enter the keywords <code>ipv4 multicast soft [in out]</code> to set options within the specified IPv4 address family.
ipv6 unicast soft [in out]	(OPTIONAL) Enter the keywords <code>ipv6 multicast soft [in out]</code> to set options within the specified IPv6 address family.
soft	(OPTIONAL) Enter the keyword <code>soft</code> to configure and activate policies without resetting the BGP TCP session, that is, BGP Soft Reconfiguration.
	NOTE: If you enter <code>clear ip bgp ip6-address soft</code>, both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword <code>in</code> to activate only inbound policies.
out	(OPTIONAL) Enter the keyword <code>out</code> to activate only outbound policies.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp as-number

Reset BGP sessions. The soft parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax `clear ip bgp as-number [flap-statistics | ipv4 {multicast {flap-statistics | soft {in | out}} | unicast {flap-statistics | soft {in | out}} | ipv6 unicast {flap-statistics | soft {in | out}} | soft [in | out]`

Parameters

<i>as-number</i>	Enter an autonomous system (AS) number to reset neighbors belonging to that AS. If used without a qualifier, the keyword resets all neighbors belonging to that AS. The range is from 1 to 65535.
<i>flap-statistics</i>	(OPTIONAL) Enter the keywords <i>flap-statistics</i> to clear all flap statistics belonging to that AS or a specified address family within that AS.
<i>ipv4</i>	(OPTIONAL) Enter the keyword <i>ipv4</i> to select options for that address family.
<i>ipv6</i>	(OPTIONAL) Enter the keyword <i>ipv6</i> to select options for that address family.
<i>unicast</i>	(OPTIONAL) Enter the keyword <i>unicast</i> to select the unicast option within the selected address family.
<i>multicast</i>	(OPTIONAL) Enter the keyword <i>multicast</i> to select the multicast option within the selected address family. Multicast is supported on IPv4 only.
<i>soft</i>	(OPTIONAL) Enter the keyword <i>soft</i> to configure and activate policies without resetting the BGP TCP session; that is, BGP Soft Reconfiguration.
	NOTE: If you enter <code>clear ip bgp ipv6-address soft</code>, both inbound and outbound policies are reset.
<i>in</i>	(OPTIONAL) Enter the keyword <i>in</i> to activate only inbound policies.
<i>out</i>	(OPTIONAL) Enter the keyword <i>out</i> to activate only outbound policies.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp ipv6-address

Reset BGP sessions specific to an IPv6 address. The *soft* parameter (BGP Soft Reconfiguration) clears the policies without resetting the TCP connection.

Syntax

```
clear ip bgp ipv6-address [flap-statistics | ipv4 {multicast {flap-statistics | soft {in | out}} | unicast {flap-statistics | soft {in | out}} | ipv6 unicast {flap-statistics | soft {in | out}} | soft [in | out]
```

Parameters

<i>ipv6-address</i>	Enter an IPv6 address to reset neighbors belonging to that IP. Used without a qualifier, the keyword <i>ipv6-address</i> resets all neighbors belonging to that IP.
<i>flap-statistics</i>	(OPTIONAL) Enter the keywords <i>flap-statistics</i> to clear all flap statistics belonging to that AS or a specified address family within that IP.
<i>ipv4</i>	(OPTIONAL) Enter the keyword <i>ipv4</i> to select options for that address family.
<i>ipv6</i>	(OPTIONAL) Enter the keyword <i>ipv6</i> to select options for that address family.
<i>unicast</i>	(OPTIONAL) Enter the keyword <i>unicast</i> to select the unicast option within the selected address family.

multicast	(OPTIONAL) Enter the keyword <code>multicast</code> to select the multicast option within the selected address family. Multicast is supported on IPv4 only.
soft	(OPTIONAL) Enter the keyword <code>soft</code> to configure and activate policies without resetting the BGP TCP session; that is, BGP Soft Reconfiguration.
	NOTE: If you enter <code>clear ip bgp ip6-address soft</code> , both inbound and outbound policies are reset.
in	(OPTIONAL) Enter the keyword <code>in</code> to activate only inbound policies.
out	(OPTIONAL) Enter the keyword <code>out</code> to activate only outbound policies.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp peer-group

Reset a peer-group's BGP sessions.

Syntax `clear ip bgp peer-group peer-group-name`

Parameters *peer-group-name* Enter the peer group name to reset the BGP sessions within that peer group.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp ipv6 dampening

Clear information on route dampening and return suppressed route to active state.

Syntax `clear ip bgp ipv6 unicast dampening [ipv6-address]`

Parameters *ipv6-address* Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

Command Modes EXEC Privilege

Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	After you enter this command, the software deletes the history routes and returns the suppressed routes to the active state.	

clear ip bgp ipv6 flap-statistics

Clear BGP flap statistics, which includes number of flaps and the time of the last flap.

Syntax `clear ip bgp ipv6 unicast flap-statistics [ipv6-address | filter-list as-path-name | regexp regular-expression]`

Parameters

ipv6-address (OPTIONAL) Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

filter-list as-path-name (OPTIONAL) Enter the keywords `filter-list` then the name of a configured AS-PATH list.

regexp regular-expression (OPTIONAL) Enter the keyword `regexp` then the regular expressions. Use one or a combination of the following:

- . (period) matches on any single character, including white space
- * (asterisk) matches on sequences in a pattern (zero or more sequences)
- + (plus sign) matches on sequences in a pattern (one or more sequences)
- ? (question mark) matches sequences in a pattern (0 or 1 sequences)
- [] (brackets) matches a range of single-character patterns.
- ^ (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.)
- \$ (dollar sign) matches the end of the output string.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
----------------	--------------------

9.9(0.0) Introduced on the FN IOM.

9.2(0.0) Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you enter the `clear ip bgp ipv6 flap-statistics` command without parameters, all the statistics clear.

Related Commands [show ip bgp ipv6 unicast flap-statistics](#) — views BGP flap statistics.

clear ip bgp ipv6 unicast soft

Clear and reapply policies for IPv6 unicast routes without resetting the TCP connection; that is, perform BGP soft reconfiguration.

Syntax `clear ip bgp { * | as-number | ipv4-neighbor-addr | ipv6-neighbor-addr | peer-group name } ipv6 unicast soft [in | out]`

Parameters	*	Clear and reapply policies for all BGP sessions.
	as-number	Clear and reapply policies for all neighbors belonging to the AS. The range is from 0 to 65535 (2 Byte), from 1 to 4294967295 (4 Byte), or from 0.1 to 0.65535.65535 (Dotted format).
	ipv4-neighbor-addr ipv6-neighbor-addr	Clear and reapply policies for a neighbor.
	peer-group name	Clear and reapply policies for all BGP routers in the specified peer group.
	ipv6 unicast	Clear and reapply policies for all IPv6 unicast routes.
	in	Reapply only inbound policies. NOTE: If you enter <code>soft</code> , without an <code>in</code> or <code>out</code> option, both inbound and outbound policies are reset.
	out	Reapply only outbound policies. NOTE: If you enter <code>soft</code> , without an <code>in</code> or <code>out</code> option, both inbound and outbound policies are reset.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip bgp

Allows you to view all information on BGP, including BGP events, keepalives, notifications, and updates.

Syntax `debug ip bgp [ipv6-address | peer-group peer-group-name] [in | out]`
To disable all BGP debugging, use the `no debug ip bgp` command.

Parameters	ipv6-address	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128. NOTE: The <code>::</code> notation specifies successive hexadecimal fields of zeros.
-------------------	---------------------	--

peer-group *peer-group-name* Enter the keywords `peer-group` then the name of the peer group.

in (OPTIONAL) Enter the keyword `in` to view only information on inbound BGP routes.

out (OPTIONAL) Enter the keyword `out` to view only information on outbound BGP routes.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view information on both incoming and outgoing routes, do not include the `in` and `out` parameters in the `debugging` command. The `in` and `out` parameters cancel each other; for example, if you enter `debug ip bgp in` and then enter `debug ip bgp out`, you do not see information on the incoming routes.

Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

Related Commands

- [debug ip bgp events](#) — views information about BGP events.
- [debug ip bgp keepalives](#) — views information about BGP keepalives.
- [debug ip bgp notifications](#) — views information about BGP notifications.
- [debug ip bgp updates](#) — views information about BGP updates.

debug ip bgp events

Allows you to view information on local BGP state changes and other BGP events.

Syntax

`debug ip bgp [ipv6-address | peer-group peer-group-name] events [in | out]`
 To disable debugging, use the `no debug ip bgp ipv6-address | peer-group peer-group-name] events` command.

Parameters

ipv6-address (OPTIONAL) Enter the IPv6 address in the `x:x:x::x` format then the prefix length in the `/x` format. The range is from `/0` to `/128`.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

peer-group *peer-group-name* Enter the keywords `peer-group` then the name of the peer group.

in (OPTIONAL) Enter the keyword `in` to view only information on inbound BGP routes.

out (OPTIONAL) Enter the keyword `out` to view only information on outbound BGP routes.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

debug ip bgp ipv6 dampening

View information on dampened (non-active) IPv6 routes.

Syntax

```
debug ip bgp ipv6 unicast dampening [in | out]
```

To disable debugging, use the `no debug ip bgp ipv6 unicast dampening` command.

Parameters

in	(OPTIONAL) Enter the keyword <code>in</code> to view only inbound dampened routes.
out	(OPTIONAL) Enter the keyword <code>out</code> to view only outbound dampened routes.

Command Modes

EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

Related Commands

[show ip bgp ipv6 unicast dampened-paths](#) — views BGP dampened routes.

debug ip bgp ipv6 unicast soft-reconfiguration

Enable soft-reconfiguration debugging for IPv6 unicast routes.

Syntax

```
debug ip bgp [ipv4-address | ipv6-address | peer-group-name] ipv6 unicast soft-reconfiguration
```

To disable debugging, use the `no debug ip bgp [ipv4-address | ipv6-address | peer-group-name] ipv6 unicast soft-reconfiguration` command.

Parameters

<i>ipv4-address ipv6-address</i>	Enter the IP address of the neighbor on which you want to enable soft-reconfiguration debugging.
<i>peer-group-name</i>	Enter the name of the peer group on which you want to enable soft-reconfiguration debugging.
ipv6 unicast	Debug soft reconfiguration for IPv6 unicast routes.

Defaults	Disabled.	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	This command turns on BGP soft-reconfiguration inbound debugging for IPv6 unicast routes. If no neighbor is specified, debug is turned on for all neighbors.	
Related Commands	show ip bgp ipv6 unicast dampened-paths — views BGP dampened routes.	

debug ip bgp keepalives

Allows you to view information about BGP keepalive messages.

Syntax

```
debug ip bgp [ipv6-address | peer-group peer-group-name] keepalives [in | out]
```

To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] keepalives [in | out]` command.

Parameters	ipv6-address	(OPTIONAL) Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is /0 to /128.
		 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
	peer-group <i>peer-group-name</i>	(OPTIONAL) Enter the keywords <code>peer-group</code> then the name of the peer group.
	in	(OPTIONAL) Enter the keyword <code>in</code> to view only inbound keepalive messages.
	out	(OPTIONAL) Enter the keyword <code>out</code> to view only outbound keepalive messages.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

debug ip bgp notifications

Allows you to view information about BGP notifications received from neighbors.

Syntax `debug ip bgp [ipv6-address | peer-group peer-group-name] notifications [in | out]`
To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name] notifications [in | out]` command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keywords <code>peer-group</code> then the name of the peer group.
<i>in</i>	(OPTIONAL) Enter the keyword <code>in</code> to view BGP notifications received from neighbors.
<i>out</i>	(OPTIONAL) Enter the keyword <code>out</code> to view BGP notifications sent to neighbors.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

debug ip bgp updates

Allows you to view information about BGP updates.

Syntax `debug ip bgp [ipv6-address | peer-group peer-group-name | ipv6 unicast [ipv6-address]] updates [in | out | prefix-list prefix-list-name]`
To disable debugging, use the `no debug ip bgp [ip-address | peer-group peer-group-name | ipv6 unicast [ipv6-address]] updates [in | out]` command.

Parameters

<i>ipv6-address</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	(OPTIONAL) Enter the keywords <code>peer-group</code> then the name of the peer group.

ipv6 unicast [*ipv6-address*] (OPTIONAL) Enter the keywords `ipv6 unicast`, and, optionally, an ipv6 address.

in (OPTIONAL) Enter the keyword `in` to view only BGP updates received from neighbors.

out (OPTIONAL) Enter the keyword `out` to view only BGP updates sent to neighbors.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Entering a `no debug ip bgp` command removes all configured debug commands for BGP.

default-metric

Allows you to change the metrics of redistributed routes to locally originated routes. Use this command with the `redistribute` command.

Syntax `default-metric number`
 To return to the default setting, use the `no default-metric` command.

Parameters *number* Enter a number as the metric to be assigned to routes from other protocols. The range is from 1 to 4294967295.

Defaults **0**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `default-metric` command in BGP sets the value of the BGP MULTI_EXIT_DISC (MED) attribute for redistributed routes only.

Related Commands [bgp always-compare-med](#) — enables comparison of all BGP MED attributes.
[redistribute](#) — redistributes routes from other routing protocols into BGP.

description

Enter a description of the BGP routing protocol.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters *description* Enter a description to identify the BGP protocol (80 characters maximum).

Defaults none

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [router bgp](#) — enters ROUTER mode on the switch.

distance bgp

Configure three administrative distances for routes.

Syntax `distance bgp external-distance internal-distance local-distance`
To return to default values, use the `no distance bgp` command.

Parameters

external-distance Enter a number to assign to routes learned from a neighbor external to the AS. The range is from 1 to 255. The default is **20**.

internal-distance Enter a number to assign to routes learned from a router within the AS. The range is from 1 to 255. The default is **200**.

local-distance Enter a number to assign to routes learned from networks listed in the network command. The range is from 1 to 255. The default is **200**.

Defaults

- external-distance = **20**
- internal-distance = **200**
- local-distance = **200**

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

CAUTION: Dell Networking recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table.

Routes from confederations are treated as internal BGP routes.

maximum-paths

Configure the maximum number of parallel routes (multipath support) BGP supports.

Syntax `maximum-paths {ebgp | ibgp} number`
To return to the default values, use the `no maximum-paths` command.

Parameters

- ebgp** Enter the keyword `ebgp` to enable multipath support for External BGP routes.
- ibgp** Enter the keyword `ibgp` to enable multipath support for Internal BGP routes.
- number** Enter a number as the maximum number of parallel paths. The range is from 1 to 16. The default is **1**.

Defaults **1**

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you enable this command, use the `capture bgp-pdu max-buffer-size` command to recompute the best path.

neighbor activate

This command allows the specified neighbor/peer group to be enabled for the current AFI/SAFI.

Syntax `neighbor {ipv6-address | peer-group-name} activate`
To disable, use the `no neighbor {ipv6-address | peer-group-name} activate` command.

Parameters

- ipv6-address** Enter the IPv6 address in the x:x:x:x format.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

<i>peer-group-name</i>	Identify a peer group by name.
activate	Enter the keyword <code>activate</code> to enable the identified neighbor or peer group in the new AFI/SAFI.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, when you create a neighbor/peer group configuration in the Router BGP context, it is enabled for the IPv6/Unicast AFI/SAFI. By using `activate` in the new context, the neighbor/peer group is enabled for AFI/SAFI.

neighbor advertisement-interval

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax

```
neighbor {ipv6-address | peer-group-name} advertisement-interval seconds
```

To return to the default value, use the `no neighbor {ipv6-address | peer-group-name} advertisement-interval` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format.
	 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>seconds</i>	Enter a number as the time interval, in seconds, between BGP advertisements. The range is from 0 to 600 seconds. The default is 5 seconds for internal BGP peers and 30 seconds for external BGP peers.

Defaults

- seconds = **5 seconds** (internal peers)
- seconds = **30 seconds** (external peers)

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor allowas-in

Set the number of times an AS number can occur in the AS path.

Syntax `neighbor {ip-address | peer-group-name} allowas-in number`
To return to the default value, use the `no neighbor {ip-address | peer-group-name} allowas-in` command.

Parameters

<i>ip-address</i>	Enter the IPv6 address in the x:x:x:x format.
	NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the advertisement interval for all routers in the peer group.
<i>number</i>	Enter a number of times to allow this neighbor ID to use the AS path. The range is from 1 to 10.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [bgp four-octet-as-support](#) — enables 4-Byte support for the BGP process.

neighbor default-originate

Inject the default route to a BGP peer or neighbor.

Syntax `neighbor {ipv6-address | peer-group-name} default-originate [route-map map-name]`
To remove a default route, use the `no neighbor {ipv6-address | peer-group-name} default-originate [route-map map-name]` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format.
	NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the default route of all routers in that peer group.
<i>route-map map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you apply a route map to a BGP peer or neighbor with the `neighbor default-originate` command configured, the software does not apply the set filters in the route map to that BGP peer or neighbor.

neighbor description

Assign a character string describing the neighbor or group of neighbors (peer group).

Syntax `neighbor {ipv6-address | peer-group-name} description text`
To delete a description, use the `no neighbor {ipv6-address | peer-group-name} description text` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group.

text Enter a continuous text string up to 80 characters.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor distribute-list

Distribute BGP information using an established prefix list.

Syntax `neighbor {ipv6-address | peer-group-name} distribute-list prefix-list-name {in | out}`
To delete a neighbor distribution list, use the `no neighbor {ipv6-address | peer-group-name} distribute-list prefix-list-name {in | out}` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

<i>peer-group-name</i>	Enter the name of the peer group.
<i>prefix-list-name</i>	Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).
in	Enter the keyword in to distribute only inbound traffic.
out	Enter the keyword out to distribute only outbound traffic.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [neighbor filter-list](#) — assigns a AS-PATH list to a neighbor or peer group.

[neighbor route-map](#) — assigns a route map to a neighbor or peer group.

neighbor ebgp-multihop

Attempt and accept BGP connections to external peers on networks that are not directly connected.

Syntax `neighbor {ipv6-address | peer-group-name} ebgp-multihop [ttl]`
To disallow and disconnect connections, use the `no neighbor {ipv6-address | peer-group-name} ebgp-multihop [ttl]` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter the name of the peer group.

ttl (OPTIONAL) Enter the number of hops as the time to live (ttl) value. The range is from 1 to 255. The default is **255**.

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To prevent loops, the `neighbor ebgp-multihop` command does not install default routes of the multihop peer. Networks not directly connected are not considered valid for best path selection.

neighbor fall-over

Enable or disable fast fall-over for BGP neighbors.

Syntax `neighbor {ipv6-address | peer-group-name} fall-over`
To disable, use the `no neighbor {ipv6-address | peer-group-name} fall-over` command.

Parameters

ipv6-address	Enter the IPv6 address in the x:x:x:x format.
	 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
peer-group-name	Enter the name of the peer group.

Defaults Disabled.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable fall-over, BGP keeps track of IP or IPv6 reachability to the peer remote address and the peer local address. Whenever either address becomes unreachable (for example, no active route exists in the routing table for peer IP or IPv6 destination/local address), BGP brings down the session with the peer.

Related Commands `show ip bgp ipv6 unicast neighbors` — displays IPv6 routing information exchanged by BGP neighbors.

neighbor filter-list

Configure a BGP filter based on the AS-PATH attribute.

Syntax `neighbor {ipv6-address | peer-group-name} filter-list as-path-name {in | out}`
To delete a BGP filter, use the `no neighbor {ipv6-address | peer-group-name} filter-list as-path-name {in | out}` command.

Parameters

ipv6-address	Enter the IPv6 address in the x:x:x:x format.
	 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
peer-group-name	Enter the name of the peer group to apply the filter to all routers in the peer group.
in	Enter the keyword <code>in</code> to filter inbound BGP routes.
out	Enter the keyword <code>out</code> to filter outbound BGP routes.

Defaults	Not configured.	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor maximum-prefix

Control the number of network prefixes received.

Syntax `neighbor {ipv6-address | peer-group-name} maximum-prefix maximum [threshold] [warning-only]`

To return to the default values, use the `no neighbor {ipv6-address | peer-group-name} maximum-prefix maximum [threshold] [warning-only]` command.

Parameters	<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format.
		 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
	<i>peer-group-name</i>	Enter the name of the peer group.
	<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. The range is from 1 to 4294967295.
	<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the maximum value. When the number of prefixes reaches this percentage of the maximum value, the software sends a message. The range is from 1 to 100 percent. The default is 75 .
	<i>warning-only</i>	(OPTIONAL) Enter the keyword <code>warning-only</code> to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults	threshold = 75	
Command Modes	ROUTER BGPV6-ADDRESS FAMILY	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you configure the `neighbor maximum-prefix` command and the neighbor receives more prefixes than allowed by the `neighbor maximum-prefix` command configuration, the neighbor goes down and the `show ip bgp ipv6 unicast summary` command displays (prfxd) in the State/PfxRcd column for that neighbor. The neighbor remains down until you enter the `capture bgp-pdu max-buffer-size` command for the neighbor or the peer group to which the neighbor belongs or you enter `neighbor shutdown` and `neighbor no shutdown` commands.

Related Commands [show ip bgp ipv6 unicast summary](#) — displays the current BGP configuration.

neighbor X:X:X::X password

Enable TCP MD5 Authentication for an IPv6 BGP peer session.

Syntax `neighbor x:x:x::x password {7 <encrypt-pass> | <clear-pass>}`
To return to the default setting, use the `no neighbor x:x:x::x password` command.

Parameters

<i>encrypt-pass</i>	Enter the encrypted password.
<i>clear-pass</i>	Enter the clear text password.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The TCP session is authentication and prevents the data from being compromised.

neighbor next-hop-self

Allows you to configure the router as the next hop for a BGP neighbor. (This command is used for IBGP).

Syntax `neighbor {ipv6-address | peer-group-name} next-hop-self`
To return to the default setting, use the `no neighbor {ipv6-address | peer-group-name} next-hop-self` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x::x format.
<i>peer-group-name</i>	(OPTIONAL) Enter the name of the peer group.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you configure the `set ipv6 next-hop` command in ROUTE-MAP mode, its configuration takes precedence over the `neighbor next-hop-self` command.

neighbor peer-group (assigning peers)

Allows you to assign one peer to a existing peer group.

Syntax `neighbor ipv6-address peer-group peer-group-name`
To delete a peer from a peer group, use the `no neighbor ipv6-address peer-group peer-group-name` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. ① NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group peer-group-name</i>	Enter the keywords <code>peer-group</code> then the name of a configured peer group (maximum 16 characters).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can assign up to 64 peers to one peer group.

When you add a peer to a peer group, it inherits all the peer group's configured parameters. A peer cannot become part of a peer group if any of the following commands are configured on the peer:

- [neighbor advertisement-interval](#)
- [neighbor distribute-list](#)
- [neighbor filter-list](#)
- [neighbor next-hop-self](#)
- [neighbor route-map](#)
- [neighbor route-reflector-client](#)
- [neighbor send-community](#)

A neighbor may keep its configuration after it was added to a peer group if the neighbor's configuration is more specific than the peer group's and the neighbor's configuration does not affect outgoing updates.

A peer group must exist before you add a peer to it. If the peer group is disabled (`shutdown`) the peers within the group are also disabled (`shutdown`).

Related Commands [capture bgp-pdu max-buffer-size](#) — resets BGP sessions.

[neighbor peer-group \(creating group\)](#) — creates a peer group.

[show ip bgp ipv6 unicast peer-group](#) — views BGP peers.

[show ip bgp ipv6 unicast neighbors](#) — views BGP neighbors configurations.

neighbor peer-group (creating group)

Allows you to create a peer group and assign it a name.

Syntax `neighbor peer-group-name peer-group`
To delete a peer group, use the `no neighbor peer-group-name peer-group` command.

Parameters **peer-group-name** Enter a text string up to 16 characters long as the name of the peer group.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When a peer group is created, it is disabled (`shut mode`).

Related Commands [neighbor peer-group \(assigning peers\)](#) — assigns routers to a peer group.
[neighbor remote-as](#) — assigns an indirectly connected AS to a neighbor or peer group.
[neighbor shutdown](#) — disables a peer or peer group.

neighbor peer-group passive

Enable passive peering on a BGP peer group; that is, the peer group does not send an OPEN message, but does respond to one.

Syntax `neighbor peer-group-name peer-group passive`
To delete a passive peer-group, use the `no neighbor peer-group-name peer-group passive` command.

Parameters **peer-group-name** Enter a text string up to 16 characters long as the name of the peer group.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information After you configure a peer group as passive, you must assign it a subnet using the `neighbor subnet` command.

Related Commands [neighbor subnet](#) — assigns a subnet to a dynamically configured BGP neighbor.

neighbor remote-as

Create and specify the remote peer to the BGP neighbor.

Syntax

```
neighbor {ipv6-address | peer-group-name} remote-as number
```

To delete a remote AS entry, use the `no neighbor {ipv6-address | peer-group-name} remote-as number` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x:x format.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter a text string up to 16 characters long as the name of the peer group.

number Enter a number of the AS. The range is from 1 to 65535.

Defaults

Not configured.

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If the `number` parameter is the same as the AS number used in the `router bgp` command, the remote AS entry in the neighbor is considered an internal BGP peer entry.

This command creates a peer and the newly created peer is disabled (`shutdown`).

Related Commands [router bgp](#) — enters the ROUTER BGP mode and configure routes in an AS.

neighbor remove-private-as

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax

```
neighbor {ipv6-address | peer-group-name} remove-private-as
```

To return to the default, use the `no neighbor {ipv6-address | peer-group-name} remove-private-as` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x:x format.

 | **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group to remove the private AS numbers.

Defaults

Disabled (that is, the private AS number are not removed).

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Applies to external border gateway protocol (EBGP) neighbors only.

If the AS-PATH contains both public and private AS number or contains AS numbers of an EBGP neighbor, the private AS numbers are not removed.

If a confederation contains private AS numbers in its AS-PATH, the software removes the private AS numbers only if they follow the confederation numbers in the AS path.

Private AS numbers are from 64512 to 65535.

neighbor route-map

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax

```
neighbor {ipv6-address | peer-group-name} route-map map-name {in | out}
```

To remove the route map, use the `no neighbor {ipv6-address | peer-group-name} route-map map-name {in | out}` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x:x format.

 | **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group.

map-name Enter the name of an established route map. If the Route map is not configured, the default is **deny** (to drop all routes).

in Enter the keyword `in` to filter inbound routes.

out Enter the keyword `out` to filter outbound routes.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

neighbor route-reflector-client

Configure a neighbor as a member of a route reflector cluster.

Syntax

```
neighbor {ipv6-address | peer-group-name} route-reflector-client
```

To indicate that the neighbor is not a route reflector client or to delete a route reflector configuration, use the `no neighbor {ipv6-address | peer-group-name} route-reflector-client` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The first time you enter this command it configures the neighbor as a route reflector and members of the route-reflector cluster. Internal BGP (IBGP) speakers do not need to be fully meshed if you configure a route reflector.

When all clients of a route reflector are disabled, the neighbor is no longer a route reflector.

neighbor send-community

Send a COMMUNITY attribute to a BGP neighbor or peer group. A COMMUNITY attribute indicates that all routes with that attribute belong to the same community grouping.

Syntax

```
neighbor {ipv6-address | peer-group-name} send-community
```

To disable sending a COMMUNITY attribute, use the `no neighbor {ipv6-address | peer-group-name} send-community` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x::x format.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults

Not configured and COMMUNITY attributes are not sent to neighbors.

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor shutdown

Disable a BGP neighbor or peer group.

Syntax

```
neighbor {ipv6-address | peer-group-name} shutdown
```

To enable a disabled neighbor or peer group, use the `no neighbor {ipv6-address | peer-group-name} shutdown` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x::x format.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter the name of the peer group to disable or enable all routers within the peer group.

Defaults

Enabled (that is, BGP neighbors and peer groups are disabled.)

Command Modes

ROUTER BGP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Peers that are enabled within a peer group are disabled when their peer group is disabled.

The `neighbor shutdown` command terminates all BGP sessions on the BGP neighbor or BGP peer group. Use this command with caution as it terminates the specified BGP sessions. When a neighbor or peer group is shutdown, use the `show ip bgp ipv6 unicast summary` command to confirm its status.

Related Commands [show ip bgp ipv6 unicast summary](#) — displays the current BGP configuration.

[show ip bgp ipv6 unicast neighbors](#) — displays IPv6 routing information exchanged by BGP neighbors.

neighbor soft-reconfiguration inbound

Enable a BGP soft-reconfiguration and start storing updates for inbound IPv6 unicast routes.

Syntax `neighbor {ipv4-address | ipv6-address | peer-group-name} soft-reconfiguration inbound`

Parameters

<i>ipv4-address</i> <i>ipv6-address</i>	Enter the IP address of the neighbor for which you want to start storing inbound routing updates.
<i>peer-group-name</i>	Enter the name of the peer group for which you want to start storing inbound routing updates.

Defaults Disabled.

Command Modes ROUTER BGPv6 ADDRESS FAMILY (conf-router_bgpv6_af)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command enables soft-reconfiguration for the specified BGP neighbor. BGP stores all updates for inbound IPv6 unicast routes the neighbor receives but does not reset the peer-session.

 **CAUTION: Inbound update storage is a memory-intensive operation. The entire BGP update database from the neighbor is stored in memory regardless of the inbound policy results applied on the neighbor.**

Related Commands [show ip bgp ipv6 unicast neighbors](#) — displays IPv6 routing information BGP neighbors exchange.

neighbor subnet

Enable passive peering so that the members of the peer group are dynamic.

Syntax `neighbor peer-group-name subnet subnet-number mask`

To remove passive peering, use the `no neighbor peer-group-name subnet subnet-number mask` command.

Parameters

<i>subnet-number</i>	Enter a subnet number in dotted decimal format (A.B.C.D.) as the allowable range of addresses included in the Peer group. To allow all addresses, enter 0 : : 0 / 0.
<i>mask</i>	Enter a prefix mask in / prefix-length format (/x).

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor timers

Set keepalive and hold time timers for a BGP neighbor or a peer group.

Syntax

```
neighbor {ipv6-address | peer-group-name} timers keepalive holdtime
```

To return to the default values, use the `no neighbor {ipv6-address | peer-group-name} timers` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter the name of the peer group to set the timers for all routers within the peer group.

keepalive Enter a number for the time interval, in seconds, between keepalive messages sent to the neighbor routers. the range is from 1 to 65535. the default is **60 seconds**.

holdtime Enter a number for the time interval, in seconds, between the last keepalive message and declaring the router dead. The range is from 3 to 65535. The default is **180 seconds**.

Defaults

- keepalive = **60 seconds**
- holdtime = **180 seconds**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Timer values configured with the `neighbor timers` command override the timer values configured with the `timers bgp` command.

When two neighbors, configured with different keepalive and holdtime values, negotiate for new values, the resulting values are as follows:

- the lower of the holdtime values is the new holdtime value
- whichever is the lower value; one-third of the new holdtime value, or the configured keepalive value is the new keepalive value

neighbor update-source

Enable the software to use Loopback interfaces for TCP connections for BGP sessions.

Syntax `neighbor {ipv6-address | peer-group-name} update-source loopback interface`
To use the closest interface, use the `no neighbor {ipv6-address | peer-group-name} update-source loopback interface` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x:x format. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the timers for all routers within the peer group.
<i>loopback interface</i>	Enter the keyword <code>loopback</code> then a number of the loopback interface. The range is from 0 to 16383.

Defaults Not configured.

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Loopback interfaces are up constantly and the BGP session may need one interface constantly up to stabilize the session. The `neighbor update-source` command is not necessary for directly connected internal BGP sessions.

neighbor weight

Assign a weight to the neighbor connection, which is used to determine the best path.

Syntax `neighbor {ipv6-address | peer-group-name} weight weight`
To remove a weight value, use the `no neighbor {ipv6-address | peer-group-name} weight weight` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x:x format. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to set the timers for all routers within the peer group.
<i>weight</i>	Enter a number as the weight. The range is from 0 to 65535. The default is 0 .

Defaults **0**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information In the system best path selection process, the path with the highest weight value is preferred.

NOTE: To apply the weight to the connection and recompute the best path, reset the neighbor connection (the `capture bgp-pdu max-buffer-size * command`).

network

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

```
network ipv6-address prefix-length [route-map map-name]
```

To remove a network, use the `no network ip-address mask [route-map map-name]` command.

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

mask Enter the mask of the IP address in the slash prefix length format (for example, /24). The mask appears in command outputs in dotted decimal format (A.B.C.D).

route-map map-name (OPTIONAL) Enter the keywords `route-map` then the name of an established route map.
If the route map is not configured, the default is **deny** (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The software resolves the network address configured by the `network` command with the routes in the main routing table to ensure that the networks are reachable using non-BGP routes and non-default routes.

Related Commands `redistribute` — redistributes routes into BGP.

network backdoor

Specify this IGP route as the preferred route.

Syntax `network ipv6-address prefix-length backdoor`
To remove a network, use the `no network ipv6-address prefix-length backdoor` command.

Parameters `ipv6-address prefix-length` Enter the IPv6 address in the x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Though the system does not generate a route due to backdoor config, there is an option for injecting/sourcing a local route in presence of network backdoor config on a learned route.

redistribute

Redistribute routes into BGP.

Syntax `redistribute {connected | static} [route-map map-name]`
To disable redistribution, use the `no redistribution {connected | static}` command.

Parameters

- connected** Enter the keyword `connected` to redistribute routes from physically connected interfaces.
- static** Enter the keyword `static` to redistribute manually configured routes. These routes are treated as incomplete routes.
- route-map map-name** (OPTIONAL) Enter the keywords `route-map` then the name of an established route map. If the route map is not configured, the default is **deny** (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you do not configure the `default-metric` command, in addition to the `redistribute` command, or there is no route map to set the metric, the metric for redistributed static and connected is "0".

To redistribute the default route (0::0/0), configure the `neighbor default-originate` command.

Related Commands [neighbor default-originate](#) — injects the default route.

redistribute isis

Redistribute IS-IS routes into BGP.

Syntax

```
redistribute isis [level-1 | level-1-2 | level-2] [metric metric-value |  
metric-type {external | internal}] [route-map map-name]
```

To stop redistribution of IS-IS routes, use the `no redistribute isis` command.

Parameters

level-1 level-1-2 level-2]	(OPTIONAL) Enter the type (level) of routes to redistribute.
metric	(OPTIONAL) Assign metric to an interface for use with IPv6 information.
metric-type	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. You must specify one of the following: <ul style="list-style-type: none">externalinternal (default)
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map. If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

redistribute ospf

Redistribute OSPFv3 routes into BGP.

Syntax `redistribute ospf process-id [[match external {1 | 2}] [match internal]] [route-map map-name]`

To stop redistribution of OSPF routes, use the `no redistribute ospf process-id` command.

Parameters

process-id	Enter the number of the OSPFv3 process. The range is from 1 to 65535.
match external {1 2}	(OPTIONAL) Enter the keywords <code>match external</code> to redistribute OSPF external routes. You can specify 1 or 2 to redistribute those routes only.
match internal	(OPTIONAL) Enter the keywords <code>match internal</code> to redistribute OSPFv3 internal routes only.
route-map map-name	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map. If the route map is not configured, the default is deny (to drop all routes).

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enter the `redistribute ospf process-id` command without any other parameters, the system redistributes all OSPF internal routes, external type 1 routes, and external type 2 routes.

router bgp

Enter ROUTER BGP mode to configure and enable BGP.

Syntax `router bgp as-number`
To disable BGP, use the `no router bgp as-number` command.

Parameters

as-number Enter the AS number. The range is from 1 to 65535.

Defaults Not enabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show capture bgp-pdu neighbor

Display BGP packet capture information for an IPv6 address.

Syntax `show capture bgp-pdu neighbor ipv6-address`

Parameters `ipv6-address` Enter the IPv6 address (X:X:X::X) of a BGP neighbor.

Defaults

- EXEC
- EXEC Privilege

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Command [capture bgp-pdu neighbor \(ipv6\)](#) — enables capture of an IPv6 BGP neighbor packet.
[capture bgp-pdu max-buffer-size](#) — specifies a size for the capture buffer.

show config

View the current ROUTER BGP configuration.

Syntax `show config`

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-router_bgp)#show conf
!
router bgp 18508
 neighbor RR-CLIENT peer-group
 neighbor RR-CLIENT remote-as 18508
 neighbor RR-CLIENT no shutdown
```

```

neighbor RR-CLIENT-PASSIV peer-group passive
neighbor RR-CLIENT-PASSIV remote-as 18508
neighbor RR-CLIENT-PASSIV subnet 9000::9:0/120
neighbor RR-CLIENT-PASSIV no shutdown
neighbor 1109::33 remote-as 18508
neighbor 1109::33 update-source Loopback 101
neighbor 1109::33 no shutdown
neighbor 2222::220 remote-as 18508
neighbor 2222::220 route-reflector-client
neighbor 2222::220 update-source Loopback 100
neighbor 2222::220 no shutdown
neighbor 4000::33 remote-as 18508
neighbor 4000::33 no shutdown
neighbor 4000::60 remote-as 18508
neighbor 4000::60 no shutdown
neighbor 9000::1:2 remote-as 640
no neighbor 9000::1:2 activate
neighbor 9000::1:2 no shutdown

!
Dell#

```

show ip bgp ipv6 unicast

View the current BGP information.

Syntax `show ip bgp ipv6 unicast [network [network-mask] [longer-prefixes]]`

Parameters	network	(OPTIONAL) Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
	network-mask	(OPTIONAL) Enter the keywords <code>network mask</code> (in slash prefix format) of the BGP network address.
	longer-prefixes	(OPTIONAL) Enter the keywords <code>longer-prefixes</code> to view all routes with a common prefix.

Command Modes	<ul style="list-style-type: none"> EXEC EXEC Privilege
----------------------	--

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable the `bgp non-deterministic-med` command, the `show ip bgp` command output for a BGP route does not list the INACTIVE reason.

show ip bgp ipv6 unicast cluster-list

View BGP neighbors in a specific cluster.

Syntax `show ip bgp ipv6 unicast cluster-list [cluster-id]`

Parameters	<i>cluster-id</i>	(OPTIONAL) Enter the cluster id in dotted decimal format.
Command Modes	<ul style="list-style-type: none"> · EXEC · EXEC Privilege 	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast community

View information on all routes with community attributes or view specific BGP community groups.

Syntax `show ip bgp ipv6 unicast community [community-number] [local-as] [no-export] [no-advertise]`

Parameters	<i>community-number</i>	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
	local-AS	Enter the keywords <code>local-AS</code> to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
	no-advertise	Enter the keywords <code>no-advertise</code> to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
	no-export	Enter the keywords <code>no-export</code> to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To view the total number of COMMUNITY attributes found, use the `show ip bgp ipv6 unicast summary` command. The text line above the route table states the number of COMMUNITY attributes found.

show ip bgp ipv6 unicast community-list

View routes that are affected by a specific community list.

Syntax `show ip bgp ipv6 unicast community-list community-list-name [exact-match]`

Parameters

<i>community-list-name</i>	Enter the name of a configured IP community list.
exact-match	(OPTIONAL) Enter the keywords <code>exact-match</code> to display only for an exact match of the communities.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast dampened-paths

View BGP routes that are dampened (non-active).

Syntax `show ip bgp ipv6 unicast dampened-paths`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast detail

Display BGP internal information for IPv6 Unicast address family.

Syntax `show ip bgp ipv6 unicast detail`

Defaults none

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast extcommunity-list

View information on all routes with Extended Community attributes.

Syntax `show ip bgp ipv6 unicast extcommunity-list [list name]`

Parameters

list name Enter the extended community list name you wish to view.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To view the total number of COMMUNITY attributes found, use the `show ip bgp ipv6 unicast summary` command. The text line above the route table states the number of COMMUNITY attributes found.

The `show ip bgp ipv6 unicast community` command without any parameters lists BGP routes with at least one BGP community attribute and the output is the same as for the `show ip bgp ipv6 unicast` command output.

show ip bgp ipv6 unicast filter-list

View the routes that match the filter lists.

Syntax `show ip bgp ipv6 unicast filter-list as-path-name`

Parameters

as-path-name Enter the name of an AS-PATH.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast flap-statistics

View flap statistics on BGP routes.

Syntax

```
show ip bgp ipv6 unicast flap-statistics [ipv6-address prefix-length] [filter-list as-path-name] [regexp regular-expression]
```

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x:x:x format then the prefix length in the /x format. The range is from /0 to /128.

NOTE: The :: notation specifies successive hexadecimal fields of zeros.

filter-list as-path-name (OPTIONAL) Enter the keywords `filter-list` then the name of a configured AS-PATH ACL.

regexp regular-expression Enter a regular expression then use one or a combination of the following characters to match:

- . = (period) any single character (including a white space).
- * = (asterisk) the sequences in a pattern (0 or more sequences).
- + = (plus) the sequences in a pattern (1 or more sequences).
- ? = (question mark) sequences in a pattern (either 0 or 1 sequences).

NOTE: You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- [] = (brackets) a range of single-character patterns.
- ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast inconsistent-as

View routes with inconsistent originating autonomous system (AS) numbers; that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax `show ip bgp ipv6 unicast inconsistent-as`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast neighbors

Displays information on IPv6 unicast routes exchanged by BGP neighbors.

Syntax `show ip bgp ipv6 unicast neighbors [ipv4-neighbor-addr | ipv6-neighbor-addr] [advertised-routes | dampened-routes | detail | flap-statistics | routes | received-routes [network [network-mask]] | denied-routes [network [network-mask]]]`

Parameters

ipv6 unicast	Enter the keywords <code>ipv6 unicast</code> to view information only related to IPv6 unicast routes.
ipv4-neighbor-addr ipv6-neighbor-addr	(OPTIONAL) Enter the IP address of the neighbor to view only BGP route information exchanged with that neighbor.
advertised-routes	(OPTIONAL) Enter the keywords <code>advertised-routes</code> to view only the routes the neighbor sent.
dampened-routes	(OPTIONAL) Enter the keywords <code>dampened-routes</code> to view information on dampened routes from the BGP neighbor.
detail	(OPTIONAL) Enter the keyword <code>detail</code> to view neighbor-specific internal information for the IPv4 Unicast address family.
flap-statistics	(OPTIONAL) Enter the keywords <code>flap-statistics</code> to view flap statistics on the neighbor's routes.
routes	(OPTIONAL) Enter the keyword <code>routes</code> to view only the neighbor's feasible routes.
received-routes [network [network-mask]]	(OPTIONAL) Enter the keywords <code>received-routes</code> then either the network address (in dotted decimal format) or the network mask (in slash prefix format) to view all information received from neighbors.



NOTE: You must configure the `neighbor soft-reconfiguration inbound` command prior to viewing all the information received from the neighbors.

denied-routes (OPTIONAL) Enter the keywords `denied-routes` then either the network address (in `[network [network-mask]` dotted decimal format) or the network mask (in slash prefix format) to view all information on routes denied using neighbor inbound filters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip bgp ipv6 unicast neighbors` command shown in the Example below.

Lines Beginning With	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise, the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information: <ul style="list-style-type: none"> · last read is the time (hours:minutes:seconds) the router reads a message from its neighbor · hold time is the number of seconds configured between messages from its neighbor · keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Soft reconfiguration	This line indicates that soft reconfiguration inbound is configured.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(List of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL, or Prefix list configured for the policy.
For address family:	Displays IPv6 Unicast as the address family.

Lines Beginning With	Description
BGP table version	Displays which version of the primary BGP routing table the router and the neighbor are using.
Prefixes accepted	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.
Prefixes advertised	Displays the number of network prefixes advertised, the number rejected, and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word "never" is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Example

```
Dell#show ip bgp ipv6 unicast neighbors
BGP neighbor is 5ffe:10::3, remote AS 1, external link
  BGP version 4, remote router ID 5.5.5.3
  BGP state ESTABLISHED, in this state for 00:00:32
  Last read 00:00:32, last write 00:00:32
  Hold time is 180, keepalive interval is 60 seconds
  Received 1404 messages, 0 in queue
    3 opens, 1 notifications, 1394 updates
    6 keepalives, 0 route refresh requests
  Sent 48 messages, 0 in queue
    3 opens, 2 notifications, 0 updates
    43 keepalives, 0 route refresh requests
  Minimum time between advertisement runs is 30 seconds
  Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

Capabilities advertised to neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
  BGP table version 12, neighbor version 12
  2 accepted prefixes consume 32 bytes

Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer
Connections established 3; dropped 2
Last reset 00:00:39, due to Closed by neighbor

Notification History
  'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:10::4, Local port: 179
Foreign host: 5ffe:10::3, Foreign port: 35470

Notification History
  'Connection Reset' Sent : 1 Recv: 0
```

```

BGP neighbor is 5ffe:11::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3
BGP state ESTABLISHED, in this state for 00:00:28
Last read 00:00:28, last write 00:00:28
Hold time is 180, keepalive interval is 60 seconds
Received 27 messages, 3 notifications, 0 in queue
Sent 0 messages, 0 notifications, 0 in queue
Received 8 updates, Sent 0 updates
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
MULTIPROTO_EXT(1)
ROUTE_REFRESH(2)
CISCO_ROUTE_REFRESH(128)
Capabilities advertised to neighbor for IPv6 Unicast :
MULTIPROTO_EXT(1)
ROUTE_REFRESH(2)
CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes

Prefix advertised 0, rejected 0, withdrawn 0
Connections established 3; dropped 2
Last reset 00:00:41, due to Closed by neighbor

Notification History
'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:11::4, Local port: 179

```

show ip bgp ipv6 unicast peer-group

Allows you to view information on the BGP peers in a peer group.

Syntax	show ip bgp ipv6 unicast peer-group [<i>peer-group-name</i> [summary]]	
Parameters	<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
	detail	(OPTIONAL) Enter the keyword <code>detail</code> to view peer-group-specific information for the IPv6 address family.
	summary	(OPTIONAL) Enter the keyword <code>summary</code> to view status information of the peers in that peer group. The output is the same as that found in the <code>show ip bgp ipv6 unicast summary</code> command.
Command Modes	<ul style="list-style-type: none"> . EXEC . EXEC Privilege 	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip bgp peer-group
Peer-group RR-CLIENT, remote AS 18508
  BGP version 4
  Minimum time between advertisement runs is 5 seconds

  For address family: IPv4 Unicast
  BGP neighbor is RR-CLIENT, peer-group internal,
  Number of peers in this group 1
  Peer-group members (* - outbound optimized):
    9000::4:

Peer-group RR-CLIENT-PASSIV, remote AS 18508
  BGP version 4
  Minimum time between advertisement runs is 5 seconds

  For address family: IPv4 Unicast
  BGP neighbor is RR-CLIENT-PASSIV, peer-group internal,
  Number of peers in this group 1
  Peer-group members (* - outbound optimized):
    9000::9:2*
Dell#
```

show ip bgp ipv6 unicast summary

Allows you to view the status of all BGP connections.

Syntax show ip bgp ipv6 unicast summary

- Command Modes**
- EXEC
 - EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell# show ip bgp summary
BGP router identifier 55.55.55.55, local AS number 18508
BGP table version is 0, main routing table version 0
6 BGP path attribute entrie(s) using 392 bytes of memory
6 BGP AS-PATH entrie(s) using 294 bytes of memory
6 BGP community entrie(s) using 234 bytes of memory

Neighbor AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down State/Pfx
1109::33 18508 0 0 0 0 0 never Active
2222::220 18508 0 0 0 0 0 never Active
4000::33 18508 0 0 0 0 0 never Active
4000::60 18508 0 0 0 0 0 never Active
9000::4:2 18508 0 0 0 0 0 never Active
9000::5:2 1 35 32 0 0 0 00:16:42 0
9000::6:2 2 35 32 0 0 0 00:16:39 0
9000::7:2 3 35 32 0 0 0 00:16:41 0
```

```

9000::8:2 18508 35      32      0      0      0      00:16:42      0
9000::9:2 18508 44      19      0      0      0      00:16:41      0
9000::a:2 18508 35      32      0      0      0      00:16:43      0
9000::b:14 18508 29      29      0      0      0      00:13:01      0
Dell#

```

show ip bgp next-hop

View all next hops (using learned routes only) with current reachability and flap status. This command only displays one path, even if the next hop is reachable by multiple paths.

Syntax `show ip bgp next-hop [local-routes]`

Parameters `local-routes` (OPTIONAL) Show next-hop information for local routes.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

Dell#show ip bgp next-hop
Next-hop      Via                               RefCount  Cost  Flaps  Time Elapsed
9000::5:2     9000::5:2, Gi 8/38              2         0    0     00:23:22
9000::6:2     9000::6:2, Gi 8/38              2         0    0     00:23:22
9000::7:2     9000::7:2, Gi 8/38              2         0    0     00:23:22
9000::8:2     9000::8:2, Gi 8/38              2         0    0     00:23:22
9000::9:2     9000::9:2, Gi 8/38             6000      0    0     00:23:16
9000::a:2     9000::a:2, Gi 8/38              2         0    0     00:23:22
Dell#

```

show ip bgp paths

View all the BGP path attributes in the BGP database.

Syntax `show ip bgp paths [regexp regular-expression]`

Parameters `regexp regular-expression` Enter a regular expression then use one or a combination of the following characters to match:

- . = (period) any single character (including a white space).
- * = (asterisk) the sequences in a pattern (0 or more sequences).
- + = (plus) the sequences in a pattern (1 or more sequences).
- ? = (question mark) sequences in a pattern (either 0 or 1 sequences).

NOTE: You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- [] = (brackets) a range of single-character patterns.

- ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp paths as-path

View all unique AS-PATHs in the BGP database.

Syntax `show ip bgp paths as-path`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp paths community

View all unique COMMUNITY numbers in the BGP database.

Syntax `show ip bgp paths community`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp paths extcommunity

View all unique extended community information in the BGP database.

Syntax `show ip bgp paths extcommunity`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp regexp

Allows you to view the subset of BGP routing table matching the regular expressions specified.

Syntax `show ip bgp regexp regular-expression [character]`

Parameters

regular-expression Enter a regular expression then use one or a combination of the following characters to match:
[character]

- `.` = (period) any single character (including a white space).
- `*` = (asterisk) the sequences in a pattern (0 or more sequences).
- `+` = (plus) the sequences in a pattern (1 or more sequences).
- `?` = (question mark) sequences in a pattern (either 0 or 1 sequences).

NOTE: You must enter an escape sequence (CTRL+v) prior to entering the `?` regular expression.

- `[]` = (brackets) a range of single-character patterns.
- `^` = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- `$` = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

timers bgp

Allows you to adjust the BGP network timers for all neighbors.

Syntax `timers bgp keepalive holdtimer`
To return to the default values, use the `no timers bgp` command.

Parameters

<i>keepalive</i>	Enter the time interval (in seconds) between which the system sends keepalive messages. The range is from 1 to 65535. The default is 60 seconds .
<i>holdtimer</i>	Enter the time interval (in seconds) that the the system waits since the last keepalive message before declaring a BGP peer dead. The range is from 3 to 65535. The default is 180 seconds .

Defaults

- keepalive = **60 seconds**
- holdtimer = **180 seconds**

Command Modes ROUTER BGP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [neighbor timers](#) — adjusts BGP timers for a specific peer or peer group.

IPv6 MBGP Commands

Multiprotocol BGP (MBGP) is an enhanced BGP that enables multicast routing policy throughout the Internet and connecting multicast topologies between BGP and autonomous systems (AS). The Dell Networking MBGP is implemented as per IETF RFC 1858.

address family

This command changes the context to subsequent address family identifier (SAFI).

Syntax `address family ipv6 unicast`
To remove SAFI context, use the `no address family ipv6 unicast` command.

Parameters

<i>ipv6</i>	Enter the keyword <code>ipv6</code> to specify the address family as IPv6.
<i>unicast</i>	Enter the keyword <code>unicast</code> to specify multicast as SAFI.

Defaults IPv6 Unicast

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

After this command is executed, all subsequent commands apply to this address family. You can exit from this AFI/SAFI to the IPv6 Unicast (the default) family by entering the `exit` command and returning to the Router BGP context.

aggregate-address

Summarize a range of prefixes to minimize the number of entries in the routing table.

Syntax

```
aggregate-address ipv6-address prefix-length [advertise-map map-name] [as-set] [attribute-map map-name] [summary-only] [suppress-map map-name]
```

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x:x format then the prefix length in the / x format. The range is from /0 to /128.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

advertise-map map-name (OPTIONAL) Enter the keywords `advertise-map` then the name of a configured route map to set filters for advertising an aggregate route.

as-set (OPTIONAL) Enter the keywords `as-set` to generate path attribute information and include it in the aggregate. `AS_SET` includes `AS_PATH` and community information from the routes included in the aggregated route.

attribute-map map-name (OPTIONAL) Enter the keywords `attribute-map` then the name of a configured route map to modify attributes of the aggregate, excluding `AS_PATH` and `NEXT_HOP` attributes.

summary-only (OPTIONAL) Enter the keywords `summary-only` to advertise only the aggregate address. Specific routes are not advertised.

suppress-map map-name (OPTIONAL) Enter the keywords `suppress-map` then the name of a configured route map to identify which more-specific routes in the aggregate are suppressed.

Defaults

Not configured.

Command Modes

ROUTER-BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

At least one of the routes included in the aggregate address must be in the BGP routing table for the configured aggregate to become active.

Do not add the `as-set` parameter to the aggregate. If routes within the aggregate are constantly changing, the aggregate flaps to keep track of the changes in the AS_PATH.

In route maps used in the `suppress-map` parameter, routes meeting the `deny` clause are not suppressed; in other words, they are allowed. The opposite is true: routes meeting the `permit` clause are suppressed.

If the route is injected using the `network` command, that route stills appear in the routing table if the `summary-only` parameter is configured in the `aggregate-address` command.

The `summary-only` parameter suppresses all advertisements. If you want to suppress advertisements to only specific neighbors, use the `neighbor distribute-list` command.

bgp dampening

Enable MBGP route dampening.

Syntax `bgp dampening [half-life time] [route-map map-name]`
To disable route dampening, use the `no bgp dampening [half-life time] [route-map map-name]` command.

Parameters

half-life time	(OPTIONAL) Enter the number of minutes after which the Penalty is decreased. After the router assigns a Penalty of 1024 to a route, the Penalty is decreased by half, after the half-life period expires. The range is from 1 to 45. The default is 15 minutes .
route-map map-name	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route map. Only match commands in the configured route map are supported.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp ipv6 unicast

Reset MBGP sessions.

Syntax `clear ip bgp ipv6 unicast * ipv6-address prefix-length [dampening | flap-statistics] peer-group]`

Parameters

*	Enter the character <code>*</code> to clear all peers.
ipv6-address prefix-length	Enter the IPv6 address in the <code>x:x:x::x</code> format then the prefix length in the <code>/x</code> format. The range is from <code>/0</code> to <code>/128</code> .

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

dampening	(OPTIONAL) Enter the keyword <code>dampening</code> to clear route flap dampening information.
flap-statistics	(OPTIONAL) Enter the keywords <code>flap-statistics</code> to reset the flap statistics on all prefixes from that neighbor.
peer-group	(OPTIONAL) Enter the keywords <code>peer-group</code> to clear all members of a peer-group.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp ipv6 unicast dampening

Clear information on route dampening.

Syntax `clear ip bgp dampening ipv6 unicast [network network-mask]`

Parameters

network	(OPTIONAL) Enter the IPv6 network address in <code>x:x:x::x</code> format.
network-mask	If you enter the network address, next enter the network mask, from 0 to 128.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip bgp ipv6 unicast flap-statistics

Clear BGP flap statistics, which includes the number of flaps and the time of the last flap.

Syntax `clear ip bgp ipv6 unicast flap-statistics [network | filter-list list | regexp regexp]`

Parameters

network	(OPTIONAL) Enter the IPv6 network address in <code>x:x:x::x</code> format to clear flap statistics.
filter-list list	(OPTIONAL) Enter the keywords <code>filter-list</code> then the name of a configured AS-PATH list (maximum 16 characters).
regexp regexp	(OPTIONAL) Enter the keyword <code>regexp</code> then regular expressions. Use one or a combination of the following: <ul style="list-style-type: none"><code>.</code> (period) matches on any single character, including white space.

- * (asterisk) matches on sequences in a pattern (zero or more sequences).
- + (plus sign) matches on sequences in a pattern (one or more sequences).
- ? (question mark) matches sequences in a pattern (0 or 1 sequences).
- [] (brackets) matches a range of single-character patterns.
- ^ (caret) matches the beginning of the input string. (If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.)
- \$ (dollar sign) matches the end of the output string.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip bgp ipv6 unicast dampening

View information on routes being dampened.

Syntax `debug ip bgp ipv6 unicast dampening`
 To disable debugging, use the `no debug ip bgp ipv6 unicast dampening` command.

Parameters **dampening** Enter the keyword `dampening` to clear route flap dampening information.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the S4820T.

debug ip bgp ipv6 unicast peer-group updates

View information about BGP peer-group updates.

Syntax `debug ip bgp ipv6 unicast peer-group peer-group-name updates [in | out]`
 To disable debugging, use the `no debug ip bgp ipv6 unicast peer-group peer-group-name updates [in | out]` command.

Parameters **peer-group *peer-group-name*** Enter the keywords `peer-group` then the name of the peer-group.

updates	Enter the keyword <code>updates</code> to view BGP update information.
in	(OPTIONAL) Enter the keyword <code>in</code> to view only BGP updates received from neighbors.
out	(OPTIONAL) Enter the keyword <code>out</code> to view only BGP updates sent to neighbors.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip bgp ipv6 unicast updates

View information about BGP updates.

Syntax `debug ip bgp ipv6 unicast ipv6-address prefix-length updates [in | out]`

Parameters

ipv6-address prefix-length Enter the IPv6 address in the `x:x:x:x` format then the prefix length in the `/x` format. The range is from `/0` to `/128`.

 **NOTE:** The `::` notation specifies successive hexadecimal fields of zeros.

updates	Enter the keyword <code>updates</code> to view BGP update information.
in	(OPTIONAL) Enter the keyword <code>in</code> to view only BGP updates received from neighbors.
out	(OPTIONAL) Enter the keyword <code>out</code> to view only BGP updates sent to neighbors.

Defaults Disabled.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

distance bgp

Define an administrative distance for routes.

Syntax `distance bgp external-distance internal-distance local-distance`
To return to default values, use the `no distance bgp` command.

Parameters

external-distance Enter a number to assign to routes learned from a neighbor external to the AS. The range is from 1 to 255. The default is **20**.

internal-distance Enter a number to assign to routes learned from a router within the AS. The range is from 1 to 255. The default is **200**.

local-distance Enter a number to assign to routes learned from networks listed in the network command. The range is from 1 to 255. The default is **200**.

Defaults

- external-distance = **20**
- internal-distance = **200**
- local-distance = **200**

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

 **CAUTION: Dell Networking recommends that you do not change the administrative distance of internal routes. Changing the administrative distances may cause routing table inconsistencies.**

The higher the administrative distance assigned to a route means that your confidence in that route is low. Routes assigned an administrative distance of 255 are not installed in the routing table.

Routes from confederations are treated as internal BGP routes.

neighbor activate

Allows you to enable a specified neighbor/peer group for the current address and subsequent address family identifier (AFI/SAFI).

Syntax

```
neighbor [ipv6-address | peer-group-name] activate
```

To disable, use the no `neighbor [ipv6-address | peer-group-name] activate` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Identify a peer group by name.

activate Enter the keyword `activate` to enable the identified neighbor or peer group in the new AFI/SAFI.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, when a neighbor/peer group configuration is created in the Router BGP context, it is enabled for the IPv6/Unicast AFI/SAFI. By using `activate` in the new context, the neighbor/peer group is enabled for AFI/SAFI.

Related Command `address family` — changes the context to SAFI.

neighbor advertisement-interval

Set the advertisement interval between BGP neighbors or within a BGP peer group.

Syntax `neighbor {ipv6-address | peer-group-name} advertisement-interval seconds`
 To return to the default value, use the `no neighbor {ipv6-address | peer-group-name} advertisement-interval` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

peer-group-name Enter the name of the peer group to set the advertisement interval for all routers in the peer group.

seconds Enter a number as the time interval, in seconds, between BGP advertisements. The range is from 0 to 600 seconds. The default is **5 seconds** for internal BGP peers and **30 seconds** for external BGP peers.

Defaults

- seconds = **5 seconds** (internal peers)
- seconds = **30 seconds** (external peers)

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor default-originate

Inject the default route to a BGP peer or neighbor.

Syntax `neighbor {ipv6-address | peer-group-name} default-originate [route-map map-name]`
 To remove a default route, use the `no neighbor {ipv6-address | peer-group-name} default-originate` command.

Parameters	<p><i>ipv6-address</i> Enter the IPv6 address in the x:x:x::x format.</p> <p> NOTE: The :: notation specifies successive hexadecimal fields of zeros.</p> <p><i>peer-group-name</i> Enter the name of the peer group to set the default route of all routers in that peer group.</p> <p><i>route-map map-name</i> (OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route map.</p>						
Defaults	Not configured.						
Command Modes	ROUTER BGPV6-ADDRESS FAMILY						
Supported Modes	Full-Switch						
Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.2(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

neighbor distribute-list

Distribute BGP information using an established prefix list.

Syntax `neighbor {ipv6-address | peer-group-name} distribute-list prefix-list-name {in | out}`

To delete a neighbor distribution list, use the `no neighbor {ipv6-address | peer-group-name} distribute-list prefix-list-name {in | out}` command.

Parameters	<p><i>ipv6-address</i> Enter the IPv6 address in the x:x:x::x format.</p> <p> NOTE: The :: notation specifies successive hexadecimal fields of zeros.</p> <p><i>peer-group-name</i> Enter the name of the peer group.</p> <p><i>prefix-list-name</i> Enter the name of an established prefix list. If the prefix list is not configured, the default is permit (to allow all routes).</p> <p><i>in</i> Enter the keyword in to distribute only inbound traffic.</p> <p><i>out</i> Enter the keyword out to distribute only outbound traffic.</p>						
Defaults	Not configured.						
Command Modes	ROUTER BGPV6-ADDRESS FAMILY						
Supported Modes	Full-Switch						
Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.2(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

Related Commands [neighbor filter-list](#) — assigns a AS-PATH list to a neighbor or peer group.
[neighbor route-map](#) — assigns a route map to a neighbor or peer group.

neighbor filter-list

Configure a BGP filter based on the AS-PATH attribute.

Syntax `neighbor [ipv6-address | peer-group-name] filter-list aspath access-list-name [in | out]`

To delete a BGP filter, use the `no neighbor [ipv6-address | peer-group-name] filter-list aspath access-list-name [in | out]` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<i>peer-group-name</i>	Enter the name of the peer group to apply the filter to all routers in the peer group.
<i>access-list-name</i>	Enter the name of an established AS-PATH access list. If the AS-PATH access list is not configured, the default is permit (to allow routes).
<i>in</i>	Enter the keyword <code>in</code> to filter inbound BGP routes.
<i>out</i>	Enter the keyword <code>out</code> to filter outbound BGP routes.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor maximum-prefix

Control the number of network prefixes received.

Syntax `neighbor {ipv6-address | peer-group-name} maximum-prefix maximum [threshold] [warning-only]`

To return to the default values, use the `no neighbor {ipv6-address | peer-group-name} maximum-prefix maximum [threshold] [warning-only]` command.

Parameters

<i>ipv6-address</i>	Enter the IPv6 address in the x:x:x:x format. NOTE: The :: notation specifies successive hexadecimal fields of zeros.
---------------------	---

<i>peer-group-name</i>	Enter the name of the peer group.
<i>maximum</i>	Enter a number as the maximum number of prefixes allowed for this BGP router. The range is from 1 to 4294967295.
<i>threshold</i>	(OPTIONAL) Enter a number to be used as a percentage of the maximum value. When the number of prefixes reaches this percentage of the maximum value, the software sends a message. The range is from 1 to 100 percent. The default is 75 .
<i>warning-only</i>	(OPTIONAL) Enter the keyword <code>warning-only</code> to set the router to send a log message when the maximum value is reached. If this parameter is not set, the router stops peering when the maximum number of prefixes is reached.

Defaults threshold = **75**

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor next-hop-self

Allows you to configure the router as the next hop for a BGP neighbor.

Syntax `neighbor {ipv6-address | peer-group-name} next-hop-self`
 To return to the default setting, use the `no neighbor {ipv6-address | peer-group-name} next-hop-self` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x::x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name (OPTIONAL) Enter the name of the peer group.

Defaults Disabled.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you configure the `set ipv6 next-hop` command in ROUTE-MAP mode, its configuration takes precedence over the `neighbor next-hop-self` command.

neighbor remove-private-as

Remove private AS numbers from the AS-PATH of outgoing updates.

Syntax `neighbor {ipv6-address | peer-group-name} remove-private-as`
To return to the default, use the `no neighbor {ipv6-address | peer-group-name} remove-private-as` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 | **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group to remove the private AS numbers.

Defaults Disabled (that is, the private AS number are not removed).

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

neighbor route-map

Apply an established route map to either incoming or outbound routes of a BGP neighbor or peer group.

Syntax `neighbor {ipv6-address | peer-group-name} route-map map-name {in | out}`
To remove the route map, use the `no neighbor {ipv6-address | peer-group-name} route-map map-name {in | out}` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 | **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group.

map-name Enter the name of an established route map. If the Route map is not configured, the default is **deny** (to drop all routes).

in Enter the keyword `in` to filter inbound routes.

out Enter the keyword `out` to filter outbound routes.

Defaults Not configured.

Command Modes ROUTER BGPV6-ADDRESS FAMILY

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you apply a route map to outbound routes, only routes that match at least one section of the route map are permitted.

If you identify a peer group by name, the peers in that peer group inherit the characteristics in the Route map used in this command. If you identify a peer by IP address, the Route map overwrites either the inbound or outbound policies on that peer.

neighbor route-reflector-client

Configure a neighbor as a member of a route reflector cluster.

Syntax

```
neighbor {ipv6-address | peer-group-name} route-reflector-client
```

To indicate that the neighbor is not a route reflector client or to delete a route reflector configuration, use the `no neighbor {ipv6-address | peer-group-name} route-reflector-client` command.

Parameters

ipv6-address Enter the IPv6 address in the x:x:x:x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zeros.**

peer-group-name Enter the name of the peer group. All routers in the peer group receive routes from a route reflector.

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The first time you enter this command it configures the neighbor as a route reflector and members of the route-reflector cluster. Internal BGP (IBGP) speakers do not need to be fully meshed if you configure a route reflector.

When all clients of a route reflector are disabled, the neighbor is no longer a route reflector.

network

Specify the networks for the BGP process and enter them in the BGP routing table.

Syntax

```
network ipv6-address [route-map map-name]
```

To remove a network, use the `no network ipv6-address [route-map map-name]` command.

Parameters

<code>ipv6-address</code>	Enter the IPv6 address in the x:x:x::x format.  NOTE: The :: notation specifies successive hexadecimal fields of zeros.
<code>route-map map-name</code>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map. If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The software resolves the network address configured by the `network` command with the routes in the main routing table to ensure that the networks are reachable using non-BGP routes and non-default routes.

Related Commands

[redistribute](#) — redistributes routes into BGP.

redistribute

Redistribute routes into BGP.

Syntax

```
redistribute {connected | static} [route-map map-name]
```

To disable redistribution, use the `no redistribution {connected | static}` command.

Parameters

<code>connected</code>	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
<code>static</code>	Enter the keyword <code>static</code> to redistribute manually configured routes. These routes are treated as incomplete routes.
<code>route-map map-name</code>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map. If the route map is not configured, the default is deny (to drop all routes).

Defaults

Not configured.

Command Modes

ROUTER BGPV6-ADDRESS FAMILY

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you do not configure the `default-metric` command, in addition to the `redistribute` command, or there is no route map to set the metric, the metric for redistributed static and connected is "0".

To redistribute the default route (0::0/0), configure the `neighbor default-originate` command.

Related Commands [neighbor default-originate](#) — injects the default route.

show ip bgp ipv6 unicast

View the current BGP information.

Syntax `show ip bgp ipv6 unicast [network [network-mask] [longer-prefixes]]`

Parameters		
network	(OPTIONAL)	Enter the network address (in dotted decimal format) of the BGP network to view information only on that network.
network-mask	(OPTIONAL)	Enter the keywords <code>network mask</code> (in slash prefix format) of the BGP network address.
longer-prefixes	(OPTIONAL)	Enter the keywords <code>longer-prefixes</code> to view all routes with a common prefix.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable the `bgp non-deterministic-med` command, the `show ip bgp` command output for a BGP route does not list the INACTIVE reason.

show ip bgp ipv6 unicast cluster-list

View BGP neighbors in a specific cluster.

Syntax `show ip bgp ipv6 unicast cluster-list [cluster-id]`

Parameters		
cluster-id	(OPTIONAL)	Enter the cluster id in dotted decimal format.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast community

View information on all routes with community attributes or view specific BGP community groups.

Syntax `show ip bgp ipv6 unicast community [community-number] [local-as] [no-export] [no-advertise]`

Parameters

community-number	Enter the community number in AA:NN format where AA is the AS number (2 bytes) and NN is a value specific to that autonomous system. You can specify up to eight community numbers to view information on those community groups.
local-AS	Enter the keywords <code>local-as</code> to view all routes with the COMMUNITY attribute of NO_EXPORT_SUBCONFED. All routes with the NO_EXPORT_SUBCONFED (0xFFFFFFFF03) community attribute must not be advertised to external BGP peers.
no-advertise	Enter the keywords <code>no-advertise</code> to view all routes containing the well-known community attribute of NO_ADVERTISE. All routes with the NO_ADVERTISE (0xFFFFFFFF02) community attribute must not be advertised to other BGP peers.
no-export	Enter the keywords <code>no-export</code> to view all routes containing the well-known community attribute of NO_EXPORT. All routes with the NO_EXPORT (0xFFFFFFFF01) community attribute must not be advertised outside a BGP confederation boundary.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To view the total number of COMMUNITY attributes found, use the `show ip bgp ipv6 unicast summary` command. The text line above the route table states the number of COMMUNITY attributes found.

show ip bgp ipv6 unicast community-list

View routes that are affected by a specific community list.

Syntax `show ip bgp ipv6 unicast community-list community-list-name`

Parameters

<i>community-list-name</i>	Enter the name of a configured IP community list.
----------------------------	---

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast dampened-paths

View BGP routes that are dampened (non-active).

Syntax `show ip bgp ipv6 unicast dampened-paths`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast detail

Display detailed BGP information.

Syntax `show ip bgp ipv6 unicast detail`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
R2_Training#show ip bgp ipv6 unicast detail
```

```

Detail information for BGP Node
bgpNdP 0x41a17000 : NdTmrP 0x41a17000 : NdKATmrP 0x41a17014 : NdTics 327741 :
NhLocAS 1 : NdState 2 : NdRPMPrim 1 : NdListSoc 13
NdAuto 1 : NdEqCost 1 : NdSync 0 : NdDefOrg 0
NdV6ListSoc 14 NdDefDid 0 : NdConfedId 0 : NdMedConfed 0 : NdMedMissVal -1 :
NdIgnrIllId 0 : NdRRC2C 1 : NdClstId 33686273 : NdPaTblP 0x41a19088
NdASPTblP 0x41a19090 : NdCommTblP 0x41a19098 : NhOptTransTblP 0x41a190a0 :
NdRRClstTblP 0x41a190a8
NdPktPA 0 : NdLocCBP 0x41a6f000 : NdTmpPAP 0x419efc80 : NdTmpASPAP 0x41a25000 :
NdTmpCommP 0x41a25800
NdTmpRRClP 0x41a4b000 : NdTmpOptP 0x41a4b800 : NdTmpNHP : NdOrigPAP 0
NdOrgNHP 0 : NdModPathP 0x419efcc0 : NdModASPAP 0x41a4c000 : NdModCommP
0x41a4c800
NdModOptP 0x41a4d000 : NdModNHP : NdComSortBufP 0x41a19110 : NdComSortHdP
0x41a19d04 : NdUpdAFMsk 0 : AFRstSe
t 0x41a1a298 : NHopDfrdHdP 0x41a1a3e0 : NumNhDfrd 0 : CfgHdrAFMsk 1

```

show ip bgp ipv6 unicast filter-list

View the routes that match the filter lists.

Syntax `show ip bgp ipv6 unicast filter-list as-path-name`

Parameters

as-path-name Enter the name of an AS-PATH.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast flap-statistics

View flap statistics on BGP routes.

Syntax `show ip bgp ipv6 unicast flap-statistics [ipv6-address prefix-length] [filter-list as-path-name] [regexp regular-expression]`

Parameters

ipv6-address prefix-length Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128.

 **NOTE:** The :: notation specifies successive hexadecimal fields of zeros.

filter-list as-path-name (OPTIONAL) Enter the keywords `filter-list` then the name of a configured AS-PATH ACL.

regexp regular-expression Enter a regular expression then use one or a combination of the following characters to match:

- . = (period) any single character (including a white space).
- * = (asterisk) the sequences in a pattern (0 or more sequences).
- + = (plus) the sequences in a pattern (1 or more sequences).
- ? = (question mark) sequences in a pattern (either 0 or 1 sequences).



NOTE: You must enter an escape sequence (CTRL+v) prior to entering the ? regular expression.

- [] = (brackets) a range of single-character patterns.
- ^ = (caret) the beginning of the input string. If the caret is used at the beginning of a sequence or range, it matches on everything BUT the characters specified.
- \$ = (dollar sign) the end of the output string.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip bgp ipv6 unicast flap-statistics
BGP table version is 8, local router ID is 5.5.10.4
Status codes: s suppressed, S stale, d damped, h history, * valid, > best Path
source: I - internal, a - aggregate, c - confed-external, r - redistributed, n
-
network Origin codes: i - IGP, e - EGP, ? - incomplete

   Network          From           Flaps   Duration Reuse Path
h  dead:1::/100     5ffe:10::3    1       00:03:20  1 i
h  dead:1::/100     5ffe:11::3    1       00:03:20  1 i
h  dead:4::/100     5ffe:10::3    1       00:04:39  1 i
h  dead:4::/100     5ffe:11::3    1       00:04:39  1 i

Dell#
```

show ip bgp ipv6 unicast inconsistent-as

View routes with inconsistent originating autonomous system (AS) numbers; that is, prefixes that are announced from the same neighbor AS but with a different AS-Path.

Syntax

```
show ip bgp ipv6 unicast inconsistent-as
```

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip bgp ipv6 unicast neighbors

Allows you to view the information exchanged by BGP neighbors.

Syntax `show ip bgp ipv6 unicast neighbors [ipv6-address prefix-length [advertised-routes | dampened-routes | detail | flap-statistics | routes]]`

Parameters

<i>ipv6-address prefix-length</i>	(OPTIONAL) Enter the IPv6 address in the x:x:x::x format then the prefix length in the /x format. The range is from /0 to /128.
	 NOTE: The :: notation specifies successive hexadecimal fields of zeros.
advertised-routes	(OPTIONAL) Enter the keywords <code>advertised-routes</code> to view only the routes the neighbor sent.
dampened-routes	(OPTIONAL) Enter the keywords <code>dampened-routes</code> to view information on dampened routes from the BGP neighbor.
flap-statistics	(OPTIONAL) Enter the keywords <code>flap-statistics</code> to view flap statistics on the neighbor's routes.
detail	(OPTIONAL) Display detailed neighbor information.
routes	(OPTIONAL) Enter the keyword <code>routes</code> to view only the neighbor's feasible routes.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip bgp ipv6 unicast neighbors` command shown in the Example below.

Lines Beginning With	Description
BGP neighbor	Displays the BGP neighbor address and its AS number. The last phrase in the line indicates whether the link between the BGP router and its neighbor is an external or internal one. If they are located in the same AS, then the link is internal; otherwise, the link is external.
BGP version	Displays the BGP version (always version 4) and the remote router ID.
BGP state	Displays the neighbor's BGP state and the amount of time in hours:minutes:seconds it has been in that state.
Last read	This line displays the following information:

Lines Beginning With	Description
	<ul style="list-style-type: none"> · last read is the time (hours:minutes:seconds) the router reads a message from its neighbor · hold time is the number of seconds configured between messages from its neighbor · keepalive interval is the number of seconds between keepalive messages to help ensure that the TCP session is still alive
Received messages	This line displays the number of BGP messages received, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Sent messages	The line displays the number of BGP messages sent, the number of notifications (error messages), and the number of messages waiting in a queue for processing.
Received updates	This line displays the number of BGP updates received and sent.
Minimum time	Displays the minimum time, in seconds, between advertisements.
(List of inbound and outbound policies)	Displays the policy commands configured and the names of the Route map, AS-PATH ACL, or Prefix list configured for the policy.
For address family:	Displays IPv6 Unicast as the address family.
BGP table version	Displays which version of the primary BGP routing table the router and the neighbor are using.
Accepted Prefixes	Displays the number of network prefixes accepted by the router and the amount of memory used to process those prefixes.
Prefixes advertised	Displays the number of network prefixes advertised, the number rejected, and the number withdrawn from the BGP routing table.
Connections established	Displays the number of TCP connections established and dropped between the two peers to exchange BGP information.
Last reset	Displays the amount of time since the peering session was last reset. Also states if the peer resets the peering session. If the peering session was never reset, the word "never" is displayed.
Local host:	Displays the peering address of the local router and the TCP port number.
Foreign host:	Displays the peering address of the neighbor and the TCP port number.

Example

```
Dell#show ip bgp ipv6 unicast neighbors
BGP neighbor is 5ffe:10::3, remote AS 1, external link
  BGP version 4, remote router ID 5.5.5.3
  BGP state ESTABLISHED, in this state for 00:00:32
  Last read 00:00:32, last write 00:00:32
  Hold time is 180, keepalive interval is 60 seconds
  Received 1404 messages, 0 in queue
    3 opens, 1 notifications, 1394 updates
    6 keepalives, 0 route refresh requests
  Sent 48 messages, 0 in queue
    3 opens, 2 notifications, 0 updates
    43 keepalives, 0 route refresh requests
  Minimum time between advertisement runs is 30 seconds
  Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
  MULTIPROTO_EXT(1)
  ROUTE_REFRESH(2)
  CISCO_ROUTE_REFRESH(128)
```

```

Capabilities advertised to neighbor for IPv6 Unicast :
MULTIPROTO_EXT(1)
ROUTE_REFRESH(2)
CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes

Prefixes accepted 1 (consume 4 bytes), withdrawn 0 by peer
Prefixes advertised 0, rejected 0, withdrawn 0 from peer
Connections established 3; dropped 2
Last reset 00:00:39, due to Closed by neighbor

Notification History
'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:10::4, Local port: 179
Foreign host: 5ffe:10::3, Foreign port: 35470

Notification History
'Connection Reset' Sent : 1 Recv: 0

BGP neighbor is 5ffe:11::3, remote AS 1, external link
BGP version 4, remote router ID 5.5.5.3
BGP state ESTABLISHED, in this state for 00:00:28
Last read 00:00:28, last write 00:00:28
Hold time is 180, keepalive interval is 60 seconds
Received 27 messages, 3 notifications, 0 in queue
Sent 0 messages, 0 notifications, 0 in queue
Received 8 updates, Sent 0 updates
Route refresh request: received 0, sent 0
Minimum time between advertisement runs is 30 seconds
Minimum time before advertisements start is 0 seconds

Capabilities received from neighbor for IPv6 Unicast :
MULTIPROTO_EXT(1)
ROUTE_REFRESH(2)
CISCO_ROUTE_REFRESH(128)
Capabilities advertised to neighbor for IPv6 Unicast :
MULTIPROTO_EXT(1)
ROUTE_REFRESH(2)
CISCO_ROUTE_REFRESH(128)

For address family: IPv6 Unicast
BGP table version 12, neighbor version 12
2 accepted prefixes consume 32 bytes
Prefix advertised 0, rejected 0, withdrawn 0

Connections established 3; dropped 2
Last reset 00:00:41, due to Closed by neighbor

Notification History
'OPEN error/Bad AS' Sent : 0 Recv: 1

Local host: 5ffe:11::4, Local port: 179

```

show ip bgp ipv6 unicast peer-group

Allows you to view information on the BGP peers in a peer group.

Syntax show ip bgp ipv6 unicast peer-group [peer-group-name [summary]]

Parameters	<i>peer-group-name</i>	(OPTIONAL) Enter the name of a peer group to view information about that peer group only.
	summary	(OPTIONAL) Enter the keyword <code>summary</code> to view status information of the peers in that peer group. The output is the same as that found in the <code>show ip bgp ipv6 unicast summary</code> command.
Command Modes	<ul style="list-style-type: none"> · EXEC · EXEC Privilege 	
Supported Modes	Full–Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	neighbor peer-group (assigning peers) — assigns a peer to a peer-group. neighbor peer-group (creating group) — creates a peer group.	

show ip bgp ipv6 unicast summary

Allows you to view the status of all BGP connections.

Syntax	<code>show ip bgp ipv6 unicast summary</code>	
Command Modes	<ul style="list-style-type: none"> · EXEC · EXEC Privilege 	
Supported Modes	Full–Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The following describes the <code>show ip bgp ipv6 unicast summary</code> command shown in the Example below.	
	Field	Description
	BGP router identifier	Displays the local router ID and the AS number.
	BGP table version	Displays the BGP table version and the main routing table version.
	network entries	Displays the number of network entries, route paths, and the amount of memory used to process those entries.
	BGP path attribute entries	Displays the number of BGP path attributes and the amount of memory used to process them.

Field	Description
BGP AS-PATH entries	Displays the number of BGP AS_PATH attributes processed and the amount of memory used to process them.
BGP community entries	Displays the number of BGP COMMUNITY attributes processed and the amount of memory used to process them. The <code>show ip bgp ipv6 unicast community</code> command provides more details on the COMMUNITY attributes.
Dampening enabled	Displayed only when dampening is enabled. Displays the number of paths designated as history, dampened, or penalized.
Neighbor	Displays the BGP neighbor address.
AS	Displays the AS number of the neighbor.
MsgRcvd	Displays the number of BGP messages that neighbor received.
MsgSent	Displays the number of BGP messages that neighbor sent.
TblVer	Displays the version of the BGP table that was sent to that neighbor.
InQ	Displays the number of messages from that neighbor waiting to be processed.
OutQ	Displays the number of messages waiting to be sent to that neighbor. If a number appears in parentheses, the number represents the number of messages waiting to be sent to the peer group.
Up/Down	Displays the amount of time (in hours:minutes:seconds) that the neighbor is in the Established stage. If the neighbor has never moved into the Established stage, the word never is displayed.
State/Pfx	<p>If the neighbor is in Established stage, the number of network prefixes received.</p> <p>If a maximum limit was configured with the <code>neighbor maximum-prefix</code> command, (prfxd) appears in this column.</p> <p>If the neighbor is not in Established stage, the current stage is displayed (Idle, Connect, Active, OpenSent, OpenConfirm). When the peer is transitioning between states and clearing the routes received, the phrase (Purging) may appear in this column.</p> <p>If the neighbor is disabled, the phrase (Admin shut) appears in this column.</p>

Example

```
Dell#show ip bgp ipv6 unicast summary
BGP router identifier 5.5.10.4, local AS number 100
BGP table version is 12, main routing table version 12
2 network entrie(s) and 4 paths using 536 bytes of memory
1 BGP path attribute entrie(s) using 112 bytes of memory
1 BGP AS-PATH entrie(s) using 39 bytes of memory
Dampening enabled. 0 history paths, 0 dampened paths, 0 penalized paths

Neighbor    AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/Pfx
5ffe:10::3  1    28       0        12     0    0 00:01:01  2
5ffe:11::3  1    27       0        12     0    0 00:00:55  2
Dell#
```

iSCSI Optimization

Internet small computer system interface (iSCSI) optimization enables quality-of-service (QoS) treatment for iSCSI storage traffic on an Aggregator.

NOTE: When iSCSI storage devices are detected on the server-ports, storm-control is disabled on those ports. When the iSCSI devices are off the ports, storm-control is enabled again.

Topics:

- [advertise dcbx-app-tlv](#)
- [iscsi aging time](#)
- [iscsi cos](#)
- [iscsi enable](#)
- [iscsi priority-bits](#)
- [iscsi profile-compellent](#)
- [iscsi target port](#)
- [show iscsi](#)
- [show iscsi sessions](#)
- [show iscsi sessions detailed](#)
- [show run iscsi](#)

advertise dcbx-app-tlv

Configure DCBX to send iSCSI TLV advertisements.

Syntax `advertise dcbx-app-tlv iscsi`
To disable DCBX iSCSI TLV advertisements, use the `no advertise dcbx-app-tlv iscsi` command.

Defaults Disabled.

Command Modes PROTOCOL LLDP

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can configure iSCSI TLVs to send either globally or on a specified interface. The interface configuration takes priority over global configuration.

iscsi aging time

Set the aging time for iSCSI sessions.

Syntax `iscsi aging time time`
To remove the iSCSI session aging time, use the `no iscsi aging time` command.

Parameters ***time*** Enter the aging time for the iSCSI session. The range is from 5 to 43,200 minutes.

Defaults **10 minutes**

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

iscsi cos

Set the QoS policy that is applied to the iSCSI flows.

Syntax `iscsi cos {enable | disable | dot1p vlan-priority-value [remark] | dscp dscp-value [remark]}`
To disable the QoS policy, use the `no iscsi cos dscp` command.

Parameters

- enable** Enter the keyword `enable` to allow the application of preferential QoS treatment to iSCSI traffic so that the iSCSI packets are scheduled in the switch with a dot1p priority 4 regardless of the VLAN priority tag in the packet. The default is: the iSCSI packets are handled with dotp1 priority 4 without remark.
- disable** Enter the keyword `disable` to disable the application of preferential QoS treatment to iSCSI frames.
- dot1p *vlan-priority-value*** Enter the dot1p value of the VLAN priority tag assigned to the incoming packets in an iSCSI session. The range is from 0 to 7. The default is the dot1p value in ingress iSCSI frames is not changed and is the same priority is used in iSCSI TLV advertisements if you did not enter the `iscsi priority-bits` command.

dscp dscp-value	Enter the DSCP value assigned to the incoming packets in an iSCSI session. The valid range is from 0 to 63. The default is: the DSCP value in ingress packets is not changed.
remark	Marks the incoming iSCSI packets with the configured dot1p or DSCP value when they egress to the switch. The default is: the dot1p and DSCP values in egress packets are not changed.

Defaults The default dot1p VLAN priority value is 4 without the `remark` option.

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

iscsi enable

Globally enable iSCSI optimization.

Syntax `iscsi enable`
To disable iSCSI optimization, use the `no iscsi enable` command.

Parameters **enable** Enter the keyword `enable` to enable the iSCSI optimization feature.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable the iSCSI feature using the `iscsi enable` command, flow control settings are set to `rx on tx off` on all interfaces.

iscsi priority-bits

Configure the iSCSI priority advertised for the iSCSI protocol in application priority TLVs.

Syntax `iscsi priority-bits priority-bitmap`
To remove the configured iSCSI priority, use the `no iscsi priority-bits` command.

Parameters `priority-bitmap` Enter the priority-bitmap range. The range is from 1 to FF.

Defaults 0x10

Command Modes PROTOCOL LLDP

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is available at the global level only.

iscsi profile-compellent

Configure the auto-detection of Dell Compellent arrays on a port.

Syntax `iscsi profile-compellent`

Defaults Dell Compellent disk arrays are not detected.

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

iscsi target port

Configure the iSCSI target ports and optionally, the IP addresses on which iSCSI communication is monitored.

Syntax `iscsi target port [tcp-port-2...tcp-port-16]ip-address [ip-address]`
To remove the configured iSCSI target ports or IP addresses, use the `no iscsi target port` command.

Parameters

<code>tcp-port-2...tcpport- 16</code>	Enter the tcp-port number of the iSCSI target ports. The <code>tcp-port-n</code> is the TCP port number or a list of TCP port numbers on which the iSCSI target listens to requests. Separate port numbers with a comma. The default is 860, 3260 .
<code>ip-address</code>	(Optional) Enter the ip-address that the iSCSI monitors. The ip-address specifies the IP address of the iSCSI target.

Defaults **860, 3260**

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module

Usage Information You can configure up to 16 target TCP ports on the switch in one command or multiple commands.

When you use the `no iscsi target port` command and the TCP port you wish to delete is one bound to a specific IP address, the IP address value must be included in the command.

show iscsi

Display the currently configured iSCSI settings.

Syntax `show iscsi`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show iscsi
iSCSI is enabled
iSCSI session monitoring is enabled
iSCSI COS : dot1p is 4 no-remark
Session aging time: 10
Maximum number of connections is 256
-----
iSCSI Targets and TCP Ports:
-----
TCP Port      Target IP Address
3260
860
Dell#
```

Related Commands

- [show iscsi sessions](#) — displays information on active iSCSI sessions on the switch that have been established since the last reload.
- [show iscsi sessions detailed](#) — displays detailed information on active iSCSI sessions on the switch.

show iscsi sessions

Display information on active iSCSI sessions on the switch that have been established since the last reload.

Syntax show iscsi sessions

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell# show iscsi sessions
Session 0:

Target: iqn.2001-05.com.equallogic:0-8a0906-0e70c2002-10a0018426a48c94-iom010
Initiator: iqn.1991-05.com.microsoft:win-x918v27yajg
ISID: 400001370000

Session 1:

Target: iqn.2001-05.com.equallogic:0-8a0906-0f60c2002-0360018428d48c94-iom011
Initiator: iqn.1991-05.com.microsoft:win-x918v27yajg
ISID: 400001370000.
```

Related Commands

- [show iscsi](#) — displays the currently configured iSCSI settings.

- [show iscsi sessions detailed](#) — displays detailed information on active iSCSI sessions on the switch.

show iscsi sessions detailed

Displays detailed information on active iSCSI sessions on the switch.

Syntax `show iscsi sessions detailed [session isid]`

Parameters

<i>isid</i>	Enter the session's iSCSI ID to display detailed information on specified iSCSI session.
-------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell# show iscsi sessions detailed
Session 0 :
-----
Target:iqn.2010-11.com.ixia:ixload:iscsi-TG1
Initiator:iqn.2010-11.com.ixia.ixload:initiator-iscsi-2c
Up Time:00:00:01:28 (DD:HH:MM:SS)
Time for aging out:00:00:09:34 (DD:HH:MM:SS)
ISID:806978696102
Initiator Initiator Target Target Connection
IP Address TCP Port IP Address TCPPort ID
10.10.0.44 33345 .10.0.101 3260 0
Session 1 :
-----
Target:iqn.2010-11.com.ixia:ixload:iscsi-TG1
Initiator:iqn.2010-11.com.ixia.ixload:initiator-iscsi-35
Up Time:00:00:01:22 (DD:HH:MM:SS)
Time for aging out:00:00:09:31 (DD:HH:MM:SS)
ISID:806978696102
Initiator Initiator Target Target Connection
IP Address TCP Port IP Address TCPPort ID
10.10.0.53 33432 10.10.0.101 3260 0
```

- Related Commands**
- [show iscsi](#) — displays the currently configured iSCSI settings.
 - [show iscsi sessions](#) — displays information on active iSCSI sessions on the switch that have been established since the last reload.

show run iscsi

Display all globally configured non-default iSCSI settings in the current session.

Syntax `show run iscsi`

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [show iscsi](#) — displays the currently configured iSCSI settings.
- [show iscsi sessions](#) — show iscsi session — displays detailed information about active iSCSI sessions on the switch.
- [show iscsi sessions detailed](#) — displays detailed information on active iSCSI sessions on the switch.

Intermediate System to Intermediate System (IS-IS)

The Dell Networking OS supports the intermediate system to intermediate system (IS-IS) protocol for IPv4 and IPv6.

IS-IS is an interior gateway protocol that uses a shortest-path-first algorithm. IS-IS facilitates the communication between open systems, supporting routers passing both IP and OSI traffic.

A router is considered an intermediate system. Networks are partitioned into manageable routing domains, called areas. Intermediate systems send, receive, and forward packets to other routers within their area (Level 1 and Level 1-2 devices). Only Level 1-2 and Level 2 devices communicate with other areas.

IS-IS protocol standards are listed in the Standard Compliance chapter in the *Dell Networking OS Configuration Guide*.

NOTE: The fundamental mechanisms of IS-IS are the same between IPv4 and IPv6. Where there are differences between the two versions, they are identified and clarified in this chapter. Except where identified, the information in this chapter applies to both protocol versions.

Topics:

- adjacency-check
- advertise
- area-password
- clear config
- clear isis
- clns host
- debug isis
- debug isis adj-packets
- debug isis local-updates
- debug isis snp-packets
- debug isis spf-triggers
- debug isis update-packets
- default-information originate
- description
- distance
- distribute-list in
- distribute-list out
- distribute-list redistributed-override
- domain-password
- graceful-restart ietf
- graceful-restart interval
- graceful-restart t1
- graceful-restart t2
- graceful-restart t3

- graceful-restart restart-wait
- hello padding
- hostname dynamic
- ignore-lsp-errors
- ip router isis
- ipv6 router isis
- isis circuit-type
- isis csnp-interval
- isis csnp-interval
- isis hello-multiplier
- isis hello padding
- isis ipv6 metric
- isis metric
- isis network point-to-point
- isis password
- isis priority
- is-type
- log-adjacency-changes
- lsp-gen-interval
- lsp-mtu
- lsp-refresh-interval
- max-area-addresses
- max-lsp-lifetime
- maximum-paths
- metric-style
- multi-topology
- net
- passive-interface
- redistribute
- redistribute bgp
- redistribute ospf
- router isis
- set-overload-bit
- show config
- show isis database
- show isis graceful-restart detail
- show isis hostname
- show isis interface
- show isis neighbors
- show isis protocol
- show isis traffic
- spf-interval

adjacency-check

Verify that the “protocols supported” field of the IS-IS neighbor contains matching values to this router.

Syntax `adjacency-check`
To disable adjacency check, use the `no adjacency-check` command.

Defaults Enabled.

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To perform protocol-support consistency checks on hello packets, use this command. The adjacency-check is enabled by default.

advertise

Leak routes between levels (distribute IP prefixes between Level 1 and Level 2 and vice versa).

Syntax `advertise {level1-into-level2 | level2-into-level1} prefix-list-name`
To return to the default, use the `no advertise {level1-into-level2 | level2-into-level1} [prefix-list-name]` command.

Parameters

level1-into-level2	Enter the keywords <code>level1-into-level2</code> to advertise Level 1 routes into Level 2 LSPs. This setting is the default.
level2-into-level1	Enter the keywords <code>level2-into-level1</code> to advertise Level 2 inter-area routes into Level 1 LSPs. This behavior is described in RFC 2966.
prefix-list-name	Enter the name of a configured IP prefix list. Routes meeting the criteria of the IP Prefix list are leaked.

Defaults **level1-into-level2** (Level 1 to Level 2 leaking enabled.)

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You cannot disable leaking from one level to another; however, you can regulate the rate flow from one level to another using an IP Prefix list. If you do not configure the IP Prefix list, all routes are leaked.

You can find more information in IETF RFC 2966, *Domain-wide Prefix Distribution with Two-Level IS-IS*.

area-password

Configure a hash message authentication code (HMAC) password for an area.

Syntax `area-password [hmac-md5 | encryption-type] password`
 To delete a password, use the `no area-password` command.

Parameters

<code>hmac-md5</code>	(OPTIONAL) Enter the keywords <code>hmac-md5</code> to encrypt the password.
<code>encryption-type</code>	(OPTIONAL) Enter 7 to encrypt the password using DES.
<code>password</code>	Enter a 1 to 16-character length alphanumeric string to prevent unauthorized access or incorrect routing information corrupting the link state database. The password is processed as plain text, which only provides limited security.

Defaults Not configured.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To prevent the link state database from receiving incorrect routing information from unauthorized routers, use the `area-password` command on routers within an area.

The configured password injects into Level 1 LSPs, CSNPs, and PSNPs.

Related Commands

- [domain-password](#) — allows you to set the authentication password for a routing domain.
- [isis password](#) — allows you to configure an authentication password for an interface.

clear config

Clear IS-IS configurations that display under the `router isis` heading of the `show running-config` command output.

Syntax `clear config`

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

 **CAUTION:** Use caution when you enter this command. Back up your configuration prior to using this command or your IS-IS configuration will be erased.

clear isis

Restart the IS-IS process. All IS-IS data is cleared.

Syntax `clear isis [tag] {* | database | traffic}`

Parameters

tag	(Optional) Enter an alphanumeric string to specify the IS-IS routing tag area.
*	Enter the keyword * to clear all IS-IS information and restart the IS-IS process. This command removes IS-IS neighbor information and IS-IS LSP database information and the full SPF calculation is done.
database	Clears IS-IS LSP database information.
traffic	Clears IS-IS counters.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clns host

Define a name-to-network service mapping point (NSAP) that you use with commands that require NSAPs and system IDs.

Syntax `clns host name nsap`

Parameters

name	Enter an alphanumeric string to identify the name-to-NSAP mapping.
nsap	Enter a specific NSAP address that is associated with the name parameter.

Defaults Not configured.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To configure a shortcut name that you can use instead of entering a long string of numbers associated with an NSAP address, use this command.

Related Commands

[hostname dynamic](#) — enables dynamic learning of host names from routers in the domain and allows the routers to advertise the host names in LSPs.

debug isis

Enable debugging for all IS-IS operations.

Syntax

`debug isis`
To disable debugging of IS-IS, use the `no debug isis` command.

Command Modes

EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Entering `debug isis` enables all debugging parameters.

To display all debugging information in one output, use this command. To turn off debugging, you normally enter separate `no` forms of each command. To disable all debug messages for IS-IS at once, enter the `no debug isis` command.

debug isis adj-packets

Enable debugging on adjacency-related activity such as hello packets that are sent and received on IS-IS adjacencies.

Syntax

`debug isis adj-packets [interface]`
To turn off debugging, use the `no debug isis adj-packets [interface]` command.

Parameters

interface

(OPTIONAL) Identifies the interface type slot/port as one of the following:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes

EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug isis local-updates

To debug IS-IS local update packets, enable debugging on a specific interface and provides diagnostic information.

Syntax `debug isis local-updates [interface]`
To turn off debugging, use the `no debug isis local-updates [interface]` command.

Parameters

interface (OPTIONAL) Identifies the interface type slot/port as one of the following:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug isis snp-packets

To debug IS-IS complete sequence number PDU (CSNP) and partial sequence number PDU (PSNP) packets, enable debugging on a specific interface and provides diagnostic information.

Syntax `debug isis snp-packets [interface]`
To turn off debugging, use the `no debug isis snp-packets [interface]` command.

Parameters

interface (OPTIONAL) Identifies the interface type slot/port as one of the following:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug isis spf-triggers

Enable debugging on the events that triggered IS-IS shortest path first (SPF) events for debugging purposes.

Syntax `debug isis spf-triggers`
To turn off debugging, use the `no debug isis spf-triggers` command.

Command Modes EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug isis update-packets

Enable debugging on link state PDUs (LSPs) that a router detects.

Syntax `debug isis update-packets [interface]`
To turn off debugging, use the `no debug isis update-packets [interface]` command.

Parameters

interface (OPTIONAL) Identifies the interface type slot/port as one of the following:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

default-information originate

Generates a default route into an IS-IS routing domain and controls the distribution of default information.

Syntax `default-information originate [always] [metric metric] [route-map map-name]`
To disable the generation of a default route into the specified IS-IS routing domain, use the `no default-information originate [always] [metric metric] [route-map map-name]` command.

Parameters

always	(OPTIONAL) Enter the keyword <code>always</code> to have the default route always advertised.
metric <i>metric</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number to assign to the route. The range is from 0 to 16777215.
route-map <i>map-name</i>	(OPTIONAL) A default route the routing process generates if the route map is satisfied.

Defaults Not configured.

Command Modes

- ROUTER ISIS (for IPv4)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (for IPv6)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When you use this command to redistribute routes into a routing domain, the router becomes an autonomous system (AS) boundary router. An AS boundary router does not always generate a default route into a routing domain. The router still requires its own default route before it can generate one.

How a metric value assigned to a default route advertises depends on the `metric-style` command configuration. If the `metric-style` command is set for Narrow mode and the metric value in the `default-information originate` command is set to a number higher than 63, the metric value advertised in the LSPs is 63. If the `metric-style` command is set for Wide mode, the metric value in the `default-information originate` command is advertised.

Related Commands

- [redistribute](#) — redistributes routes from one routing domain to another routing domain.
- [isis metric](#) — configures a metric for an interface.
- [metric-style](#) — sets the metric style for the router.
- [show isis database](#) — displays the IS-IS link state database.

description

Enter a description of the IS-IS routing protocol.

Syntax `description {description}`

To remove the description, use the `no description {description}` command.

Parameters	description	Enter a description to identify the IS-IS protocol (80 characters maximum).
Defaults	none	
Command Modes	ROUTER ISIS	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	router isis	— Enter ROUTER mode on the switch.

distance

Define the administrative distance for learned routes.

Syntax `distance weight [ip-address mask [prefix-list]]`
To return to the default values, use the `no distance weight` command.

Parameters	weight	The administrative distance value indicates the reliability of a routing information source. The range is from 1 to 255. (A higher relative value indicates lower reliability. Routes with smaller values are given preference.) The default is 115 .
	ip-address mask	(OPTIONAL) Enter an IP address in dotted decimal format and enter a mask in either dotted decimal or /prefix format.
	prefix-list	(OPTIONAL) Enter the name of a prefix list name.

Defaults weight = **115**

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The administrative distance indicates the trust value of incoming packets. A low administrative distance indicates a high trust rate. A high value indicates a lower trust rate. For example, a weight of 255 is interpreted that the routing information source is not trustworthy and should be ignored.

distribute-list in

Filter network prefixes received in updates.

Syntax `distribute-list prefix-list-name in [interface]`
To return to the default values, use the `no distribute-list prefix-list-name in [interface]` command.

Parameters

prefix-list-name Specify the prefix list to filter prefixes in routing updates.

interface (OPTIONAL) Identifies the interface type slot/port as one of the following:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Defaults Not configured.

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [distribute-list out](#) — suppresses networks from being advertised in updates.
- [redistribute](#) — redistributes routes from one routing domain to another routing domain.

distribute-list out

Suppress network prefixes from being advertised in outbound updates.

Syntax `distribute-list prefix-list-name out [connected | bgp as number | ospf process-id | rip | static]`
To return to the default values, use the `no distribute-list prefix-list-name out [bgp as number connected | ospf process-id | rip | static]` command.

Parameters

prefix-list-name Specify the prefix list to filter prefixes in routing updates.

connected (OPTIONAL) Enter the keyword `connected` for directly connected routing process.

ospf process-id (OPTIONAL) Enter the keyword `ospf` then the OSPF process-ID number. The range is from 1 to 65535.

- bgp as number** (OPTIONAL) Enter the BGP then the AS Number. The range is from 1 to 65535.
- rip** (OPTIONAL) Enter the keyword `rip` for RIP routes.
- static** (OPTIONAL) Enter the keyword `static` for user-configured routing process.

Defaults Not configured.

- Command Modes**
- ROUTER ISIS (*for IPv4*)
 - CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can assign a name to a routing process so a prefix list IS applied to only the routes derived from the specified routing process.

- Related Commands**
- [distribute-list in](#) — filters the networks received in updates.
 - [redistribute](#) — redistributes routes from one routing domain to another routing domain.

distribute-list redistributed-override

Suppress flapping of routes when the same route is redistributed into IS-IS from multiple routers in the network.

Syntax `distribute-list redistributed-override in`
 To return to the default, use the `no distribute-list redistributed-override in` command.

Defaults none

- Command Modes**
- ROUTER ISIS (*for IPv4*)
 - CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you execute this command, IS-IS does not download the route to the routing table if the same route was redistributed into IS-IS routing protocol on the same router.

domain-password

Set the authentication password for a routing domain.

Syntax `domain-password [hmac-md5 | encryption-type] password`
To disable the password, use the `no domain-password` command.

Parameters

hmac-md5	(OPTIONAL) Enter the keywords <code>hmac-md5</code> to encrypt the password using MD5.
encryption-type	(OPTIONAL) Enter <code>7</code> to encrypt the password using DES.
password	Enter an alphanumeric string up to 16 characters long. If you do not specify an <code>encryption-type</code> or <code>hmac-md5</code> keywords, the password is processed as plain text which provides limited security.

Defaults No default password.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
----------	---------------------------

9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
----------	--

Usage Information The domain password is inserted in Level 2 link state PDUs (LSPs), complete sequence number PDUs (CSNPs), and partial sequence number PDUs (PSNPs).

Related Commands

- [area-password](#) — configures an IS-IS area authentication password.
- [isis priority](#) — configures the authentication password for an interface.

graceful-restart ietf

Enable graceful restart on an IS-IS router.

Syntax `graceful-restart ietf`
To return to the default, use the `no graceful-restart ietf` command.

Parameters

ietf	Enter <code>ietf</code> to enable graceful restart on the IS-IS router.
-------------	---

Defaults Graceful restart disabled.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
----------	---------------------------

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Every graceful restart enabled router's HELLO PDUs includes a restart TLV. This restart enables (re)starting as well as the existing ISIS peers to detect the GR capability of the routers on the connected network. A flag in the Restart TLV contains restart request (RR), restart acknowledge (RA) and suppress adjacency advertisement (SA) bit flags.

The ISIS graceful restart-enabled router can co-exist in mixed topologies where some routers are graceful restart-enabled and others are not. For neighbors that are not graceful restart-enabled, the restarting router brings up the adjacency per the usual methods.

graceful-restart interval

Set the graceful restart grace period, the time during that all graceful restart attempts are prevented.

Syntax `graceful-restart interval minutes`
 To return to the default, use the `no graceful-restart interval` command.

Parameters `minutes` Enter the graceful-restart interval minutes. The range is from 1 to 20 minutes. The default is **5 minutes**.

Defaults **5 minutes**

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart t1

Set the graceful restart wait time before unacknowledged restart requests are generated. This wait time is the interval before the system sends a restart request (an IIH with RR bit set in Restart TLV) until the CSNP is received from the helping router.

Syntax `graceful-restart t1 {interval seconds | retry-times value}`
 To return to the default, use the `no graceful-restart t1` command.

Parameters `interval` Enter the keyword `interval` to set the wait time. The range is from 5 to 120 seconds. The default is **5 seconds**.

`retry-times` Enter the keywords `retry-times` to set the number of times the request interval is extended until a CSNP is received from the helping router. The range is from 1 to 10 attempts. The default is **1**.

Defaults Refer to Parameters.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart t2

Configure the wait time for the graceful restart timer T2 that a restarting router uses as the wait time for each database to synchronize.

Syntax `graceful-restart t2 {level-1 | level-2} seconds`
To return to the default, use the `no graceful-restart t2` command.

Parameters

level-1, level-2	Enter the keywords <code>level-1</code> or <code>level-2</code> to identify the database instance type to which the wait interval applies.
seconds	Enter the <code>graceful-restart t2</code> time in seconds. The range is from 5 to 120 seconds. The default is 30 seconds .

Defaults **30 seconds**

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart t3

Configure the overall wait time before graceful restart completes.

Syntax `graceful-restart t3 {adjacency | manual} seconds`
To return to the default, use the `no graceful-restart t3` command.

Parameters

adjacency	Enter the keyword <code>adjacency</code> so that the restarting router receives the remaining time value from its peer and adjusts its T3 value so if you have configured this option.
manual	Enter the keyword <code>manual</code> to specify a time value that the restarting router uses. The range is from 50 to 120 seconds. The default is 30 seconds .

Defaults `manual`, **30 seconds**

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The running router sets the remaining time value to the current adjacency hold time. You can override this setting by implementing this command.

Override the default restart-wait time by entering the `no graceful-restart restart-wait` command. When you disable `restart-wait`, the current adjacency hold time is used.

Set the `t3` timer to `adjacency` on the restarting router when implementing this command. The restarting router gets the remaining time value from its peer and adjusts its T3 value so only when you have configured `graceful-restart t3 adjacency`.

Related Commands [graceful-restart restart-wait](#) — enables the graceful restart maximum wait time before a restarting peer comes up.

graceful-restart restart-wait

Enable the graceful restart maximum wait time before a restarting peer comes up.

Syntax

 **NOTE:** Set the `t3` timer to `adjacency` on the restarting router when implementing this command.

```
graceful-restart restart-wait seconds
```

To return to the default, use the `no graceful-restart restart-wait` command.

Parameters

seconds Enter the graceful restart time in seconds. The range is from 5 to 300 seconds. The default is **30 seconds**.

Defaults

30 seconds

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [graceful-restart t3](#) — configures the overall wait time before graceful restart completes.

hello padding

Use to turn ON or OFF padding for LAN and point-to-point hello PDUs or to selectively turn padding ON or OFF for LAN or point-to-point hello PDUs.

Syntax

```
hello padding [multi-point | point-to-point]
```

To return to the default, use the `no hello padding [multi-point | point-to-point]` command.

Parameters	multi-point (OPTIONAL) Enter the keywords <code>multi-point</code> to pad only LAN hello PDUs.						
	point-to-point (OPTIONAL) Enter the keywords <code>point-to-point</code> to pad only point-to-point PDUs.						
Defaults	Both LAN and point-to-point hello PDUs are padded.						
Command Modes	ROUTER ISIS						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	IS-IS hellos are padded to the full maximum transmission unit (MTU) size. Padding IS-IS Hellos (IHHS) to the full MTU provides early error detection of large frame transmission problems or mismatched MTUs on adjacent interfaces.						
Related Commands	isis hello padding — turns ON or OFF hello padding on an interface basis.						

hostname dynamic

Enables dynamic learning of hostnames from routers in the domain and allows the routers to advertise the hostname in LSPs.

Syntax	<code>hostname dynamic</code> To disable this command, use the <code>no hostname dynamic</code> command.						
Defaults	Enabled.						
Command Modes	ROUTER ISIS						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	To build name-to-systemID mapping tables through the protocol, use this command. All <code>show</code> commands that display systems also display the hostname.						
Related Commands	clns host — defines a name-to-NSAP mapping.						

ignore-lsp-errors

Ignore LSPs with bad checksums instead of purging those LSPs.

Syntax	<code>ignore-lsp-errors</code> To return to the default values, use the <code>no ignore-lsp-errors</code> command.
---------------	---

Defaults	In IS-IS, the default deletes LSPs with internal checksum errors (<code>no ignore-lsp-errors</code>).	
Command Modes	ROUTER ISIS	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	IS-IS normally purges LSPs with an incorrect data link checksum causing the LSP source to regenerate the message. A cycle of purging and regenerating LSPs can occur when a network link continues to deliver accurate LSPs even though there is a link causing data corruption. This process could cause disruption to your system operation.	

ip router isis

Configure IS-IS routing processes on an interface and attach an area tag name to the routing process.

Syntax	<code>ip router isis [tag]</code>	
	To disable IS-IS on an interface, use the <code>no ip router isis [tag]</code> command.	
Parameters	tag	(OPTIONAL) The tag you specify identifies a specific area routing process. If you do not specify a tag, a null tag is assigned.
Defaults	No processes are configured.	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	To assign a network entity title to enable IS-IS, use the <code>net</code> command.	
Related Commands	<ul style="list-style-type: none"> • net — configures an IS-IS network entity title (NET) for the routing process. • router isis — enables the IS-IS routing protocol. 	

ipv6 router isis

Enable the IPv6 IS-IS routing protocol and specify an IPv6 IS-IS process.

Syntax	<code>ipv6 router isis [tag]</code>	
	To disable IS-IS routing, use the <code>no router isis [tag]</code> command.	

Parameters	tag	(OPTIONAL) This parameter is a unique name for a routing process. A null tag is assumed if the tag option is not specified. The tag name must be unique for all IP router processes for a given router.
Defaults	Not configured.	
Command Modes	ROUTER ISIS	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Configure a network entity title (the <code>net</code> command) to specify the area address and the router system ID.	
	To establish adjacencies and establish dynamic routing, enable routing on one or more interfaces.	
	You can configure only one IS-IS routing process to perform Level 2 routing. A <code>level-1-2</code> designation performs Level 1 and Level 2 routing at the same time.	
Related Commands	<ul style="list-style-type: none"> • net — configures an IS-IS network entity title (NET) for the routing process. • is-type — assigns a type for a given area. 	

isis circuit-type

Configure the adjacency type on interfaces.

Syntax `isis circuit-type {level-1 | level-1-2 | level-2-only}`
 To return to the default values, use the `no isis circuit-type` command.

Parameters	level-1	You can form a Level 1 adjacency if there is at least one common area address between this system and neighbors. You cannot form Level 2 adjacencies on this interface.
	level-1-2	You can form a Level 1 and Level 2 adjacencies when the neighbor is also configured as Level-1-2 and there is at least one common area, if not, a Level 2 adjacency is established. This setting is the default.
	level-2-only	You can form a Level 2 adjacencies when other Level 2 or Level 1-2 routers and their interfaces are configured for Level 1-2 or Level 2. Level 1 adjacencies cannot be established on this interface.
Defaults	level-1-2	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Because the default establishes Level 1 and Level 2 adjacencies, you do not need to configure this command. Routers in an IS-IS system must be configured as a Level 1-only, Level 1-2, or Level 2-only system.

Only configure interfaces as Level 1 or Level 2 on routers that are between areas (for example, a Level 1-2 router) to prevent the software from sending unused hello packets and wasting bandwidth.

isis csnp-interval

Configure the IS-IS complete sequence number PDU (CSNP) interval on an interface.

Syntax

```
isis csnp-interval seconds [level-1 | level-2]
```

To return to the default values, use the `no isis csnp-interval [seconds] [level-1 | level-2]` command.

Parameters

seconds	Interval of transmission time between CSNPs on multi-access networks for the designated intermediate system. The range is from 0 to 65535. The default is 10 .
level-1	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 1.
level-2	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 2.

Defaults

seconds = **10**; **level-1** (if not otherwise specified)

Command Modes

INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The default values of this command are typically satisfactory transmission times for a specific interface on a designated intermediate system. To maintain database synchronization, the designated routers send CSNPs.

You can configure Level 1 and Level 2 CSNP intervals independently.

isis csnp-interval

Configure the IS-IS complete sequence number PDU (CSNP) interval on an interface.

Syntax

```
isis csnp-interval seconds [level-1 | level-2]
```

To return to the default values, use the `no isis csnp-interval [seconds] [level-1 | level-2]` command.

Parameters	seconds	Interval of transmission time between CSNPs on multi-access networks for the designated intermediate system. The range is from 0 to 65535. The default is 10 .
	level-1	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 1.
	level-2	(OPTIONAL) Independently configures the interval of time between transmission of CSNPs for Level 2.
Defaults	seconds = 10 ; level-1 (if not otherwise specified)	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The default values of this command are typically satisfactory transmission times for a specific interface on a designated intermediate system. To maintain database synchronization, the designated routers send CSNPs.	
	You can configure Level 1 and Level 2 CSNP intervals independently.	

isis hello-multiplier

Specify the number of IS-IS hello packets a neighbor must miss before the router declares the adjacency down.

Syntax `isis hello-multiplier multiplier [level-1 | level-2]`
 To return to the default values, use the `no isis hello-multiplier [multiplier] [level-1 | level-2]` command.

Parameters	multiplier	Specifies an integer that sets the multiplier for the hello holding time. Never configure a hello-multiplier lower than the default (3). The range is from 3 to 1000. The default is 3 .
	level-1	(OPTIONAL) Select this value to configure the hello multiplier independently for Level 1 adjacencies. This value is the default.
	level-2	(OPTIONAL) Select this value to configure the hello multiplier independently for Level 2 adjacencies.

Defaults multiplier = **3**; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The holdtime (the product of the hello-multiplier multiplied by the hello-interval) determines how long a neighbor waits for a hello packet before declaring the neighbor is down so routes can be recalculated.

isis hello padding

Turn ON or OFF padding of hello PDUs from INTERFACE mode.

Syntax `isis hello padding`
To return to the default, use the `no isis hello padding` command.

Defaults Padding of hello PDUs is enabled (ON).

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Hello PDUs are “padded” only when both the global and interface padding options are ON. Turning either one OFF disables padding for the corresponding interface.

Related Commands [hello padding](#) — turns ON or OFF padding for LAN and point-to-point hello PDUs.

isis ipv6 metric

Assign metric to an interface for use with IPv6 information.

Syntax `isis ipv6 metric default-metric [level-1 | level-2]`
To return to the default values, use the `no ipv6 isis metric [default-metric] [level-1 | level-2]` command.

Parameters

<i>default-metric</i>	Metric assigned to the link and used to calculate the cost from each other router via the links in the network to other destinations. You can configure this metric for Level 1 or Level 2 routing. The range is from 0 to 16777215. The default is 10 .
level-1	(OPTIONAL) Enter the keywords <code>level-1</code> to configure the shortest path first (SPF) calculation for Level 1 (intra-area) routing. This value is the default.
level-2	(OPTIONAL) Enter the keywords <code>level-2</code> to configure the SPF calculation for Level 2 (inter-area) routing.

Defaults `default-metric = 10`; **level-1** (if not otherwise specified)

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Dell Networking recommends configuring metrics on all interfaces. Without configuring this command, the IS-IS metrics are similar to hop-count metrics.

isis metric

Assign a metric to an interface.

Syntax

```
isis metric default-metric [level-1 | level-2]
```

To return to the default values, use the `no isis metric [default-metric] [level-1 | level-2]` command.

Parameters

<i>default-metric</i>	Metric assigned to the link and used to calculate the cost from each other router via the links in the network to other destinations. You can configure this metric for Level 1 or Level 2 routing. The range is from 0 to 63 for narrow and transition metric styles and from 0 to 16777215 for wide metric styles. The default is 10 .
level-1	(OPTIONAL) Enter the keywords <code>level-1</code> to configure the shortest path first (SPF) calculation for Level 1 (intra-area) routing. This setting is the default.
level-2	(OPTIONAL) Enter the keywords <code>level-2</code> to configure the SPF calculation for Level 2 (inter-area) routing.

Defaults

`default-metric = 10`; **level-1** (if not otherwise specified)

Command Modes

INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Dell Networking recommends configuring metrics on all interfaces. Without configuring this command, the IS-IS metrics are similar to hop-count metrics.

isis network point-to-point

Enable the software to treat a broadcast interface as a point-to-point interface.

Syntax

```
isis network point-to-point
```

To disable the feature, use the `no isis network point-to-point` command.

Defaults

Not enabled.

Command Modes INTERFACE

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

isis password

Configure an authentication password for an interface.

Syntax

```
isis password [hmac-md5] password [level-1 | level-2]
```

To delete a password, use the `no isis password [password] [level-1 | level-2]` command.

Parameters

encryption-type	(OPTIONAL) Enter 7 to encrypt the password using DES.
hmac-md5	(OPTIONAL) Enter the keywords <code>hmac-md5</code> to encrypt the password using MD5.
password	Assign the interface authentication password.
level-1	(OPTIONAL) Independently configures the authentication password for Level 1. The router acts as a station router for Level 1 routing. This setting is the default.
level-2	(OPTIONAL) Independently configures the authentication password for Level 2. The router acts as an area router for Level 2 routing.

Defaults

No default password. **level-1** (if not otherwise specified).

Command Modes INTERFACE

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To protect your network from unauthorized access, use this command to prevent unauthorized routers from forming adjacencies.

You can assign different passwords for different routing levels by using the keywords `level-1` and `level-2`.

The `no` form of this command disables the password for Level 1 or Level 2 routing, using the respective keywords `level-1` or `level-2`.

This password provides limited security as it is processed as plain text.

isis priority

Set the priority of the designated router you select.

Syntax `isis priority value [level-1 | level-2]`
To return to the default values, use the `no isis priority [value] [level-1 | level-2]` command.

Parameters

value	This value sets the router priority. The higher the value, the higher the priority. The range is from 0 to 127. The default is 64 .
level-1	(OPTIONAL) Specify the priority for Level 1. This setting is the default.
level-2	(OPTIONAL) Specify the priority for Level 2.

Defaults value = **64**; **level-1** (if not otherwise specified).

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can configure priorities independently for Level 1 and Level 2. Priorities determine which router on a LAN is the designated router. Priorities are advertised within hellos. The router with the highest priority becomes the designated intermediate system (DIS).

 **NOTE: Routers with a priority of 0 cannot be a designated router.**

Setting the priority to 0 lowers the chance of this system becoming the DIS, but does not prevent it. If all the routers have priority 0, one with highest MAC address becomes DIS even though its priority is 0.

is-type

Configure IS-IS operating level for a router.

Syntax `is-type {level-1 | level-1-2 | level-2-only}`
To return to the default values, use the `no is-type` command.

Parameters

level-1	Allows a router to act as a Level 1 router.
level-1-2	Allows a router to act as both a Level 1 and Level 2 router. This setting is the default.
level-2-only	Allows a router to act as a Level 2 router.

Defaults **level-1-2**

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The IS-IS protocol automatically determines area boundaries and are able to keep Level 1 and Level 2 routing separate. Poorly planned use of this feature may cause configuration errors, such as accidental area partitioning.

If you are configuring only one area in your network, you do not need to run both Level 1 and Level 2 routing algorithms. You can configure the IS type as Level 1.

log-adjacency-changes

Generate a log messages for adjacency state changes.

Syntax

```
log-adjacency-changes
```

To disable this function, use the `no log-adjacency-changes` command.

Defaults

Adjacency changes are not logged.

Command Modes

ROUTER ISIS

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command allows you to monitor adjacency state changes, which are useful when you monitor large networks. Messages are logged in the system's error message facility.

lsp-gen-interval

Set the minimum interval between successive generations of link-state packets (LSPs).

Syntax

```
lsp-gen-interval [level-1 | level-2] interval seconds [initial_wait_interval seconds [second_wait_interval seconds]]
```

To restore default values, use the `no lsp-gen-interval [level-1 | level-2] interval seconds [initial_wait_interval seconds [second_wait_interval seconds]]` command.

Parameters

level-1	(OPTIONAL) Enter the keywords <code>level-1</code> to apply the configuration to generation of Level-1 LSPs.
level-2	(OPTIONAL) Enter the keywords <code>level-2</code> to apply the configuration to generation of Level-2 LSPs.
interval seconds	Enter the maximum number of seconds between LSP generations. The range is from 0 to 120 seconds. The default is 5 seconds .

<i>initial_wait_interval</i> <i>seconds</i>	(OPTIONAL) Enter the initial wait time, in seconds, before running the first LSP generation. The range is from 0 to 120 seconds. The default is 1 second .
<i>second_wait_interval</i> <i>seconds</i>	(OPTIONAL) Enter the wait interval, in seconds, between the first and second LSP generation. The range is from 0 to 120 seconds. The default is 5 seconds .

Defaults Refer to *Parameters*.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

LSP throttling slows down the frequency at which LSPs are generated during network instability. Even though throttling LSP generations slows down network convergence, no throttling can result in a network not functioning as expected. If network topology is unstable, throttling slows down the scheduling of LSP generations until the topology regains its stability.

The first generation is controlled by the initial wait interval and the second generation is controlled by the second wait interval. Each subsequent wait interval is twice as long as the previous one until the wait interval reaches the maximum wait time specified (*interval* seconds). After the network calms down and there are no triggers for two times the maximum interval, fast behavior is restored (the initial wait time).

lsp-mtu

Set the maximum transmission unit (MTU) of IS-IS link-state packets (LSPs). This command only limits the size of LSPs this router generates.

Syntax `lsp-mtu size`
To return to the default values, use the `no lsp-mtu` command.

Parameters

size The maximum LSP size, in bytes. The range is from 128 to 1497 for Non-Jumbo mode and from 128 to 9195 for Jumbo mode. The default is **1497**.

Defaults **1497** bytes.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The link MTU and the LSP MTU size must be the same.

Because each device can generate a maximum of 255 LSPs, consider carefully whether you use the `lsp-mtu` command.

lsp-refresh-interval

Set the link state PDU (LSP) refresh interval. LSPs must be refreshed before they expire. When the LSPs are not refreshed after a refresh interval, they are kept in a database until their `max-lsp-lifetime` reaches zero and then LSPs is purged.

Syntax `lsp-refresh-interval seconds`
To restore the default refresh interval, use the `no lsp-refresh-interval` command.

Parameters `seconds` The LSP refresh interval, in seconds. This value has to be less than the seconds value specified with the `max-lsp-lifetime` command. The range is from 1 to 65535 seconds. The default is **900**.

Defaults **900** seconds

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The refresh interval determines the rate at which route topology information is transmitted preventing the information from becoming obsolete.

The refresh interval must be less than the LSP lifetime specified with the `max-lsp-lifetime` command. A low value reduces the amount of time that undetected link state database corruption can persist at the cost of increased link utilization. A higher value reduces the link utilization the flooding of refreshed packets causes.

Related Commands `max-lsp-lifetime` — sets the maximum interval that LSPs persist without being refreshed.

max-area-addresses

Configure manual area addresses.

Syntax `max-area-addresses number`
To return to the default values, use the `no max-area-addresses` command.

Parameters `number` Set the maximum number of manual area addresses. The range is from 3 to 6. The default is **3**.

Defaults **3** addresses

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To configure the number of area addresses on router, use this command. This value must be consistent with routers in the same area, otherwise the router forms only Level 2 adjacencies. The value must be same among all the routers to form Level 1 adjacencies.

max-lsp-lifetime

Set the maximum time that link-state packets (LSPs) exist without being refreshed.

Syntax

`max-lsp-lifetime seconds`

To restore the default time, use the `no max-lsp-lifetime` command.

Parameters

seconds The maximum lifetime of LSP in seconds. This value must be greater than the `lsp-refresh-interval` command. The higher the value the longer the LSPs are kept. The range is from 1 to 65535. The default is **1200**.

Defaults

1200 seconds

Command Modes

ROUTER ISIS

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Change the maximum LSP lifetime with this command. The maximum LSP lifetime must always be greater than the LSP refresh interval.

The `seconds` parameter enables the router to keep LSPs for the specified length of time. If the value is higher, the overhead is reduced on slower-speed links.

Related Commands

[lsp-refresh-interval](#) — sets the link-state packet (LSP) refresh interval.

maximum-paths

Allows you to configure the maximum number of equal cost paths allowed in a routing table.

Syntax

`maximum-paths number`

To return to the default values, use the `no maximum-paths` command.

Parameters

number Enter a number as the maximum number of parallel paths an IP routing installs in a routing table. The range is from 1 to 16. The default is **4**.

Defaults **4**

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

metric-style

To generate and accept old-style, new-style, or both styles of type, length, and values (TLV), configure a router.

Syntax

```
metric-style {narrow [transition] | transition | wide [transition]} [level-1 | level-2]
```

To return to the default values, use the `no metric-style {narrow [transition] | transition | wide [transition]} [level-1 | level-2]` command.

Parameters

narrow	Allows you to generate and accept old-style TLVs. The metric range is from 0 to 63.
transition	Allows you to generate both old-style and new-style TLVs. The metric range is from 0 to 63.
wide	Allows you to generate and accept only new-style TLVs. The metric range is from 0 to 16777215.
level-1	Enables the metric style on Level 1.
level-2	Enables the metric style on Level 2.

Defaults

narrow; if no Level is specified, Level-1 and Level-2 are configured.

Command Modes

ROUTER ISIS

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you enter the `metric-style wide` command, the system generates and accepts only new-style TLVs. The router uses less memory and other resources rather than generating both old-style and new-style TLVs.

The new-style TLVs have wider metric fields than old-style TLVs.

Related Commands

[isis metric](#) — configures a metric for an interface.

multi-topology

Enables multi-topology IS-IS. It also allows enabling/disabling of old and new style TLVs for IP prefix information in the LSPs.

Syntax `multi-topology [transition]`
To return to a single topology configuration, use the `no multi-topology [transition]` command.

Defaults Disabled

Command Modes CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

net

To configure an IS-IS network entity title (NET) for a routing process, use this mandatory command. If you did not configure a NET, the IS-IS process does not start.

Syntax `net network-entity-title`
To remove a net, use the `no net network-entity-title` command.

Parameters

network-entity-title Specify the area address and system ID for an IS-IS routing process. The first 1 to 13 bytes identify the area address. The next 6 bytes identify the system ID. The last 1 byte is the selector byte, always identified as zero zero (00). This argument can be applied to an address or a name.

Defaults Not configured.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

passive-interface

Suppress routing updates on an interface. This command stops the router from sending updates on that interface.

Syntax `passive-interface interface`
To delete a passive interface configuration, use the `no passive-interface interface` command.

Parameters

interface

Enter the following keywords and slot/port or number information:

- For a 1-Gigabit Ethernet interface, enter the keyword `GigabitEthernet` then the slot/port information.
- For Loopback interface, enter the keyword `loopback` then a number from 0 to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a SONET interface, enter the keyword `sonet` then the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Defaults

Not configured.

Command Modes

ROUTER ISIS

Supported Modes

Full-Switch

Command History

Version

Description

9.9(0.0)

Introduced on the FN IOM.

9.2(0.0)

Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Although the passive interface does not send nor receive routing updates, the network on that interface is still included in the IS-IS updates sent using other interfaces.

redistribute

Redistribute routes from one routing domain to another routing domain.

Syntax

```
redistribute {static | connected | rip} [level-1 | level-1-2 | level-2] [metric  
metric-value] [metric-type {external | internal}] [route-map map-name]
```

To end redistribution or disable any of the specified keywords, use the `no redistribute {static | connected | rip} [metric metric-value] [metric-type {external | internal}] [level-1 | level-1-2 | level-2] [route-map map-name]` command.

Parameters

connected

Enter the keyword `connected` to redistribute active routes into IS-IS.

rip

Enter the keyword `rip` to redistribute RIP routes into IS-IS.

static

Enter the keyword `static` to redistribute user-configured routes into IS-IS.

metric metric-value

(OPTIONAL) Assign a value to the redistributed route. The range is from 0 to 16777215. The default is **0**. Use a value that is consistent with the destination protocol.

metric-type {external | internal}

(OPTIONAL) The external link type associated with the default route advertised into a routing domain. Specify one of the following:

- `external`
- `internal`

level-1

(OPTIONAL) Routes are independently redistributed into IS-IS as Level 1 routes.

level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level-1-2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes. This setting is the default.
route-map <i>map-name</i>	(OPTIONAL) If you do not enter the route-map argument, all routes are redistributed. If a map-name value is not specified, no routes are imported.

Defaults

- metric metric-value = **0**
- metric-type= internal; **level-2**

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To redistribute a default route (0.0.0.0/0), configure the `default-information originate` command.

Changing or disabling a keyword in this command does not affect the state of the other command keywords.

When an LSP with an internal metric is received, the system considers the route cost while considering the advertised cost to reach the destination.

Redistributed routing information is filtered with the `distribute-list out` command to ensure that the routes are properly are passed to the receiving routing protocol.

How a metric value assigned to a redistributed route is advertised depends on how on the configuration of the `metric-style` command. If the `metric-style` command is set for Narrow or Transition mode and the metric value in the `redistribute` command is set to a number higher than 63, the metric value advertised in LSPs is 63. If the `metric-style` command is set for Wide mode, the metric value in the `redistribute` command is advertised.

Related Commands

- [default-information originate](#) — generates a default route for the IS-IS domain.
- [distribute-list out](#) — suppresses networks from being advertised in updates. This command filters redistributed routing information.

redistribute bgp

Redistribute routing information from a BGP process. (New command in Release 6.3.1.)

Syntax

```
redistribute bgp AS number [level-1 | level-1-2 | level-2] [metric metric-value]
[metric-type {external | internal}] [route-map map-name]
```

To return to the default values, use the `no redistribute bgp` command with the appropriate parameters.

Parameters

AS number	Enter a number that corresponds to the autonomous system number. The range is from 1 to 65355.
level-1	(OPTIONAL) Routes are independently redistributed into IS-IS Level 1 routes only.
level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS Level 1 and Level 2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes only. This setting is the default.
metric <i>metric-value</i>	(OPTIONAL) The value used for the redistributed route. Use a metric value that is consistent with the destination protocol. The range is from 0 to 16777215. The default is 0 .
metric-type {external internal}	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. The two options are: <ul style="list-style-type: none">· external· internal
route-map <i>map-name</i>	<i>map-name</i> is an identifier for a configured route map. The route map filters imported routes from the source routing protocol to the current routing protocol. If you do not specify a <i>map-name</i> , all routes are redistributed. If you specify a keyword, but fail to list route map tags, no routes are imported.

Defaults

IS-IS Level 2 routes only

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

BGP to IS-IS redistribution supports “match” options using route maps. You can set the metric value, level, and metric-type of redistributed routes by the redistribution command. You can “set” more advanced options using route maps.

Example

```
Dell(conf)#router is
Dell(conf-router_isis)#redistribute bgp 1 level-1 metric 32 metric-type
external route-map rmap-isis-to-bgp
Dell(conf-router_bgp)#show running-config isis
!
router isis
redistribute bgp 1 level-1 metric 32 metric-type external route-map
rmap-isis-to-bgp
```

redistribute ospf

Redistribute routing information from an OSPF process.

Syntax `redistribute ospf process-id [level-1 | level-1-2 | level-2] [match {internal | external}] [metric metric-value] [metric-type {external | internal}] [route-map map-name]`

To return to the default values, use the `no redistribute ospf process-id [level-1 | level-1-2 | level-2] [match {internal | external}] [metric metric-value] [metric-type {external | internal}] [route-map map-name]` command.

Parameters

<i>process-id</i>	Enter a number that corresponds to the OSPF process ID to be redistributed. The range is from 1 to 65355.
metric <i>metric-value</i>	(OPTIONAL) The value used for the redistributed route. Use a metric value that is consistent with the destination protocol. The range is from 0 to 16777215. The default is 0 .
metric-type {external internal}	(OPTIONAL) The external link type associated with the default route advertised into a routing domain. The two options are: <ul style="list-style-type: none">externalinternal
level-1	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 1 routes.
level-1-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level-1-2 routes.
level-2	(OPTIONAL) Routes are independently redistributed into IS-IS as Level 2 routes. This setting is the default.
match {external internal}	(OPTIONAL) The command used for OSPF to route and redistribute into other routing domains. The values are <ul style="list-style-type: none">internalexternal
route-map <i>map-name</i>	<i>map-name</i> is an identifier for a configured route map. The route map should filter imported routes from the source routing protocol to the current routing protocol. If you do not specify a <i>map-name</i> , all routes are redistributed. If you specify a keyword, but fail to list route map tags, no routes are imported.

Defaults Refer to Parameters.

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information How a metric value assigned to a redistributed route is advertised depends on how on the configuration of the `metric-style` command. If the `metric-style` command is set for Narrow mode and the metric value in the `redistribute ospf` command is set to a number higher than 63, the metric value advertised in LSPs is 63. If the `metric-style` command is set for wide mode, the metric value in the `redistribute ospf` command is advertised.

router isis

Allows you to enable the IS-IS routing protocol and to specify an IP IS-IS process.

Syntax `router isis [tag]`
To disable IS-IS routing, use the `no router isis [tag]` command.

Parameters

tag	(OPTIONAL) This is a unique name for a routing process. A null tag is assumed if the <code>tag</code> option is not specified. The tag name must be unique for all IP router processes for a given router.
------------	--

Defaults Not configured.

Command Modes ROUTER ISIS

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Configure a network entity title (the `net` command) to specify the area address and the router system ID.

Enable routing on one or more interfaces to establish adjacencies and establish dynamic routing.

You can configure only one IS-IS routing process to perform Level 2 routing. A `level-1-2` designation performs Level 1 and Level 2 routing at the same time.

Related Commands

- [ip router isis](#) — configures IS-IS routing processes for IP on interfaces and attaches an area designator to the routing process.
- [net](#) — configures an IS-IS network entity title (NET) for a routing process.
- [is-type](#) — assigns a type for a given area.

set-overload-bit

To set the overload bit in its non-pseudonode LSPs, configure the router. This setting prevents other routers from using it as an intermediate hop in their shortest path first (SPF) calculations.

Syntax `set-overload-bit`

To return to the default values, use the `no set-overload-bit` command.

Defaults Not set.

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Set the overload bit when a router experiences problems, such as a memory shortage due to an incomplete link state database which can result in an incomplete or inaccurate routing table. If you set the overload bit in its LSPs, other routers ignore the unreliable router in their SPF calculations until the router has recovered.

show config

Display the changes you made to the IS-IS configuration. Default values are not shown.

Syntax `show config`

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Router-Isis) The bold section identifies that Multi-Topology IS-IS is enabled in Transition mode.

```
Dell(conf-router_isis)#show config
!
router isis
clns host ISIS 49.0000.0001.F100.E120.0013.00
log-adjacency-changes
net 49.0000.0001.F100.E120.0013.00
!
address-family ipv6 unicast
maximum-paths 16
multi-topology transition
set-overload-bit
spf-interval level-1 100 15 20
spf-interval level-2 120 20 25
exit-address-family
```

Example (Address-Family_IPv6) The bold section identifies that Multi-Topology IS-IS is enabled in Transition mode.

```
Dell(conf-router_isis-af_ipv6)#show conf
!
```

```

address-family ipv6 unicast
maximum-paths 16
multi-topology transition
set-overload-bit
spf-interval level-1 100 15 20
spf-interval level-2 120 20 25
exit-address-family

```

show isis database

Display the IS-IS link state database.

Syntax `show isis database [level-1 | level-2] [local] [detail | summary] [lspid]`

Parameters

level-1	(OPTIONAL) Displays the Level 1 IS-IS link-state database.
level-2	(OPTIONAL) Displays the Level 2 IS-IS link-state database.
local	(OPTIONAL) Displays local link-state database information.
detail	(OPTIONAL) Detailed link-state database information of each LSP displays when specified. If not specified, a summary displays.
summary	(OPTIONAL) Summary of link-state database information displays when specified.
<i>lspid</i>	(OPTIONAL) Display only the specified LSP.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show isis database` command shown in the following example.

Field	Description
IS-IS Level-1/ Level-2 Link State Database	Displays the IS-IS link state database for Level 1 or Level 2.
LSPID	Displays the LSP identifier. The first six octets are the System ID of the originating router. The first six octets are the System ID of the originating router. The next octet is the pseudonode ID. If this byte is not zero, the LSP describes system links. If this byte is zero (0), the LSP describes the state of the originating router. The designated router for a LAN creates and floods a pseudonode LSP and describes the attached systems.

Field	Description
	The last octet is the LSP number. An LSP is divided into multiple LSP fragments if there is more data than cannot fit in a single LSP. Each fragment has a unique LSP number.
	An * after the LSPID indicates that the system originates an LSP where this command was issued.
LSP Seq Num	This value is the sequence number for the LSP that allows other systems to determine if they have received the latest information from the source.
LSP Checksum	This is the checksum of the entire LSP packet.
LSP Holdtime	This value is the amount of time, in seconds, that the LSP remains valid. A zero holdtime indicates that this is a purged LSP and is being removed from the link state database. A value between brackets indicates the duration that the purged LSP stays in the database before being removed.
ATT	This value represents the Attach bit. This value indicates that the router is a Level 2 router and can reach other areas. Level 1-only routers and Level 1-2 routers that have lost connection to other Level 2 routers use the Attach bit to find the closest Level 2 router. They point a default route to the closest Level 2 router.
P	This value represents the P bit. This bit is always set to zero as Dell Networking does not support area partition repair.
OL	This value represents the overload bit, determining congestion. If the overload bit is set, other routers do not use this system as a transit router when calculating routes.

Example

The bold sections identify that MultiTopology IS-IS is enabled.

```
Dell#show isis database

IS-IS Level-1 Link State Database
LSPID      LSP Seq Num LSP Checksum LSP Holdtime ATT/P/OL
ISIS.00-00 * 0x00000006 0xCF43      580          0/0/0

IS-IS Level-2 Link State Database
LSPID      LSP Seq Num LSP Checksum LSP Holdtime ATT/P/OL
ISIS.00-00 * 0x00000006 0xCF43      580          0/0/0
!
Dell#show isis database detail ISIS.00-00

IS-IS Level-1 Link State Database
LSPID      LSP Seq Num LSP Checksum LSP Holdtime ATT/P/OL
ISIS.00-00 * 0x0000002B 0x853B      1075         0/0/0
  Area Address: 49.0000.0001
  NLPID: 0xCC 0x8E
  IP Address: 10.1.1.1
  IPv6 Address: 1011::1
  Topology: IPv4 (0x00) IPv6 (0x8002)
  Metric: 10      IS OSPF.00
Metric: 10      IS (MT-IPv6) OSPF.00
  Metric: 10      IP 15.1.1.0 255.255.255.0
Metric: 10      IPv6 (MT-IPv6) 1511::/64
Metric: 10      IPv6 (MT-IPv6) 2511::/64
Metric: 10      IPv6 (MT-IPv6) 1011::/64
  Metric: 10      IPv6 1511::/64
  Metric: 10      IP 10.1.1.0 255.255.255.0
  Hostname: ISIS

IS-IS Level-2 Link State Database
LSPID      LSP Seq Num LSP Checksum LSP Holdtime ATT/P/OL
ISIS.00-00 * 0x0000002D 0xB2CD      1075         0/0/0
```

```

Area Address: 49.0000.0001
NLPID: 0xCC 0x8E
IP Address: 10.1.1.1
IPv6 Address: 1011::1
Topology: IPv4 (0x00) IPv6 (0x8002)
Metric: 10      IS OSPF.00
Metric: 10      IS (MT-IPv6) OSPF.00
Metric: 10      IP 10.1.1.0 255.255.255.0
Metric: 10      IP 15.1.1.0 255.255.255.0
Metric: 20      IP 10.3.3.0 255.255.255.0
Metric: 10      IPv6 (MT-IPv6) 1011::/64
Metric: 10      IPv6 (MT-IPv6) 1511::/64
Metric: 10      IPv6 (MT-IPv6) 2511::/64
Metric: 20      IPv6 (MT-IPv6) 1033::/64
Metric: 10      IPv6 2511::/64
Metric: 20      IPv6 1033::/64
Hostname: ISIS
Dell#

```

show isis graceful-restart detail

Display detailed IS-IS graceful restart related settings.

Syntax show isis graceful-restart detail

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

Dell#show isis graceful-restart detail
Configured Timer Value
=====
Graceful Restart      : Enabled
T3 Timer              : Manual
T3 Timeout Value     : 30
T2 Timeout Value     : 30 (level-1), 30 (level-2)
T1 Timeout Value     : 5, retry count: 1
Adjacency wait time  : 30

Operational Timer Value
=====
Current Mode/State   : Normal/RUNNING
T3 Time left         : 0
T2 Time left         : 0 (level-1), 0 (level-2)
Restart ACK rcv count : 0 (level-1), 0 (level-2)
Restart Req rcv count : 0 (level-1), 0 (level-2)
Suppress Adj rcv count : 0 (level-1), 0 (level-2)
Restart CSNP rcv count : 0 (level-1), 0 (level-2)
Database Sync count  : 0 (level-1), 0 (level-2)
Dell#

```

show isis hostname

Display IS-IS host names configured or learned on the system.

Syntax `show isis hostname`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show isis hostname
System Id      Dynamic Name  Static Name
*F100.E120.0013 Force10       ISIS
Dell#
```

show isis interface

Display detailed IS-IS interface status and configuration information.

Syntax `show isis interface [interface]`

Parameters

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For Loopback interface, enter the keyword `loopback` then a number from 0 to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell>show isis int
GigabitEthernet 0/7 is up, line protocol is up
```

```

MTU 1497, Encapsulation SAP
Routing Protocol: IS-IS
  Circuit Type: Level-1-2
  Interface Index 37847070, Local circuit ID 1
  Level-1 Metric: 10, Priority: 64, Circuit ID: systest-3.01
  Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
  Number of active level-1 adjacencies: 1
  Level-2 Metric: 10, Priority: 64, Circuit ID: systest-3.01
  Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
  Number of active level-2 adjacencies: 1
  Next IS-IS LAN Level-1 Hello in 2 seconds
  Next IS-IS LAN Level-2 Hello in 1 seconds
  LSP Interval: 33
GigabitEthernet 0/8 is up, line protocol is up
MTU 1497, Encapsulation SAP
Routing Protocol: IS-IS
  Circuit Type: Level-1-2
  Interface Index 38371358, Local circuit ID 2
  Level-1 Metric: 10, Priority: 64, Circuit ID: systest-3.02
  Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
  Number of active level-1 adjacencies: 1
  Level-2 Metric: 10, Priority: 64, Circuit ID: systest-3.02
  Hello Interval: 10, Hello Multiplier: 3, CSNP Interval: 10
--More--

```

show isis neighbors

Display information about neighboring (adjacent) routers.

Syntax `show isis neighbors [level-1 | level-2] [detail] [interface]`

Parameters	<p>level-1 (OPTIONAL) Displays information about Level 1 IS-IS neighbors.</p> <p>level-2 (OPTIONAL) Displays information about Level 2 IS-IS neighbors.</p> <p>detail (OPTIONAL) Displays detailed information about neighbors.</p> <p>interface (OPTIONAL) Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
-------------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.2(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information

Use this command to confirm that the neighbor adjacencies are operating correctly. If you suspect that they are not, you can verify the specified area addresses of the routers by using the `show isis neighbors` command.

The following describes the `show isis neighbors` command shown in the following example.

Field	Description
System Id	The value that identifies a system in an area.
Interface	The interface, slot, and port in which the router was discovered.
State	The value providing status about the adjacency state. The range is Up and Init.
Type	This value displays the adjacency type (Layer 2, Layer 2 or both).
Priority	IS-IS priority the neighbor advertises. The neighbor with highest priority becomes the designated router for the interface.
Uptime	Displays the interfaces uptime.
Circuit Id	The neighbor's interpretation of the designated router for the interface.

Example

The bold sections below identify that Multi-Topology IS-IS is enabled.

```
Dell#show isis neighbors
System Id Interface State Type Priority Uptime Circuit Id
TEST Gi 7/1 Up L1L2 (M) 127 09:28:01 TEST.02
!
Dell#show isis neighbors detail
System Id Interface State Type Priority Uptime Circuit Id
TEST Gi 7/1 Up L1L2 (M) 127 09:28:04 TEST.02 Area Address(es):
49.0000.0001
  IP Address(es): 25.1.1.3*
  MAC Address: 0000.0000.0000
  Hold Time: 28
  Link Local Address: fe80::201:e8ff:fe00:492c
  Topology: IPv4 IPv6 , Common (IPv4 IPv6 )
  Adjacency being used for MTs: IPv4 IPv6
Dell#
```

show isis protocol

Display IS-IS routing information.

Syntax `show isis protocol`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

The bold section identifies that Multi-Topology IS-IS is enabled.

```
Dell#show isis protocol
IS-IS Router: <Null Tag>
  System Id: F100.E120.0013 IS-Type: level-1-2
  Manual area address(es):
    49.0000.0001
  Routing for area address(es):
    49.0000.0001
  Interfaces supported by IS-IS:
    GigabitEthernet 1/0 - IP - IPv6
    GigabitEthernet 1/1 - IP - IPv6
    GigabitEthernet 1/10 - IP - IPv6
    Loopback 0 - IP - IPv6
  Redistributing:
  Distance: 115
  Generate narrow metrics: level-1-2
  Accept narrow metrics: level-1-2
  Generate wide metrics: none
  Accept wide metrics: none
Multi Topology Routing is enabled in transition mode.
Dell#
```

show isis traffic

This command allows you to display IS-IS traffic interface information.

Syntax `show isis traffic [interface]`

Parameters

<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following:
-------------------------	---

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show isis traffic` command shown in the following example.

Item	Description
Level-1/Level-2 Hellos (sent/rcvd)	Displays the number of Hello packets sent and received.
PTP Hellos (sent/rcvd)	Displays the number of point-to-point Hellos sent and received.

Item	Description
Level-1/Level-2 LSPs sourced (new/refresh)	Displays the number of new and refreshed LSPs.
Level-1/Level-2 LSPs flooded (sent/rcvd)	Displays the number of flooded LSPs sent and received.
Level-1/Level-2 LSPs CSNPs (sent/rcvd)	Displays the number of CSNP LSPs sent and received.
Level-1/Level-2 LSPs PSNPs (sent/rcvd)	Displays the number of PSNP LSPs sent and received.
Level-1/Level-2 DR Elections	Displays the number of times designated router elections ran.
Level-1/Level-2 SPF Calculations	Displays the number of shortest path first calculations.
LSP checksum errors received	Displays the number of checksum errors LSPs received.
LSP authentication failures	Displays the number of LSP authentication failures.

Example

```
Dell#sho is traffic
IS-IS: Level-1 Hellos (sent/rcvd) : 0/721
IS-IS: Level-2 Hellos (sent/rcvd) : 900/943
IS-IS: PTP Hellos (sent/rcvd) : 0/0
IS-IS: Level-1 LSPs sourced (new/refresh) : 0/0
IS-IS: Level-2 LSPs sourced (new/refresh) : 1/3
IS-IS: Level-1 LSPs flooded (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs flooded (sent/rcvd) : 5934/5217
IS-IS: Level-1 LSPs CSNPs (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs CSNPs (sent/rcvd) : 472/238
IS-IS: Level-1 LSPs PSNPs (sent/rcvd) : 0/0
IS-IS: Level-2 LSPs PSNPs (sent/rcvd) : 10/337
IS-IS: Level-1 DR Elections : 4
IS-IS: Level-2 DR Elections : 4
IS-IS: Level-1 SPF Calculations : 0
IS-IS: Level-2 SPF Calculations : 389
IS-IS: LSP checksum errors received : 0
IS-IS: LSP authentication failures : 0
Dell#
```

spf-interval

Specify the minimum interval between shortest path first (SPF) calculations.

Syntax

```
spf-interval [level-1 | level-2] interval seconds [initial_wait_interval
seconds [second_wait_interval seconds]]
```

To restore default values, use the `no spf-interval [level-1 | level-2] interval seconds [initial_wait_interval seconds [second_wait_interval seconds]]` command.

Parameters

level-1	(OPTIONAL) Enter the keyword <code>level-1</code> to apply the configuration to Level-1 SPF calculations.
level-2	(OPTIONAL) Enter the keyword <code>level-2</code> to apply the configuration to Level-2 SPF calculations.
<i>interval seconds</i>	Enter the maximum number of seconds between SPF calculations. The range is from 0 to 120 seconds. The default is 10 seconds .
<i>initial_wait_interval seconds</i>	(OPTIONAL) Enter the initial wait time, in seconds, before running the first SPF calculations. The range is from 0 to 120 seconds. The default is 5 seconds .
<i>second_wait_interval seconds</i>	(OPTIONAL) Enter the wait interval, in seconds, between the first and second SPF calculations. The range is from 0 to 120 seconds. The default is 5 seconds .

Defaults

Refer to *Parameters*.

Command Modes

- ROUTER ISIS (*for IPv4*)
- CONFIGURATION-ROUTER-ISIS-ADDRESS-FAMILY-IPV6 (*for IPv6*)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command `spf-interval` in CONFIG-ROUTER-ISIS-AF-IPV6 mode is used for IPv6 Multi-Topology route computation only. If using Single Topology mode, use the `spf-interval` command in CONFIG-ROUTER-ISIS mode for both IPv4 and IPv6 route computations.

SPF throttling slows down the frequency at which route calculations are performed during network instability. Even though throttling route calculations slows down network convergence, not throttling can result in a network not functioning as expected. If network topology is unstable, throttling slows down the scheduling of route calculations until the topology regains its stability.

The first route calculation is controlled by the initial wait interval and the second calculation is controlled by the second wait interval. Each subsequent wait interval is twice as long as the previous one until the wait interval reaches the maximum wait time specified (`interval seconds`). After the network calms down and there are no triggers for two times the maximum interval, fast behavior is restored (the initial wait time).

Isolated Networks

This chapter describes the isolated networks commands in the Dell Networking OS.

io-aggregator isolated-network vlan

Enable the isolated-network functionality for a particular VLAN or a set of VLANs.

Syntax `[no] io-aggregator isolated-network vlan vlan-range`

Parameters

isolated-network	Specify an isolated network to be configured
vlan <i>vlan-range</i>	Enter the keyword <code>vlan</code> followed by the member VLANs using VLAN IDs (separated by commas), a range of VLAN IDs (separated by a hyphen), a single VLAN ID, or a combination. For example: VLAN IDs (comma-separated): 3, 4, 6. Range (hyphen-separated): 5-10. Combination: 3, 4, 5-10, 8.

Defaults Not configured.

Command Modes CONFIGURATION

Usage Information To add more VLANs into an isolated network, you can enter this same command at any later point. The VLANs specified are appended to the existing set of VLANs. To remove a VLAN or a set of VLANs from an isolated network, use the `no` form of command.

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Supported on the FN I/O Aggregator.
9.5(0.0)	Supported on the M I/O Aggregator.

Example `Dell(conf)#io-aggregator isolated-network vlan 5-10`

show io-aggregator isolated-networks

Display the VLANs that are configured to be part of an isolated network on an Aggregator.

Syntax `show io-aggregator isolated-networks`

Parameters

isolated-networks	Specify an isolated network to be configured
vlan <i>vlan-range</i>	Enter the keyword <code>vlan</code> followed by the member VLANs using VLAN IDs (separated by commas), a range of VLAN IDs (separated by a hyphen), a single VLAN ID, or a

combination. For example: VLAN IDs (comma-separated): 3, 4, 6. Range (hyphen-separated): 5-10. Combination: 3, 4, 5-10, 8.

Defaults	None								
Command Modes	EXEC Privilege								
Usage Information	This command is used to show the isolated-network feature status and the VLANs configured for this feature. Show running-config will save this command under io-aggregator.								
Supported Modes	All Modes								
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.5(0.0)</td><td>Supported on the FN I/O Aggregator.</td></tr><tr><td>9.5(0.0)</td><td>Supported on the M I/O Aggregator.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.5(0.0)	Supported on the FN I/O Aggregator.	9.5(0.0)	Supported on the M I/O Aggregator.
Version	Description								
9.9(0.0)	Introduced on the FN IOM.								
9.5(0.0)	Supported on the FN I/O Aggregator.								
9.5(0.0)	Supported on the M I/O Aggregator.								

Example

```
Dell#show io-aggregator isolated-networks
Isolated Network Enabled VLANs : 5-10
```

Link Aggregation Control Protocol (LACP)

This chapter contains commands for Dell Networking's implementation of the link aggregation control protocol (LACP) for the creation of dynamic link aggregation groups (LAGs — called *port-channels* in Dell Networking OS parlance).

Topics:

- [auto-lag enable](#)
- [clear lacp counters](#)
- [debug lacp](#)
- [io-aggregator auto-lag enable](#)
- [lacp link-fallback](#)
- [lacp long-timeout](#)
- [lacp port-priority](#)
- [port-channel mode](#)
- [port-channel-protocol lacp](#)
- [show interfaces port-channel](#)
- [show io-aggregator auto-lag status](#)
- [show lacp](#)
- [show link-bundle-distribution port-channel](#)
- [show port-channel-flow](#)

auto-lag enable

Enable auto-lag on a server facing port.

Syntax	<code>auto-lag enable</code>	
	To disable the auto-lag use the <code>no auto-lag enable</code> command.	
	When disabled, the server port associated in a LAG is removed and the LAG itself gets removed. Any LACPDUs received on the server port are discarded.	
Defaults	Enabled	
Command Modes	INTERFACE	
Supported Modes	Standalone, Stacking, VLT	
	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.6(0.0)	Supported on the FN I/O Aggregator

Version	Description
9.6(0.0)	Supported on the M I/O Aggregator.

clear lacp counters

Clear Port Channel counters.

Syntax `clear lacp port-channel-number counters`

Parameters

port-channel-number Enter a port-channel number:
The range is from 1 to 128.

Command Modes EXEC
EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [show lacp](#) — displays the LACP configuration.

debug lacp

Debug LACP (events).

Syntax `debug lacp [pdu interface [in | out]]`
To disable LACP debugging, use the `no debug lacp [pdu interface [in | out]]` command.

Parameters

pdu in | out (OPTIONAL) Enter the keyword `pdu` to debug the LACP Protocol Data Unit information. Optionally, enter an `in` or `out` parameter to:

- Receive enter `in`
- Transmit enter `out`

interface in | out Enter the following keywords and slot/port or number information:

- For a Ten-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

Defaults none

Command Modes	EXEC	
	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.4(0.0)	Supported on the FN I/O Aggregator.

io-aggregator auto-lag enable

Enable auto-lag globally on the server facing ports

Syntax	<code>io-aggregator auto-lag enable</code>
	To disable the auto-lag, use the <code>no io-aggregator auto-lag enable</code> command.
	When disabled, all the server ports associated in a LAG are removed and the LAG itself gets removed. Any LACPDU received on the server ports are discarded.

Defaults	Enabled
Command Modes	CONFIGURATION
Supported Modes	Standalone, Stacking, VLT
	Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.6(0.0)	Supported on the FN I/O Aggregator.
	9.6(0.0)	Supported on the M I/O Aggregator.

Related Commands [show io-aggregator auto-lag status](#)—displays global information on the auto-lag status.

lACP link-fallback

Enable the LACP link-fallback feature.

Syntax	<code>lACP link-fallback member-independent port-channel 128</code>
	To disable the LACP link-fallback, use the <code>no lACP link-fallback member-independent port-channel 128</code> command.

Command Modes	INTERFACE
	CONFIGURATION
Supported Modes	Standalone, Stacking, and VLT

Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.11(0.0)	Introduced the support on VLT mode.
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the M I/O Aggregator and FN I/O Aggregator.

lacp long-timeout

Configure a long timeout period (30 seconds) for an LACP session.

Syntax `lacp long-timeout`
To reset the timeout period to a short timeout (1 second), use the `no lacp long-timeout` command.

Defaults **1 second**

Command Modes INTERFACE (conf-if-po-number)

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command applies to dynamic port-channel interfaces only. When applied on a static port-channel, this command has no effect.

lacp port-priority

To influence which ports will be put in Standby mode when there is a hardware limitation that prevents all compatible ports from aggregating, configure the port priority.

Syntax `lacp port-priority priority-value`
To return to the default setting, use the `no lacp port-priority priority-value` command.

Parameters	<i>priority-value</i>	Enter the port-priority value. The higher the value number, the lower the priority. The range is from 1 to 65535. The default is 32768 .
Defaults	32768	
Command Modes	INTERFACE	
Supported Modes	Programmable-Mux (PMUX) Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

port-channel mode

Configure the LACP port channel mode.

Syntax `port-channel number mode [active] [passive] [off]`

Parameters	<i>number</i>	Enter the keywords <code>number</code> then a number.
	<i>active</i>	Enter the keyword <code>active</code> to set the mode to the active state. ① NOTE: LACP modes are defined in <i>Usage Information</i>.
	<i>passive</i>	Enter the keyword <code>passive</code> to set the mode to the passive state. ① NOTE: LACP modes are defined in <i>Usage Information</i>.
	<i>off</i>	Enter the keyword <code>off</code> to set the mode to the off state. ① NOTE: LACP modes are defined in <i>Usage Information</i>.

Defaults	off
Command Modes	INTERFACE
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information LACP Modes

Mode	Function
active	An interface is in an active negotiating state in this mode. LACP runs on any link configured in the active state and also automatically initiates negotiation with other ports by initiating LACP packets.
passive	An interface is not in an active negotiating state in this mode. LACP runs on any link configured in the passive state. Ports in a passive state respond to negotiation requests from other ports that are in active states. Ports in a passive state respond to LACP packets
off	An interface cannot be part of a dynamic port channel in off mode. LACP does not run on a port configured in off mode.

port-channel-protocol lacp

Enable LACP on any LAN port.

Syntax `port-channel-protocol lacp`
 To disable LACP on a LAN port, use the `no port-channel-protocol lacp` command.

Command Modes INTERFACE

Supported Modes Programmable-Mux (PMUX)
 Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell(conf)#interface TenGigabitEthernet 0/5
Dell(conf-if-te-0/5)#no shutdown
Dell(conf-if-te-0/5)#port-channel-protocol lacp
Dell(conf-if-te-0/5-lacp)#port-channel 32 mode active
...
Dell(conf)#interface TenGigabitEthernet 0/6
Dell(conf-if-te-0/6)#no shutdown
Dell(conf-if-te-0/6)#port-channel-protocol lacp
Dell(conf-if-te-0/6-lacp)#port-channel 32 mode active
```

show interfaces port-channel

Display information on configured Port Channel groups.

Syntax `show interfaces port-channel [channel-number] [brief|description]`

Parameters

channel-number	For a Port Channel interface, enter the keyword <code>port-channel</code> followed by a number. The range is from 1 to 128.
brief	(OPTIONAL) Enter the keyword <code>brief</code> to display only the port channel number, the state of the port channel, and the number of interfaces in the port channel.
description	(OPTIONAL) Enter the keyword <code>description</code> to display interface information with description.

NOTE: This command also enables you to view information corresponding to a range of ports.

- For port-channel interfaces, you can specify multiple ports as `port-range`. For example, if you want to display information corresponding to all ports between 1 and 4, specify the port range as `show interfaces port-channel 1 - 4`.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM and added support to display the interface configurations corresponding to a range of ports.
9.7(0.0)	Introduced on the M I/O Aggregator.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

The following describes the `show interfaces port-channel` command shown in the following example.

Field	Description
Port-Channel 1...	Displays the status of LAG. In the Example, the status of the LAG, LAG fate-sharing group ("Failover-group") is listed.
Hardware is...	Displays the interface's hardware information and its assigned MAC address.
Port-channel is part...	Indicates whether the LAG is part of a LAG fate-sharing group ("Failover-group").
Internet address...	States whether an IP address is assigned to the interface. If an IP address is assigned, that address is displayed.
MTU 1554...	Displays link and IP MTU.
LineSpeed	Displays the interface's line speed. For a port channel interface, it is the line speed of the interfaces in the port channel.
Members in this...	Displays the interfaces belonging to this port channel.
ARP type:...	Displays the ARP type and the ARP timeout value for the interface.

Field	Description
Last clearing...	Displays the time when the <code>show interfaces counters</code> were cleared.
Queueing strategy.	States the packet queuing strategy. FIFO means first in first out.
packets input...	Displays the number of packets and bytes into the interface.
Input 0 IP packets...	Displays the number of packets with IP headers, VLAN tagged headers, and MPLS headers. The number of packets may not add correctly because a VLAN tagged IP packet counts as both a VLAN packet and an IP packet.
0 64-byte...	Displays the size of packets and the number of those packets entering that interface. This information is displayed over two lines.
Received 0...	Displays the type and number of errors or other specific packets received. This information is displayed over three lines.
Output 0...	Displays the type and number of packets sent out the interface. This information is displayed over three lines.
Rate information...	Displays the traffic rate information into and out of the interface. Traffic rate is displayed in bits and packets per second.
Time since...	Displays the time since the last change in the configuration of this interface.

Example (EtherScale)

```
Dell#show interfaces port-channel
Port-channel 1 is down, line protocol is down
Hardware address is 00:1e:c9:f1:00:05, Current address is 00:1e:c9:f1:00:05
Interface index is 1107755009
Minimum number of links to bring Port-channel up is 1
Internet address is not set
Mode of IP Address Assignment : NONE
DHCP Client-ID :lag1001ec9f10005
MTU 12000 bytes, IP MTU 1500 bytes
LineSpeed auto
Members in this channel:
ARP type: ARPA, ARP Timeout 04:00:00
Last clearing of "show interface" counters 03:28:00
Queueing strategy: fifo
Input Statistics:
0 packets, 0 bytes
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts
0 runts, 0 giants, 0 throttles
0 CRC, 0 overrun, 0 discarded
Output Statistics:
0 packets, 0 bytes, 0 underruns
0 64-byte pkts, 0 over 64-byte pkts, 0 over 127-byte pkts
0 over 255-byte pkts, 0 over 511-byte pkts, 0 over 1023-byte pkts
0 Multicasts, 0 Broadcasts, 0 Unicasts
0 throttles, 0 discarded, 0 collisions
```

User Information

The following describes the `show interfaces port-channel brief` command shown in the following example.

Field	Description
LAG	Lists the port channel number.
Mode	Lists the mode: <ul style="list-style-type: none"> · L3 — for Layer 3 · L2 — for Layer 2

Field	Description
Status	Displays the status of the port channel. <ul style="list-style-type: none"> down — if the port channel is disabled (shutdown) up — if the port channel is enabled (no shutdown)
Uptime	Displays the age of the port channel in hours:minutes:seconds.
Ports	Lists the interfaces assigned to this port channel.
(untitled)	Displays the status of the physical interfaces (up or down). <ul style="list-style-type: none"> In Layer 2 port channels, an * (asterisk) indicates which interface is the primary port of the port channel. The primary port sends out interface PDU. In Layer 3 port channels, the primary port is not indicated.

Example

```
Dell#show int po bri
Codes: L - LACP Port-channel
       O - OpenFlow Controller Port-channel
       A - Auto Port-channel
       I - Internally Lagged
LAG Mode Status Uptime Ports
L   128 L3 down 00:00:00
Dell#
```

To indicate the LACP fallback, `Internally lagged` is added to the list. When the LAG auto-configures itself, the LAG status describes as 'I'.

Related Commands `show lacp` — displays the LACP matrix.

show io-aggregator auto-lag status

Displays global information on the auto-lag status.

Syntax `show io-aggregator auto-lag status`

Command Modes EXEC

Supported Modes Standalone, Stacking, VLT

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN I/O Aggregator.
9.6(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell-ct-mx1-1-b1(conf)#do show io-aggregator auto-lag status
Auto LAG creation on server port(s) is disabled
```

show lacp

Displays the LACP matrix.

Syntax `show lacp port-channel-number [sys-id | counters]`

Parameters

port-channel-number	Enter a port-channel number: The range is from 1 to 128.
sys-id	(OPTIONAL) Enter the keywords <code>sys-id</code> and the value that identifies a system.
counters	(OPTIONAL) Enter the keyword <code>counters</code> to display the LACP counters.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example (Port-Channel-Number)

```
Dell#show lacp 128
Port-channel 1 admin up, oper up, mode lacp
Actor System ID:Priority 32768, Address 0001.e800.a12b
Partner System ID:Priority 32768, Address 0001.e801.45a5
      Actor Admin Key 1, Oper Key 1, Partner Oper Key 1
      LACP LAG 1 is an aggregatable link

A-Active LACP, B-Passive LACP, C-Short Timeout, D-Long Timeout
E-Aggregatable Link, F-Individual Link, G-IN_SYNC, H-OUT_OF_SYNC
I-Collection enabled, J-Collection disabled, K-Distribution_enabled L-
Distribution disabled,
M-Partner Defaulted, N-Partner Non-defaulted, O-Receiver is in expired state,
P-Receiver is not in expired state

Port Te 0/1 is enabled, LACP is enabled and mode is lacp
  Actor Admin: State ACEHJLMP Key 1 Priority 128
      Oper: State ACEGIKNP Key 1 Priority 128
  Partner Admin: State BDFHJLMP Key 0 Priority 0
      Oper: State BCEGIKNP Key 1 Priority 128
Dell#
```

Example (Sys-id)

```
Dell#show lacp 1 sys-id
Actor System ID: Priority 32768, Address 0001.e800.a12b
Partner System ID: Priority 32768, Address 0001.e801.45a5
Dell#
```

Example (Counter)

```
Dell#show lacp 1 counters
-----
Port          LACP PDU   Marker PDU   Unknown   Illegal
              Xmit  Recv   Xmit Recv   Pkts Rx   Pkts Rx
-----
```

```
TenGig 0/1 200 200 0 0 0 0
Dell#
```

Related Commands [clear lacp counters](#) — Clears the LACP counters.

[show interfaces port-channel](#) — Displays the information on configured Port Channel groups.

show link-bundle-distribution port-channel

Display the traffic-handling and utilization of the member interfaces of the port channel.

Syntax `show link-bundle-distribution port-channel`

Command Modes EXEC

EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information The following table describes the output fields of this `show` command:

Field	Description
Link-bundle trigger threshold	Threshold value that is the checkpoint, exceeding which the link bundle is marked as being overutilized and alarm is generated
LAG bundle number	Number of the LAG bundle
Utilization (In Percent)	Traffic usage in percentage of the packets processed by the port channel
Alarm State	Indicates whether an alarm is generated if overutilization of the port channel occurred. Possible values are Active and Inactive
Interface	Slot and port number, and the type of the member interface of the port channel
Line Protocol	Indicates whether the interface is administratively up or down
Utilization (In Percent)	Traffic usage in percentage of the packets processed by the particular member interface

Example

```
Dell#show link-bundle-distribution port-channel
Link-bundle trigger threshold - 60

LAG bundle - 1      Utilization[In Percent] - 0      Alarm State - Inactive

Interface          Line Protocol  Utilization[In Percent]
Te 0/5             Up             0
```

show port-channel-flow

Display an egress port in a given port-channel flow.

Syntax `show port-channel-flow port-channel number incoming-interface interface { src-mac address dest-mac address {vlan vlanid | ether-type }} [src-ip address dest-ip address] [src-port number dest-port number]`

Parameters	port-channel number	Enter the keywords <code>port-channel</code> then the number of the port channel to display flow information. The range is from 1 to 128.
	incoming-interface interface	Enter the keywords <code>incoming-interface</code> then the interface type and slot/port or number information: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
	src-mac address	Enter the keywords <code>src-mac</code> then the MAC source address in the <code>nn:nn:nn:nn:nn:nn</code> format.
	dest-macaddress	Enter the keywords <code>dest-mac</code> then the MAC destination address in the <code>nn:nn:nn:nn:nn:nn</code> format.
	vlan vlan-id	Enter the keyword <code>vlan</code> then the VLAN ID. The range is from 1 to 4094.
	ether-type	Enter the keywords <code>ether-type</code> then the ether-value in the <code>XX:XX</code> format.
	src-ip address	Enter the keywords <code>src-ip</code> then the IP source address in IP address format.
	dest-ip address	Enter the keywords <code>dest-ip</code> then the IP destination address in IP address format.
	src-port number	Enter the keywords <code>src-port</code> then the source port number. The range is from 1 to 65536. The default is None .
	dest-port number	Enter the keywords <code>dest-port</code> then the destination port number. The range is from 1 to 65536. The default is None .

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information Because this command calculates based on a Layer 2 hash algorithm, use this command to display flows for switched Layer 2 packets, not for routed packets (use the `show ip flow` command to display routed packets).

The `show port-channel-flow` command returns the egress port identification in a given port-channel if a valid flow is entered. A mismatched flow error occurs if MAC-based hashing is configured for a Layer 2 interface and you are trying to display a Layer 3 flow.

The output displays three entries:

- Egress port for unfragmented packets.
- In the event of fragmented packets, the egress port of the first fragment.
- In the event of fragmented packets, the egress port of the subsequent fragments.

 **NOTE:** In the `show port-channel-flow` command output, the egress port for an unknown unicast, multicast, or broadcast traffic is not displayed.

This chapter describes commands to configure Layer 2 features.

This chapter contains the following sections:

- [MAC Addressing Commands](#)
- [Virtual LAN \(VLAN\) Commands](#)

Topics:

- [MAC Addressing Commands](#)
- [Virtual LAN \(VLAN\) Commands](#)

MAC Addressing Commands

The following commands are related to configuring, managing, and viewing MAC addresses:

- [clear mac-address-table dynamic](#)
- [mac-address-table aging-time](#)
- [mac-address-table station-move refresh-arp](#)
- [show cam mac stack-unit](#)
- [show mac-address-table](#)

clear mac-address-table dynamic

Clear the MAC address table of all MAC addresses learned dynamically.

Syntax	<code>clear mac-address-table dynamic {address <i>mac-address</i> all interface <i>interface</i> vlan <i>vlan-id</i>}</code>	
Parameters	address <i>mac-address</i>	Enter the keyword <code>address</code> followed by a MAC address in <code>nn:nn:nn:nn:nn:nn</code> format.
	all	Enter the keyword <code>all</code> to delete all MAC address entries in the MAC address table.
	interface <i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> followed by the slot/port information.
	vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> followed by a VLAN ID number from 1 to 4094.
Command Modes	EXEC Privilege	
Supported Modes	All Modes	

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

mac-address-table aging-time

Specify an aging time for MAC addresses to remove from the MAC address table.

Syntax `mac-address-table aging-time seconds`
 To delete the configured aging time, use the `no mac-address-table aging-time seconds` command.

Parameters

seconds Enter either zero (0) or a number as the number of seconds before MAC addresses are relearned. To disable aging of the MAC address table, enter 0. The range is from 10 to 1000000. The default is **1800 seconds**.

Defaults **1800 seconds**

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

mac-address-table static

Associate specific MAC or hardware addresses to an interface and virtual local area networks (VLANs).

Syntax `mac-address-table static mac-address output interface vlan vlan-id`
 To remove a MAC address, use the `no mac-address-table static mac-address output interface vlan vlan-id` command.

Parameters

mac-address Enter the 48-bit hexadecimal address in nn:nn:nn:nn:nn:nn format.

output interface Enter the keyword `output` then one of the following interfaces for which traffic is forwarded:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

`vlan vlan-id` Enter the keyword `vlan` then a VLAN ID number from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

mac-address-table station-move refresh-arp

Ensure that address resolution protocol (ARP) refreshes the egress interface when a station move occurs due to a topology change.

Syntax `[no] mac-address-table station-move refresh-arp`

Defaults Enabled

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Modified the default option from none to Enabled. Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information For details about using this command, refer to the “NIC Teaming” section of the Layer 2 chapter in the *Dell Networking OS Configuration Guide*.

mac learning-limit

Limit the maximum number of MAC addresses (static + dynamic) learned on a selected interface.

Syntax `mac learning-limit address_limit [dyanmic] [no-station-move| station-move] [sticky]`

Parameters

<i>address_limit</i>	Enter the maximum number of MAC addresses that can be learned on the interface. The range is from 1 to 1000000.
<i>dynamic</i>	(OPTIONAL) Enter the keyword <i>dynamic</i> to allow aging of MACs even though a learning limit is configured.
<i>no-station-move</i>	(OPTIONAL) Enter the keywords <i>no-station-move</i> to disallow a station move (associate the learned MAC address with the most recently accessed port) on learned MAC addresses.
<i>station-move</i>	(OPTIONAL) Enter the keywords <i>station-move</i> to allow a station move on learned MAC addresses.
<i>sticky</i>	(OPTIONAL) Enter the keyword <i>sticky</i> to allow configuring the sticky mac feature along with the learning limit.

Defaults

dynamic

 **NOTE: “Static” means manually entered addresses, which do not age.**

Command Modes

INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command and its options are supported on physical interfaces, static LAGs, LACP LAGs, and VLANs.

If you do not specify the `vlan` option, the MAC address counters are not VLAN-based. That is, the sum of the addresses learned on all VLANs (not having any learning limit configuration) is counted against the MAC learning limit.

MAC Learning Limit violation logs and actions are not available on a per-VLAN basis.

With the keyword `no-station-move` option, MAC addresses learned through this feature on the selected interface persist on a per-VLAN basis, even if received on another interface. Enabling or disabling this option has no effect on already learned MAC addresses.

After the MAC address learning limit is reached, the MAC addresses do not age out unless you add the `dynamic` option. To clear statistics on MAC address learning, use the `clear counters` command with the `learning-limit` parameter.

When a channel member is added to a port-channel and there is not enough ACL CAM space, the MAC limit functionality on that port-channel is undefined. When this occurs, un-configure the existing configuration first and then reapply the limit with a lower value.

Related Commands

[clear counters](#) — Clear counters used in the `show interface` command.

[clear mac-address-table dynamic](#) — clears the MAC address table of all MAC address learned dynamically.

[show mac learning-limit](#) — displays MAC learning-limit configuration.

mac learning-limit learn-limit-violation

Configure an action for a MAC address learning-limit violation.

Syntax `mac learning-limit learn-limit-violation {log | shutdown}`
To return to the default, use the `no mac learning-limit learn-limit-violation {log | shutdown}` command.

Parameters

log	Enter the keyword <code>log</code> to generate a syslog message on a learning-limit violation.
shutdown	Enter the keyword <code>shutdown</code> to shut down the port on a learning-limit violation.

Defaults none

Command Modes INTERFACE (conf-if-interface-slot/port)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is supported on physical interfaces, static LAGs, and LACP LAGs.

Related Commands [show mac learning-limit](#) — displays details of the mac learning-limit.

mac learning-limit station-move-violation

Specify the actions for a station move violation.

Syntax `mac learning-limit station-move-violation {log | shutdown-both | shutdown-offending | shutdown-original}`
To disable a configuration, use the `no mac learning-limit station-move-violation` command, then the configured keyword.

Parameters

log	Enter the keyword <code>log</code> to generate a syslog message on a station move violation.
shutdown-both	Enter the keyword <code>shutdown</code> to shut down both the original and offending interface and generate a syslog message.
shutdown-offending	Enter the keywords <code>shutdown-offending</code> to shut down the offending interface and generate a syslog message.
shutdown-original	Enter the keywords <code>shutdown-original</code> to shut down the original interface and generate a syslog message.

Defaults none

Command Modes INTERFACE (conf-if-interface-slot/port)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is supported on physical interfaces, static LAGs, and LACP LAGs.

Related Commands [show mac learning-limit](#) — displays details of the mac learning-limit.

mac learning-limit reset

Reset the MAC address learning-limit error-disabled state.

Syntax `mac learning-limit reset`

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show cam mac stack-unit

Display the content addressable memory (CAM) size and the portions allocated for MAC addresses and for MAC ACLs.

Syntax `show cam mac stack-unit unit_number port-set port-pipe count [vlan vlan-id] [interface interface]`

Parameters

stack-unit <i>unit_number</i>	(REQUIRED) Enter the keyword <code>stack-unit</code> followed by a stack member number to select the stack unit for which to gather information. The range is 0 to 5.
port-set <i>port-pipe</i>	(REQUIRED) Enter the keywords <code>port-set</code> followed by a Port-Pipe number to select the Port-Pipe for which to gather information. The range is 0.
address <i>mac-addr</i>	(OPTIONAL) Enter the keyword <code>address</code> followed by a MAC address in the <code>nn:nn:nn:nn:nn:nn</code> format to display information on that MAC address.
dynamic	(OPTIONAL) Enter the keyword <code>dynamic</code> to display only those MAC addresses learned dynamically by the switch.
static	(OPTIONAL) Enter the keyword <code>static</code> to display only those MAC address specifically configured on the switch.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> followed by the interface type, slot and port information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

vlan *vlan-id* (OPTIONAL) Enter the keyword `vlan` followed by the VLAN ID to display the MAC address assigned to the VLAN. The range is from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

show mac-address-table

Display the MAC address table.

Syntax

```
show mac-address-table [dynamic | static] [address mac-address | interface
interface | vlan vlan-id] [count [vlan vlan-id] [interface interface-type [slot
[/port]]]]
```

Parameters

dynamic	(OPTIONAL) Enter the keyword <code>dynamic</code> to display only those MAC addresses the switch dynamically learns. Optionally, you can also add one of these combinations: <code>address/mac-address</code> , <code>interface/interface</code> , or <code>vlan vlan-id</code> .
static	(OPTIONAL) Enter the keyword <code>static</code> to display only those MAC addresses specifically configured on the switch. Optionally, you can also add one of these combinations: <code>address/mac-address</code> , <code>interface/interface</code> , or <code>vlan vlan-id</code> .
address <i>mac-address</i>	(OPTIONAL) Enter the keyword <code>address</code> then a MAC address in the <code>nn:nn:nn:nn:nn:nn</code> format to display information on that MAC address.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> then the interface type, slot and port information: <ul style="list-style-type: none"> • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
interface <i>interface-type</i>	(OPTIONAL) Instead of entering the keyword <code>interface</code> then the interface type, slot and port information, as above, you can enter the interface type, then just a slot number.
vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> then the VLAN ID to display the MAC address assigned to the VLAN. The range is 1 to 4094.

count (OPTIONAL) Enter the keyword `count`, then optionally, by an interface or VLAN ID, to display total or interface-specific static addresses, dynamic addresses, and MAC addresses in use.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information

The following describes the `show mac-address-table` command shown in the following example.

Column Heading	Description
VlanId	Displays the VLAN ID number.
Mac Address	Displays the MAC address in nn:nn:nn:nn:nn:nn format.
Type	Lists whether the MAC address was manually configured (Static), learned dynamically (Dynamic), or associated with a specific port (Sticky).
Interface	Displays the interface type and slot/port information. The following abbreviations describe the interface types: <ul style="list-style-type: none">• <code>gi</code> — Gigabit Ethernet then a slot/port.• <code>po</code> — Port Channel then a number. The range is from 1 to 255 for TeraScale.• <code>so</code> — SONET then a slot/port.• <code>te</code> — 10 Gigabit Ethernet then a slot/port.
State	Lists if the MAC address is in use (Active) or not in use (Inactive).

Example

```
Dell#show mac-address-table
VlanId Mac Address      Type      Interface  State
20      00:00:c9:ad:f6:12  Dynamic   Te 0/3     Active
Dell#
```

Usage Information

The following describes the `show mac-address-table` command shown in the following example.

Column Heading	Description
VlanId	Displays the VLAN ID number.
Mac Address	Displays the MAC address in nn:nn:nn:nn:nn:nn format.
Type	Lists whether the MAC address was manually configured (Static), learned (Dynamic), or associated with a specific port (Sticky). An (N) indicates that the specified MAC address has been learnt by a neighbor and is synced to the node.

Column Heading	Description
Interface	Displays the interface type and slot/port information. The following abbreviations describe the interface types: <ul style="list-style-type: none"> · gi — Gigabit Ethernet then a slot/port · po — Port Channel then a number. The range is from 1 to 255. \ · so — SONET then a slot/port. · te — 10-Gigabit Ethernet then a slot/port.
State	Lists if the MAC address is in use (Active) or not in use (Inactive).

The following describes the `show mac-address-table count` command shown in the following example.

Line Beginning With	Description
MAC Entries...	Displays the number of MAC entries learned per VLAN.
Dynamic Address...	Lists the number of dynamically learned MAC addresses.
Static Address...	Lists the number of user-defined MAC addresses.
Total MAC...	Lists the total number of MAC addresses the switch uses.

Example (Count)

```
Dell#show mac-address-table count
MAC Entries for all vlans :
Dynamic Address Count :          5
Static Address (User-defined) Count : 0
Total MAC Addresses in Use:      5
Dell#
```

show mac-address-table aging-time

Display the aging times assigned to the MAC addresses on the switch.

Syntax

```
show mac-address-table aging-time [vlan vlan-id]
```

Parameters

vlan *vlan-id* (OPTIONAL) Enter the keyword `vlan` then the VLAN ID to display the MAC address assigned to the VLAN. The range is from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show mac-address-table aging-time
Mac-address-table aging time : 1800
```

```
Dell#
```

Related Commands [show mac-address-table](#) — displays the current MAC address configuration.

show mac learning-limit

Display MAC address learning limits set for various interfaces.

Syntax `show mac learning-limit [violate-action] [detail] [interface interface]`

Parameters

- | | |
|-----------------------------------|---|
| violate-action | (OPTIONAL) Enter the keywords <code>violate-action</code> to display the MAC learning limit violation status. |
| detail | (OPTIONAL) Enter the keyword <code>detail</code> to display the MAC learning limit in detail. |
| interface <i>interface</i> | (OPTIONAL) Enter the keyword <code>interface</code> with the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. |

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show mac learning-limit
Interface Learning Dynamic Static Unknown SA
Slot/port Limit MAC count MAC count Drops
Dell#
```

Virtual LAN (VLAN) Commands

The following commands configure and monitor virtual local area networks (VLANs). VLANs are a virtual interface and use many of the same commands as physical interfaces.

For more information, also refer to [Virtual LAN \(VLAN\) Commands](#).

description

Add a description about the selected VLAN.

Syntax `description description`

To remove the description from the VLAN, use the `no description` command.

Parameters *description* Enter a text string description to identify the VLAN (80 characters maximum).

Defaults none

Command Modes INTERFACE VLAN

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [show vlan](#) – displays the VLAN configuration.

default vlan-id

Specify a VLAN as the Default VLAN.

Syntax `default vlan-id vlan-id`
To remove the default VLAN status from a VLAN and VLAN 1 does not exist, use the `no default vlan-id vlan-id` syntax.

Parameters *vlan-id* Enter the VLAN ID number of the VLAN to become the new Default VLAN. The range is from 1 to 4094. The default is **1**.

Defaults The Default VLAN is VLAN **1**.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To return VLAN 1 as the Default VLAN, use the `(default-vlan-id 1)` command.

The Default VLAN contains only untagged interfaces.

Related Commands [interface vlan](#) — configures a VLAN.

default-vlan disable

Disable the default VLAN so that all switchports are placed in the Null VLAN until they are explicitly configured as a member of another VLAN.

Defaults Enabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `no default vlan disable` command is not listed in the running-configuration, but when the default VLAN is disabled, `default-vlan disable` is listed in the running-configuration.

name

Assign a name to the VLAN.

Syntax `name vlan-name`
To remove the name from the VLAN, use the `no name` command.

Parameters `vlan-name` Enter up to 32 characters as the name of the VLAN.

Defaults Not configured.

Command Modes INTERFACE VLAN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To display information about a named VLAN, enter the `show vlan` command with the name parameter or the `show interfaces description` command.

Related Commands [description](#) — assigns a descriptive text string to the interface.

[interface vlan](#) — configures a VLAN.

[show vlan](#) — displays the current VLAN configurations on the switch.

show config

Display the current configuration of the selected VLAN.

Syntax `show config`

Command Modes INTERFACE VLAN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if-vl-100)#show config
!
interface Vlan 1
  description a
  no ip address
  mtu 2500
  shutdown
Dell(conf-if-vl-100)#
```

show vlan

Display the current VLAN configurations on the switch.

Syntax `show vlan [brief | id vlan-id | name vlan-name]`

Parameters

brief	(OPTIONAL) Enter the keyword <code>brief</code> to display the following information: <ul style="list-style-type: none">• VLAN ID• VLAN name (left blank if none is configured)• Spanning Tree Group ID• MAC address aging time• IP address
id <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>id</code> then a number from 1 to 4094. Only information on the VLAN specified is displayed.
name <i>vlan-name</i>	(OPTIONAL) Enter the keyword <code>name</code> then the name configured for the VLAN. Only information on the VLAN named is displayed.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show vlan` command shown in the following example.

Column Heading Description

(Column 1 — no heading)

- asterisk symbol (*) = Default VLAN
- G = GVRP VLAN
- P = primary VLAN
- C = community VLAN
- I = isolated VLAN
- O = OpenFlow

NUM Displays existing VLAN IDs.

Status Displays the word *Inactive* for inactive VLANs and the word *Active* for active VLANs.

Q

- Displays G for GVRP tagged
- M for member of a VLAN-Stack VLAN
- T for tagged interface
- U for untagged interface
- x (not capitalized x) for Dot1x untagged
- X (capitalized X) for Dot1x tagged
- o (not capitalized o) for OpenFlow untagged
- O (capitalized O) for OpenFlow tagged
- H for VSN tagged
- i (not capitalized i) for Internal untagged
- I (capitalized I) for Internal tagged
- v (not capitalized v) for VLT untagged
- V (capitalized V) for VLT tagged

Ports Displays the type, slot, and port information.

- Po = port channel
- Gi = gigabit Ethernet
- Te = ten-gigabit Ethernet

Example

```
Dell#show vlan
Codes: * - Default VLAN, G - GVRP VLANs, R - Remote Port Mirroring VLANs, P -
Primary, C - Community, I - Isolated
Q: U - Untagged, T - Tagged
   x - Dot1x untagged, X - Dot1x tagged
   G - GVRP tagged, M - Vlan-stack, H - VSN tagged
   i - Internal untagged, I - Internal tagged, v - VLT untagged, V - VLT tagged
NUM  Status   Description Q Ports
  1   Inactive a
  2   Inactive
* 20   Active           U Te 0/3,5,13,53-56
```

```
1002 Active T Te 0/3,13,55-56
Dell#
```

Example (VLAN ID)

```
Dell# show vlan id 40

Codes: * - Default VLAN, G - GVRP VLANs, R - Remote Port Mirroring
VLANs, P - Primary, C - Community, I - Isolated
Q: U - Untagged, T - Tagged
   x - Dot1x untagged, X - Dot1x tagged
   G - GVRP tagged, M - Vlan-stack, H - VSN tagged
   i - Internal untagged, I - Internal tagged, v - VLT untagged, V
- VLT tagged
  NUM  Status  Description  Q Ports
   1   Inactive  a

Dell#
```

Example (Brief)

```
Dell#show vlan brief
VLAN Name STG MAC Aging IP Address
-----
1         0  0          unassigned
2         0  0          unassigned
20        0  0          unassigned
1002     0  0          unassigned
Dell#
```

Example (Name)

```
Dellconf)#interface vlan 222
Dell(conf-if-vl-222)#name test
Dell(conf-if-vl-222)#do show vlan name test

Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
   x - Dot1x untagged, X - Dot1x tagged
   G - GVRP tagged, M - Vlan-stack

  NUM  Status Description  Q Ports
  222  Inactive          U Gi 1/22

Dell(conf-if-vl-222)#
```

Related Commands

[vlan-stack compatible](#) — enables the Stackable VLAN feature on the selected VLAN.

[interface vlan](#) — configures a VLAN.

tagged

Add a Layer 2 interface to a VLAN as a tagged interface.

Syntax

```
tagged interface
```

To remove a tagged interface from a VLAN, use the `no tagged interface` command.

Parameters

interface

Enter the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults	All interfaces in Layer 2 mode are untagged.	
Command Modes	INTERFACE VLAN	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	<p>When you use the <code>no tagged</code> command, the interface is automatically placed in the Default VLAN as an untagged interface unless the interface is a member of another VLAN. If the interface belongs to several VLANs, remove it from all VLANs to change it to an untagged interface.</p> <p>Tagged interfaces can belong to multiple VLANs, while untagged interfaces can only belong to one VLAN at a time.</p>	
Related Commands	<p>interface vlan — configures a VLAN.</p> <p>untagged — specifies which interfaces in a VLAN are untagged.</p>	

track ip

Track the Layer 3 operational state of a Layer 3 VLAN, using a subset of the VLAN member interfaces.

Syntax	<code>track ip interface</code>	
	To remove the tracking feature from the VLAN, use the <code>no track ip interface</code> command.	
Parameters	<i>interface</i>	<p>Enter the following keywords and slot/port or number information:</p> <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
Defaults	Not configured.	
Command Modes	INTERFACE VLAN	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	<p>When this command is configured, the VLAN is operationally UP if any of the interfaces specified in the <code>track ip</code> command are operationally UP, and the VLAN is operationally DOWN if none of the tracking interfaces are operationally UP.</p>	

If the `track ip` command is not configured, the VLAN's Layer 3 operational state depends on all the members of the VLAN.

The Layer 2 state of the VLAN, and hence the Layer 2 traffic, is not affected by the `track ip` command configuration.

Related Commands [interface vlan](#) — configures a VLAN.

[tagged](#) — specifies which interfaces in a VLAN are tagged.

untagged

Add a Layer 2 interface to a VLAN as an untagged interface.

Syntax `untagged interface`

To remove an untagged interface from a VLAN, use the `no untagged interface` command.

Parameters

interface

Enter the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults All interfaces in Layer 2 mode are untagged.

Command Modes INTERFACE VLAN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Untagged interfaces can only belong to one VLAN.

In the Default VLAN, you cannot use the `no untagged interface` command. To remove an untagged interface from all VLANs, including the Default VLAN, enter INTERFACE mode and use the `no switchport` command.

Related Commands [interface vlan](#) — configures a VLAN.

[tagged](#) — specifies which interfaces in a VLAN are tagged.

Link Layer Discovery Protocol (LLDP)

The link layer discovery protocol (LLDP) advertises connectivity and management from the local station to the adjacent stations on an IEEE 802 LAN. LLDP facilitates multi-vendor interoperability by using standard management tools to discover and make available a physical topology for network management. The Dell Networking OS implementation of LLDP is based on IEEE standard 801.1ab.

This chapter describes the LLDP commands.

The starting point for using LLDP is invoking LLDP with the `protocol lldp` command in either CONFIGURATION or INTERFACE mode.

The information LLDP distributes is stored by its recipients in a standard management information base (MIB). You can access the information by a network management system through a management protocol such as simple network management protocol (SNMP).

For details about implementing LLDP/LLDP-MED, refer to the Link Layer Discovery Protocol chapter of the *Dell PowerEdge FN I/O Aggregator Configuration Guide*.

Topics:

- [advertise dot1-tlv](#)
- [advertise dot3-tlv](#)
- [advertise interface-port-desc](#)
- [advertise management-tlv](#)
- [clear lldp counters](#)
- [clear lldp neighbors](#)
- [debug lldp interface](#)
- [disable](#)
- [hello](#)
- [mode](#)
- [multiplier](#)
- [protocol lldp \(Configuration\)](#)
- [protocol lldp \(Interface\)](#)
- [show lldp neighbors](#)
- [show lldp statistics](#)
- [show running-config lldp](#)
- [LLDP-MED Commands](#)

advertise dot1-tlv

Advertise dot1 TLVs (Type, Length, Value).

Syntax `advertise dot1-tlv {port-protocol-vlan-id | port-vlan-id | vlan-name}`
To remove advertised dot1-tlv, use the `no advertise dot1-tlv {port-protocol-vlan-id | port-vlan-id | vlan-name}` command.

Parameters

port-protocol-vlan-id	Enter the keywords <code>port-protocol-vlan-id</code> to advertise the port protocol VLAN identification TLV.
port-vlan-id	Enter the keywords <code>port-vlan-id</code> to advertise the port VLAN identification TLV.
vlan-name	Enter the keywords <code>vlan-name</code> to advertise the vlan-name TLV.

Defaults

Disabled.

Command Modes

CONFIGURATION (`conf-lldp`) and INTERFACE (`conf-if-interface-lldp`)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [protocol lldp \(Configuration\)](#) — enables LLDP globally.
- [debug lldp interface](#) — debugs LLDP.
- [show lldp neighbors](#) — displays the LLDP neighbors.
- [show running-config lldp](#) — displays the LLDP running configuration.

advertise dot3-tlv

Advertise dot3 TLVs (Type, Length, Value).

Syntax

```
advertise dot3-tlv {max-frame-size}
```

To remove advertised dot3-tlv, use the `no advertise dot3-tlv {max-frame-size}` command.

Parameters

max-frame-size Enter the keywords `max-frame-size` to advertise the dot3 maximum frame size.

Defaults

none

Command Modes

CONFIGURATION (`conf-lldp`) and INTERFACE (`conf-if-interface-lldp`)

Supported Modes

Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

advertise interface-port-desc

Advertise port descriptor.

Syntax `advertise interface-port-desc {description | port-id}`
To remove the advertised port descriptor, use the `no advertise interface-port-desc {description | port-id}` command.

Parameters

description	Enter the keyword <code>description</code> then the interface description.
port-id	Enter the keyword <code>port-id</code> then the port-id. The range is from 0 to 7.

Defaults None

Command Modes CONFIGURATION (conf-lldp)
INTERFACE (conf-if-interface-lldp)

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(2.0P1)	Introduced the <code>description</code> and <code>port-id</code> options.

Usage Information If you do not specify the option, by default the `port-id` takes higher precedence and sends the `port-id` in the LLDP packets.

advertise management-tlv

Advertise management TLVs (Type, Length, Value).

Syntax `advertise management-tlv {system-capabilities | system-description | system-name}`
To remove advertised management TLVs, use the `no advertise management-tlv {system-capabilities | system-description | system-name}` command.

Parameters

system-capabilities	Enter the keywords <code>system-capabilities</code> to advertise the system capabilities TLVs to the LLDP peer.
system-description	Enter the keywords <code>system-description</code> to advertise the system description TLVs to the LLDP peer.
system-name	Enter the keywords <code>system-name</code> to advertise the system name TLVs to the LLDP peer.

Defaults none

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.16.1	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The command options `system-capabilities`, `system-description`, and `system-name` can be invoked individually or together, in any sequence.

clear lldp counters

Clear LLDP transmitting and receiving counters for all physical interfaces or a specific physical interface.

Syntax `clear lldp counters interface`

Parameters *interface* Enter the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

clear lldp neighbors

Clear LLDP neighbor information for all interfaces or a specific interface.

Syntax `clear lldp neighbors {interface}`

Parameters *interface* Enter the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults none

Command Modes	EXEC Privilege
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

debug lldp interface

Enable LLDP debugging to display timer events, neighbor additions or deletions, and other information about incoming and outgoing packets.

Syntax

```
debug lldp interface {interface | all}{events | packet {brief | detail} {tx | rx | both}}
```

To disable debugging, use the `no debug lldp interface {interface | all}{events} {packet {brief | detail} {tx | rx | both}}` command.

Parameters	interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 10-Gigabit Ethernet interface, enter the keyword <code>tenGigabitEthernet</code> followed by the slot/port information.
	all	(OPTIONAL) Enter the keyword <code>all</code> to display information on all interfaces.
	events	(OPTIONAL) Enter the keyword <code>events</code> to display major events such as timer events.
	packet	(OPTIONAL) Enter the keyword <code>packet</code> to display information regarding packets coming in or going out.
	brief	(OPTIONAL) Enter the keyword <code>brief</code> to display brief packet information.
	detail	(OPTIONAL) Enter the keyword <code>detail</code> to display detailed packet information.
	tx	(OPTIONAL) Enter the keyword <code>tx</code> to display transmit-only packet information.
	rx	(OPTIONAL) Enter the keyword <code>rx</code> to display receive-only packet information.
	both	(OPTIONAL) Enter the keyword <code>both</code> to display both receive and transmit packet information.

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

disable

Enable or disable LLDP.

Syntax	<code>disable</code> To enable LLDP, use the <code>no disable</code> command.
Defaults	Enabled, that is <code>no disable</code> .
Command Modes	CONFIGURATION (<code>conf-lldp</code>) and INTERFACE (<code>conf-if-interface-lldp</code>)
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

hello

Configure the rate at which the LLDP control packets are sent to its peer.

Syntax	<code>hello seconds</code> To revert to the default, use the <code>no hello seconds</code> command.	
Parameters	seconds Enter the rate, in seconds, at which the control packets are sent to its peer. The rate is from 5 to 180 seconds. The default is 30 seconds .	
Defaults	30 seconds	
Command Modes	CONFIGURATION (<code>conf-lldp</code>) and INTERFACE (<code>conf-if-interface-lldp</code>)	
Supported Modes	Programmable-Mux (PMUX) Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

mode

To receive or transmit, set LLDP.

Syntax `mode {tx | rx}`
 To return to the default, use the `no mode {tx | rx}` command.

Parameters

tx	Enter the keyword <code>tx</code> to set the mode to transmit.
rx	Enter the keyword <code>rx</code> to set the mode to receive.

Defaults Both **transmit** and **receive**.

Command Modes CONFIGURATION (`conf-lldp`) and INTERFACE (`conf-if-interface-lldp`)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol lldp \(Configuration\)](#) — enables LLDP globally.
[show lldp neighbors](#) — displays the LLDP neighbors.

multiplier

Set the number of consecutive misses before LLDP declares the interface dead.

Syntax `multiplier integer`
 To return to the default, use the `no multiplier integer` command.

Parameters

integer	Enter the number of consecutive misses before the LLDP declares the interface dead. The range is from 2 to 10.
----------------	--

Defaults **4 x hello**

Command Modes CONFIGURATION (`conf-lldp`) and INTERFACE (`conf-if-interface-lldp`)

Supported Modes Programmable-Mux (PMUX)
 Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

protocol lldp (Configuration)

Enable LLDP globally on the switch.

Syntax `protocol lldp`
To disable LLDP globally on the chassis, use the `no protocol lldp` command.

Defaults Enabled.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

protocol lldp (Interface)

Enter the LLDP protocol in the INTERFACE mode.

Syntax `[no] protocol lldp`
To return to the global LLDP configuration mode, use the `no protocol lldp` command from Interface mode.

Defaults Enabled

Command Modes INTERFACE (conf-if-interface-lldp)

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command is available only in PMUX mode.

By default, protocol lldp is enabled. To disable, use the `no protocol lldp` command.

When you enter the LLDP protocol in the Interface context, it overrides global configurations. When you execute the `no protocol lldp` from INTERFACE mode, interfaces begin to inherit the configuration from global LLDP CONFIGURATION mode.

show lldp neighbors

Display LLDP neighbor information for all interfaces or a specified interface.

Syntax `show lldp neighbors [interface] [detail]`

Parameters

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `tenGigabitEthernet` then the slot/port information.

detail (OPTIONAL) Enter the keyword `detail` to display all the TLV information, timers, and LLDP tx and rx counters.

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information Omitting the keyword `detail` displays only the remote chassis ID, Port ID, and host name.

Example

```
Dell (conf-if-te-0/3)#do show lldp neighbors
Loc PortID  Rem Host Name  Rem Port Id  Rem Chassis Id
-----
Te 0/1     FTOS           TenGigabitEthernet 0/5  00:01:e8:05:40:46
Te 0/2     FTOS           TenGigabitEthernet 0/6  00:01:e8:05:40:46
Te 0/3     FTOS           TenGigabitEthernet 0/7  00:01:e8:05:40:46
Dell (conf-if-te-0/3)#
```

show lldp statistics

Displays the LLDP statistical information.

Syntax `show lldp statistics`

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show lldp statistics
----- LLDP GLOBAL STATISTICS ON CHASSIS -----
Total number of neighbors: 4
Last table change time: 00:01:17, In ticks: 3859
Total number of Table Inserts: 7
Total number of Table Deletes: 3
Total number of Table Drops: 0
Total number of Table Age Outs: 0
Dell#
```

show running-config lldp

Display the current global LLDP configuration.

Syntax	show running-config lldp	
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	
Command History	9.9(0.0)	Introduced on the FN IOM.
	Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show running-config lldp
!
protocol lldp
 advertise dot1-tlv port-protocol-vlan-id port-vlan-id
 advertise dot3-tlv max-frame-size
 advertise management-tlv system-capabilities system-description
 hello 15
 multiplier 3
 no disable
Dell#
```

LLDP-MED Commands

The following are the LLDP-MED (Media Endpoint Discovery) commands.

The LLDP-MED commands are an extension of the set of LLDP TLV advertisement commands.

As defined by ANSI/TIA-1057, LLDP-MED provides organizationally specific TLVs (Type Length Value), so that endpoint devices and network connectivity devices can advertise their characteristics and configuration information. The Organizational Unique Identifier (OUI) for the Telecommunications Industry Association (TIA) is 00-12-BB.

- LLDP-MED Endpoint Device — any device that is on an IEEE 802 LAN network edge, can communicate using IP, and uses the LLDP-MED framework.
- LLDP-MED Network Connectivity Device — any device that provides access to an IEEE 802 LAN to an LLDP-MED endpoint device, and supports IEEE 802.1AB (LLDP) and TIA-1057 (LLDP-MED). The Dell Networking system is an LLDP-MED network connectivity device.

Regarding connected endpoint devices, LLDP-MED provides network connectivity devices with the ability to:

- manage inventory
- manage Power over Ethernet (POE)
- identify physical location
- identify network policy

advertise med guest-voice

To advertise a separate limited voice service for a guest user with their own IP telephony handset or other appliances that support interactive voice services, configure the system.

Syntax `advertise med guest-voice {vlan-id layer2_priority DSCP_value} | {priority-tagged number}`
To return to the default, use the `no advertise med guest-voice {vlan-id layer2_priority DSCP_value} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
<i>layer2_priority</i>	Enter the Layer 2 priority. The range is from 0 to 7.
<i>DSCP_value</i>	Enter the DSCP value. The range is from 0 to 63.
<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> followed the Layer 2 priority. The range is from 0 to 7.

Defaults Unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol lldp \(Configuration\)](#) — enables LLDP globally.

[debug lldp interface](#) — debugs LLDP.

[show lldp neighbors](#) — displays the LLDP neighbors.

[show running-config lldp](#) — displays the LLDP running configuration.

advertise med guest-voice-signaling

To advertise a separate limited voice service for a guest user when the guest voice control packets use a separate network policy than the voice data, configure the system.

Syntax `advertise med guest-voice-signaling {vlan-id layer2_priority DSCP_value} | {priority-tagged number}`

To return to the default, use the `no advertise med guest-voice-signaling {vlan-id layer2_priority DSCP_value} | {priority-tagged number}` command.

Parameters	<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
	<i>layer2_priority</i>	Enter the Layer 2 priority. The range is from 0 to 7.
	<i>DSCP_value</i>	Enter the DSCP value. The range is from 0 to 63.
	<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.
Defaults	unconfigured.	
Command Modes	CONFIGURATION (conf-lldp)	
Supported Modes	Full-Switch	
Command History	9.9(0.0)	Introduced on the FN IOM.
	Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	debug lldp interface — debugs LLDP.	
	show lldp neighbors — displays the LLDP neighbors.	
	show running-config lldp — displays the LLDP running configuration.	

advertise med location-identification

To advertise a location identifier, configure the system.

Syntax	<code>advertise med location-identification {coordinate-based value civic-based value ecs-elin value}</code>
	To return to the default, use the <code>no advertise med location-identification {coordinate-based value civic-based value ecs-elin value}</code> command.

Parameters	<i>coordinate-based value</i>	Enter the keywords <code>coordinate-based</code> then the coordinated based location in hexadecimal value of 16 bytes.
	<i>civic-based value</i>	Enter the keywords <code>civic-based</code> then the civic based location in hexadecimal format. The range is from 6 to 255 bytes.
	<i>ecs-elin value</i>	Enter the keywords <code>ecs-elin</code> then the Emergency Call Service (ecs) Emergency Location Identification Number (elin) numeric location string. The range is from 10 to 25 characters.
Defaults	unconfigured.	
Command Modes	CONFIGURATION (conf-lldp)	
Supported Modes	Full-Switch	
Command History	9.9(0.0)	Introduced on the FN IOM.

8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

- ECS — Emergency call service such as defined by TIA or the national emergency numbering association (NENA)
- ELIN — Emergency location identification number, a valid North America Numbering Plan format telephone number supplied for ECS purposes.

Related Commands

[debug lldp interface](#) — debugs LLDP.

[show lldp neighbors](#) — displays the LLDP neighbors.

[show running-config lldp](#) — displays the LLDP running configuration.

advertise med power-via-mdi

To advertise the Extended Power via MDI TLV, configure the system.

Syntax

```
advertise med power-via-mdi
```

To return to the default, use the `no advertise med power-via-mdi` command.

Defaults

unconfigured.

Command Modes

CONFIGURATION (conf-lldp)

Supported Modes

Full-Switch

Command History

9.9(0.0) Introduced on the FN IOM.

Version 8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Advertise the Extended Power via MDI on all ports that are connected to an 802.3af powered, LLDP-MED endpoint device.

Related Commands

[debug lldp interface](#) — debugs LLDP.

[show lldp neighbors](#) — displays the LLDP neighbors.

[show running-config lldp](#) — displays the LLDP running configuration.

advertise med softphone-voice

To advertise softphone to enable IP telephony on a computer so that the computer can be used as a phone, configure the system.

Syntax

```
advertise med softphone-voice {vlan-id} | {priority-tagged number}
```

To return to the default, use the `no advertise med softphone-voice {vlan-id} | {priority-tagged number}` command.

Parameters

vlan-id Enter the VLAN ID. The range is from 1 to 4094.

priority-tagged number Enter the keywords `priority-tagged` then the Layer 2 priority. The range is from 0 to 7.

Defaults unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [debug lldp interface](#) — debugs LLDP.
- [show lldp neighbors](#) — displays the LLDP neighbors.
- [show running-config lldp](#) — displays the LLDP running configuration.

advertise med streaming-video

To advertise streaming video services for broadcast or multicast-based video, configure the system. This command does not include video applications that rely on TCP buffering.

Syntax

```
advertise med streaming-video {vlan-id} | {priority-tagged number}
```

To return to the default, use the `no advertise med streaming-video {vlan-id} | {priority-tagged number}` command.

Parameters

vlan-id	Enter the VLAN ID. The range is from 1 to 4094.
priority-tagged number	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.

Defaults unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [debug lldp interface](#) — debugs LLDP.
- [show lldp neighbors](#) — displays the LLDP neighbors.
- [show running-config lldp](#) — displays the LLDP running configuration.

advertise med video-conferencing

To advertise dedicated video conferencing and other similar appliances that support real-time interactive video, configure the system.

Syntax `advertise med video-conferencing {vlan-id} | {priority-tagged number}`
To return to the default, use the `no advertise med video-conferencing {vlan-id} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.

Defaults unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [debug lldp interface](#) — debugs LLDP.
- [show lldp neighbors](#) — displays the LLDP neighbors.
- [show running-config lldp](#) — displays the LLDP running configuration.

advertise med voice-signaling

To advertise when voice control packets use a separate network policy than voice data, configure the system.

Syntax `advertise med voice-signaling {vlan-id} | {priority-tagged number}`
To return to the default, use the `no advertise med voice-signaling {vlan-id} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.

Defaults unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
-----------------	---------------------------

Version 8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [debug lldp interface](#) — debugs LLDP.
[show lldp neighbors](#) — displays the LLDP neighbors.
[show running-config lldp](#) — displays the LLDP running configuration.

advertise med voice

To advertise a dedicated IP telephony handset or other appliances supporting interactive voice services, configure the system.

Syntax `advertise med voice {vlan-id} | {priority-tagged number}`
To return to the default, use the `no advertise med voice {vlan-id} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.

Defaults unconfigured.

Command Modes CONFIGURATION (conf-lldp)

Supported Modes Full-Switch

Command History

9.9(0.0)	Introduced on the FN IOM.
Version 8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [debug lldp interface](#) — debugs LLDP.
[show lldp neighbors](#) — displays the LLDP neighbors.
[show running-config lldp](#) — displays the LLDP running configuration.

advertise med voice-signaling

To advertise when voice control packets use a separate network policy than voice data, configure the system.

Syntax `advertise med voice-signaling {vlan-id} | {priority-tagged number}`
To return to the default, use the `no advertise med voice-signaling {vlan-id} | {priority-tagged number}` command.

Parameters

<i>vlan-id</i>	Enter the VLAN ID. The range is from 1 to 4094.
<i>priority-tagged number</i>	Enter the keywords <code>priority-tagged</code> then the Layer 2 priority. The range is from 0 to 7.

Defaults	unconfigured.
Command Modes	CONFIGURATION (conf-lldp)
Supported Modes	Full-Switch
Command History	9.9(0.0) Introduced on the FN IOM. Version 8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	debug lldp interface — debugs LLDP. show lldp neighbors — displays the LLDP neighbors. show running-config lldp — displays the LLDP running configuration.

Microsoft Network Load Balancing

Network Load Balancing (NLB) is a clustering functionality that is implemented by Microsoft on Windows 2000 Server and Windows Server 2003 operating systems. NLB uses a distributed methodology or pattern to equally split and balance the network traffic load across a set of servers that are part of the cluster or group. NLB combines the servers into a single multicast group and attempts to use the standard multicast IP or unicast IP addresses, and MAC addresses for the transmission of network traffic. At the same time, it also uses a single virtual IP address for all clients as the destination IP address, which enables servers to join the same multicast group in a way that is transparent to the clients (the clients do not notice the addition of new servers to the group). The clients use a cluster IP address to connect to the server. The NLB functionality enables flooding of traffic over the VLAN ports (for unicast mode) or a subset of ports in a VLAN (for multicast mode) to avoid overloading and effective performance of the servers for optimal processing of data packets. The maximum NLB entry limit from 8 to 11 is increased and support for more CAM-ACL to increase.

NLB functions in two modes, namely unicast mode and multicast mode. The cluster IP address and the associated cluster MAC address are configured in the NLB application running on the Windows Server. In the unicast mode, when the server IP address is attempted to be resolved to the MAC address using the ARP application, the switch determines whether the ARP reply, obtained from the server, is of an NLB type. The switch then maps the IP address (cluster IP) with the MAC address (cluster MAC address). In multicast mode, the cluster IP address is mapped to a cluster multicast MAC address that is configured using a static ARP CLI configuration command. After the NLB entry is learned, the traffic is forwarded to all the servers in the VLAN corresponding to the cluster virtual IP address.

NLB Unicast Mode Scenario

Consider a sample topology in which four servers, namely S1 through S4, are configured as a cluster or a farm. This set of servers is connected to a Layer 3 switch, which in turn is connected to the end-clients. The servers contain a single IP address (IP-cluster address of 172.16.2.20) and a single unicast MAC address (MAC-Cluster address of 00-bf-ac-10-00-01) for load-balancing. Because multiple ports of a switch cannot learn a single MAC address, the servers are assigned with MAC addresses of MAC-s1 to MAC-s4) respectively on S1 through S4 in addition to the MAC cluster address. All the servers of the cluster belong to the VLAN named VLAN1.

In unicast NLB mode, the following sequence of events occurs:

- The switch sends an ARP request to resolve the IP address to the cluster MAC address.
- The ARP servers send an ARP response with the MAC cluster address in the ARP header and a MAC address of MAC-s1/s2/s3/s4 (for servers S1 through S4) in the Ethernet header.
- The switch associates the IP address with the MAC cluster address with the last ARP response it obtains. Assume that in this case, the last ARP reply is obtained from MAC-s4.(assuming that the ARP response with MAC-s4 is received as the last one). The interface associated with server, S4, is added to the ARP table.
- With NLB feature enabled, after learning the NLB ARP entry, all the subsequent traffic is flooded on all ports in VLAN1.

With NLB, the data frame is forwarded to all the servers for them to perform load-balancing.

NLB Multicast Mode Scenario

Consider a sample topology in which four servers, namely S1 through S4, are configured as a cluster or a farm. This set of servers is connected to a Layer 3 switch, which in turn is connected to the end-clients. They contain a single multicast MAC address (MAC-Cluster: 03-00-5E-11-11-11).

In the multicast NLB mode, a static ARP configuration command is configured to associate the cluster IP address with a multicast cluster MAC address.

With multicast NLB mode, the data is forwarded to all the servers based on the port specified using the Layer 2 multicast command, which is the `mac-address-table static <multicast_mac> multicast vlan <vlan_id> output-range <port1>, <port2>` command in CONFIGURATION mode.

Limitations With Enabling NLB on Switches

The following limitations apply to switches on which you configure NLB:

- The NLB unicast mode uses switch flooding to transmit all packets to all the servers that are part of the VLAN. When a large volume of traffic is processed, the clustering performance might be impacted in a small way. This limitation is applicable to switches that perform unicast flooding in the software.
- The `ip vlan-flooding` command applies globally across the system and for all VLANs. In cases where the NLB is applicable and the ARP replies contain a discrepancy in the Ethernet SHA and ARP header SHA frames, a flooding of packets over the relevant VLAN occurs.
- The maximum number of concurrent clusters that is supported is 128.

Benefits and Working of Microsoft Clustering

Microsoft clustering allows multiple servers using Microsoft Windows to be represented by one MAC address and IP address in order to provide transparent failover or balancing. Dell Networking OS does not recognize server clusters by default; it must be configured to do so. When an ARP request is sent to a server cluster, either the active server or all the servers send a reply, depending on the cluster configuration. If the active server sends a reply, the Dell switch learns the active server's MAC address. If all servers reply, the switch registers only the last received ARP reply, and the switch learns one server's actual MAC address; the virtual MAC address is never learned. Because the virtual MAC address is never learned, traffic is forwarded to only one server rather than the entire cluster, and failover and balancing are not preserved.

To preserve failover and balancing, the switch forwards the traffic destined for the server cluster to all member ports in the VLAN connected to the cluster. To ensure that this happens, you must configure the `ip vlan-flooding` command on the Dell switch at the time that the Microsoft cluster is configured. The server MAC address is given in the Ethernet frame header of the ARP reply, while the virtual MAC address representing the cluster is given in the payload. Then, all the traffic destined for the cluster is flooded out of all member ports. Since all the servers in the cluster receive traffic, failover and balancing are preserved.

Enable and Disable VLAN Flooding

- The older ARP entries are overwritten whenever newer NLB entries are learned.
- All ARP entries, learned after the feature is enabled, are deleted when the feature is disabled, and RP2 triggers an ARP resolution. The feature is disabled with the `no ip vlan-flooding` command.
- When a port is added to the VLAN, the port automatically receives traffic if the feature is enabled. Old ARP entries are not deleted or updated.
- When a member port is deleted, its ARP entries are also deleted from the CAM.
- Port channels in the VLAN also receive traffic.
- There is no impact on the configuration from saving the configuration.
- The feature, if enabled, is displayed in the `show running-config` command output that displays the `ip vlan-flooding` CLI configuration. Apart from it, there is no indication of the enabling of this capability.

Topics:

- [mac-address-table static](#) (for Multicast MAC Address)
- [ip vlan-flooding](#)

mac-address-table static (for Multicast MAC Address)

For multicast mode of network load balancing (NLB), configure a static multicast MAC address, associate the multicast MAC address with the VLAN used to switch Layer 2 multicast traffic, and add output ports that will receive multicast streams on the VLAN. To delete a configured static multicast MAC address from the MAC address table on the router, enter the `no mac-address-table static multicast-mac-address` command.

Syntax

```
mac-address-table static multicast-mac-address multicast vlan vlan-id range-
output {single-interface | interface-list | interface-range}
```

To remove a MAC address, use the `no mac-address-table static multicast-mac-address output interface vlan vlan-id` command.

Parameters

<i>multicast-mac-address</i>	Enter the 48-bit hexadecimal address in nn:nn:nn:nn:nn:nn format.
<i>multicast</i>	Enter a vlan port to where L2 multicast MAC traffic is forwarded.
	NOTE: Use this option if you want multicast functionality in an L2 VLAN without IGMP protocols.
<i>output interface</i>	For a multicast MAC address, enter the keyword <code>output</code> then one of the following interfaces for which traffic is forwarded: <ul style="list-style-type: none"> • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
<i>output-range interface</i>	For a multicast MAC address, enter the keyword <code>output-range</code> then one of the following interfaces to indicate a range of ports for which traffic is forwarded: <ul style="list-style-type: none"> • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
<i>vlan vlan-id</i>	Enter the keyword <code>vlan</code> then a VLAN ID number from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Added support for multicast MAC address on the MXL platform.

Example (Multicast) `mac-address-table static 01:00:5E:01:00:01 {multicast vlan 2 output-range Te 0/2, Te 0/3}`

ip vlan-flooding

Enable unicast data traffic flooding on VLAN member ports.

Syntax `ip vlan-flooding`
To disable, use the `no ip vlan-flooding` command.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.3(0.0)	Introduced on the MXL Switch .

Default Disabled

Usage Information By default this command is disabled. There might be some ARP table entries which are resolved through ARP packets which had Ethernet MAC SA different from MAC information inside the ARP packet. This unicast data traffic flooding occurs only for those packets which use these ARP entries.

Multicast Source Discovery Protocol (MSDP)

Multicast source discovery protocol (MSDP) connects multiple PIM Sparse-Mode (PIM-SM) domains together.

MSDP peers connect using TCP port 639. Peers send keepalives every 60 seconds. A peer connection is reset after 75 seconds if no MSDP packets are received. MSDP connections are parallel with MBGP connections.

Topics:

- [clear ip msdp peer](#)
- [clear ip msdp sa-cache](#)
- [clear ip msdp statistic](#)
- [debug ip msdp](#)
- [ip msdp cache-rejected-sa](#)
- [ip msdp default-peer](#)
- [ip msdp log-adjacency-changes](#)
- [ip msdp mesh-group](#)
- [ip msdp originator-id](#)
- [ip msdp peer](#)
- [ip msdp redistribute](#)
- [ip msdp sa-filter](#)
- [ip msdp sa-limit](#)
- [ip msdp shutdown](#)
- [ip multicast-msdp](#)
- [show ip msdp](#)
- [show ip msdp sa-cache rejected-sa](#)

clear ip msdp peer

Reset the TCP connection to the peer and clear all the peer statistics.

Syntax `clear ip msdp peer {peer address}`

Parameters

peer address	Enter the peer address in a dotted decimal format (A.B.C.D.)
---------------------	--

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.3(0.0)	Introduced on the MXL Switch .

clear ip msdp sa-cache

Clears the entire source-active cache, the source-active entries of a particular multicast group, rejected, or local source-active entries.

Syntax `clear ip msdp sa-cache [group-address | rejected-sa | local]`

Parameters

group-address	Enter the group IP address in dotted decimal format (A.B.C.D.).
rejected-sa	Enter the keywords <code>rejected-sa</code> to clear the cache source-active entries that are rejected because the RPF check failed, an SA filter or limit is configured, the RP or MSDP peer is unreachable, or because of a format error.
local	Enter the keyword <code>local</code> to clear out local PIM advertised entries. It applies the redistribute filter (if present) while adding the local PIM SA entries to the SA cache.

Defaults Without any options, this command clears the entire source-active cache.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL Switch .

clear ip msdp statistic

Clears the entire source-active cache, the source-active entries of a particular multicast group, rejected, or local source-active entries.

Syntax `clear ip msdp sa-cache [group-address | rejected-sa | local]`

Parameters

group-address	Enter the group IP address in dotted decimal format (A.B.C.D.).
rejected-sa	Enter the keyword <code>rejected-sa</code> to clear the cache source-active entries that are rejected because the RPF check failed, an SA filter or limit is configured, the RP or MSDP peer is unreachable, or because of a format error.
local	Enter the keyword <code>local</code> to clear out local PIM advertised entries. It applies the redistribute filter (if present) while adding the local PIM SA entries to the SA cache.

Defaults Without any options, this command clears the entire source-active cache.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ip msdp

Turn on MSDP debugging.

Syntax `debug ip msdp {event peer address | packet peer address | pim}`
 To turn debugging off, use the `no debug ip msdp {event peer address | packet peer address | pim}` command.

Parameters

- event peer address** Enter the keyword `event` then the peer address in a dotted decimal format (A.B.C.D.).
- packet peer address** Enter the keyword `packet` then the peer address in a dotted decimal format (A.B.C.D.).
- pim** Enter the keyword `pim` to debug advertisement from PIM.

Defaults Not configured.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip msdp cache-rejected-sa

Enable an MSDP cache for the rejected source-active entries.

Syntax `ip msdp cache-rejected-sa {number}`
 To clear the MSDP rejected source-active entries, use the `no ip msdp cache-rejected-sa {number}` command then the `ip msdp cache-rejected-sa {number}` command.

Parameters

- number** Enter the number of rejected SA entries to cache. The range is from 0 to 32766.

Defaults none

Command Modes CONFIGURATION

Version 9.2(0.0) Introduced on the MXL 10/40GbE Switch IO Module.

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
9.2(0.0)	Introduced on the MXL Switch .

Related Commands [show ip msdp sa-cache rejected-sa](#) — Displays the rejected SAs in the SA cache.

ip msdp default-peer

Define a default peer from which to accept all source-active (SA) messages.

Syntax `ip msdp default-peer peer address [list name]`
 To remove the default peer, use the `no ip msdp default-peer {peer address} list name` command.

Parameters

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.)
<i>list name</i>	Enter the keywords <code>list name</code> and specify a standard access list that contains the RP address that should be treated as the default peer. If no access list is specified, then all SAs from the peer are accepted.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If a list is not specified, all SA messages received from the default peer are accepted. You can enter multiple `default peer` commands.

ip msdp log-adjacency-changes

Enable logging of MSDP adjacency changes.

Syntax `ip msdp log-adjacency-changes`
 To disable logging, use the `no ip msdp log-adjacency-changes` command.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip msdp mesh-group

To be a member of a mesh group, configure a peer.

Syntax `ip msdp mesh-group {name} {peer address}`
 To remove the peer from a mesh group, use the `no ip msdp mesh-group {name} {peer address}` command.

Parameters

<i>name</i>	Enter a string of up to 16 characters long for as the mesh group name.
<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.).

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information An MSDP mesh group is a mechanism for reducing SA flooding, typically in an intra-domain setting. When some subset of a domain's MSDP speakers are fully meshed, they can be configured into a mesh-group. If member X of a mesh-group receives a SA message from an MSDP peer that is also a member of the mesh-group, member X accepts the SA message and forwards it to all of its peers that are not part of the mesh-group. However, member X cannot forward the SA message to other members of the mesh-group.

ip msdp originator-id

Configure the MSDP Originator ID.

Syntax `ip msdp originator-id {interface}`
 To remove the originator-id, use the `no ip msdp originator-id {interface}` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383. For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
-------------------------	--

Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip msdp peer

Configure an MSDP peer.

Syntax `ip msdp peer peer address [connect-source] [description] [sa-limit number]`
 To remove the MSDP peer, use the `no ip msdp peer peer address [connect-source interface] [description name] [sa-limit number]` command.

Parameters

<i>peer address</i>	Enter the peer address in a dotted decimal format (A.B.C.D.).
<i>connect-source interface</i>	Enter the keywords <code>connect-source</code> then one of the interfaces and slot/port or number information: <ul style="list-style-type: none"> For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383. For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
<i>description name</i>	(OPTIONAL) Enter the keyword <code>description</code> then a description name (maximum 80 characters) to designate a description for the MSDP peer.
<i>sa-limit number</i>	(OPTIONAL) Enter the maximum number of SA entries in SA-cache. The range is from 1 to 500000. The default is 500000 .

Defaults As described in the *Parameters* section.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `connect-source` option is used to supply a source IP address for the TCP connection. When an interface is specified using the `connect-source` option, the primary configured address on the interface is used.

If the total number of SA messages received from the peer is already larger than the limit when this command is applied, those SA messages continue to be accepted. To enforce the limit in such situation, use the `clear ip msdp peer` command to reset the peer.

Related Commands `ip msdp sa-limit` — configures the MSDP SA Limit.

`clear ip msdp peer` — clears the MSDP peer.

`show ip msdp` — displays the MSDP information.

ip msdp redistribute

Filter local PIM SA entries in the SA cache. SAs which the ACL denies time out and are not refreshed. Until they time out, they continue to reside in the MSDP SA cache.

Syntax `ip msdp redistribute [list acl-name]`

Parameters

list <i>acl-name</i>	Enter the name of an extended ACL that contains permitted SAs. If you do not use this option, all local entries are blocked.
-----------------------------	--

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Modifications to the ACL do not have an immediate effect on the sa-cache.

To apply the redistribute filter to entries already present in the SA cache, use the `clear ip msdp sa-cache local` command.

ip msdp sa-filter

Permit or deny MSDP source active (SA) messages based on multicast source and/or group from the specified peer.

Syntax `ip msdp sa-filter {in | out} peer-address list [access-list name]`
Remove this configuration using the `no ip msdp sa-filter {in | out} peer address list [access-list name]` command.

Parameters

in	Enter the keyword <code>in</code> to enable incoming SA filtering.
out	Enter the keyword <code>out</code> to enable outgoing SA filtering.
<i>peer-address</i>	Enter the peer address of the MSDP peer in a dotted decimal format (A.B.C.D.).

access-list name Enter the name of an extended ACL that contains permitted SAs. If you do not use this option, all local entries are blocked.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip msdp sa-limit

Configure the upper limit of source-active (SA) entries in SA-cache.

Syntax `ip msdp sa-limit number`
To return to the default, use the `no ip msdp sa-limit number` command.

Parameters ***number*** Enter the maximum number of SA entries in SA-cache. The range is from 0 to 40000.

Defaults **50000**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The system counts the SA messages originated by itself and those messages received from the MSDP peers. When the total SA messages reach this limit, the subsequent SA messages are dropped (even if they pass RPF checking and policy checking).
If the total number of SA messages is already larger than the limit when this command is applied, those SA messages that are already in the software continue to be accepted. To enforce the limit in such situation, use the `clear ip msdp sa-cache` command.

Related Commands `ip msdp peer` — configures the MSDP peer.
`clear ip msdp peer` — clears the MSDP peer.
`show ip msdp` — displays the MSDP information

ip msdp shutdown

Administratively shut down a configured MSDP peer.

Syntax	<code>ip msdp shutdown {peer address}</code>	
Parameters	peer address	Enter the peer address in a dotted decimal format (A.B.C.D.).
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Version
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip multicast-msdp

Enable MSDP.

Syntax	<code>ip multicast-msdp</code> To exit MSDP, use the <code>no ip multicast-msdp</code> command.	
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ip msdp

Display the MSDP peer status, SA cache, or peer summary.

Syntax	<code>show ip msdp {peer peer address sa-cache summary}</code>	
Parameters	peer peer address	Enter the keyword <code>peer</code> then the peer address in a dotted decimal format (A.B.C.D.).
	sa-cache	Enter the keywords <code>sa-cache</code> to display the Source-Active cache.
	summary	Enter the keyword <code>summary</code> to display an MSDP peer summary.
Defaults	Not configured.	

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch**Command History**

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip msdp peer 100.1.1.1

Peer Addr: 100.1.1.1
  Local Addr: 100.1.1.2(639) Connect Source: none
  State: Established Up/Down Time: 00:00:08
  Timers: KeepAlive 60 sec, Hold time 75 sec
  SourceActive packet count (in/out): 0/0
  SAs learned from this peer: 0
  SA Filtering:
  Input (S,G) filter: none
  Output (S,G) filter: none
Dell#
```

Example (Sa-cache)

```
Dell#show ip msdp sa-cache
MSDP Source-Active Cache - 1 entries
GroupAddr  SourceAddr      RPAAddr      LearnedFrom Expire UpTime
224.1.1.1  172.21.220.10  172.21.3.254  172.21.3.254 102  00:02:52
Dell#
```

Example (Summary)

```
Dell#show ip msdp summary
Peer Addr      Local Addr      State      Source      SA      Up/Down
Description
5.5.5.32      6.6.6.32      Established  Lo 32      20      00:07:17
Peer1
Dell#
```

show ip msdp sa-cache rejected-sa

Display the rejected SAs in the SA cache.

Syntax

```
show ip msdp sa-cache rejected-sa
```

Defaults

```
none
```

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch**Command History**

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#sh ip msdp sa-cache rejected-sa
MSDP Rejected SA Cache 200 rejected SAs received, cache-size 1000
UpTime   GroupAddr SourceAddr RPAAddr   LearnedFrom Reason
00:00:13 225.1.2.1 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.2 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.3 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.4 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.5 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.6 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.7 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.8 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.9 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.10 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.11 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.11 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.12 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.13 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.14 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.15 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.16 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.17 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.18 10.1.1.4   110.1.1.1 13.1.1.2 Rpf-Fail
00:00:13 225.1.2.19 10.1.1.3   110.1.1.1 13.1.1.2 Rpf-Fail
Dell#
```

Multiple Spanning Tree Protocol (MSTP)

Multiple spanning tree protocol (MSTP), as implemented by the Dell Networking Operating System (OS), conforms to IEEE 802.1s.

Topics:

- [debug spanning-tree mstp](#)
- [description](#)
- [disable](#)
- [disable](#)
- [forward-delay](#)
- [hello-time](#)
- [max-age](#)
- [max-hops](#)
- [msti](#)
- [name](#)
- [protocol spanning-tree mstp](#)
- [revision](#)
- [show config](#)
- [show spanning-tree mst configuration](#)
- [show spanning-tree msti](#)
- [spanning-tree](#)
- [spanning-tree msti](#)
- [spanning-tree mstp](#)
- [tc-flush-standard](#)

debug spanning-tree mstp

Enable debugging of the multiple spanning tree protocol and view information on the protocol.

Syntax `debug spanning-tree mstp [all | bpdu interface {in | out} | events]`

Parameters

- | | |
|---|---|
| all | (OPTIONAL) Enter the keyword <code>all</code> to debug all spanning tree operations. |
| bpdu <i>interface</i> {in out} | (OPTIONAL) Enter the keyword <code>bpdu</code> to debug bridge protocol data units (BPDU).
(OPTIONAL) Enter the interface keyword along with the type slot/port of the interface you want displayed. Type slot/port options are the following: <ul style="list-style-type: none"> • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. |

Optionally, enter an `in` or `out` parameter with the optional interface:

- For Receive, enter the keyword `in`.
- For Transmit, enter the keyword `out`.

events (OPTIONAL) Enter the keyword `events` to debug MSTP events.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#debug spanning-tree mstp bpdu tengigabitethernet 0/16 ?
in Receive (in)
out Transmit (out)
Dell#
```

description

Enter a description of the multiple spanning tree.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters **description** Enter a description to identify the multiple spanning tree (maximum 80 characters).

Defaults none

Command Modes SPANNING TREE (The prompt is “config-mstp”.)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol spanning-tree mstp](#) — enters MULTIPLE SPANNING TREE mode on the switch.

disable

Globally disable the multiple spanning tree protocol on the switch.

Syntax `disable`
To enable MSTP, enter the `no disable` command.

Defaults disabled.

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol spanning-tree mstp](#) — enters MULTIPLE SPANNING TREE mode.

disable

Enable bridge protocol data units (BPDU) filter globally to filter transmission of BPDU on port-fast enabled interfaces.

Syntax `edge-port bpdufilter default`
To disable global bpdud filter default, use the `no edge-port bpdufilter default` command.

Defaults disabled.

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on MXL 10/40GbE Switch IO Module

forward-delay

The amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.

Syntax `forward-delay seconds`
To return to the default setting, use the `no forward-delay` command.

Parameters

seconds	Enter the number of seconds the interface waits in the Blocking State and the Learning State before transiting to the Forwarding State. The range is from 4 to 30. The default is 15 seconds .
----------------	---

Defaults **15 seconds**

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [max-age](#) — changes the wait time before MSTP refreshes protocol configuration information.

[hello-time](#) — changes the time interval between bridge protocol data units (BPDUs).

hello-time

Set the time interval between generation of MSTB bridge protocol data units (BPDUs).

Syntax `hello-time seconds`

To return to the default value, use the `no hello-time` command.

Parameters

seconds Enter a number as the time interval between transmission of BPDUs. The range is from 1 to 10. The default is **2 seconds**.

Defaults **2 seconds**

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

[edge-port bpdupfilter default](#) — the amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.

[max-age](#) — changes the wait time before MSTP refreshes protocol configuration information.

max-age

To maintain configuration information before refreshing that information, set the time interval for the MSTB.

Syntax `max-age seconds`

To return to the default values, use the `no max-age` command.

Parameters

max-age Enter a number of seconds the system waits before refreshing configuration information. The range is from 6 to 40. The default is **20 seconds**.

Defaults **20 seconds**

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [edge-port bpdudfilter default](#) — the amount of time the interface waits in the Blocking State and the Learning State before transitioning to the Forwarding State.

[hello-time](#) — changes the time interval between BPDUs.

max-hops

Configure the maximum hop count.

Syntax `max-hops number`
To return to the default values, use the `no max-hops` command.

Parameters **range** Enter a number for the maximum hop count. The range is from 1 to 40. The default is **20**.

Defaults **20 hops**

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `max-hops` command is a configuration command that applies to both the IST and all MST instances in the MSTP region. The BPDUs sent out by the root switch set the remaining-hops parameter to the configured value of max-hops. When a switch receives the BPDU, it decrements the received value of the remaining hops and uses the resulting value as remaining-hops in the BPDUs. If the remaining-hops reach zero, the switch discards the BPDU and ages out any information that it holds for the port.

msti

Configure multiple spanning tree instance, bridge priority, and one or multiple VLANs mapped to the MST instance.

Syntax `msti instance {vlan range | bridge-priority priority}`
To disable mapping or bridge priority, use the `no msti instance {vlan range | bridge-priority priority}` command.

Parameters

msti <i>instance</i>	Enter the MSTP instance. The range is from zero (0) to 63.
vlan <i>range</i>	Enter the keyword <code>vlan</code> then the identifier range value. The range is from 1 to 4094.
bridge-priority <i>priority</i>	Enter the keywords <code>bridge-priority</code> then a value in increments of 4096 as the bridge priority. The range is from zero (0) to 61440. Valid priority values are: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, and 61440. All other values are rejected.

Defaults default bridge-priority is **32768**.

Command Modes INTERFACE

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, all VLANs are mapped to MST instance zero (0) unless you use the `vlan range` command to map it to a non-zero instance.
Although MSTP instance IDs range from 0 to 4094, only 64 active instances are supported on the switch.

name

The name you assign to the multiple spanning tree region.

Syntax `name region-name`
To remove the region name, use the `no name` command.

Parameters *region-name* Enter the MST region name. The range is 32 character limit.

Defaults no default name.

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information For two MSTP switches to be within the same MSTP region, the switches must share the same region name (including matching case).

Related Commands [msti](#) — maps the VLAN(s) to an MST instance.
[revision](#) — assigns the revision number to the MST configuration.

protocol spanning-tree mstp

To enable and configure the multiple spanning tree group, enter MULTIPLE SPANNING TREE mode.

Syntax `protocol spanning-tree mstp`
To disable the multiple spanning tree group, use the `no protocol spanning-tree mstp` command.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

MSTP is not enabled when you enter MULTIPLE SPANNING TREE mode. To enable MSTP globally on the switch, enter the `no disable` command while in MULTIPLE SPANNING TREE mode.

For more information about the multiple spanning tree protocol, refer to the *Dell Networking OS Configuration Guide*.

Example

```
Dell(conf)#protocol spanning-tree mstp
Dell(config-mstp)#no disable
```

Related Commands [disable](#) — disables multiple spanning tree.

revision

The revision number for the multiple spanning tree configuration.

Syntax

`revision range`

To return to the default values, use the `no revision` command.

Parameters

range

Enter the revision number for the MST configuration. The range is from 0 to 65535. The default is **0**.

Defaults

0

Command Modes

MULTIPLE SPANNING TREE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

For two MSTP switches to be within the same MST region, the switches must share the same revision number.

Related Commands

[msti](#) — maps the VLAN(s) to an MST instance.

[name](#) — assigns the region name to the MST region.

show config

View the current configuration for the mode. Only non-default values are shown.

Syntax

`show config`

Command Modes MULTIPLE SPANNING TREE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-mstp)#show config
!
protocol spanning-tree mstp
  no disable
  name CustomerSvc
  revision 2
  MSTI 10 VLAN 101-105
  max-hops 5
Dell (conf-mstp)#
```

show spanning-tree mst configuration

View the multiple spanning tree configuration.

Syntax show spanning-tree mst configuration

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Enable the multiple spanning tree protocol prior to using this command.

Example

```
Dell#show spanning-tree mst configuration
MST region name: CustomerSvc
Revision: 2
MSTI VID
  10 101-105
Dell#
```

show spanning-tree msti

View the multiple spanning tree instance.

Syntax show spanning-tree msti [*instance-number* [*brief*]] [*guard*]

Parameters

- instance-number*** (Optional) Enter the multiple spanning tree instance number. The range is from 0 to 63.
- brief*** (Optional) Enter the keyword `brief` to view a synopsis of the MST instance.

guard (Optional) Enter the keyword `guard` to display the type of guard enabled on an MSTP interface and the current port state.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Enable the multiple spanning tree protocol prior to using this command.

Example

```
Dell#show spanning-tree msti 0 brief
MSTI 0 VLANs mapped 1-4094
Executing IEEE compatible Spanning Tree Protocol
Root ID Priority 32768, Address 0001.e800.0204
Root Bridge hello time 2, max age 20, forward delay 15, max hops 20
Bridge ID Priority 32768, Address 0001.e800.0204
We are the root of MSTI 0 (CIST)
Configured hello time 2, max age 20, forward delay 15, max hops 20
Bpdu filter disabled globally
CIST regional root ID Priority 32768, Address 0001.e800.0204
CIST external path cost 0
```

Interface Name	PortID	Prio	Cost	Sts	Cost	Designated Bridge ID	PortID
Te 0/10	128.170	128	2000	FWD	0	32768 0001.e800.0204	128.170
Te 0/11	128.171	128	2000	FWD	0	32768 0001.e800.0204	128.171
Te 0/12	128.172	128	2000	FWD	0	32768 0001.e800.0204	128.172

```
Interface Bpdu
Name Role PortID Prio Cost Sts Cost Link-type Edge Filter
Boundary
```

Te 0/10	Desg	128.170	128	2000	FWD	0	P2P	No	No
Te 0/11	Desg	128.171	128	2000	FWD	0	P2P	No	No
Te 0/12	Desg	128.172	128	2000	FWD	0	P2P	No	No

```
Dell#
```

Example (EDS and LBK)

The bold line shows the loopback BPDU inconsistency (LBK_INC).

```
Dell#show spanning-tree msti 0 brief
MSTI 0 VLANs mapped 1-4094

Executing IEEE compatible Spanning Tree Protocol
Root ID Priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15, max hops 20
Bridge ID Priority 32768, Address 0001.e801.6aa8
We are the root of MSTI 0 (CIST)
Configured hello time 2, max age 20, forward delay 15, max hops 20
CIST regional root ID Priority 32768, Address 0001.e801.6aa8
CIST external path cost 0
```

Interface Name	PortID	Prio	Cost	Sts	Cost	Designated Bridge ID	PortID
Te 0/10	128.170	128	2000	FWD	0	32768 0001.e801.6aa8	128.170
Te 0/11	128.171	128	2000	FWD	0	32768 0001.e801.6aa8	128.171
Te 0/12	128.172	128	2000	FWD	0	32768 0001.e801.6aa8	128.172

```

-----
Gi 0/0 128.257 128 20000 EDS 0 32768 0001.e801.6aa8 128.257

Interface
Name Role PortID Prio Cost Sts Cost Link-type Edge Boundary
-----
Gi 0/0 ErrDis 128.257 128 20000 EDS 0 P2P No No

Dell#show spanning-tree msti 0
MSTI 0 VLANs mapped 1-4094

Root Identifier has priority 32768, Address 0001.e801.6aa8
Root Bridge hello time 2, max age 20, forward delay 15, max hops 20
Bridge Identifier has priority 32768, Address 0001.e801.6aa8
Configured hello time 2, max age 20, forward delay 15, max hops 20
We are the root of MSTI 0 (CIST)
Current root has priority 32768, Address 0001.e801.6aa8
CIST regional root ID Priority 32768, Address 0001.e801.6aa8
CIST external path cost 0
Number of topology changes 1, last change occurred 00:00:15 ago on Gi 0/0

Port 257 (GigabitEthernet 0/0) is LBK_INC Discarding
Port path cost 20000, Port priority 128, Port Identifier 128.257
Designated root has priority 32768, address 0001.e801.6aa8
Designated bridge has priority 32768, address 0001.e801.6aa8
Designated port id is 128.257, designated path cost 0
Number of transitions to forwarding state 1
BPDU (MRecords): sent 21, received 9
The port is not in the Edge port mode

```

Usage Information

The following describes the `show spanning-tree msti 5 guard` command shown in the following example.

Field	Description
Interface Name	MSTP interface.
Instance	MSTP instance.
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut).
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard).

Example (Guard)

```

Dell#show spanning-tree msti 0 guard
Executing IEEE compatible Spanning Tree Protocol
Bpdu filter disabled globally

Interface
Name Instance Sts Guard type Bpdu Filter
-----
Te 0/10 0 FWD None No
Te 0/11 0 FWD None No
Te 0/12 0 FWD None No

```

spanning-tree

Enable the multiple spanning tree protocol on the interface.

Syntax

```
spanning-tree
```

To disable the multiple spanning tree protocol on the interface, use the `no spanning-tree` command.

Parameters	spanning-tree	Enter the keywords <code>spanning-tree</code> to enable the MSTP on the interface.
Defaults	Enable.	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

spanning-tree msti

Configure multiple spanning tree instance cost and priority for an interface.

Syntax `spanning-tree msti instance {cost cost | priority priority}`

Parameters	msti instance	Enter the keyword <code>msti</code> and the MST instance number. The range is from zero (0) to 63.
	cost cost	(OPTIONAL) Enter the keyword <code>cost</code> then the port cost value. The range is from 1 to 200000. The defaults are: <ul style="list-style-type: none"> 10-Gigabit Ethernet interface = 2000 Port Channel interface with one 10 Gigabit Ethernet = 2000 Port Channel with two 10 Gigabit Ethernet = 1800 Port Channel with two 100 Mbps Ethernet = 180000
	priority priority	Enter keyword <code>priority</code> then a value in increments of 16 as the priority. The range is from 0 to 240. The default is 128 .

Defaults	<ul style="list-style-type: none"> cost = depends on the interface type priority = 128
----------	---

Command Modes INTERFACE

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

spanning-tree mstp

Configures a Layer 2 MSTP interface as an edge port with (optionally) a bridge protocol data unit (BPDU) guard, or enables the root guard or loop guard feature on the interface.

Syntax `spanning-tree mstp {edge-port [bpduguard [shutdown-on-violation]] | bpdufilter | rootguard}`

Parameters	edge-port	Enter the keywords <code>edge-port</code> to configure the interface as a multiple spanning tree edge port.
	bpduguard	(OPTIONAL) Enter the keyword <code>portfast</code> to enable Portfast to move the interface into forwarding mode immediately after the root fails. Enter the keyword <code>bpduguard</code> to disable the port when it receives a BPDU.
	bpdufilter	(OPTIONAL) Enter the keyword <code>edgeport</code> to enable edge port configuration to move the interface into forwarding mode immediately after the root fails. Enter the keyword <code>bpdufilter</code> to stop sending and receiving BPDUs on the port-fast enabled ports.
	shutdown-on-violation	(OPTIONAL) Enter the keywords <code>shutdown-on-violation</code> to hardware disable an interface when a BPDU is received and the port is disabled.
	rootguard	Enter the keyword <code>rootguard</code> to enable root guard on an MSTP port or port-channel interface.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

On an MSTP switch, a port configured as an edge port immediately transitions to the forwarding state. Only ports connected to end-hosts should be configured as an edge port. Consider an edge port similar to a port with `spanning-tree portfast` enabled.

Root guard and loop guard cannot be enabled at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message is displayed: `% Error: RootGuard is configured. Cannot configure LoopGuard.`

When used in an MSTP network, if root guard blocks a boundary port in the CIST, the port is also blocked in all other MST instances.

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an err-disabled blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a loop-inconsistent blocking state and no traffic is forwarded on the port.

tc-flush-standard

Enable the MAC address flushing after receiving every topology change notification.

Syntax `tc-flush-standard`
To disable, use the `no tc-flush-standard` command.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the system implements an optimized flush mechanism for MSTP. This mechanism helps in flushing the MAC addresses only when necessary (and less often) allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, this `knob` command can be turned on to enable flushing MAC addresses after receiving every topology change notification.

Multicast

The multicast commands are supported by Dell Networking Operating System (OS).

This chapter contains the following sections:

- [IPv4 Multicast Commands](#)
- [IPv6 Multicast Commands](#)

Topics:

- [IPv4 Multicast Commands](#)
- [clear ip mroute](#)
- [ip mroute](#)
- [ip multicast-limit](#)
- [ip multicast-routing](#)
- [mtrace](#)
- [show ip mroute](#)
- [show ip rpf](#)
- [IPv6 Multicast Commands](#)
- [debug ipv6 mld_host](#)
- [ip multicast-limit](#)

IPv4 Multicast Commands

The following section contains the IPv4 multicast commands.

clear ip mroute

Clear learned multicast routes on the multicast forwarding table. To clear the protocol-independent multicast (PIM) tree information base, use the `clear ip pim tib` command.

Syntax	<code>clear ip mroute {<i>group-address</i> [<i>source-address</i>] * snooping}</code>	
Parameters	<i>group-address</i>	Enter the multicast group address and source address (if desired), in dotted decimal format, to clear information on a specific group.
	[<i>source-address</i>]	
	*	Enter * to clear all multicast routes.
	snooping	Enter the keyword <code>snooping</code> to delete multicast snooping route table entries.
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch	

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2.(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip pim tib](#) — shows the PIM tree information base.

ip mroute

Assign a static mroute.

Syntax

```
ip mroute destination mask {ip-address | null 0| {{bgp| ospf} process-id | isis | rip | static} {ip-address | tag | null 0}} [distance]
```

To delete a specific static mroute, use the `ip mroute destination mask {ip-address | null 0| {{bgp| ospf} process-id | isis | rip | static} {ip-address | tag | null 0}} [distance]` command.

To delete all mroutes matching a certain mroute, use the `no ip mroute destination mask` command.

Parameters

destination	Enter the IP address in dotted decimal format of the destination device.
mask	Enter the mask in slash prefix formation (/x) or in dotted decimal format.
null 0	(OPTIONAL) Enter the keyword <code>null</code> then zero (0).
[protocol [process-id tag] ip-address]	(OPTIONAL) Enter one of the routing protocols: <ul style="list-style-type: none">• Enter the BGP as-number then the IP address in dotted decimal format of the reverse path forwarding (RPF) neighbor. The range is from 1 to 65535.• Enter the OSPF process identification number then the IP address in dotted decimal format of the RPF neighbor. the range is from 1 to 65535.• Enter the IS-IS alphanumeric tag string then the IP address in dotted decimal format of the RPF neighbor.• Enter the RIP IP address in dotted decimal format of the RPF neighbor.
static ip-address	(OPTIONAL) Enter the Static IP address in dotted decimal format of the RPF neighbor.
ip-address	(OPTIONAL) Enter the IP address in dotted decimal format of the RPF neighbor.
distance	(OPTIONAL) Enter a number as the distance metric assigned to the mroute. The range is from 0 to 255.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip mroute](#) — views the multicast routing table.

ip multicast-limit

To limit the number of multicast entries on the system, use this feature.

Syntax	<code>ip multicast-limit limit</code>	
Parameters	limit	Enter the desired maximum number of multicast entries on the system. The range is from 1 to 50000.
Defaults	15000 routes.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This feature allows you to limit the number of multicast entries on the system. This number is the total of all the multicast entries on all line cards in the system. On each line card, the multicast module only installs the maximum number of entries, depending on the configured CAM profile.

To store multicast routes, use the IN-L3-McastFib CAM partition. It is a separate hardware limit that exists per port-pipe. This hardware space limitation can supersede any software-configured limit. The opposite is also true, the CAM partition might not be exhausted at the time the system-wide route limit set by the `ip multicast-limit` command is reached.

ip multicast-routing

Enable IP multicast forwarding.

Syntax	<code>ip multicast-routing</code> To disable multicast forwarding, use the <code>no ip multicast-routing</code> command.	
Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	After you enable multicast, you can enable IGMP and PIM on an interface. In INTERFACE mode, enter the <code>ip pim sparse-mode</code> command to enable IGMP and PIM on the interface.	
Related Commands	ip pim sparse-mode — enables IGMP and PIM on an interface.	

mtrace

Trace a multicast route from the source to the receiver.

Syntax `mtrace [vrf vrf-name] {source-address/hostname} [destination-address/hostname] [group-address/hostname]`

Parameters

- vrf vrf-name** Enter the keyword `vrf` followed by the name of the VRF. If VRF name is not mentioned, the default VRF will be used. Mtrace is not supported for management VRF.
- source-address/hostname** Enter the source IP address in dotted decimal format (A.B.C.D). This is a unicast address of the beginning of the path to be traced.
- destination-address/hostname** Enter the destination (receiver) IP address in dotted decimal format (A.B.C.D). If omitted, the mtrace starts from the system at which the command is typed.
- group-address/hostnamae** Enter the multicast group address in dotted decimal format (A.B.C.D). If group address is not given then software shall invokes a weak mtrace. A weak mtrace is one that follows the RPF path to the source, regardless of whether any router along the path has multicast routing table state

Command Modes EXEC Privilege

Command History

Version	Description
---------	-------------

9.11.0.0	Re-introduced the mtrace command on the Dell EMC Networking OS.
7.5.1.0	Expanded to support originator.
7.4.1.0	Expanded to support the intermediate (transit) router.

Usage Information Mtrace is an IGMP based protocol that provides a multicast trace route facility and is implemented according to the IETF draft "A trace route facility for IP Multicast" (draft-fenner-traceroute-ipm-01.txt). Dell EMC Networking OS supports the Mtrace client and transit functionality.

As an Mtrace client, Dell EMC Networking OS transmits Mtrace queries, receives, parses, and prints out the details in the response packet received.

A transit or intermediate router, forwards mtrace requests to the RPF neighbor after appending its response block to the packet. In case it is the first hop router, it sends a response.

As an Mtrace transit or intermediate router, Dell EMC Networking OS returns the response to Mtrace queries. After receiving the Mtrace request, Dell EMC Networking OS computes the RPF neighbor for the source, fills in the request and the forwards the request to the RPF neighbor.

Example

```
R1>mtrace 103.103.103.3 1.1.1.1 226.0.0.3
Type Ctrl-C to abort.

Querying reverse path for source 103.103.103.3 to destination 1.1.1.1 via
group 226.0.0.3
From source (?) to destination (?)

-----
|Hop|      OIF IP      |Proto| Forwarding Code |Source Network/Mask|
-----
  0  1.1.1.1      -->   Destination
 -1  1.1.1.1      PIM   Reached RP/Core  103.103.103.0/24
 -2  101.101.101.102 PIM   -         103.103.103.0/24
```

```

-3  2.2.2.1      PIM      -      103.103.103.0/24
-4  103.103.103.3 -->      Source
-----

```

The `mtrace` command traverses the path of the response data block in the reverse direction of the multicast data traffic. The `mtrace` command traverses the reverse path to the source from the destination. As a result, the tabular output of the `mtrace` command displays the destination details in the first row, followed by the RPF router details along the path in the consequent rows, and finally the source details in the last row. The tabular output contains the following columns:

- Hop — a hop number(counted negatively to indicate reverse-path)
- OIF IP — outgoing interface address
- Proto — multicast routing protocol
- Forwarding code — error code as present in the response blocks
- Source Network/Mask — source mask

show ip mroute

View the multicast routing table.

Syntax `show ip mroute [static | group-address [source-address] | count | snooping [vlan vlan-id] [group-address [source-address]] | summary | vlt [group-address [source-address]] | count]`

Parameters

- static** (OPTIONAL) Enter the keyword `static` to view static multicast routes.
- group-address [source-address]** (OPTIONAL) Enter the multicast group-address to view only routes associated with that group.
Enter the source-address to view routes with that group-address and source-address.
- count** (OPTIONAL) Enter the keyword `count` to view the number of multicast routes and packets.
- snooping [vlan vlan-id] [group-address [source-address]]** Enter the keyword `snooping` to display information on the multicast routes PIM-SM snooping discovers.
Enter a VLAN ID to limit the information displayed to the multicast routes PIM-SM snooping discovers on a specified VLAN. The VLAN ID range is from 1 to 4094.
Enter a multicast group address and, optionally, a source multicast address in dotted decimal format (A.B.C.D) to limit the information displayed to the multicast routes PIM-SM snooping discovers for a specified multicast group and source.
- summary** (OPTIONAL) Enter the keyword `summary` to view a summary of all routes.
- vlt** (OPTIONAL) Enter the keyword `vlt` to view multicast routes with a spanned incoming interface. Enter a multicast group address in dotted decimal format (A.B.C.D) to limit the information displayed to the multicast routes for a specified multicast group and optionally a source multicast address in dotted decimal format (A.B.C.D) to limit the information displayed for a specified multicast source. Enter the keyword `count` to display the total number of multicast routes with the spanned IIF.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2.(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Static)

```
Dell#show ip mroute static
Mroute: 23.23.23.0/24, interface: Io 2
Protocol: static, distance: 0, route-map: none, last change: 00:00:23
```

Example (Snooping)

```
Dell#show ip mroute snooping
IPv4 Multicast Snooping Table
(*, 224.0.0.0), uptime 17:46:23
  Incoming vlan: Vlan 2
  Outgoing interface list:
    TenGigabitEthernet 4/13
(*, 225.1.2.1), uptime 00:04:16
  Incoming vlan: Vlan 2
  Outgoing interface list:
    TenGigabitEthernet 0/4
    TenGigabitEthernet 1/5
(165.87.1.7, 225.1.2.1), uptime 00:03:17
  Incoming vlan: Vlan 2
  Outgoing interface list:
    TenGigabitEthernet 0/3
    TenGigabitEthernet 0/4
    TenGigabitEthernet 0/5
```

Example

```
Dell#show ip mroute
IP Multicast Routing Table
(*, 224.10.10.1), uptime 00:05:12
  Incoming interface: TenGigabitEthernet 0/2
  Outgoing interface list:
    TenGigabitEthernet 0/13
(1.13.1.100, 224.10.10.1), uptime 00:04:03
  Incoming interface: TenGigabitEthernet 1/4
  Outgoing interface list:
    TenGigabitEthernet 0/6
    TenGigabitEthernet 0/7
(*, 224.20.20.1), uptime 00:05:12
  Incoming interface: TenGigabitEthernet 1/2
  Outgoing interface list:
    TenGigabitEthernet 1/4
```

Usage Information

The following describes the `show ip mroute` command shown in the following example.

Field	Description
(S, G)	Displays the forwarding entry in the multicast route table.

Field	Description
uptime	Displays the amount of time the entry has been in the multicast forwarding table.
Incoming interface	Displays the reverse path forwarding (RPF) information towards the source for (S,G) entries and the RP for (*,G) entries.
Outgoing interface list:	Lists the interfaces that meet one of the following: <ul style="list-style-type: none"> · a directly connected member of the Group · statically configured member of the Group · received a (*,G) or (S,G) Join message

Example

```
Dell#show ip mroute
IP Multicast Routing Table
(*, 224.10.10.1), uptime 00:05:12
  Incoming interface: TenGigabitEthernet 1/2
  Outgoing interface list:
    TenGigabitEthernet 3/13
(1.13.1.100, 224.10.10.1), uptime 00:04:03
  Incoming interface: TenGigabitEthernet 1/4
  Outgoing interface list:
    TenGigabitEthernet 0/2
    TenGigabitEthernet 0/3
(*, 224.20.20.1), uptime 00:05:12
  Incoming interface: TenGigabitEthernet 1/2
  Outgoing interface list:
    TenGigabitEthernet 1/4
```

show ip rpf

View reverse path forwarding.

Syntax show ip rpf

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2.(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Network administrators use static mroutes to control the reach-ability of the multicast sources. If a PIM-registered multicast source is reachable using static mroute as well as unicast route, the distance of each route is examined and the route with shorter distance is the one the PIM selects for reach-ability.

NOTE: The default distance of mroutes is zero (0) and is CLI configurable on a per route basis.

Example

```
Dell#show ip rpf
RPF information for 10.10.10.9
RPF interface: Te 0/4
RPF neighbor: 165.87.31.4
RPF route/mask: 10.10.10.9/255.255.255.255
RPF type: unicast
```

IPv6 Multicast Commands

The following section contains the IPv6 multicast commands.

debug ipv6 mld_host

Enable the collection of debug information for MLD host transactions.

Syntax

```
[no] debug ipv6 mld_host [int-count | interface type] [slot/port-range]
```

To discontinue collection of debug information for the MLD host transactions, use the `no debug ipv6 mld_host` command.

Parameters

int-count

Enter the keyword `count` to indicate the number of required debug messages.

interface type

Enter the following keywords and slot/port information:

- For a 10G Ethernet interface, enter the keyword `tengigabitethernet` then the slot/port information.
- For a management interface, enter the keyword `managementinterface` then the slot/port information.
- For a port-channel interface, enter the keywords `port-channel` then the slot/port information.
- For a VLAN interface, enter the keyword `vlan` then the slot/port information.

Default

Disabled

Command Modes

EXEC

Supported Modes

Full-Switch

Command History

Version

Description

9.9(0.0)

Introduced on the FN IOM.

9.2.(0.0)

Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To debug the MLD protocol for all ports or for specified ports, use the `debug ipv6 mld_host` command. Displayed information includes when a query is received, when a report is sent, when a mcast joins or leaves a group, and some reasons why an MLD query is rejected.

ip multicast-limit

To limit the number of multicast entries on the system, use this feature.

Syntax `ip multicast-limit limit`

Parameters *limit* Enter the desired maximum number of multicast entries on the system. The range is from 1 to 50000.

Defaults **15000** routes.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This feature allows you to limit the number of multicast entries on the system. This number is the total of all the multicast entries on all line cards in the system. On each line card, the multicast module only installs the maximum number of entries, depending on the configured CAM profile.

To store multicast routes, use the IN-L3-McastFib CAM partition. It is a separate hardware limit that exists per port-pipe. This hardware space limitation can supersede any software-configured limit. The opposite is also true, the CAM partition might not be exhausted at the time the system-wide route limit set by the `ip multicast-limit` command is reached.

Neighbor Discovery Protocol (NDP)

The Dell Networking Operating System (OS) supports the network discovery protocol for IPv6.

The neighbor discovery protocol for IPv6 is defined in RFC 2461 as part of the Stateless Address Autoconfiguration protocol. It replaces the Address Resolution Protocol used with IPv4. NDP defines mechanisms for solving the following problems:

- Router discovery: Hosts can locate routers residing on a link
- Prefix discovery: Hosts can discover address prefixes for the link
- Parameter discovery
- Address autoconfiguration — configuration of addresses for an interface
- Address resolution — mapping from IP address to link-layer address
- Next-hop determination
- Neighbor unreachability detection (NUD): Determine that a neighbor is no longer reachable on the link.
- Duplicate address detection (DAD): Allow a node to check whether a proposed address is already in use.
- Redirect: The router can inform a node about a better first-hop.

NDP uses the following five ICMPv6 packet types in its implementation:

- Router Solicitation
- Router Advertisement
- Neighbor Solicitation
- Neighbor Advertisement
- Redirect

Topics:

- [clear ipv6 neighbors](#)
- [ipv6 neighbor](#)
- [show ipv6 neighbors](#)

clear ipv6 neighbors

Delete all entries in the IPv6 neighbor discovery cache or neighbors of a specific interface. Static entries are not removed using this command.

Syntax `clear ipv6 neighbors [ipv6-address] [interface]`

Parameters

ipv6-address Enter the IPv6 address of the neighbor in the x:x:x::x format to remove a specific IPv6 neighbor.

 **NOTE:** The :: notation specifies successive hexadecimal fields of zero.

interface interface To remove all neighbor entries learned on a specific interface, enter the keyword *interface* then the interface type and slot/port or number information of the interface:

- For a Fast Ethernet interface, enter the keyword `fastEthernet` then the slot/port information.
- For a Port Channel interface, enter the keywords `port-channel` then a number.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then the VLAN ID. The range is from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 neighbor

Configure a static entry in the IPv6 neighbor discovery.

Syntax

```
ipv6 neighbor {ipv6-address} {interface interface} {hardware_address}
```

To remove a static IPv6 entry from the IPv6 neighbor discovery, use the `no ipv6 neighbor {ipv6-address} {interface interface}` command.

Parameters

ipv6-address Enter the IPv6 address of the neighbor in the x:x:x:x format.

 **NOTE: The :: notation specifies successive hexadecimal fields of zero.**

interface interface Enter the keyword `interface` then the interface type and slot/port or number information:

- For a Fast Ethernet interface, enter the keyword `fastEthernet` then the slot/port information.
- For a Port Channel interface, enter the keywords `port-channel` then a number.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

hardware_address Enter a 48-bit hardware MAC address in nn:nn:nn:nn:nn:nn format.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

show ipv6 neighbors

Display IPv6 discovery information. Entering the command without options shows all the IPv6 neighbor addresses stored on the control processor (CP).

Syntax `show ipv6 neighbors [vrf vrf-name] [ipv6-address] interface interface]`

Parameters

vrf *vrf-name* (OPTIONAL) Enter the keyword *vrf* followed by the name of the VRF to display the neighbors corresponding to that VRF.

NOTE: If you do not specify this option, neighbors corresponding to the default VRF are displayed.

ipv6-address Enter the IPv6 address of the neighbor in the x:x:x::x format.

NOTE: The :: notation specifies successive hexadecimal fields of zero.

interface *interface* Enter the keyword *interface* then the interface type and slot/port or number information:

- For a Fast Ethernet interface, enter the keyword *fastEthernet* then the slot/port information.
- For a 10-Gigabit Ethernet interface, enter the keyword *TenGigabitEthernet* then the slot/port information.
- For a VLAN, enter the keyword *vlan* then the VLAN ID. The range is from 1 to 4094.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell# show ipv6 neighbors
IPv6 Address Expires (min) Hardware Address State Interface VLAN CPU
-----
100::1 0.03 00:00:00:00:00:22 DELAY Te 1/12 - CP
fe80::200:ff:fe00:22 232 00:00:00:00:00:22 STALE Te 1/12 - CP
500::1 0.60 00:01:e8:17:5c:af REACH Te 1/13 - CP
fe80::200:ff:fe00:17 232 00:00:00:00:00:29 REACH Te 1/14 - CP
900::1 0.60 00:01:e8:17:5c:b1 STALE Po 23 - CP
400::1 0.60 00:01:e8:17:5c:ae REACH Te 1/2 V1 100 CP
Dell#
```

NPIV Proxy Gateway

The N-port identifier virtualization (NPIV) Proxy Gateway (NPG) feature provides FCoE-FC bridging capability on the FN IOM with the FC Flex IO module switch, allowing server CNAs to communicate with SAN fabrics over the FN IOM with the FC Flex IO module.

To configure the FN I/OM with the FC Flex IO module to operate as an NPIV proxy gateway, use the following commands:

Topics:

- [dcb-map](#)
- [description \(for FCoE maps\)](#)
- [fabric-id vlan](#)
- [fcf-priority](#)
- [fc-map](#)
- [fcoe-map](#)
- [feature fc](#)
- [fka-adv-period](#)
- [keepalive](#)
- [show fcoe-map](#)
- [show fc sw](#)
- [show interfaces status](#)
- [show npiv devices](#)
- [show qos dcb-map](#)
- [show running-config fcoe-map](#)

dcb-map

Create a DCB map to configure priority flow control (PFC) and enhanced transmission selection (ETS) on Ethernet ports that support converged Ethernet traffic. Apply the DCB map to an Ethernet interface.

Syntax `dcb-map map-name`

Parameters `map-name` Enter a DCB map name. The maximum number of alphanumeric characters is 32.

Defaults None. .

Command Modes CONFIGURATION
INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

A DCB map is a template used to configure DCB parameters and apply them on converged Ethernet interfaces. DCB parameters include priority-based flow control (PFC) and enhanced traffic selection (ETS).

To display the PFC and ETS settings in DCB maps, enter the `show qos dcb-map` command.

Use the `dcb-map` command to create a DCB map to specify PFC and ETS settings and apply it on Ethernet ports. After you apply a DCB map to an interface, the PFC and ETS settings in the map are applied when the Ethernet port is enabled. DCBx is enabled on Ethernet ports by default.

The `dcb-map` command is supported only on physical Ethernet interfaces.

To remove a DCB map from an interface, enter the `no dcb-map map-name` command in Interface configuration mode.

Related Commands

`show qos dcb-map`— displays the dcb-map profiles configured on the system.

`dcb-map stack-unit all stack-ports all`— applies a DCB map on all ports of a switch stack.

description (for FCoE maps)

In an FCoE map, add a text description of the FCoE and FC parameters used to transmit storage traffic over an FN 2210S Aggregator and M I/O Aggregator NPIV proxy gateway in a converged fabric.

Syntax `description text`

Parameters `text` Enter a maximum of 32 characters.

Defaults None

Command Modes FCOE MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

The text description is displayed in `show fcoe-map` command output.

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map`— displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fabric-id vlan

In an FCoE map, configure the association between the dedicated VLAN used to carry FCoE traffic between servers and a SAN, and the fabric where the desired storage arrays are installed.

Syntax `fabric-id fabric-num vlan vlan-id`

Parameters

fabric-id fabric-num	Enter a fabric ID number that is the same as the ID number of the dedicated VLAN used to carry FCoE storage traffic to the fabric specified in the FCoE map. You can enter a fabric ID in the range 2–4094.
vlan vlan-id	Enter the ID number of the dedicated VLAN used to carry FCoE storage traffic between servers and a SAN fabric and specified with the <code>vlan</code> command in the FCoE map.

Defaults None

Command Modes FCOE MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

In the `fabric-id vlan` command, the fabric and VLAN ID numbers must be the same.

In each FCoE map, the fabric ID, FC-MAP value, and FCoE VLAN parameters must be unique.

To remove a fabric-VLAN association from an FCoE map, enter the `no fabric-id vlan` command.

Create a VLAN and then specify the configured VLAN ID in the `fabric-id vlan` command. Otherwise, the following error message is displayed.

```
Dell(conf-fcoe-f)#fabric-id 10 vlan 10 % Error: Vlan 10 does not exist
```

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map`— displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fcf-priority

In an FCoE map, configure the priority used by a server CNA to select an upstream FCoE forwarder (FCF).

Syntax `fcf-priority priority`

Parameters

priority	Enter the priority assigned to the FN 2210S Aggregator NPIV proxy gateway, which appears to a downstream server CNA as an FCF. The range of FCF priority values is from 1 to 255.
-----------------	---

Defaults 128

Command Modes FCOE MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information The FCF priority you assign to an FN 2210S Aggregator is used by server CNAs to select an upstream FCF to use for a fabric login (FLOGI).

To remove a configured FCF priority from an FCoE map, enter the `no fcf-priority` command.

Related Commands [fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fc-map

In an FCoE map, configure the FCoE mapped address prefix (FC-MAP) value which is used to identify FCoE traffic transmitted on the FCoE VLAN for the specified fabric.

Syntax `fc-map fc-map-value`

Parameters

fc-map-value	Enter the unique MAC address prefix used by a SAN fabric. The range of FC-MAP values is from 0EFC00 to 0EFCFF.
---------------------	--

Defaults None

Command Modes FCoE MAP

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

The FC-MAP value you enter must match the FC-MAP value used by an FC switch or FCoE forwarder (FCF) in the fabric. An FCF switch accepts only FCoE traffic that uses the correct FC-MAP value.

The FC-MAP value is used to generate the fabric-provided MAC address (FP-MAC). The FPMA is used by servers to transmit FCoE traffic to the fabric. An FC-MAP can be associated with only one FCoE VLAN and vice versa.

In an FCoE map, the FC-MAP value, fabric ID, and FCoE VLAN parameters must be unique.

To remove a configured FC-MAP value from an FCoE map, enter the `no fco-map` command.

Related Commands

[fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fcoe-map

Create an FCoE map which contains the parameters used to configure the links between server CNAs and a SAN fabric. Apply the FCoE map on a server-facing Ethernet port.

Syntax `fcoe-map map-name`

Parameters `map-name` Maximum: 32 alphanumeric characters.

Defaults On the FN2210S Aggregator with PMUX modules, the following parameters are applied on all the PMUX module interfaces:

- Description: SAN_FABRIC
- Fabric-id: 1002
- Fcoe-vlan: 1002
- Fc-map: 0x0efc00
- Fcf-priority: 128
- Fka-adv-period: 8000mSec
- Keepalive: enable
- Vlan priority: 3

Command Modes CONFIGURATION
INTERFACE

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator with the PMUX module.
9.3(0.0)	Introduced on the M I/O Aggregator with the PMUX module.

Usage Information

An FCoE map is a template used to map FCoE and FC parameters in a converged fabric. An FCoE map is used to virtualize upstream FC ports on an FN2210S Aggregator with the PMUX module NPIV proxy gateway so that they appear to downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network by providing FCoE-enabled servers and switches with the necessary parameters to log in to a SAN fabric.

On an FN2210S Aggregator a with the PMUX module NPIV proxy gateway, you cannot apply an FCoE map applied on fabric-facing FC ports and server-facing 10-Gigabit Ethernet ports.

An FCoE map consists of the following parameters: the dedicated FCoE VLAN used for storage traffic, the destination SAN fabric (FC-MAP value), FCF priority used by a server, and the FIP keepalive (FKA) advertisement timeout.

In each FCoE map, the fabric ID, FC-MAP value, and FCoE VLAN parameters must be unique. Use one FCoE map to access one SAN fabric. You cannot use the same FCoE map to access different fabrics.

To remove an FCoE map from an Ethernet interface, enter the `no fcoe-map map-name` command in Interface configuration mode.

Related Commands [show fcoe-map](#)— displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

feature fc

Enables the Fibre channel communication via the NPG functionality.

Syntax `feature fc`

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Default Enabled

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information The command is supported only in FN2210S Aggregator.

fka-adv-period

In an FCoE map, configure the time interval used to transmit FIP keepalive (FKA) advertisements.

Syntax `fka-adv-period seconds`

Parameters ***seconds*** Enter the time period (in seconds) used to send FIP keepalive messages to peer devices. The range is from 8 to 90 seconds.

Defaults 8 seconds

Command Modes FCoE MAP

Supported Modes All Modes

Command History

Version	Description
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information To delete the FIP keepalive time period from an FCoE map, enter the `no fka-adv-period` command.

Related Commands [fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

keepalive

In an FCoE map, enable the monitoring of FIP keepalive messages (if it is disabled).

Syntax `keepalive`

Parameters None

Defaults FIP keepalive monitoring is enabled on Ethernet and Fibre Channel interfaces.

Command Modes FCoE MAP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information FIP keepalive (FKA) messaging is used to detect if other FCoE devices are reachable.

To remove FIP keepalive monitoring from an FCoE map, enter the `no keepalive` command.

Related Commands `fcoe-map`— creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map`— displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

show fcoe-map

Displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

Syntax `show fcoe-map [brief | map-name]`

Parameters

<code>brief</code>	Displays an overview of currently configured FCoE maps.
<code>map-name</code>	Displays the FC and FCoE configuration parameters in a specified FCoE map. The FCoE map is applied on Ethernet (FCoE) and FC ports to transmit FC storage traffic to a specified fabric.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information Use the `show fcoe-map` command to display the FC and FCoE parameters used to configure server-facing Ethernet (FCoE) and fabric-facing FC ports in all FCoE maps on an FN 2210S Aggregator with the FC Flex IO module NPIV proxy gateway.

In each FCoE map, the values for the fabric ID and FC-MAP that identify the SAN fabric to which FC storage traffic is sent, and the FCoE VLAN to be used must be unique.

The following describes the `show fcoe-map brief` output shown in the example.

Field	Description
Fabric-Name	Name of a SAN fabric.
Fabric ID	The ID number of the SAN fabric to which FC traffic is forwarded.
VLAN ID	The dedicated FCoE VLAN used to transport FCoE storage traffic between servers and a fabric over the NPIV proxy gateway. The configured VLAN ID must be the same as the fabric ID.

Field	Description
FC-MAP	FCoE MAC address-prefix value - The unique 24-bit MAC address prefix that identifies a fabric.
FCF Priority	The priority used by a server to select an upstream FCoE forwarder.
Config-State	Indicates whether the configured FCoE and FC parameters in the FCoE map are valid: Active (all mandatory FCoE and FC parameters are correctly configured) or Incomplete (either the FC-MAP value, fabric ID, or VLAN ID are not correctly configured).
Oper-State	Operational status of link to the fabric: Up (link is up and transmitting FC traffic), Down (link is down and not transmitting FC traffic), Link-wait (link is up and waiting for FLOGI to complete on peer FC port), or Removed (port has been shut down).

The following describes the `show fcoe-map map-name` output shown in the example.

Field	Description
Fabric-Name	Name of a SAN fabric.
Fabric ID	The ID number of the SAN fabric to which FC traffic is forwarded.
VLAN ID	The dedicated FCoE VLAN used to transport FCoE storage traffic between servers and a fabric over the NPIV proxy gateway. The configured VLAN ID must be the same as the fabric ID.
VLAN priority	FCoE traffic uses VLAN priority 3. (This setting is not user-configurable.)
FC-MAP	FCoE MAC address-prefix value - The unique 24-bit MAC address prefix that identifies a fabric.
FKA-ADV-period	Time interval (in seconds) used to transmit FIP keepalive advertisements.
FCF Priority	The priority used by a server to select an upstream FCoE forwarder.
Config-State	Indicates whether the configured FCoE and FC parameters in the FCoE map are valid: Active (all mandatory FCoE and FC parameters are correctly configured) or Incomplete (either the FC-MAP value, fabric ID, or VLAN ID are not correctly configured).
Oper-State	Operational status of link to the fabric: Up (link is up and transmitting FC traffic), Down (link is down and not transmitting FC traffic), Link-wait (link is up and waiting for FLOGI to complete on peer FC port), or Removed (port has been shut down).
Members	FN2210S Aggregator with the FC Flex IO module Ethernet and FC ports that are members of the dedicated FCoE VLAN that carries storage traffic to the specified fabric.

Example

```
Dell#show fcoe-map brief
Fabric-Name Fabric-Id Vlan-Id FC-MAP FCF-Priority Config-State Oper-State
test        16          16      0efc02 128          ACTIVE      UP
cnatest     1003        1003    0efc03 128          ACTIVE      UP
sitest      1004        1004    0efc04 128          ACTIVE      DOWN
```

```
Dell#show fcoe-map si
Fabric Name      si
Fabric Id       1004
Vlan Id         1004
Vlan priority    3
FC-MAP          0efc04
FKA-ADV-Period  8
Fcf Priority     128
Config-State    ACTIVE
```

```
Oper-State      DOWN
Members
```

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

show fc sw

Display the switch configuration for Fibre Channel capability.

Syntax `show fc sw`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Example

```
Dell(conf)#do show fc sw
Switch Mode : NPG
Switch WWN  : 10:00:00:1e:c9:f1:00:d7
```

show interfaces status

Displays a summary of interface information or specify a stack unit and interface to display status information for that specific interface only.

Syntax `show interfaces [interface | stack-unit unit-number] status`

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` followed by the slot/port information.

linecard slot-number (OPTIONAL) Enter the keyword `linecard` then the slot number.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show interface status
Port      Description      Status  Speed      Duplex  Vlan
Te 0/1    Te 0/1           Up      10000 Mbit Full  1-4094
Te 0/2    Te 0/2           Up      10000 Mbit Full  1-4094
Te 0/3    Te 0/3           Up      10000 Mbit Full  1-4094
Te 0/4    Te 0/4           Up      10000 Mbit Full  1-4094
Te 0/5    Te 0/5           Up      10000 Mbit Full  --
Te 0/6    Te 0/6           Up      10000 Mbit Full  1-4094
Te 0/7    Te 0/7           Up      10000 Mbit Full  --
Te 0/8    Te 0/8           Up      10000 Mbit Full  --
Te 0/9    Te 0/9           Up      10000 Mbit Full  --
Te 0/10   Te 0/10          Up      10000 Mbit Full  --
Te 0/11   Te 0/11          Up      10000 Mbit Full  --
Te 0/12   Te 0/12          Up      10000 Mbit Full  --
Dell#
```

show npiv devices

Displays the FCoE and FC devices currently logged into an FN I/O Aggregator Switch with the FC Flex IO module NPIV proxy gateway.

Syntax `show npiv devices [brief]`

Parameters

brief	Displays an overview of current server CNA-fabric connections over an FN I/O Aggregator with the FC Flex IO module NPIV proxy gateway.
--------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information Use the `show npiv devices` command to display information on the server CNA, server-facing Ethernet and fabric-facing FC ports, and the SAN fabric in each server-fabric connection over an FN I/O Aggregator with the FC Flex IO module NPIV proxy gateway.

The following describes the `show npiv devices brief` output shown in the example.

Field	Description
ENode-Intf	FN I/O Aggregator with the FC Flex IO module Ethernet interface (<i>slot/port</i>) to which a server CNA is connected.
ENode-WWPN	Worldwide port name (WWPN) of a server CNA port.
FCoE-Vlan	VLAN ID of the dedicated VLAN used to transmit FCoE traffic to and from the fabric.
Fabric-Intf	Fabric-facing Fibre Channel port (<i>slot/port</i>) on which FC traffic is transmitted to the specified fabric.
Fabric-Map	Name of the FCoE map containing the FCoE/FC configuration parameters for the server CNA-fabric connection.
LoginMethod	Method used by the server CNA to log in to the fabric; for example: FLOGI - ENode logged in using a fabric login (FLOGI). FDISC - ENode logged in using a fabric discovery (FDISC).
Status	Operational status of the link between a server CNA port and a SAN fabric: Logged In - Server has logged in to the fabric and is able to transmit FCoE traffic.

Example

```
Dell# show npiv devices brief
Total NPIV Devices = 2
-----
ENode-Intf ENode-WWPN FCoE-Vlan abric-Intf Fabric-Map LginMethod Status
-----
Te 0/12 20:01:00:10:18:f1:94:20 1003 Fc 0/5 fid_1003 FLOG LOGGED_IN
Te 0/13 10:00:00:00:c9:d9:9c:cb 1003 Fc 0/0 fid_1003 FDISC LOGGED_IN
```

Usage Information

The following describes the `show npiv devices` output shown in the example.

Field	Description
ENode [number]	A server CNA that has successfully logged in to a fabric over an FN I/O Aggregator with the FC Flex IO module Ethernet port in ENode mode.
Enode MAC	MAC address of a server CNA port.
Enode Intf	Port number of a server-facing Ethernet port operating in ENode mode.
FCF MAC	Fibre Channel forwarder MAC: MAC address of FN I/O Aggregator Switch with the FC Flex IO module FCF interface.
Fabric Intf	Fabric-facing Fibre Channel port (<i>slot/port</i>) on which FCoE traffic is transmitted to the specified fabric.
FCoE VLAN	ID of the dedicated VLAN used to transmit FCoE traffic from a server CNA to a fabric and configured on both the server-facing FN I/O Aggregator with the FC Flex IO module port and server CNA port.
Fabric Map	Name of the FCoE map containing the FCoE/FC configuration parameters for the server CNA-fabric connection.
Enode WWPN	Worldwide port name of the server CNA port.
Enode WWNN	Worldwide node name of the server CNA.
FCoE MAC	Fabric-provided MAC address (FPMA). The FPMA consists of the FC-MAP value in the FCoE map and the FC-ID provided by the fabric after a successful FLOGI. In the FPMA, the most significant bytes are the FC-MAP; the least significant bytes are the FC-ID.

Field	Description
FC-ID	FC port ID provided by the fabric.
LoginMethod	Method used by the server CNA to log in to the fabric; for example, FLOGI or FDISC.
Secs	Number of seconds that the fabric connection is up.
State	Status of the fabric connection: logged in.

Example

```

ENode[0]:
ENode MAC      : 00:10:18:f1:94:21
ENode Intf     : Te 0/12
FCF MAC       : 5c:f9:dd:ef:10:c8
Fabric Intf    : Fc 0/5
FCoE Vlan     : 1003
Fabric Map     : fid_1003
ENode WWPN    : 20:01:00:10:18:f1:94:20
ENode WWNN    : 20:00:00:10:18:f1:94:21
FCoE MAC      : 0e:fc:03:01:02:01
FC-ID         : 01:02:01
LoginMethod   : FLOGI
Secs          : 5593
Status        : LOGGED_IN

ENode[1]:
ENode MAC      : 00:10:18:f1:94:22
ENode Intf     : Te 0/13
FCF MAC       : 5c:f9:dd:ef:10:c9
Fabric Intf    : Fc 0/0
FCoE Vlan     : 1003
Fabric Map     : fid_1003
ENode WWPN    : 10:00:00:00:c9:d9:9c:cb
ENode WWNN    : 10:00:00:00:c9:d9:9c:cd
FCoE MAC      : 0e:fc:03:01:02:02
FC-ID         : 01:02:01
LoginMethod   : FDISC
Secs          : 5593
Status        : LOGGED_IN

```

Related Commands

[dcb-map](#) — creates a DCB map to configure DCB parameters on Ethernet ports that support converged Ethernet traffic.

[fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

show qos dcb-map

Display the DCB parameters configured in a specified DCB map.

Syntax `show qos dcb-map map-name`

Parameters

map-name Displays the PFC and ETS parameters configured in the specified map.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN I/O Aggregator.
9.6(0.0)	Supported on the M I/O Aggregator.

Usage Information

Use the `show qos dcb-map` command to display the enhanced transmission selection (ETS) and priority-based flow control (PFC) parameters used to configure server-facing Ethernet ports.

The following table describes the `show qos dcb-map` output shown in the example below.

Field	Description
State	Complete: All mandatory DCB parameters are correctly configured. In progress: The DCB map configuration is not complete. Some mandatory parameters are not configured.
PFC Mode	PFC configuration in DCB map: On (enabled) or Off.
PG	Priority group configured in the DCB map.
TSA	Transmission scheduling algorithm used by the priority group: Enhanced Transmission Selection (ETS).
BW	Percentage of bandwidth allocated to the priority group.
PFC	PFC setting for the priority group: On (enabled) or Off.
Priorities	802.1p priorities configured in the priority group.

Example

```
Dell# show qos dcb-map dcbmap2

State      :Complete
PfcMode:ON
-----
PG:0 TSA:ETS BW:50 PFC:OFF
Priorities:0 1 2 4 5 6 7

PG:1 TSA:ETS BW:50 PFC:ON
Priorities:3
```

show running-config fcoe-map

Displays the current fcoe-map configurations.

Syntax `show running-config fcoe-map`

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN2210S Aggregator.

Version	Description
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Example

```
Dell(conf)#do show running-config fcoe-map
!
fcoe-map map
  fc-map 0efc00
  fabric-id 100 vlan 100
```

Open Shortest Path First (OSPFv2 and OSPFv3)

The Switch supports open shortest path first version 2 (OSPFv2) for IPv4 and version 3 (OSPFv3) for IPv6. Up to 16 OSPF instances can be run simultaneously on the Switch.

OSPF is an Interior Gateway Protocol (IGP), which means that it distributes routing information between routers in a single Autonomous System (AS). OSPF is also a link-state protocol in which all routers contain forwarding tables derived from information about their links to their neighbors.

The fundamental mechanisms of OSPF (flooding, DR election, area support, SPF calculations, and so on) are the same for OSPFv2 and OSPFv3. OSPFv3 runs on a per-link basis instead of on a per-IP-subnet basis.

This chapter is divided into two sections. There is no overlap between the two sets of commands. You cannot use an OSPFv2 command in the IPv6 OSPFv3 mode.

- [OSPFv2 Commands](#)
- [OSPFv3 Commands](#)

Topics:

- [OSPFv2 Commands](#)
- [area default-cost](#)
- [area nssa](#)
- [area range](#)
- [area stub](#)
- [auto-cost](#)
- [clear ip ospf](#)
- [clear ip ospf statistics](#)
- [debug ip ospf](#)
- [default-information originate](#)
- [default-metric](#)
- [description](#)
- [distance](#)
- [distance ospf](#)
- [distribute-list in](#)
- [distribute-list out](#)
- [fast-convergence](#)
- [flood-2328](#)
- [graceful-restart grace-period](#)
- [graceful-restart helper-reject](#)
- [graceful-restart mode](#)
- [graceful-restart role](#)
- [ip ospf auth-change-wait-time](#)
- [ip ospf authentication-key](#)
- [ip ospf cost](#)

- ip ospf dead-interval
- ip ospf hello-interval
- ip ospf message-digest-key
- ip ospf mtu-ignore
- ip ospf network
- ip ospf priority
- ip ospf retransmit-interval
- ip ospf transmit-delay
- log-adjacency-changes
- maximum-paths
- mib-binding
- network area
- passive-interface
- redistribute
- redistribute bgp
- redistribute isis
- router-id
- router ospf
- show config
- show ip ospf
- show ip ospf asbr
- show ip ospf database
- show ip ospf database asbr-summary
- show ip ospf database external
- show ip ospf database network
- show ip ospf database nssa-external
- show ip ospf database opaque-area
- show ip ospf database opaque-as
- show ip ospf database opaque-link
- show ip ospf database router
- show ip ospf database summary
- show ip ospf interface
- show ip ospf neighbor
- show ip ospf routes
- show ip ospf statistics
- show ip ospf timers rate-limit
- show ip ospf topology
- summary-address
- timers spf
- timers throttle lsa all
- timers throttle lsa arrival
- OSPFv3 Commands
- area authentication
- area encryption
- area nssa
- auto-cost
- clear ipv6 ospf process

- debug ipv6 ospf
- debug ipv6 ospf bfd
- debug ipv6 ospf events
- debug ipv6 ospf packet
- debug ipv6 ospf spf
- default-information originate
- graceful-restart grace-period
- graceful-restart mode
- ipv6 ospf area
- ipv6 ospf authentication
- ipv6 ospf bfd all-neighbors
- ipv6 ospf cost
- ipv6 ospf dead-interval
- ipv6 ospf encryption
- ipv6 ospf graceful-restart helper-reject
- ipv6 ospf hello-interval
- ipv6 ospf priority
- ipv6 router ospf
- maximum-paths
- passive-interface
- redistribute
- router-id
- show crypto ipsec policy
- show crypto ipsec sa ipv6
- show ipv6 ospf database
- show ipv6 ospf interface
- show ipv6 ospf neighbor
- timers spf

OSPFv2 Commands

The Dell Networking implementation of OSPFv2 is based on IETF RFC 2328.

area default-cost

Set the metric for the summary default route the area border router (ABR) generates into the stub area. Use this command on the border routers at the edge of a stub area.

Syntax `area area-id default-cost cost`
 To return default values, use the `no area area-id default-cost` command.

Parameters

<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
<i>cost</i>	Specifies the stub area's advertised external route metric. The range is from zero (0) to 65535.

Defaults	<code>cost = 1</code> ; no areas are configured.	
Command Modes	ROUTER OSPF	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	In the Dell Networking operating software, <code>cost</code> is defined as reference bandwidth.	
Related Commands	<code>area stub</code> — creates a stub area.	

area nssa

Specify an area as a not so stubby area (NSSA).

Syntax	<code>area area-id nssa [default-information-originate] [no-redistribution] [no-summary]</code>	
	To delete an NSSA, use the <code>no area area-id nssa</code> command.	

Parameters	area-id	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
	no-redistribution	(OPTIONAL) Specify that the <code>redistribute</code> command does not distribute routes into the NSSA. Only use this command in an NSSA area border router (ABR).
	default-information-originate	(OPTIONAL) Allows external routing information to be imported into the NSSA by using Type 7 default.
	no-summary	(OPTIONAL) Specify that no summary LSAs should be sent into the NSSA.

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

area range

Summarize routes matching an address/mask at an area border router (ABR).

Syntax	<code>area area-id range ip-address mask [not-advertise]</code>	
	To disable route summarization, use the <code>no area area-id range ip-address mask</code> command.	

Parameters	<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
	<i>ip-address</i>	Specify an IP address in dotted decimal format.
	<i>mask</i>	Specify a mask for the destination prefix. Enter the full mask (for example, 255.255.255.0).
	<i>not-advertise</i>	(OPTIONAL) Enter the keywords <code>not-advertise</code> to set the status to DoNotAdvertise (that is, the Type 3 summary-LSA is suppressed and the component networks remain hidden from other areas.)

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Only the routes within an area are summarized, and that summary is advertised to other areas by the ABR. External routes are not summarized.

Related Commands

- `area stub` — creates a stub area.
- `router ospf` — enters ROUTER OSPF mode to configure an OSPF instance.

area stub

Configure a stub area, which is an area not connected to other areas.

Syntax `area area-id stub [no-summary]`
 To delete a stub area, use the `no area area-id stub` command.

Parameters	<i>area-id</i>	Specify the OSPF area in dotted decimal format (A.B.C.D.) or enter a number from zero (0) to 65535.
	<i>no-summary</i>	(OPTIONAL) Enter the keywords <code>no-summary</code> to prevent the ABR from sending summary Link State Advertisements (LSAs) into the stub area.

Defaults Disabled.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To configure all routers and access servers within a stub, use this command.

Related Commands `router ospf` — enters ROUTER OSPF mode to configure an OSPF instance.

auto-cost

Specify how the OSPF interface cost is calculated based on the reference bandwidth method.

Syntax `auto-cost [reference-bandwidth ref-bw]`
To return to the default bandwidth or to assign cost based on the interface type, use the `no auto-cost [reference-bandwidth]` command.

Parameters

<i>ref-bw</i>	(OPTIONAL) Specify a reference bandwidth in megabits per second. The range is from 1 to 4294967. The default is 100 megabits per second .
----------------------	--

Defaults **100 megabits per second.**

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip ospf

Clear all OSPF routing tables.

Syntax `clear ip ospf process-id [process]`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to clear a specific process. If no Process ID is entered, all OSPF processes are cleared.
<i>process</i>	(OPTIONAL) Enter the keyword <code>process</code> to reset the OSPF process.

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip ospf statistics

Clear the packet statistics in interfaces and neighbors.

Syntax `clear ip ospf process-id statistics [interface name {neighbor router-id}]`

Parameters	<i>process-id</i>	Enter the OSPF Process ID to clear a specific process. If no Process ID is entered, all OSPF processes are cleared.
	<i>interface name</i>	(OPTIONAL) Enter the keyword <code>interface</code> then one of the following interface keywords and slot/port or number information: <ul style="list-style-type: none">For Port Channel groups, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
	<i>neighbor router-id</i>	(OPTIONAL) Enter the keyword <code>neighbor</code> then the neighbor's router-id in dotted decimal format (A.B.C.D.).

Defaults none

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip ospf statistics](#) — displays the OSPF statistics.

debug ip ospf

Display debug information on OSPF. Entering the `debug ip ospf` commands enables OSPF debugging for the first OSPF process.

Syntax `debug ip ospf process-id [bfd | event | packet | spf | database-timer rate-limit]`

To cancel the debug command, use the `no debug ip ospf` command.

Parameters	<i>process-id</i>	Enter the OSPF Process ID to clear a specific process. If no Process ID is entered, all OSPF processes are cleared.
	<i>bfd</i>	(OPTIONAL) Enter the keyword <code>bfd</code> to debug only OSPF BFD information.
	<i>event</i>	(OPTIONAL) Enter the keyword <code>event</code> to debug only OSPF event information.
	<i>packet</i>	(OPTIONAL) Enter the keyword <code>packet</code> to debug only OSPF packet information.
	<i>spf</i>	(OPTIONAL) Enter the keyword <code>spf</code> to display the Shortest Path First information.

database-timer rate-limit (OPTIONAL) Enter the keywords `database-timer rate-limit` to display the LSA throttling timer information.

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `debug ip ospf` command shown in the Example below.

Field	Description
8:14	Displays the time stamp.
OSPF	Displays the OSPF process ID: instance ID.
v:	Displays the OSPF version. The system supports version 2 only.
t:	Displays the type of packet sent: <ul style="list-style-type: none">• 1 - Hello packet• 2 - database description• 3 - link state request• 4 - link state update• 5 - link state acknowledgement
l:	Displays the packet length.
rid:	Displays the OSPF router ID.
aid:	Displays the Autonomous System ID.
chk:	Displays the OSPF checksum.
aut:	States if OSPF authentication is configured. One of the following is listed: <ul style="list-style-type: none">• 0 - no authentication configured• 1 - simple authentication configured using the <code>ip ospf authentication-key</code> command• 2 - MD5 authentication configured using the <code>ip ospf message-digest-key</code> command
auk:	If the <code>ip ospf authentication-key</code> command is configured, this field displays the key used.
keyid:	If the <code>ip ospf message-digest-key</code> command is configured, this field displays the MD5 key
to:	Displays the interface to which the packet is intended.
dst:	Displays the destination IP address.
netmask:	Displays the destination IP address mask.
pri:	Displays the OSPF priority
N, MC, E, T	Displays information available in the Options field of the HELLO packet:

Field	Description
	<ul style="list-style-type: none"> · N + (N-bit is set) · N - (N-bit is not set) · MC+ (bit used by MOSPF is set and router is able to forward IP multicast packets) · MC- (bit used by MOSPF is not set and router cannot forward IP multicast packets) · E + (router is able to accept AS External LSAs) · E - (router cannot accept AS External LSAs) · T + (router can support TOS) · T - (router cannot support TOS)
hi:	Displays the amount of time configured for the HELLO interval.
di:	Displays the amount of time configured for the DEAD interval.
dr:	Displays the IP address of the designated router.
bdr:	Displays the IP address of the Border Area Router.

Example

```
Dell#debug ip ospf 1 packet
OSPF process 90, packet debugging is on

Dell#
08:14:24 : OSPF(100:00):
Xmt. v:2 t:1(HELLO) l:44 rid:192.1.1.1
aid:0.0.0.1 chk:0xa098 aut:0 auk: keyid:0 to:Gi 4/3 dst:224.0.0.5
netmask:255.255.255.0 pri:1 N-, MC-, E+, T-,
hi:10 di:40 dr:90.1.1.1 bdr:0.0.0.0
```

default-information originate

To generate a default external route into an OSPF routing domain, configure the system.

Syntax `default-information originate [always] [metric metric-value] [metric-type type-value] [route-map map-name]`

To return to the default values, use the `no default-information originate` command.

Parameters

always	(OPTIONAL) Enter the keyword <code>always</code> to specify that default route information must always be advertised.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number to configure a metric value for the route. The range is from 1 to 16777214.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keywords <code>metric-type</code> then an OSPF link state type of 1 or 2 for default routes. The values are: <ul style="list-style-type: none"> · 1 = Type 1 external route · 2 = Type 2 external route
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map.

Defaults Disabled.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [redistribute](#) — redistributes routes from other routing protocols into OSPF.

default-metric

Change the metrics of redistributed routes to a value useful to OSPF. Use this command with the `redistribute` command.

Syntax

`default-metric number`

To return to the default values, use the `no default-metric [number]` command.

Parameters

number Enter a number as the metric. The range is from 1 to 16777214.

Defaults Disabled.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [redistribute](#) — redistributes routes from other routing protocols into OSPF.

description

Add a description about the selected OSPF configuration.

Syntax

`description description`

To remove the OSPF description, use the `no description` command.

Parameters

description Enter a text string description to identify the OSPF configuration (80 characters maximum).

Defaults none

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `show ip ospf asbr` — displays the VLAN configuration.

distance

Define an administrative distance for particular routes to a specific IP address.

Syntax `distance weight [ip-address mask access-list-name]`
 To delete the settings, use the `no distance weight [ip-address mask access-list-name]` command.

Parameters

<i>weight</i>	Specify an administrative distance. The range is from 1 to 255. The default is 110 .
<i>ip-address</i>	(OPTIONAL) Enter a router ID in the dotted decimal format. If you enter a router ID, include the mask for that router address.
<i>mask</i>	(OPTIONAL) Enter a mask in dotted decimal format or /n format.
<i>access-list-name</i>	(OPTIONAL) Enter the name of an IP standard access list, up to 140 characters.

Defaults **110**

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

distance ospf

Configure an OSPF distance metric for different types of routes.

Syntax `distance ospf [external dist3] [inter-area dist2] [intra-area dist1]`
 To delete these settings, use the `no distance ospf` command.

Parameters

<i>external dist3</i>	(OPTIONAL) Enter the keyword <code>external</code> then a number to specify a distance for external type 5 and 7 routes. The range is from 1 to 255. The default is 110 .
<i>inter-area dist2</i>	(OPTIONAL) Enter the keywords <code>inter-area</code> then a number to specify a distance metric for routes between areas. The range is from 1 to 255. The default is 110 .
<i>intra-area dist1</i>	(OPTIONAL) Enter the keywords <code>intra-area</code> then a number to specify a distance metric for all routes within an area. The range is from 1 to 255. The default is 110 .

Defaults

- external *dist3* = **110**

- inter-area *dist2* = **110**
- intra-area *dist1* = **110**

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To specify a distance for routes learned from other routing domains, use the `redistribute` command.

distribute-list in

Apply a filter to incoming routing updates from OSPF to the routing table.

Syntax `distribute-list prefix-list-name in [interface]`
 To delete a filter, use the `no distribute-list prefix-list-name in [interface]` command.

Parameters

<i>prefix-list-name</i>	Enter the name of a configured prefix list.
<i>interface</i>	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> · For Port Channel groups, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. · For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. · For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

distribute-list out

To restrict certain routes destined for the local routing table after the SPF calculation, apply a filter.

Syntax `distribute-list prefix-list-name out [bgp | connected | isis | rip | static]`
 To remove a filter, use the `no distribute-list prefix-list-name out [bgp | connected | isis | rip | static]` command.

Parameters	<p><i>prefix-list-name</i> Enter the name of a configured prefix list.</p> <p>bgp (OPTIONAL) Enter the keyword <code>bgp</code> to specify that BGP routes are distributed.</p> <p>connected (OPTIONAL) Enter the keyword <code>connected</code> to specify that connected routes are distributed.</p> <p>isis (OPTIONAL) Enter the keyword <code>isis</code> to specify that IS-IS routes are distributed.</p> <p>rip (OPTIONAL) Enter the keyword <code>rip</code> to specify that RIP routes are distributed.</p> <p>static (OPTIONAL) Enter the keyword <code>static</code> to specify that only manually configured routes are distributed.</p>						
Defaults	Not configured.						
Command Modes	ROUTER OSPF						
Supported Modes	Full—Switch						
Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description heading</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description heading	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description heading						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	The <code>distribute-list out</code> command applies to routes autonomous system boundary routers (ASBRs) redistributes into OSPF. It can be applied to external type 2 and external type 1 routes, but not to intra-area and inter-area routes.						

fast-convergence

This command sets the minimum LSA origination and arrival times to zero (0), allowing more rapid route computation so that convergence takes less time.

Syntax `fast-convergence {number}`
 To cancel fast-convergence, use the `no fast convergence` command.

Parameters	<p><i>number</i> Enter the convergence level desired. The higher this parameter is set, the faster OSPF converge takes place. The range is from 1 to 4.</p>						
Defaults	none.						
Command Modes	ROUTER OSPF						
Supported Modes	Full—Switch						
Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	The higher this parameter is set, the faster OSPF converge takes place.						

NOTE: The faster the convergence, the more frequent the route calculations and updates. This behavior impacts CPU utilization and may impact adjacency stability in larger topologies.

Generally, convergence level 1 meets most convergence requirements. Higher convergence levels should only be selected following consultation with Dell Networking technical support.

flood-2328

Enable RFC-2328 flooding behavior.

Syntax `flood-2328`
To disable, use the `no flood-2328` command.

Defaults Disabled.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information In OSPF, flooding is the most resource-consuming task. The flooding algorithm, described in RFC-2328, requires that OSPF flood LSAs (Link State Advertisements) on all interfaces, as governed by LSA's flooding scope (see Section 13 of the RFC). When multiple direct links connect two routers, the RFC-2328 flooding algorithm generates significant redundant information across all links.

By default, the system implements an enhanced flooding procedure that dynamically and intelligently determines when to optimize flooding. Whenever possible, the OSPF task attempts to reduce flooding overhead by selectively flooding on a subset of the interfaces between two routers.

When you enable `flood-2328`, this command configures the system to flood LSAs on all interfaces.

graceful-restart grace-period

Specifies the time duration, in seconds, that the router's neighbors continue to advertise the router as fully adjacent regardless of the synchronization state during a graceful restart.

Syntax `graceful-restart grace-period seconds`
To disable the grace period, use the `no graceful-restart grace-period` command.

Parameters

seconds	Time duration, in seconds, that specifies the duration of the restart process before OSPF terminates the process. The range is from 40 to 1800 seconds.
----------------	---

Defaults Not Configured

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart helper-reject

Specify the OSPF router to not act as a helper during graceful restart.

Syntax

```
graceful-restart helper-reject ip-address
```

To return to default value, use the `no graceful-restart helper-reject` command.

Parameters

ip-address Enter the OSPF router-id, in IP address format, of the restart router that *will not* act as a helper during graceful restart.

Defaults

Not configured.

Command Modes

ROUTER OSPF

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart mode

Enable the graceful restart mode.

Syntax

```
graceful-restart mode [planned-only | unplanned-only]
```

To disable graceful restart mode, use the `no graceful-restart mode` command.

Parameters

planned-only (OPTIONAL) Enter the keywords `planned-only` to indicate graceful restart is supported in a planned restart condition only.

unplanned-only (OPTIONAL) Enter the keywords `unplanned-only` to indicate graceful restart is supported in an unplanned restart condition only.

Defaults

Support for both planned and unplanned failures.

Command Modes

ROUTER OSPF

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart role

Specify the role for your OSPF router during graceful restart.

Syntax `graceful-restart role [helper-only | restart-only]`
To disable graceful restart role, use the `no graceful-restart role` command.

Parameters

role helper-only	(OPTIONAL) Enter the keywords <code>helper-only</code> to specify the OSPF router is a helper only during graceful restart.
role restart-only	(OPTIONAL) Enter the keywords <code>restart-only</code> to specify the OSPF router is a restart only during graceful-restart.

Defaults By default, OSPF routers are both helper and restart routers during a graceful restart.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip ospf auth-change-wait-time

OSPF provides a grace period while OSPF changes its interface authentication type. During the grace period, OSPF sends out packets with new and old authentication scheme until the grace period expires.

Syntax `ip ospf auth-change-wait-time seconds`
To return to the default, use the `no ip ospf auth-change-wait-time` command.

Parameters

seconds	Enter the seconds. The range is from 0 to 300.
----------------	--

Defaults **zero (0) seconds.**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip ospf authentication-key

Enable authentication and set an authentication key on OSPF traffic on an interface.

Syntax `ip ospf authentication-key [encryption-type] key`
To delete an authentication key, use the `no ip ospf authentication-key` command.

Parameters

encryption-type	(OPTIONAL) Enter 7 to encrypt the key.
key	Enter an eight-character string. Strings longer than eight characters are truncated.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information All neighboring routers in the same network must use the same password to exchange OSPF information.

ip ospf cost

Change the cost associated with the OSPF traffic on an interface.

Syntax `ip ospf cost cost`
To return to default value, use the `no ip ospf cost` command.

Parameters

cost	Enter a number as the cost. The range is from 1 to 65535.
-------------	---

Defaults The default cost is based on the reference bandwidth.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If this command is not configured, cost is based on the `auto-cost` command.

When you configure OSPF over multiple vendors, to ensure that all routers use the same cost, use the `ip ospf cost` command. Otherwise, OSPF routes improperly.

Related Commands [auto-cost](#) — controls how the OSPF interface cost is calculated.

ip ospf dead-interval

Set the time interval since the last hello-packet was received from a router. After the interval elapses, the neighboring routers declare the router dead.

Syntax `ip ospf dead-interval seconds`
To return to the default values, use the `no ip ospf dead-interval` command.

Parameters `seconds` Enter the number of seconds for the interval. The range is from 1 to 65535. The default is **40 seconds**.

Defaults **40 seconds**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the dead interval is four times the default hello-interval.

Related Commands [ip ospf hello-interval](#) — sets the time interval between the hello packets.

ip ospf hello-interval

Specify the time interval between the hello packets sent on the interface.

Syntax `ip ospf hello-interval seconds`
To return to the default value, use the `no ip ospf hello-interval` command.

Parameters `seconds` Enter the number of seconds for the interval. The range is from 1 to 65535. The default is **10 seconds**.

Defaults **10 seconds**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The time interval between the hello packets must be the same for routers in a network.

Related Commands [ip ospf dead-interval](#) — sets the time interval before a router is declared dead.

ip ospf message-digest-key

Enable OSPF MD5 authentication and send an OSPF message digest key on the interface.

Syntax `ip ospf message-digest-key keyid md5key`
To delete a key, use the `no ip ospf message-digest-key keyid` command.

Parameters

<i>keyid</i>	Enter a number as the key ID. The range is from 1 to 255.
<i>key</i>	Enter a continuous character string as the password.

Defaults No MD5 authentication is configured.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can configure a maximum of six digest keys on an interface. Of the available six digest keys, the switches select the MD5 key that is common. The remaining MD5 keys are unused.

To change to a different key on the interface, enable the new key while the old key is still enabled. The system sends two packets: the first packet authenticated with the old key and the second packet authenticated with the new key. This process ensures that the neighbors learn the new key and communication is not disrupted by keeping the old key enabled.

After the reply is received and the new key is authenticated, delete the old key. Dell recommends keeping only one key per interface.

NOTE: The MD5 secret is stored as plain text in the configuration file with service password encryption. Write down or otherwise record the key. You cannot learn the key once it is configured. Use caution when changing the key.

ip ospf mtu-ignore

Disable OSPF MTU mismatch detection upon receipt of database description (DBD) packets.

Syntax `ip ospf mtu-ignore`
To return to the default, use the `no ip ospf mtu-ignore` command.

Defaults Enabled.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip ospf network

Set the network type for the interface.

Syntax `ip ospf network {broadcast | point-to-point}`
 To return to the default, use the `no ip ospf network` command.

Parameters	broadcast	Enter the keyword <code>broadcast</code> to designate the interface as part of a broadcast network.
	point-to-point	Enter the keywords <code>point-to-point</code> to designate the interface as part of a point-to-point network.

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip ospf priority

To determine the designated router for the OSPF network, set the priority of the interface.

Syntax `ip ospf priority number`
 To return to the default setting, use the `no ip ospf priority` command.

Parameters	number	Enter a number as the priority. The range is from 0 to 255. The default is 1 .
------------	---------------	---

Defaults **1**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Setting a priority of 0 makes the router ineligible for election as a designated router or backup designated router.

Use this command for interfaces connected to multi-access networks, not point-to-point networks.

ip ospf retransmit-interval

Set the retransmission time between lost link state advertisements (LSAs) for adjacencies belonging to the interface.

Syntax `ip ospf retransmit-interval seconds`
To return to the default values, use the `no ip ospf retransmit-interval` command.

Parameters

<i>seconds</i>	Enter the number of seconds as the interval between retransmission. The range is from 1 to 3600. The default is 5 seconds . This interval must be greater than the expected round-trip time for a packet to travel between two routers.
-----------------------	---

Defaults **5 seconds**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Set the time interval to a number large enough to prevent unnecessary retransmissions. For example, the interval must be larger for interfaces connected to virtual links.

ip ospf transmit-delay

To send a link state update packet on the interface, set the estimated time elapsed.

Syntax `ip ospf transmit-delay seconds`
To return to the default value, use the `no ip ospf transmit-delay` command.

Parameters

<i>seconds</i>	Enter the number of seconds as the interval between retransmission. The range is from 1 to 3600. The default is 1 second . This value must be greater than the transmission and propagation delays for the interface.
-----------------------	---

Defaults **1 second**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

log-adjacency-changes

To send a Syslog message about changes in the OSPF adjacency state, set the system.

Syntax	<code>log-adjacency-changes</code> To disable the Syslog messages, use the <code>no log-adjacency-changes</code> command.
---------------	--

Defaults Disabled.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

maximum-paths

Enable the software to forward packets over multiple paths.

Syntax	<code>maximum-paths number</code> To disable packet forwarding over multiple paths, use the <code>no maximum-paths</code> command.
---------------	---

Parameters

<i>number</i>	Specify the number of paths. The range for OSPFv2 is from 1 to 16. The default for OSPFv2 is 4 paths . The range for OSPFv3 is from 1 to 64. The default for OSPFv3 is 8 paths .
---------------	--

Defaults 4

Command Modes ROUTER OSPF for OSPFv2
ROUTER OSPFv3 for OSPFv3

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Added support for OSPFv3.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

mib-binding

Enable this OSPF process ID to manage the SNMP traps and process SNMP queries.

Syntax `mib-binding`
To mib-binding on this OSPF process, use the `no mib-binding` command.

Defaults none.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is either enabled or disabled. If no OSPF process is identified as the MIB manager, the first OSPF process is used.

If an OSPF process has been selected, it must be disabled prior to assigning new process ID the MIB responsibility.

network area

Define which interfaces run OSPF and the OSPF area for those interfaces.

Syntax `network ip-address mask area area-id`
To disable an OSPF area, use the `no network ip-address mask area area-id` command.

Parameters

ip-address Specify a primary or secondary address in dotted decimal format. The primary address is required before adding the secondary address.

mask Enter a network mask in /prefix format. (/x)

area-id Enter the OSPF area ID as either a decimal value or in a valid IP address. Decimal value range is from 0 to 65535. IP address format is dotted decimal format A.B.C.D.

NOTE: If the area ID is smaller than 65535, it is converted to a decimal value. For example, if you use an area ID of 0.0.0.1, it is converted to 1.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To enable OSPF on an interface, the `network area` command must include, in its range of addresses, the primary IP address of an interface.

 | **NOTE: An interface can be attached only to a single OSPF area.**

If you delete all the network area commands for Area 0, the `show ip ospf` command output does not list Area 0.

passive-interface

Suppress both receiving and sending routing updates on an interface.

Syntax `passive-interface {default | interface}`
To enable both the receiving and sending routing, use the `no passive-interface interface` command.
To return all OSPF interfaces (current and future) to active, use the `no passive-interface default` command.

Parameters

default	Enter the keyword <code>default</code> to make all OSPF interfaces (current and future) passive.
interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For Port Channel groups, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.• For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.19.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Although the passive interface does not send or receive routing updates, the network on that interface is still included in OSPF updates sent using other interfaces.

The `default` keyword sets all interfaces as passive. You can then configure individual interfaces, where adjacencies are desired, using the `no passive-interface interface` command. The `no` form of this command is inserted into the configuration for individual interfaces when the `no passive-interface interface` command is issued while `passive-interface default` is configured.

This command behavior has changed as follows:

`passive-interface interface`

- The previous `no passive-interface interface` is removed from the running configuration.
- The ABR status for the router is updated.

- Save `passive-interface interface` into the running configuration.

`passive-interface default`

- All present and future OSPF interfaces are marked as *passive*.
- Any adjacency is explicitly terminated from all OSPF interfaces.
- All previous `passive-interface interface` commands are removed from the running configuration.
- All previous `no passive-interface interface` commands are removed from the running configuration.

`no passive-interface interface`

- Remove the interface from the passive list.
- The ABR status for the router is updated.
- If `passive-interface default` is specified, then save `no passive-interface interface` into the running configuration.

`No passive-interface default`

- Clear everything and revert to the default behavior.
- All previously marked passive interfaces are removed.
- May update ABR status.

redistribute

Redistribute information from another routing protocol throughout the OSPF process.

Syntax

```
redistribute {connected | rip | static} [metric metric-value | metric-type type-value] [route-map map-name] [tag tag-value]
```

To disable redistribution, use the `no redistribute {connected | isis | rip | static}` command.

Parameters

connected	Enter the keyword <code>connected</code> to specify that information from active routes on interfaces is redistributed.
rip	Enter the keyword <code>rip</code> to specify that RIP routing information is redistributed.
static	Enter the keyword <code>static</code> to specify that information from static routes is redistributed.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number. The range is from 0 (zero) to 16777214.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keywords <code>metric-type</code> then one of the following: <ul style="list-style-type: none"> • 1 = OSPF External type 1 • 2 = OSPF External type 2
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of the route map.
tag <i>tag-value</i>	(OPTIONAL) Enter the keyword <code>tag</code> then a number. The range is from 0 to 4294967295.

Defaults

Not configured.

Command Modes

ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To redistribute the default route (0.0.0.0/0), configure the `default-information originate` command.

Related Commands [default-information originate](#) — generates a default route into the OSPF routing domain.

redistribute bgp

Redistribute BGP routing information throughout the OSPF instance.

Syntax `redistribute bgp as number [metric metric-value] | [metric-type type-value] | [tag tag-value]`

To disable redistribution, use the `no redistribute bgp as number [metric metric-value] | [metric-type type-value] [tag tag-value]` command.

Parameters

<i>as number</i>	Enter the autonomous system number. The range is from 1 to 65535.
<i>metric metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then the <code>metric-value</code> number. The range is from 0 to 16777214.
<i>metric-type type-value</i>	(OPTIONAL) Enter the keywords <code>metric-type</code> then one of the following: <ul style="list-style-type: none">· 1 = for OSPF External type 1· 2 = for OSPF External type 2
<i>tag tag-value</i>	(OPTIONAL) Enter the keyword <code>tag</code> to set the tag for routes redistributed into OSPF. The range is from 0 to 4294967295.

Defaults none

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

redistribute isis

Redistribute IS-IS routing information throughout the OSPF instance.

Syntax `redistribute isis [tag] [level-1 | level-1-2 | level-2] [metric metric-value | metric-type type-value] [route-map map-name] [tag tag-value]`

To disable redistribution, use the `no redistribute isis [tag] [level-1 | level-1-2 | level-2] [metric metric-value | metric-type type-value] [route-map map-name] [tag tag-value]` command.

Parameters

tag	(OPTIONAL) Enter the name of the IS-IS routing process.
level-1	(OPTIONAL) Enter the keywords <code>level-1</code> to redistribute only IS-IS Level-1 routes.
level-1-2	(OPTIONAL) Enter the keywords <code>level-1-2</code> to redistribute both IS-IS Level-1 and Level-2 routes.
level-2	(OPTIONAL) Enter the keywords <code>level-2</code> to redistribute only IS-IS Level-2 routes.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number. The range is from 0 (zero) to 4294967295.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keywords <code>metric-type</code> then one of the following: <ul style="list-style-type: none">· 1 = for OSPF External type 1· 2 = for OSPF External type 2
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of the route map.
tag <i>tag-value</i>	(OPTIONAL) Enter the keyword <code>tag</code> to set the tag for routes redistributed into OSPF. The range is from 0 to 4294967295.

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

router-id

To configure a fixed router ID, use this command.

Syntax `router-id ip-address`
To remove the fixed router ID, use the `no router-id ip-address` command.

Parameters

ip-address Enter the router ID in the IP address format.

Defaults none.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can configure an arbitrary value in the IP address format for each router. However, each router ID must be unique. If you use this command on an OSPF router process, which is already active (that is, has neighbors), a prompt reminding you that changing the router-id brings down the existing OSPF adjacency. The new router ID is effective at the next reload.

Example

```
Dell(conf)#router ospf 100
Dell(conf-router_ospf)#router-id 1.1.1.1
Changing router-id will bring down existing OSPF adjacency [y/n]:

Dell(conf-router_ospf)#show config
!
router ospf 100
router-id 1.1.1.1
Dell(conf-router_ospf)#no router-id
Changing router-id will bring down existing OSPF adjacency [y/n]:
Dell#
```

router ospf

To configure an OSPF instance, enter ROUTER OSPF mode.

Syntax

```
router ospf process-id
```

To clear an OSPF instance, use the `no router ospf process-id` command.

Parameters

process-id Enter a number for the OSPF instance. The range is from 1 to 65535.

Defaults

Not configured.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You must have an IP address assigned to an interface to enter ROUTER OSPF mode and configure OSPF.

Example

```
Dell(conf)#router ospf 2
Dell(conf-router_ospf)#
```

show config

Display the non-default values in the current OSPF configuration.

Syntax

```
show config
```

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-router_ospf) #show config
!
router ospf 3
passive-interface FastEthernet 0/1
Dell (conf-router_ospf) #
```

show ip ospf

Display information on the OSPF process configured on the switch.

Syntax `show ip ospf process-id`

Parameters

process-id Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you delete all the network area commands for Area 0, the `show ip ospf` command output does not list Area 0.

The following describes the `show ip ospf` command shown in the following example.

Line Beginning with	Description
"Routing Process..."	Displays the OSPF process ID and the IP address associated with the process ID.
"Supports only..."	Displays the number of Type of Service (TOS) rouse supported.
"SPF schedule..."	Displays the delay and hold time configured for this process ID.
"Convergence Level"	
"Min LSA...."	Displays the intervals set for LSA transmission and acceptance.

Line Beginning with	Description
"Number of..."	Displays the number and type of areas configured for this process ID.

Example

```
Dell#show ip ospf 10
Routing Process ospf 10 with ID 1.1.1.1 Virtual router default-vrf
Supports only single TOS (TOS0) routes
SPF schedule delay 5 secs, Hold time between two SPFs 10 secs
Convergence Level 0
Min LSA origination 0 msec, Min LSA arrival 1000 msec
Min LSA hold time 5000 msec, Max LSA wait time 5000 msec
Number of area in this router is 1, normal 1 stub 0 nssa 0
  Area BACKBONE (0)
    Number of interface in this area is 1
    SPF algorithm executed 205 times
    Area ranges are
Dell#
```

Related Commands

- [show ip ospf database](#) — displays information about the OSPF routes configured.
- [show ip ospf interface](#) — displays the OSPF interfaces configured.
- [show ip ospf neighbor](#) — displays the OSPF neighbors configured.

show ip ospf asbr

Display all autonomous system boundary router (ASBR) routers visible to OSPF.

Syntax

```
show ip ospf process-id asbr
```

Parameters

process-id Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To isolate problems with external routes, use this command. In OSPF, external routes are calculated by adding the LSA cost to the cost of reaching the ASBR router. If an external route does not have the correct cost, use this command to determine if the path to the originating router is correct. The display output is not sorted in any order.

 **NOTE: ASBRs that are not in directly connected areas are also displayed.**

You can determine if an ASBR is in a directly connected area (or not) by the flags. For ASBRs in a directly connected area, E flags are set. In the following example, router 1.1.1.1 is in a directly connected area since the Flag is E/-/-/. For remote ASBRs, the E flag is clear (-/-/-/).

Example

```
Dell#show ip ospf 1asbr
RouterID  Flags  Cost  Nexthop  Interface  Area
3.3.3.3   -/-/-/  2     10.0.0.2  Gi 0/1     1
1.1.1.1   E/-/-/  0     0.0.0.0  -          0
Dell#
```

show ip ospf database

Display all LSA information. If you do not enable OSPF on the switch, no output is generated.

Syntax `show ip ospf process-id database [database-summary]`

Parameters

process-id Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.

database-summary (OPTIONAL) Enter the keywords `database-summary` to the display the number of LSA types in each area and the total number of LSAs.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip ospf process-id database` command shown in the following example.

Field	Description
Link ID	Identifies the router ID.
ADV Router	Identifies the advertising router's ID.
Age	Displays the link state age.
Seq#	Identifies the link state sequence number. This number allows you to identify old or duplicate link state advertisements.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Link count	Displays the number of interfaces for that router.

Example

```
Dell>show ip ospf 1 database
      OSPF Router with ID (11.1.2.1) (Process ID 1)
      Router (Area 0.0.0.0)
Link ID      ADV Router    Age  Seq#           Checksum Link count
11.1.2.1    11.1.2.1      673  0x80000005    0x707e  2
```

```

13.1.1.1      13.1.1.1      676  0x80000097  0x1035  2
192.68.135.2 192.68.135.2 1419 0x80000294  0x9cbd  1

                Network (Area 0.0.0.0)
Link ID      ADV Router  Age  Seq#      Checksum
10.2.3.2     13.1.1.1    676  0x80000003 0x6592
10.2.4.2     192.68.135.2 908  0x80000055 0x683e

                Type-5 AS External
Link ID      ADV Router  Age  Seq#      Checksum  Tag
0.0.0.0     192.68.135.2 908  0x80000052 0xeb83  100
1.1.1.1     192.68.135.2 908  0x8000002a 0xbd27  0
10.1.1.0    11.1.2.1    718  0x80000002 0x9012  0
10.1.2.0    11.1.2.1    718  0x80000002 0x851c  0
10.2.2.0    11.1.2.1    718  0x80000002 0x7927  0
10.2.3.0    11.1.2.1    718  0x80000002 0x6e31  0
10.2.4.0    13.1.1.1    1184 0x80000068 0x45db  0
11.1.1.0    11.1.2.1    718  0x80000002 0x831e  0
11.1.2.0    11.1.2.1    718  0x80000002 0x7828  0
12.1.2.0    192.68.135.2 1663 0x80000054 0xd8d6  0
13.1.1.0    13.1.1.1    1192 0x8000006b 0x2718  0
13.1.2.0    13.1.1.1    1184 0x8000006b 0x1c22  0
172.16.1.0  13.1.1.1    148  0x8000006d 0x533b  0
Del1>

```

Related Commands `show ip ospf database asbr-summary` — displays only ASBR summary LSA information.

show ip ospf database asbr-summary

Display information about autonomous system (AS) boundary LSAs.

Syntax `show ip ospf process-id database asbr-summary [link-state-id] [adv-router ip-address]`

Parameters

- process-id*** Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
- link-state-id*** (OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following:
- the network's IP address for Type 3 LSAs or Type 5 LSAs
 - the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs
 - the default destination (0.0.0.0) for Type 5 LSAs
- adv-router ip-address*** (OPTIONAL) Enter the keywords `adv-router` and the ip-address to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show ip ospf database asbr-summary` command shown in the following example.

Field	Description
LS Age	Displays the LSA's age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none">• TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service.• DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits.• E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the advertising router's ID.
Checksum	Displays the Fletcher checksum of the LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Network Mask	Displays the network mask implemented on the area.
TOS	Displays the Type of Service (TOS) options. Option 0 is the only option.
Metric	Displays the LSA metric.

Example

```
Dell#show ip ospf 100 database asbr-summary

  OSPF Router with ID (1.1.1.10) (Process ID 100)

  Summary Asbr (Area 0.0.0.0)

LS age: 1437
Options: (No TOS-capability, No DC, E)
LS type: Summary Asbr
Link State ID: 103.1.50.1
Advertising Router: 1.1.1.10
LS Seq Number: 0x8000000f
Checksum: 0x8221
Length: 28
Network Mask: /0
      TOS: 0 Metric: 2

LS age: 473
Options: (No TOS-capability, No DC, E)
LS type: Summary Asbr
Link State ID: 104.1.50.1
Advertising Router: 1.1.1.10
LS Seq Number: 0x80000010
Checksum: 0x4198
Length: 28
--More--
```

Related Commands `show ip ospf database` — displays OSPF database information.

show ip ospf database external

Display information on the AS external (type 5) LSAs.

Syntax	<code>show ip ospf <i>process-id</i> database external [<i>link-state-id</i>] [<i>adv-router ip-address</i>]</code>	
Parameters	<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
	<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">· the network's IP address for Type 3 LSAs or Type 5 LSAs· the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs· the default destination (0.0.0.0) for Type 5 LSAs
	<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> and the ip-address to display only the LSA information about that router.
Command Modes	<ul style="list-style-type: none">· EXEC· EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The following describes the <code>show ip ospf <i>process-id</i> database external</code> command shown in the following example.	
	Field	Description
	LS Age	Displays the LSA's age.
	Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none">· TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service.· DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits.· E or No E is displayed on whether the originating router can accept AS External LSAs.
	LS Type	Displays the LSA's type.
	Link State ID	Displays the Link State ID.
	Advertising Router	Identifies the router ID of the LSA's originating router.
	LS Seq Number	Identifies the link state sequence number. This number enables you to identify old or duplicate LSAs.

Field	Description
Checksum	Displays the Fletcher checksum of the LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Network Mask	Displays the network mask implemented on the area.
Metrics Type	Displays the external type.
TOS	Displays the Type of Service (TOS) options. Option 0 is the only option.
Metric	Displays the LSA metric.
Forward Address	Identifies the address of the forwarding router. Data traffic is forwarded to this router. If the forwarding address is 0.0.0.0, data traffic is forwarded to the originating router.
External Route Tag	Displays the 32-bit field attached to each external route. The OSPF protocol does not use this field, but you can use the field for external route management.

Example

```
Dell#show ip ospf 1 database external

      OSPF Router with ID (20.20.20.5) (Process ID 1)

          Type-5 AS External

LS age: 612
Options: (No TOS-capability, No DC, E)
LS type: Type-5 AS External
Link State ID: 12.12.12.2
Advertising Router: 20.31.3.1
LS Seq Number: 0x80000007
Checksum: 0x4cde
Length: 36
Network Mask: /32
    Metrics Type: 2
    TOS: 0
    Metrics: 25
    Forward Address: 0.0.0.0
    External Route Tag: 43

LS age: 1868
Options: (No TOS-capability, DC)
LS type: Type-5 AS External
Link State ID: 24.216.12.0
Advertising Router: 20.20.20.8
LS Seq Number: 0x80000005
Checksum: 0xa00e
Length: 36
Network Mask: /24
    Metrics Type: 2
    TOS: 0
    Metrics: 1
    Forward Address: 0.0.0.0
    External Route Tag: 701
Dell#
```

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database network

Display the network (type 2) LSA information.

Syntax	<code>show ip ospf <i>process-id</i> database network [<i>link-state-id</i>] [<i>adv-router ip-address</i>]</code>	
Parameters	<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
	<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">· the network's IP address for Type 3 LSAs or Type 5 LSAs· the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs· the default destination (0.0.0.0) for Type 5 LSAs
	<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> and the ip-address to display only the LSA information about that router.
Command Modes	<ul style="list-style-type: none">· EXEC· EXEC Privilege	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The following describes the <code>show ip ospf <i>process-id</i> database network</code> command shown in the following example.	
	Field	Description
	LS Age	Displays the LSA's age.
	Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none">· TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service.· DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits.· E or No E is displayed on whether the originating router can accept AS External LSAs.
	LS Type	Displays the LSA's type.
	Link State ID	Displays the Link State ID.
	Advertising Router	Identifies the router ID of the LSA's originating router.
	Checksum	Identifies the link state sequence number. This number enables you to identify old or duplicate LSAs.

Field	Description
Length	Displays the Fletcher checksum of an LSA's complete contents.
Network Mask	Displays the length in bytes of the LSA.
Attached Router	Identifies the IP address of routers attached to the network.

Example

```
Dell#show ip ospf 1 data network
      OSPF Router with ID (20.20.20.5) (Process ID 1)
        Network (Area 0.0.0.0)
      LS age: 1372
      Options: (No TOS-capability, DC, E)
      LS type: Network
      Link State ID: 202.10.10.2
      Advertising Router: 20.20.20.8
      LS Seq Number: 0x80000006
      Checksum: 0xa35
      Length: 36
      Network Mask: /24
        Attached Router: 20.20.20.8
        Attached Router: 20.20.20.9
        Attached Router: 20.20.20.7
      Network (Area 0.0.0.1)
      LS age: 252
      Options: (TOS-capability, No DC, E)
      LS type: Network
      Link State ID: 192.10.10.2
      Advertising Router: 192.10.10.2
      LS Seq Number: 0x80000007
      Checksum: 0x4309
      Length: 36
      Network Mask: /24
        Attached Router: 192.10.10.2
        Attached Router: 20.20.20.1
        Attached Router: 20.20.20.5
Dell#
```

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database nssa-external

Display NSSA-External (type 7) LSA information.

Syntax `show ip ospf database nssa-external [link-state-id] [adv-router ip-address]`

Parameters

<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none"> • the network's IP address for Type 3 LSAs or Type 5 LSAs • the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs • the default destination (0.0.0.0) for Type 5 LSAs
<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> and the ip-address to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database opaque-area

Display the opaque-area (type 10) LSA information.

Syntax `show ip ospf process-id database opaque-area [link-state-id] [adv-router ip-address]`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">· the network's IP address for Type 3 LSAs or Type 5 LSAs· the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs· the default destination (0.0.0.0) for Type 5 LSAs
<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> and the ip-address to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf process-id database opaque-area` command shown in the following example.

Item	Description
LS Age	Displays the LSA's age.
Options	Displays the optional capabilities available on router. The following options can be found in this item:

Item	Description
	<ul style="list-style-type: none"> TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service. DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits. E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA's type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the advertising router's ID.
Checksum	Displays the Fletcher checksum of the LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Opaque Type	Displays the Opaque type field (the first 8 bits of the Link State ID).
Opaque ID	Displays the Opaque type-specific ID (the remaining 24 bits of the Link State ID).

Example

```
Dell>show ip ospf 1 database opaque-area

      OSPF Router with ID (3.3.3.3) (Process ID 1)
      Type-10 Opaque Link Area (Area 0)

LS age: 1133
Options: (No TOS-capability, No DC, E)
LS type: Type-10 Opaque Link Area
Link State ID: 1.0.0.1
Advertising Router: 10.16.1.160
LS Seq Number: 0x80000416
Checksum: 0x376
Length: 28
Opaque Type: 1
Opaque ID: 1
Unable to display opaque data

LS age: 833
Options: (No TOS-capability, No DC, E)
LS type: Type-10 Opaque Link Area
Link State ID: 1.0.0.2
Advertising Router: 10.16.1.160
LS Seq Number: 0x80000002
Checksum: 0x19c2
--More--
```

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database opaque-as

Display the opaque-as (type 11) LSA information.

Syntax `show ip ospf process-id database opaque-as [link-state-id] [adv-router ip-address]`

Parameters

process-id Enter the OSPF process ID to show a specific process. If you do not enter the process ID, the command applies only to the first OSPF process.

link-state-id (OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following:

- the network's IP address for Type 3 LSAs or Type 5 LSAs
- the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs
- the default destination (0.0.0.0) for Type 5 LSAs

adv-router ip-address

(OPTIONAL) Enter the keywords `adv-router` and the ip-address to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database opaque-link

Display the opaque-link (type 9) LSA information.

Syntax `show ip ospf process-id database opaque-link [link-state-id] [adv-router ip-address]`

Parameters

process-id Enter the OSPF process ID to show a specific process. If you do not enter the process ID, the command applies only to the first OSPF process.

link-state-id (OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following:

- the network's IP address for Type 3 LSAs or Type 5 LSAs
- the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs
- the default destination (0.0.0.0) for Type 5 LSAs

adv-router ip-address

(OPTIONAL) Enter the keywords `adv-router` then the IP address of an Advertising Router to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database router

Display the router (type 1) LSA information.

Syntax `show ip ospf process-id database router [link-state-id] [adv-router ip-address]`

Parameters	<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If you do not enter a process ID, the command applies only to the first OSPF process.
	<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">· the network's IP address for Type 3 LSAs or Type 5 LSAs· the router's OSPF router ID for Type 1 LSAs or Type 4 LSAs· the default destination (0.0.0.0) for Type 5 LSAs
	<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> then the IP address of an Advertising Router to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf process-id database router` command shown in the following example.

Item	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none">· TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service.· DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits.· E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA type.
Link State ID	Displays the Link State ID.
Advertising Router	Identifies the router ID of the LSA's originating router.
LS Seq Number	Displays the link state sequence number. This number detects duplicate or old LSAs.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.

Item	Description
Length	Displays the length in bytes of the LSA.
Number of Links	Displays the number of active links to the type of router (Area Border Router or AS Boundary Router) listed in the previous line.
Link connected to:	Identifies the type of network to which the router is connected.
(Link ID)	Identifies the link type and address.
(Link Data)	Identifies the router interface address.
Number of TOS Metric	Lists the number of TOS metrics.
TOS 0 Metric	Lists the number of TOS 0 metrics.

Example

```
Dell#show ip ospf 100 database router
      OSPF Router with ID (1.1.1.10) (Process ID 100)
      Router (Area 0)

LS age: 967
Options: (No TOS-capability, No DC, E)
LS type: Router
Link State ID: 1.1.1.10
Advertising Router: 1.1.1.10
LS Seq Number: 0x8000012f
Checksum: 0x3357
Length: 144
AS Boundary Router
Area Border Router
  Number of Links: 10

  Link connected to: a Transit Network
    (Link ID) Designated Router address: 192.68.129.1
    (Link Data) Router Interface address: 192.68.129.1
    Number of TOS metric: 0
    TOS 0 Metric: 1

  Link connected to: a Transit Network
    (Link ID) Designated Router address: 192.68.130.1
    (Link Data) Router Interface address: 192.68.130.1
    Number of TOS metric: 0
    TOS 0 Metric: 1

  Link connected to: a Transit Network
    (Link ID) Designated Router address: 192.68.142.2
    (Link Data) Router Interface address: 192.68.142.2
    Number of TOS metric: 0
    TOS 0 Metric: 1

  Link connected to: a Transit Network
    (Link ID) Designated Router address: 192.68.141.2
    (Link Data) Router Interface address: 192.68.141.2
    Number of TOS metric: 0
    TOS 0 Metric: 1

  Link connected to: a Transit Network
    (Link ID) Designated Router address: 192.68.140.2
    (Link Data) Router Interface address: 192.68.140.2
    Number of TOS metric: 0
    TOS 0 Metric: 1

Link connected to: a Stub Network
```

```
(Link ID) Network/subnet number: 11.1.5.0
--More--
```

Related Commands [show ip ospf database](#) — displays OSPF database information.

show ip ospf database summary

Display the network summary (type 3) LSA routing information.

Syntax `show ip ospf process-id database summary [link-state-id] [adv-router ip-address]`

Parameters

<i>process-id</i>	Enter the OSPF process ID to show a specific process. If you do not enter a process ID, the command applies only to the first OSPF process.
<i>link-state-id</i>	(OPTIONAL) Specify LSA ID in dotted decimal format. The LSA ID value depends on the LSA type, and it can be one of the following: <ul style="list-style-type: none">the network's IP address for Type 3 LSAs or Type 5 LSAsthe router's OSPF router ID for Type 1 LSAs or Type 4 LSAsthe default destination (0.0.0.0) for Type 5 LSAs
<i>adv-router ip-address</i>	(OPTIONAL) Enter the keywords <code>adv-router</code> then the IP address of an Advertising Router to display only the LSA information about that router.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf process-id database summary` command shown in the following example.

Item	Description
LS Age	Displays the LSA age.
Options	Displays the optional capabilities available on router. The following options can be found in this item: <ul style="list-style-type: none">TOS-capability or No TOS-capability is displayed depending on whether the router can support Type of Service.DC or No DC is displayed depending on whether the originating router can support OSPF over demand circuits.E or No E is displayed on whether the originating router can accept AS External LSAs.
LS Type	Displays the LSA type.
Link State ID	Displays the Link State ID.

Item	Description
Advertising Router	Identifies the router ID of the LSA's originating router.
LS Seq Number	Displays the link state sequence number. This number allows you to identify old or duplicate LSAs.
Checksum	Displays the Fletcher checksum of an LSA's complete contents.
Length	Displays the length in bytes of the LSA.
Network Mask	Displays the network mask implemented on the area.
TOS	Displays the TOS options. Option 0 is the only option.
Metric	Displays the LSA metrics.

Example

```
#show ip ospf 100 database summary

      OSPF Router with ID (1.1.1.10) (Process ID 100)

      Summary Network (Area 0.0.0.0)

LS age: 1551
Options: (No TOS-capability, DC, E)
LS type: Summary Network
Link State ID: 192.68.16.0
Advertising Router: 192.168.17.1
LS Seq Number: 0x80000054
Checksum: 0xb5a2
Length: 28
Network Mask: /24
      TOS: 0 Metric: 1

LS age: 9
Options: (No TOS-capability, No DC, E)
LS type: Summary Network
Link State ID: 192.68.32.0
Advertising Router: 1.1.1.10
LS Seq Number: 0x80000016
Checksum: 0x987c
Length: 28
Network Mask: /24
      TOS: 0 Metric: 1

LS age: 7
Options: (No TOS-capability, No DC, E)
LS type: Summary Network
Link State ID: 192.68.33.0
Advertising Router: 1.1.1.10
LS Seq Number: 0x80000016
Checksum: 0x1241
Length: 28
Network Mask: /26
      TOS: 0 Metric: 1

#
```

Related Commands `show ip ospf database` — displays OSPF database information.

show ip ospf interface

Display the OSPF interfaces configured. If OSPF is not enabled on the switch, no output is generated.

Syntax `show ip ospf process-id interface [interface]`

Parameters

process-id Enter the OSPF process ID to show a specific process. If you do not enter a process ID, the command applies only to the first OSPF process.

interface (OPTIONAL) Enter the following keywords and slot/port or number information:

- For the null interface, enter the keyword `null` then zero (0).
- For Loopback interfaces, enter the keyword `loopback` then a number from 0 to 16383.
- For Port Channel groups, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then the VLAN ID. The range is from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf process-id interface` command shown in the following example.

Item	Description
TenGigabitEthernet. ..	This line identifies the interface type slot/port and the status of the OSPF protocol on that interface.
Internet Address...	This line displays the IP address, network mask and area assigned to this interface.
Process ID...	This line displays the OSPF Process ID, Router ID, Network type and cost metric for this interface.
Transmit Delay...	This line displays the interface's settings for Transmit Delay, State, and Priority. In the State setting, BDR is Backup Designated Router.
Designated Router...	This line displays the ID of the Designated Router and its interface address.
Backup Designated...	This line displays the ID of the Backup Designated Router and its interface address.
Timer intervals...	This line displays the interface's timer settings for Hello interval, Dead interval, Transmit Delay (Wait), and Retransmit Interval.
Hello due...	This line displays the amount time until the next Hello packet is sent out this interface.

Item	Description
Neighbor Count...	This line displays the number of neighbors and adjacent neighbors. Listed below this line are the details about each adjacent neighbor.

Example

```
Dell>show ip ospf int

TenGigabitEthernet 1/1 is up, line protocol is up
  Internet Address 192.168.1.2/30, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DR, Priority 1
  Designated Router (ID) 192.168.253.2, Interface address 192.168.1.2
  Backup Designated Router (ID) 192.168.253.1, Interface address 192.168.1.1
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:02
  Neighbor Count is 1, Adjacent neighbor count is 1
    Adjacent with neighbor 192.168.253.1 (Backup Designated Router)

TenGigabitEthernet 1/2 is up, line protocol is up
  Internet Address 192.168.0.1/24, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type BROADCAST, Cost: 1
  Transmit Delay is 1 sec, State DROTHER, Priority 1
  Designated Router (ID) 192.168.253.5, Interface address 192.168.0.4
  Backup Designated Router (ID) 192.168.253.3, Interface address 192.168.0.2
  Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  Hello due in 00:00:08
  Neighbor Count is 3, Adjacent neighbor count is 2
    Adjacent with neighbor 192.168.253.5 (Designated Router)
    Adjacent with neighbor 192.168.253.3 (Backup Designated Router)

Loopback 0 is up, line protocol is up
  Internet Address 192.168.253.2/32, Area 0.0.0.1
  Process ID 1, Router ID 192.168.253.2, Network Type LOOPBACK, Cost: 1
  Loopback interface is treated as a stub Host.
Dell>
```

show ip ospf neighbor

Display the OSPF neighbors connected to the local router.

Syntax `show ip ospf process-id neighbor`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
--------------------------	--

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf process-id neighbor` command shown in the following example.

Item	Description
Neighbor ID	Displays the neighbor router ID.
Pri	Displays the priority assigned neighbor.
State	Displays the OSPF state of the neighbor.
Dead Time	Displays the expected time until the system declares the neighbor dead.
Address	Displays the IP address of the neighbor.
Interface	Displays the interface type slot/port information.
Area	Displays the neighbor's area (process ID).

Example

```
Dell#show ip ospf 34 neighbor

Neighbor ID Pri State          Dead Time Address  Interface Area
20.20.20.7  1 FULL/DR      00:00:32 182.10.10.3 Gi 0/0 0.0.0.2
192.10.10.2 1 FULL/DR      00:00:37 192.10.10.2 Gi 0/1 0.0.0.1
20.20.20.1  1 FULL/DROTHER 00:00:36 192.10.10.4 Gi 0/1 0.0.0.1
Dell#
```

show ip ospf routes

Display routes OSPF calculates and stores in OSPF RIB.

Syntax `show ip ospf process-id routes`

Parameters

process-id Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is useful in isolating routing problems between the OSPF and the RTM. For example, if a route is missing from the RTM/FIB but is visible from the display output of this command, the problem is with downloading the route to the RTM.

This command has the following limitations:

- The display output is sorted by prefixes; intra-area ECMP routes are not displayed together.
- For Type 2 external routes, Type 1 cost is not displayed.

Example

```
Dell#show ip ospf 100 route
```

Prefix	Cost	Nexthop	Interface	Area	Type
1.1.1.1	1	0.0.0.0	Lo 0	0	Intra-Area
3.3.3.3	2	13.0.0.3	Te 0/4	1	Intra-Area
13.0.0.0	1	0.0.0.0	Te 0/4	0	Intra-Area
150.150.150.0	2	13.0.0.3	Te 0/4	-	External
172.30.1.0	2	13.0.0.3	Te 0/4	1	Intra-Area

Dell#

show ip ospf statistics

Display OSPF statistics.

Syntax `show ip ospf process-id statistics global | [interface name {neighbor router-id}]`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
global	Enter the keyword <code>global</code> to display the packet counts received on all running OSPF interfaces and packet counts OSPF neighbors receive and transmit.
interface <i>name</i>	(OPTIONAL) Enter the keyword <code>interface</code> then one of the following interface keywords and slot/port or number information: <ul style="list-style-type: none"> • For Port Channel groups, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
neighbor <i>router-id</i>	(OPTIONAL) Enter the keyword <code>neighbor</code> then the neighbor's router-id in dotted decimal format (A.B.C.D.).

Defaults none

Supported Modes Full-Switch

Command Modes

- EXEC
- EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip ospf statistics process-id global` command shown in the following example.

Row Heading	Description
Total	Displays the total number of packets the OSPF process receives/transmits.
Error	Displays the error count while receiving and transmitting packets by the OSPF process.
Hello	Number of OSPF Hello packets.

Row Heading	Description
DDiscr	Number of database description packets.
LSReq	Number of link state request packets.
LSUpd	Number of link state update packets.
LSAck	Number of link state acknowledgement packets.
TxQ-Len	The transmission queue length.
RxQ-Len	The reception queue length.
Tx-Mark	The highest number mark in the transmission queue.
Rx-Mark	The highest number mark in the reception queue.
Hello-Q	The queue, for transmission or reception, for the hello packets.
LSR-Q	The queue, for transmission or reception, for the link state request packets.
Other-Q	The queue, for transmission or reception, for the link state acknowledgement, database description, and update packets.

The following describes the error definitions for the `show ip ospf statistics process-id global` command.

Error Type	Description
Intf_Down	Received packets on an interface that is either down or OSPF is not enabled.
Non-Dr	Received packets with a destination address of ALL_DRS even though SELF is not a designated router.
Self-Org	Receive the self originated packet.
Wrong_Len	The received packet length is different to what was indicated in the OSPF header.
Invld-Nbr	LSA, LSR, LSU, and DDB are received from a peer which is not a neighbor peer.
Nbr-State	LSA, LSR, and LSU are received from a neighbor with stats less than the loading state.
Auth-Error	Simple authentication error.
MD5-Error	MD5 error
Cksum-Err	Checksum Error
Version	Version mismatch
AreaMismatch	Area mismatch
Conf-Issue	The received hello packet has a different hello or dead interval than the configuration.
No-Buffer	Buffer allocation failure.
Seq-no	A sequence no errors occurred during the database exchange process.
Socket	Socket Read/Write operation error.
Q-overflow	Packets dropped due to queue overflow.
Unknown-Pkt	Received packet is not an OSPF packet.

Example

```
Dell#show ip ospf 10 statistics global
OSPF Packet Count
Total Error Hello DDiscr LSReq LSUpd
```

```

LSAck
RX      34      0      26      2      1      3
2
TX      34      0      25      3      1      3
2

  OSPF Global Queue Length
      TxQ-Len RxQ-Len Tx-Mark Rx-Mark
Hello-Q      0      0      1      1
LSR-Q      0      0      1      1
Other-Q      0      0      2      2

  Error packets (Receive statistics)
Intf-Down  0  Non-Dr      0  Self-Org  0
Wrong-Len  0  Invld-Nbr  0  Nbr-State  0
0
Auth-Err   0  MD5-Err   0  Chksum    0
Version    0  AreaMis   0  Conf-Issues
0
No-Buffer  0  Seq-No    0  Socket    0
Q-OverFlow 0  Unknown-Pkt 0  RtidZero  0
0
Error packets (Transmit statistics)
Socket Errors 0
Dell#

```

Usage Information

The `show ip ospf process-id statistics` command displays the error packet count received on each interface as:

- The hello-timer remaining value for each interface
- The wait-timer remaining value for each interface
- The grace-timer remaining value for each interface
- The packet count received and transmitted for each neighbor
- Dead timer remaining value for each neighbor
- Transmit timer remaining value for each neighbor
- The LSU Q length and its highest mark for each neighbor
- The LSR Q length and its highest mark for each neighbor

Example (Statistics)

```

Dell#show ip ospf 10 statistics
Interface TenGigabitEthernet 4/45
  Error packets (Receive statistics)
    Intf-Down  0  Non-Dr      0  Self-Org    0
    Wrong-Len  0  Invld-Nbr  0  Nbr-State   0
    Auth-Error  0  MD5-Error  0  Cksum-Err   0
    Version     0  AreaMisMatch 0  Conf-Issue  0
    SeqNo-Err   0  Unknown-Pkt 0  Bad-LsReq   0
    RtidZero    0
  Neighbor ID 3.1.1.2
  Packet Statistics
    Hello DDiscr LSReq LSUpd LSAck
    RX    47     2     1     3     2
    TX    46     3     1     3     2
  Timers
    Hello 1  Wait      0      Grace 0
    Dead  37  Transmit  0
  Queue Statistics
    LSU-Q-Len  0  LSU-Q-Wmark  1
    LSR-Q-Len  0  LSR-Q-Wmark  1
Dell#

```

Related Commands `clear ip ospf statistics` — clears the packet statistics in all interfaces and neighbors.

show ip ospf timers rate-limit

Show the LSA currently in the queue waiting for timers to expire.

Syntax `show ip ospf process-id timers rate-limit`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
--------------------------	--

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip ospf 10 timers rate-limit

List of LSAs in rate limit Queue
LSA id: 1.1.1.0 Type: 3 Adv Rtid: 3.3.3.3 Expiry time: 00:00:09.111
LSA id: 3.3.3.3 Type: 1 Adv Rtid: 3.3.3.3 Expiry time: 00:00:23.96
Dell#
```

show ip ospf topology

Display routers in directly connected areas.

Syntax `show ip ospf process-id topology`

Parameters

<i>process-id</i>	Enter the OSPF Process ID to show a specific process. If no Process ID is entered, command applies only to the first OSPF process.
--------------------------	--

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To isolate problems with inter-area and external routes, use this command. In OSPF inter-area and external routes are calculated by adding LSA cost to the cost of reaching the router. If an inter-area or external route is not of correct cost, the display can determine if the path to the originating router is correct or not.

Example

```
Dell#show ip ospf 1 topology

Router ID  Flags Cost  Nexthop  Interface Area
3.3.3.3    E/B/-/ 1    20.0.0.3 Te 0/6    0
1.1.1.1    E/-/-/ 1    10.0.0.1 Te 0/6    1
Dell#
```

summary-address

To advertise one external route, set the OSPF ASBR.

Syntax `summary-address ip-address mask [not-advertise] [tag tag-value]`
To disable summary address, use the `no summary-address ip-address mask` command.

Parameters

<i>ip-address</i>	Specify the IP address in dotted decimal format of the address to summarize.
<i>mask</i>	Specify the mask in dotted decimal format of the address to summarize.
<i>not-advertise</i>	(OPTIONAL) Enter the keywords <code>not-advertise</code> to suppress that match the network prefix/mask pair.
<i>tag tag-value</i>	(OPTIONAL) Enter the keyword <code>tag</code> then a value to match on routes redistributed through a route map. The range is from 0 to 4294967295.

Defaults Not configured.

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `area range` command summarizes routes for the different areas.

With the `not-advertise` parameter configured, you can use this command to filter out some external routes. For example, if you want to redistribute static routes to OSPF, but you don't want OSPF to advertise routes with prefix 1.1.0.0, you can configure the `summary-address 1.1.0.0 255.255.0.0 not-advertise` to filter out all the routes fall in range 1.1.0.0/16.

Related Commands [area range](#) — summarizes routes within an area.

timers spf

Set the time interval between when the switch receives a topology change and starts a shortest path first (SPF) calculation.

Syntax `timers spf delay holdtime msec`

To return to the default, use the `no timers spf` command.

Parameters

delay	Enter a number as the delay. The range is from 0 to 2147483647. The default is 5 seconds .
holdtime	Enter a number as the hold time. The range is from 0 to 2147483647. The default is 10 seconds .
msec	Enter the keyword <code>msec</code> to specify the time interval value in milli seconds.

NOTE: If you do not specify the `msec` option, the timer values are considered as seconds.

Defaults

- delay = 5 seconds
- holdtime = 10 seconds

Command Modes

ROUTER OSPF

Supported Modes

Full-Switch

Command History

Version	Description
9.11(0.0)	Introduced the <code>msec</code> keyword.
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Setting the `delay` and `holdtime` parameters to a low number enables the switch to an alternate path quickly but requires more CPU usage.

Example for IPv4 and IPv6

```
Dell#
Dell#conf
Dell(conf)#router ospf 1
Dell(conf-router_ospf-1)#timer spf 2 5 msec
Dell(conf-router_ospf-1)#
Dell(conf-router_ospf-1)#show config
!
router ospf 1
timers spf 2 5 msec
Dell(conf-router_ospf-1)#
Dell(conf-router_ospf-1)#end
Dell#
```

timers throttle lsa all

Configure LSA transmit intervals.

Syntax

```
timers throttle lsa all {start-interval | hold-interval | max-interval}
```

To return to the default, use the `no timers throttle lsa` command.

Parameters

start-interval	Set the minimum interval between initial sending and resending the same LSA. The range is from 0 to 600,000 milliseconds.
-----------------------	---

hold-interval	Set the next interval to send the same LSA. This interval is the time between sending the same LSA after the start-interval has been attempted. The range is from 1 to 600,000 milliseconds.
max-interval	Set the maximum amount of time the system waits before sending the LSA. The range is from 1 to 600,000 milliseconds.

Defaults

- start-interval: **0 msec**
- hold-interval: **5000 msec**
- max-interval: **5000 msec**

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

LSAs are sent after the start-interval and then after hold-interval until the maximum interval is reached. In throttling, exponential backoff is used when sending same LSA, so that the interval is multiplied until the maximum time is reached. For example, if the *start-interval 5000* and *hold-interval 1000* and *max-interval 100,000*, the LSA is sent at 5000 msec, then 1000 msec, then 2000 msec, then 4000 until 100,000 msec is reached.

timers throttle lsa arrival

Configure the LSA acceptance intervals.

Syntax

```
timers throttle lsa arrival arrival-time
```

To return to the default, use the `no timers throttle lsa` command.

Parameters

arrival-time Set the interval between receiving the same LSA repeatedly, to allow sufficient time for the system to accept the LSA. The range is from 0 to 600,000 milliseconds.

Defaults **1000 msec**

Command Modes ROUTER OSPF

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

OSPFv3 Commands

The fundamental mechanisms of OSPF (flooding, DR election, area support, SPF calculations, and so on) remain unchanged. However, OSPFv3 runs on a per-link basis instead of on a per-IP-subnet basis. Most changes were necessary to handle the increased address size of IPv6.

The Dell Networking implementation of OSPFv3 is based on IETF RFC 2740.

area authentication

Configure an IPsec authentication policy for OSPFv3 packets in an OSPFv3 area.

Syntax `area area-id authentication ipsec spi number {MD5 | SHA1} [key-encryption-type]
key`

Parameters

area <i>area-id</i>	Area for which OSPFv3 traffic is to be authenticated. For <i>area-id</i> , you can enter a number. The range is from 0 to 4294967295.
ipsec spi <i>number</i>	Security Policy index (SPI) value that identifies an IPsec security policy. The range is from 256 to 4294967295.
MD5 SHA1	Authentication type: Message Digest 5 (MD5) or Secure Hash Algorithm 1 (SHA-1).
key-encryption-type	(OPTIONAL) Specifies if the key is encrypted. The values are 0 (key is not encrypted) or 7 (key is encrypted).
key	Text string used in authentication. For MD5 authentication, the key must be 32 hex digits (non-encrypted) or 64 hex digits (encrypted). For SHA-1 authentication, the key must be 40 hex digits (non-encrypted) or 80 hex digits (encrypted).

Defaults Not configured.

Command Modes ROUTER OSPFv3

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Before you enable IPsec authentication on an OSPFv3 area, you must first enable OSPFv3 globally on the router. Configure the same authentication policy (same SPI and key) on each interface in an OSPFv3 link.

An SPI number must be unique to one IPsec security policy (authentication or encryption) on the router.

If you have enabled IPsec encryption in an OSPFv3 area with the `area encryption` command, you cannot use the `area authentication` command in the area at the same time.

The configuration of IPsec authentication on an interface-level takes precedence over an area-level configuration. If you remove an interface configuration, an area authentication policy that has been configured is applied to the interface.

area encryption

Configure an IPsec encryption policy for OSPFv3 packets in an OSPFv3 area.

Syntax

```
area area-id encryption ipsec spi number esp encryption-algorithm [key-encryption-type] key authentication-algorithm [key-encryption-type] key | null
```

To remove an IPsec encryption policy from an interface, use the `no area area-id encryption spi number` command.

Parameters

area <i>area-id</i>	Area for which OSPFv3 traffic is to be encrypted. For <i>area-id</i> , enter a number. The range is from 0 to 4294967295.
ipsec spi <i>number</i>	Security Policy index (SPI) value that identifies an IPsec security policy. The range is from 256 to 4294967295.
esp encryption-algorithm	Encryption algorithm used with ESP. Valid values are: 3DES, DES, AES-CBC, and NULL. For AES-CBC, only the AES-128 and AES-192 ciphers are supported.
key-encryption-algorithm	(OPTIONAL) Specifies if the key is encrypted. Valid values: 0 (key is not encrypted) or 7 (key is encrypted).
key	Text string used in encryption. The required lengths of a non-encrypted or encrypted key are: 3DES - 48 or 96 hex digits; DES - 16 or 32 hex digits; AES-CBC -32 or 64 hex digits for AES-128 and 48 or 96 hex digits for AES-192.
authentication-algorithm	Specifies the authentication algorithm to use for encryption. Valid values are MD5 or SHA1.
key-encryption-type	(OPTIONAL) Specifies if the authentication key is encrypted.

Valid values: 0 (key is not encrypted) or 7 (key is encrypted).

key	Text string used in authentication. For MD5 authentication, the key must be 32 hex digits (non-encrypted) or 64 hex digits (encrypted). For SHA-1 authentication, the key must be 40 hex digits (non-encrypted) or 80 hex digits (encrypted).
null	Causes an encryption policy configured for the area to not be inherited on the interface.

Defaults Not configured.

Command Modes ROUTER OSPFv3

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Before you enable IPsec encryption on an OSPFv3 interface, first enable OSPFv3 globally on the router. Configure the same encryption policy (same SPI and keys) on each interface in an OSPFv3 link.

An SPI value must be unique to one IPsec security policy (authentication or encryption) on the router.

When you configure encryption for an OSPFv3 area with the `area encryption` command, you enable both IPsec encryption and authentication. However, when you enable authentication on an area with the `area authentication` command, you do not enable encryption at the same time.

If you have enabled IPsec authentication in an OSPFv3 area with the `area authentication` command, you cannot use the `area encryption` command in the area at the same time.

The configuration of IPsec encryption on an interface-level takes precedence over an area-level configuration. If you remove an interface configuration, an area encryption policy that has been configured is applied to the interface.

area nssa

Specify an area as a not so stubby area (NSSA).

Syntax `area area-id nssa [default-information-originate] [no-redistribution] [no-summary]`

To delete an NSSA, use the `no area area-id nssa` command.

Parameters

area-id Specify the OSPF area by entering a number from zero (0) to 65535.

no-redistribution	(OPTIONAL) Specify that the <code>redistribute</code> command does not distribute routes into the NSSA. This command can be used when the router is an autonomous system boundary router (ASBR) or area border router (ABR).
default-information-originate	(OPTIONAL) Allows external routing information to be imported into the NSSA by using Type 7 default.
no-summary	(OPTIONAL) Specify that no summary LSAs should be sent into the NSSA.

Defaults Not configured.

Command Modes ROUTER OSPF

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.13(0.0)	Introduced on the remaining DNOS platforms.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the S6100-ON.
9.8(2.0)	Introduced on the S3100 series.
9.8(1.0)	Introduced on the Z9100-ON.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.7(0.0)	Introduced on the S6000-ON.
9.2(1.0)	Introduced on the Z9500.
9.0.2.0	Introduced on the S6000.
8.3.19.0	Introduced on the S4820T.
8.3.11.1	Introduced on the Z9000.
8.3.7.0	Introduced on the S4810.
7.8.1.0	Added support for the Multi-Process OSPF.
7.6.1.0	Introduced on the S-Series.
7.5.1.0	Introduced on the C-Series.
pre- 6.1.1.1	Introduced on the E-Series.

auto-cost

Specify how the OSPF interface cost is calculated based on the reference bandwidth method.

Syntax `auto-cost [reference-bandwidth ref-bw]`
 To return to the default bandwidth or to assign cost based on the interface type, use the `no auto-cost [reference-bandwidth ref-bw]` command.

Parameters *ref-bw* (OPTIONAL) Specify a reference bandwidth in megabits per second. The range is from 1 to 4294967. The default is **100 megabits per second**.

Defaults **100 megabits per second.**

Command Modes ROUTER OSPFv3

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM
9.9(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Example

```
Dell#show running-config ospf
!
ipv6 router ospf 10
  log-adjacency-changes
  auto-cost reference-bandwidth 2000

Dell(conf-ipv6-router_ospf)#auto-cost reference-bandwidth ?
<1-4294967>          Reference bandwidth in Mbits/second (default = 100)
Dell(conf-ipv6-router_ospf)#no auto-cost ?
reference-bandwidth  Use reference bandwidth method to assign OSPF cost
<cr>
Dell(conf-ipv6-router_ospf)#
```

clear ipv6 ospf process

Reset an OSPFv3 router process without removing or re-configuring the process.

Syntax `clear ipv6 ospf process`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ipv6 ospf

Display debug information and interface types on OSPF IPv6 packets or events.

Syntax `debug ipv6 ospf {packet | events} [interface]`

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a Port Channel interface, enter the keyword `port-channel` then a number. The range is 1 to 128.
- For a tunnel interface, enter the keyword `tunnel` then a number. The range is 1 to 16383.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

debug ipv6 ospf bfd

Display debug information and interface types for BFD on OSPF IPv6 packets.

Syntax `[no] debug ipv6 ospf bfd [interface]`
To cancel the debug command, use the `no debug ipv6 ospf` command.

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a tunnel interface, enter the keyword `tunnel` then a number. The range is from 1 to 16383.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following section describes the command fields.

Lines Beginning With or Including	Description
OSPFv3...	Debugging is on for all OSPFv3 packets and all interfaces.
05:21:01	Displays the time stamp.
Sending Ver:3	Sending OSPF3 version..

Example

```
Dell(conf-if-te-0/2)#do debug ipv6 ospf bfd te 0/2
OSPFv3 bfd related debugging is on for TenGigabitEthernet 0/2
00:59:26 : OSPFv3INFO: Received Interface mode bfd config command on interface
Te 0/2 Enable 1, interval 0, min_rx 0, Multiplier 0, role 0, Disable 0
00:59:26 : OSPFv3INFO: Enabling BFD on interface Te 0/2 Cmd Add Session
00:59:27 : OSPFv3INFO: Enabling BFD for NBRIP
fe80:0000:0000:0000:0201:e8ff:fe8b:7720
00:59:27 : OSPFv3INFO: Completed Enabling BFD on interface Te 0/2
00:59:27 : OSPFv3INFO: Completed Interface mode BFD configuration on Te 0/2!!
00:59:27 : OSPFv3INFO: Enabling BFD for NBRIP
fe80:0000:0000:0000:0201:e8ff:fe8b:7720
00:59:27 : OSPFv3INFO: Ospf3 register_bfd ospf key 27648
00:59:27 : OSPFv3INFO: OSPFV3 Enabling BFD for NBRIP
fe80:0000:0000:0000:0201:e8ff:fe8b:7720 Interface Te 0/2 IfIndex 34145282
00:59:27 : OSPFv3INFO: BFD parameters interval 100 min_rx 100 mult 3 role
active
00:59:27 : OSPFv3INFO: BFD parameters interval 100 min_rx 100 mult 3 role
active
00:59:27 : OSPFv3INFO: Completed Enabling BFD for NBRIP
fe80:0000:0000:0000:0201:e8ff:fe8b:7720
Aug 25 11:19:59: %STKUNIT0-M:CP %BFD_MGR-1-BFD_STATE_CHANGE: Changed session
state to Init for neighbor fe80::201:e8ff:fe8b:7720 on interface Te 0/2 (diag:
NBR_DN)
Aug 25 11:20:00: %STKUNIT0-M:CP %BFD_MGR-1-BFD_STATE_CHANGE: Changed session
state to Up for neighbor fe80::201:e8ff:fe8b:7720 on interface Te 0/2 (diag:
NO_DIAG)
00:59:45 : OSPFv3INFO: OSPFV3 got BFD msg
00:59:45 : OSPFv3INFO: Bfd Msg Type Up for interface Te 0/2
00:59:45 : OSPFv3INFO: OSPFV3 updating NBR state
```

debug ipv6 ospf events

Display debug information and interface types on OSPF IPv6 events.

Syntax `debug ipv6 ospf events [interface] [vrf vrf-name]`

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword `fortyGigE` then the slot/port information.
- For a port channel interface, enter the keywords `port-channel` then a number.

- For a VLAN interface, enter the keyword `vlan` then a number from 1 to 4094.

vrf vrf-name Enter the keyword `vrf` to view debugging information on OSPF corresponding to that VRF.

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the S6100-ON.
9.8(2.0)	Introduced on the S3100 series.
9.8(1.0)	Introduced on the Z9100-ON.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.2(1.0)	Introduced on the Z9500.
9.1(0.0)	Introduced on the S4810 and Z9000.
8.3.19.0	Introduced on the S4820T.
7.8.1.0	Added support for C-Series.
7.4.1.0	Introduced on E-Series.

Example

Example (detail)

Command Fields

Lines Beginning With or Including	Description
OSPFv3...	Debugging is on for all OSPFv3 packets and all interfaces.
05:21:01	Displays the time stamp.
Sending Ver:3	Sending OSPF3 version..
type:	Displays the type of packet sent: <ul style="list-style-type: none"> · 1 - Hello packet · 2 - database description · 3 - link state request · 4 - link state update · 5 - link state acknowledgement
Length:	Displays the OSPFv3 packet length.
Router ID:	Displays the OSPFv3 router ID.
Area ID:	Displays the OSPFv3 area ID.

Lines Beginning With or Including	Description
Chksum:	Displays the OSPFv3 checksum.

debug ipv6 ospf packet

Display debug information and interface types on OSPF IPv6 packets.

Syntax `debug ipv6 ospf packet [interface] [vrf vrf-name] [detail]`

Parameters

interface	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> then the slot/port information. For a port channel interface, enter the keywords <code>port-channel</code> then a number. For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.
vrf vrf-name	Enter the keyword <code>vrf</code> to view debugging information on OSPF corresponding to that VRF.
detail	Enter the keyword <code>detail</code> to view detailed debugging information.

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.13(0.0)	Added support for detailed debugging.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the S6100-ON.
9.8(2.0)	Introduced on the S3100 series.
9.8(1.0)	Introduced on the Z9100-ON.
9.8(0.0P5)	Introduced on the S4048-ON.
9.8(0.0P2)	Introduced on the S3048-ON.
9.2(1.0)	Introduced on the Z9500.
9.1(0.0)	Introduced on the S4810 and Z9000.
8.3.19.0	Introduced on the S4820T.
7.8.1.0	Added support for C-Series.
7.4.1.0	Introduced on E-Series.

Example

Example (detail)

Command Fields

Lines Beginning With or Including	Description
OSPFv3...	Debugging is on for all OSPFv3 packets and all interfaces.
05:21:01	Displays the time stamp.
Sending Ver:3	Sending OSPF3 version..
type:	Displays the type of packet sent: <ul style="list-style-type: none">• 1 - Hello packet• 2 - database description• 3 - link state request• 4 - link state update• 5 - link state acknowledgement
Length:	Displays the OSPFv3 packet length.
Router ID:	Displays the OSPFv3 router ID.
Area ID:	Displays the OSPFv3 area ID.
Chksum:	Displays the OSPFv3 checksum.

debug ipv6 ospf spf

Display debug information for SPF timers on OSPF IPv6 packets.

Syntax `[no] debug ipv6 ospf spf [vrf vrf-name]`

Parameters

interface	(OPTIONAL) Enter one of the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.• For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> then the slot/port information.• For a port channel interface, enter the keywords <code>port-channel</code> then a number.• For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.
vrf vrf-name	Enter the keyword <code>vrf</code> to view debugging information on OSPF corresponding to that VRF.

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11.0.0	Introduced the command.

Usage Information The following section describes the command fields.

Lines Beginning With or Including	Description
OSPFv3...	Debugging is on for all OSPFv3 packets and all interfaces.
05:21:01	Displays the time stamp.
Sending Ver:3	Sending OSPF3 version..

Example

default-information originate

Configure the system to generate a default external route into an OSPFv3 routing domain.

Syntax `default-information originate [always] [metric metric-value] [metric-type type-value] [route-map map-name]`

To return to the default values, use the `no default-information originate` command.

Parameters

always	(OPTIONAL) Enter the keyword <code>always</code> to specify that default route information must always be advertised.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number to configure a metric value for the route. The range is from 1 to 16777214.
metric-type <i>type-value</i>	(OPTIONAL) Enter the keywords <code>metric-type</code> then an OSPFv3 link state type of 1 or 2 for default routes. The values are: <ul style="list-style-type: none"> • 1 = Type 1 external route • 2 = Type 2 external route
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of an established route map.

Defaults Disabled.

Command Modes ROUTER OSPFv3

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

graceful-restart grace-period

Enable OSPFv3 graceful restart globally by setting the grace period (in seconds) that an OSPFv3 router's neighbors continues to advertise the router as adjacent during a graceful restart.

Syntax `graceful-restart grace-period seconds`

To disable OSPFv3 graceful restart, enter `no graceful-restart grace-period`.

Parameters

seconds	Time duration, in seconds, that specifies the duration of the restart process before OSPFv3 terminates the process. The range is from 40 to 1800 seconds.
----------------	---

Defaults OSPFv3 graceful restart is disabled and functions in a helper-only role.

Command Modes ROUTER OSPFv3

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, OSPFv3 graceful restart is disabled and functions only in a helper role to help restarting neighbor routers in their graceful restarts when it receives a Grace LSA.

To enable OSPFv3 graceful restart, enter the `ipv6 router ospf` command to enter OSPFv3 configuration mode and then configure a grace period using the `graceful-restart grace-period` command. The grace period is the length of time that OSPFv3 neighbors continue to advertise the restarting router as though it is fully adjacent. When graceful restart is enabled (restarting role), an OSPFv3 restarting expects its OSPFv3 neighbors to help when it restarts by not advertising the broken link.

When you enable the helper-reject role on an interface with the `ipv6 ospf graceful-restart helper-reject` command, you reconfigure OSPFv3 graceful restart to function in a "restarting-only" role. In a "restarting-only" role, OSPFv3 does not participate in the graceful restart of a neighbor.

graceful-restart mode

Specify the type of events that trigger an OSPFv3 graceful restart.

Syntax `graceful-restart mode {planned-only | unplanned-only}`

To disable graceful restart mode, enter `no graceful-restart mode`.

Parameters

planned-only	(OPTIONAL) Enter the keywords <code>planned-only</code> to indicate graceful restart is supported in a planned restart condition only.
unplanned-only	(OPTIONAL) Enter the keywords <code>unplanned-only</code> to indicate graceful restart is supported in an unplanned restart condition only.

Defaults OSPFv3 graceful restart supports both planned and unplanned failures.

Command Modes ROUTER OSPFv3

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

OSPFv3 graceful restart supports planned-only and/or unplanned-only restarts. The default is support for both planned and unplanned restarts.

- A planned restart occurs when you enter the `redundancy force-failover rpm` command to force the primary RPM to switch to the backup RPM. During a planned restart, OSPF sends out a Type-11 Grace LSA before the system switches over to the backup RPM.
- An unplanned restart occurs when an unplanned event causes the active RPM to switch to the backup RPM, such as when an active process crashes, the active RPM is removed, or a power failure happens. During an unplanned restart, OSPF sends out a Grace LSA when the backup RPM comes online.

By default, both planned and unplanned restarts trigger an OSPFv3 graceful restart. Selecting one or the other mode restricts OSPFv3 to the single selected mode.

ipv6 ospf area

Enable IPv6 OSPF on an interface.

Syntax

```
ipv6 ospf process id area area id
```

To disable OSPFv6 routing for an interface, use the `no ipv6 ospf process-id area area-id` command.

Parameters

process-id	Enter the process identification number.
area area-id	Specify the OSPF area. The range is from 0 to 65535.

Defaults none

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 ospf authentication

Enable IPv6 OSPF on an interface.

Syntax

```
ipv6 ospf authentication {null | ipsec spi number {MD5 | SHA1} [key-encryption-type] key}}
```

To remove an IPsec authentication policy from an interface, use the `no ipv6 ospf authentication spi number` command.

To remove null authentication on an interface to allow the interface to inherit the authentication policy configured for the OSPFv3 area, use the `no ipv6 ospf authentication null` command.

Parameters

null	Causes an authentication policy configured for the area to not be inherited on the interface.
<i>ipsec spi number</i>	Security Policy index (SPI) value that identifies an IPsec security policy. The range is from 256 to 4294967295.
MD5 SHA1	Authentication type: Message Digest 5 (MD5) or Secure Hash Algorithm 1 (SHA-1).
<i>key-encryption-type</i>	(OPTIONAL) Specifies if the key is encrypted. Valid values: 0 (key is not encrypted) or 7 (key is encrypted).
key	Text string used in authentication. For MD5 authentication, the key must be 32 hex digits (non-encrypted) or 64 hex digits (encrypted). For SHA-1 authentication, the key must be 40 hex digits (non-encrypted) or 80 hex digits (encrypted).

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Before you enable IPsec authentication on an OSPFv3 interface, first enable IPv6 unicast routing globally, configure an IPv6 address and enable OSPFv3 on the interface, and assign the interface to an area.

An SPI value must be unique to one IPsec security policy (authentication or encryption) on the router. Configure the same authentication policy (same SPI and key) on each OSPFv3 interface in a link.

ipv6 ospf bfd all-neighbors

Establish BFD sessions with all OSPFv3 neighbors on a single interface or use non-default BFD session parameters.

Syntax `ipv6 ospf bfd all-neighbors [disable | [interval interval min_rx min_rx multiplier value role {active | passive}]]`

To disable all BFD sessions on an OSPFv3 interface implicitly, use the `no ipv6 ospf bfd all-neighbors disable` command.

Parameters

disable	(OPTIONAL) Enter the keyword <code>disable</code> to disable BFD on this interface.
interval <i>milliseconds</i>	(OPTIONAL) Enter the keyword <code>interval</code> to specify non-default BFD session parameters beginning with the transmission interval. The range is from 50 to 1000. The default is 100.
min_rx <i>milliseconds</i>	Enter the keywords <code>min_rx</code> to specify the minimum rate at which the local system would like to receive control packets from the remote system. The range is from 50 to 100. The default is 100 .
multiplier <i>value</i>	Enter the keyword <code>multiplier</code> to specify the number of packets that must be missed in order to declare a session down. The range is from 3 to 50. The default is 3 .
role [active passive]	Enter the role that the local system assumes: <ul style="list-style-type: none">• active — The active system initiates the BFD session. Both systems can be active for the same session.• passive — The passive system does not initiate a session. It only responds to a request for session initialization from the active system. The default is Active .

Defaults See Parameters.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command provides the flexibility to fine-tune the timer values based on individual interface needs when you configure the `ipv6 ospf bfd` command in CONFIGURATION mode. Any timer values specified with this command overrides timers set using the `bfd all-neighbors` command. Using the `no` form of this command does not disable BFD if you configured BFD in CONFIGURATION mode.

To disable BFD on a specific interface while BFD is configured in CONFIGURATION mode, use the keyword `disable`.

ipv6 ospf cost

Explicitly specify the cost of sending a packet on an interface.

Syntax `ipv6 ospf interface-cost`

Parameters

interface-cost	Enter an unsigned integer value expressed as the link-state metric. The range is from 1 to 65535.
-----------------------	---

Defaults	Default cost based on the bandwidth.	
Command Modes	INTERFACE	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information In general, the path cost is calculated as:

$$10^8 / \text{bandwidth}$$

Using this formula, the default path cost is calculated as:

- TenGigabitEthernet—Default cost is 1
- Ethernet—Default cost is 10

ipv6 ospf dead-interval

Set the time interval since the last hello-packet was received from a router. After the time interval elapses, the neighboring routers declare the router down.

Syntax	<code>ipv6 ospf dead-interval <i>seconds</i></code>	
Parameters	<i>seconds</i>	Enter the time interval in seconds. The range is from 1 to 65535 seconds.

Defaults	40 seconds (Ethernet).	
Command Modes	INTERFACE	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the dead interval is four times longer than the default `ipv6 ospf hello-interval` command.

ipv6 ospf encryption

Configure an IPsec encryption policy for OSPFv3 packets on an IPv6 interface.

Syntax	<code>ipv6 ospf encryption {null ipsec spi number esp encryption-algorithm [key-encryption-type] key authentication-algorithm [key-encryption-type] key}}</code>	
	To remove an IPsec encryption policy from an interface, use the <code>no ipv6 ospf encryption spi number</code> command.	

To remove null authentication on an interface to allow the interface to inherit the authentication policy configured for the OSPFv3 area, use the `no ipv6 ospf encryption null` command.

Parameters

null	Causes an encryption policy configured for the area to not be inherited on the interface.
<i>ipsec spi number</i>	Security Policy index (SPI) value that identifies an IPsec security policy. The range is from 256 to 4294967295.
<i>esp encryption-algorithm</i>	Encryption algorithm used with ESP. Valid values are: 3DES, DES, AES-CBC, and NULL. For AES-CBC, only the AES-128 and AES-192 ciphers are supported.
<i>key-encryption-type</i>	(OPTIONAL) Specifies if the key is encrypted. Valid values: 0 (key is not encrypted) or 7 (key is encrypted).
<i>key</i>	Text string used in authentication. The required lengths of a non-encrypted or encrypted key are: 3DES - 48 or 96 hex digits; DES - 16 or 32 hex digits; AES-CBC -32 or 64 hex digits for AES-128 and 48 or 96 hex digits for AES-192.
<i>authentication-algorithm</i>	Specifies the authentication algorithm to use for encryption. Valid values are MD5 or SHA1.
<i>key-encryption-type</i>	(OPTIONAL) Specifies if the authentication key is encrypted. Valid values: 0 (key is not encrypted) or 7 (key is encrypted).
<i>key</i>	Text string used in authentication. For MD5 authentication, the key must be 32 hex digits (non-encrypted) or 64 hex digits (encrypted). For SHA-1 authentication, the key must be 40 hex digits (non-encrypted) or 80 hex digits (encrypted).

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Before you enable IPsec encryption on an OSPFv3 interface, first enable IPv6 unicast routing globally, configure an IPv6 address and enable OSPFv3 on the interface, and assign the interface to an area.

An SPI value must be unique to one IPsec security policy (authentication or encryption) on the router. Configure the same encryption policy (same SPI and key) on each OSPFv3 interface in a link.

ipv6 ospf graceful-restart helper-reject

Configure an OSPFv3 interface to not act upon the Grace LSAs that it receives from a restarting OSPFv3 neighbor.

Syntax `ipv6 ospf graceful-restart helper-reject`
To disable the helper-reject role, use the `no ipv6 ospf graceful-restart helper-reject` command.

Defaults The helper-reject role is not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Command By default, OSPFv3 graceful restart is disabled and functions only in a helper role to help restarting neighbor routers in their graceful restarts when it receives a Grace LSA.

When configured in a helper-reject role, an OSPFv3 router ignores the Grace LSAs that it receives from a restarting OSPFv3 neighbor.

The graceful-restart role command is not supported in OSPFv3. When you enable the helper-reject role on an interface, you reconfigure an OSPFv3 router to function in a “restarting-only” role.

ipv6 ospf hello-interval

Specify the time interval between the hello packets sent on the interface.

Syntax `ipv6 ospf hello-interval seconds`

Parameters

seconds Enter the time interval in seconds as the time between hello packets. The range is from 1 to 65525 seconds.

Defaults 10 seconds (Ethernet).

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The time interval between hello packets must be the same for routers in a network.

ipv6 ospf priority

To determine the Designated Router for the OSPFv3 network, set the priority of the interface.

Syntax `ipv6 ospf priority number`
To return to the default time interval, use the `no ipv6 ospf priority` command.

Parameters *number* Enter the number as the priority. The range is from 1 to 255.

Defaults 1

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Setting a priority of 0 makes the router ineligible for election as a Designated Router or Backup Designated Router.
Use this command for interfaces connected to multi-access networks, not point-to-point networks.

ipv6 router ospf

Enable OSPF for IPv6 router configuration.

Syntax `ipv6 router ospf process-id`
To exit OSPF for IPv6, use the `no ipv6 router ospf process-id` command.

Parameters *process-id* Enter the process identification number. The range is from 1 to 65535.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

maximum-paths

Enable the software to forward packets over multiple paths.

Syntax	<code>maximum-paths <i>number</i></code> To disable packet forwarding over multiple paths, use the <code>no maximum-paths</code> command.								
Parameters	<table><tr><td><i>number</i></td><td>Specify the number of paths. The range is from 1 to 64. The default is 8 paths.</td></tr></table>	<i>number</i>	Specify the number of paths. The range is from 1 to 64. The default is 8 paths.						
<i>number</i>	Specify the number of paths. The range is from 1 to 64. The default is 8 paths.								
Defaults	4								
Command Modes	ROUTER OSPF for OSPFv3								
Supported Modes	Full-Switch								
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.2(0.0)</td><td>Added support for OSPFv3.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Added support for OSPFv3.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description								
9.9(0.0)	Introduced on the FN IOM.								
9.2(0.0)	Added support for OSPFv3.								
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.								

passive-interface

Disable (suppress) sending routing updates on an interface.

Syntax	<code>passive-interface {default <i>interface</i>}</code> To enable sending routing updates on an interface, use the <code>no passive-interface <i>interface</i></code> command. To return all OSPF interfaces (current and future) to active, use the <code>no passive-interface default</code> command.				
Parameters	<table><tr><td>Default</td><td>Enter the keyword <code>default</code> to make all OSPF interfaces (current and future) passive.</td></tr><tr><td><i>interface</i></td><td>Enter the following keywords and slot/port or number information:<ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.</td></tr></table>	Default	Enter the keyword <code>default</code> to make all OSPF interfaces (current and future) passive.	<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
Default	Enter the keyword <code>default</code> to make all OSPF interfaces (current and future) passive.				
<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.				
Command Modes	ROUTER OSPF for OSPFv2 ROUTER OSPFv3 for OSPFv3				
Supported Modes	Full-Switch				

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Added support for OSPFv3.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

By default, no interfaces are *passive*. Routing updates are sent to all interfaces on which the routing protocol is enabled.

If you disable the sending of routing updates on an interface, the particular address prefix continues to be advertised to other interfaces, and updates from other routers on that interface continue to be received and processed.

OSPFv3 for IPv6 routing information is not sent or received through the specified router interface. The specified interface address appears as a stub network in the OSPFv3 for IPv6 domain.

redistribute

Redistribute information from another routing protocol into OSPFv3 throughout the OSPF process.

Syntax

```
redistribute {bgp as number}{connected | static}[metric metric-value | metric-type type-value] [route-map map-name] [tag tag-value]
```

To disable redistribution, use the `no redistribute {connected | static}` command.

Parameters

bgp as number	Enter the keyword <code>bgp</code> then the autonomous system number. The range is from 1 to 65535.
connected	Enter the keyword <code>connected</code> to redistribute routes from physically connected interfaces.
static	Enter the keyword <code>static</code> to redistribute manually configured routes.
metric metric-value	Enter the keyword <code>metric</code> then the metric value. The range is from 0 to 16777214. The default is 20 .
metric-type type-value	(OPTIONAL) Enter the keywords <code>metric-type</code> then the OSPFv3 link state type of 1 or 2 for default routes. The values are: <ul style="list-style-type: none">· 1 for a type 1 external route· 2 for a type 2 external route The default is 2 .

route-map *map-name* (OPTIONAL) Enter the keywords `route-map` then the name of an established route map. If the route map is not configured, the default is **deny** (to drop all routes).

tag *tag-value* (OPTIONAL) Enter the keyword `tag` to set the tag for routes redistributed into OSPFv3.
The range is from 0 to 4294967295
The default is **0**.

Defaults Not configured.

Command Modes ROUTER OSPF for OSPFv2

ROUTER OSPFv3 for OSPFv3

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Added support for OSPFv3.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To redistribute the default route (x:x:x:x), use the `default-information originate` command.

Related Commands [default-information originate](#) — generates a default route into the OSPF routing domain.

router-id

Designate a fixed router ID.

Syntax `router-id ip-address`
To return to the previous router ID, use the `no router-id ip-address` command.

Parameters ***ip-address*** Enter the router ID in the dotted decimal format.

Defaults The router ID is selected automatically from the set of IPv4 addresses configured on a router.

Command Modes ROUTER OSPFv3 for OSPFv3

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Added support for OSPFv3.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can configure an arbitrary value in the IP address for each router. However, each router ID must be unique.

If this command is used on an OSPFv3 process that is already active (has neighbors), all the neighbor adjacencies are brought down immediately and new sessions are initiated with the new router ID.

Example

```
Dell(conf)#router ospf 100
Dell(conf-router_ospf)#router-id 1.1.1.1
Changing router-id will bring down existing OSPF adjacency [y/n]:

Dell(conf-router_ospf)#show config
!
router ospf 100
router-id 1.1.1.1
Dell(conf-router_ospf)#no router-id
Changing router-id will bring down existing OSPF adjacency [y/n]:
Dell#
```

show crypto ipsec policy

Display the configuration of IPsec authentication and encryption policies.

Syntax `show crypto ipsec policy [name name]`

Parameters `name name` (OPTIONAL) Displays configuration details about a specified policy.

Defaults none

Command Modes EXEC

EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `show crypto ipsec policy` command output displays the AH and ESP parameters configured in IPsec security policies, including the SPI number, keys, and algorithms used.

When configured in a helper-reject role, an OSPFv3 router ignores the Grace LSAs that it receives from a restarting OSPFv3 neighbor.

show crypto ipsec sa ipv6

Display the IPsec security associations (SAs) used on OSPFv3 interfaces.

Syntax `show crypto ipsec sa ipv6 [interface interface]`

Parameters	interface <i>interface</i>	(OPTIONAL) Displays information about the SAs used on a specified OSPFv3 interface, where <i>interface</i> is one of the following values: <ul style="list-style-type: none"> • For a Port Channel interface, enter <code>port-channel</code> then the port channel number. • For a 10-Gigabit Ethernet interface, enter <code>TenGigabitEthernet</code> then the slot/port number. • For a VLAN interface, enter <code>vlan <i>vlan-id</i></code>. The valid VLAN IDs range is from 1 to 4094. 						
Defaults	none							
Command Modes	EXEC EXEC Privilege							
Supported Modes	Full-Switch							
Command History	<table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.2(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.	
Version	Description							
9.9(0.0)	Introduced on the FN IOM.							
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.							
Usage Information	The <code>show crypto ipsec sa ipv6</code> command output displays security associations set up for OSPFv3 links in IPsec authentication and encryption policies on the router.							

show ipv6 ospf database

Display information in the OSPFv3 database, including link-state advertisements (LSAs).

Syntax	<code>show ipv6 ospf database [database-summary grace-lsa]</code>					
Parameters	database-summary	(OPTIONAL) Enter the keywords <code>database-summary</code> to view a summary of database LSA information.				
	grace-lsa	(OPTIONAL): Enter the keywords <code>grace-lsa</code> to display the Type-11 Grace LSAs sent and received on an OSPFv3 router.				
Defaults	none					
Command Modes	EXEC EXEC Privilege					
Supported Modes	Full-Switch					
Command History	<table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	
Version	Description					
9.9(0.0)	Introduced on the FN IOM.					

Version	Description
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information The `show crypto ipsec sa ipv6` command output displays security associations set up for OSPFv3 links in IPsec authentication and encryption policies on the router.

show ipv6 ospf interface

View OSPFv3 interface information.

Syntax `show ipv6 ospf [interface]`

Parameters

interface (OPTIONAL) Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` and the slot/port information.
- For a Port Channel interface, enter the keywords `port-channel` and a number. The range is from 1 to 128.
- For a Tunnel interface, enter the keywords `tunnel` and a number. The range is from 1 to 16383.
- For a VLAN, enter the keyword `vlan` and a number from 1 to 4094.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information If you enable BFD at the global level, `show ipv6 ospf interface` shows the BFD provisioning.

If you enable BFD at the interface level, `show ipv6 ospf interface` shows the BFD interval timers.

Example

```
Dell#show ipv6 ospf interface Tengigabitethernet 1/0
TenGigabitEthernet 1/0 is up, line protocol is up
  Link Local Address fe80::201:e8ff:fe17:5bbd, Interface ID 67420217
  Area 0, Process ID 1, Instance ID 0, Router ID 11.1.1.1
  NetworkType BROADCAST, Cost: 1, Passive: No
  Transmit Delay is 100 sec, State DR, Priority 1
  Interface is using OSPF global mode BFD configuration.
  Designated router on this network is 11.1.1.1 (local)
  No backup designated router on this network
  Timer intervals configured, Hello 10, Dead 40, Wait 1, Retransmit 5
Dell#
```

show ipv6 ospf neighbor

Display the OSPF neighbor information on a per-interface basis.

Syntax `show ipv6 ospf neighbor [interface]`

Parameters *interface* (OPTIONAL) Enter the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a VLAN, enter the keyword `vlan` then the VLAN ID. The range is 1 to 4094.

Defaults none

Command Modes EXEC
EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.

timers spf

Set the time interval between when the switch receives a topology change and starts a shortest path first (SPF) calculation.

Syntax `timers spf delay holdtime msec`
To return to the default, use the `no timers spf` command.

Parameters

delay Enter a number as the delay. The range is from 0 to 2147483647. The default is **5 seconds**.

holdtime Enter a number as the hold time. The range is from 0 to 2147483647. The default is **10 seconds**.

msec Enter the keyword `msec` to specify the time interval value in milli seconds.

NOTE: If you do not specify the `msec` option, the timer values are considered as seconds.

Defaults

- delay = 5 seconds
- holdtime = 10 seconds

Command Modes ROUTER OSPFv3 for OSPFv3

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.11(0.0)	Introduced the <code>msec</code> keyword.
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Setting the *delay* and *holdtime* parameters to a low number enables the switch to an alternate path quickly but requires more CPU usage.

Example

```
Dell#
Dell#conf
Dell(conf)#ipv6 router ospf 1
Dell(conf-ipv6-router_ospf)#timer spf 2 5 msec
Dell(conf-ipv6-router_ospf)#
Dell(conf-ipv6-router_ospf)#show config
!
ipv6 router ospf 1
timers spf 2 5 msec
Dell(conf-ipv6-router_ospf)#
Dell(conf-ipv6-router_ospf)#end
Dell#
```

Policy-based Routing (PBR)

Policy-based routing (PBR) allows you to apply routing policies to specific interfaces. To enable PBR, create a redirect list and apply it to the interface. After the redirect list is applied to the interface, all traffic passing through the interface is subject to the rules defined in the redirect list. PBR is supported by the Dell Networking operating software (OS).

You can apply PBR to physical interfaces and logical interfaces (such as a link aggregation group [LAG] or virtual local area network [VLAN]). Trace lists and redirect lists do not function correctly when you configure both in the same configuration.

NOTE: Apply PBR to Layer 3 interfaces only.

Topics:

- [description](#)
- [ip redirect-group](#)
- [ip redirect-list](#)
- [permit](#)
- [redirect](#)
- [seq](#)
- [show cam pbr](#)
- [show ip redirect-list](#)

description

Add a description to this redirect list.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters *description* Enter a description to identify the IP redirect list (16 characters maximum).

Defaults none

Command Modes REDIRECT-LIST

Supported Modes Full—Switch

Command History	
Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip redirect-list](#) – enables an IP Redirect List.

ip redirect-group

Apply a redirect list (policy-based routing) on an interface. You can apply multiple redirect lists to an interface by entering this command multiple times.

Syntax `ip redirect-group redirect-list-nametest [l2-switch]`
To remove a redirect list from an interface, use the `no ip redirect-group name` command.

Parameters

<i>redirect-list-name</i>	Enter the name of a configured redirect list.
<i>l2-switch</i>	Enter the keyword <code>l2-switch</code> to enable PBR on Layer2 (switched) traffic.

Defaults none

Command Modes INTERFACE (conf-if-vl-)

Supported Modes Full—Switch

Command History

Version	Description
9.11(2.0)	Introduced the <code>l2-switch</code> attribute.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
8.4.2.1	Introduced on the C-Series and S-Series.
8.4.2.0	Introduced on the E-Series TeraScale.
7.4.2.0	Added support for LAG and VLAN interfaces.
7.7.1.0	Introduced on the E-Series ExaScale.

Usage Information

You can apply any number of redirect-groups to an interface. A redirect list can contain any number of configured rules. These rules includes the next-hop IP address where the incoming traffic is to be redirected.

If the next hop address is reachable, traffic is forwarded to the specified next hop. Otherwise, the normal routing table is used to forward traffic. When a redirect-group is applied to an interface and the next-hop is reachable, the rules are added into the PBR CAM region. When incoming traffic hits an entry in the CAM, the traffic is redirected to the corresponding next-hop IP address specified in the rule.

NOTE: Apply the redirect list to physical, VLAN, or LAG interfaces only.

The Layer2 PBR option matches the layer2 traffic flow. If you un-configure this option, then the Layer2 traffic is not matched. You can apply the `l2-switch` option to redirect Layer2 traffic only on a VLAN interface. This VLAN interface must be configured with an IP address for ARP resolution.

NOTE: The `l2-switch` option that redirects Layer2 traffic is applicable only on VLAN interfaces.

The Layer3 routing is not affected on the same interface on which Layer2 PBR is applied. The port from which Layer2 packets egress and the destination MAC are re-written from static ARP. Layer 2 packets with the re-written destination MAC are forwarded through the outgoing port on the same incoming VLAN interface. The `layer2-switch` option ensures that the outgoing VLAN and MAC-SA are changed and TTL is not decremented.

Related Commands

- `show cam pbr` – displays the content of the PBR CAM.

- [show ip redirect-list](#) – displays the redirect-list configuration.

ip redirect-list

Configure a redirect list and enter REDIRECT-LIST mode.

Syntax `ip redirect-list redirect-list-name`
 To remove a redirect list, use the `no ip redirect-list` command.

Parameters `redirect-list-name` Enter the name of a redirect list.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
	8.4.2.1	Introduced on the C-Series and S-Series.
	8.4.2.0	Introduced on the E-Series TeraScale.
	6.5.3.0	Introduced on the E-Series ExaScale.

permit

Configure a permit rule. A permit rule excludes the matching packets from PBR classification and routes them using conventional routing.

Syntax `permit {ip-protocol-number | protocol-type} {source mask | any | host ip-address} {destination mask | any | host ip-address} [bit] [operators]`

To remove the rule, use one of the following:

- If you know the filter sequence number, use the `no seq sequence-number syntax` command.
- You can also use the `no permit {ip-protocol-number | protocol-type} {source mask | any | host ip-address} {destination mask | any | host ip-address} [bit] [operators]` command.

Parameters `ip-protocol-number` Enter a number from 0 to 255 for the protocol identified in the IP protocol header.

`protocol-type` Enter one of the following keywords as the protocol type:

- `icmp` for internet control message protocol
- `ip` for any internet protocol
- `tcp` for transmission control protocol
- `udp` for user datagram protocol

`source` Enter the IP address of the network or host from which the packets were sent.

mask	Enter a network mask in /prefix format (/x).
any	Enter the keyword <code>any</code> to specify that all traffic is subject to the filter.
host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
bit	(OPTIONAL) For the TCP protocol type only, enter one or a combination of the following TCP flags: <ul style="list-style-type: none"> • <code>ack</code> = acknowledgement • <code>fin</code> = finish (no more data from the user) • <code>psh</code> = push function • <code>rst</code> = reset the connection • <code>syn</code> = synchronize sequence number • <code>urg</code> = urgent field
operator	(OPTIONAL) For TCP and UDP parameters only. Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the <code>portcommand</code> parameter.)

Defaults	none
Command Modes	REDIRECT-LIST
Supported Modes	Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
	8.4.2.1	Introduced on the C-Series and S-Series.
	8.4.2.0	Introduced on the E-Series TeraScale.
	7.5.1.0	Introduced on the E-Series ExaScale.

redirect

Configure a rule for the redirect list.

Syntax

```
redirect {ip-address | slot/port} | tunnel tunnel-id}[track <obj-id>]{ip-protocol-number | protocol-type [bit]} {source mask | any | host ip-address} {destination mask | any | host ip-address} [operator]
```

To remove this filter, use one of the following:

- Use the `no seq sequence-number` command if you know the filter's sequence number.

- You can also use the `no redirect {ip-address | slot/port} | tunnel tunnel-id [track <obj-id>] {ip-protocol-number [bit] | protocol-type} {source mask | any | host ip-address} {destination mask | any | host ip-address} [operator]` command.

Parameters

<i>ip-address</i>	Enter the IP address of the forwarding router.
<i>slot/port</i>	Enter the keyword <code>slot / port</code> followed by the slot/port information.
<i>ip-protocol-number</i>	Enter a number from 0 to 255 for the protocol identified in the IP protocol header.
<i>tunnel</i>	Enter the keyword <code>tunnel</code> to configure the tunnel setting.
<i>tunnel-id</i>	Enter the keyword <code>tunnel-id</code> to redirect the traffic.
<i>track</i>	Enter the keyword <code>track</code> to enable the tracking.
<i>track <obj-id></i>	Enter the keyword <code>track <obj-id></code> to track object-id.
<i>protocol-type</i>	Enter one of the following keywords as the protocol type: <ul style="list-style-type: none"> · <code>icmp</code> for internet control message protocol · <code>ip</code> for any internet protocol · <code>tcp</code> for transmission control protocol · <code>udp</code> for user datagram protocol
<i>bit</i>	(OPTIONAL) For the TCP protocol type only, enter one or a combination of the following TCP flags: <ul style="list-style-type: none"> · <code>ack</code> = acknowledgement · <code>fin</code> = finish (no more data from the user) · <code>psh</code> = push function · <code>rst</code> = reset the connection · <code>syn</code> = synchronize sequence number · <code>urg</code> = urgent field
<i>source</i>	Enter the IP address of the network or host from which the packets were sent.
<i>mask</i>	Enter a network mask in /prefix format (/x).
<i>any</i>	Enter the keyword <code>any</code> to specify that all traffic is subject to the filter.
<i>host ip-address</i>	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
<i>destination</i>	Enter the IP address of the network or host to which the packets are sent.
<i>operator</i>	(OPTIONAL) For TCP and UDP parameters only. Enter one of the following logical operand: <ul style="list-style-type: none"> · <code>eq</code> = equal to · <code>neq</code> = not equal to · <code>gt</code> = greater than · <code>lt</code> = less than · <code>range</code> = inclusive range of ports (you must specify two ports for the <code>port</code> command parameter.)

Defaults

none

Command Modes	REDIRECT-LIST
Supported Modes	Full—Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Added the keyword <code>track-id</code> on the MXL.
9.4(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
8.4.2.1	Introduced on the C-Series.
8.4.2.0	Introduced on the E-Series TeraScale.

seq

Configure a filter with an assigned sequence number for the redirect list.

Syntax

```
seq sequence-number {permit | redirect {ip-address | tunnel tunnel-id}[track <obj-id>] }}{ip-protocol-number | protocol-type} {source mask | any | host ip-address} {destination mask | any | host ip-address} [bit] [operator]{source-port source-port| source-port-range start-port - end-port} {destination-port destination-port| destination-port-range start-port - end-port}
```

To delete a filter, use the `no seq sequence-number` command.

Parameters

sequence-number	Enter a number from 1 to 65535.
permit	Enter the keyword <code>permit</code> assign the sequence to the permit list.
redirect	Enter the keyword <code>redirect</code> to assign the sequence to the redirect list.
ip-address	Enter the IP address of the forwarding router.
tunnel	Enter the keyword <code>tunnel</code> to configure the tunnel setting.
tunnel-id	Enter the keyword <code>tunnel-id</code> to redirect the traffic.
track	Enter the keyword <code>track</code> to enable the tracking.
track <obj-id>	Enter the keyword <code>track <obj-id></code> to track object-id.
ip-protocol-number	Enter the keyword <code>ip-protocol-number</code> then the number from 0 to 255 for the protocol identified in the IP protocol header.
protocol-type	Enter one of the following keywords as the protocol type: <ul style="list-style-type: none"> <code>icmp</code> for internet control message protocol <code>ip</code> for any internet protocol <code>tcp</code> for transmission control protocol <code>udp</code> for user datagram protocol
source	Enter the IP address of the network or host from which the packets were sent.
mask	Enter a network mask in /prefix format (/x).
any	Enter the keyword <code>any</code> to specify that all traffic is subject to the filter.

host ip-address	Enter the keyword <code>host</code> then the IP address to specify a host IP address.
destination	Enter the IP address of the network or host to which the packets are sent.
bit	(OPTIONAL) For the TCP protocol type only, enter one or a combination of the following TCP flags: <ul style="list-style-type: none"> • <code>ack</code> = acknowledgement • <code>fin</code> = finish (no more data from the user) • <code>push</code> = push function • <code>rst</code> = reset the connection • <code>syn</code> = synchronize sequence number • <code>urg</code> = urgent field
operator	(OPTIONAL) For the TCP and UDP parameters only. Enter one of the following logical operand: <ul style="list-style-type: none"> • <code>eq</code> = equal to • <code>neq</code> = not equal to • <code>gt</code> = greater than • <code>lt</code> = less than • <code>range</code> = inclusive range of ports (you must specify two ports for the port command parameter.)
source port	Enter the keywords <code>source-port</code> then the port number to be matched in the ACL rule in the ICAP rule
destination-port	Enter the keywords <code>destination-port</code> then the port number to be matched in the ACL rule in the ICAP rule.
source-port-range	Enter the keywords <code>source-port-range</code> then the range of the start port to end port to be matched in the ACL rule in the ICAP rule.
destination-port-range	Enter the keywords <code>destination-port-range</code> then the range of the start port to end port to be matched in the ACL rule in the ICAP rule.

Defaults	none
Command Modes	REDIRECT-LIST
Supported Modes	Full—Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Added support for the <code>track-id</code> on the MXL.
9.4(0.0)	Added support for removing the Sonet interface on the MXL 10/40GbE Switch IO Module.

show cam pbr

Displays the PBR CAM content.

Syntax `show cam pbr {[interface interface] | stack-unit slot-number port-set number]} [summary]`

Parameters

- interface *interface*** Enter the keyword `interface` then the name of the interface.
- stack-unit *number*** Enter the keyword `stack-unit` then the slot number. The range is from 0 to 11.
- port-set *number*** Enter the keywords `port-set` then the port-pipe number. The range is from 0 to 0.
- summary** Enter the keyword `summary` to view only the total number of CAM entries.

Defaults none

Command Modes EXEC

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for removing the Sonet interface on the MXL 10/40GbE Switch IO Module.
7.4.1.0	Introduced.

Usage Information The `show cam pbr` command displays the PBR CAM content.

Example

```
Dell#show cam pbr stack-unit 0 po 0
TCP Flag: Bit 5 - URG, Bit 4 - ACK, Bit 3 - PSH, Bit 2 - RST,
Bit 1 - SYN, Bit 0 - FIN
Cam Port VlanID Proto Tcp Src Dst SrcIp DstIp Next-hop Egress
      Flag Port Port
MAC      Port
-----
00000 5 N/A IP 0x0 0 0 22.22.2.22/32 33.33.3.0/24
0:01:e8:8a:fd:76 0/0
00001 5 N/A 145 0x0 0 0 0.0.0.0/0 44.4.4.4/32
0:01:e8:8a:fd:76 V1 100(0/1)
00002 5 N/A TCP 0x0 0 0 55.1.3.0/24 66.6.6.6/32
0:01:e8:8a:fd:76 Po 128
00003 5 N/A UDP 0x0 0 0 55.1.3.0/24 66.6.6.6/32
0:01:e8:8a:fd:76 Po 128
00004 5 N/A IP 0x0 0 0 0.0.0.0/0 0.0.0.0/0
0:01:e8:8a:fd:76 V1 1020(Po 100)
Dell#
```

Related Commands

- [ip redirect-group](#) – applies a redirect group to an interface.
- [show ip redirect-list](#) – displays the redirect-list configuration.
- [show cam-usage](#) – displays the CAM usage on ACL, router, or switch.

show ip redirect-list

View the redirect list configuration and the interfaces it is applied to.

Syntax `show ip redirect-list redirect-list-name`

Parameters

redirect-list-name Enter the name of a configured Redirect list.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for removing the Sonet interface on the MXL.
7.4.1.0	Introduced.

Example

```
Dell#show ip redirect-list explicit_tunnel
IP redirect-list explicit_tunnel:
Defined as:
seq 5 redirect tunnel 1 track 1 tcp 155.55.2.0/24 222.22.2.0/24,
  Track 1 [up], Next-hop reachable (via Te 1/32)
seq 10 redirect tunnel 1 track 1 tcp any any,
  Track 1 [up], Next-hop reachable (via Te 1/32)
seq 15 redirect tunnel 2 udp 155.55.0.0/16 host 144.144.144.144,
  Track 1 [up], Next-hop reachable (via Te 1/32)
seq 35 redirect 155.1.1.2 track 5 ip 7.7.7.0/24 8.8.8.0/24,
  Track 5 [up], Next-hop reachable (via Po 5)
seq 30 redirect 155.1.1.2 track 6 icmp host 8.8.8.8 any,
  Track 5 [up], Next-hop reachable (via Po 5)
seq 35 redirect 42.1.1.2 icmp host 8.8.8.8 any,
  Next-hop reachable (via Vl 20)
seq 40 redirect 43.1.1.2 tcp 155.55.2.0/24 222.22.2.0/24,
  Next-hop reachable (via Vl 30)
seq 45 redirect 31.1.1.2 track 200 ip 12.0.0.0 255.0.0.197 13.0.0.0
  255.0.0.197, Track 200 [up], Next-hop reachable (via Te 1/9)
hop reachable (via Vl 20) , Track 200 [up], Next-
hop reachable (via Po 5) , Track 200 [up], Next-
hop reachable (via Po 7) , Track 200 [up], Next-
hop reachable (via Te 1/10) , Track 200 [up], Next-
hop reachable (via Te 2/11) , Track 200 [up], Next-
```

PIM-Sparse Mode (PIM-SM)

The protocol-independent multicast (PIM) commands are supported by the Dell Networking Operating System (OS).

This chapter contains the following sections:

- [IPv4 PIM-Sparse Mode Commands](#)
- [IPv6 PIM-Sparse Mode Commands](#)

Topics:

- [IPv4 PIM-Sparse Mode Commands](#)
- `clear ip pim rp-mapping`
- `clear ip pim tib`
- `debug ip pim`
- `ip pim bsr-border`
- `ip pim bsr-candidate`
- `ip pim dr-priority`
- `ip pim join-filter`
- `ip pim ingress-interface-map`
- `ip pim neighbor-filter`
- `ip pim query-interval`
- `ip pim register-filter`
- `ip pim rp-address`
- `ip pim rp-candidate`
- `ip pim sparse-mode`
- `ip pim sparse-mode sg-expiry-timer`
- `ip pim spt-threshold`
- `no ip pim snooping dr-flood`
- `show ip pim bsr-router`
- `show ip pim interface`
- `show ip pim neighbor`
- `show ip pim rp`
- `show ip pim snooping interface`
- `show ip pim snooping neighbor`
- `show ip pim snooping tib`
- `show ip pim summary`
- `show ip pim tib`
- `show running-config pim`
- [IPv6 PIM-Sparse Mode Commands](#)
- `ipv6 pim bsr-border`
- `ipv6 pim bsr-candidate`
- `ipv6 pim dr-priority`

- [ipv6 pim join-filter](#)
- [ipv6 pim query-interval](#)
- [ipv6 pim neighbor-filter](#)
- [ipv6 pim register-filter](#)
- [ipv6 pim rp-address](#)
- [ipv6 pim rp-candidate](#)
- [ipv6 pim sparse-mode](#)
- [ipv6 pim spt-threshold](#)
- [show ipv6 pim bsr-router](#)
- [show ipv6 pim interface](#)
- [show ipv6 pim neighbor](#)
- [show ipv6 pim rp](#)
- [show ipv6 pim tib](#)

IPv4 PIM-Sparse Mode Commands

The following describes the IPv4 PIM-sparse mode (PIM-SM) commands.

clear ip pim rp-mapping

The bootstrap router (BSR) feature uses this command to remove all or particular rendezvous point (RP) advertisement.

Syntax `clear ip pim rp-mapping rp-address`

Parameters `rp-address` (OPTIONAL) Enter the RP address in dotted decimal format (A.B.C.D).

Command Modes EXEC Privilege

Supported Modes Full—Switich

Command History	
Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip pim tib

Clear PIM tree information from the PIM database.

Syntax `clear ip pim tib [group]`

Parameters `group` (OPTIONAL) Enter the multicast group address in dotted decimal format (A.B.C.D).

Command Modes EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you use this command on a local VLT node, all multicast routes from the local PIM TIB, the entire multicast route table, and all the entries in the data plane are deleted. The local VLT node sends a request to the peer VLT node to download multicast routes learned by the peer. Both local and synced routes are removed from the local VLT node multicast route table. The peer VLT node clears synced routes from the node.

If you use this command on a peer VLT node, only the synced routes are deleted from the multicast route table.

debug ip pim

View IP PIM debugging messages.

Syntax

```
debug ip pim [bsr | events | group | packet [in | out] | register | state | timer [assert | hello | joinprune | register]]
```

To disable PIM debugging, use the `no debug ip pim` command or use the `undebg all` to disable all the debugging commands.

Parameters

bsr	(OPTIONAL) Enter the keyword <code>bsr</code> to view PIM Candidate RP/BSR activities.
events	(OPTIONAL) Enter the keyword <code>group</code> to view PIM messages for a specific group.
group	(OPTIONAL) Enter the keyword <code>group</code> to view PIM messages for a specific group.
packet [in out]	(OPTIONAL) Enter the keyword <code>packet</code> to view PIM packets. Enter one of the optional parameters: <ul style="list-style-type: none"><code>in</code>: to view incoming packets<code>out</code>: to view outgoing packets
register	(OPTIONAL) Enter the keyword <code>register</code> to view PIM register address in dotted decimal format (A.B.C.D).
state	(OPTIONAL) Enter the keyword <code>state</code> to view PIM state changes.
timer [assert hello joinprune register]	(OPTIONAL) Enter the keyword <code>timer</code> to view PIM timers. Enter one of the optional parameters: <ul style="list-style-type: none"><code>assert</code>: to view the assertion timer<code>hello</code>: to view the PIM neighbor keepalive timer<code>joinprune</code>: to view the expiry timer (join/prune timer)<code>register</code>: to view the register suppression timer

Defaults

Disabled.

Command Modes

EXEC Privilege

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip pim bsr-border

Define the border of PIM domain by filtering inbound and outbound PIM-BSR messages per interface.

Syntax `ip pim bsr-border`
To return to the default value, use the `no ip pim bsr-border` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is applied to the subsequent PIM-BSR. Existing BSR advertisements are cleaned up by time-out. To clean the candidate RP advertisements, use the `clear ip pim rp-mapping` command.

ip pim bsr-candidate

To join the Bootstrap election process, configure the PIM router.

Syntax `ip pim bsr-candidate interface [hash-mask-length] [priority]`
To return to the default value, use the `no ip pim bsr-candidate` command.

Parameters

interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
hash-mask-length	(OPTIONAL) Enter the hash mask length. The range is from zero (0) to 32. The default is 30 .
priority	(OPTIONAL) Enter the priority used in Bootstrap election process. The range is from zero (0) to 255. The default is zero (0) .

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip pim dr-priority

Change the designated router (DR) priority for the interface.

Syntax `ip pim dr-priority priority-value`
To remove the DR priority value assigned, use the `no ip pim dr-priority` command.

Parameters

<i>priority-value</i>	Enter a number. Preference is given to larger/higher number. The range is from 0 to 4294967294. The default is 1.
------------------------------	---

Defaults 1

Command Modes INTERFACE

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The router with the largest value assigned to an interface becomes the designated router. If two interfaces contain the same designated router priority value, the interface with the largest interface IP address becomes the designated router.

ip pim join-filter

Permit or deny PIM Join/Prune messages on an interface using an extended IP access list. This command prevents the PIM-SM router from creating state based on multicast source and/or group.

Syntax `ip pim join-filter ext-access-list {in | out}`
To remove the access list, use the `no ip pim join-filter ext-access-list {in | out}` command.

Parameters

<i>ext-access-list</i>	Enter the name of an extended access list.
in	Enter this keyword to apply the access list to inbound traffic.
out	Enter this keyword to apply the access list to outbound traffic.

Defaults none

Command Modes INTERFACE

Supported Modes Full—Switch

Usage Information When you configure a join filter, it is applicable for both ingress and egress flows. There is no option to specify in or out parameters while configuring a join filter.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)# ip access-list extended iptv-channels
Dell(config-ext-nacl)# permit ip 10.1.2.3/24 225.1.1.0/24
Dell(config-ext-nacl)# permit ip any 232.1.1.0/24
Dell(config-ext-nacl)# permit ip 100.1.1.0/16 any
Dell(config-if-te-1/1)# ip pim join-filter iptv-channels
Dell(config-if-te-1/1)# ip pim join-filter iptv-channels
```

Related Commands [ip access-list extended](#) — configure an access list based on IP addresses or protocols.

ip pim ingress-interface-map

When the Dell Networking system is the RP, statically map potential incoming interfaces to (*,G) entries to create a lossless multicast forwarding environment.

Syntax `ip pim ingress-interface-map std-access-list`

Parameters

<i>std-access-list</i>	Enter the name of a standard access list.
-------------------------------	---

Defaults none

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)# ip access-list standard map1
Dell(config-std-nacl)# permit 224.0.0.1/24
Dell(config-std-nacl)#exit
Dell(conf)#int te 0/1
Dell(config-if-te-0/1)# ip pim ingress-interface-map map1
```

ip pim neighbor-filter

To prevent a router from participating in protocol independent multicast (PIM), configure this feature.

Syntax `ip pim neighbor-filter {access-list}`
To remove the restriction, use the `no ip pim neighbor-filter {access-list}` command.

Parameters	<i>access-list</i>	Enter the name of a standard access list. Maximum 16 characters.
Defaults	none	
Command Modes	CONFIGURATION	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Do not enter this command before creating the access-list.	

ip pim query-interval

Change the frequency of PIM Router-Query messages.

Syntax `ip pim query-interval seconds`
 To return to the default value, use the `no ip pim query-interval seconds` command.

Parameters	<i>seconds</i>	Enter a number as the number of seconds between router query messages. The range is from 0 to 65535. The default is 30 seconds .
Defaults	30 seconds	
Command Modes	INTERFACE	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ip pim register-filter

To prevent a PIM source DR from sending register packets to an RP for the specified multicast source and group, use this feature.

Syntax `ip pim register-filter access-list`
 To return to the default, use the `no ip pim register-filter access-list` command.

Parameters	<i>access-list</i>	Enter the name of an extended access list. Maximum 16 characters.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full—Switch	

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The access name is an extended IP access list that denies PIM register packets to RP at the source DR based on the multicast and group addresses. Do not enter this command before creating the access-list.

ip pim rp-address

Configure a static PIM rendezvous point (RP) address for a group or access-list.

Syntax

```
ip pim rp-address address {group-address group-address mask} override
```

To remove an RP address, use the `no ip pim rp-address address {group-address group-address mask} override` command.

Parameters

address	Enter the RP address in dotted decimal format (A.B.C.D).
group-address group-address mask	Enter the keywords <code>group-address</code> then a group-address mask, in dotted decimal format (/xx), to assign that group address to the RP.
override	Enter the keyword <code>override</code> to override the BSR updates with static RP. The override takes effect immediately during enable/disable.

 **NOTE: This option is applicable to multicast group range.**

Defaults

Not configured.

Command Modes

CONFIGURATION

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

First-hop routers use this address by to send register packets on behalf of source multicast hosts. The RP addresses are stored in the order in which they are entered. The RP is chosen based on a longer prefix match for a group. The RP selection does not depend on dynamic or static RP assignments.

ip pim rp-candidate

To send out a Candidate-RP-Advertisement message to the bootstrap (BS) router or define group prefixes that are defined with the RP address to PIM BSR, configure a PIM router.

Syntax

```
ip pim rp-candidate {interface [priority] [acl-name]}
```

To return to the default value, use the `no ip pim rp-candidate {interface [priority]}` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
<i>priority</i>	(OPTIONAL) Enter the priority used in Bootstrap election process. The range is zero (0) to 255. The default is 192 .
<i>acl-name</i>	(OPTIONAL) Enter the name of an ACL to configure a PIM router to act as an RP for a specific set of multicast group addresses that are defined in the ACL.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full—Switich

Command History

Version	Description
9.11.0.0	Introduced the <code>acl-name</code> keyword.
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Priority is stored at BSR router when receiving a Candidate-RP-Advertisement.

ip pim sparse-mode

Enable PIM sparse mode and IGMP on the interface.

Syntax `ip pim sparse-mode`
To disable PIM sparse mode and IGMP, use the `no ip pim sparse-mode` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The interface must be enabled (the `no shutdown` command) and not have the `switchport` command configured. Multicast must also be enabled globally (using the `ip multicast-lag-hashing` command). PIM is supported on the port-channel interface.

ip pim sparse-mode sg-expiry-timer

Enable expiry timers globally for all sources, or for a specific set of (S,G) pairs an access list defines.

Syntax `ip pim sparse-mode sg-expiry-timer seconds [access-list name]`
To disable configured timers and return to default mode, use the `no ip pim sparse-mode sg-expiry-timer` command.

Parameters

seconds	Enter the number of seconds the S, G entries are retained. The range is from 211 to 86400.
access-list name	(OPTIONAL) Enter the name of a previously configured Extended ACL to enable the expiry time to specified S,G entries.

Defaults Disabled. The default expiry timer (with no times configured) is 210 sec.

Command Modes CONFIGURATION

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command configures an expiration timer for all S,G entries, unless they are assigned to an Extended ACL.

ip pim spt-threshold

To switch to the shortest path tree when the traffic reaches the specified threshold value, configure the PIM router.

Syntax `ip pim spt-threshold value | infinity`
To return to the default value, use the `no ip pim spt-threshold` command.

Parameters

value	(OPTIONAL) Enter the traffic value in kilobits per second. The default is 10 packets per second . A value of zero (0) causes a switchover on the first packet.
infinity	(OPTIONAL) Enter the keyword <code>infinity</code> to never switch to the source-tree.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is applicable to last hop routers on the shared tree towards the rendezvous point (RP).

no ip pim snooping dr-flood

Disable the flooding of multicast packets to the PIM designated router.

Syntax `no ip pim snooping dr-flood`
To re-enable the flooding of multicast packets to the PIM designated router, use the `ip pim snooping dr-flood` command.

Defaults Enabled.

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

By default, when you enable PIM-SM snooping, a switch floods all multicast traffic to the PIM designated router (DR), including unnecessary multicast packets. To minimize the traffic sent over the network to the designated router, you can disable `designated-router flooding`.

When designated-router flooding is disabled, PIM-SM snooping only forwards the multicast traffic, which belongs to a multicast group for which the switch receives a join request, on the port connected towards the designated router.

If the PIM DR flood is not disabled (default setting):

- Multicast traffic is transmitted on the egress port towards the PIM DR if the port is not the incoming interface.
- Multicast traffic for an unknown group is sent on the port towards the PIM DR. When DR flooding is disabled, multicast traffic for an unknown group is dropped.

Related Commands [ip pim sparse-mode](#) — enables PIM-SM snooping.

show ip pim bsr-router

View information on the Bootstrap router.

Syntax `show ip pim bsr-router`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
E600-7-rpm0#show ip pim bsr-router
PIMv2 Bootstrap information
This system is the Bootstrap Router (v2)
  BSR address: 7.7.7.7 (?)
  Uptime: 16:59:06, BSR Priority: 0, Hash mask length: 30
  Next bootstrap message in 00:00:08

This system is a candidate BSR
  Candidate BSR address: 7.7.7.7, priority: 0, hash mask length: 30
```

show ip pim interface

View information on the interfaces with IP PIM enabled.

Syntax `show ip pim interface`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim interface` command shown in the following example.

Field	Description
Address	Lists the IP addresses of the interfaces participating in PIM.
Interface	List the interface type, with either slot/port information or ID (VLAN or Port Channel), of the interfaces participating in PIM.
Ver/Mode	Displays the PIM version number and mode for each interface participating in PIM: <ul style="list-style-type: none">· v2 = PIM version 2· S = PIM Sparse mode
Nbr Count	Displays the number of PIM neighbors discovered over this interface.
Query Intvl	Displays the query interval for Router Query messages on that interface (configured with <code>ip pim query-interval</code> command).
DR Prio	Displays the Designated Router priority value configured on the interface (use the <code>ip pim dr-priority</code> command).
DR	Displays the IP address of the Designated Router for that interface.

Example

```
E600-7-RPM0#show ip pim interface
Address          Interface  Ver/  Nbr   Query DR   DR
                  Mode Count Intvl Prio
172.21.200.254  te 0/5    v2/S  0     30 1  172.21.200.254
172.60.1.2      te 0/1    v2/S  0     30 1  172.60.1.2
192.3.1.1       te 1/8    v2/S  1     30 1  192.3.1.1
192.4.1.1       te 1/8    v2/S  0     30 1  192.4.1.1
```

```
172.21.110.1 te 1/6 v2/S 0 30 1 172.21.110.1
172.21.203.1 te 1/7 v2/S 0 30 1 172.21.203.1
```

show ip pim neighbor

View PIM neighbors.

Syntax `show ip pim neighbor`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim neighbor` command shown in the following example.

Field	Description
Neighbor address	Displays the IP address of the PIM neighbor.
Interface	List the interface type, with either slot/port information or ID (VLAN or Port Channel), on which the PIM neighbor was found.
Uptime/expires	Displays the amount of time the neighbor has been up then the amount of time until the neighbor is removed from the multicast routing table (that is, until the neighbor hold time expires).
Ver	Displays the PIM version number. <ul style="list-style-type: none"> v2 = PIM version 2
DR prio/Mode	Displays the Designated Router priority and the mode. <ul style="list-style-type: none"> 1 = default Designated Router priority (use the <code>ip pim dr-priority</code> command) DR = Designated Router S = Sparse mode

Example

```
Dell#show ip pim neighbor
Neighbor   Interface  Uptime/Expires  Ver  DR
Address
127.87.3.4 te 1/7      09:44:58/00:01:24 v2   1 / S
Dell#
```

show ip pim rp

View all multicast groups-to-RP mappings.

Syntax `show ip pim rp [mapping | group-address]`

Parameters	mapping	(OPTIONAL) Enter the keyword <code>mapping</code> to display the multicast groups-to-RP mapping and information on how RP is learnt.
	group-address	(OPTIONAL) Enter the multicast group address mask in dotted decimal format to view RP for a specific group.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#sh ip pim rp
Group          RP
224.2.197.115  165.87.20.4
224.2.217.146  165.87.20.4
224.3.3.3      165.87.20.4
225.1.2.1      165.87.20.4
225.1.2.2      165.87.20.4
229.1.2.1      165.87.20.4
229.1.2.2      165.87.20.4
Dell#
```

Example (Mapping)

```
Dell#sh ip pim rp mapping
Group(s): 224.0.0.0/4
  RP: 165.87.20.4, v2
    Info source: 165.87.20.5, via bootstrap, priority 0
    Uptime: 00:03:11, expires: 00:02:46
  RP: 165.87.20.3, v2
    Info source: 165.87.20.5, via bootstrap, priority 0
    Uptime: 00:03:11, expires: 00:03:03
Dell#
```

Example (Address)

```
Dell#sh ip pim rp 229.1.2.1
Group          RP
229.1.2.1      165.87.20.4
Dell#
```

show ip pim snooping interface

Display information on VLAN interfaces with PIM-SM snooping enabled.

Syntax `show ip pim snooping interface [vlan vlan-id]`

Parameters

vlan *vlan-id* (OPTIONAL) Enter a VLAN ID to display information about a specified VLAN configured for PIM-SM snooping. The valid VLAN IDs range is from 1 to 4094.

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim snooping interface` commands shown in the following example.

Field	Description
Interface	Displays the VLAN interfaces with PIM-SM snooping enabled.
Ver/Mode	Displays the PIM version number for each VLAN interface with PIM-SM snooping enabled: <ul style="list-style-type: none"> · v2 = PIM version 2 · S = PIM Sparse mode
Nbr Count	Displays the number of neighbors learned through PIM-SM snooping on the interface.
DR Prio	Displays the Designated Router priority value configured on the interface (<code>ip pim dr-priority</code> command).
DR	Displays the IP address of the Designated Router for that interface.

Example (#2)

```
Dell#show ip pim snooping interface
Interface Ver Nbr   DR   DR
          Count Prio
Vlan 2    v2   3    1    165.87.32.2
```

show ip pim snooping neighbor

Display information on PIM neighbors learned through PIM-SM snooping.

Syntax `show ip pim snooping neighbor [vlan vlan-id]`

Parameters `vlan vlan-id` (OPTIONAL) Enter a VLAN ID to display information about PIM neighbors that PIM-SM snooping discovered on a specified VLAN. The valid VLAN IDs range is from 1 to 4094.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim snooping neighbor` commands shown in the following example.

Field	Description
Neighbor address	Displays the IP address of the neighbor learned through PIM-SM snooping.
Interface	Displays the VLAN ID number and slot/port on which the PIM-SM-enabled neighbor was discovered.
Uptime/expires	Displays the amount of time the neighbor has been up then the amount of time until the neighbor is removed from the multicast routing table (that is, until the neighbor hold time expires).
Ver	Displays the PIM version number: <ul style="list-style-type: none">· v2 = PIM version 2
DR prio/Mode	Displays the Designated Router priority and the mode: <ul style="list-style-type: none">· 1 = default Designated Router priority (use the <code>ip pim dr-priority</code> command)· DR = Designated Router· S = Sparse mode

Example

```
Dell#show ip pim snooping neighbor
```

```
Neighbor      Interface          Uptime/Expires    Ver  DR Prio
Address
165.87.32.2   V1 2 [tei 4/8 ]   00:04:03/00:01:42 v2   1
165.87.32.10 V1 2 [te 4/8 ]    00:00:46/00:01:29 v2   0
165.87.32.12 V1 2 [te 4/8 ]    00:00:51/00:01:24 v2   0
```

show ip pim snooping tib

Display information from the tree information base (TIB) PIM-SM snooping discovered about multicast group members and states.

Syntax `show ip pim snooping tib [vlan vlan-id] [group-address [source-address]]`

Parameters

vlan <i>vlan-id</i>	(OPTIONAL) Enter a VLAN ID to display TIB information PIM-SM snooping discovered on a specified VLAN. The valid VLAN IDs range is from 1 to 4094.
<i>group-address</i>	(OPTIONAL) Enter the group address in dotted decimal format (A.B.C.D) to display TIB information PIM-SM snooping discovered for a specified multicast group.
<i>source-address</i>	(OPTIONAL) Enter the source address in dotted decimal format (A.B.C.D) to display TIB information PIM-SM snooping discovered for a specified multicast source.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim snooping tib` commands shown in the following example.

Field	Description
(S, G)	Displays the entry in the PIM multicast snooping database.
uptime	Displays the amount of time the entry has been in the PIM multicast route table.
expires	Displays the amount of time until the entry expires and is removed from the database.
RP	Displays the IP address of the RP/source for this entry.
flags	List the flags to define the entries: <ul style="list-style-type: none"> · S = PIM Sparse Mode · C = directly connected · L = local to the multicast group · P = route was pruned · R = the forwarding entry is pointing toward the RP · F = Dell Networking OS is registering this entry for a multicast source · T = packets were received via Shortest Tree Path · J = first packet from the last hop router is received and the entry is ready to switch to SPT · K=acknowledge pending state
Incoming interface	Displays the reverse path forwarding (RPF) interface towards the RP/ source.
RPF neighbor	Displays the next hop from this interface towards the RP/source.
Outgoing interface list:	Lists the interfaces that meet one of the following criteria: <ul style="list-style-type: none"> · a directly connect member of the Group · statically configured member of the Group · received a (*,G) Join message

Example

```
Dell#show ip pim snooping tib

PIM Multicast Snooping Table
Flags: J/P - (*,G) Join/Prune, j/p - (S,G) Join/Prune
      SGR-P - (S,G,R) Prune
Timers: Uptime/Expires
* : Inherited port

(*, 225.1.2.1), uptime 00:00:01, expires 00:02:59, RP 165.87.70.1, flags: J
  Incoming interface: Vlan 2, RPF neighbor 0.0.0.0
  Outgoing interface list:
    TenGigabitEthernet 4/5 RPF 165.87.32.2 00:00:01/00:02:59
    TenGigabitEthernet 4/6 Upstream Port -/-

Dell#show ip pim snooping tib vlan 2 225.1.2.1 165.87.1.7

PIM Multicast Snooping Table
Flags: J/P - (*,G) Join/Prune, j/p - (S,G) Join/Prune
      SGR-P - (S,G,R) Prune
Timers: Uptime/Expires
* : Inherited port
```

```
(165.87.1.7, 225.1.2.1), uptime 00:00:08, expires 00:02:52, flags: j
Incoming interface: Vlan 2, RPF neighbor 0.0.0.0
Outgoing interface list:
TenGigabitEthernet 4/7 Upstream Port    -/-
TenGigabitEthernet 4/6 DR Port          -/-
TenGigabitEthernet 4/8 RPF 165.87.32.10 00:00:08/00:02:52
```

show ip pim summary

View information about PIM-SM operation.

Syntax show ip pim summary

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ip pim summary

PIM TIB version 495
Uptime 22:44:52
Entries in PIM-TIB/MFC : 2/2

Active Modes :
    PIM-SNOOPING

Interface summary:
    1 active PIM interface
    0 passive PIM interfaces
    3 active PIM neighbors

TIB summary:
    1/1 (*,G) entries in PIM-TIB/MFC
    1/1 (S,G) entries in PIM-TIB/MFC
    0/0 (S,G,Rpt) entries in PIM-TIB/MFC

    0 PIM nexthops
    0 RPs
    0 sources
    0 Register states

Message summary:
    2582/2583 Joins sent/received
    5/0 Prunes sent/received
    0/0 Candidate-RP advertisements sent/received
    0/0 BSR messages sent/received
    0/0 State-Refresh messages sent/received
    0/0 MSDP updates sent/received
    0/0 Null Register messages sent/received
    0/0 Register-stop messages sent/received

Data path event summary:
    0 no-cache messages received
    0 last-hop switchover messages received
    0/0 pim-assert messages sent/received
```

```

0/0 register messages sent/received

Memory usage:
TIB                : 3768 bytes
Nexthop cache     : 0 bytes
Interface table    : 992 bytes
Neighbor table     : 528 bytes
RP Mapping         : 0 bytes

```

show ip pim tib

View the PIM tree information base (TIB).

Syntax `show ip pim tib [group-address [source-address]]`

Parameters

- group-address* (OPTIONAL) Enter the group address in dotted decimal format (A.B.C.D).
- source-address* (OPTIONAL) Enter the source address in dotted decimal format (A.B.C.D).

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip pim tib` command shown in the following example.

Field	Description
(S, G)	Displays the entry in the multicast PIM database.
uptime	Displays the amount of time the entry has been in the PIM route table.
expires	Displays the amount of time until the entry expires and is removed from the database.
RP	Displays the IP address of the RP/source for this entry.
flags	List the flags to define the entries: <ul style="list-style-type: none"> · D = PIM Dense Mode · S = PIM Sparse Mode · C = directly connected · L = local to the multicast group · P = route was pruned · R = the forwarding entry is pointing toward the RP · F = Dell Networking OS is registering this entry for a multicast source · T = packets were received via Shortest Tree Path · J = first packet from the last hop router is received and the entry is ready to switch to SPT · K = acknowledge pending state

Field	Description
Incoming interface	Displays the reverse path forwarding (RPF) interface towards the RP/ source.
RPF neighbor	Displays the next hop from this interface towards the RP/source.
Outgoing interface list:	Lists the interfaces that meet one of the following criteria: <ul style="list-style-type: none"> · a directly connect member of the Group · statically configured member of the Group · received a (*,G) Join message

Example

```
Dell#show ip pim tib

PIM Multicast Routing Table
Flags:D- Dense, S- Sparse, C- Connected, L- Local, P- Pruned,
      R- RP-bit set, F- Register flag, T- SPT-bit set, J- Join SPT,
      M- MSDP created entry, A- Candidate for MSDP Advertisement,
      K- Ack-Pending State
Timers: Uptime/Expires
Interface state: Interface, next-Hop, State/Mode

(*, 226.1.1.1), uptime 01:29:19, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: TenGigabitEthernet 0/2, RPF neighbor 10.211.1.2
  Outgoing interface list:
    TenGigabitEthernet 0/8

(*, 226.1.1.2), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: TenGigabitEthernet 1/2, RPF neighbor 10.211.1.2
  Outgoing interface list:
    TenGigabitEthernet 0/8

(*, 226.1.1.3), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: TenGigabitEthernet 1/2, RPF neighbor 10.211.1.2
  Outgoing interface list:
    TenGigabitEthernet 0/8

(*, 226.1.1.4), uptime 00:18:08, expires 00:00:52, RP 10.211.2.1, flags: SCJ
  Incoming interface: TenGigabitEthernet 1/2, RPF neighbor 10.211.1.2
  Outgoing interface list:
    TenGigabitEthernet 0/8
```

show running-config pim

Display the current configuration of PIM-SM snooping.

Syntax show running-config pim

Command Modes EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show running-config pim
!
ip pim snooping enable
```

Related Commands [ip pim sparse-mode](#) — enables PIM-SM snooping.

IPv6 PIM-Sparse Mode Commands

The following describes the IPv6 PIM-sparse mode (PIM-SM) commands.

ipv6 pim bsr-border

Define the border of PIM domain by filtering inbound and outbound PIM-BSR messages per interface.

Syntax `ipv6 pim bsr-border`

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is applied to the subsequent PIM-BSR messages. Existing BSR advertisements are cleaned up by time-out.

ipv6 pim bsr-candidate

Configure the router as a bootstrap (BSR) candidate.

Syntax `ipv6 pim bsr-candidate interface [hash-mask-length] [priority]`
 To disable the bootstrap candidate, use the `no ipv6 pim bsr-candidate` command.

Parameters

interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383. • For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
hash-mask-length	(OPTIONAL) Enter the hash mask length for RP selection. The range is from 0 to 128. The default is 126 .
priority	(OPTIONAL) Enter the priority value for Bootstrap election process. The range is from 0 to 255. The default is 0 .

Defaults Refer to Parameters.

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 pim dr-priority

Change the designated router (DR) priority for the IPv6 interface.

Syntax `ipv6 pim dr-priority priority-value`
To remove the DR priority value assigned, use the `no ipv6 pim dr-priority` command.

Parameters

<i>priority-value</i>	Enter a number. Preference is given to larger/higher number. The range is from 0 to 4294967294. The default is 1 .
------------------------------	---

Defaults **1**

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The router with the largest value assigned to an interface becomes the designated router. If two interfaces contain the same designated router priority value, the interface with the largest interface IP address becomes the designated router.

ipv6 pim join-filter

Permit or deny PIM Join/Prune messages on an interface using an access list. This command prevents the PIM-SM router from creating state based on multicast source and/or group.

Syntax `ipv6 pim join-filter access-list`

Parameters

<i>access-list</i>	Enter the name of an extended access list.
in	Enter the keyword <code>in</code> to apply the access list to inbound traffic.
out	Enter the keyword <code>out</code> to apply the access list to outbound traffic.

Defaults none

Command Modes INTERFACE

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)#ipv6 access-list JOIN-FIL_ACL
Dell(conf-ipv6-acl)#permit ipv6 165:87:34::0/112 ff0e::225:1:2:0/112
Dell(conf-ipv6-acl)#permit ipv6 any ff0e::230:1:2:0/112
Dell(conf-ipv6-acl)#permit ipv6 165:87:32::0/112 any
Dell(conf-ipv6-acl)#exit
Dell(conf)#interface tengigabitethernet 0/84
Dell(conf-if-te-0/84)#ipv6 pim join-filter JOIN-FIL_ACL in
Dell(conf-if-te-0/84)#ipv6 pim join-filter JOIN-FIL_ACL out
```

ipv6 pim query-interval

Change the frequency of IPv6 PIM router-query messages.

Syntax

```
ipv6 pim query-interval seconds
```

To return to the default value, use the `no ipv6 pim query-interval seconds` command.

Parameters

seconds

Enter a number as the number of seconds between router query messages. The range is from 0 to 65535. The default is **30 seconds**.

Defaults

30 seconds

Command Modes

INTERFACE

Supported Modes

Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 pim neighbor-filter

Prevent the system from forming a PIM adjacency with a neighboring system.

Syntax

```
ipv6 pim neighbor-filter {access-list}
```

Parameters

access-list

Enter the name of a standard access list. Maximum 16 characters.

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Do not enter this command before creating the access-list.

ipv6 pim register-filter

Configure the source DR so that it does not send register packets to the RP for the specified sources and groups.

Syntax `ipv6 pim register-filter access-list`

Parameters *access-list* Enter the name of the extended ACL that contains the sources and groups to filter.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf)#ipv6 pim register-filter REG-FIL_ACL
Dell(conf)#ipv6 access-list REG-FIL_ACL
Dell(conf-ipv6-acl)#deny ipv6 165:87:34::10/128 ff0e::225:1:2:0/112
Dell(conf-ipv6-acl)#permit ipv6 any any
Dell(conf-ipv6-acl)#exit
```

ipv6 pim rp-address

Configure a static PIM rendezvous point (RP) address for a group. First-hop routers use this address to send register packets on behalf of the source multicast host.

Syntax `ipv6 pim rp-address address group-address group-address mask override`
To remove an RP address, use the `no ipv6 pim re-address address group-address mask override` command.

Parameters

address Enter the IPv6 RP address in the x:x:x:x format.

NOTE: The :: notation specifies successive hexadecimal fields of zero.

group-address Enter the keywords `group-address` then the group address in the x:x:x:x format and then the mask in /nn format to assign that group address to the RP.

group-address

mask

NOTE: The :: notation specifies successive hexadecimal fields of zero.

override Enter the keyword `override` to override the BSR updates with static RP. The override takes effect immediately during enable/disable.

① | **NOTE: This option is applicable to multicast group range.**

Defaults none
Command Modes CONFIGURATION
Supported Modes Full—Switch
Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The RP addresses are stored in the order in which they are entered. RP addresses learned via BSR take priority over static RP addresses.

Without the `override` option, the BSR-advertised RPs updates take precedence over the statically configured RPs.

ipv6 pim rp-candidate

Specify an interface as an RP candidate.

Syntax `ipv6 pim rp-candidate interface [priority-value]`

Parameters

interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383.For a Port Channel interface, enter the keywords <code>port-channel</code> then a number.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
priority-value	(OPTIONAL) Enter a number as the priority of this RP Candidate, which is included in the Candidate-RP-Advertisements. The range is 0 (highest) to 255 (lowest).

Defaults none
Command Modes CONFIGURATION
Supported Modes Full—Switch
Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

ipv6 pim sparse-mode

Enable IPv6 PIM sparse mode on the interface.

Syntax `ipv6 pim sparse-mode`
To disable IPv6 PIM sparse mode, use the `no ipv6 pim sparse-mode` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Enable the interface (use the `no shutdown` command) and not have the `switchport` command configured. Also enable Multicast globally. PIM is supported on the port-channel interface.

ipv6 pim spt-threshold

Specifies when a PIM leaf router should join the shortest path tree.

Syntax `ipv6 pim spt-threshold {kbps | infinity}`
To return to the default value, use the `no ipv6 pim spt-threshold` command.

Parameters

kbps	Enter a traffic rate in kilobytes per second. The range is from 0 to 4294967 kbps. The default is 10 kbps .
infinity	Enter the keyword <code>infinity</code> to have all sources for the specified group use the shared tree and never join shortest path tree (SPT).

Defaults **10 kbps**

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information PIM leaf routers join the shortest path tree immediately after the first packet arrives from a new source.

show ipv6 pim bsr-router

View information on the Bootstrap router (v2).

Syntax `show ipv6 pim bsr-router`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ipv6 pim bsr-router
PIMv2 Bootstrap information
This system is the Bootstrap Router (v2)
  BSR address: 14::2
  Uptime:      00:02:54, BSR Priority: 0, Hash mask length: 126
  Next bootstrap message in 00:00:06

This system is a candidate BSR
  Candidate BSR address: 14::2, priority: 0, hash mask length: 126
Dell
```

show ipv6 pim interface

Display IPv6 PIM enabled interfaces.

Syntax `show ipv6 pim interface`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switich

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ipv6 pim interface
Interface Ver/ Nbr   Query DR
          Mode Count Intvl Prio

Te 0/3   v2/S 1    30    1
  Address : fe80::201:e8ff:fe02:140f
  DR      : this router

Te 0/1   v2/S 0    30    1
  Address : fe80::201:e8ff:fe02:1417
```

```
DR : this router
Dell#
```

show ipv6 pim neighbor

Displays IPv6 PIM neighbor information.

Syntax	show ipv6 pim neighbor [detail]	
Parameters	detail	(OPTIONAL) Enter the keyword <code>detail</code> to displayed PIM neighbor detailed information.
Supported Modes	Full—Swtich	
Command Modes	<ul style="list-style-type: none">· EXEC· EXEC Privilege	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ipv6 pim neighbor detail
Neighbor Interface Uptime/Expires Ver DR
Address                               Prio/Mode
fe80::201:e8ff:fe00:6265 Te 0/3 00:07:39/00:01:42 v2 1 / S
165:87:50::6
Dell#
```

show ipv6 pim rp

View all multicast groups-to-RP mappings.

Syntax	show ipv6 pim rp [mapping <i>group-address</i>]	
Parameters	mapping	(OPTIONAL) Enter the keyword <code>mapping</code> to display the multicast groups-to-RP mapping and information on how RP is learnt.
	<i>group-address</i>	(OPTIONAL) Enter the multicast group address mask in dotted decimal format to view RP for a specific group.
Command Modes	<ul style="list-style-type: none">· EXEC· EXEC Privilege	
Supported Modes	Full—Swtich	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dellshow ipv6 pim rp
Group RP
ff0e::225:1:2:1 14::1
ff0e::225:1:2:2 14::1
ff0e::226:1:2:1 14::1
ff0e::226:1:2:2 14::1
Dell
```

Example (Mapping)

```
Dellshow ipv6 pim rp mapping
PIM Group-to-RP Mappings
Group(s): ff00::/8
  RP: 14::1, v2
  Info source: 14::1, via bootstrap, priority 192
  Uptime: 00:03:37, expires: 00:01:53
Group(s): ff00::/8, Static
  RP: 14::2, v2
Dell
```

show ipv6 pim tib

View the IPv6 PIM multicast-routing database (tree information base — tib).

Syntax

```
show ipv6 pim tib [group-address [source-address]]
```

Parameters

group-address (OPTIONAL) Enter the multicast group address in the x:x:x:x format to view RP mappings for a specific group.

NOTE: The :: notation specifies successive hexadecimal fields of zero.

source-address (OPTIONAL) Enter the source address in the x:x:x:x format.

NOTE: The :: notation specifies successive hexadecimal fields of zero.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show ipv6 pim tib

PIM Multicast Routing Table
Flags: D - Dense, S - Sparse, C - Connected, L - Local, P - Pruned,
       R - RP-bit set, F - Register flag, T - SPT-bit set, J - Join SPT,
       M - MSDP created entry, A - Candidate for MSDP Advertisement
       K - Ack-Pending State
Timers: Uptime/Expires
Interface state: Interface, next-Hop, State/Mode

(25::1, ff0e::225:1:2:1), uptime 00:09:53, expires 00:00:00, flags: CJ
  RPF neighbor: TenGigabitEthernet 0/3, fe80::201:e8ff:fe00:6265
  Outgoing interface list:
```

```
TenGigabitEthernet 1/1
(25::1, ff0e::225:1:2:2), uptime 00:09:54, expires 00:00:00, flags: CJ
RPF neighbor: TenGigabitEthernet 0/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  TenGigabitEthernet 1/1

(25::2, ff0e::225:1:2:2), uptime 00:09:54, expires 00:00:00, flags: CJ
RPF neighbor: TenGigabitEthernet 0/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  TenGigabitEthernet 1/1

(25::1, ff0e::226:1:2:1), uptime 00:09:54, expires 00:00:00, flags: CJ
RPF neighbor: TenGigabitEthernet 0/3, fe80::201:e8ff:fe00:6265
Outgoing interface list:
  TenGigabitEthernet 1/1
Dell#
```

Port Monitoring

The port monitoring feature allows you to monitor network traffic by forwarding a copy of each incoming or outgoing packet from one port to another port.

Important Points to Remember

- Port monitoring is supported on physical ports only. Port-channel interfaces and virtual local area networks (VLANs), are not supported.
- The monitoring (destination, “MG”) and monitored (source, “MD”) ports must be on the same switch.
- The monitored (source) interface must be a server-facing interface in the format slot/port, where valid slot number is 0 and server-facing port numbers are from 1 to 8. The monitoring interface must be an uplink port in the chassis.
- Dell Networking OS permits a limited set of commands for monitoring ports. To display these commands, use the ? command.
- A monitoring port may not be a member of a VLAN.
- There may only be one destination port in a monitoring session.
- A source port (MD) can only be monitored by one destination port (MG). If you try to assign a monitored port to more than one monitoring port, the following error is displayed as shown in example.

Example

```
Dell(conf)#mon ses 1
Dell(conf-mon-sess-1)#source tengig 0/1 destination tengig 0/6 direction both
Dell(conf-mon-sess-1)#do show mon ses
SessionID Source      Destination  Direction  Mode  Type
-----
1      TenGig 0/1  TenGig 0/6  both           interface
Port-based
Dell(conf-mon-sess-1)#mon ses 2
Dell(conf-mon-sess-2)#source tengig 0/1 destination tengig 0/7 direction both
% Error: MD port is already being monitored.
```

NOTE: There is no limit to the number of monitoring sessions per system, provided that there are only four destination ports per port-pipe. If each monitoring session has a unique destination port, the maximum number of session is four per port-pipe.

Topics:

- [description](#)
- [erpm](#)
- [flow-based enable](#)
- [rate-limit](#)
- [monitor session](#)
- [show config](#)
- [show monitor session](#)
- [show running-config monitor session](#)
- [source \(port monitoring\)](#)

description

Enter a description of this monitoring session.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters **description** Enter a description regarding this session (80 characters maximum).

Defaults none

Command Modes MONITOR SESSION (conf-mon-sess-session-ID)

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

erpm

Configure the source and destination IP address for ERPM traffic.

Syntax `erpm source-ip ip-address dest-ip ip-address [gre-protocol value]`
To remove the configuration, use the `no erpm source-ip IP-address dest-ip IP-address [gre-protocol value]` command.

Parameters

- source-ip ip-address** Enter the keywords `source-ip` then the source IP address in dotted decimal format.
- destination-ip ip-address** Enter the keywords `dest-ip` then the destination IP address in dotted decimal format.
- gre-protocol value** (OPTIONAL) Enter the keywords `gre-protocol` then the protocol type value for ERPM type monitor session. The range is from 1 to 65535.

Command Modes MONITOR SESSION (conf-mon- sess-session-ID)

Example
`Dell(conf-mon-sess-10)#erpm source-ip 10.10.10.1 dest-ip 5.1.1.2 gre-protocol 1111`

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.11(0.0)	Introduced GRE protocol support.

Related Commands

- [monitor session](#) — creates a session for monitoring traffic with port monitoring.
- [show monitor session](#) — displays information about monitor configurations.

flow-based enable

Enable flow-based monitoring.

Syntax `flow-based enable`
To disable flow-based monitoring, use the `no flow-based enable` command.

Defaults Disabled, that is flow-based monitoring is not applied.

Command Modes MONITOR SESSION (*conf-mon-sess-session-ID*)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added support for the RPM/ERPM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.
8.1.1.0	Introduced on the E-Series ExaScale.
74.1.0	Introduced on the E-Series.

Usage Information To monitor traffic with particular flows the interface, appropriate ACLs has be applied in ingress direction. Flow-based is not supported in the tx direction. Even though we can configure it in both the direction, only rx will work. The flow- based enable command has to be applied as a **monitor session** with some configuration which is already present in it, other wise flow- based will not take effect.

Related Commands [monitor session](#) – enables a monitoring session.

rate-limit

Configure the rate-limit to limit the mirrored packets.

Syntax `rate-limit limit`
To remove the limit, use the `no rate-limit limit` command.

Parameters **limit** Enter the rate-limit value. The range is from 0 to 40000 Megabits per second.

Defaults 60

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands `monitor session` — enables a monitoring session.

`show monitor session` — displays the monitor session.

monitor session

Create a session for monitoring traffic with port monitoring.

Syntax `monitor session session-ID (type { rpm | erpm }) [drop]`

To delete a session, use the `no monitor session session-ID` command.

To delete all monitor sessions, use the `no monitor session all` command.

Parameters

session-ID Enter a session identification number. The range is from 0 to 65535.

type rpm | erpm Specifies one of the following type:

- rpm: to create remote port monitoring session.
- erpm: to create encapsulated remote port monitoring session.
- If no option is specified, by default SPAN will be created.

drop Monitors only the dropped packets in the Ingress.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Added the drop parameter.
9.4(0.0)	Added support for rpm / erpm.
8.3.16.1	Introduced on the M I/O Aggregator.

Usage Information The `monitor` command is saved in the running configuration at Monitor Session mode level and can be restored after a chassis reload.

Example

```
Dell(conf)# monitor session 60
Dell(conf-mon-sess-60)
```

Related Command [show monitor session](#) — displays the monitor session.

[show running-config monitor session](#) — displays the running configuration of a monitor session.

show config

Display the current monitor session configuration.

Syntax	show config	
Defaults	none	
Command Modes	MONITOR SESSION (conf-mon-sess-session-ID)	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell(conf-mon-sess-5)#show config
!
monitor session 5
source TenGigabitEthernet 0/4 destination TenGigabitEthernet 0/7 direction rx
Dell(conf-mon-sess-5)#
```

show monitor session

Display the monitor information of a particular session or all sessions.

Syntax show monitor session {session-ID}

To display monitoring information for all sessions, use the show monitor session command.

Parameters

session-ID	(OPTIONAL) Enter a session identification number. The range is from 0 to 65535.
-------------------	---

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell#show monitor session 5
SessionID Source Destination Direction Mode Type
-----
5 Te 0/4 Te 0/3 rx interface Port-based
Dell#
```

Related Commands [monitor session](#) — creates a session for monitoring.

show running-config monitor session

Displays the running configuration of all monitor sessions or a specific session.

Syntax

```
show running-config monitor session {session-ID}
```

To display the running configuration for all monitor sessions, use the `show running-config monitor session` command.

Parameters

session-ID (OPTIONAL) Enter a session identification number. The range is from 0 to 65535.

Defaults

none

Command Modes

EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

The `monitoring` command is saved in the running configuration at the Monitor Session mode level and can be restored after a chassis reload.

Example

```
Dell#show run monitor session
!
monitor session 5
source TenGigabitEthernet 0/4 destination TenGigabitEthernet 0/5 direction rx
!
monitor session 20
source TenGigabitEthernet 0/3 destination TenGigabitEthernet 0/2 direction both
Dell#
Dell#show run monitor session 20
!
monitor session 20
source TenGigabitEthernet 0/3 destination TenGigabitEthernet 0/2 direction both
Dell#
```

Related Commands [monitor session](#) — creates a session for monitoring.

[show monitor session](#) — displays a monitor session.

source (port monitoring)

Configure a port monitor source.

Syntax `source interface destination interface direction {rx | tx | both}`
To disable a monitor source, use the `no source interface destination interface direction {rx | tx | both}` command.

Parameters

interface Enter the one of the following keywords and slot/port information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

destination Enter the keyword `destination` to indicate the interface destination.

direction {rx | tx | both} Enter the keyword `direction` followed by one of the packet directional indicators.

- `rx`: to monitor receiving packets only.
- `tx`: to monitor transmitting packets only.
- `both`: to monitor both transmitting and receiving packets.

Defaults none

Command Modes MONITOR SESSION (`conf-mon-sess-session-ID`)

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell(conf-mon-sess-11)#source tengig 0/1 destination tengig 0/8 direction rx
Dell(conf-mon-sess-11)#
```

Usage Information The monitored (source) interface must be a server-facing interface in the format slot/port, where valid slot number is 0 and server-facing port numbers are from 1 to 8.

Private VLAN (PVLAN)

Private VLANs extend the Dell Networking OS security suite by providing Layer 2 isolation between ports within the same private VLAN. A private VLAN partitions a traditional VLAN into subdomains identified by a primary and secondary VLAN pair.

The Dell Networking OS private VLAN implementation is based on RFC 3069.

For more information, refer to the following commands. The command output is augmented in the Dell Networking OS version 7.8.1.0 at later to provide PVLAN data:

- `show arp`
- `show vlan`

Private VLAN Concepts

Primary VLAN:

The primary VLAN is the base VLAN and can have multiple secondary VLANs. There are two types of secondary VLAN — community VLAN and isolated VLAN:

- A primary VLAN can have any number of community VLANs and isolated VLANs.
- Private VLANs block all traffic to isolated ports except traffic from promiscuous ports. Traffic received from an isolated port is forwarded only to promiscuous ports or trunk ports.

Community VLAN:

A community VLAN is a secondary VLAN of the primary VLAN:

- Ports in a community VLAN can talk to each other. Also, all ports in a community VLAN can talk to all promiscuous ports in the primary VLAN and vice versa.
- Devices on a community VLAN can communicate with each other using member ports, while devices in an isolated VLAN cannot.

Isolated VLAN:

An isolated VLAN is a secondary VLAN of the primary VLAN:

- Ports in an isolated VLAN cannot talk to each other. Servers would be mostly connected to isolated VLAN ports.
- Isolated ports can talk to promiscuous ports in the primary VLAN, and vice versa.

Port Types:

- *Community port*: A community port is a port that belongs to a community VLAN and is allowed to communicate with other ports in the same community VLAN and with promiscuous ports.
- *Isolated port*: An isolated port is a port that, in Layer 2, can only communicate with promiscuous ports that are in the same PVLAN.
- *Promiscuous port*: A promiscuous port is a port that is allowed to communicate with any other port type.
- *Trunk port*: A trunk port carries VLAN traffic across switches:
 - A trunk port in a PVLAN is always tagged.
 - A trunk port in Tagged mode carries primary or secondary VLAN traffic. The tag on the packet helps identify the VLAN to which the packet belongs.
 - A trunk port can also belong to a regular VLAN (non-private VLAN).

Topics:

- [ip local-proxy-arp](#)
- [private-vlan mapping secondary-vlan](#)
- [private-vlan mode](#)
- [show interfaces private-vlan](#)
- [show vlan private-vlan](#)
- [show vlan private-vlan mapping](#)
- [switchport mode private-vlan](#)

ip local-proxy-arp

Enable/disable Layer 3 communication between secondary VLANs in a private VLAN.

Syntax

```
[no] ip local-proxy-arp
```

To disable Layer 3 communication between secondary VLANs in a private VLAN, use the `no ip local-proxy-arp` command in INTERFACE VLAN mode for the primary VLAN.

To disable Layer 3 communication in a particular secondary VLAN, use the `no ip local-proxy-arp` command in INTERFACE VLAN mode for the selected secondary VLAN.

NOTE: Even after you disable `ip-local-proxy-arp` (use `no ip-local-proxy-arp`) in a secondary VLAN, Layer 3 communication may happen between some secondary VLAN hosts, until the address resolution protocol (ARP) timeout happens on those secondary VLAN hosts.

Defaults

Layer 3 communication is disabled between secondary VLANs in a private VLAN.

Command Modes

INTERFACE VLAN

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.
- [private-vlan mapping secondary-vlan](#) — maps secondary VLANs to the selected primary VLAN.
- [show arp](#) — displays the ARP table.
- [show interfaces private-vlan](#) — displays the type and status of the PVLAN interfaces.
- [show vlan private-vlan](#) — displays the PVLANS and/or interfaces that are part of a PVLAN.
- [switchport mode private-vlan](#) — sets PVLAN mode of the selected port.

private-vlan mapping secondary-vlan

Map secondary VLANs to the selected primary VLAN.

Syntax `[no] private-vlan mapping secondary-vlan vlan-list`
To remove specific secondary VLANs from the configuration, use the `no private-vlan mapping secondary-vlan vlan-list` command syntax.

Parameters `vlan-list` Enter the list of secondary VLANs to associate with the selected primary VLAN. The list can be in comma-delimited or hyphenated-range format, following the convention for the range input.

Defaults none

Command Modes INTERFACE VLAN

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The list of secondary VLANs can be:

- Specified in comma-delimited or hyphenated-range format.
- Specified with this command even before they have been created.
- Amended by specifying the new secondary VLAN to be added to the list.

Related Commands [private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.

[show interfaces private-vlan](#) — displays the type and status of the PVLAN interfaces.

[show vlan private-vlan](#) — displays the PVLANS and/or interfaces that are part of a PVLAN.

[show vlan private-vlan mapping](#) — displays the primary-secondary VLAN mapping.

[switchport mode private-vlan](#) — sets PVLAN mode of the selected port.

private-vlan mode

Set PVLAN mode of the selected VLAN to community, isolated, or primary.

Syntax `[no] private-vlan mode {community | isolated | primary}`
To remove the PVLAN configuration, use the `no private-vlan mode {community | isolated | primary}` command syntax.

Parameters `community` Enter the keyword `community` to set the VLAN as a community VLAN.

	isolated	Enter the keyword <code>isolated</code> to configure the VLAN as an isolated VLAN.
	primary	Enter the keyword <code>primary</code> to configure the VLAN as a primary VLAN.
Defaults	none	
Command Modes	INTERFACE VLAN	
Supported Modes	Full—Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The VLAN:	
	<ul style="list-style-type: none"> • can be in only one mode, either <code>community</code>, <code>isolated</code>, or <code>primary</code>. • mode mode to <code>community</code> or <code>isolated</code> even before associating it to a primary VLAN. This secondary VLAN continues to work normally as a normal VLAN even though it is not associated to a primary VLAN. (A syslog message indicates this.) • must not have a port in it when VLAN mode is being set. 	
	Only ports (and port channels) configured as promiscuous, host, or PVLAN trunk ports (as previously described) can be added to the PVLAN. No other regular ports can be added to the PVLAN.	
	After using this command to configure a VLAN as a primary VLAN, use the <code>private-vlan mapping secondary-vlan</code> command to map secondary VLANs to this VLAN.	
Related Commands	private-vlan mapping secondary-vlan — maps secondary VLANs to the selected primary VLAN. show interfaces private-vlan — displays the type and status of the PVLAN interfaces. show vlan private-vlan — displays the PVLANS and/or interfaces that are part of a PVLAN. show vlan private-vlan mapping — displays the primary-secondary VLAN mapping. switchport mode private-vlan — sets PVLAN mode of the selected port.	

show interfaces private-vlan

Display type and status of PVLAN interfaces.

Syntax `show interfaces private-vlan [interface interface]`

Parameters **interface *interface*** (OPTIONAL) Enter the keyword `interface` then the ID of the specific interface for which to display PVLAN status.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command has two types of display — a list of all PVLAN interfaces or for a specific interface. Examples of both types of output are shown below.

The following describes the `show interfaces private-vlan` command shown in the following examples.

Field	Description
Interface	Displays the type of interface and associated slot and port number.
Vlan	Displays the VLAN ID of the designated interface.
PVLAN-Type	Displays the type of VLAN in which the designated interface resides.
Interface Type	Displays the PVLAN port type of the designated interface.
Status	States whether the interface is operationally up or down.

Example (All)

```
Dell# show interfaces private-vlan
Interface Vlan PVLAN-Type Interface Type Status
-----
Gi 2/1    10    Primary    Promiscuous Up
Gi 2/2    100   Isolated   Host        Down
Gi 2/3    10    Primary    Trunk       Up
Gi 2/4    101   Community  Host        Up
```

Example (Specific)

```
Dell# show interfaces private-vlan Gi 2/2
Interface Vlan PVLAN-Type Interface Type Status
-----
Gi 2/2    100   Isolated   Host        Up
```

Related Commands

[private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.

[show vlan private-vlan](#) — displays the PVLANS and/or interfaces that are part of a PVLAN.

[show vlan private-vlan mapping](#) — displays the primary-secondary VLAN mapping.

[switchport mode private-vlan](#) — sets PVLAN mode of the selected port.

show vlan private-vlan

Display PVLANS and/or interfaces that are part of a PVLAN.

Syntax

```
show vlan private-vlan [community | interface | isolated | primary |
primary_vlan | interface interface]
```

Parameters

community (OPTIONAL) Enter the keyword `community` to display VLANs configured as community VLANs, along with their interfaces.

interface (OPTIONAL) Enter the keyword `interface` to display VLANs configured as community VLANs, along with their interfaces.

isolated	(OPTIONAL) Enter the keyword <code>isolated</code> to display VLANs configured as isolated VLANs, along with their interfaces.
primary	(OPTIONAL) Enter the keyword <code>primary</code> to display VLANs configured as primary VLANs, along with their interfaces.
primary_vlan	(OPTIONAL) Enter a private VLAN ID or secondary VLAN ID to display interface details about the designated PVLAN.
interface interface	(OPTIONAL) Enter the keyword <code>interface</code> and an interface ID to display the PVLAN configuration of the designated interface.

Defaults none

- Command Modes**
- EXEC
 - EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Examples of all types of command output are shown below. The first type of output is the result of not entering an optional keyword. It displays a detailed list of all PVLANS and their member VLANs and interfaces. The other types of output show details about PVLAN subsets.

The following describes the `show private-vlan` command shown in the Examples below.

Field	Description
Primary	Displays the VLAN ID of the designated or associated primary VLAN(s).
Secondary	Displays the VLAN ID of the designated or associated secondary VLAN(s).
Type	Displays the type of VLAN in which the listed interfaces reside.
Active	States whether the interface is operationally up or down.
Ports	Displays the interface IDs in the listed VLAN.

Example (All)

```
Dell# show vlan private-vlan
Primary Secondary Type Active Ports
-----
10          100      primary Yes   Gi 2/1,3
           101      isolated Yes   Gi 2/2
           101      community Yes   Gi 2/10
20          primary Yes   Po 10, 12-13
           Gi 3/1
           200      isolated Yes   Gi 3/2,4-6
           201      community No
           202      community Yes   Gi 3/11-12
```

Example (Primary)

```
Dell# show vlan private-vlan primary
Primary Secondary Type Active Ports
-----
10          primary Yes   Gi 2/1,3
20          primary Yes   Gi 3/1,3
```

Example (Isolated)

```
Dell# show vlan private-vlan isolated
Primary Secondary Type      Active Ports
-----
10                primary Yes    Gi 2/1,3
                100    isolated Yes    Gi 2/2,4-6
                200    isolated Yes    Gi 3/2,4-6
```

Example (Community)

```
Dell# show vlan private-vlan community
Primary Secondary Type      Active Ports
-----
10                primary Yes    Gi 2/1,3
                101    community Yes    Gi 2/7-10
20                primary Yes    Po 10, 12-13
                Gi 3/1
                201    community No
                202    community Yes    Gi 3/11-12
```

Example (Specific)

```
Dell# show vlan private-vlan interface Gi 2/1
Primary Secondary Type      Active Ports
-----
10                primary Yes    Gi 2/1
```

Usage Information

If the VLAN ID is that of a primary VLAN, the entire private VLAN output is displayed, as shown below. If the VLAN ID is a secondary VLAN, only its primary VLAN and its particular secondary VLAN properties are displayed, as shown in the second Example.

Example

```
Dell# show vlan private-vlan 10
Primary Secondary Type      Active Ports
-----
10                primary Yes    Gi 2/1,3
                102    isolated Yes    Gi 0/4
                101    community Yes    Gi 2/7-10
```

Example

```
Dell# show vlan private-vlan 102
Primary Secondary Type      Active Ports
-----
10                Primary Yes    Po 1
                Gi 0/2
                102    Isolated Yes    Gi 0/4
```

Related Commands

[private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.

[show interfaces private-vlan](#) — displays type and status of PVLAN interfaces.

[show vlan private-vlan mapping](#) — displays the primary-secondary VLAN mapping.

[switchport mode private-vlan](#) — sets PVLAN mode of the selected port.

show vlan private-vlan mapping

Display primary-secondary VLAN mapping.

Syntax `show vlan private-vlan mapping`

Defaults none

Command Modes
· EXEC

- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced the on MXL 10/40GbE Switch IO Module.

Usage Information

The output of this command, shown below, displays the community and isolated VLAN IDs that are associated with each primary VLAN.

Example

```
Dell# show vlan private-vlan mapping
Private Vlan:
  Primary   : 100
  Isolated  : 102
  Community : 101
  Unknown   : 200
```

Related Commands

[private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.

[show vlan private-vlan](#) — displays type and status of PVLAN interfaces.

[show vlan private-vlan mapping](#) — displays the primary-secondary VLAN mapping.

[switchport mode private-vlan](#) — sets PVLAN mode of the selected port.

switchport mode private-vlan

Set PVLAN mode of the selected port.

Syntax

```
[no] switchport mode private-vlan {host | promiscuous | trunk}
```

To remove PVLAN mode from the selected port, use the `no switchport mode private-vlan` command.

Parameters

host	Enter the keyword <code>host</code> to configure the selected port or port channel as an isolated interface in a PVLAN.
promiscuous	Enter the keyword <code>promiscuous</code> to configure the selected port or port channel as an promiscuous interface.
trunk	Enter the keyword <code>trunk</code> to configure the selected port or port channel as a trunk port in a PVLAN.

Defaults

Disabled.

Command Modes

INTERFACE

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The assignment of the various PVLAN port types to port and port channel (LAG) interfaces is shown in the following example.

Example

```
Dell#conf
Dell(conf)#interface GigabitEthernet 2/1
Dell(conf-if-te-2/1)#switchport mode private-vlan promiscuous

Dell(conf)#interface GigabitEthernet 2/2
Dell(conf-if-te-2/2)#switchport mode private-vlan host

Dell(conf)#interface GigabitEthernet 2/3
Dell(conf-if-te-2/3)#switchport mode private-vlan trunk

Dell(conf)#interface port-channel 10
Dell(conf-if-te-2/3)#switchport mode private-vlan promiscuous
```

Related Commands

- [private-vlan mode](#) — sets the mode of the selected VLAN to community, isolated, or primary.
- [private-vlan mapping secondary-vlan](#) — sets the mode of the selected VLAN to primary and then associates the secondary VLANs to it.
- [show interfaces private-vlan](#) — displays type and status of PVLAN interfaces.
- [show vlan private-vlan mapping](#) — displays the primary-secondary VLAN mapping.

Per-VLAN Spanning Tree Plus (PVST+)

The Dell Networking Operating System (OS) implementation of per-VLAN spanning tree plus (PVST+) is based on the IEEE 802.1w standard spanning tree protocol, but it creates a separate spanning tree for each VLAN configured.

NOTE: For easier command line entry, the plus (+) sign is not used at the command line.

Topics:

- [description](#)
- [disable](#)
- [edge-port bpdufilter default](#)
- [extend system-id](#)
- [protocol spanning-tree pvst](#)
- [show spanning-tree pvst](#)
- [spanning-tree pvst](#)
- [spanning-tree pvst err-disable](#)
- [tc-flush-standard](#)
- [vlan bridge-priority](#)
- [vlan forward-delay](#)
- [vlan hello-time](#)
- [vlan max-age](#)

description

Enter a description of the PVST+.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters `description` Enter a description to identify the spanning tree (80 characters maximum).

Defaults none

Command Modes SPANNING TREE PVST+ (The prompt is "config-pvst".)

Supported Modes Full—Switch

Command History	
Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol spanning-tree pvst](#) — enter SPANNING TREE mode on the switch.

disable

Disable PVST+ globally.

Syntax `disable`
To enable PVST+, use the `no disable` command.

Defaults Disabled.

Command Modes CONFIGURATION (conf-pvst)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol spanning-tree pvst](#) — enter PVST+ mode.

edge-port bpdudfilter default

Enable BPDU Filter globally to filter transmission of BPDU on port fast enabled interfaces.

Syntax `edge-port bpdudfilter default`
To disable global bpdu filter default, use the `no edge-port bpdudfilter default` command.

Defaults Disabled

Command Modes CONFIGURATION (The prompt is “config-pvst”.)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

extend system-id

To augment the Bridge ID with a VLAN ID so that PVST+ differentiate between BPDUs for each VLAN, use extend system ID. If the VLAN receives a BPDU meant for another VLAN, PVST+ does not detect a loop, and both ports can remain in Forwarding state.

Syntax `extend system-id`

Defaults Disabled

Command Modes PROTOCOL PVST

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-pvst)#do show spanning-tree pvst vlan 2 brief
VLAN 2
Executing IEEE compatible Spanning Tree Protocol
Root ID      Priority 32768, Address 001e.c9f1.00f3
Root Bridge hello time 2, max age 20, forward delay 15
Bridge ID    Priority 32768, Address 001e.c9f1.00f3
We are the root of Vlan 2
Configured hello time 2, max age 20, forward delay 15
Bpdu filter disabled globally

Interface                               Designated
Name  PortID  Prio Cost  Sts  Cost Bridge ID
PortID
-----
Po 23 128.24 128 1600 FWD 0    32768
001e.c9f1.00f3 128.24
Te 0/10 128.450 128 2000 DIS 0    32768
001e.c9f1.00f3 128.450
Te 0/11 128.459 128 2000 FWD 0    32768
001e.c9f1.00f3 128.459

Interface
Name  Role  PortID  Prio  Cost  Sts  Cost Link-type
Edge BpduFilter
-----
Po 23  Desg  128.24 128 1600 FWD 0    P2P No
No
Te 0/9  Dis  128.450 128 2000 DIS 0    P2P No
No
Te 0/10 Desg  128.459 128 2000 FWD 0    P2P No
No
```

Related Commands [protocol spanning-tree pvst](#) — enter SPANNING TREE mode on the switch.

protocol spanning-tree pvst

To enable PVST+ on a device, enter the PVST+ mode.

Syntax `protocol spanning-tree pvst`
To disable PVST+, use the `disable` command.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#conf
Dell(conf)#protocol spanning-tree pvst
Dell(conf-pvst)#no disable
Dell(conf-pvst)#vlan 2 bridge-priority 4096
Dell(conf-pvst)#vlan 3 bridge-priority 16384
Dell(conf-pvst)#
Dell(conf-pvst)#show config
!
protocol spanning-tree pvst
  no disable
  vlan 2 bridge-priority 4096
  vlan 3 bridge-priority 16384
Dell#
```

Usage Information After you enable PVST+, the device runs an STP instance for each VLAN it supports.

Related Commands [disable](#) — disables PVST+.

[show spanning-tree pvst](#) — displays the PVST+ configuration.

show spanning-tree pvst

View the Per-VLAN spanning tree configuration.

Syntax `show spanning-tree pvst [vlan vlan-id] [brief] [guard]`

Parameters

vlan <i>vlan-id</i>	(OPTIONAL) Enter the keyword <code>vlan</code> then the VLAN ID. The range is 1 to 4094.
brief	(OPTIONAL) Enter the keyword <code>brief</code> to view a synopsis of the PVST+ configuration information.
interface	(OPTIONAL) Enter one of the interface keywords along with the slot/port information: <ul style="list-style-type: none"> For a Port Channel interface, enter the keyword <code>port-channel</code> then a number: The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
guard	(OPTIONAL) Enter the keyword <code>guard</code> to display the type of guard enabled on a PVST interface and the current port state.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show spanning-tree pvst` command shown in the following examples.

Field	Description
Interface Name	PVST interface.
Instance	PVST instance.
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut).
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard).
Bpdu Filter	Yes - Bpdu filter Enabled No - Bpdu filter Disabled

Example (Brief)

```
Dell# show spanning-tree pvst vlan 2 brief
VLAN 2
Executing IEEE compatible Spanning Tree Protocol
Root ID Priority 32768, Address 001e.c9f1.00f3
Root Bridge hello time 2, max age 20, forward delay 15
Bridge ID Priority 32768, Address 001e.c9f1.00f3
We are the root of Vlan 2
Configured hello time 2, max age 20, forward delay 15
Bpdu filter disabled globally
```

Interface Name	PortID	Prio	Cost	Sts	Cost	Designated Bridge ID	PortID
Po 23	128.24	128	1600	FWD	0	32768 001e.c9f1.00f3	128.24
Te 0/10	128.450	128	2000	DIS	0	32768 001e.c9f1.00f3	128.450
Te 0/11	128.459	128	2000	FWD	0	32768 001e.c9f1.00f3	128.459

Interface Name	Role	PortID	Prio	Cost	Sts	Cost	Link-type	Bpdu Edge	Filter
Po 23	Desg	128.24	128	1600	FWD	0	P2P	No	No
Te 0/11	Dis	128.450	128	2000	DIS	0	P2P	No	No
Te 0/12	Desg	128.459	128	2000	FWD	0	P2P	No	No

```
Dell#
```

Example

```
Dell#show spanning-tree pvst vlan 2
VLAN 2
Root Identifier has priority 32768, Address 001e.c9f1.00f3
Root Bridge hello time 2, max age 20, forward delay 15
Bridge Identifier has priority 32768, Address 001e.c9f1.00f3
Configured hello time 2, max age 20, forward delay 15
Bpdu filter disabled globally
We are the root of VLAN 2
Current root has priority 32768, Address 001e.c9f1.00f3
Number of topology changes 0, last change occurred 3dlh ago on

Port 24 (Port-channel 23) is designated Discarding
Port path cost 1600, Port priority 128, Port Identifier 128.24
Designated root has priority 32768, address 001e.c9f1.00:f3
Designated bridge has priority 32768, address 001e.c9f1.00:f3
Designated port id is 128.24 , designated path cost 0
Number of transitions to forwarding state 0
BPDU sent 8, received 0
The port is not in the Edge port mode, bpdu filter is disabled
```

```

Port 450 (TenGigabitEthernet 0/1) is disabled Discarding
Port path cost 2000, Port priority 128, Port Identifier 128.450
Designated root has priority 32768, address 001e.c9f1.00:f3
Designated bridge has priority 32768, address 001e.c9f1.00:f3
Designated port id is 128.450 , designated path cost 0
Number of transitions to forwarding state 0
BPDU sent 0, received 0
The port is not in the Edge port mode, bpdu filter is disabled

Port 459 (TenGigabitEthernet 0/5) is designated Forwarding
Port path cost 2000, Port priority 128, Port Identifier 128.459
Designated root has priority 32768, address 001e.c9f1.00:f3
Designated bridge has priority 32768, address 001e.c9f1.00:f3
Designated port id is 128.459 , designated path cost 0
Number of transitions to forwarding state 1
BPDU sent 16, received 0
The port is not in the Edge port mode, bpdu filter is disabled

```

Example (EDS/LBK) Dell#show spanning-tree pvst vlan 2 interface gigabitethernet 1/0

```

TenGigabitEthernet 0/1 of VLAN 2 is LBK_INC discarding

Edge port:no (default) port guard :none (default)
Link type: point-to-point (auto) bpdu filter:disable (default)
Bpdu guard :disable (default)
Bpdus sent 152, received 27562

Interface Designated
Name      PortID   Prio Cost   Sts Cost Bridge ID      PortID
-----
Te 0/2   128.1223 128   20000 EDS 0 32768 0001.e800.a12b 128.1223

```

Example (EDS/PVID) Dell#show spanning-tree pvst vlan 2 interface gigabitethernet 1/0

```

TenGigabitEthernet 1/0 of VLAN 2 is PVID_INC discarding

Edge port:no (default) port guard :none (default)
Link type: point-to-point (auto) bpdu filter:disable (default)
Bpdu guard :disable (default)
Bpdus sent 1, received 0

Interface Designated
Name      PortID   Prio Cost   Sts Cost Bridge ID      PortID
-----
Te 0/6   128.1223 128   20000 EDS 0 32768 0001.e800.a12b 128.1223

```

Example (Guard) Dell#show spanning-tree pvst vlan 5 guard

```

Interface
Name      Instance Sts      Guard type Bpdu Filter
-----
Te 0/1 0      INCON(Root) Rootguard  No
Te 0/2 0      FWD      Loopguard  No
Te 0/3 0      EDS(Shut) Bpduguard No

```

Related Commands [spanning-tree pvst](#) — configure PVST+ on an interface.

spanning-tree pvst

Configure a PVST+ interface with one of these settings: edge port with optional bridge port data unit (BPDU) guard, port disablement if an error condition occurs, port priority or cost for a VLAN range, loop guard, or root guard.

Syntax `spanning-tree pvst {edge-port [bpduguard [shutdown-on-violation]] | bpdufilter | err-disable | vlan vlan-range {cost number | priority value} | rootguard}`

Parameters

edge-port	Enter the keywords <code>edge-port</code> to configure the interface as a PVST+ edge port.
bpduguard	Enter the keyword <code>portfast</code> to enable Portfast to move the interface into Forwarding mode immediately after the root fails. Enter the keyword <code>bpduguard</code> to disable the port when it receives a BPDU.
shutdown-on-violation	(OPTIONAL) Enter the keywords <code>shutdown-on-violation</code> to hardware disable an interface when a BPDU is received and the port is disabled.
bpdufilter	(OPTIONAL) Enter the keyword <code>bpdufilter</code> to stop sending and receiving BPDUs on port fast enabled ports.
err-disable	Enter the keywords <code>err-disable</code> to enable the port to be put into the error-disable state (EDS) if an error condition occurs.
vlan <i>vlan-range</i>	Enter the keyword <code>vlan</code> then the VLAN numbers. The range is from 1 to 4094.
cost <i>number</i>	Enter the keyword <code>cost</code> then the port cost value. The range is from 1 to 200000. Defaults: <ul style="list-style-type: none">• 10-Gigabit Ethernet interface = 2000.• Port Channel interface with one 10 Gigabit Ethernet = 2000.• Port Channel with two 10 Gigabit Ethernet = 1800.• Port Channel with two 40 Mbps Ethernet = 600.
priority <i>value</i>	Enter the keyword <code>priority</code> then the Port priority value in increments of 16. The range is from 0 to 240. The default is 128 .
rootguard	Enter the keyword <code>rootguard</code> to enable root guard on a PVST+ port or port-channel interface.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The BPDU guard option prevents the port from participating in an active STP topology in case a BPDU appears on a port unintentionally, or is misconfigured, or is subject to a DOS attack. This option places the port into the Error

Disable state if a BPDU appears, and a message is logged so that the administrator can take corrective action. When BPDU guard and BPDU filter is enabled on the port, then BPDU filter takes the highest precedence.

NOTE: A port configured as an edge port, on a PVST switch, will immediately transition to the forwarding state. Only ports connected to end-hosts should be configured as an edge port. Consider an edge port similar to a port with a spanning-tree portfast enabled.

Example

```
Dell(conf-if-te-0/1)#spanning-tree pvst vlan 3 cost 18000
Dell(conf-if-te-0/1)#end
Dell(conf-if-te-0/1)#show config
!
interface TenGigabitEthernet 0/1
 no ip address
 switchport
 spanning-tree pvst vlan 3 cost 18000
 no shutdown
Dell(conf-if-te-0/1)#end
Dell#
```

Related Commands [show spanning-tree pvst](#) — views the PVST+ configuration.

spanning-tree pvst err-disable

Place ports in an Err-Disabled state if they receive a PVST+ BPDU when they are members an untagged VLAN.

Syntax	<code>spanning-tree pvst err-disable cause invalid-pvst-bpdu</code>						
Defaults	Enabled; ports are placed in the Err-Disabled state if they receive a PVST+ BPDU when they are members of an untagged VLAN.						
Command Modes	INTERFACE						
Supported Modes	Full—Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information Some non-Dell Networking systems which have hybrid ports participating in PVST+ transmit two kinds of BPDUs: an 802.1D BPDU and an untagged PVST+ BPDU.

Dell Networking systems do not expect PVST+ BPDU on an untagged port. If this happens, the system places the port in the Error-Disable state. This behavior might result in the network not converging. To prevent the system from executing this action, use the `no spanning-tree pvst err-disable command cause invalid-pvst-bpdu`.

Related Commands [show spanning-tree pvst](#) — views the PVST+ configuration.

tc-flush-standard

Enable the MAC address flushing after receiving every topology change notification.

Syntax `tc-flush-standard`
To disable, use the `no tc-flush-standard` command.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the system implements an optimized flush mechanism for PVST+. This implementation helps in flushing the MAC addresses only when necessary (and less often) allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, you can turn this *knob* command on to enable flushing MAC addresses after receiving every topology change notification.

vlan bridge-priority

Set the PVST+ bridge-priority for a VLAN or a set of VLANs.

Syntax `vlan vlan-id bridge-priority value`
To return to the default value, use the `no vlan bridge-priority` command.

Parameters

- vlan *vlan-range*** Enter the keyword `vlan` then the VLAN numbers. The range is from 1 to 4094.
- bridge-priority *value*** Enter the keywords `bridge-priority` then the bridge priority value in increments of 4096. The range is from 0 to 61440. The default is **32768**.

Defaults **32768**

Command Modes CONFIGURATION (conf-pvst)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [vlan forward-delay](#) — changes the time interval before the system transitions to the Forwarding state.
- [vlan hello-time](#) — change the time interval between BPDUs.
- [vlan max-age](#) — changes the time interval before PVST+ refreshes.

[show spanning-tree pvst](#) — displays the PVST+ configuration.

vlan forward-delay

Set the amount of time the interface waits in the Listening state and the Learning state before transitioning to the Forwarding state.

Syntax `vlan vlan-id forward-delay seconds`
To return to the default setting, use the `no vlan forward-delay` command.

Parameters

<code>vlan <i>vlan-range</i></code>	Enter the keyword <code>vlan</code> then the VLAN numbers. The range is from 1 to 4094.
<code>forward-delay <i>seconds</i></code>	Enter the keywords <code>forward-delay</code> then the time interval, in seconds, that the system waits before transitioning PVST+ to the forwarding state. The range is from 4 to 30 seconds. The default is 15 seconds .

Defaults **15 seconds**

Command Modes CONFIGURATION (conf-pvst)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [vlan bridge-priority](#) — sets the bridge-priority value.

[vlan hello-time](#) — changes the time interval between BPDUs.

[vlan max-age](#) — changes the time interval before PVST+ refreshes.

[show spanning-tree pvst](#) — displays the PVST+ configuration.

vlan hello-time

Set the time interval between generation of PVST+ and BPDUs.

Syntax `vlan vlan-id hello-time seconds`
To return to the default value, use the `no vlan hello-time` command.

Parameters

<code>vlan <i>vlan-range</i></code>	Enter the keyword <code>vlan</code> then the VLAN numbers. The range is from 1 to 4094.
<code>hello-time <i>seconds</i></code>	Enter the keywords <code>hello-time</code> then the time interval, in seconds, between transmission of BPDUs. The range is from 1 to 10 seconds. The default is 2 seconds .

Defaults **2 seconds**

Command Modes CONFIGURATION (conf-pvst)

Supported Modes Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [vlan bridge-priority](#) — sets the bridge-priority value.
- [vlan forward-delay](#) — changes the time interval before the system transitions to the forwarding state.
- [vlan max-age](#) — changes the time interval before PVST+ refreshes.
- [show spanning-tree pvst](#) — displays the PVST+ configuration.

vlan max-age

To maintain configuration information before refreshing that information, set the time interval for the PVST+ bridge.

Syntax

```
vlan vlan-range max-age seconds
```

To return to the default, use the `no vlan max-age` command.

Parameters

- vlan *vlan-range*** Enter the keyword `vlan` then the VLAN numbers. The range is from 1 to 4094.
- max-age *seconds*** Enter the keywords `max-age` then the time interval, in seconds, that the system waits before refreshing configuration information. The range is from 6 to 40 seconds. The default is **20 seconds**.

Defaults

20 seconds

Command Modes

CONFIGURATION (conf-pvst)

Supported Modes

Full—Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [vlan bridge-priority](#) — sets the bridge-priority value.
- [vlan forward-delay](#) — changes the time interval before the system transitions to the forwarding state.
- [vlan hello-time](#) — changes the time interval between BPDUs.
- [show spanning-tree pvst](#) — displays the PVST+ configuration.

Quality of Service (QoS)

The Dell Networking operating software commands for quality of service (QoS) include traffic conditioning and congestion control. QoS commands are not universally supported on all Dell Networking Products.

Global Configuration Commands

There are only two global configuration QoS commands.

qos-rate-adjust

By default, while rate limiting, policing, and shaping, the system does not include the Preamble, SFD, or the IFG fields. These fields are overhead; only the fields from MAC destination address to the CRC are used for forwarding and are included in these rate metering calculations. You can optionally include overhead fields in rate metering calculations by enabling QoS Rate Adjustment.

Syntax `qos-rate-adjustment overhead-bytes`

Parameters

<i>overhead-bytes</i>	Include a specified number of bytes of packet overhead to include in rate limiting, policing, and shaping calculations. The range is from 1 to 31.
------------------------------	--

Defaults QoS rate adjustment is disabled by default, and no `qos-rate-adjust` is listed in the running-configuration

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

service-class dot1p-mapping

Configure a service-class criterion based on a dot1p value.

Syntax `service-class dot1p-mapping {dot1p0 value | dot1p1 value | dot1p2 queue | dot1p3 value | dot1p4 value | dot1p5 value | dot1p6 value | dot1p7 value}`

Parameters

value	Enter a dot1p list number and value. The list number range is from 0 to 7. The range is from 0 to 3.
--------------	--

Defaults For each dot1p Priority, the default CoS queue value is:

- dot1p CoS Queue

0 0-7
1 0-7
2 0-7
3 0-7
4 0-7
5 0-7
6 0-7
7 0-7

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information To apply dot1p-queue-mapping, use the `service-class dynamic dot1p` command.

Per-Port QoS Commands

Per-port QoS (port-based QoS) allows you to define the QoS configuration on a per-physical-port basis.

dot1p-priority

Assign a value to the IEEE 802.1p bits on the traffic this interface receives.

Syntax `dot1p-priority priority-value`
To delete the IEEE 802.1p configuration on the interface, use the `no dot1p-priority` command.

Parameters *priority-value* Enter a value from 0 to 7.

dot1p	Queue Number
0	2
1	0
2	1
3	3
4	4

<code>dot1p</code>	Queue Number
5	5
6	6
7	7

Defaults	none
Command Modes	INTERFACE
Supported Modes	Programmable-Mux (PMUX) Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `dot1p-priority` command changes the priority of incoming traffic on the interface. The system places traffic marked with a priority in the correct queue and processes that traffic according to its queue.

When you set the priority for a port channel, the physical interfaces assigned to the port channel are configured with the same value. You cannot assign the `dot1p-priority` command to individual interfaces in a port channel.

rate police

Police the incoming traffic rate on the selected interface.

Syntax `rate police [kbps] committed-rate [burst-KB] [peak [kbps] peak-rate [burst-KB]] [vlan vlan-id]`

Parameters		
kbps	Enter the keyword <code>kbps</code> to specify the rate limit in Kilobits per second (Kbps). Make the following value a multiple of 64. The range is from 0 to 40000000. The default granularity is Megabits per second (Mbps).	
committed-rate	Enter the bandwidth in Mbps. The range is from 0 to 10000.	
burst-KB	(OPTIONAL) Enter the burst size in KB. The range is from 16 to 200000. The default is 50 .	
peak peak-rate	(OPTIONAL) Enter the keyword <code>peak</code> then a number to specify the peak rate in Mbps. The range is from 0 to 10000.	
vlan vlan-id	(OPTIONAL) Enter the keyword <code>vlan</code> then a VLAN ID to police traffic to those specific VLANs. The range is from 1 to 4094.	

Defaults Granularity for `committed-rate` and `peak-rate` is Mbps unless you use the `kbps` option.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

NOTE: Per port rate police is supported for Layer 2 tagged and untagged switched traffic and for Layer 3 traffic. Per VLAN rate police is supported on only tagged ports with Layer 2 switched traffic.

On one interface, you can configure the `rate police` command for a VLAN or you can configure the `rate police` command for an interface. For each physical interface, you can configure three `rate police` commands specifying different VLANs.

For each physical interface, you can configure three `rate police` commands specifying different VLANs.

Related Commands [rate-police](#) — specifies traffic policing on the selected interface.

rate-shape

Shape the traffic output on the selected interface.

Syntax `rate shape [kbps] rate [burst-KB]`

Parameters

kbps	Enter the keyword <code>kbps</code> to specify the rate limit in Kilobits per second (Kbps). Make the following value a multiple of 64. The range is from 0 to 40000000. The default granularity is Megabits per second (Mbps).
rate	Enter the outgoing rate in multiples of 10 Mbps. The range is from 10 to 10000.
burst-KB	(OPTIONAL) Enter the burst size in KB. The range is from 0 to 10000. The default is 50 .

Defaults Granularity for rate is **Mbps** unless you use the `kbps` option.

Command Modes QOS-POLICY-OUT

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you apply `rate-shape` in QoS policy both on the Queue Level and in Aggregate mode, the queue-based shaping occurs first then aggregate rate shaping.

service-class dynamic dot1p

Honor all 802.1p markings on incoming switched traffic on an interface (from INTERFACE mode) or on all interfaces (from CONFIGURATION mode). A CONFIGURATION mode entry supersedes an INTERFACE mode entry.

Syntax `service-class dynamic dot1p`
To return to the default setting, use the `no service-class dynamic dot1p` command.

Defaults All dot1p traffic is mapped to Queue 0 unless you enable the `service-class dynamic dot1p` command. The default mapping is as follows:

dot1p	Queue ID
0	0
1	0
2	0
3	1
4	2
5	3
6	3
7	3

Command Modes

- INTERFACE
- CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To honor all incoming 802.1p markings on incoming switched traffic on the interface, enter this command. By default, this facility is not enabled (that is, the 802.1p markings on incoming traffic are not honored).

You can apply this command on both physical interfaces and port channels. When you set the `service-class dynamic` for a port channel, the physical interfaces assigned to the port channel are automatically configured; you cannot assign the `service-class dynamic` command to individual interfaces in a port channel.

- All dot1p traffic is mapped to Queue 0 unless you enable the `service-class dynamic dot1p` command on an interface or globally.
- Layer 2 or Layer 3 service policies supersede dot1p service classes.

service-class bandwidth-percentage

Specify a minimum bandwidth for queues.

Syntax `service-class bandwidth-percentage queue0 number queue1 number queue2 number queue3 number`

Parameters **number** Enter the bandwidth-weight, as a percentage. The range is from 1 to 100.

Defaults none

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Guarantee a minimum bandwidth to different queues globally using the `service-class bandwidth-percentage` command from CONFIGURATION mode. The command is applied in the same way as the `bandwidth-percentage` command in an output QoS policy. The `bandwidth-percentage` command in QOS-POLICY-OUT mode supersedes the `service-class bandwidth-percentage` command.

When you enable ETS, the egress QoS features in the output QoS policy-map (such as `service-class bandwidth-percentage` and `bandwidth-percentage`), the default bandwidth allocation ratio for egress queues are superseded by ETS configurations. This is to provide compatibility with DCBX. Therefore, Dell Networking OS recommends disabling ETS when you wish to apply these features exclusively. After you disable ETS on an interface, the configured parameters are applied.

strict-priority unicast

Configure a unicast queue as a strict-priority (SP) queue.

Syntax `strict-priority unicast queue number`

Parameters **unicast number** Enter the keyword `unicast` then the queue number. The range is from 1 to 3.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

After you configure a unicast queue as strict-priority, that particular queue, on the entire chassis, is treated as a `strict-priority` queue. Traffic for a strict priority is scheduled before any other queues are serviced. For example, if you send 100% line rate traffic over the SP queue, it starves all other queues on the ports on which this traffic is flowing. To assign the strict priority schedule type to egress queues, use the `scheduler strict` command in QOS-POLICY-OUT mode. The system OS does not support bandwidth configuration on strict priority scheduler queues.

When you enable ETS, the egress QoS features in the output QoS policy-map (such as `strict priority unicast <0-3>` and `scheduler strict`), default scheduler for egress queues are superseded by ETS configurations. This is to provide compatibility with DCBX. Therefore, Dell Networking OS recommends disabling ETS when you wish to apply these features exclusively. After you disable ETS on an interface, the configured parameters are applied.

Policy-Based QoS Commands

Policy-based QoS is not supported on logical interfaces, such as port-channels, VLANs, or Loopbacks.

The commands are:

- [show qos dcb-map](#)
- [show qos dot1p-queue-mapping](#)

bandwidth-percentage

Assign a percentage of weight to the class/queue.

Syntax

`bandwidth-percentage percentage`

To remove the bandwidth percentage, use the `no bandwidth-percentage` command.

Parameters

percentage Enter the percentage assignment of weight to the class/queue. The range is from 1 to 100% (granularity 1%).

Defaults

none

Command Modes

CONFIGURATION (conf-qos-policy-out)

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The unit of bandwidth percentage is 1%. A bandwidth percentage of 0 is allowed and disables the scheduling of that class. If the sum of the bandwidth percentages given to all eight classes exceeds 100%, the bandwidth percentage automatically scales down to 100%.

Related Commands [qos-policy-output](#) — creates a QoS output policy.

class-map

Create/access a class map. Class maps differentiate traffic so that you can apply separate quality-of-service policies to each class.

Syntax `class-map {match-all | match-any} class-map-name [layer2]`

Parameters		
match-all	Determines how packets are evaluated when multiple match criteria exist. Enter the keywords <code>match-all</code> to determine that the packets must meet all the match criteria in order to be a member of the class.	
match-any	Determines how packets are evaluated when multiple match criteria exist. Enter the keywords <code>match-any</code> to determine that the packets must meet at least one of the match criteria in order to be a member of the class.	
class-map-name	Enter a name of the class for the class map in a character format (32 character maximum).	
layer2	Enter the keyword <code>layer2</code> to specify a Layer 2 Class Map. The default is Layer 3 .	

Defaults Layer 3

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Packets arriving at the input interface are checked against the match criteria configured using this command to determine if the packet belongs to that class. This command accesses CLASS-MAP mode, where the configuration commands include the `match ip` and `match mac` options.

Related Commands [ip access-list extended](#) — configures an extended IP ACL.

[ip access-list standard](#) — configures a standard IP ACL.

[match ip access-group](#) — configures the match criteria based on the access control list (ACL).

[match ip precedence](#) — identifies the IP precedence values as match criteria.

[match ip dscp](#) configures the match criteria based on the DSCP value.

[match ip access-group](#) — configures a match criterion for a class map based on the contents of the designated MAC ACL.

[match mac dot1p](#) — configures a match criterion for a class map based on a dot1p value.

[match mac vlan](#) — configures a match criterion for a class map based on VLAN ID.

[service-queue](#) — assigns a class map and QoS policy to different queues.

[show qos class-map](#) — views the current class map information.

clear qos statistics

Clears matched packets.

Syntax `clear qos statistics interface-name`

Parameters

<i>interface-name</i>	Enter one of the following keywords:
	<ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you issue this command, statistical information stored regarding QoS clears and resets to 0. You can access these statistics using the `show qos statistics` command in EXEC mode. When the traffic pattern matches the QoS classification criteria flows, the corresponding counters increment.

Related Commands [show qos statistics](#) — displays the QoS statistics.

crypto key zeroize rsa

Removes the generated RSA host keys and zeroize the key storage location.

Syntax `crypto key zeroize rsa`

Defaults none

Command Modes	CONFIGURATION
Supporting Modes	Full–Switch
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000–ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL

ip ssh rekey

Configures the time rekey-interval or volume rekey-limit threshold at which to re-generate the SSH key during an SSH session.

Syntax `ip ssh rekey [time rekey-interval] [volume rekey-limit]`
 To reset to the default, use `no ip ssh rekey [time rekey-interval] [volume rekey-limit]` command.

Parameters	time minutes	Enter the keywords <code>time</code> then the amount of time in minutes. The range is from 10 to 1440 minutes. The default is 60 minutes
	volume rekey-limit	Enter the keywords volume then the amount of volume in megabytes. The range is from 1 to 4096 to megabytes. The default is 1024 megabytes

Defaults The default time is **60** minutes. The default volume is **1024** megabytes.

Command Modes CONFIGURATION mode

Supported Modes Full–Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000–ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL

match ip access-group

Configure match criteria for a class map, based on the access control list (ACL).

Syntax `match ip access-group access-group-name [set-ip-dscp value]`
To remove ACL match criteria from a class map, use the `no match ip access-group access-group-name [set-ip-dscp value]` command.

Parameters

- access-group-name** Enter the ACL name whose contents are used as the match criteria in determining if packets belong to the class the `class-map` specifies.
- set-ip-dscp value** (OPTIONAL) Enter the keywords `set-ip-dscp` then the IP DSCP value. The matched traffic is marked with the DSCP value. The range is from 0 to 63.

Defaults none

Command Modes CLASS-MAP CONFIGURATION (config-class-map)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM..
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria. For `class-map match-any`, a maximum of five ACL match criteria are allowed. For `class-map match-all`, only one ACL match criteria is allowed.

Related Commands [class-map](#) — identifies the class map.

match ip vlan

Uses a VLAN as the match criterion for an L3 class map.

Syntax `match ip vlan vlan-id`
To remove VLAN as the match criterion, use the `no match ip vlan vlan-id` command.

Parameters

- vlan vlan-id** Enter the keyword `vlan` and then the ID of the VLAN. The range is from 1 to 4094.

Defaults none

Command Modes CONF-CLASS-MAP

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL switch.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

Use this command to match an IP class-map against a single VLAN ID .

Related Commands [class-map](#) — identifies the class map.

match ip vrf

Uses a VRF as the match criterion for an L3 class map.

Syntax `match ip vrf vrf-id`
 To remove VRF as the match criterion, use the `no match ip vrf vrf-id` command.

Parameters `vlan vlan-id` Enter the keyword `vrf` and then the ID of the VRF. The range is from 1 to 63.

Defaults none

Command Modes CONF-CLASS-MAP

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL switch.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

Use this command to match an IP class-map against a single VRF ID .

Related Commands [class-map](#) — identifies the class map.

description

Add a description to the selected policy map or QoS policy.

Syntax `description {description}`
 To remove the description, use the `no description {description}` command.

Parameters	description	Enter a description to identify the policies (80 characters maximum).
Defaults	none	
Command Modes	CONFIGURATION (policy-map-input and policy-map-output; conf-qos-policy-in and conf-qos-policy-out; wred)	
Supported Modes	Programmable-Mux (PMUX) Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	policy-map-output — creates an output policy map.	
	qos-policy-output — creates an output QoS-policy on the router.	

match ip dscp

Use a differentiated services code point (DSCP) value as a match criteria.

Syntax	<code>match {ip ipv6 ip-any} dscp dscp-list [set-ip-dscp value]</code>	
	To remove a DSCP value as a match criteria, use the <code>no match {ip ipv6 ip-any} dscp dscp-list [[multicast] set-ip-dscp value]</code> command.	
Parameters	ip	Enter the keyword <code>ip</code> to support IPv4 traffic.
	ipv6	Enter the keyword <code>ipv6</code> to support IPv6 traffic
	ip-any	Enter the keyword <code>ip-any</code> to support IPv4 and IPv6 traffic.
	dscp-list	Enter the IP DSCP values that is to be the match criteria. Separate values by commas — no spaces (1,2,3) or indicate a list of values separated by a hyphen (1-3). The range is from 0 to 63.
	set-ip-dscp value	(OPTIONAL) Enter the keywords <code>set-ip-dscp</code> then the IP DSCP value. The matched traffic is marked with the DSCP value. The range is from 0 to 63.
Defaults	none	
Command Modes	CLASS-MAP CONFIGURATION (config-class-map)	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.5(0.0)	Introduced the ipv6 and ip-any options on the MXL 10/40GbE Switch.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

The `match ip dscp` and `match ip precedence` commands are mutually exclusive.

Up to 64 IP DSCP values can be matched in one match statement. For example, to indicate IP DCSP values 0 1 2 3 4 5 6 7, enter either the `match ip dscp 0,1,2,3,4,5,6,7` or `match ip dscp 0-7` command.

NOTE: Only one of the IP DSCP values must be a successful match criterion, not all of the specified IP DSCP values must match.

Related Commands `class-map` — identifies the class map.

match ip precedence

Use IP precedence values as a match criteria.

Syntax `match {ip | ipv6 | ip-any} precedence ip-precedence-list [set-ip-dscp value]`
 To remove IP precedence as a match criteria, use the `no match {ip | ipv6 | ip-any} precedence ip-precedence-list [[multicast] set-ip-dscp value]` command.

Parameters	
<code>ip</code>	Enter the keyword <code>ip</code> to support IPv4 traffic.
<code>ipv6</code>	Enter the keyword <code>ipv6</code> to support IPv6 traffic.
<code>ip-any</code>	Enter the keyword <code>ip-any</code> to support IPv4 and IPv6 traffic.
<code>ip-precedence-list</code>	Enter the IP precedence value(s) as the match criteria. Separate values by commas — no spaces (1,2,3) or indicate a list of values separated by a hyphen (1-3). The range is from 0 to 7.
<code>set-ip-dscp value</code>	(OPTIONAL) Enter the keywords <code>set-ip-dscp</code> then the IP DSCP value. The matched traffic is marked with the DSCP value. The range is from 0 to 63.

Defaults none

Command Modes CLASS-MAP CONFIGURATION (config-class-map)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the support for ipv6 and ip-any options on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

The `match ip precedence` command and the `match ip dscp` command are mutually exclusive.

Up to eight precedence values can be matched in one match statement. For example, to indicate the IP precedence values 0 1 2 3, enter either the `match ip precedence 0-3` or `match ip precedence 0,1,2,3` command.

NOTE: Only one of the IP precedence values must be a successful match criterion, not all of the specified IP precedence values must match.

Related Commands [class-map](#) — identifies the class map.

match mac access-group

Configure a match criterion for a class map, based on the contents of the designated MAC ACL.

Syntax `match mac access-group {mac-acl-name}`

Parameters *mac-acl-name* Enter a MAC ACL name. Its contents is used as the match criteria in the class map.

Defaults none

Command Modes CLASS-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

Related Commands [class-map](#) — identifies the class map.

match mac dot1p

Configure a match criterion for a class map based on a dot1p value.

Syntax `match mac dot1p {dot1p-list}`

Parameters *dot1p-list* Enter a dot1p value. The range is from 0 to 7.

Defaults none

Command Modes CLASS-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. After the class map is identified, you can configure the match criteria.

Related Commands [class-map](#) — identifies the class map.

match mac vlan

Configure a match criterion for a class map based on VLAN ID.

Syntax `match mac vlan number`

Parameters *number* Enter the VLAN ID. The range is from 1 to 4094.

Defaults none

Command Modes CLASS-MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To access this command, enter the `class-map` command. You can match against only one VLAN ID.

Related Commands [class-map](#) — identifies the class map.

policy-aggregate

Allow an aggregate method of configuring per-port QoS via policy maps. An aggregate QoS policy is part of the policy map (input/output) applied on an interface.

Syntax `policy-aggregate qos-policy-name`

To remove a policy aggregate configuration, use the `no policy-aggregate qos-policy-name` command.

Parameters *qos-policy-name* Enter the name of the policy map in character format (32 characters maximum).

Defaults none

Command Modes CONFIGURATION (policy-map-input and policy-map-output)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Aggregate input/output QoS policy applies to all the port ingoing/outgoing traffic. Aggregate input/output QoS policy can coexist with per queue input/output QoS policies.

- 1 If only aggregate input QoS policy exists, input traffic conditioning configurations (rate-police) apply. Any marking configurations in aggregate input QoS policy are ignored.
- 2 If aggregate input QoS policy and per class input QoS policy coexist, aggregate input QoS policy preempts per class input QoS policy on input traffic conditioning (rate-police). In other words, if rate police configuration exists in the aggregate QoS policy, the rate police configurations in per class QoS are ignored. Marking configurations in per class input QoS policy still apply to each queue.

Related Commands [policy-map-output](#) — creates an output policy map.

policy-map-input

Create an input policy map.

Syntax `policy-map-input policy-map-name [layer2]`
 To remove an input policy map, use the `no policy-map-input policy-map-name [layer2]` command.

Parameters

policy-map-name Enter the name of the policy map in character format (32 characters maximum).

layer2 (OPTIONAL) Enter the keyword `layer2` to specify a Layer 2 Class Map. The default is **Layer 3**.

Defaults **Layer 3**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The input policy map is used to classify incoming traffic to different flows using class-map, QoS policy, or incoming packets DSCP. This command enables Policy-Map-Input Configuration mode (`conf-policy-map-in`).

Related Commands [service-queue](#) — assigns a class map and QoS policy to different queues.

[policy-aggregate](#) — allows an aggregate method of configuring per-port QoS using policy maps.

[service-policy input](#) — applies an input policy map to the selected interface.

policy-map-output

Create an output policy map.

Syntax `policy-map-output policy-map-name`
To remove a policy map, use the `no policy-map-output policy-map-name` command.

Parameters `policy-map-name` Enter the name for the policy map in character format (32 characters maximum).

Defaults none

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To assign traffic to different flows using QoS policy, use the Output Policy map. This command enables Policy-Map-Output Configuration mode (`conf-policy-map-out`).

Related Commands [service-queue](#) — assigns a class map and QoS policy to different queues.
[policy-aggregate](#) — allows an aggregate method of configuring per-port QoS using policy maps.
[service-policy output](#) — applies an output policy map to the selected interface.

qos-policy-input

Create a QoS input policy on the router.

Syntax `qos-policy-input qos-policy-name [layer2]`
To remove an existing input QoS policy from the router, use the `no qos-policy-input qos-policy-name [layer2]` command.

Parameters `qos-policy-name` Enter the name for the policy map in character format (32 characters maximum).
`layer2` (OPTIONAL) Enter the keyword `layer2` to specify a Layer 2 Class Map. The default is **Layer 3**.

Defaults **Layer 3**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To specify the name of the input QoS policy, use this command. After the input policy is specified, rate-police is defined. This command enables Qos-Policy-Input Configuration mode — (conf-qos-policy-in).

When changing a Service-Queue configuration in a QoS policy map, all QoS rules are deleted and re-added automatically to ensure that the order of the rules is maintained. As a result, the Matched Packets value shown in the `show qos statistics` command is reset.

Related Commands [rate police](#) — incoming traffic policing function.

qos-policy-output

Create a QoS output policy.

Syntax

`qos-policy-output qos-policy-name`

To remove an existing output QoS policy, use the `no qos-policy-output qos-policy-name` command.

Parameters

qos-policy-name Enter your output QoS policy name in character format (32 characters maximum).

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To specify the name of the output QoS policy, use this command. After the output policy is specified, rate-limit, bandwidth-percentage, and WRED can be defined. This command enables Qos-Policy-Output Configuration mode — (conf-qos-policy-out).

Related Commands [bandwidth-percentage](#) — assigns weight to the class/queue percentage.

rate police

Police the incoming traffic rate on the selected interface.

Syntax `rate police [kbps] committed-rate [burst-KB] [peak [kbps] peak-rate [burst-KB]]`

Parameters	kbps	Enter the keyword <code>kbps</code> to specify the rate limit in Kilobits per second (Kbps). Make the following value a multiple of 64. The range is from 0 to 40000000. The default granularity is Megabits per second (Mbps).
	committed-rate	Enter the bandwidth in Mbps. The range is from 0 to 10000.
	burst-KB	(OPTIONAL) Enter the burst size in KB. The range is from 16 to 200000. The default is 100 .
	peak peak-rate	(OPTIONAL) Enter the keyword <code>peak</code> then a number to specify the peak rate in Mbps. The range is from 0 to 10000. The default is the same as designated for <code>committed-rate</code> .

Defaults Burst size is 100 KB. `peak-rate` is the same as `committed-rate`. Granularity for `committed-rate` and `peak-rate` is Mbps unless you use the `kbps` option.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [rate police](#) — specifies traffic policing on the selected interface.

[qos-policy-input](#) — creates a QoS output policy.

rate shape

Shape the traffic output on the selected interface.

Syntax `rate shape [kbps] rate [burst-KB]`

Parameters	kbps	Enter the keyword <code>kbps</code> to specify the rate limit in Kilobits per second (Kbps). Make the following value a multiple of 64. The range is from 0 to 40000000. The default granularity is Megabits per second (Mbps).
	rate	Enter the outgoing rate in multiples of 10 Mbps. The range is from 10 to 10000.
	burst-KB	(OPTIONAL) Enter the burst size in KB. The range is from 0 to 10000. The default is 50 .

Defaults Granularity for rate is **Mbps** unless you use the `kbps` option.

Command Modes QOS-POLICY-OUT

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you apply `rate-shape` in QoS policy both on the Queue Level and in Aggregate mode, the queue-based shaping occurs first then aggregate rate shaping.

service-policy input

Apply an input policy map to the selected interface.

Syntax

```
service-policy input policy-map-name [layer2]
```

To remove the input policy map from the interface, use the `no service-policy input policy-map-name [layer2]` command.

Parameters

policy-map-name Enter the name for the policy map in character format (16 characters maximum). You can identify an existing policy map or name one that does not yet exist.

layer2 (OPTIONAL) Enter the keyword `layer2` to specify a Layer 2 Class Map. The default is **Layer 3**.

Defaults

Layer 3

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can attach a single policy-map to one or more interfaces to specify the service-policy for those interfaces. A policy map attached to an interface can be modified.

NOTE: The `service-policy` commands are not allowed on a port channel. The `service-policy input policy-map-name` command and the `service-class dynamic dot1p` command are not allowed simultaneously on an interface.

Related Commands `policy-map-input` — creates an input policy map.

service-policy output

Apply an output policy map to the selected interface.

Syntax	<code>service-policy output <i>policy-map-name</i></code> To remove the output policy map from the interface, use the <code>no service-policy output <i>policy-map-name</i></code> command.										
Parameters	<i>policy-map-name</i> Enter the name for the policy map in character format (16 characters maximum). You can identify an existing policy map or name one that does not yet exist.										
Defaults	none										
Command Modes	INTERFACE										
Supported Modes	Programmable-Mux (PMUX) Full-Switch										
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>9.4(0.0)</td><td>Supported on the FN I/O Aggregator.</td></tr><tr><td>9.2(0.0)</td><td>Introduced on the M I/O Aggregator.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.4(0.0)	Supported on the FN I/O Aggregator.	9.2(0.0)	Introduced on the M I/O Aggregator.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description										
9.9(0.0)	Introduced on the FN IOM.										
9.4(0.0)	Supported on the FN I/O Aggregator.										
9.2(0.0)	Introduced on the M I/O Aggregator.										
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.										
Usage Information	A single policy-map can be attached to one or more interfaces to specify the service-policy for those interfaces. A policy map attached to an interface can be modified.										
Related Commands	policy-map-output — creates an output policy map.										

service-queue

Assign a class map and QoS policy to different queues.

Syntax	<code>service-queue <i>queue-id</i> [class-map <i>class-map-name</i>] [qos-policy <i>qos-policy-name</i>]</code> To remove the queue assignment, use the <code>no service-queue <i>queue-id</i> [class-map <i>class-map-name</i>] [qos-policy <i>qos-policy-name</i>]</code> command.
Parameters	<i>queue-id</i> Enter the value used to identify a queue. The range is from 0 to 3 (four queues per interface; four queues are reserved for control traffic). class-map <i>class-map-name</i> (OPTIONAL) Enter the keyword <code>class-map</code> then the class map name assigned to the queue in character format (32 character maximum). NOTE: This option is available under <code>policy-map-input</code> only.

qos-policy qos-policy-name (OPTIONAL) Enter the keywords `qos-policy` then the QoS policy name assigned to the queue in text format (32 characters maximum). This specifies the input QoS policy assigned to the queue under `policy-map-input` and output QoS policy under `policy-map-output` context.

Defaults none

Command Modes CONFIGURATION (conf-policy-map-in and conf-policy-map-out)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command assigns a class map or QoS policy to different queues.

Related Commands [service-policy output](#) — applies an output policy map to the selected interface.

set

Mark outgoing traffic with a differentiated service code point (DSCP) or dot1p value.

Syntax `set {ip-dscp value | mac-dot1p value}`

Parameters

ip-dscp value (OPTIONAL) Enter the keywords `ip-dscp` then the IP DSCP value. The range is from 0 to 63.

mac-dot1p value Enter the keywords `mac-dot1p` then the dot1p value. The range is from 0 to 7.

Defaults none

Command Modes CONFIGURATION (conf-qos-policy-in)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information After the IP DSCP bit is set, other QoS services can then operate on the bit settings.

show qos class-map

View the current class map information.

Syntax `show qos class-map [class-name]`

Parameters *class-name* (Optional) Enter the name of a configured class map.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos class-map
Class-map match-any CM
  Match ip access-group ACL
```

Related Commands [class-map](#) — identifies the class map.

show qos dcb-map

Display the DCB parameters configured in a specified DCB map.

Syntax `show qos dcb-map map-name`

Parameters *map-name* Displays the PFC and ETS parameters configured in the specified map.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O aggregator.

Usage Information Use the `show qos dcb-map` command to display the enhanced transmission selection (ETS) and priority-based flow control (PFC) parameters used to configure server-facing Ethernet ports.

The following table describes the `show qos dcb-map` output shown in the example below.

Field	Description
State	Complete: All mandatory DCB parameters are correctly configured. In progress: The DCB map configuration is not complete. Some mandatory parameters are not configured.
PFC Mode	PFC configuration in DCB map: On (enabled) or Off.
PG	Priority group configured in the DCB map.
TSA	Transmission scheduling algorithm used by the priority group: Enhanced Transmission Selection (ETS).
BW	Percentage of bandwidth allocated to the priority group.
PFC	PFC setting for the priority group: On (enabled) or Off.
Priorities	802.1p priorities configured in the priority group.

Example

```
Dell# show qos dcb-map dcbmap2

State      :Complete
PfcMode:ON
-----
PG:0 TSA:ETS BW:50 PFC:OFF
Priorities:0 1 2 4 5 6 7

PG:1 TSA:ETS BW:50 PFC:ON
Priorities:3
```

Related Commands

`dcb-map` — creates a DCB map to configure PFC and ETS parameters and applies the PFC and ETS settings on Ethernet ports.

show qos policy-map

View the QoS policy map information.

Syntax `show qos policy-map {summary [interface] | detail [interface]}`

Parameters

- summary *interface*** To view a policy map interface summary, enter the keyword `summary` and optionally one of the following keywords and slot/port or number information:
- For a 10 Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- detail *interface*** To view a policy map interface in detail, enter the keyword `detail` and optionally one of the following keywords and slot/port or number information:
- For a 10 Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults none

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (IPv4)

```
Dell#show qos policy-map detail tengigabitethernet 0/0

Interface tenGigabitEthernet 0/4

Policy-map-input policy
Trust dffserv
Queue# Class-map-name Qos-policy-name
0 - q0
1 CM1 q1
2 CM2 q2
3 CM3 q3
```

Example (Summary IPv4)

```
Dell#sho qos policy-map summary

Interface policy-map-input policy-map-output
Gi 4/1 PM1 -
Te 4/2 PM2 PMOut
Dell#
```

show qos policy-map-input

View the input QoS policy map details.

Syntax `show qos policy-map-input [policy-map-name] [class class-map-name] [qos-policy-input qos-policy-name]`

Parameters

<i>policy-map-name</i>	Enter the policy map name.
<i>class class-map-name</i>	Enter the keyword <code>class</code> then the class map name.
<i>qos-policy-input qos-policy-name</i>	Enter the keyword <code>qos-policy-input</code> then the QoS policy name.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos policy-map-input
Policy-map-input PolicyMapInput
Aggregate Qos-policy-name AggPolicyIn
Queue# Class-map-name Qos-policy-name
0 ClassMap1 qosPolicyInput
Dell#
```

show qos qos-policy-output

View the output QoS policy details.

Syntax `show qos qos-policy-output [qos-policy-name]`

Parameters `qos-policy-name` Enter the QoS policy name.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos qos-policy-output
Qos-policy-output qmap_out
Bandwidth-percentage 10
Qos-policy-output qmap_wg
Rate-shape 100 50
Wred yellow wy
Wred green wg
Dell#
```

show qos qos-policy-input

View the input QoS policy details.

Syntax `show qos qos-policy-input [qos-policy-name]`

Parameters *qos-policy-name* Enter the QoS policy name.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos qos-policy-input
Qos-policy-input QosInput
    Rate-police 100 50 peak 100 50
    Dscp 32
Dell#
```

show qos qos-policy-output

View the output QoS policy details.

Syntax show qos qos-policy-output [*qos-policy-name*]

Parameters *qos-policy-name* Enter the QoS policy name.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos qos-policy-output
Qos-policy-output qmap_out
Bandwidth-percentage 10
Qos-policy-output qmap_wg
Rate-shape 100 50
Wred yellow wy
Wred green wg
Dell#
```

show qos statistics

View QoS statistics.

Syntax

```
show qos statistics {egress-queue [interface]} | {wred-profile [interface]} | [interface]
```

Parameters

egress-queue interface Enter the keyword `egress-queue` to display the egress-queue statistics and optionally one of the following keywords and slot/port or number information.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port or number information.

wred-profile interface Enter the keywords `wred-profile` and optionally one of the following keywords and slot/port or number information.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port or number information.

interface Enter one of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port or number information.

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.11(0.0)	Updated the <code>show qos statistics egress-queue</code> output to reflect per queue per port tx and rx statistics.
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Added the <code>egress-queue</code> keyword.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos statistics egress-queue fortyGigE 0/37
Interface Fo 0/37
Unicast/Multicast Egress Queue Statistics
Queue# Q# Type TxPkts TxPkts/s TxBytes TxBytes/s DroppedPkts DroppedPkts/s DropP
-----
0 UCAST 0 0 0 0 0 0
1 UCAST 0 0 0 0 0 0
2 UCAST 0 0 0 0 0 0
3 UCAST 0 0 0 0 0 0
4 UCAST 0 0 0 0 0 0
5 UCAST 0 0 0 0 0 0
6 UCAST 0 0 0 0 0 0
7 UCAST 5575 0 624366 217 0 0
8 MCAST 0 0 0 0 0 0
9 MCAST 0 0 0 0 0 0
10 MCAST 0 0 0 0 0 0
11 MCAST 0 0 0 0 0 0
12 MCAST 0 0 0 0 0 0
Dell#
```

show qos wred-profile

View the WRED profile details.

Syntax `show qos wred-profile wred-profile-name`

Parameters
wred-profile-name Enter the WRED profile name to view the profile details.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show qos wred-profile
Wred-profile-name min-threshold max-threshold
wred_drop          0              0
wred_teng_y        467            4671
wred_teng_g        467            4671
wred_fortyg_y     467            4671
wred_fortyg_g     467            4671
```

test cam-usage

Checks the Input Policy Map configuration for the CAM usage.

Syntax `test cam-usage service-policy input policy-map stack-unit {[number | [all]]}`

Parameters

- policy-map** Enter the policy map name.
- stack-unit number** (OPTIONAL) Enter the keywords `stack-unit` then the stack-unit number.
- stack-unit all** (OPTIONAL) Enter the keywords `stack-unit all` to indicate all the stack-units.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This feature allows you to determine if the CAM has enough space available before applying the configuration on an interface.

An input policy map with both Trust and Class-map configuration, the Class-map rules are ignored and only the Trust rule is programmed in the CAM. In such an instance, the Estimated CAM output column contains the size of the CAM space required for the Trust rule and not the Class-map rule.

The following describes the text `cam-usage service-policy input policy-map linecard` command shown in the following example.

Field	Description
stack-unit	Indicates the line card slot number.
Portpipe	Indicates the portpipe number.
CAM Partition	The CAM space where the rules are added.
Available CAM	Indicates the free CAM space, in the partition, for the classification rules.
	NOTE: The CAM entries reserved for the default rules are not included in the Available CAM column; free entries, from the default rules space, cannot be used as a policy map for the classification rules.
Estimated CAM per Port	Indicates the number of free CAM entries required (for the classification rules) to apply the input policy map on a single interface.
	NOTE: The CAM entries for the default rule are not included in this column; a CAM entry for the default rule is always dedicated to a port and is always available for that interface.
Status (Allowed ports)	Indicates if the input policy map configuration on an interface belonging to a linecard/port-pipe is successful — Allowed (n) — or not successful — Exception. The allowed number (n) indicates the number of ports in that port-pipe on which the Policy Map can be applied successfully.

NOTE: In a Layer 2 Policy Map, IPv4/IPv6 rules are not allowed; therefore, the output contains only L2ACL CAM partition entries.

Example

```
Dell# test cam-usage service-policy input pmap_l2 stack-unit all
For a L2 Input Policy Map pmap_l2, the output must be as follows,
Stack-unit|Portpipe|CAM Partition|Available CAM|Estimated CAM|Status
          |         |          |          |per Port      |
(Allowed ports)
0         0         L2ACL     500      200
  Allowed (2)
  Exception 1         L2ACL     100      200
1         0         L2ACL    1000     200
  Allowed (5)
  Exception 1         L2ACL      0       200
          ...
          ...
          ...
13        1         L2ACL     400      200
  Allowed (2)
Dell#
```

trust

Specify dynamic classification (DSCP) or dot1p to trust.

Syntax `trust {diffserv [fallback] | dot1p [fallback]}`

Parameters

diffserv	Enter the keyword <code>diffserv</code> to specify trust of DSCP markings.
dot1p	Enter the keyword <code>dot1p</code> to specify trust dot1p configuration.
fallback	Enter the keyword <code>fallback</code> to classify packets according to their DSCP value as a secondary option in case no match occurs against the configured class maps.

Defaults none

Command Modes CONFIGURATION (conf-policy-map-in)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you configure `trust`, matched bytes/packets counters are not incremented in the `show qos statistics` command.

Dynamic mapping honors packets marked according to the standard definitions of DSCP. The following lists the default mapping.

Table 2. Default Mapping

DSCP/CP hex Range (XXX)	DSCP Definition	Traditional IP Precedence	MXL Switch Internal Queue ID	DSCP/CP Decimal
111XXX		Network Control	3	48–63
110XXX		Internetwork Control	3	48–63
101XXX	EF (Expedited Forwarding)	CRITIC/ECP	2	32–47
100XXX	AF4 (Assured Forwarding)	Flash Override	2	32–47
011XXX	AF3	Flash	1	16–31
010XXX	AF2	Immediate	1	16–31
001XXX	AF1	Priority	0	0–15
000XXX	BE (Best Effort)	Best Effort	0	0–15

wred

Designate the WRED profile to yellow or green traffic.

Syntax `wred [{yellow | green} profile-name] ecn`
To remove the WRED drop precedence, use the `no wred {yellow | green} [profile-name]` command.

Parameters

yellow green	Enter the keyword <code>yellow</code> for yellow traffic. A DSCP value of xxx110 and xxx101 maps to yellow. Enter the keyword <code>green</code> for green traffic. A DSCP value of xxx0xx maps to green.
profile-name	Enter your WRED profile name in character format (16 character maximum). Or use one of the five pre-defined WRED profile names. Pre-defined Profiles: <code>wred_drop</code> , <code>wred-ge_y</code> , <code>wred-ge_g</code> , <code>wred_teng_y</code> , <code>wred_teng_</code> .
ecn	When you configure <code>wred ecn <cr></code> command, instead of dropping the packets exponentially, Explicit Congestion Notification (ECN) marking is made on the packets.

Defaults none

Command Modes CONFIGURATION (conf-qos-policy-out)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the M I/O Aggregator.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To assign drop precedence to green or yellow traffic, use this command. If there is no honoring enabled on the input, all the traffic defaults to green drop precedence.

Related Commands [wred-profile](#) — creates a WRED profile and name that profile.
[trust](#) — defines the dynamic classification to trust DSCP.

wred ecn

To indicate network congestion, rather than dropping packets, use explicit congestion notification (ECN).

Syntax `wred ecn`
To stop marking packets, use the `no wred ecn` command.

Defaults none

Command Modes	CONFIGURATION (conf-qos-policy-out)
Supported Modes	Full-Switch
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.0.2.0	Introduced on the S6000.
8.3.19.0	Introduced on the S4820t.
8.3.11.1	Introduced on the Z9000.
8.3.7.0	Introduced on the S4810.

Usage Information When you enable `wred ecn`, and the number of packets in the queue is below the minimum threshold, packets are transmitted per the usual WRED treatment.

When you enable `wred ecn`, and the number of packets in the queue is between the minimum threshold and the maximum threshold, one of the following two scenarios can occur:

- If the transmission endpoints are ECN-capable and traffic is congested, and the WRED algorithm determines that the packet should have been dropped based on the drop probability, the packet is transmitted and marked so the routers know the system is congested and can slow transmission rates.
- If neither endpoint is ECN-capable, the packet may be dropped based on the WRED drop probability. This behavior is the identical treatment that a packet receives when WRED is enabled without ECN configured on the router.

When you enable `wred ecn`, and the number of packets in the queue is above the maximum threshold, packets are dropped based on the drop probability. This behavior is the identical treatment a packet receives when WRED is enabled without ECN configured on the router.

Related Commands [wred-profile](#) — creates a WRED profile and name that profile.

wred-profile

Create a WRED profile and name the profile.

Syntax `wred-profile wred-profile-name`
To remove an existing WRED profile, use the `no wred-profile` command.

Parameters **wred-profile-name** Enter your WRED profile name in character format (16 character maximum). Or use one of the pre-defined WRED profile names. You can configure up to 26 WRED profiles plus the five pre-defined profiles, for a total of 31 WRED profiles.

Pre-defined Profiles: `wred_drop`, `wred-ge_y`, `wred_ge_g`, `wred_teng_y`, `wred_teng_g`.

Defaults	The five pre-defined WRED profiles. When you configure a new profile, the minimum and maximum threshold defaults to predefined <code>wred_ge_g</code> values.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the M I/O Aggregator.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	Use the default pre-defined profiles or configure your own profile. You cannot delete the pre-defined profiles or their default values. This command enables WRED configuration mode — (<code>conf-wred</code>).	

dscp

Sets the number of specific DSCP values for a color map profile to yellow or red.

Syntax `dscp {yellow | red} [list-dscp-values]`
 To remove a color policy map profile, use the `no dscp {yellow | red} [dscp-list]` command.

Parameters	Yellow	Enter the <code>yellow</code> keyword. Traffic marked as yellow delivers traffic to the egress queue which either transmits the packet if it has available bandwidth or drops the packet due to no ability to send.
	Red	Enter the <code>red</code> keyword. Traffic marked as red is dropped.
	dscp-list	Enter a list of IP DSCP values. The <code>dscp-list</code> parameter specifies the full list of IP DSCP value(s) for the specified color. Each DSCP value in a list is separate values by commas – no spaces (1,2,3) or indicates a list of values separated by a hyphen (1-3). Range is 0 to 63.

Defaults	None
Command Modes	CONFIG-COLOR-MAP
Supported Modes	Full-Switch
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5.0.0	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information If the specified color-map does not exist, the Diffserv Manager (DSM) creates a color map and sets all the DSCP values to green (low drop precedence).

The default setting for each DSCP value (0-63) is green (low drop precedence). This command allows setting the number of specific DSCP values to yellow or red.

Important Points to Remember

- All DSCP values that are not specified as yellow or red are colored green.
- A DSCP value cannot be in both the yellow and red lists. Setting the red or yellow list with any DSCP value that is already in the other list results in an error and no update to that list is made.
- Each color map can only have one list of DSCP values for each color; any DSCP values previously listed for that color that are not in the new DSCP list are colored green.

Example

```
Dell(conf-dscp-color-map)# dscp yellow 9,10,11,13,15,16
```

Related Commands

[qos dscp-color-map](#) — configures the DSCP color map

[qos dscp-color-policy](#) — configures a DSCP color policy

qos dscp-color-map

Configure the DSCP color map.

Syntax

```
qos dscp-color-map map-name
```

To remove a color map, use the `no qos dscp-color-map map-name` command.

Parameters

map-name

Enter the name of the DSCP color map. The map name can have a maximum of 32 characters.

Defaults

None

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5.0.0	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information

A color map outlines the codepoint mappings to the appropriate color mapping (green, yellow, red) for the traffic. The system uses this information use to handle the traffic on the interface based on the traffic priority and places it into the appropriate shaping queue. You cannot delete a DSCP color map when it is configured on an interface. If you do, all the DSCP values are set to green (low drop precedence). To delete the DSCP color map that is being used by one or more interfaces, remove the DSCP map from each interface.

Example

```
Dell(conf)#qos dscp-color-map mymap
```

Related Commands [qos dscp-color-map](#) — associates the DSCP color map profile with an interface so that all IP packets received on it is given a color based on that color map

[dscp](#) — sets the number of specific DSCP values for color map profile to yellow or red.

qos dscp-color-policy

Associates the DSCP color map profile with an interface so that all IP packets received on it is given a color based on that color map.

Syntax `dscp-color-policy color-map-profile-name`
To remove a color policy map profile, use the `no dscp-color-policy color-map-profile-name` command.

Parameters `color-map-profile-name` Enter the color map profile name. The name can have a maximum of 32 characters.

Defaults **None**

Command Modes CONFIG-INTERFACE

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
Version 9.5.0.0	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information If the specified color-map does not exist, the Diffserv Manager (DSM) creates a color map and sets all the DSCP values to green (low drop precedence).

Example The following example assigns the color map, **bat-enclave-map**, to interface.

Related Commands [dscp](#) — sets the number of specific DSCP values for color map profile to yellow or red.

[qos dscp-color-map](#) — configures the DSCP color map.

show qos dscp-color-policy

Display DSCP color policy configuration for one or all interfaces.

Syntax `show qos dscp-color-policy {summary [interface] | detail {interface}}`

Parameters	summary	Enter the <code>summary</code> keyword to display summary information about a color policy on one or more interfaces.
	Detail	Enter the <code>detail</code> keyword to display detailed information about a color policy on one or more interfaces.
	interface	Enter the name of the interface that has color policy configured.

Defaults **None**

Command Modes EXEC

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5.0.0	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Example

Related Commands `show qos dscp-color-map` — displays DSCP color maps

show qos dscp-color-map

Display the DSCP color map for one or all interfaces.

Syntax `show qos dscp-color-map map-name`

Parameters **map-name** Enter the name of the color map.

Defaults **None**

Command Modes EXEC

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5.0.0	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Example

```
Display all DSCP color maps.

Dell# show qos dscp-color-map
Dscp-color-map mapONE
  yellow 4,7
  red 20,30
Dscp-color-map mapTWO
  yellow 16,55

Display a specific DSCP color map.

Dell# show qos dscp-color-map mapTWO
Dscp-color-map mapTWO
  yellow 16,55
```

Related Commands [show qos dscp-color-policy](#) — displays a DSCP Color Policy Configuration

show qos dot1p-queue-mapping

View dot1p to queue mapping.

Syntax `show qos dot1p-queue-mapping`

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show qos dot1p-queue-mapping
Dot1p Priority : 0 1 2 3 4 5 6 7
                Queue : 0 0 0 1 2 3 3 3
Dell#
```

trust

Specify dynamic classification (DSCP) or dot1p to trust.

Syntax `trust {diffserv [fallback]| dot1p [fallback]}`

Parameters

- diffserv** Enter the keyword `diffserv` to specify trust of DSCP markings.
- dot1p** Enter the keyword `dot1p` to specify trust dot1p configuration.

fallback Enter the keyword `fallback` to classify packets according to their DSCP value as a secondary option in case no match occurs against the configured class maps.

Defaults none

Command Modes CONFIGURATION (conf-policy-map-in)

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

When you configure `trust`, matched bytes/packets counters are not incremented in the `show qos statistics` command.

Dynamic mapping honors packets marked according to the standard definitions of DSCP. The following lists the default mapping.

Table 3. Default Mapping

DSCP/CP hex Range (XXX)	DSCP Definition	Traditional IP Precedence	MXL Switch Internal Queue ID	DSCP/CP Decimal
111XXX		Network Control	3	48–63
110XXX		Internetwork Control	3	48–63
101XXX	EF (Expedited Forwarding)	CRITIC/ECP	2	32–47
100XXX	AF4 (Assured Forwarding)	Flash Override	2	32–47
011XXX	AF3	Flash	1	16–31
010XXX	AF2	Immediate	1	16–31
001XXX	AF1	Priority	0	0–15
000XXX	BE (Best Effort)	Best Effort	0	0–15

Routing Information Protocol (RIP)

Routing information protocol (RIP) is a distance vector routing protocol. The Dell Networking Operating System (OS) supports both RIP version 1 (RIPv1) and RIP version 2 (RIPv2).

The implementation of RIP is based on IETF RFCs 2453 and RFC 1058. For more information about configuring RIP, refer to the *Dell Networking OS Configuration Guide*.

Topics:

- [auto-summary](#)
- [clear ip rip](#)
- [debug ip rip](#)
- [default-information originate](#)
- [default-metric](#)
- [description](#)
- [distance](#)
- [distribute-list in](#)
- [distribute-list out](#)
- [ip poison-reverse](#)
- [ip rip receive version](#)
- [ip rip send version](#)
- [ip split-horizon](#)
- [maximum-paths](#)
- [neighbor](#)
- [network](#)
- [offset-list](#)
- [output-delay](#)
- [passive-interface](#)
- [redistribute](#)
- [redistribute ospf](#)
- [router rip](#)
- [show config](#)
- [show ip rip database](#)
- [show running-config rip](#)
- [timers basic](#)
- [version](#)

auto-summary

Restore the default behavior of automatic summarization of subnet routes into network routes. This command applies only to RIP version 2.

Syntax `auto-summary`

To send sub-prefix routing information, use the `no auto-summary` command.

Defaults	Enabled.
Command Modes	ROUTER RIP
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip rip

Update all the RIP routes in the routing table.

Syntax	<code>clear ip rip</code>
Command Modes	EXEC Privilege
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command triggers updates of the main RIP routing tables.

debug ip rip

Examine RIP routing information for troubleshooting.

Syntax	<code>debug ip rip [interface database events [interface] packet [interface] trigger]</code>
--------	--

To turn off debugging output, use the `no debug ip rip` command.

Parameters	interface (OPTIONAL) Enter the interface type and ID as one of the following:
	<ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
	database (OPTIONAL) Enter the keyword <code>database</code> to display messages when there is a change to the RIP database.
	events (OPTIONAL) Enter the keyword <code>events</code> to debug only RIP protocol changes.

trigger (OPTIONAL) Enter the keyword `trigger` to debug only RIP trigger extensions.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

default-information originate

Generate a default route for the RIP traffic.

Syntax `default-information originate [always] [metric metric-value] [route-map map-name]`

To return to the default values, use the `no default-information originate` command.

Parameters

always	(OPTIONAL) Enter the keyword <code>always</code> to enable the switch software to always advertise the default route.
metric <i>metric-value</i>	(OPTIONAL) Enter the keyword <code>metric</code> then a number as the metric value. The range is from 1 to 16. The default is 1 .
route-map <i>map-name</i>	(OPTIONAL) Enter the keywords <code>route-map</code> then the name of a configured route-map.

Defaults Disabled. Metric: **1**.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The default route must be present in the switch routing table for the `default-information originate` command to take effect.

default-metric

Change the default metric for routes. To ensure that all redistributed routes use the same metric value, use this command with the `redistribute` command.

Syntax `default-metric number`

To return the default metric to the original values, use the `no default-metric` command.

Parameters	<i>number</i>	Specify a number. The range is from 1 to 16. The default is 1 .
Defaults	1	
Command Modes	ROUTER RIP	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	This command ensures that route information being redistributed is converted to the same metric value.	
Related Commands	redistribute — allows you to redistribute routes learned by other methods.	

description

Enter a description of the RIP routing protocol.

Syntax	<code>description {description}</code>
	To remove the description, use the <code>no description {description}</code> command.

Parameters	<i>description</i>	Enter a description to identify the RIP protocol (80 characters maximum).
------------	--------------------	---

Defaults	none
Command Modes	ROUTER RIP
Supported Modes	Full-Switch
Command History	Version

	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands	router rip — enters ROUTER mode on the switch.
------------------	--

distance

Assign a weight (for prioritization) to all routes in the RIP routing table or to a specific route. Lower weights (“administrative distance”) are preferred.

Syntax	<code>distance weight [ip-address mask [prefix-name]]</code>
	To return to the default values, use the <code>no distance weight [ip-address mask]</code> command.

Parameters	<i>weight</i>	Enter a number from 1 to 255 for the weight (for prioritization). The default is 120 .
	<i>ip-address</i>	(OPTIONAL) Enter the IP address, in dotted decimal format (A.B.C.D), of the host or network to receive the new distance metric.

<i>mask</i>	If you enter an IP address, also enter a mask for that IP address, in either dotted decimal format or /prefix format (/x).
<i>prefix-name</i>	(OPTIONAL) Enter a configured prefix list name.

Defaults weight = **120**

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [default-metric](#) — assigns one distance metric to all routes learned using the `redistribute` command.

distribute-list in

Configure a filter for incoming routing updates.

Syntax

`distribute-list prefix-list-name in [interface]`

To delete the filter, use the `no distribute-list prefix-list-name in` command.

Parameters

<i>prefix-list-name</i>	Enter the name of a configured prefix list.
<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip prefix-list](#) — enters PREFIX-LIST mode and configures a prefix list.

distribute-list out

Configure a filter for outgoing routing updates.

Syntax `distribute-list prefix-list-name out [interface | bgp | connected | ospf | static]`

To delete the filter, use the `no distribute-list prefix-list-name out` command.

Parameters

<i>prefix-list-name</i>	Enter the name of a configured prefix list.
<i>interface</i>	(OPTIONAL) Identifies the interface type slot/port as one of the following: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.
connected	(OPTIONAL) Enter the keyword <code>connected</code> to filter only directly connected routes.
ospf	(OPTIONAL) Enter the keyword <code>ospf</code> to filter all OSPF routes.
static	(OPTIONAL) Enter the keyword <code>static</code> to filter manually configured routes.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip prefix-list](#) — enters PREFIX-LIST mode and configures a prefix list.

ip poison-reverse

Set the prefix of the RIP routing updates to the RIP infinity value.

Syntax `ip poison-reverse`
To disable poison reverse, use the `no ip poison-reverse` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip split-horizon](#) — sets the RIP routing updates to exclude routing prefixes.

ip rip receive version

To receive specific versions of RIP, set the interface. The RIP version you set on the interface overrides the version command in ROUTER RIP mode.

Syntax `ip rip receive version [1] [2]`
 To return to the default, use the `no ip rip receive version` command.

Parameters

1	(OPTIONAL) Enter the number 1 for RIP version 1.
2	(OPTIONAL) Enter the number 2 for RIP version 2.

Defaults **RIPv1** and **RIPv2**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you want the interface to receive both versions of RIP, use the `ip rip receive version 1 2` command.

Related Commands [ip rip send version](#) — sets the RIP version for sending RIP traffic on an interface.
[version](#) — sets the RIP version the switch software uses.

ip rip send version

To send a specific version of RIP, set the interface. The version you set on the interface overrides the version command in ROUTER RIP mode.

Syntax `ip rip send version [1] [2]`
 To return to the default value, use the `no ip rip send version` command.

Parameters

1	(OPTIONAL) Enter the number 1 for RIP version 1. The default is RIPv1.
2	(OPTIONAL) Enter the number 2 for RIP version 2.

Defaults **RIPv1**

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To enable the interface to send both version of RIP packets, use the `ip rip send version 1 2` command.

Related Commands [ip rip receive version](#) — sets the RIP version for the interface to receive traffic.

[version](#) — sets the RIP version for the switch software.

ip split-horizon

Enable split-horizon for RIP data on the interface. As described in RFC 2453, the split-horizon scheme prevents any routes learned over a specific interface to be sent back out that interface.

Syntax `ip split-horizon`
To disable split-horizon, use the `no ip split-horizon` command.

Defaults Enabled

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip poison-reverse](#) — sets the prefix for RIP routing updates.

maximum-paths

Set RIP to forward packets over multiple paths.

Syntax `maximum-paths number`
To return to the default values, use the `no maximum-paths` commands.

Parameters *number* Enter the number of paths. The range is from 1 to 16. The default is **4** paths.

Defaults **4**

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information RIP supports a maximum of 16 ECMP paths.

neighbor

Define a neighbor router with which to exchange RIP information.

Syntax `neighbor ip-address`
To delete a neighbor setting, use the `no neighbor ip-address` command.

Parameters *ip-address* Enter the IP address, in dotted decimal format, of a router with which to exchange information.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When a neighbor router is identified, unicast data exchanges occur. Multiple neighbor routers are possible.
To ensure that only specific interfaces are receiving and sending data, use the `passive-interface` command with the `neighbor` command.

Related Commands [passive-interface](#) — sets the interface to only listen to RIP broadcasts.

network

Enable RIP for a specified network. To enable RIP on all networks connected to the switch, use this command.

Syntax `network ip-address`
To disable RIP for a network, use the `no network ip-address` command.

Parameters *ip-address* Specify an IP network address in dotted decimal format. You cannot specify a subnet.

Defaults No RIP network is configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

You can enable an unlimited number of RIP networks.

RIP operates over interfaces configured with any address the `network` command specifies.

offset-list

Specify a number to add to the incoming or outgoing route metrics learned using RIP.

Syntax

```
offset-list prefix-list-name {in | out} offset [interface]
```

To delete an offset list, use the `no offset-list prefix-list-name {in | out} offset [interface]` command.

Parameters

<i>prefix-list-name</i>	Enter the name of an established Prefix list to determine which incoming routes are modified.
<i>offset</i>	Enter a number from zero (0) to 16 to be applied to the incoming route metric matching the access list specified. If you set an offset value to zero (0), no action is taken.
<i>interface</i>	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults

Not configured.

Command Modes

ROUTER RIP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

When the offset metric is applied to an interface, that value takes precedence over an offset value that is not extended to an interface.

Related Commands

[ip prefix-list](#) — enters PREFIX-LIST mode and configure a prefix list.

output-delay

Set the interpacket delay of successive packets to the same neighbor.

Syntax `output-delay delay`
To return to the switch software defaults for interpacket delay, use the `no output-delay` command.

Parameters `delay` Specify a number of milliseconds as the delay interval. The range is from 8 to 50.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is intended for low-speed interfaces.

passive-interface

Suppress routing updates on a specified interface.

Syntax `passive-interface interface`
To delete a passive interface, use the `no passive-interface interface` command.

Parameters `interface` Enter the following information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a VLAN, enter the keyword `vlan` then a number from 1 to 4094.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Although the passive interface does not send or receive routing updates, the network on that interface still includes in RIP updates sent using other interfaces.

Related Commands [neighbor](#) — enables RIP for a specified network.

[network](#) — defines a neighbor.

redistribute

Redistribute information from other routing instances.

Syntax `redistribute {connected | static}`
To disable redistribution, use the `no redistribute {connected | static}` command.

Parameters

connected	Enter the keyword <code>connected</code> to specify that information from active routes on interfaces is redistributed.
static	Enter the keyword <code>static</code> to specify that information from static routes is redistributed.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To redistribute the default route (0.0.0.0/0), configure the `default-information originate` command.

Related Commands [default-information originate](#) — generates a default route for RIP traffic.

redistribute ospf

Redistribute routing information from an OSPF process.

Syntax `redistribute ospf process-id [match external {1 | 2} | match internal | metric metric-value] [route-map map-name]`
To disable redistribution, use the `no redistribute ospf process-id [match external {1 | 2} | match internal | metric metric-value] [route-map map-name]` command.

Parameters

process-id	Enter a number that corresponds to the OSPF process ID to redistribute. The range is from 1 to 65355.
match external {1 2}	(OPTIONAL) Enter the keywords <code>match external</code> then the numbers 1 or 2 to indicate that external 1 routes or external 2 routes should be redistributed.
match internal	(OPTIONAL) Enter the keywords <code>match internal</code> to indicate that internal routes should be redistributed.

metric *metric-value* (OPTIONAL) Enter the keyword `metric` then a number as the metric value. The range is from 0 to 16.

route-map *map-name* (OPTIONAL) Enter the keywords `route-map` then the name of a configured route map.

Defaults Not configured.

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

router rip

To configure and enable RIP, enter ROUTER RIP mode.

Syntax `router rip`
To disable RIP, use the `no router rip` command.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To enable RIP, assign a network address using the `network` command.

Example

```
Dell(conf)#router rip
Dell(conf-router_rip)#
```

Related Commands [network](#) — enables RIP.

show config

Display the changes you made to the RIP configuration. The default values are not shown.

Syntax `show config`

Command Modes ROUTER RIP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell (conf-router_rip)#show config
!
router rip
 network 172.31.0.0
 passive-interface TenGigabitEthernet 0/1
Dell (conf-router_rip)#
```

show ip rip database

Display the routes that RIP learns. If the switch learned no RIP routes, no output is generated.

Syntax `show ip rip database [ip-address mask]`

Parameters

<i>ip-address</i>	(OPTIONAL) Specify an IP address in dotted decimal format to view RIP information on that network only. If you enter an IP address, also enter a mask for that IP address.
<i>mask</i>	(OPTIONAL) Specify a mask, in /network format, for the IP address.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip rip database` command shown in the following example.

Field	Description
Total number of routes in RIP database	Displays the number of RIP routes stored in the RIP database.
100.10.10.0/24 directly connected	Lists the routes directly connected.
150.100.0.0 redistributed	Lists the routes learned through redistribution.
209.9.16.0/24...	Lists the routes and the sources advertising those routes.

Example

```
Dell#show ip rip database
Total number of routes in RIP database: 1624
204.250.54.0/24
 [50/1] via 192.14.1.3, 00:00:12, TenGigabitEthernet 0/1
204.250.54.0/24 auto-summary
203.250.49.0/24
 [50/1] via 192.13.1.3, 00:00:12, TenGigabitEthernet 0/1
203.250.49.0/24 auto-summary
210.250.40.0/24
```

```

[50/2] via 1.1.18.2, 00:00:14, Vlan 18
[50/2] via 1.1.130.2, 00:00:12, Port-channel 30
210.250.40.0/24      auto-summary
207.250.53.0/24
[50/2] via 1.1.120.2, 00:00:55, Port-channel 20
[50/2] via 1.1.130.2, 00:00:12, Port-channel 30
[50/2] via 1.1.10.2, 00:00:18, Vlan 10
207.250.53.0/24      auto-summary
208.250.42.0/24
[50/2] via 1.1.120.2, 00:00:55, Port-channel 20
[50/2] via 1.1.130.2, 00:00:12, Port-channel 30
[50/2] via 1.1.10.2, 00:00:18, Vlan 10
208.250.42.0/24      auto-summary

```

show running-config rip

Display the current RIP configuration.

Syntax `show running-config rip`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

show running-config rip
!
router rip
  distribute-list Test1 in
  distribute-list Test21 out
  network 10.0.0.0
  passive-interface TenGigabitEthernet 1/4
  neighbor 20.20.20.20
  redistribute ospf 999
  version 2

```

timers basic

Manipulate the RIP timers for routing updates, invalid, holddown times, and flush time.

Syntax `timers basic update invalid holddown flush`

To return to the default settings, use the `no timers basic` command.

Parameters

<i>update</i>	Enter the number of seconds to specify the rate at which RIP routing updates are sent. The range is from zero (0) to 4294967295. The default is 30 seconds .
<i>invalid</i>	Enter the number of seconds to specify the time interval before routing updates are declared invalid or expired. The invalid value should be at least three times the update timer value. The range is from zero (0) to 4294967295. The default is 180 seconds .

holddown	Enter the number of seconds to specify a time interval during which the route is marked as unreachable but still sending RIP packets. The holddown value should be at least three times the update timer value. The range is from zero (0) to 4294967295. The default is 180 seconds .
flush	Enter the number of seconds to specify the time interval during which the route is advertised as unreachable. When this interval expires, the route is flushed from the routing table. The flush value should be greater than the update value. The range is from zero (0) to 4294967295. The default is 240 seconds .

Defaults

- update = **30 seconds**
- invalid = **180 seconds**
- holddown = **180 seconds**
- flush = **240 seconds**

Command Modes ROUTER RIP

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you change the timers on one router, also synchronize the timers on all routers in the RIP domain.

version

Specify either RIP version 1 or RIP version 2.

Syntax `version {1 | 2}`
To return to the default version setting, use the `no version` command.

Parameters	1	Enter the keyword 1 to specify RIP version 1.
	2	Enter the keyword 2 to specify RIP version 2.

Defaults The system sends RIPv1 and receives RIPv1 and RIPv2.

Command Modes ROUTER RIP

Supported Modes Full–Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [ip rip receive version](#) — sets the RIP version the interface receives.

[ip rip send version](#) — sets the RIP version the interface sends.

Remote Monitoring (RMON)

The Dell Networking Operating System (OS) remote monitoring (RMON) is based on IEEE standards, providing both 32-bit and 64-bit monitoring and long-term statistics collection.

RMON supports the following RMON groups, as defined in RFC-2819, RFC-3273, RFC-3434 and RFC-4502:

- Ethernet Statistics Table; RFC-2819
- Ethernet Statistics High-Capacity Table; RFC-3273, 64bits
- Ethernet History Control Table; RFC-2819
- Ethernet History Table; RFC-2819
- Ethernet History High-Capacity Table; RFC-3273, 64bits
- Alarm Table; RFC-2819
- High-Capacity Alarm Table (64bits); RFC-3434, 64bits
- Event Table; RFC-2819
- Log Table; RFC-2819
- User History; RFC-4502
- Probe Configuration (Capabilities, SoftwareRev, HardwareRev, Date Time and ResetControl); RFC-4502

RMON does not support the following statistics:

- etherStatsCollisions
- etherHistoryCollisions
- etherHistoryUtilization

NOTE: Only simple network management protocol (SNMP) GET/GETNEXT access is supported. Configure RMON using the RMON commands. Collected data is lost during a chassis reboot.

Topics:

- [rmon alarm](#)
- [rmon collection history](#)
- [rmon collection statistics](#)
- [rmon event](#)
- [rmon hc-alarm](#)
- [show rmon](#)
- [show rmon alarms](#)
- [show rmon events](#)
- [show rmon hc-alarm](#)
- [show rmon history](#)
- [show rmon log](#)
- [show rmon statistics](#)

rmon alarm

Set an alarm on any MIB object.

Syntax `rmon alarm number variable interval {delta | absolute} rising-threshold value event-number falling-threshold value event-number [owner string]`

To disable the alarm, use the `no rmon alarm number` command.

Parameters

<i>number</i>	Enter the alarm integer number from 1 to 65535. The value must be unique in the RMON alarm table.
<i>variable</i>	Enter the MIB object to monitor. The variable must be in the SNMP OID format; for example, 1.3.6.1.2.1.1.3. The object type must be a 32-bit integer.
<i>interval</i>	Time, in seconds, the alarm monitors the MIB variables; this is the <code>alarmSampleType</code> in the RMON alarm table. The range is from 5 to 3600 seconds.
<i>delta</i>	Enter the keyword <code>delta</code> to test the change between MIB variables. This is the <code>alarmSampleType</code> in the RMON alarm table.
<i>absolute</i>	Enter the keyword <code>absolute</code> to test each MIB variable directly. This is the <code>alarmSampleType</code> in the RMON alarm table.
<i>rising-threshold value event-number</i>	Enter the keywords <code>rising-threshold</code> then the value (32 bit) the rising-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the rising threshold exceeds its limit. This value is the same as the <code>alarmRisingEventIndex</code> or <code>alarmTable</code> of the RMON MIB. If there is no corresponding rising-threshold event, the value is zero.
<i>falling-threshold value event-number</i>	Enter the keywords <code>falling-threshold</code> then the value (32 bit) the falling-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the falling threshold exceeds its limit. This value is the same as the <code>alarmFallingEventIndex</code> or the <code>alarmTable</code> of the RMON MIB. If there is no corresponding falling-threshold event, the value is zero.
<i>owner string</i>	(OPTIONAL) Enter the keyword <code>owner</code> then the owner name to specify an owner for the alarm. This is the <code>alarmOwner</code> object in the <code>alarmTable</code> of the RMON MIB.

Defaults

owner

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

rmon collection history

Enable the RMON MIB history group of statistics collection on an interface.

Syntax `rmon collection history {controlEntry integer} [owner name] [buckets number] [interval seconds]`
To remove a specified RMON history group of statistics collection, use the `no rmon collection history {controlEntry integer}` command.

Parameters

- controlEntry *integer*** Enter the keyword `controlEntry` to specify the RMON group of statistics using a value. Then enter an integer value from 1 to 65535 that identifies the RMON group of statistics. The integer value must be a unique index in the RMON history table.
- owner *name*** (OPTIONAL) Enter the keyword `owner` then the owner name to record the owner of the RMON group of statistics.
- buckets *number*** (OPTIONAL) Enter the keyword `buckets` then the number of buckets for the RMON collection history group of statistics. The bucket range is from 1 to 1000. The default is **50**.
- interval *seconds*** (OPTIONAL) Enter the keyword `interval` then the number of seconds in each polling cycle. The range is from 5 to 3600 seconds. The default is **1800 seconds**.

Defaults none

Command Modes CONFIGURATION INTERFACE (config-if)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

rmon collection statistics

Enable RMON MIB statistics collection on an interface.

Syntax `rmon collection statistics {controlEntry integer} [owner name]`
To remove RMON MIB statistics collection on an interface, use the `no rmon collection statistics {controlEntry integer}` command.

Parameters

- controlEntry *integer*** Enter the keyword `controlEntry` to specify the RMON group of statistics using a value. Then enter an integer value from 1 to 65535 that identifies the RMON Statistic Table. The integer value must be a unique in the RMON statistic table.
- owner *name*** (OPTIONAL) Enter the keyword `owner` then the owner name to record the owner of the RMON group of statistics.

Defaults none

Command Modes CONFIGURATION INTERFACE (config-if)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

rmon event

Add an event in the RMON event table.

Syntax `rmon event number [log] [trap community] [description string] [owner name]`
To disable RMON on an interface, use the `no rmon event number` command.

Parameters

<i>number</i>	Assign an event number in integer format from 1 to 65535. The number value must be unique in the RMON event table.
log	(OPTIONAL) Enter the keyword <code>log</code> to generate an RMON log entry. The log entry is triggered and sets the eventType in the RMON MIB to log or log-and-trap. The default is No log .
trap <i>community</i>	(OPTIONAL) Enter the keyword <code>trap</code> then an SNMP community string to configure the eventType setting in the RMON MIB. This keyword sets either <code>snmp-trap</code> or <code>log-and-trap</code> . The default is public .
description <i>string</i>	(OPTIONAL) Enter the keyword <code>description</code> then a string describing the event.
owner <i>name</i>	(OPTIONAL) Enter the keyword <code>owner</code> then the name of the owner of this event.

Defaults As noted in the *Parameters* section.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

rmon hc-alarm

Set an alarm on any MIB object.

Syntax `rmon hc-alarm number variable interval {delta | absolute} rising-threshold value event-number falling-threshold value event-number [owner string]`
To disable the alarm, use the `no rmon hc-alarm number` command.

Parameters

<i>number</i>	Enter the alarm integer number from 1 to 65535. The value must be unique in the RMON alarm table.
----------------------	---

variable	The MIB object to monitor. The variable must be in the SNMP OID format; for example, 1.3.6.1.2.1.1.3 The object type must be a 64-bit integer.
interval	Time, in seconds, the alarm monitors the MIB variables; this is the alarmSampleType in the RMON alarm table. The range is from 5 to 3600 seconds.
delta	Enter the keyword <code>delta</code> to test the change between MIB variables. This is the alarmSampleType in the RMON alarm table.
absolute	Enter the keyword <code>absolute</code> to test each MIB variable directly. This is the alarmSampleType in the RMON alarm table.
rising-threshold value event-number	Enter the keywords <code>rising-threshold</code> then the value (64 bit) the rising-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the rising threshold exceeds its limit. This value is the same as the alarmRisingEventIndex or alarmTable of the RMON MIB. If there is no corresponding rising-threshold event, the value is zero.
falling-threshold value event-number	Enter the keywords <code>falling-threshold</code> then the value (64 bit) the falling-threshold alarm is either triggered or reset. Then enter the event-number to trigger when the falling threshold exceeds its limit. This value is the same as the alarmFallingEventIndex or the alarmTable of the RMON MIB. If there is no corresponding falling-threshold event, the value is zero.
owner string	(OPTIONAL) Enter the keyword <code>owner</code> then the owner name to specify an owner for the alarm. This is the alarmOwner object in the alarmTable of the RMON MIB.

Defaults	owner
Command Modes	CONFIGURATION
Supported Modes	Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show rmon

Display the RMON running status including the memory usage.

Syntax	<code>show rmon</code>
Defaults	none
Command Modes	EXEC
Supported Modes	Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell# show rmon
RMON status
total memory used 218840 bytes.
```

```

ether statistics table: 8 entries, 4608 bytes
ether history table: 8 entries, 6000 bytes
alarm table: 390 entries, 102960 bytes
high-capacity alarm table: 5 entries, 1680 bytes
event table: 500 entries, 206000 bytes
log table: 2 entries, 552 bytes
Dell#

```

show rmon alarms

Display the contents of the RMON alarm table.

Syntax `show rmon alarms [index] [brief]`

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
<i>brief</i>	(OPTIONAL) Enter the keyword <code>brief</code> to display the RMON alarm table in an easy-to-read format.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Index)

```

Dell#show rmon alarm 1
RMON alarm entry 1
  sample Interval: 5
  object: 1.3.6.1.2.1.1.3
  sample type: absolute value.
  value: 255161
  alarm type: rising or falling alarm.
  rising threshold: 1, RMON event index: 1
  falling threshold: 501, RMON event index: 501
  alarm owner: 1
  alarm status: OK
Dell#

```

Example (Brief)

```

Dell#show rmon alarm br
index  SNMP OID
-----
1      1.3.6.1.2.1.1.3
2      1.3.6.1.2.1.1.3
3      1.3.6.1.2.1.1.3
4      1.3.6.1.2.1.1.3
5      1.3.6.1.2.1.1.3
6      1.3.6.1.2.1.1.3
7      1.3.6.1.2.1.1.3
8      1.3.6.1.2.1.1.3
9      1.3.6.1.2.1.1.3
10     1.3.6.1.2.1.1.3
11     1.3.6.1.2.1.1.3
12     1.3.6.1.2.1.1.3
13     1.3.6.1.2.1.1.3
14     1.3.6.1.2.1.1.3
15     1.3.6.1.2.1.1.3

```

```
16      1.3.6.1.2.1.1.3
17      1.3.6.1.2.1.1.3
18      1.3.6.1.2.1.1.3
19      1.3.6.1.2.1.1.3
20      1.3.6.1.2.1.1.3
21      1.3.6.1.2.1.1.3
22      1.3.6.1.2.1.1.3
Dell#
```

show rmon events

Display the contents of the RMON event table.

Syntax `show rmon events [index] [brief]`

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
<i>brief</i>	(OPTIONAL) Enter the keyword <code>brief</code> to display the RMON event table in an easy-to-read format.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Index)

```
Dell#show rmon event 1
RMON event entry 1
  description: 1
  event type: LOG and SNMP TRAP.
  event community: public
  event last time sent: none
  event owner: 1
  event status: OK
Dell#
```

Example (Brief)

```
Dell#show rmon event br
index      description
-----
1          1
2          2
3          3
4          4
5          5
6          6
7          7
8          8
9          9
10         10
11         11
12         12
13         13
14         14
15         15
16         16
17         17
```

```
18      18
19      19
20      20
21      21
22      22
Dell#
```

show rmon hc-alarm

Display the contents of RMON High-Capacity alarm table.

Syntax `show rmon hc-alarm [index] [brief]`

Parameters

index	(OPTIONAL) Enter the table index number to display just that entry.
brief	(OPTIONAL) Enter the keyword <code>brief</code> to display the RMON High-Capacity alarm table in an easy-to-read format.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Index)

```
Dell#show rmon hc-alarm 1
RMON high-capacity alarm entry 2
  object: 1.3.6.1.2.1.2.2.1.4.2099844
  sample interval: 10
  sample type: delta value.
  value: 0, value status: positive
  alarm type: rising or falling alarm.
  alarm rising threshold value: positive.
  rising threshold: 500, RMON event index: 3
  alarm falling threshold value: positive.
  falling threshold: 300, RMON event index: 4
  alarm sampling failed 0 times.
  alarm owner:
  alarm storage type: non-volatile.
  alarm status: OK
Dell#
```

Example (Brief)

```
Dell#show rmon hc-alarm brief
index      SNMP OID
-----
1          1.3.6.1.2.1.1.3
2          1.3.6.1.2.1.1.3
3          1.3.6.1.2.1.1.3
4          1.3.6.1.2.1.1.3
5          1.3.6.1.2.1.1.3
Dell#
```

show rmon history

Display the contents of the RMON Ethernet history table.

Syntax `show rmon history [index] [brief]`

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
<i>brief</i>	(OPTIONAL) Enter the keyword <code>brief</code> to display the RMON Ethernet history table in an easy-to-read format

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Index)

```
Dell#show rmon history 6001
RMON history control entry 6001
  interface: ifIndex.100974631 GigabitEthernet 2/0
  bucket requested: 1
  bucket granted: 1
  sampling interval: 5 sec
  owner: 1
  status: OK
Dell#
```

Example (Brief)

```
Dell#show rmon history brief
index      ifIndex      interface
-----
6001      100974631    GigabitEthernet 2/0
6002      100974631    GigabitEthernet 2/0
6003      101236775    GigabitEthernet 2/1
6004      101236775    GigabitEthernet 2/1
9001      134529054    GigabitEthernet 3/0
9002      134529054    GigabitEthernet 3/0
9003      134791198    GigabitEthernet 3/1
9004      134791198    GigabitEthernet 3/1
Dell#
```

show rmon log

Display the contents of the RMON log table.

Syntax `show rmon log [index] [brief]`

Parameters

<i>index</i>	(OPTIONAL) Enter the table index number to display just that entry.
<i>brief</i>	(OPTIONAL) Enter the keyword <code>brief</code> to display the RMON log table in an easy-to-read format.

Defaults	none
Command Modes	EXEC
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The log table has a maximum of 500 entries. If the log exceeds that maximum, the oldest log entry is purged to allow room for the new entry.

Example (Index)

```
Dell#show rmon log 2
RMON log entry, alarm table index 2, log index 1
  log time: 14638 (THU AUG 12 22:10:40 2004)
  description: 2
Dell#
```

Example (Brief)

```
Dell#show rmon log br
eventIndex      description
-----
2                2
4                4
Dell#
```

show rmon statistics

Display the contents of RMON Ethernet statistics table.

Syntax `show rmon statistics [index] [brief]`

Parameters

- index** (OPTIONAL) Enter the table index number to display just that entry.
- brief** (OPTIONAL) Enter the keyword `brief` to display the RMON Ethernet statistics table in an easy-to-read format.

Defaults	none
Command Modes	EXEC
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Index)

```
Dell#show rmon statistics 6001
RMON statistics entry 6001
  interface: ifIndex.100974631 GigabitEthernet 2/0
  packets dropped: 0
  bytes received: 0
  packets received: 0
  broadcast packets: 0
  multicast packets: 0
  CRC error: 0
```

```

under-size packets: 0
over-size packets: 0
fragment errors: 0
jabber errors: 0
collision: 0
64bytes packets: 0
65-127 bytes packets: 0
128-255 bytes packets: 0
256-511 bytes packets: 0
512-1023 bytes packets: 0
1024-1518 bytes packets: 0
owner: 1
status: OK
<high-capacity data>
HC packets received overflow: 0
HC packets received: 0
HC bytes received overflow: 0
HC bytes received: 0
HC 64bytes packets overflow: 0
HC 64bytes packets: 0
HC 65-127 bytes packets overflow: 0
HC 65-127 bytes packets: 0
HC 128-255 bytes packets overflow: 0
HC 128-255 bytes packets: 0
HC 256-511 bytes packets overflow: 0
HC 256-511 bytes packets: 0
HC 512-1023 bytes packets overflow: 0
HC 512-1023 bytes packets: 0
HC 1024-1518 bytes packets overflow: 0
HC 1024-1518 bytes packets: 0
Dell#

```

Example (Brief)

```

Dell#show rmon statistics br
index      ifIndex      interface
-----
6001      100974631    GigabitEthernet 2/0
6002      100974631    GigabitEthernet 2/0
6003      101236775    GigabitEthernet 2/1
6004      101236775    GigabitEthernet 2/1
9001      134529054    GigabitEthernet 3/0
9002      134529054    GigabitEthernet 3/0
9003      134791198    GigabitEthernet 3/1
9004      134791198    GigabitEthernet 3/1
Dell#

```

Rapid Spanning Tree Protocol (RSTP)

The Dell Networking Operating System (OS) implementation of rapid spanning tree protocol (RSTP) is based on the IEEE 802.1w standard spanning-tree protocol. The RSTP algorithm configures connectivity throughout a bridged local area network (LAN) that is comprised of LANs interconnected by bridges.

bridge-priority

Set the bridge priority for RSTP.

Syntax	<code>bridge-priority <i>priority-value</i></code> To return to the default value, use the <code>no bridge-priority</code> command.	
Parameters	<i>priority-value</i>	Enter a number as the bridge priority value in increments of 4096. The range is from 0 to 61440. The default is 32768 .
Defaults	32768	
Command Modes	CONFIGURATION RSTP (conf-rstp)	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	protocol spanning-tree rstp — enters rapid spanning tree mode.	

debug spanning-tree rstp

Enable debugging of RSTP and view information on the protocol.

Syntax	<code>debug spanning-tree rstp [<i>all</i> <i>bpdu interface</i> {<i>in</i> <i>out</i>} <i>events</i>]</code> To disable debugging, use the <code>no debug spanning-tree rstp</code> command.	
Parameters	<i>all</i>	(OPTIONAL) Enter the keyword <code>all</code> to debug all spanning tree operations.
	<i>bpdu interface</i> {<i>in</i> <i>out</i>}	(OPTIONAL) Enter the keyword <code>bpdu</code> to debug the bridge protocol data units. (OPTIONAL) Enter the keyword <code>interface</code> along with the type slot/port of the interface you want displayed. Type slot/port options are the following: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Optionally, enter an in or out parameter with the optional interface:

- For Receive, enter `in`.
- For Transmit, enter `out`.

events (OPTIONAL) Enter the keyword `events` to debug RSTP events.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#debug spanning-tree rstp bpdu gigabitethernet 2/0 ?
in Receive (in)
out Transmit (out)
```

description

Enter a description of the rapid spanning tree.

Syntax `description {description}`
To remove the description, use the `no description {description}` command.

Parameters **description** Enter a description to identify the rapid spanning tree (80 characters maximum).

Defaults none

Command Modes SPANNING TREE (The prompt is "config-rstp".)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [protocol spanning-tree rstp](#) — enters SPANNING TREE mode on the switch.

disable

Disable RSTP globally on the system.

Syntax `disable`
To enable Rapid Spanning Tree Protocol, use the `no disable` command.

Defaults	RSTP is disabled.	
Command Modes	CONFIGURATION RSTP (conf-rstp)	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Related Commands	protocol spanning-tree rstp — enters SPANNING TREE mode on the switch.	

forward-delay

Configure the amount of time the interface waits in the Listening State and the Learning State before transitioning to the Forwarding State.

Syntax `forward-delay seconds`
 To return to the default setting, use the `no forward-delay` command.

Parameters

seconds	Enter the number of seconds that the system waits before transitioning RSTP to the forwarding state. The range is from 4 to 30. The default is 15 seconds .
----------------	--

Defaults **15 seconds**

Command Modes CONFIGURATION RSTP (conf-rstp)

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [hello-time](#) — changes the time interval between BPDUs.
[max-age](#) — changes the wait time before RSTP refreshes the protocol configuration information.

hello-time

Set the time interval between the generation of the RSTP bridge protocol data units (BPDUs).

Syntax `hello-time [milli-second] seconds`
 To return to the default value, use the `no hello-time` command.

Parameters

seconds	Enter a number as the time interval between transmission of BPDUs. The range is from 1 to 10 seconds. The default is 2 seconds .
milli-second	Enter the keywords <code>milli-second</code> to configure a hello time on the order of milliseconds. The range is from 50 to 950 milliseconds

Defaults	2 seconds
Command Modes	CONFIGURATION RSTP (conf-rstp)
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The hello time is encoded in BPDUs in increments of 1/256ths of a second. The standard minimum hello time in seconds is 1 second, which is encoded as 256. Millisecond hello times are encoded using values less than 256; the millisecond hello time equals (x/1000)*256.

When you configure millisecond hellos, the default hello interval of 2 seconds is still used for edge ports; the millisecond hello interval is not used.

Related Commands [forward-delay](#) — changes the wait time before RSTP transitions to the Forwarding state.
[max-age](#) — changes the wait time before RSTP refreshes the protocol configuration information.

max-age

To maintain configuration information before refreshing that information, set the time interval for the RSTP bridge.

Syntax `max-age seconds`
 To return to the default values, use the `no max-age` command.

Parameters `max-age` Enter a number of seconds that the waits before refreshing configuration information. The range is from 6 to 40 seconds. The default is **20 seconds**.

Defaults	20 seconds
Command Modes	CONFIGURATION RSTP (conf-rstp)
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [forward-delay](#) — changes the wait time before RSTP transitions to the Forwarding state.
[hello-time](#) — changes the time interval between BPDUs.

edge-port bpdufilter default

To filter transmission of BPDU on port fast enabled interfaces, enable BPDU Filter globally.

Syntax	<code>edge-port bpdufilter default</code> To disable global bpdu filter default, use the <code>no edge-port bpdufilter default</code> command.						
Parameters	<table><tr><td><i>priority-value</i></td><td>Enter a number as the bridge priority value in increments of 4096. The range is from 0 to 61440. The default is 32768.</td></tr></table>	<i>priority-value</i>	Enter a number as the bridge priority value in increments of 4096. The range is from 0 to 61440. The default is 32768 .				
<i>priority-value</i>	Enter a number as the bridge priority value in increments of 4096. The range is from 0 to 61440. The default is 32768 .						
Defaults	Disabled						
Command Modes	CONFIGURATION (conf-rstp)						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						

protocol spanning-tree rstp

To configure RSTP, enter RSTP mode.

Syntax	<code>protocol spanning-tree rstp</code> To exit RSTP mode, use the <code>exit</code> command.						
Defaults	Not configured						
Command Modes	CONFIGURATION						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	RSTP is not enabled when you enter RSTP mode. To enable RSTP globally on the system, use the <code>no disable</code> command from RSTP mode.						
Example	<pre>Dell(conf)#protocol spanning-tree rstp Dell(config-rstp)##no disable</pre>						
Related Commands	<code>disable</code> — disables RSTP globally on the system.						

show config

View the current configuration for the mode. Only non-default values are displayed.

Syntax	<code>show config</code>
Command Modes	CONFIGURATION RSTP (conf-rstp)
Supported Modes	Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-rstp)#show config
!
protocol spanning-tree rstp
  no disable
  bridge-priority 16384
```

spanning-tree rstp

Configure an RSTP interface with one of these settings: port cost, edge port with optional bridge port data unit (BPDU) guard, port priority, loop guard, or root guard.

Syntax `spanning-tree rstp {cost port-cost | edge-port [bpduguard [shutdown-on-violation]] | bpdupfilter | priority priority | {rootguard}}`

Parameters	cost <i>port-cost</i>	Enter the keyword <code>cost</code> then the port cost value. The range is from 1 to 200000. The defaults are: <ul style="list-style-type: none">• 10-Gigabit Ethernet interface = 2000• Port Channel interface with one 10 Gigabit Ethernet = 2000• Port Channel interface with one 40 Gigabit Ethernet = 1400• Port Channel with two 10 Gigabit Ethernet = 1800• Port Channel with two 40 Gigabit Ethernet = 600
	edge-port	Enter the keywords <code>edge-port</code> to configure the interface as a rapid spanning tree edge port.
	bpduguard	(OPTIONAL) Enter the keyword <code>portfast</code> to enable Portfast to move the interface into Forwarding mode immediately after the root fails. Enter the keyword <code>bpduguard</code> to disable the port when it receives a BPDU.
	shutdown-on-violation	(OPTIONAL) Enter the keywords <code>shutdown-on-violation</code> to hardware disable an interface when a BPDU is received and the port is disabled.
	bpdupfilter	(OPTIONAL) Enter the keyword <code>bpdupfilter</code> to enable BPDU Filter to stop sending and receiving BPDUs on port enabled interfaces.

priority priority	Enter keyword <code>priority</code> then a value in increments of 16 as the priority. The range is from 0 to 240. The default is 128 .
rootguard	Enter the keyword <code>rootguard</code> to enable root guard on an RSTP port or port-channel interface.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `BPDUGuard` option prevents the port from participating in an active STP topology in case a BPDU appears on a port unintentionally, or is misconfigured, or is subject to a DOS attack. This option places the port into an Error Disable state if a BPDU appears and a message is logged so that the administrator can take corrective action.

NOTE: A port configured as an edge port, on an RSTP switch, immediately transitions to the Forwarding state. Only configure ports connected to end-hosts as edge ports. Consider an edge port similar to a port with a `spanning-tree portfast` enabled.

If you do not enable `shutdown-on-violation`, BPDUs are still sent to the RPM CPU.

You cannot enable STP root guard and loop guard at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message displays: % Error: RootGuard is configured. Cannot configure LoopGuard.

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a Blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an Err-Disabled Blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a Loop-Inconsistent Blocking state and no traffic is forwarded on the port.

Example

```
Dell(conf)#interface gigabitethernet 4/0
Dell(conf-if-gi-4/0)#spanning-tree rstp edge-port
Dell(conf-if-gi-4/0)#show config
!
interface GigabitEthernet 4/0
  no ip address
  switchport
  spanning-tree rstp edge-port
  no shutdown
Dell#
```

spanning-tree rstp

Configure an RSTP interface with one of these settings: port cost, edge port with optional bridge port data unit (BPDU) guard, port priority, loop guard, or root guard.

Syntax `spanning-tree rstp {cost port-cost | edge-port [bpduguard [shutdown-on-violation]] | bpdufilter | priority priority | {rootguard}}`

Parameters

cost <i>port-cost</i>	Enter the keyword <code>cost</code> then the port cost value. The range is from 1 to 200000. The defaults are: <ul style="list-style-type: none">• 10-Gigabit Ethernet interface = 2000• Port Channel interface with one 10 Gigabit Ethernet = 2000• Port Channel interface with one 40 Gigabit Ethernet = 1400• Port Channel with two 10 Gigabit Ethernet = 1800• Port Channel with two 40 Gigabit Ethernet = 600
edge-port	Enter the keywords <code>edge-port</code> to configure the interface as a rapid spanning tree edge port.
bpduguard	(OPTIONAL) Enter the keyword <code>portfast</code> to enable Portfast to move the interface into Forwarding mode immediately after the root fails. Enter the keyword <code>bpduguard</code> to disable the port when it receives a BPDU.
shutdown-on-violation	(OPTIONAL) Enter the keywords <code>shutdown-on-violation</code> to hardware disable an interface when a BPDU is received and the port is disabled.
bpdufilter	(OPTIONAL) Enter the keyword <code>bpdufilter</code> to enable BPDU Filter to stop sending and receiving BPDUs on port enabled interfaces.
priority <i>priority</i>	Enter keyword <code>priority</code> then a value in increments of 16 as the priority. The range is from 0 to 240. The default is 128 .
rootguard	Enter the keyword <code>rootguard</code> to enable root guard on an RSTP port or port-channel interface.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The `BPDU guard` option prevents the port from participating in an active STP topology in case a BPDU appears on a port unintentionally, or is misconfigured, or is subject to a DOS attack. This option places the port into an Error Disable state if a BPDU appears and a message is logged so that the administrator can take corrective action.

NOTE: A port configured as an edge port, on an RSTP switch, immediately transitions to the Forwarding state. Only configure ports connected to end-hosts as edge ports. Consider an edge port similar to a port with a `spanning-tree portfast` enabled.

If you do not enable `shutdown-on-violation`, BPDUs are still sent to the RPM CPU.

You cannot enable STP root guard and loop guard at the same time on a port. For example, if you configure loop guard on a port on which root guard is already configured, the following error message displays: % Error: RootGuard is configured. Cannot configure LoopGuard.

Enabling Portfast BPDU guard and loop guard at the same time on a port results in a port that remains in a Blocking state and prevents traffic from flowing through it. For example, when Portfast BPDU guard and loop guard are both configured:

- If a BPDU is received from a remote device, BPDU guard places the port in an Err-Disabled Blocking state and no traffic is forwarded on the port.
- If no BPDU is received from a remote device, loop guard places the port in a Loop-Inconsistent Blocking state and no traffic is forwarded on the port.

Example

```
Dell(conf)#interface gigabitethernet 4/0
Dell(conf-if-gi-4/0)#spanning-tree rstp edge-port
Dell(conf-if-gi-4/0)#show config
!
interface GigabitEthernet 4/0
  no ip address
  switchport
  spanning-tree rstp edge-port
  no shutdown
Dell#
```

tc-flush-standard

Enable the MAC address flushing after receiving every topology change notification.

Syntax `tc-flush-standard`
To disable, use the `no tc-flush-standard` command.

Defaults Disabled

Command Modes CONFIGURATION (conf-rstp)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the system implements an optimized flush mechanism for RSTP. This implementation helps in flushing MAC addresses only when necessary (and less often), allowing for faster convergence during topology changes. However, if a standards-based flush mechanism is needed, you can turn on this *knob* command to enable flushing MAC addresses after receiving every topology change notification.

Security

This chapter describes various types of security commands in the Dell Networking OS, in the following sections:
The commands are listed in the following sections:

- [AAA Accounting Commands](#)
- [Authentication and Password Commands](#)
- [RADIUS Commands](#)
- [TACACS+ Commands](#)
- [SSH Server and SCP Commands](#)

NOTE: Starting with the Dell Networking OS version 7.2.1.0, LEAP with MSCHAP v2 supplicant is implemented.

Topics:

- [AAA Accounting Commands](#)
- [Authentication and Password Commands](#)
- [RADIUS Commands](#)
- [Suppressing AAA Accounting for Null Username Sessions](#)
- [TACACS+ Commands](#)
- [SSH Server and SCP Commands](#)
- [Secure DHCP Commands](#)
- [ICMP Vulnerabilities](#)
- [System Security Commands](#)

AAA Accounting Commands

AAA Accounting enables tracking of services that users are accessing and the amount of network resources being consumed by those services. When you enable AAA Accounting, the network server reports user activity to the TACACS+ security server in the form of accounting records. Each accounting record is comprised of accounting AV pairs and is stored on the access control server.

As with authentication and authorization, you must configure AAA Accounting by defining a named list of accounting methods, and then applying that list to various interfaces.

aaa accounting

Enable AAA Accounting and create a record for monitoring the accounting function.

Syntax

```
aaa accounting {system | exec | commands level} {name | default}{start-stop |
wait-start | stop-only} {tacacs+}
```

To disable AAA Accounting, use the `no aaa accounting {system | exec | command level} {name | default}{start-stop | wait-start | stop-only} {tacacs+} command`.

Parameters

system	Enter the keyword <code>system</code> to send accounting information of any other AAA configuration.
exec	Enter the keyword <code>exec</code> to send accounting information when a user has logged in to EXEC mode.
commands level	Enter the keyword <code>command</code> then a privilege level for accounting of commands executed at that privilege level.
name default	Enter one of the following: <ul style="list-style-type: none">For <code>name</code>, enter a user-defined name of a list of accounting methods.For <code>default</code>, the default accounting methods used.
start-stop	Enter the keywords <code>start-stop</code> to send a “start accounting” notice at the beginning of the requested event and a “stop accounting” notice at the end of the event.
wait-start	Enter the keywords <code>wait-start</code> to ensure that the TACACS+ security server acknowledges the start notice before granting the user’s process request.
stop-only	Enter the keywords <code>stop-only</code> to instruct the TACACS+ security server to send a “stop record accounting” notice at the end of the requested user process.
tacacs+	Enter the keyword <code>tacacs+</code> to use TACACS+ data for accounting. Dell Networking OS currently only supports TACACS+ accounting.

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

Usage Information

In the example above, TACACS+ accounting is used to track all usage of EXEC command and commands on privilege level 15.

Privilege level 15 is the default. If you want to track usage at privilege level 1 for example, use the `aaa accounting command 1 command`.

Example

```
Dell(conf)# aaa accounting exec default start-stop tacacs+
Dell(conf)# aaa accounting command 15 default start-stop tacacs+
Dell(config)#
```

Related Commands

[enable password](#) — changes the password for the `enable` command.

aaa accounting suppress

Prevent the generation of accounting records of users with the user name value of NULL.

Syntax

```
aaa accounting suppress null-username
```

To permit accounting records to users with user name value of NULL, use the `no aaa accounting suppress null-username` command.

Defaults Accounting records are recorded for all users.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

Usage Information

Dell Networking OS issues accounting records for all users on the system, including users whose username string, due to protocol translation, is NULL. For example, a user who comes on line with the `aaa authentication login method-list none` command is applied. To prevent the accounting records from being generated for sessions that do not have user names associated to them, use the `aaa accounting suppress` command.

aaa authorization commands

Set parameters that restrict (or permit) a user's access to EXEC and CONFIGURATION level commands.

Syntax

```
aaa authorization commands {level}{name|default} {local | tacacs+ | none}
```

Undo a configuration with the `no aaa authorization commands {level}{name|default} {local | tacacs+ | none}` command.

Parameters

commands level	Enter the keyword <code>commands</code> then the command privilege level for command level authorization.
name	Define a name for the list of authorization methods.
default	Define the default list of authorization methods.
local	Use the authorization parameters on the system to perform authorization.
tacacs+	Use the TACACS+ protocol to perform authorization.
none	Enter the keyword <code>none</code> to apply no authorization.

Defaults none

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.6.(0.0)	Supported on the FN I/O Aggregator.

aaa authorization config-commands

Set parameters that restrict (or permit) a user's access to EXEC level commands.

Syntax `aaa authorization config-commands`
 Disable authorization checking for CONFIGURATION level commands using the `no aaa authorization config-commands` command.

Defaults Enabled when you configure `aaa authorization commands` command.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following table lists the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

Usage Information By default, the `aaa authorization commands` command configures the system to check both EXEC level and CONFIGURATION level commands. Use the command `no aaa authorization config-commands` to enable only EXEC-level command checking.

aaa authorization exec

Set parameters that restrict (or permit) a user's access to EXEC-level commands.

Syntax `aaa authorization exec {name | default} {local || tacacs+ || if-authenticated || none}`
 To disable authorization checking for EXEC level commands, use the `no aaa authorization exec` command.

Parameters

name	Define a name for the list of authorization methods.
default	Define the default list of authorization methods.
local	Use the authorization parameters on the system to perform authorization.
tacacs+	Use the TACACS+ protocol to perform authorization.
none	Enter the keyword <code>none</code> to apply no authorization.

Defaults none

Command Modes	CONFIGURATION
Supported Modes	All Modes
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following table lists the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

accounting

Apply an accounting method list to terminal lines.

Syntax `accounting {exec | commands {level | role role-name} method-list}`

Parameters

exec	Enter the keyword <code>exec</code> to apply an EXEC level accounting method list.
commands {level role role-name}	Enter the keywords <code>commands level</code> to apply an EXEC and CONFIGURATION level accounting method list or enter the keywords <code>commands role</code> and then the role name for accounting of commands run by a user with that role.
method-list	Enter a method list that you defined using the <code>aaa accounting exec</code> or <code>aaa accounting commands</code> .

Defaults none

Command Modes LINE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator and M I/O Aggregator.

Related Commands [aaa accounting](#) — enables AAA Accounting and creates a record for monitoring the accounting function.

Example The following example configures accounting for the role `secadmin` using default method:

```
Dell(conf-vty-0)# accounting commands role secadmin default
```

crypto key zeroize rsa

Removes the generated RSA host keys and zeroize the key storage location.

Syntax `crypto key zeroize rsa`

Defaults	none
Command Modes	CONFIGURATION
Supporting Modes	Full-Switch
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL

show accounting

Display the active accounting sessions for each online user.

Syntax `show accounting`

Defaults none

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
---------	-------------

9.9(0.0) Introduced on the FN IOM.

9.4(0.0) Supported on the FN I/O Aggregator.

Usage Information This command steps through all active sessions and then displays the accounting records for the active account functions.

Example

```
Dell#show accounting
Active accounted actions on tty2, User admin Priv 1
  Task ID 1, EXEC Accounting record, 00:00:39 Elapsed, service=shell
Active accounted actions on tty3, User admin Priv 1
  Task ID 2, EXEC Accounting record, 00:00:26 Elapsed, service=shell
Dell#
```

Related Commands [aaa accounting](#) — enables AAA Accounting and creates a record for monitoring the accounting function.

Authentication and Password Commands

This section contains the commands that control the management access to the system.

aaa authentication enable

Configure AAA Authentication method lists for user access to EXEC privilege mode (the “Enable” access).

Syntax `aaa authentication enable {default | method-list-name} method [... method2]`
To return to the default setting, use the `no aaa authentication enable {default | method-list-name} method [... method2]` command.

Parameters

default	Enter the keyword <code>default</code> then the authentication methods to use as the default sequence of methods for the Enable login. The default is <code>default enable</code> .
<i>method-list-name</i>	Enter a text string (up to 16 characters long) to name the list of enabled authentication methods activated at login.
<i>method</i>	Enter one of the following methods: <ul style="list-style-type: none">• <code>enable</code>: use the password the <code>enable password</code> command defines in CONFIGURATION mode.• <code>line</code>: use the password the <code>password</code> command defines in LINE mode.• <code>none</code>: no authentication.• <code>radius</code>: use the RADIUS servers configured with the <code>radius-server host</code> command.• <code>tacacs+</code>: use the TACACS+ server(s) configured with the <code>tacacs-server host</code> command.
<i>... method2</i>	(OPTIONAL) In the event of a “no response” from the first method, Dell Networking Operating System (OS) applies the next configured method.

Defaults Use the `enable password`.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

By default, the `Enable password` is used. If you configure `aaa authentication enable default`, Dell Networking Operating System (OS) uses the methods defined for `Enable access` instead.

Methods configured with the `aaa authentication enable` command are evaluated in the order they are configured. If authentication fails using the primary method, Dell Networking Operating System (OS) employs the second method (or third method, if necessary) automatically. For example, if the TACACS+ server is reachable, but

the server key is invalid, Dell Networking OS proceeds to the next authentication method. The TACACS+ is incorrect, but the user is still authenticated by the secondary method.

Related Commands `enable password` — changes the password for the `enable` command.

`login authentication` — enables AAA login authentication on the terminal lines.

`radius-server host` — specifies a RADIUS server host.

`tacacs-server host` — specifies a TACACS+ server host.

aaa authentication login

Configure AAA Authentication method lists for user access to EXEC mode (`Enable log-in`).

Syntax `aaa authentication login {method-list-name | default} method [... method4]`
To return to the default setting, use the `no aaa authentication login {method-list-name | default}` command.

Parameters

method-list-name Enter a text string (up to 16 characters long) as the name of a user-configured method list that can be applied to different lines.

default Enter the keyword `default` to specify that the method list specified is the default method for all terminal lines.

method Enter one of the following methods:

- `enable`: use the password the `enable password` command defines in CONFIGURATION mode.
- `line`: use the password the `password` command defines in LINE mode.
- `none`: no authentication.
- `radius`: use the RADIUS servers configured with the `radius-server host` command.
- `tacacs+`: use the TACACS+ servers configured with the `tacacs-server host` command.

... method4 (OPTIONAL) Enter up to four additional methods. In the event of a “no response” from the first method, Dell Networking Operating System (OS) applies the next configured method (up to four configured methods).

Defaults Not configured (that is, no authentication is performed).

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.11(0.0)	Included a prompt to force the users to re-authenticate, when re-authentication is enabled.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

By default, the locally configured username password is used. If you configure `aaa authentication login default`, Dell Networking Operating System (OS) uses the methods this command defines for login instead.

Methods configured with the `aaa authentication login` command are evaluated in the order they are configured. If users encounter an error with the first method listed, Dell Networking Operating System (OS) applies the next method configured. If users fail the first method listed, no other methods are applied. The only exception is the local method. If the user's name is not listed in the local database, the next method is applied. If the correct user name/password combination is not entered, the user is not allowed access to the switch.

NOTE: If authentication fails using the primary method, Dell Networking Operating System (OS) employs the second method (or third method, if necessary) automatically. For example, if the TACACS+ server is reachable, but the server key is invalid, Dell Networking Operating System (OS) proceeds to the next authentication method. The TACACS+ is incorrect, but the user is still authenticated by the secondary method.

After configuring the `aaa authentication login` command, configure the `login authentication` command to enable the authentication scheme on terminal lines.

Connections to the SSH server work with the following login mechanisms: local, radius, and tacacs.

Related Commands

[login authentication](#) — enables AAA login authentication on the terminal lines.

[radius-server host](#) — specifies a RADIUS server host.

[tacacs-server host](#) — specifies a TACACS+ server host.

authorization

Apply an authorization method list to terminal lines.

Syntax `authorization {exec | commands {level | role role-name} method-list`

Parameters

exec	Enter the keyword <code>exec</code> to apply an EXEC level accounting method list.
commands {level role role-name}	Enter the keywords <code>commands</code> followed by either a privilege level for accounting of commands executed at that privilege level, or enter the keyword <code>role</code> then the role name for authorization of commands executed by a user with that user role. <code>role</code> method is supported only on Full-Switch mode.
method-list	Enter a method list that you defined using the <code>aaa accounting exec</code> or <code>aaa accounting</code> commands.

Defaults none

Command Modes LINE

Supported Modes All Modes.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.5(0.0)	Introduced the support for roles on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [aaa authorization commands](#) — sets the parameters that restrict (or permit) a user’s access to EXEC and CONFIGURATION level commands

[aaa authorization exec](#) — sets the parameters that restrict (or permit) a user’s access to EXEC level commands.

aaa authorization commands

Set parameters that restrict (or permit) a user’s access to EXEC and CONFIGURATION level commands.

Syntax `aaa authorization commands {level | role role-name}{name | default} {local | tacacs+ | none}`

Undo a configuration with the `no aaa authorization commands {level | role role-name} {name | default} {local | tacacs+ | none} command`.

Parameters		
commands level		Enter the keyword <code>commands</code> then the command privilege level for command level authorization.
role role-name		Enter the keyword <code>role</code> then the role name. <code>role</code> method is supported only on Full-Switch mode.
name		Define a name for the list of authorization methods.
default		Define the default list of authorization methods.
local		Use the authorization parameters on the system to perform authorization.
tacacs+		Use the TACACS+ protocol to perform authorization.
none		Enter the keyword <code>none</code> to apply no authorization.

Defaults none

Command Modes CONFIGURATION

Supported Modes All Modes.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the support for roles on the MXL 10/40GbE Switch .
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

aaa authorization role-only

Configure authentication to use the user’s role only when determining if access to commands is permitted.

Syntax `aaa authorization role-only`

To return to the default setting, use the `no aaa authentication role-only` command.

Parameters	<i>name</i>	Enter a text string for the name of the user up to 63 characters. It cannot be one of the system defined roles (sysadmin, secadmin, netadmin, netoperator).
	<i>inherit existing-role-name</i>	Enter the <code>inherit</code> keyword then specify the system defined role to inherit permissions from (sysadmin, secadmin, netadmin, netoperator).

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information By default, access to commands are determined by the user's role (if defined) or by the user's privilege level. If the `aaa authorization role-only` command is enabled, then only the user's role is used.

Before you enable role-based only AAA authorization:

- 1 Locally define a system administrator user role. This will give you access to login with full permissions even if network connectivity to remote authentication servers is not available.
- 2 Configure login authentication on the console. This ensures that all users are properly identified through authentication no matter the access point
- 3 Specify an authentication method (RADIUS, TACACS+, or Local).
- 4 Specify authorization method (RADIUS, TACACS+ or Local).
- 5 Verify the configuration has been applied to the console or VTY line.

Related Commands login authentication, password, radius-server host, tacacs-server host

aaa authorization config-commands

Set parameters that restrict (or permit) a user's access to EXEC level commands.

Syntax `aaa authorization config-commands`
Disable authorization checking for CONFIGURATION level commands using the `no aaa authorization config-commands` command.

Defaults Enabled when you configure `aaa authorization commands` command.

Command Modes CONFIGURATION

Supported Modes All Modes.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information By default, the `aaa authorization commands` command configures the system to check both EXEC level and CONFIGURATION level commands. To enable only EXEC-level command checking, use the command `no aaa authorization config-commands.role` method is supported only on Full-Switch mode.

aaa authorization exec

Set parameters that restrict (or permit) a user's access to EXEC-level commands.

Syntax `aaa authorization exec {name | default} {local || tacacs+ || if-authenticated || none}`

To disable authorization checking for EXEC level commands, use the `no aaa authorization exec` command.

Parameters		
name		Define a name for the list of authorization methods.
default		Define the default list of authorization methods.
local		Use the authorization parameters on the system to perform authorization.
tacacs+		Use the TACACS+ protocol to perform authorization.
none		Enter the keyword <code>none</code> to apply no authorization.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

aaa reauthenticate enable

Enable re-authentication of user whenever there is a change in the authenticators.

Syntax `aaa reauthenticate enable`

To disable the re-authentication option, use the `no aaa reauthenticate enable` command.

Defaults Disabled

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced this command.

Usage Information

When an operating system enables to change the user authenticators, the users might access resources and perform tasks that they do not have authorization.

Once re-authentication is enabled, Dell EMC Networking OS prompts the users to re-authenticate whenever there is a change in authenticators.

The change in authentication happens when:

- Add or remove an authentication server (RADIUS/TACACS+)
- Modify an AAA authentication/authorization list
- Change to role-only (RBAC) mode

The re-authentication is also applicable for authenticated 802.1x devices. When there is a change in the authentication servers, the supplicants connected to all the ports are forced to re-authenticate.

Example

```
DellEMC(config)#aaa reauthenticate enable
```

```
DellEMC(config)#aaa authentication login vty_auth_list radius
Force all logged-in users to re-authenticate (y/n)?
```

```
DellEMC(config)#radius-server host 192.100.0.12
Force all logged-in users to re-authenticate (y/n)?
```

privilege level (CONFIGURATION mode)

Change the access or privilege level of one or more commands.

Syntax

```
privilege mode {level level command | reset command}
```

To delete access to a level and command, use the `no privilege mode level level command command`.

Parameters

mode

Enter one of the following keywords as the mode for which you are controlling access:

- `configure` for CONFIGURATION mode
- `exec` for EXEC mode
- `interface` for INTERFACE modes
- `line` for LINE mode
- `route-map` for ROUTE-MAP mode
- `router` for ROUTER OSPF, ROUTER RIP, ROUTER ISIS and ROUTER BGP modes

level level

Enter the keyword `level` then a number for the access level. The range is from 0 to 15. Level 1 is EXEC mode and Level 15 allows access to all CLI modes and commands.

reset

Enter the keyword `reset` to return the security level to the default setting.

command

Enter the command's keywords to assign the command to a certain access level. You can enter one or all of the keywords.

Defaults

Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To define a password for the level to which you are assigning privilege or access, use the `enable password` command.

privilege level (LINE mode)

Change the access level for users on the terminal lines.

Syntax `privilege level level`
To delete access to a terminal line, use the `no privilege level level` command.

Parameters

<code>level level</code>	Enter the keyword <code>level</code> then a number for the access level. The range is from 0 to 15. Level 1 is EXEC mode and Level 15 allows access to all CLI modes.
--------------------------	--

Defaults `level = 15`

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

banner exec

Configure a message that is displayed when you enter EXEC mode.

Syntax `banner exec c line c`
To delete a banner, use the `no banner exec` command.

Parameters

<code>c</code>	Enter the keywords <code>banner exec</code> , then enter a character delineator, represented here by the letter <code>c</code> . Press ENTER .
<code>line</code>	Enter a text string for your banner message ending the message with your delineator. In the following example, the delineator is a percent character (%); the banner message is "testing, testing".

Defaults No banner is displayed.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information After entering the banner login command, type one or more spaces and a delineator character. Enter the banner text then the second delineator character. When the user is connected to the router, if a message of the day banner is configured, it displays first. If no message of the day banner is configured, the login banner and prompt appear. After the user has logged in, the EXEC banner (if configured) displays.

Example

```
Dell(conf)#banner exec ?
LINE c banner-text c, where 'c' is a delimiting character
Dell(conf)#banner exec %
Enter TEXT message. End with the character '%'.
This is the banner%
Dell(conf)#end
Dell#exit
4d21h5m: %RPM0-P:CP %SEC-5-LOGOUT: Exec session is terminated for user on line
console

This is the banner

Dell con0 now available

Press RETURN to get started.
4d21h6m: %RPM0-P:CP %SEC-5-LOGIN_SUCCESS: Login successful for user on line
console
This is the banner
Dell>
```

Related Commands [banner login](#) — sets a banner for login connections to the system.

[exec-banner](#) — enables the display of a text string when you enter EXEC mode.

[line](#) — enables and configures the console and virtual terminal lines to the system.

banner login

Set a banner to display when logging on to the system.

Syntax `banner login {keyboard-interactive | no keyboard-interactive} [c line c]`

Parameters

keyboard-interactive	Enter the keyword <code>keyboard-interactive</code> to require a carriage return (CR) to get the message banner prompt.
c	Enter a delineator character to specify the limits of the text banner. The delineator is a percent character (%).
line	Enter a text string for your text banner message ending the message with your delineator. The delineator is a percent character (%). Range: maximum of 50 lines, up to 255 characters per line

Defaults No banner is configured and the CR is required when creating a banner.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information After entering the banner login command, type one or more spaces and a delineator character. Enter the banner text then the second delineator character. When the user is connected to the router, if a message of the day banner is configured, it displays first. If no message of the day banner is configured, the login banner and prompt appear. After the user has logged in, the EXEC banner (if configured) displays.

Example

```
Dell(conf)#banner login ?
keyboard-interactive Press enter key to get prompt
LINE c banner-text c, where 'c' is a delimiting character
Dell(conf)#no banner login ?
keyboard-interactive Prompt will be displayed by default
<cr>
Dell(conf)#banner login keyboard-interactive

Enter TEXT message. End with the character '%'.
This is the banner%
Dell(conf)#end
Dell#exit

13d21h9m: %RPM0-P:CP %SEC-5-LOGOUT: Exec session is terminated for user on
line console

This is the banner

Dell con0 now available

Press RETURN to get started.
13d21h10m: %RPM0-P:CP %SEC-5-LOGIN_SUCCESS: Login successful for user on line
console
This is the banner
Dell>
```

Related Commands [exec-banner](#)— enables the display of a text string when you enter EXEC mode.

banner motd

Set a message of the day (MOTD) banner.

Syntax `banner motd c line c`

Parameters

c	Enter a delineator character to specify the limits of the text banner. The delineator is a percent character (%).
line	Enter a text string for your MOTD banner the message with your delineator. The delineator is a percent character (%).

Defaults No banner is configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information After entering the banner login command, type one or more spaces and a delineator character. Enter the banner text then the second delineator character. When the user is connected to the router, if a message of the day banner is configured, it displays first. If no message of the day banner is configured, the login banner and prompt appear. After the user has logged in, the EXEC banner (if configured) displays.

Related Commands [banner exec](#) — enables the display of a text string when you enter EXEC mode.
[banner login](#) — sets a banner to display after successful login to the system.

debug radius

View RADIUS transactions to assist with troubleshooting.

Syntax `debug radius`
To disable debugging of RADIUS, use the `no debug radius` command.

Defaults Disabled.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

debug tacacs+

To assist with troubleshooting, view TACACS+ transactions.

Syntax `debug tacacs+`
To disable debugging of TACACS+, use the `no debug tacacs+` command.

Defaults Disabled.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Supported on the M I/O Aggregator.

exec-banner

Enable the display of a text string when the user enters EXEC mode.

Syntax `exec-banner`
 To disable the banner on terminal lines, use the `no exec-banner` command.

Defaults **Enabled on all lines** (if configured, the banner appears).

Command Modes LINE

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information Optionally, use the `banner exec` command to create a text string that is displayed when you access EXEC mode. This command toggles that display.

Related Commands `banner exec` — configures a banner to display when entering EXEC mode.
`line` — enables and configures console and virtual terminal lines to the system.

access-class

Restrict incoming connections to a particular IP address in a defined IP access control list (ACL).

Syntax `access-class access-list-name`
 To delete a setting, use the `no access-class` command.

Parameters ***access-list-name*** Enter the name of an established IP Standard ACL.

Defaults Not configured.

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- `line` — applies an authentication method list to the designated terminal lines.
- `ip access-list standard` — names (or selects) a standard access list to filter based on the IP address.
- `ip access-list extended` — names (or selects) an extended access list based on the IP addresses or protocols.

enable password

Change the password for the `enable` command.

Syntax

```
enable password [level level] [encryption-type] password
```

To delete a password, use the `no enable password [encryption-type] password [level level]` command.

Parameters

- level level*** (OPTIONAL) Enter the keyword `level` then a number as the level of access. The range is from 1 to 15.
- encryption-type*** (OPTIONAL) Enter the number 7 or 0 as the encryption type.

Enter a 7 then a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Networking router.

Use this parameter only with a password that you copied from the `show running-config` file of another Dell Networking router.
- password*** Enter a text string, up to 32 characters long, as the clear text password.

Defaults

No password is configured. *level* = **15**.

Command Modes

CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To control access to command modes, use this command to define a password for a level and use the `privilege level (CONFIGURATION mode)` command.

Passwords must meet the following criteria:

- Start with a letter, not a number.
- Passwords can have a regular expression as the password. To create a password with a regular expression in it, use CNTL + v prior to entering regular expression. For example, to create the password `abcd]e`, you type

"abcd CNTL v]e". When the password is created, you do not use the CNTL + v key combination and enter "abcd]e".

NOTE: The question mark (?) is not a supported character.

Related Commands `show running-config` — views the current configuration.

`privilege level (CONFIGURATION mode)` — controls access to the command modes within the switch.

enable restricted

Allows Dell Networking technical support to access restricted commands.

Syntax `enable restricted [encryption-type] password`
To disallow access to restricted commands, use the `no enable restricted` command.

Parameters

<i>encryption-type</i>	(OPTIONAL) Enter the number 7 as the encryption type. Enter 7 followed a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Networking router. Use this parameter only with a password that you copied from the <code>show running-config</code> file of another Dell Networking router.
<i>password</i>	Enter a text string, up to 32 characters long, as the clear text password.

Defaults Not configured.

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Only Dell Networking Technical Support staff use this command.

enable secret

Change the password for the `enable` command.

Syntax `enable secret [level level] [encryption-type] password`
To delete a password, use the `no enable secret [encryption-type] password [level level]` command.

Parameters

<i>level level</i>	(OPTIONAL) Enter the keyword <code>level</code> then a number as the level of access. The range is from 1 to 15.
---------------------------	--

encryption-type (OPTIONAL) Enter the number 5 or 0 as the encryption type.

Enter a 5 then a text string as the hidden password. The text string must be a password that was already encrypted by a Dell Networking router.

Use this parameter only with a password that you copied from the `show running-config` file of another Dell Networking router.

password Enter a text string, up to 32 characters long, as the clear text password.

Defaults No password is configured. *level* = **15**.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
----------	---------------------------

8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
----------	--

Usage Information To control access to command modes, use this command to define a password for a level and use the `privilege level (CONFIGURATION mode)` command.

Passwords must meet the following criteria:

- Start with a letter, not a number.
- Passwords can have a regular expression as the password. To create a password with a regular expression in it, use CNTL + v prior to entering regular expression. For example, to create the password `abcd]e`, you type `"abcd CNTL v]e"`. When the password is created, you do not use the CNTL + v key combination and enter `"abcd]e"`.

 **NOTE:** The question mark (?) is not a supported character.

Related Commands [show running-config](#) — views the current configuration.

[privilege level \(CONFIGURATION mode\)](#) — controls access to the command modes within the switch.

enable sha256-password

Configure SHA-256 based password for the `enable` command.

Syntax `enable sha256-password [level level] [encryption-type] password`

To delete a password, use the `no enable sha256-password [encryption-type] password [level level]` command.

Parameters

sha256-password Enter the keyword `sha256-password` then the `encryption-type` or the password.

level level (OPTIONAL) Enter the keyword `level` then a number as the level of access. The range is from 1 to 15.

encryption-type (OPTIONAL) Enter the number 8 or 0 as the encryption type.
Enter 8 to enter the sha256-based hashed password.

password Enter a text string, up to 32 characters long, as the clear text password.

Defaults No password is configured. *level* = **15**.

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.0)	Introduced on the MXL.

Related Commands

- [show running-config](#) — views the current configuration.
- [privilege level \(CONFIGURATION mode\)](#) — controls access to the command modes within the switch.

login authentication

To designate the terminal lines, apply an authentication method list.

Syntax `login authentication {method-list-name | default}`
To use the local user/password database for login authentication, use the `no login authentication` command.

Parameters

method-list-name	Enter the keywords <code>method-list-name</code> to specify that method list, created in the <code>aaa authentication login</code> command, to be applied to the designated terminal line.
default	Enter the keyword <code>default</code> to specify that the default method list, created in the <code>aaa authentication login</code> command, is applied to the terminal line.

Defaults No authentication is performed on the console lines. Local authentication is performed on the virtual terminal and auxiliary lines.

Command Modes LINE

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information If you configure the `aaa authentication login default` command, the `login authentication default` command automatically is applied to all terminal lines.

Related Commands [aaa authentication login](#) — selects the login authentication methods.

password

Specify a password for users on terminal lines.

Syntax `password [encryption-type] password`
To delete a password, use the `no password password` command.

Parameters

<i>encryption-type</i>	(OPTIONAL) Enter either zero (0) or 7 as the encryption type for the password entered. The options are <ul style="list-style-type: none">• 0 is the default and means the password is not encrypted and stored as clear text.• 7 means that the password is encrypted and hidden.
<i>password</i>	Enter a text string up to 32 characters long. The first character of the password must be a letter. You cannot use spaces in the password.

Defaults No password is configured.

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The system prompts users for these passwords when the method for authentication or authorization used is "line".

Related Commands [enable password](#) — sets the password for the `enable` command.

[login authentication](#) — configures an authentication method to log in to the switch.

[service password-encryption](#) — encrypts all passwords configured in the system.

[radius-server key](#) — configures a key for all RADIUS communications between the switch and the RADIUS host server.

[tacacs-server key](#) — configures a key for communication between a TACACS+ server and client.

[username](#) — establishes an authentication system based on user names.

password-attributes

Configure the password attributes (strong password).

Syntax `password-attributes [min-length number] [max-retry number] [lockout-period minutes] [character-restriction [upper number] [lower number] [numeric number] [special-char number]]`

To return to the default, use the `no password-attributes [min-length number] [max-retry number] [lockout-period minutes] [character-restriction [upper number] [lower number] [numeric number] [special-char number]]` command.

Parameters

min-length <i>number</i>	(OPTIONAL) Enter the keywords <code>min-length</code> then the number of characters. The range is from 0 to 32 characters.
max-retry <i>number</i>	(OPTIONAL) Enter the keywords <code>max-retry</code> then the number of maximum password retries. The range is from 0 to 16.
lockout-period <i>minutes</i>	(OPTIONAL) Enter the keyword <code>lockout-period</code> then the number of minutes. The range is from 1 to 1440 minutes. The default is 0 minutes and the lockout-period is not enabled. This parameter enhances the security of the switch by locking out sessions on the Telnet or SSH sessions for which there has been a consecutive failed login attempts. The console is not locked out.
character-restriction	(OPTIONAL) Enter the keywords <code>character-restriction</code> to indicate a character restriction for the password.
upper <i>number</i>	(OPTIONAL) Enter the keyword <code>upper</code> then the upper number. The range is from 0 to 31.
lower <i>number</i>	(OPTIONAL) Enter the keyword <code>lower</code> then the lower number. The range is from 0 to 31.
numeric <i>number</i>	(OPTIONAL) Enter the keyword <code>numeric</code> then the numeric number. The range is from 0 to 31.
special-char <i>number</i>	(OPTIONAL) Enter the keywords <code>special-char</code> then the number of special characters permitted. The range is from 0 to 31. The following special characters are supported: <code>! " # % & ' () ; < = > ? [\] * + , - . / : ^ _ { } ~ @ \$</code>

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Introduced the special-characters on the MXL Switch.
9.5(0.0)	Introduced the <code>lockout-period</code> option on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [password](#) — specifies a password for users on terminal lines.

service password-encryption

Encrypt all passwords configured in the system.

Syntax

`service password-encryption`

To store new passwords as clear text, use the `no service password-encryption` command.

Defaults	Enabled.
Command Modes	CONFIGURATION
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

CAUTION: Encrypting passwords with this command does not provide a high level of security. When the passwords are encrypted, you cannot return them to plain text unless you re-configure them. To remove an encrypted password, use the `no password password` command.

To keep unauthorized people from viewing passwords in the switch configuration file, use the `service password-encryption` command. This command encrypts the clear-text passwords created for user name passwords, authentication key passwords, the privileged command password, and console and virtual terminal line access passwords.

To view passwords, use the `show running-config` command.

show privilege

View your access level.

Syntax	<code>show privilege</code>
Command Modes	<ul style="list-style-type: none">EXECEXEC Privilege
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show privilege
Current privilege level is 15
Dell#

Dell#show privilege
Current privilege level is 14.
Dell#

Dell#show privilege
Current privilege level is 10.
Dell#
```

Related Commands [privilege level \(CONFIGURATION mode\)](#) — assigns access control to different command modes.

show users

Allows you to view information on all users logged in to the switch.

Syntax `show users [all]`

Parameters `all` (OPTIONAL) Enter the keyword `all` to view all terminal lines in the switch.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the support for roles on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show user` command shown in the following example.

Field	Description
(untitled)	Indicates with an asterisk (*) which terminal line you are using.
Line	Displays the terminal lines currently in use.
User	Displays the user name of all users logged in.
Host(s)	Displays the terminal line status.
Location	Displays the IP address of the user.

Example

```
Dell# show users
Authorization Mode:  role or privilege
  Line  User  Role  Priv Host(s) Location
*  0  console  0  unassigned  1  idle
  2  vty 0  admin  unassigned  1  idle  10.16.127.35
  3  vty 1  ad  unassigned  15  idle  10.16.127.145
  4  vty 2  ad1  sysadmin  1  idle  10.16.127.141
  5  vty 3  ad1  sysadmin  1  idle  10.16.127.145
  6  vty 4  admin  unassigned  1  idle  10.16.127.141
  7  vty 5  ad  unassigned  15  idle  10.16.127.141
Dell#
```

Related Commands `username` — enables a user.

secure-cli enable

Enable the secured CLI mode.

Syntax `secure-cli enable`

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced this command.

Usage Information The secured CLI mode prevents the users from enhancing the permissions or promoting the privilege levels. After entering the command, save the running-configuration.

Once you save the running-configuration, the secured CLI mode is enabled. If you do not want to enter the secured mode, do not save the running-configuration.

Once saved, to disable the secured CLI mode, you need to manually edit the startup-configuration file and reboot the system.

timeout login response

Specify how long the software waits for the login input (for example, the user name and password) before timing out.

Syntax `timeout login response seconds`
To return to the default values, use the `no timeout login response` command.

Parameters

seconds Enter a number of seconds the software waits before logging you out. The range is:

- VTY: the range is from 1 to 30 seconds, the default is **30 seconds**.
- Console: the range is from 1 to 300 seconds, the default is **0 seconds** (no timeout).
- AUX: the range is from 1 to 300 seconds, the default is **0 seconds** (no timeout).

Defaults See the defaults settings shown in *Parameters*.

Command Modes LINE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The software measures the period of inactivity defined in this command as the period between consecutive keystrokes. For example, if your password is "password" you can enter "p" and wait 29 seconds to enter the next letter.

username

Establish an authentication system based on user names.

Syntax `username name [access-class access-list-name] [nopassword | {password | secret | sha256-password} [encryption-type] password] [privilege level] [role role-name]`

If you do not want a specific user to enter a password, use the `nopassword` option.

To delete authentication for a user, use the `no username name` command.

Parameters

<i>name</i>	Enter a text string for the name of the user up to 63 characters.
<i>access-class</i> <i>access-list-name</i>	Enter the keywords <code>access-class</code> then the name of a configured access control list (either an IP access control list or MAC access control list).
<i>nopassword</i>	Enter the keyword <code>nopassword</code> to specify that the user should not enter a password.
<i>password</i>	Enter the keyword <code>password</code> then the <code>encryption-type</code> or the password.
<i>secret</i>	Enter the keyword <code>secret</code> then the <code>encryption-type</code> or the password.
<i>encryption-type</i>	Enter an encryption type for the <code>password</code> that you enter. <ul style="list-style-type: none">• 0 directs the system to store the password as clear text. It is the default encryption type when using the <code>password</code> option.• 8 to indicate that a password encrypted using a sha256 hashing algorithm follows. This encryption type is available with the <code>sha256-password</code> option only, and is the default encryption type for this option.• 7 to indicate that a password encrypted using a DES hashing algorithm follows. This encryption type is available with the <code>password</code> option only.• 5 to indicate that a password encrypted using an MD5 hashing algorithm follows. This encryption type is available with the <code>secret</code> option only, and is the default encryption type for this option.
<i>password</i>	Enter a string up to 32 characters long.
<i>privilege level</i>	Enter the keyword <code>privilege</code> then a number from zero (0) to 15.
<i>role role-name</i>	Enter the keyword <code>role</code> followed by the role name to associate with that user ID.
<i>secret</i>	Enter the keyword <code>secret</code> then the encryption type.
<i>sha256-password</i>	Enter the keyword <code>sha256-password</code> then the <code>encryption-type</code> or the password.

Defaults The default encryption type for `password` option is **0**. The default encryption type for `secret` option is **5**. The default encryption type for `sha256-password` option is **8**. The default value of `privilege level` is **1**.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.10(0.0)	Added support for the <code>sha256-password</code> option.
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.5(0.0)	Introduced the support for roles on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To view the defined user names, use the `show running-config user` command.

Related Commands `password` — specifies a password for users on terminal lines.

`show running-config` — views the current configuration.

RADIUS Commands

The following RADIUS commands are supported by Dell Networking Operating System (OS).

client

Configures trusted DAC clients.

Syntax `client {ipv4-addr | ipv6-addr | hostname} [vrf vrf-name] [key [encryption-type] key]`

To undo the DAC client configuration, enter the `no client host` command.

Defaults If VRF is not configured, default VRF is considered.

Parameters

ipv4-addr	Enter the keyword <code>ipv4-addr</code> to specify the IPv4 address of the DAC.
ipv6-addr	Enter the keyword <code>ipv6-addr</code> to specify the IPv6 address of the DAC.
hostname	Enter the keyword <code>hostname</code> to enter the name of the host.
vrf vrf-name	Enter the keyword <code>vrf</code> followed by the name of the VRF to associate a VRF with the client.
key	(Optional) Enter the keyword <code>key</code> to specify an encryption key.
encryption-type	(Optional) Enter either 0 or 7 as the encryption type for the specified key. The options are: <ul style="list-style-type: none"> • 0 – implies that the key is not encrypted and is stored as clear text. • 7 – implies that the key is encrypted and hidden.
key	Enter a string that is the key to be exchanged between the switch and the dynamic authorization client. The key can be up to 42 characters long.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- It is possible to configure more than one dynamic authorization clients Duplicate (ipv4-addr or ipv6-addr or host-name) configurations are not allowed.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FM-IOM, and MXL.

client-key

Configures global shared key for the trusted DAC clients.

Syntax `client-key [encryption-type] key`
To remove the shared key configuration, enter the `no client-key` command.

Defaults None.

Parameters

encryption-type: (OPTIONAL) Enter either 0 or 7 as the encryption type for the key entered. The options are:

- 0 — is the default and means the key is not encrypted and stored as clear text.
- 7 — means that the key is encrypted and hidden.

key Enter a string that is the key to be exchanged between the switch and RADIUS servers. It can be up to 42 characters long.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Configure global shared key applicable for DA clients. If client configuration has shared key configured, that will take precedence.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

coa-bounce-port

Configure NAS to ignore the port bounce RADIUS messages from DAC.

Syntax `coa-bounce-port`

To remove the port bounce configuration, enter the `no coa-bounce-port` command.

Defaults Enabled.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Configure `no coa-bounce-port` to drop radius CoA port-bounce requests from the DAC.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

coa-disable-port

Configure NAS to reject disable-port requests from DAC.

Syntax `coa-disable-port`
To undo this configuration, enter the `no coa-disable-port` command.

Defaults Enabled.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Configure `no coa-disable-port DAS` to drop radius CoA disable-port requests from DAC.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

coa-reauthenticate

Configure NAS to re-authenticate dot1x user session requests from DAC.

Syntax `coa-reauthenticate`
To ignore re-authentication requests, enter the `no coa-reauthenticate` command.

Defaults Enabled.

Command Modes
· CONF-DYNAMIC-AUTH

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

debug radius

View RADIUS transactions to assist with troubleshooting.

Syntax `debug radius`
To disable debugging of RADIUS, use the `no debug radius` command.

Defaults Disabled.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

da-rsp-timeout

Configure timeout value for the back end task to respond to DAC requests.

Syntax `da-rsp-timeout minutes`
To undo the configuration, enter the `no da-rsp-timeout` command.

Defaults 10 Minutes.

Parameters
minutes Enter the time out value.

Command Modes
· CONF-DYNAMIC-AUTH

Usage Information
· Time for DAS to wait before the back end response is received.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

disconnect-user

Configure NAS to ignore DM requests corresponding to AAA users-sessions coming from the DAC.

Syntax `disconnect-user`
To undo this configuration, enter the `no disconnect-user` command.

Defaults Enabled.

Command Modes
· CONF-DYNAMIC-AUTH

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

dynamic-auth-enable

Configure NAS to receive and process dynamic authorization messages.

Syntax `dynamic-auth-enable`
To stop NAS from receiving and processing dynamic authorization messages, use the `no dynamic-auth-enable` command.

Defaults Disabled.

Command Modes
· CONF-DYNAMIC-AUTH

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

Usage Information If this configuration is not enabled, then dynamic authorization messages are not handled by the NAS.

ip radius source-interface

Specify an interface's IP address as the source IP address for RADIUS connections.

Syntax `ip radius source-interface interface`
 To delete a source interface, use the `no ip radius source-interface` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128. For a ten-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.
-------------------------	---

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

port

Configures NAS port number to accept CoA or DM requests.

Syntax `port port-number`
 To remove the NAS port configuration, enter the `no port` command.

Defaults 3799

Parameters

<i>port-number</i>	Enter the NAS port number to accept CoA and DM requests. The range is from 1 to 65535.
---------------------------	--

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Optionally specify dynamic authorization port number. Default port is 3799.

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

radius dynamic-auth

Enters a new sub-mode, RADIUS-DYNAMIC-AUTH, which enables you to modify dynamic authorization settings.

Syntax

`radius dynamic-auth`

To remove the dynamic authorization method for RADIUS users, enter the `no radius dynamic-auth` command.

Defaults

Disabled.

Command Modes

- CONFIGURATION

Usage Information

- All dynamic authorization commands are configured by entering this mode.

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

radius-server deadtime

Configure a time interval during which non-responsive RADIUS servers to authentication requests are skipped.

Syntax

`radius-server deadtime seconds`

To disable this function or return to the default value, use the `no radius-server deadtime` command.

Parameters

seconds

Enter a number of seconds during which non-responsive RADIUS servers are skipped. The range is from 0 to 2147483647 seconds. The default is **0 seconds**.

Defaults

0 seconds

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

radius-server host

Configure a RADIUS server host.

Syntax `radius-server host {hostname | ipv4-address | ipv6-address} [auth-port port-number] [retransmit retries] [timeout seconds] [key [encryption-type] key]`

Parameters

hostname	Enter the name of the RADIUS server host.
ipv4-address ipv6-address	Enter the IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X) of the RADIUS server host.
auth-port port-number	(OPTIONAL) Enter the keywords <code>auth-port</code> then a number as the port number. The range is from zero (0) to 65535. The default port-number is 1812 .
retransmit retries	(OPTIONAL) Enter the keyword <code>retransmit</code> then a number as the number of attempts. This parameter overwrites the <code>radius-server retransmit</code> command. The range is from zero (0) to 100. The default is 3 attempts .
timeout seconds	(OPTIONAL) Enter the keyword <code>timeout</code> then the seconds the time interval the switch waits for a reply from the RADIUS server. This parameter overwrites the <code>radius-server timeout</code> command. The range is from 0 to 1000. The default is 5 seconds .
key [encryption-type] key	(OPTIONAL) Enter the keyword <code>key</code> then an optional encryption-type and a string up to 42 characters long as the authentication key. The RADIUS host server uses this authentication key and the RADIUS daemon operating on this switch.

For the encryption-type, enter either zero (0) or 7 as the encryption type for the key entered. The options are:

- 0 is the default and means the password is not encrypted and stored as clear text.
- 7 means that the password is encrypted and hidden.

Configure this parameter last because leading spaces are ignored.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information To configure any number of RADIUS server hosts for each server host that is configured, use this command. Dell Networking Operating System (OS) searches for the RADIUS hosts in the order they are configured in the software.

The global default values for the `timeout`, `retransmit`, and `key` optional parameters are applied, unless those values are specified in the `radius-server host` or other commands. To return to the global default values, if you configure the `timeout`, `retransmit`, or `key` values, include those keywords when using the `no radius-server host` command syntax.

Related Commands

- `login authentication` — sets the database to be checked when a user logs in.
- `radius-server retransmit` — sets the number of times the RADIUS server attempts to send information.
- `radius-server timeout` — sets the time interval before the RADIUS server times out.

radius-server key

Configure a key for all RADIUS communications between the switch and the RADIUS host server.

Syntax `radius-server key [encryption-type] key`
 To delete a password, use the `no radius-server key` command.

Parameters

encryption-type (OPTIONAL) Enter either zero (0) or 7 as the encryption type for the key entered. The options are:

- 0 is the default and means the key is not encrypted and stored as clear text.
- 7 means that the key is encrypted and hidden.

key Enter a string that is the key to be exchanged between the switch and RADIUS servers. It can be up to 42 characters long.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information The key configured on the switch must match the key configured on the RADIUS server daemon.

If you configure the `key` parameter in the `radius-server host` command, the key configured with the `radius-server key` command is the default key for all RADIUS communications.

Related Commands [radius-server host](#) — configures a RADIUS host.

radius-server retransmit

Configure the number of times the switch attempts to connect with the configured RADIUS host server before declaring the RADIUS host server unreachable.

Syntax `radius-server retransmit retries`
To configure zero retransmit attempts, use the `no radius-server retransmit` command.
To return to the default setting, use the `radius-server retransmit 3` command.

Parameters `retries` Enter a number of attempts that Dell Networking Operating System (OS) tries to locate a RADIUS server. The range is from zero (0) to 100. The default is **3 retries**.

Defaults **3 retries**

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Related Commands [radius-server host](#) — configures a RADIUS host.

radius-server timeout

To reply to a request, configure the amount of time the RADIUS client (the switch) waits for a RADIUS host server .

Syntax `radius-server timeout seconds`
To return to the default value, use the `no radius-server timeout` command.

Parameters `seconds` Enter the number of seconds between an unsuccessful attempt and the radius-server timeout times out. The range is from zero (0) to 1000 seconds. The default is **5 seconds**.

Defaults **5 seconds**

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Related Commands [radius-server host](#) — configures a RADIUS host.

role

Changes command permissions for roles.

Syntax `role mode { { { addrole | deleterole } role-name } | reset } command`
To delete access to a command, use the `no role mode role-name`

Parameters

mode	Enter one of the following keywords as the mode for which you are controlling access: configure for CONFIGURATION mode exec for EXEC mode interface for INTERFACE modes line for LINE mode route-map for Route-map mode router for Router mode
addrole	Enter the keyword <code>addrole</code> to add permission to the command. You cannot add or delete rights for the <code>sysadmin</code> role.
deleterole	Enter the keyword <code>deleterole</code> to remove access to the command. You cannot add or delete rights for the <code>sysadmin</code> role.
role-name	Enter a text string for the name of the user role up to 63 characters. These are 3 system defined roles you can modify: <code>secadmin</code> , <code>netadmin</code> , and <code>netoperator</code> .
reset	Enter the keyword <code>reset</code> to reset all roles back to default for that command.
command	Enter the command's keywords to assign the command to a certain access level. You can enter one or more keywords.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.5(0.0)	Introduced on the MXL.

Related Commands **userrole**

rate-limit

Configure NAS to allow or reject RADIUS dynamic authorization (DA) packets based on the configurable rate limit value.

Syntax `rate-limit packets per minute`
 To undo the configuration, enter the `no rate-limit` command.

Defaults 30 packets per minute.

Parameters `packet per minute` Enter the number of packets that you want processed per minute. The range is between 10 to 60 packets per minute.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Packets are dropped after number of packets reaches the configured rate-limit.

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

replay-protection-window

Configure replay protection window period to drop the duplicate packets.

Syntax `replay-protection-window minutes`
 To undo the configuration, enter the `no replay-protection-window` command.

Defaults 5 Minutes.

Parameters `minutes` Enter the number of minutes to drop the packets. The range is from 1 to 10 minutes.

Command Modes

- CONF-DYNAMIC-AUTH

Usage Information

- Duplicate packets are dropped within replay-protection-window period if packet has same source IP address, source UDP port and identifier.

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

terminate-session

Configure NAS to reject dot1x terminate-session requests from DAC.

Syntax

`terminate-session`

To drop the DM terminate-session requests from DAC, enter the `no terminate-session` command.

Defaults

Enabled.

Command Modes

- CONF-DYNAMIC-AUTH

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

The following is a list of the Dell EMC Networking OS version history for this command.

Version	Description
9.13(0.0)	Introduced on the C9010, S3100, S3048-ON, S4048T-ON, S4048-ON, S5000, S6010-ON, S6000-ON, S6100-ON, S6000, Z9100-ON, Z9500, FN-IOM, and MXL.

show privilege

View your access level.

Syntax

`show privilege`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Version	Description
9.3(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show privilege
Current privilege level is 15
Dell#
```

Suppressing AAA Accounting for Null Username Sessions

When you activate AAA accounting, the Dell Networking OS software issues accounting records for all users on the system, including users whose username string, because of protocol translation, is NULL.

An example of this is a user who comes in on a line where the AAA authentication `login method-list none` command is applied. To prevent accounting records from being generated for sessions that do not have usernames associated with them, use the following command.

- Prevent accounting records from being generated for users whose username string is NULL.

CONFIGURATION mode

```
aaa accounting suppress null-username
```

TACACS+ Commands

Dell Networking OS supports TACACS+ as an alternate method for login authentication.

TACACS+ Accounting

Enable AAA Accounting and create a record for monitoring the accounting function.

Syntax

```
aaa accounting {system | exec | commands level} {name | default}{start-stop | wait-start | stop-only} {tacacs+}
```

To disable AAA Accounting, use the `no aaa accounting {system | exec | command level} {name | default}{start-stop | wait-start | stop-only} {tacacs+} command`

Parameters

system	Enter the keyword <code>system</code> to send accounting information of any other AAA configuration.
exec	Enter the keyword <code>exec</code> to send accounting information when a user has logged in to EXEC mode.
commands level	Enter the keyword <code>command</code> then a privilege level for accounting of commands executed at that privilege level.
name default	Enter one of the following: <ul style="list-style-type: none"> For name, enter a user-defined name of a list of accounting methods. For default, the default accounting methods used.

start-stop	Enter the keywords <code>start-stop</code> to send a “start accounting” notice at the beginning of the requested event and a “stop accounting” notice at the end of the event.
wait-start	Enter the keywords <code>wait-start</code> to ensure that the TACACS+ security server acknowledges the start notice before granting the user’s process request.
stop-only	Enter the keywords <code>stop-only</code> to instruct the TACACS+ security server to send a “stop record accounting” notice at the end of the requested user process.
tacacs+	Enter the keyword <code>tacacs+</code> to use TACACS+ data for accounting.

Dell Networking OS currently only supports TACACS+ accounting.

Defaults	None
Command Modes	CONFIGURATION
Usage Information	In the example above, TACACS+ accounting is used to track all usage of EXEC command and commands on privilege level 15. Privilege level 15 is the default. If you want to track usage at privilege level 1 for example, use <code>theaaa accounting command 1 command</code> .

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.5(0.0)	Supported on the FN I/O Agregator and M I/O Agregator.

Example

```
Dell(config)# aaa accounting exec default start-stop tacacs+
Dell(config)# aaa accounting command 15 default start-stop tacacs+
Dell(config)#
```

Related Commands	enable password	changes the password for the enable command.
	login authentication	enables AAA login authentication on the terminal lines.
	password	creates a password.
	tacacs-server host	specifies a TACACS+ server host.

debug tacacs+

To assist with troubleshooting, view TACACS+ transactions.

Syntax `debug tacacs+`
 To disable debugging of TACACS+, use the `no debug tacacs+` command.

Defaults	Disabled.
Command Modes	EXEC Privilege
Supported Modes	Full–Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip tacacs source-interface

Specify an interface's IP address as the source IP address for TACACS+ connections.

Syntax `ip tacacs source-interface interface`
 To delete a source interface, use the `no ip tacacs source-interface` command.

Parameters *interface* Enter the following keywords and slot/port or number information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a ten-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For VLAN interface, enter the keyword `vlan` then a number from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

tacacs-server host

Specify a TACACS+ host.

Syntax `tacacs-server host {hostname | ipv4-address | ipv6-address} [port number] [timeout seconds] [key key]`

Parameters

hostname Enter the name of the TACACS+ server host.

ipv4-address | *ipv6-address* Enter the IPv4 address (A.B.C.D) or IPv6 address (X:X:X:X) of the TACACS+ server host.

port number (OPTIONAL) Enter the keyword `port` then a number as the port to be used by the TACACS+ server. The range is from zero (0) to 65535. The default is **49**.

timeout seconds (OPTIONAL) Enter the keyword `timeout` then the number of seconds the switch waits for a reply from the TACACS+ server. The range is from 0 to 1000. The default is **10 seconds**.

key key (OPTIONAL) Enter the keyword `key` then a string up to 42 characters long as the authentication key. This authentication key must match the key specified in the `tacacs-server key` for the TACACS+ daemon.

Defaults Not configured.
Command Modes CONFIGURATION
Supported Modes All Modes
Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information To list multiple TACACS+ servers to be used by the `aaa authentication login` command, configure this command multiple times.

If you are not configuring the switch as a TACACS+ server, you do not need to configure the `port`, `timeout` and `key` optional parameters. If you do not configure a key, the key assigned in the `tacacs-server key` command is used.

Related Commands [aaa authentication login](#) — specifies the login authentication method.
[tacacs-server key](#) — configures a TACACS+ key for the TACACS server.

tacacs-server key

Configure a key for communication between a TACACS+ server and a client.

Syntax `tacacs-server key [encryption-type] key`
To delete a key, use the `no tacacs-server key key` command.

Parameters

encryption-type (OPTIONAL) Enter either zero (0) or 7 as the encryption type for the key entered. The options are:

- 0 is the default and means the key is not encrypted and stored as clear text.
- 7 means that the key is encrypted and hidden.

key Enter a text string, up to 42 characters long, as the clear text password. Leading spaces are ignored.

Defaults Not configured.
Command Modes CONFIGURATION
Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information The key configured with this command must match the key configured on the TACACS+ daemon.

timeout login response

Specify how long the software waits for the login input (for example, the user name and password) before timing out.

Syntax `timeout login response seconds`
 To return to the default values, use the `no timeout login response` command.

Parameters

seconds Enter a number of seconds the software waits before logging you out. The range is:

- VTY: the range is from 1 to 30 seconds, the default is **30 seconds**.
- Console: the range is from 1 to 300 seconds, the default is **0 seconds** (no timeout).
- AUX: the range is from 1 to 300 seconds, the default is **0 seconds** (no timeout).

Defaults See the defaults settings shown in *Parameters*.

Command Modes LINE

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information The software measures the period of inactivity defined in this command as the period between consecutive keystrokes. For example, if your password is “password” you can enter “p” and wait 29 seconds to enter the next letter.

SSH Server and SCP Commands

The Dell Networking OS supports secure shell (SSH) protocol versions 1.5 and 2.0. SSH is a protocol for secure remote login over an insecure network. SSH sessions are encrypted and use authentication.

crypto key generate

Generates keys for the SSH server.

Syntax `crypto key generate {rsa | rsa1}`

Parameters

rsa	Enter the keyword <code>rsa</code> then the key size to generate a SSHv2 RSA host keys. The range is from 1024 to 2048 if you did not enable FIPS mode; if you enabled FIPS mode, you can only generate a 2048-bit key. The default is 1024 .
rsa1	Enter the keyword <code>rsa1</code> then the key size to generate a SSHv1 RSA host keys. The range is from 1024 to 2048. The default is 1024 .

Defaults

Key size **1024**; if you enable FIPS mode, the key size is **2048**.

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The host keys are required for key-exchange by the SSH server. If the keys are not found when you enable the server (`ip ssh server enable`), the keys are automatically generated.

This command requires user interaction and generates a prompt prior to overwriting any existing host keys.

 **NOTE: Only a user with superuser permissions should generate host-keys.**

Example

```
Dell(conf)#crypto key generate rsa
Enter key size <1024-2048>. Default<1024> :
Host key already exists. Overwrite (y/n)?y
Generating 1024-bit SSHv2 RSA key.
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
Dell(conf)#
Dell(conf)#crypto key generate rsa1
Enter key size <1024-2048>. Default<1024> :
Host key already exists. Overwrite (y/n)?y
Generating 1024-bit SSHv1 RSA key.
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
Dell(conf)#
```

Related Commands

[ip ssh server](#) — enables the SSH server.

[show crypto](#) — displays the SSH host public keys.

debug ip ssh

Enables collecting SSH debug information.

Syntax

```
debug ip ssh {client | server}
```

To disable debugging, use the `no debug ip ssh {client | server}` command.

Parameters

client	Enter the keyword <code>client</code> to enable collecting debug information on the client.
server	Enter the keyword <code>server</code> to enable collecting debug information on the server.

Defaults

Disabled on both client and server.

Command Modes

EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Debug information includes details for key-exchange, authentication, and established session for each connection.

ip scp topdir

Identify a location for files used in secure copy transfer.

Syntax

```
ip scp topdir directory
```

To return to the default setting, use the `no ip scp topdir` command.

Parameters

directory Enter a directory name.

Defaults

The internal flash (`flash:`) is the default directory.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To configure the switch as an SCP server, use the `ip ssh server` command.

Related Commands

[ip ssh server](#) — enables the SSH and SCP server on the switch.

ip ssh authentication-retries

Configure the maximum number of attempts that should be used to authenticate a user.

Syntax

```
ip ssh authentication-retries 1-10
```

Parameters

1-10 Enter the number of maximum retries to authenticate a user. The range is from 1 to 10. The default is **3**.

Defaults

3

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command specifies the maximum number of attempts to authenticate a user on an SSH connection with the remote host for password authentication. SSH disconnects when the number of password failures exceeds authentication-retries.

ip ssh cipher

Configure the list of ciphers supported on both SSH client and SCP.

Syntax `ip ssh cipher cipher-list`

Parameters

cipher cipher-list Enter the keyword `cipher` and then a space-delimited list of ciphers that the SSH client supports. The following ciphers are available.

- aes256-ctr
- aes256-cbc
- aes192-ctr
- aes192-cbc
- aes128-ctr
- aes128-cbc
- 3des-cbc

Defaults The default list of ciphers is in the order as shown below:

- aes256-ctr
- aes256-cbc
- aes192-ctr
- aes192-cbc
- aes128-ctr
- aes128-cbc
- 3des-cbc

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.0)	Introduced on the S6100-ON, S6000, S6000-ON, S5000, S4810, S4820T, S3048-ON, S4048-ON, MXL, C9010, S3100 series, and Z9100-ON.

Usage Information

- You can select one or more ciphers from the list.
- The default list of supported ciphers is same irrespective of whether FIPS mode is enabled or disabled.
- Client-supported cipher list gets preference over the server-supported cipher list in selecting the cipher for the SSH session.
- When the `cipher (-c)` option is used with the SSH CLI, it overrides the configured or default cipher list.

- When FIPS is enabled or disabled, the client ciphers get default configuration.

ip ssh connection-rate-limit

Configure the maximum number of incoming SSH connections per minute.

Syntax	<code>ip ssh connection-rate-limit 1-10</code>	
Parameters	1-10	Enter the number of maximum numbers of incoming SSH connections allowed per minute. The range is from 1 to 10 per minute. The default is 10 per minute .
Defaults	10 per minute	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip ssh hostbased-authentication

Enable hostbased-authentication for the SSHv2 server.

Syntax	<code>ip ssh hostbased-authentication enable</code>	
	To disable hostbased-authentication for SSHv2 server, use the <code>no ip ssh hostbased-authentication enable</code> command.	
Parameters	enable	Enter the keyword <code>enable</code> to enable hostbased-authentication for SSHv2 server.
Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	If you enable this command, clients can log in without a password prompt. This command provides two levels of authentication:	
	<ul style="list-style-type: none"> · rhost-authentication is done with the file specified in the <code>ip ssh rhostfile</code> command. · checking client host-keys is done with the file specified in the <code>ip ssh pub-key-file</code> command. 	

NOTE: Administrators must specify the two files (`rhosts` and `pub-key-file`) to configure host-based authentication.

Related Commands `ip ssh pub-key-file` — public keys of trusted hosts from a file.

`ip ssh rhostsfile` — trusted hosts and users for rhost authentication.

ip ssh key-size

Configure the size of the server-generated RSA SSHv1 key.

Syntax `ip ssh key-size 512-869`

Parameters `512-869` Enter the key-size number for the server-generated RSA SSHv1 key. The range is from 512 to 869. The default is **768**.

Defaults Key size **768**

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The server-generated key is used for SSHv1 key-exchange.

ip ssh mac

Configure the list of MAC algorithms supported on both SSH client and SCP.

Syntax `ip ssh mac mac-list`

Parameters `mac mac-list` Enter the keyword `mac` then a space-delimited list of message authentication code (MAC) algorithms supported by the SSH client. The following MAC algorithms are available.

When FIPS mode is enabled:

- `hmac-sha2-256`
- `hmac-sha1`
- `hmac-sha1-96`

When FIPS mode is disabled:

- `hmac-sha2-256`
- `hmac-sha1`
- `hmac-sha1-96`
- `hmac-md5`

- `hmac-md5-96`

Defaults

The default list of MAC algorithm is in the order as shown below:

When FIPS mode is enabled:

- `hmac-sha2-256`
- `hmac-sha1`
- `hmac-sha1-96`

When FIPS mode is disabled:

- `hmac-sha2-256`
- `hmac-sha1`
- `hmac-sha1-96`
- `hmac-md5`
- `hmac-md5-96`

Command Modes

CONFIGURATION

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.0)	Introduced on the S6100-ON, S6000, S6000-ON, S5000, S4810, S4820T, S3048-ON, S4048-ON, MXL, C9010, S3100 series, and Z9100-ON.

Usage Information

- You can select one or more MAC algorithms from the list.
- Client-supported MAC list gets preference over the server-supported MAC list in selecting the MAC algorithm for the SSH session.
- When the `MAC (-m)` option is used with the SSH CLI, it overrides the configured or default MAC list.
- When FIPS is enabled or disabled, the client MACs get default configuration.

ip ssh password-authentication

Enable password authentication for the SSH server.

Syntax

```
ip ssh password-authentication enable
```

To disable password-authentication, use the `no ip ssh password-authentication enable` command.

Parameters

enable Enter the keyword `enable` to enable password-authentication for the SSH server.

Defaults

Enabled

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

With password authentication enabled, you can authenticate using the local, RADIUS, or TACACS+ password fallback order as configured.

ip ssh rhostsfile

Specify the rhost file used for host-based authorization.

Syntax `ip ssh rhostsfile {WORD}`

Parameters **WORD** Enter the rhost file name for the host-based authentication.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#conf
Dell(conf)# ip ssh rhostsfile flash://shosts
Dell(conf)#
```

Usage Information

This command specifies the rhost file used for host-based authentication. This `creates/` file overwrites the `flash:/ADMIN_DIR/ssh/shosts` file and deletes the user-specified file. Even though this command is a global configuration command, it does not appear in the running configuration because you only need to run this command once.

This file contains hostnames and usernames, for which hosts and users, rhost-authentication can be allowed.



NOTE: For `rhostfile` and `pub-key-file`, the administrator must FTP the file to the switch.

ip ssh rekey

Configures the time `rekey-interval` or volume `rekey-limit` threshold at which to re-generate the SSH key during an SSH session.

Syntax

`ip ssh rekey [time rekey-interval] [volume rekey-limit]`

To reset to the default, use `no ip ssh rekey [time rekey-interval] [volume rekey-limit]` command.

Parameters

time minutes	Enter the keywords <code>time</code> then the amount of time in minutes. The range is from 10 to 1440 minutes. The default is 60 minutes
volume rekey-limit	Enter the keywords volume then the amount of volume in megabytes. The range is from 1 to 4096 to megabytes. The default is 1024 megabytes

Defaults

The default time is **60** minutes. The default volume is **1024** megabytes.

Command Modes

CONFIGURATION mode

Supported Modes

Full-Switch

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL

ip ssh rsa-authentication (Config)

Enable RSA authentication for the SSHv2 server.

Syntax

```
ip ssh rsa-authentication enable
```

To disable RSA authentication, use the `no ip ssh rsa-authentication enable` command.

Parameters

enable	Enter the keyword <code>enable</code> to enable RSA authentication for the SSHV2 server.
---------------	--

Defaults

Disabled.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Enabling RSA authentication allows the user to log in without being prompted for a password. In addition, the OpenSSH compatible SSHv2 RSA public key must be added to the list of authorized keys (`ip ssh rsa-authentication my-authorized-keys device://filename` command).

Related Commands

[ip ssh rsa-authentication \(EXEC\)](#) — adds keys for RSA authentication.

ip ssh rsa-authentication (EXEC)

Add keys for the RSA authentication.

Syntax	<code>ip ssh rsa-authentication {my-authorized-keys WORD}</code> To delete the authorized keys, use the <code>no ip ssh rsa-authentication {my-authorized-keys}</code> command.						
Parameters	<table><tr><td>my-authorized-keys WORD</td><td>Enter the keywords <code>my-authorized-keys</code> then the filename of the RSA authorized-keys.</td></tr></table>	my-authorized-keys WORD	Enter the keywords <code>my-authorized-keys</code> then the filename of the RSA authorized-keys.				
my-authorized-keys WORD	Enter the keywords <code>my-authorized-keys</code> then the filename of the RSA authorized-keys.						
Defaults	none						
Command Modes	EXEC						
Supported Modes	Full-Switch						
Command History	<table><thead><tr><th>Version</th><th>Description</th></tr></thead><tbody><tr><td>9.9(0.0)</td><td>Introduced on the FN IOM.</td></tr><tr><td>8.3.16.1</td><td>Introduced on the MXL 10/40GbE Switch IO Module.</td></tr></tbody></table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information If you want to log in without being prompted for a password, log in through RSA authentication. To do that, first add the SSHV2 RSA public keys to the list of authorized keys. This command adds the specified RSA keys to the following file: `flash://ADMIN_DIR/ssh/authorized-keys-username` (where `username` is the user associated with this terminal).

 **NOTE:** The `no` form of this command deletes the file `flash://ADMIN_DIR/ssh/ authorized-keys-username file`.

Related Commands [show ip ssh rsa-authentication](#) — displays the RSA authorized keys.
[ip ssh rsa-authentication \(Config\)](#) — enables RSA authentication.

ip ssh server

Configure an SSH server.

Syntax `ip ssh server {ciphers cipher-list} {enable | port port-number} [kex key-exchange-algorithm] [mac hmac-algorithm] [version {1 | 2}]`
To disable SSH server functions, use the `no ip ssh server {ciphers cipher-list} {enable | port port-number} {kex key-exchange-algorithm}` command.

Parameters

enable	Enter the keyword <code>enable</code> to start the SSH server.
ciphers cipher-list	Enter the keyword <code>ciphers</code> and then a space-delimited list of ciphers that the SSH server supports. The following ciphers are available. <ul style="list-style-type: none">• <code>3des-cbc</code>

- aes128-cbc
- aes192-cbc
- aes256-cbc
- aes128-ctr
- aes192-ctr
- aes256-ctr

The default cipher list is used.

- 3des-cbc
- aes128-cbc
- aes192-cbc
- aes256-cbc
- aes128-ctr
- aes192-ctr
- aes256-ctr

mac *hmac-algorithm*

Enter the keyword `mac` then a space-delimited list of hash message authentication code (HMAC) algorithms supported by the SSH server for keying hashing for the message authentication.

The following HMAC algorithms are available:

- hmac-sha1
- hmac-sha1-96
- hmac-sha2-256

When FIPS is enabled, the default HMAC algorithm is `hmac-sha1-96`.

When FIPS is not enabled, the default HMAC algorithms are the following:

- hmac-md5
- hmac-md5-96
- hmac-sha1
- hmac-sha1-96
- hmac-sha2-256

kex *key-exchange-algorithm*

Enter the keyword `kex` and then a space-delimited list of key exchange algorithms supported by the SSH server.

The following key exchange algorithms are available:

- diffie-hellman-group-exchange-sha1
- diffie-hellman-group1-sha1
- diffie-hellman-group14-sha1

When FIPS is enabled, the default key-exchange-algorithm is `diffie-hellman-group14-sha1`.

When FIPS is not enabled, the default key-exchange-algorithms are the following:

- `diffie-hellman-group-exchange-sha1`
- `diffie-hellman-group1-sha1`,
- `diffie-hellman-group14-sha1`

port *port-number* (OPTIONAL) Enter the keyword `port` then the port number of the listening port of the SSH server. The range is from 1 to 65535. The default is **22**.

[version {1 | 2}] (OPTIONAL) Enter the keyword `version` then the SSH version 1 or 2 to specify only SSHv1 or SSHv2.

 **NOTE: If you enable FIPS mode, you can only select version 2.**

Defaults Default listening port is **22**.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the <code>cipher</code> , <code>key</code> and <code>mac</code> options on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command enables the SSH server and begins listening on a port. If a port is not specified, listening is on SSH default port 22.

 **NOTE: Starting with Dell Networking OS Release 9.2(0.0), SSH server is enabled by default.**

Example

```
Dell# conf
Dell(conf)# ip ssh server port 45
Dell(conf)# ip ssh server enable
Dell#
```

Related Commands [show ip ssh](#) — displays the ssh information.

show crypto

Displays the public part of the SSH host-keys.

Syntax `show crypto key mypubkey {rsa | rsa1}`

Parameters

Key	Enter the keyword <code>key</code> to display the host public key.
mypubkey	Enter the keyword <code>mypubkey</code> to display the host public key.
rsa	Enter the keyword <code>rsa</code> to display the host SSHv2 RSA public key.
rsa1	Enter the keyword <code>rsa1</code> to display the host SSHv1 RSA public key.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command is useful if the remote SSH client implements Strict Host Key Checking. You can copy the host key to your list of known hosts.

Example

```
Dell#show crypto key mypubkey rsa
1024 65537 150477578329696762034442
036788963493870885070479991994
81529207062670596651487238987338851
388872604558748599801007073218
241492903069202754403378383368480816
50517187573884981716247894646
7706560683627207710939806628138071534
8265219018664838324451688712
0415316302457397744496043353643022514
81307373438756957374121

Dell#show crypto key mypubkey rsa
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQ
C9IYgcUcc8wQm+5KUQgW/zAs8V5S
TalGq4/+S+6H9axpQnA+A0xweeo5iR5hvPP6Vc+
HS+uWoQH+VOJ8H5Jxsm347XnYv/
gpSqhjZ/C5UwFiucVkVfYu8RDcJViuQhLvPEeb
IF5Q+sD8K89MXU90MAS/UdoiJZSO
IlbaCuSTW1Q==
Dell#
```

Related Commands [crypto key generate](#) — generates the SSH keys.

show ip ssh

Display information about established SSH sessions.

Syntax show ip ssh

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.10(0.0)	Removed the support for hmac-sha2-256-96 algorithm.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show ip ssh
SSH server           : enabled.
SSH server version   : v1 and v2.
SSH server vrf       : default.
```

```

SSH server ciphers      : 3des-cbc, aes128-cbc, aes192-cbc, aes256-cbc, aes128-
ctr, aes192-ctr, aes256-ctr.
SSH server macs        : hmac-sha2-256, hmac-sha1, hmac-sha1-96, hmac-md5,
hmac-md5-96.
SSH server kex algorithms : diffie-hellman-group-exchange-sha1, diffie-hellman-
group1-sha1, diffie-hellman-group14-sha1.
Password Authentication : enabled.
Hostbased Authentication : disabled.
RSA Authentication     : disabled.
  Vty      Encryption      HMAC      Remote IP
  2        aes128-cbc      hmac-md5  10.16.127.141
  4        aes128-cbc      hmac-md5  10.16.127.141
  * 5      aes128-cbc      hmac-md5  10.16.127.141
Dell#

```

Related Commands [show ip ssh client-pub-keys](#) — displays the client-public keys.

show ip ssh client-pub-keys

Displays the client public keys used in host-based authentication

Syntax `show ip ssh client-pub-keys`

Defaults none

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command displays the contents of the `flash://ADMIN_DIRssh/knownhosts` file.

Example

```

Dell#show ip ssh client-pub-keys

poclab4,123.12.1.123 ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAIEAox/
QQp8xYhzOxn07yh4VGPAoUfgKoiEThO9G4sNV+ui
+DWEc3cgYAcU5Lai1MU2ODrzhCwyDNp05tKBU3tReG1
o8AxLi6+S4hyEMqHzkzBFNVqHzpQc
+Rs4p2urzV0F4pRKnaXdHf3Lk4D460HZRhhVrxqeNxpDpEnWIMPJi0
ds= ashwani@poclab4

Dell#

```

show ip ssh rsa-authentication

Displays the authorized-keys for the RSA authentication.

Syntax `show ip ssh rsa-authentication {my-authorized-keys}`

Parameters `my-authorized-keys` Display the RSA authorized keys.

Defaults	none
Command Modes	EXEC
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command displays the contents of the `flash:/ADMIN_DIR/ssh/authorized-keys.username` file.

Example

```
Dell#show ip ssh rsa-authentication my-authorized-keys
ssh-rsa
AAAAB3NzaC1yc2EAAAABIwAAAIEAyB17l4gFp4r2DRHivMc1VZd0Sg5
GQxRV1y1X1JOMe06Nd0WuYyzrQMM4qJAoBwtneOXfLBcHF3V2hcMIqa
ZN+CRcnw/zCmlnCf0+qVTd1oofsea5r09kS0xTp0CNfHXZ3NuGCq9Ov
33m9+U9tMwhS8vy8AVxdH4x4km3c3t5Jvc=freedom@poclab4
Dell#
```

show role

Display information on permissions assigned to a command, including user role and/or permission level.

Syntax `show role mode {mode} {command}`

Parameters

<i>command</i>	Enter the command's keywords to assign the command to a certain access level. You can enter one or all of the keywords.
<i>mode mode</i>	Enter keyword then one of the following modes. <ul style="list-style-type: none"> · configure · exec · interface · line · route-map · router

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL

Examples

```
Dell#show role mode configure username
Role access: sysadmin

Dell#show role mode configure management route
Role access: netadmin, sysadmin

Dell#show role mode configure management crypto-policy
Role access: secadmin, sysadmin
```

Related Commands [userrole](#) — creates user roles for the role-based security model.

show userroles

Display information on all defined user roles.

Syntax `show userroles`

Example

```
Dell#show userroles
Role          Inheritance  Modes
netoperator
netadmin      Exec
              Exec Config Interface Line Router IP
              Route-map Protocol MAC
secadmin      Exec Config
sysadmin      Exec Config Interface Line Router IP
              Route-map Protocol MAC
netoperator
testadmin     netadmin    Exec Config Interface Line Router IP
              Route-map Protocol MAC
```

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL.

Related Commands [userrole](#) — creates user roles for the role-based security model.

ssh

Open an SSH connection specifying the host name, username, port number and version of the SSH client.

Dell Networking OS supports both inbound and outbound SSH sessions using IPv4 addressing. Inbound SSH supports accessing the system through the management interface as well as through a physical Layer 3 interface.

Syntax `ssh {hostname | ipv4 address} [-l username | -p port-number|-v {1|2}]`

Parameters

hostname	(OPTIONAL) Enter the IP address or the host name of the remote device.
ipv4 address	(OPTIONAL) Enter the IP address in dotted decimal format A.B.C.D.
-l username	(OPTIONAL) Enter the keyword -l followed by the user name used in this SSH session. The default is the user name of the user associated with the terminal.

- p *port-number*** (OPTIONAL) Enter the keyword `-p` followed by the port number. The range is from 1 to 65536. The default is **22**.
- v {1 | 2}** (OPTIONAL) Enter the keyword `-v` then the SSH version 1 or 2. The default is the version from the protocol negotiation.

Defaults As shown in the *Parameters* section.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.10(0.0)	Removed the support for hmac-sha2-256-96 algorithm.
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example `Dell#ssh 123.12.1.123 -l ashwani -p 5005 -v 2`

ip ssh pub-key-file

Specify the file used for host-based authentication.

Syntax `ip ssh pub-key-file {WORD}`

Parameters **WORD** Enter the file name for the host-based authentication.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command specifies the file used for the host-based authentication. The `creates/` file overwrites the `flash://ADMIN_DIR/ssh/knownhosts` file and deletes the user-specified file. Even though this command is a global configuration command, it does not appear in the running configuration because you only need to run this command once.

The file contains the OpenSSH-compatible public keys of the host for which host-based authentication is allowed. An example known host file format:

```
poclab4,123.12.1.123 ssh-rsa AAAAB3NzaC1yc2EAAAABIwAAAIEAox/
QQp8xYhzOxn07yh4VGPAoUfgKoiETHO9G4sNV+ui+DWEc3cgYAcU5LailMU2ODrzhCwyDNp05tKBU3t
ReG1o8AxLi6+S4hyEMqHzkzBFNVqHzpQc
+Rs4p2urzV0F4pRKnaXdhf3Lk4D460HZRhhVrxqeNxPDpEn WIMPJi0ds= ashwani@poclab4
```

NOTE: For `rhostfile` and `pub-key-file`, the administrator must FTP the file to the chassis.

Example

```
Dell#conf
Dell(conf)# ip ssh pub-key-file flash://knownhosts
Dell(conf)#
```

Related Commands [show ip ssh client-pub-keys](#) — displays the client-public keys used for the host-based authentication.

Secure DHCP Commands

The dynamic host configuration protocol (DHCP) as defined by RFC 2131 provides no authentication or security mechanisms. Secure DHCP is a suite of features that protects networks that use dynamic address allocation from spoofing and attacks.

clear ip dhcp snooping

Clear the DHCP binding table.

Syntax `clear ip dhcp snooping binding`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip dhcp snooping](#) — displays the contents of the DHCP binding table.

ip dhcp relay

Enable Option 82.

Syntax `ip dhcp relay information-option [trust-downstream]`

Parameters

trust-downstream Configure the system to trust Option 82 when it is received from the previous-hop router.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp snooping

Enable DHCP Snooping globally.

Syntax `[no] ip dhcp snooping`

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When enabled, no learning takes place until you enable snooping on a VLAN. After disabling DHCP Snooping, the binding table is deleted and Option 82, IP Source Guard, and Dynamic ARP Inspection are disabled.

Related Commands [ip dhcp snooping vlan](#) — enables DHCP Snooping on one or more VLANs.

ip dhcp snooping database

Delay writing the binding table for a specified time.

Syntax `ip dhcp snooping database write-delay minutes`

Parameters *minutes* The range is from 5 to 21600.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp snooping binding

Create a static entry in the DHCP binding table.

Syntax `[no] ip dhcp snooping binding mac address vlan-id vlan-id ip ip-address
interface type slot/port lease number`

Parameters

mac address	Enter the keyword <code>mac</code> then the MAC address of the host to which the server is leasing the IP address.
vlan-id <i>vlan-id</i>	Enter the keywords <code>vlan-id</code> then the VLAN to which the host belongs. The range is from 2 to 4094.
ip <i>ip-address</i>	Enter the keyword <code>ip</code> then the IP address that the server is leasing.
interface <i>type</i>	Enter the keyword <code>interface</code> then the type of interface to which the host is connected. <ul style="list-style-type: none">For a ten-Gigabit Ethernet interface, enter the keyword <code>tengigabitethernet</code>.
slot/port	Enter the slot and port number of the interface.
lease <i>time</i>	Enter the keyword <code>lease</code> then the amount of time the IP address is leased. The range is from 1 to 4294967295.

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show ip dhcp snooping](#) — displays the contents of the DHCP binding table.

ip dhcp snooping database renew

Renew the binding table.

Syntax

```
ip dhcp snooping database renew
```

Defaults

none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.19.0	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp snooping trust

Configure an interface as trusted.

Syntax	<code>[no] ip dhcp snooping trust</code>	
Defaults	Untrusted	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp source-address-validation

Enable IP source guard.

Syntax	<code>[no] ip dhcp source-address-validation</code>	
Defaults	Disabled.	
Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ip dhcp snooping vlan

Enable DHCP Snooping on one or more VLANs.

Syntax	<code>[no] ip dhcp snooping vlan <i>name</i></code>	
Parameters	<i>name</i>	Enter the name of a VLAN on which to enable DHCP Snooping.
Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When enabled, the system begins creating entries in the binding table for the specified VLANs.

 **NOTE: Learning only happens if there is a trusted port in the VLAN.**

Related Commands [ip dhcp snooping trust](#) — configures an interface as trusted.

show ip dhcp snooping

Display the contents of the DHCP binding table.

Syntax `show ip dhcp snooping binding`

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [clear ip dhcp snooping](#) — clears the contents of the DHCP binding table.

username

Establish an authentication system based on user names.

Syntax `username name [nopassword | {password | secret} [encryption-type] password] [privilege level]`

If you do not want a specific user to enter a password, use the `nopassword` option.

To delete authentication for a user, use the `no username name` command.

Parameters

name	Enter a text string for the name of the user up to 63 characters.
nopassword	Enter the keyword <code>nopassword</code> to specify that the user should not enter a password.
password	Enter the keyword <code>password</code> followed by the <code>encryption-type</code> or the password.
secret	Enter the keyword <code>secret</code> followed by the <code>encryption-type</code> or the password.
encryption-type	Enter an encryption type for the <code>password</code> that you enter. <ul style="list-style-type: none"> · 0 directs Dell Networking OS to store the password as clear text. It is the default encryption type when using the <code>password</code> option.

- 7 to indicate that a password encrypted using a DES hashing algorithm follows. This encryption type is available with the `password` option only.
- 5 to indicate that a password encrypted using an MD5 hashing algorithm follow. This encryption type is available with the `secret` option only, and is the default encryption type for this option.

<i>password</i>	Enter a string up to 32 characters long.
<i>privilege level</i>	Enter the keyword <code>privilege</code> then a number from zero (0) to 15.
<i>secret</i>	Enter the keyword <code>secret</code> then the encryption type.

Defaults The default encryption type for the `password` option is **0**. The default encryption type for the `secret` option is **0**.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information To view the defined user names, use the `show running-config user` command.

Related Commands [service password-encryption](#) — specifies a password for users on terminal lines.

[show running-config](#) — views the current configuration.

userrole

Create user roles for the role-based security model.

Syntax `userrole name inherit existing-role-name`
 To delete a role name, use the `no userrole name` command. Note that the reserved role names may not be deleted.

Parameters

<i>name</i>	Enter a text string for the name of the user up to 63 characters. It cannot be one of the system defined roles (sysadmin, secadmin, netadmin, netoperator).
<i>inherit existing-role-name</i>	Enter the <code>inherit</code> keyword then specify the system defined role to inherit permissions from (sysadmin, secadmin, netadmin, netoperator).

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON.

Version	Description
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, MXL.

Usage Information

Instead of using the system defined user roles, you can create a new user role that best matches your organization. When you create a new user role, you first inherit permissions from one of the system defined roles. Otherwise you would have to create a user role from scratch. You then restrict commands or add commands to that role. For information about this topic, See *Modifying Command Permissions for Roles*.

NOTE: You can change user role permissions on system pre-defined user roles or user-defined user roles.

Important Points to Remember

Consider the following when creating a user role:

- Only the system administrator and user-defined roles inherited from the system administrator can create roles and usernames. Only the system administrator, security administrator, and roles inherited from these can use the `role` command to modify command permissions. The security administrator and roles inherited by security administrator can only modify permissions for commands they already have access to.
- Make sure you select the correct role you want to inherit.

NOTE: If you inherit a user role, you cannot modify or delete the inheritance. If you want to change or remove the inheritance, delete the user role and create it again. If the user role is in use, you cannot delete the user role.

Related Commands `role mode { { addrole | deleterole } role-name } | reset } command` – Modifies (adds or deletes) command permissions for newly created user roles and system defined roles.

ICMP Vulnerabilities

The Internet Control Message Protocol (ICMP) is a network-layer Internet protocol that provides message packets to report errors and other information regarding IP packet processing back to the source. Dell Networking OS mainly addresses the following ICMP vulnerabilities:

- ICMP Mask Reply
- ICMP Timestamp Request
- ICMP Replies
- IP ID Values Randomness

You can configure the Dell Networking OS to drop ICMP reply messages. When you configure the `drop icmp` command, the system drops the ICMP reply messages from the front end and management interfaces. By default, the Dell Networking OS responds to all the ICMP messages. The Dell Networking OS suppresses the following ICMPv4 and ICMPv6 message types:

Table 4. Suppressed ICMPv4 message types

ICMPv4 Message Types

Echo reply (0)

All sub types of destination unreachable (3)

Source quench (4)

Redirect (5)

Router advertisement (9)

ICMPv4 Message Types

Router solicitation (10)
Time exceeded (11)
IP header bad (12)
Timestamp request (13)
Timestamp reply (14)
Information request (15)
Information reply (16)
Address mask request (17)
Address mask reply (18)

NOTE: The Dell Networking OS does not suppress the ICMPv4 message type `Echo request (8)`.

Table 5. Suppressed ICMPv6 message types

ICMPv6 Message Types

Destination unreachable (1)
Time exceeded (3)
IPv6 header bad (4)
Echo reply (129)
Who are you request (139)
Who are you reply (140)
Mtrace response (200)
Mtrace messages (201)

NOTE:

The Dell Networking OS does not suppress the following **ICMPv6** message types:

- Packet too big (2)
- Echo request (128)
- Multicast listener query (130)
- Multicast listener report (131)
- Multicast listener done (132)
- Router solicitation (133)
- Router advertisement (134)
- Neighbor solicitation (135)
- Neighbor advertisement (136)
- Redirect (137)
- Router renumbering (138)
- MLD v2 listener report (143)
- Duplicate Address Request (157)
- Duplicate Address Confirmation (158)

drop icmp

Drops the ICMPv4 and ICMPv6 packets.

Syntax `drop {icmp | icmp6}`

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

Version	Description
9.11.0.0	Introduced on the S4810, S4820T, S3048-ON, S3100 Series, S4048-ON, S5000, S6000, S6000-ON, Z9500, Z9100-ON, S6100-ON, S6010-ON, S4048T-ON, C9000, M IOA, FN IOM, and MXL.

Usage Information When the `drop icmp` feature is configured, the system drops the ICMP reply messages on the front end and management interfaces. By default, the Dell Networking OS responds to all the ICMP messages.

NOTE: There is no separate CLI to enable IP ID randomness. By default, the IP ID in the kernel is randomized.

System Security Commands

The following section lists the system security commands.

generate hash

Generate a hash checksum for the given file or the startup configuration using the MD5, SHA1, or SHA256 algorithm.

Syntax `generate hash {md5 | sha1 | sha256} {flash://filename | startup-config}`

Parameters	
md5 sha1 sha256	Enter the keyword <code>md5</code> , <code>sha1</code> , or <code>sha256</code> to generate .
flash://filename	Enter the keyword <code>flash:</code> and enter the filename to generate the hash checksum for any file in the flash drive using the MD5, SHA1, or SHA256 algorithm.
startup-config	Enter the keyword <code>shartup-config</code> to generate the hash checksum for the startup configuration using the MD5, SHA1, or SHA256 algorithm.

Defaults None

Command Modes EXEC Privilege

Command History	Version	Description
	9.13(0.0)	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, Z9500, C9010, MXL, and FN-IOM.

Usage Information Use the `generate hash` command to generate a hash checksum for your startup configuration, and use the hash to verify using the `verified boot hash` command.

Example

```
DellEMC#generate hash md5 startup-config
MD5SUM(/f10/flash/startup-config) : f81812a64eea202c5b2ef782639bafc3
```

root-access password

Configure the root access password.

Syntax `root-access password [encryption-type] root-password`

To reset to the default password, use the `no root-access password` command.

Parameters

encryption-type	(OPTIONAL) Enter an encryption type for the root password that you enter. <ul style="list-style-type: none">0 directs the system to store the password as clear text.7 directs the system to store the password with a dynamic salt.9 directs the system to store the password as clear text in an inaccessible location.
root-password	Enter the root password.

Defaults Not configured

Command Modes Full-Switch

Command History

Version	Description
9.13(0.0)	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, Z9500, C9010, MXL, and FN-IOM.

Usage Information If you configure the `secure-cli` command on the system, the Dell EMC Networking OS resets any previously-configured root access password to the default root password without displaying any warning message. With the `secure-cli` command enabled on the system, the CONFIGURATION mode does not display the `root access password` option.

When you configure the root access password, ensure that your password meets the following criteria:

- A minimum of eight characters in length
- A minimum of one lower case letter (a to z)
- A minimum of one upper case letter (A to Z)
- A minimum of one numeric character (0 to 9)
- A minimum of one special character including a space (" !"#\$\$%&'()*+,-./:;<=>?@[\\]^_`{|}~")

If your password does not meet the criteria, the system does not accept your password.

If you use encryption type 9, the system stores the clear text password in an inaccessible location on the system. The `show running-configuration` command does not display the password. This configuration is not portable between different systems.

Example

```
DellEMC)# show running-config | g root
root-access password 7
f4dc0cb9787722dd1084d17f417f164cc7f730d4f03d4f0215294cbd899614e3
```

verified boot

Enable OS image hash validation during system startup.

Syntax

```
verified boot
```

To disable OS image hash validation, use the `no verified boot` command.

Defaults

Not configured

Command Modes

CONFIGURATION

Command History

Version	Description
9.13(0.0)	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, MXL, and FN-IOM.

Usage Information

When you reboot the system using the `reload` command, the system performs OS image verification on the primary boot image. You can enable boot image hash validation only for images on local flash partitions such as A: or B:.

Example

```
DellEMC(config)# verified boot
```

verified boot hash

Verify and store the hash value of the startup configuration.

Syntax

```
verified boot hash {system-image {A: | B:} | startup-config} hash value
```

Parameters

system-image {A: B:}	Enter the keyword <code>system-image</code> and A: or B:, depending on where the image is stored and then the hash value that is present on the iSupport page for your image.
startup-config	Enter the keyword <code>startup-config</code> and then the hash value for the startup configuration. You can get the hash value for the startup configuration using the <code>generate hash</code> command.
hash value	Enter the MD5, SHA1, or SHA256 hash.

Defaults

None

Command Modes

EXEC Privilege

Command History

Version	Description
9.13(0.0)	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, Z9500, C9010, MXL, and FN-IOM.

Usage Information Dell EMC Networking OS supports MD5, SHA1, and SHA256.

Example `DellEMC# verified boot hash system-image A: 619A8C1B7A2BC9692A221E2151B9DA9E`

verified startup-config

Enable hash validation for the startup configuration during system startup.

Syntax `verified startup-config`

To disable hash validation for the startup configuration, use the `no verified startup-config` command.

Defaults Not configured

Command Modes Full-Switch

Command History

Version	Description
9.13(0.0)	Introduced on the S3100 series, S3048-ON, S4048-ON, S4048T-ON, S5000, S6000, S6000-ON, S6010-ON, S6100-ON, Z9100-ON, Z9500, C9010, MXL, and FN-IOM.

Example `DellEMC(config)# verified startup-config`

sFlow monitoring system includes an sFlow Agent and an sFlow Collector.

- The sFlow Agent combines the flow samples and interface counters into sFlow datagrams and forwards them to the sFlow Collector.
- The sFlow Collector analyses the sFlow Datagrams received from the different devices and produces a network-wide view of traffic flows.

Important Points to Remember

- Dell Networking OS recommends that the sFlow Collector be connected to the Dell Networking chassis through a line card port rather than the route processor module (RPM) Management Ethernet port.
- The system exports all sFlow packets to the sFlow Collector. A small sampling rate can equate to many exported packets. A backoff mechanism is automatically applied to reduce this amount. Some sampled packets may be dropped when the exported packet rate is high and the backoff mechanism is about to or is starting to take effect. The dropEvent counter, in the sFlow packet, is always zero.
- sFlow sampling is done on a per-port basis.
- Community list and local preference fields are not filled up in the extended gateway element in the sFlow datagram.
- The 802.1P source priority field is not filled up in the extended switch element in the sFlow datagram.
- Only Destination and Destination Peer AS numbers are packed in the dst-as-path field in the extended gateway element.
- If the packet being sampled is redirected using policy-based routing (PBR), the sFlow datagram may contain incorrect extended gateway/router information.
- The source virtual local area network (VLAN) field in the extended switch element is not packed if there is a routed packet.
- The destination VLAN field in the extended switch element is not packed if there is a multicast packet.
- The maximum number of packets that can be sampled and processed per second is:
 - 7500 packets when no extended information packing is enabled.
 - 7500 packets when only extended-switch information packing is enabled (refer to [sflow extended-switch enable](#)).
 - 1600 packets when you enable extended-router and/or extended-gateway information packing

Topics:

- [sflow collector](#)
- [sflow enable \(Global\)](#)
- [sflow ingress-enable](#)
- [sflow extended-switch enable](#)
- [sflow max-header-size extended](#)
- [sflow polling-interval \(Global\)](#)
- [sflow polling-interval \(Interface\)](#)
- [sflow sample-rate \(Global\)](#)
- [sflow sample-rate \(Interface\)](#)
- [show sflow](#)
- [show sflow stack-unit](#)

sflow collector

Configure a collector device to which sFlow datagrams are forwarded.

Syntax `sflow collector {ip-address} agent-addr {ip-address} [number [max-datagram-size number]] | [max-datagram-size number]`
To delete a configured collector, use the `no sflow collector {ip-address} agent-addr {ipv4-address} [number [max-datagram-size number]] | [max-datagram-size number]` command.

Parameters	sflow collector ip-address	Enter the IPv4 (A.B.C.D) of the sFlow collector device.
	agent-addr ip-address	Enter the IPv4 (A.B.C.D) of the sFlow agent in the router.
	number	(OPTIONAL) Enter the user datagram protocol (UDP) port number. The range is from 0 to 65535. The default is 6343.
	max-datagram-size number	(OPTIONAL) Enter the keyword max-datagram-size then the size number in bytes. The range is from 400 to 1500. The default is 1400 .

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can configure up to two sFlow collectors (IPv4 or IPv6). If two collectors are configured, traffic samples are sent to both.

The sFlow agent address is carried in a field in SFlow packets and is used by the collector to identify the sFlow agent.

In sFlow, the agent address is a single invariant IPv4 or IPv6 address used to identify the agent to the collector. It is usually assigned the address of a loopback interface on the agent, which provides invariance. The agent address is carried as a field in the payload of the sFlow packets.

As part of the sFlow-MIB, if the SNMP request originates from a configured collector, the system returns the corresponding configured agent IP in the MIB requests. The system checks to ensure that two entries are not configured for the same collector IP with a different agent IP. Should that happen, the system generates the following error: `%Error: Different agent-addr attempted for an existing collector.`

sflow enable (Global)

Enable sFlow globally.

Syntax `sflow enable`
To disable sFlow, use the `no sflow enable` command.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information sFlow is disabled by default. In addition to this command, you must enable sFlow on individual interfaces where you want sFlow sampling.

Related Commands [sflow enable \(Global\)](#) — enables sFlow on interfaces.

sflow ingress-enable

Enable sFlow ingress on interfaces.

Syntax `sflow ingress-enable`
To disable sFlow, use the `no sflow ingress enable` command.

Defaults Disabled.

Command Modes INTERFACE

Supported Modes Full-Switch Mode

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL switch.

Usage Information When you enable ingress sFlow on an interface, flow sampling is done on any incoming traffic.

NOTE: After a physical port is a member of a LAG, it inherits the sFlow configuration from the LAG port.

Related Commands [sflow enable \(Global\)](#) — turns sFlow globally.

sflow extended-switch enable

Enable packing information on a switch only.

Syntax `sflow extended-switch enable`
To disable packing information, use the `no sflow extended-switch [enable]` command.

Parameters **enable** Enter the keyword `enable` to enable global extended information.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The Dell Networking OS version 7.8.1.0 and later enhances the sflow implementation for real time traffic analysis to provide extended gateway information in cases where the destination IP addresses are learned by different routing protocols and for cases where the destination is reachable over ECMP.

Related Commands `show sflow` — displays the sFlow configuration.

sflow max-header-size extended

Set the maximum header size of a packet to 256 bytes.

Syntax `sflow max-header-size extended`
To reset the maximum header size of a packet, use the `[no] sflow max-header-size extended` command.

Parameters **extended** Enter the keyword `extended` to copy 256 bytes from the sample packets to sFlow datagram.

Defaults **128** bytes

Command Modes CONFIGURATION

INTERFACE

Supported Modes Full-Switch Mode

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the MXL switch.

Example

```
Dell(conf)#sflow max-header-size extended
```

sflow polling-interval (Global)

Set the sFlow polling interval at a global level.

Syntax `sflow polling-interval interval value`
 To return to the default, use the `no sflow polling-interval interval` command.

Parameters

<i>interval value</i>	Enter the interval value in seconds. The range is from 15 to 86400 seconds. The default is 20 seconds .
-----------------------	--

Defaults **20 seconds**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The polling interval for an interface is the maximum number of seconds between successive samples of counters sent to the collector. This command changes the global default counter polling (20 seconds) interval. You can configure an interface to use a different polling interval.

sflow polling-interval (Interface)

Set the sFlow polling interval at an interface (overrides the global-level setting).

Syntax `sflow polling-interval interval value`
 To return to the default, use the `no sflow polling-interval interval` command.

Parameters

<i>interval value</i>	Enter the interval value in seconds. The range is from 15 to 86400 seconds. The default is the global counter polling interval .
-----------------------	---

Defaults The same value as the current global default counter polling interval.

Command Modes INTERFACE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command sets the counter polling interval for an interface.

Related Commands [sflow polling-interval \(Global\)](#) — globally sets the polling interval.

sflow sample-rate (Global)

Change the global default sampling rate.

Syntax `sflow sample-rate value`
To return to the default sampling rate, use the `no sflow sample-rate` command.

Parameters *value* Enter the sampling rate value. The range is from 256 to 8388608 packets. Enter values in powers of 2 only; for example, 4096, 8192, 16384, and so on. The default is **32768 packets**.

Defaults **32768 packets**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Sample-rate is the average number of packets skipped before the sample is taken. This command changes the global default sampling rate. You can configure an interface to use a different sampling rate than the global sampling rate. If the value entered is not a correct power of 2, the command generates an error message with the previous and next power of 2 value. Select one of these two packet numbers and re-enter the command.

Related Commands [sflow sample-rate \(Interface\)](#) — changes the interface sampling rate.

sflow sample-rate (Interface)

Change the interface default sampling rate.

Syntax `sflow sample-rate value`
To return to the default sampling rate, use the `no sflow sample-rate` command.

Parameters *value* Enter the sampling rate value. The range is from 256 to 8388608 packets. Enter values in powers of 2 only; for example, 4096, 8192, and 16384. The default is **the Global default sampling**.

Defaults The Global default sampling.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command changes the sampling rate for an interface. By default, the sampling rate of an interface is set to the same value as the current global default sampling rate. If the value you enter is not a correct power of 2, the command generates an error message with the previous and next power-of-2 value. Select one of these two numbers and re-enter the command.

Related Commands [sflow sample-rate \(Global\)](#) — changes the sampling rate globally.

show sflow

Display the current sFlow configuration.

Syntax `show sflow [interface]`

Parameters

- interface** (OPTIONAL) Enter the following keywords and slot/port or number information:
- For a Loopback interface, enter the keyword `loopback` then a number from 0 to 16383.
 - For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The dropEvent counter (sFlow samples dropped due to sub-sampling) shown in the following example always displays a value of zero.

Example

```
Dell#show sflow
sFlow services are enabled
Egress Mangement Interface sFlow services are disabled
Global default sampling rate: 2048
Global default counter polling interval: 20
Global extended information enabled: none
0 collectors configured
0 UDP packets exported
0 UDP packets dropped
0 sFlow samples collected

stack-unit 0 Port set 0
  Te 0/1: configured rate 256, actual rate 256
Dell#
Dell#show running-config sflow
!
```

```
sflow enable
sflow sample-rate 2048
Dell#show running-config interface tengigabitethernet 0/1
!
interface TenGigabitEthernet 0/1
no ip address
sflow enable
sflow sample-rate 256
no shutdown
```

show sflow stack-unit

Display the sFlow information on a stack unit.

Syntax `show sflow stack-unit {unit number}`

Parameters

<i>unit number</i>	(OPTIONAL) Enter a unit number to view information on the stack unit in that slot. The range is from 0 to 5.
--------------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The dropEvent counter (sFlow samples dropped due to sub-sampling) shown in the following example below always displays a value of zero.

Example

```
Dell#show sflow stack-unit 1
Stack-Unit 1
  Samples rcvd from h/w      :0
  Total UDP packets exported :0
UDP packets dropped         :0
Dell#
```

Service Provider Bridging

Service provider bridging is composed of virtual local area network (VLAN) Stacking, Layer 2 Protocol Tunneling, and Provider Backbone Bridging as described in the *Dell Networking OS Configuration Guide*.

This chapter includes commands for the Dell Networking operating software Layer 2 Protocol Tunneling (L2PT). L2PT enables protocols to tunnel through an 802.1q tunnel.

For more information, see [VLAN Stacking](#), [Spanning Tree Protocol \(STP\)](#), and [GARP VLAN Registration \(GVRP\)](#).

Important Points to Remember

- L2PT is enabled at the interface VLAN-Stack VLAN level. For more information about Stackable VLAN (VLAN-Stacking) commands, see [VLAN Stacking](#).
- The default behavior is to disable protocol packet tunneling through the 802.1q tunnel.
- Rate-limiting is required to protect against bridge protocol data units (BPDU) attacks.
- A port channel (including through link aggregation control protocol [LACP]) can be configured as a VLAN-Stack access or trunk port.
- Address resolution protocol (ARP) packets work as expected across the tunnel.
- Far-end failure detection (FEFD) works the same as with Layer 2 links.
- Protocols that use Multicast MAC addresses (for example, open shortest path first [OSPF]) work as expected and carry over to the other end of the VLAN-Stack VLAN.

Topics:

- [debug protocol-tunnel](#)
- [protocol-tunnel](#)
- [protocol-tunnel destination-mac](#)
- [protocol-tunnel enable](#)
- [protocol-tunnel rate-limit](#)
- [show protocol-tunnel](#)

debug protocol-tunnel

Enable debugging to ensure incoming packets are received and rewritten to a new MAC address.

Syntax `debug protocol-tunnel interface {in | out | both} [vlan vlan-id] [count value]`
 To disable debugging, use the `no debug protocol-tunnel interface {in | out | both} [vlan vlan-id] [count value]` command.

Parameters

interface

Enter one of the following interfaces and slot/port information:

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

in out both	Enter the keyword <code>in</code> , <code>out</code> , or <code>both</code> to debug incoming interfaces, outgoing interfaces, or both incoming and outgoing interfaces.
vlan <i>vlan-id</i>	Enter the keyword <code>vlan</code> then the VLAN ID. The range is from 1 to 4094.
count <i>value</i>	Enter the keyword <code>count</code> then the number of debug outputs. The range is from 1 to 100.

Defaults	Debug disabled.
Command Modes	EXEC Privilege
Supported Modes	Full-Switch Mode
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

protocol-tunnel

Enable protocol tunneling on a stacked (Q-in-Q) VLAN for specified protocol packets.

Syntax	<code>protocol-tunnel {rate-limit <i>rate</i> stp}</code> To disable protocol tunneling for a Layer 2 protocol, use the <code>no protocol-tunnel</code> command.
---------------	---

Parameters	
rate-limit <i>rate</i>	Enter the keyword <code>rate-limit</code> then a number for the rate-limit for tunneled packets on the VLAN. The range is from 64 to 320.
stp	Enter the keyword <code>stp</code> to enable protocol tunneling on a spanning tree, including STP, MSTP, RSTP, and PVST.

Defaults	none
Command Modes	CONF-IF-VLAN
Supported Modes	Full-Switch Mode
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#conf
Dell(conf)#interface vlan 2
Dell(conf-if-vl-2)#vlan-stack compatible
Dell(conf-if-vl-2)#member Te1/2-3
Dell(conf-if-vl-2)#protocol-tunnel stp
Dell(conf-if-vl-2)#protocol-tunnel enable
```

Related Command [show protocol-tunnel](#) — displays tunneling information for all VLANs.

protocol-tunnel destination-mac

Overwrite the BPDU destination MAC address with a specific value.

Syntax	<code>protocol-tunnel destination-mac xstp address</code>	
Parameters	stp	Change the default destination MAC address used for L2PT to another value.
Defaults	The default destination MAC is 01:01:e8:00:00:00.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	When you enable VLAN-Stacking, no protocol packets are tunneled.	
Related Command	show protocol-tunnel — displays tunneling information for all VLANs.	

protocol-tunnel enable

Enable protocol tunneling globally on the system.

Syntax	<code>protocol-tunnel enable</code> To disable protocol tunneling, use the <code>no protocol-tunnel enable</code> command.	
Defaults	Disabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	The system must have the default CAM profile with the default microcode before you enable L2PT.	

protocol-tunnel rate-limit

Enable traffic rate limiting per box.

Syntax	<code>protocol-tunnel rate-limit rate</code> To reset the rate limit to the default, use the <code>no protocol-tunnel rate-limit rate</code> command.	
---------------	--	--

Parameters *rate* Enter the rate in frames per second. The range is from 75 to 3000. The default is **75**.

Defaults **75** frames per second.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#
Dell#conf
Dell (conf)#protocol-tunnel rate-limit 1000
Dell (conf)#
```

Related Commands [show protocol-tunnel](#) — displays tunneling information for all VLANs.

[show running-config](#) — displays the current configuration.

show protocol-tunnel

Display protocol tunnel information for all or a specified VLAN-Stack VLAN.

Syntax show protocol-tunnel [vlan *vlan-id*]

Parameters

vlan *vlan-id* (OPTIONAL) Enter the keyword `vlan` then the VLAN ID to display information for the one VLAN. The range is from 1 to 4094.

Defaults none

Command Modes EXEC

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show protocol-tunnel
System Rate-Limit: 75 frames/second
VLAN  Protocols  Interface
1000  STP, PVST    Te 5/7, Te 5/6
1001  LLDP, GVRP   Te 5/7, Te 5/6
1002  MMRP, MVRP   Te 5/7, Te 5/6
1003  LACP, DOT1X  Te 5/7, Te 5/6
1004  OAM, PAUSE   Te 5/7, Te 5/6
1005  E-LMI        Te 5/7, Te 5/6
```

Example (Specific VLAN)

```
Dell#show protocol-tunnel vlan 2
System Rate-Limit: 1000 Frames/second
Interface  Vlan  Protocol(s)
```

```
Te1/2      2      STP, PVST
Dell#
```

Related Commands [show running-config](#) — displays the current configuration.

Simple Network Management Protocol (SNMP) and Syslog

This chapter contains commands to configure and monitor the simple network management protocol (SNMP) v1/v2/v3 and Syslog.

The chapter contains the following sections:

- [SNMP Commands](#)
- [Syslog Commands](#)

Topics:

- [SNMP Commands](#)
- [clear logging auditlog](#)
- [show snmp](#)
- [show snmp engineID](#)
- [show snmp group](#)
- [show snmp user](#)
- [snmp context](#)
- [snmp ifmib ifalias long](#)
- [snmp-server community](#)
- [snmp-server contact](#)
- [snmp-server enable traps](#)
- [snmp-server engineID](#)
- [snmp-server group](#)
- [snmp-server host](#)
- [snmp-server location](#)
- [snmp-server packetsize](#)
- [snmp-server trap-source](#)
- [snmp-server user](#)
- [snmp-server user \(for AES128-CFB Encryption\)](#)
- [snmp-server view](#)
- [snmp trap link-status](#)
- [Syslog Commands](#)
- [clear logging](#)
- [default logging buffered](#)
- [default logging console](#)
- [logging extended](#)
- [default logging monitor](#)
- [default logging trap](#)
- [logging](#)
- [logging buffered](#)

- logging console
- logging facility
- logging history
- logging history size
- logging monitor
- logging on
- logging source-interface
- logging synchronous
- logging trap
- logging version
- show logging
- show logging driverlog stack-unit
- show logging auditlog
- terminal monitor

SNMP Commands

The following SNMP commands are available in the Dell Networking OS.

The simple network management protocol (SNMP) is used to communicate management information between the network management stations and the agents in the network elements. The system supports SNMP versions 1, 2c, and 3, supporting both read-only and read-write modes. The system sends SNMP traps, which are messages informing an SNMP management system about the network. The system supports up to 16 SNMP trap receivers.

NOTE: The system does not support SNMPv3 traps in PMUX mode.

Important Points to Remember

- Typically, 5-second timeout and 3-second retry values on an SNMP server are sufficient for both local area network (LAN) and wide area network (WAN) applications. If you experience a timeout with these values, the recommended best practice on Dell Networking switches (to accommodate their high port density) is to increase the timeout and retry values on your SNMP server to the following:
 - SNMP Timeout — greater than 3 seconds.
 - SNMP Retry count — greater than 2 seconds.
- If you are using access control lists (ACLs) in an SNMP v3 configuration, group ACL overrides user ACL if the user is part of that group.
- SNMP operations are not supported on a virtual local area network (VLAN).

clear logging auditlog

Clears audit log.

Syntax `clear logging auditlog`

Defaults none

Command Modes EXEC

Supported Modes Full-Switch Mode

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced on the MXL.

Example `Dell(conf)#clear logging auditlog`

Related Commands [show logging auditlog](#) — displays audit log

show snmp

Display the status of SNMP network elements.

Syntax `show snmp`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show snmp
 32685 SNMP packets input
   0 Bad SNMP version errors
   0 Unknown community name
   0 Illegal operation for community name supplied
   0 Encoding errors
 96988 Number of requested variables
   0 Number of altered variables
 31681 Get-request PDUs
   968 Get-next PDUs
   0 Set-request PDUs
 61727 SNMP packets output
   0 Too big errors (Maximum packet size 1500)
   9 No such name errors
   0 Bad values errors
   0 General errors
 32649 Response PDUs
 29078 Trap PDUs
Dell#
```

Related Commands [snmp-server community](#) — enables the SNMP and set community string.

show snmp engineID

Display the identification of the local SNMP engine and all remote engines that are configured on the router.

Syntax `show snmp engineID`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show snmp engineID
Local SNMP engineID: 0000178B02000001E80214A8
Remote Engine ID      IP-addr      Port
80001F88043132333435  172.31.1.3   5009
80001F88043938373635  172.31.1.3   5008
Dell#
```

Related Commands [snmp-server engineID](#) — configures local and remote SNMP engines on the router.

show snmp group

Display the group name, security model, status, and storage type of each group.

Syntax

```
show snmp group
```

Command Modes

- EXEC
- EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following Example displays a group named *ngroup*. The *ngroup* has a security model of version 3 (v3) with authentication (*auth*), the read and notify name is *nview* with no write view name specified, and finally the row status is active.

Example

```
Dell#show snmp group
groupname: ngroup          security model: v3 auth
readview : nview          writeview: no write view specified
notifyview: nview
row status: active
Dell#
```

Related Commands [snmp-server group](#) — configures an SNMP server group.

show snmp user

Display the information configured on each SNMP user name.

Syntax `show snmp user`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show snmp user
  User name: vlv2creadu
  Engine ID: 0000178B02000001E80214A8
  storage-type: nonvolatile      active
  Authentication Protocol: None
  Privacy Protocol: None
Dell#
```

snmp context

Enables you to map a bgp vrf instance within a SNMP context through community mapping, in SNMPv2c and SNMPv3.

Syntax `[no] snmp context [context name]`

Parameters

context name Enter a unique name for the context.

Defaults None

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.13(0.0)	Introduced on all DNOS platforms.

Usage Information This command is used for mapping SNMP context to a VRF instance within a community, in SNMPv2c and SNMPv3. The no version of this command turns off this feature.

snmp ifmib ifalias long

Display the entire description string through the Interface MIB, which would be truncated otherwise to 63 characters.

Syntax	<code>snmp ifmib ifalias long</code>
Defaults	Interface description truncated beyond 63 characters.
Command Modes	CONFIGURATION
Supported Modes	Full-Switch Mode
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
!----command run on host connected to switch:-----!
> snmpwalk -c public 10.10.10.130 .1.3.6.1.2.1.31 | grep -i alias | more
IF-MIB::ifAlias.134530304 = STRING: This is a port connected to Router2. This
is a
port connected to
IF-MIB::ifAlias.134792448 = STRING:

!----command run on Force10 switch:-----!
Dell#snmp ifmib ifalias long

!----command run on server connected to switch:-----!
> snmpwalk -c public 10.10.10.130 .1.3.6.1.2.1.31 | grep -i alias | more
IF-MIB::ifAlias.134530304 = STRING: This is a port connected to Router2. This
is a
port connected to Router2. This is a port connected to Router2. This is a port
connected to Router2. This is a port connected to Router2.
IF-MIB::ifAlias.134792448 = STRING:
```

snmp-server community

Configure a new community string access for SNMPv1 v2 and v3.

Syntax	<code>snmp-server community <i>community-name</i> {ro rw} [<i>security-name name</i>][<i>access-list-name</i>]</code> To remove access to a community, use the <code>no snmp-server community <i>community-string</i> {ro rw} [<i>security-name name</i> [<i>access-list-name</i>]</code> command.
---------------	---

Parameters

<i>community-name</i>	Enter a text string (up to 20 characters long) to act as a password for SNMP.
ro	Enter the keyword <code>ro</code> to specify read-only permission.
rw	Enter the keyword <code>rw</code> to specify read-write permission.
<i>security-name name</i>	(Optional) Enter the keywords <code>security-name</code> then the security name as defined by the community MIB.
<i>access-list-name</i>	(Optional) Enter a standard IPv4 access list name (a string up to 16 characters long).

Defaults	none
-----------------	------

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following example configures a community named *public* that is mapped to the security named *guestuser* with Read Only (*ro*) permissions.

The *security-name* parameter maps the community string to an SNMPv3 user/security name as defined by the community MIB.

If a community string is configured without a *security-name* (for example, `snmp-server community public ro`), the community is mapped to a default security-name/group:

- `v1v2creadu / v1v2creadg` — maps to a community with *ro* (read-only) permissions.
- `v1v2cwriteu/ v1v2cwriteg` — maps to a community with *rw* (read-write) permissions.

The *community-name* parameter indexes this command.

If you do not configure the `snmp-server community` command, you cannot query SNMP data. Only Standard IPv4 ACL and IPv6 ACL is supported in the optional *access-list-name*.

The command options *ipv6*, *security-name*, and *access-list-name* are recursive. In other words, each option can, in turn, accept any of the three options as a sub-option, and each of those sub-options can accept any of the three sub-options as a sub-option, and so forth. The second Example shows the creation of a standard IPv4 ACL called *snmp-ro-acl* and then assigning it to the SNMP community *guest*.

NOTE: For IPv6 ACLs, only IPv6 and UDP types are valid for SNMP; TCP and ICMP rules are not valid for SNMP. In IPv6 ACLs, port rules are not valid for SNMP.

Example

```
Dell#config
Dell(conf)# snmp-server community public ro
Dell(conf)# snmp-server community guest ro security-name guestuser
Dell(conf)#
```

Example

```
Dell(conf)# ip access-list standard snmp-ro-acl
Dell(config-std-nacl)#seq 5 permit host 10.10.10.224
Dell(config-std-nacl)#seq 10 deny any count
!
Dell(conf)#snmp-server community guest ro snmp-ro-acl
Dell(conf)#
```

Related Commands

[ip access-list standard](#) — names (or selects) a standard access list to filter based on IP address.

[show running-config](#) — displays the current SNMP configuration and defaults.

snmp-server contact

Configure contact information for troubleshooting this SNMP node.

Syntax `snmp-server contact text`
To delete the SNMP server contact information, use the `no snmp-server contact` command.

Parameters **text** Enter an alphanumeric text string, up to 55 characters long.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

snmp-server enable traps

Enable SNMP traps.

Syntax `snmp-server enable traps [notification-type] [notification-option]`
To disable traps, use the `no snmp-server enable traps [notification-type] [notification-option]` command.

Parameters **notification-type** Enter the type of notification from the following list:

- `ecfm` — Notification of changes to ECFM.
- `entity` — Notification of changes to entity.
- `envmon` — For Dell Networking device notifications when an environmental threshold is exceeded.
- `eoam` — Notification of changes to the EOAM state.
- `ets` — Notification of changes to the ets traps.
- `fips` — Notification of changes to the FIP snooping state.
- `lacp` — Notification of changes.
- `pfc` — Notification of changes to pfc traps.
- `snmp` — Notification of RFC 1157 traps.
- `stp` — Notification of a state change in the spanning tree protocol (RFC 1493).
- `vrrp` — Notification of a state change in a VRRP group.
- `xstp` — Notification of a state change in MSTP (802.1s), RSTP (802.1w), and PVST+.

notification-option For the `envmon` notification-type, enter one of the following optional parameters:

- temperature

For the `snmp notification-type`, enter one of the following optional parameters:

- authentication
- coldstart
- linkdown
- linkup
- syslog-reachable
- syslog-unreachable

Defaults	Not enabled.
Command Modes	CONFIGURATION
Supported Modes	Full-Switch Mode
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Added the following two SNMP notification options: <code>syslog-reachable</code> and <code>syslog-unreachable</code> .
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The system supports up to 16 SNMP trap receivers.

If you do not configure this command, no traps controlled by this command are sent. If you do not specify a `notification-type` and `notification-option`, all traps are enabled.

Related Commands [snmp-server community](#) — enables SNMP and sets the community string.

snmp-server engineID

Configure the name for both the local and remote SNMP engines on the router.

Syntax `snmp-server engineID [local engineID] [remote ip-address udp-port port-number engineID]`

To return to the default, use the `no snmp-server engineID [local engineID] [remote ip-address udp-port port-number engineID]` command.

Parameters	
local engineID	Enter the keyword <code>local</code> then the engine ID number that identifies the copy of the SNMP on the local device.
	Format (as specified in RFC 3411): 12 octets.
	<ul style="list-style-type: none"> • The first four octets are set to the private enterprise number. • The remaining eight octets are the MAC address of the chassis.
remote ip-address	Enter the keyword <code>remote</code> then the IP address that identifies the copy of the SNMP on the remote device.

	udp-port port-number engineID	Enter the keywords <code>udp-port</code> then the user datagram protocol (UDP) port number on the remote device. The range is from 0 to 65535. The default is 162 .
Defaults	As above.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	<p>Changing the value of the SNMP Engine ID has important side effects. A user's password (entered on the command line) is converted to a message digest algorithm (MD5) or secure hash algorithm (SHA) security digest. This digest is based on both the password and the local Engine ID. The command line password is then destroyed, as required by RFC 2274. Because of this deletion, if the local value of the Engine ID changes, the security digests of SNMPv3 users is invalid and you must reconfigure the users.</p> <p>For the remote Engine ID, the host IP and UDP port are the indexes to the command that are matched to either overwrite or remove the configuration.</p>	
Related Commands	<p><code>show snmp engineID</code> — displays the SNMP engine and all the remote engines that are configured on the router.</p> <p><code>show running-config</code> — displays the SNMP running configuration.</p>	

snmp-server group

Configure a new SNMP group or a table that maps SNMP users to SNMP views.

Syntax

```
snmp-server group [group_name {1 | 2c | 3 {auth | noauth | priv}}] [read name]
[write name] [notify name] [ access-list-name | access-list-name]
```

To remove a specified group, use the `no snmp-server group [group_name {v1 | v2c | v3 {auth | noauth | priv}}] [read name] [write name] [notify name] [access-list-name | access-list-name]` command.

Parameters

group_name Enter a text string (up to 20 characters long) as the name of the group. The following groups are created for mapping to read/write community/security-names (defaults):

- `v1v2creadg` — maps to a community/security-name with `ro` permissions.
- `1v2cwriteg` — maps to a community/security-name `rw` permissions.

1 | 2c | 3

(OPTIONAL) Enter the security model version number (1, 2c, or 3):

- 1 is the least secure version.
- 3 is the most secure of the security modes.
- 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed.

The default is **1**.

auth	(OPTIONAL) Enter the keyword <code>auth</code> to specify authentication of a packet without encryption.
noauth	(OPTIONAL) Enter the keyword <code>noauth</code> to specify no authentication of a packet.
priv	(OPTIONAL) Enter the keyword <code>priv</code> to specify both authentication and then scrambling of the packet.
read name	(OPTIONAL) Enter the keyword <code>read</code> then a name (a string of up to 20 characters long) as the read view name. The default is GlobalView and is assumed to be every object belonging to the internet (1.3.6.1) OID space.
write name	(OPTIONAL) Enter the keyword <code>write</code> then a name (a string of up to 20 characters long) as the write view name.
notify name	(OPTIONAL) Enter the keyword <code>notify</code> then a name (a string of up to 20 characters long) as the notify view name.
access-list-name	(Optional) Enter the standard IPv4 access list name (a string up to 16 characters long).

Defaults As above.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following Example specifies the group named *harig* as a version 3 user requiring both authentication and encryption and read access limited to the read named *rview*.

 **NOTE: The number of configurable groups is limited to 16 groups.**

Example

```
Dell#conf
Dell(conf)# snmp-server group harig 3 priv read rview
Dell#
```

Related Commands [show snmp group](#) — displays the group name, security model, view status, and storage type of each group.

[show running-config](#) — displays the SNMP running configuration.

snmp-server host

Configure the recipient of an SNMP trap operation.

Syntax

```
snmp-server host ip-address [traps | informs] [version 1 | 2c | 3] [auth | noauth | priv] [community-string] [udp-port port-number] [notification-type]
```

To remove the SNMP host, use the `no snmp-server host ip-address [traps | informs] [version 1 | 2c | 3] [auth | noauth | priv] [community-string] [udp-port number] [notification-type]` command.

Parameters

<i>ip-address</i>	Enter the keyword <code>host</code> then the IP address of the host (configurable hosts is limited to 16).
<i>traps</i>	(OPTIONAL) Enter the keyword <code>traps</code> to send trap notifications to the specified host. The default is traps .
<i>informs</i>	(OPTIONAL) Enter the keyword <code>informs</code> to send inform notifications to the specified host. The default is traps .
<i>version 1 2c 3</i>	(OPTIONAL) Enter the keyword <code>version</code> to specify the security model then the security model version number 1, 2c, or 3: <ul style="list-style-type: none">• Version 1 is the least secure version.• Version 3 is the most secure of the security modes.• Version 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed. The default is version 1 .
<i>auth</i>	(OPTIONAL) Enter the keyword <code>auth</code> to specify authentication of a packet without encryption.
<i>noauth</i>	(OPTIONAL) Enter the keyword <code>noauth</code> to specify no authentication of a packet.
<i>priv</i>	(OPTIONAL) Enter the keyword <code>priv</code> to specify both authentication and then scrambling of the packet.
<i>community-string</i>	Enter a text string (up to 20 characters long) as the name of the SNMP community. NOTE: For version 1 and version 2c security models, this string represents the name of the SNMP community. The string can be set using this command; however, Dell Networking OS recommends setting the community string using the <code>snmp-server community</code> command before executing this command. For version 3 security model, this string is the USM user security name.
<i>udp-port port-number</i>	(OPTIONAL) Enter the keywords <code>udp-port</code> then the port number of the remote host to use. The range is from 0 to 65535. The default is 162 .
<i>notification-type</i>	(OPTIONAL) Enter one of the following keywords for the type of trap to send to the host: <ul style="list-style-type: none">• <code>ecfm</code> — Notification of ECFM state changes.• <code>entity</code> — Notification of entity changes.• <code>envmon</code> — Environment monitor trap.• <code>eoam</code> — Notification of EOAM state changes.• <code>ets</code> — Notification of ets trap changes.• <code>fips</code> — Notification of FIP snooping state changes.• <code>lACP</code> — Notification of LACP state changes.• <code>snmp</code> — SNMP notification (RFC 1157).• <code>stp</code> — Spanning tree protocol notification (RFC 1493).• <code>vrrp</code> — State change in a VRRP group.• <code>xstp</code> — State change in MSTP (802.1s), RSTP (802.1w), and PVST+. The default is all trap types are sent to host.

Defaults	As above.
Command Modes	CONFIGURATION
Supported Modes	Full-Switch Mode
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

In order to configure the router to send SNMP notifications, enter at least one `snmp-server host` command. If you enter the command with no keywords, all trap types are enabled for the host. If you do not enter an `snmp-server host` command, no notifications are sent.

In order to enable multiple hosts, issue a separate `snmp-server host` command for each host. You can specify multiple notification types in the command for each host.

When multiple `snmp-server host` commands are given for the same host and type of notification (trap or inform), each succeeding command overwrites the previous command. Only the last `snmp-server host` command is in effect. For example, if you enter an `snmp-server host inform` command for a host and then enter another `snmp-server host inform` command for the same host, the second command replaces the first command.

The `snmp-server host` command is used with the `snmp-server enable` command. Use the `snmp-server enable` command to specify which SNMP notifications are sent globally. For a host to receive most notifications, at least one `snmp-server enable` command and the `snmp-server host` command for that host must be enabled.

NOTE: For v1 / v2c trap configuration, if the community-string is not defined using the `snmp-server community` command prior to using this command, the default form of the `snmp-server community` command automatically is configured with the community-name the same as specified in the `snmp-server host` command.

Configuring Informs

To send an inform, use the following steps:

- 1 Configure a remote engine ID.
- 2 Configure a remote user.
- 3 Configure a group for this user with access rights.
- 4 Enable traps.
- 5 Configure a host to receive informs.

Related Commands

`snmp-server enable traps` — enables SNMP traps.

`snmp-server community` — configures a new community SNMPv1 or SNMPv2c.

snmp-server location

Configure the location of the SNMP server.

Syntax `snmp-server location text`

To delete the SNMP location, use the `no snmp-server location` command.

Parameters	text	Enter an alpha-numeric text string, up to 55 characters long.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

snmp-server packetsize

Set the largest SNMP packet size permitted. When the SNMP server is receiving a request or generating a reply, use the `snmp-server packetsize global configuration` command.

Syntax	<code>snmp-server packetsize byte-count</code>	
Parameters	byte-count	Enter one of the following values 8, 16, 24 or 32. Packet sizes are 8000 bytes, 16000 bytes, 32000 bytes, and 64000 bytes.
Defaults	8	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

snmp-server trap-source

Configure a specific interface as the source for SNMP traffic.

Syntax	<code>snmp-server trap-source interface</code>	
	To disable sending traps out a specific interface, use the <code>no snmp trap-source</code> command.	

Parameters	interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">• For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383.• For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
-------------------	------------------	---

Defaults	The IP address assigned to the management interface is the default.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	To enable this <code>snmp-server trap-source</code> command, configure an IP address on the interface and enable the interface configured as an SNMP trap source.	
Related Commands	<code>snmp-server community</code> — sets the community string.	

snmp-server user

Configure a new user to an SNMP group.

Syntax

```
snmp-server user name {group_name remote ip-address udp-port port-number} [1 | 2c | 3] [encrypted] [auth {md5 | sha} auth-password] [priv des56 | aes128-cfb] priv-password [access access-list-name | ipv6 access-list-name | access-list-name ipv6 access-list-name]
```

To remove a user from the SNMP group, use the `no snmp-server user name {group_name remote ip-address udp-port port-number} [1 | 2c | 3] [encrypted] [auth {md5 | sha} auth-password] [priv des56 | aes128-cfb] priv password [access access-list-name | ipv6 access-list-name]` command.

Parameters

<i>name</i>	Enter the name of the user (not to exceed 20 characters), on the host that connects to the agent.
<i>group_name</i>	Enter a text string (up to 20 characters long) as the name of the group. The following groups are created for mapping to read/write community/security-names (defaults): <ul style="list-style-type: none"> • <code>v1v2creadu</code> — maps to a community with <code>ro</code> permissions. • <code>1v2cwriteu</code> — maps to a community <code>rw</code> permissions.
<i>remote ip-address</i>	Enter the keywords <code>udp-port</code> then the user datagram protocol (UDP) port number on the remote device. The range is from 0 to 65535. The default is 162 .
<i>udp-port port-number</i>	Enter the keywords <code>udp-port</code> then the UDP (User Datagram Protocol) port number on the remote device. The range is from 0 to 65535. The default is 162 .
1 2c 3	(OPTIONAL) Enter the security model version number (1, 2c, or 3): <ul style="list-style-type: none"> • 1 is the least secure version. • 3 is the most secure of the security modes. • 2c allows transmission of informs and counter 64, which allows for integers twice the width of what is normally allowed. <p>The default is 1.</p>

encrypted	(OPTIONAL) Enter the keyword <code>encrypted</code> to specify the password appear in encrypted format (a series of digits, masking the true characters of the string).
auth	(OPTIONAL) Enter the keyword <code>auth</code> to specify authentication of a packet without encryption.
md5 sha	(OPTIONAL) Enter the keyword <code>md5</code> or <code>sha</code> to designate the authentication level. <ul style="list-style-type: none"> <code>md5</code> — Message Digest Algorithm <code>sha</code> — Secure Hash Algorithm
auth-password	(OPTIONAL) Enter a text string (up to 20 characters long) password that enables the agent to receive packets from the host and to send packets to the host. Minimum: eight characters long.
priv des56	(OPTIONAL) Enter the keywords <code>priv des56</code> to initiate a privacy authentication level setting using the CBC-DES privacy authentication algorithm (des56).
aes128	(OPTIONAL) Enter the keyword <code>aes128</code> to initiate the AES128-CFB encryption algorithm for transmission of SNMP packets.
priv password	(OPTIONAL) Enter a text string (up to 20 characters long) password that enables the host to encrypt the contents of the message it sends to the agent and decrypt the contents of the message it receives from the agent. Minimum: eight characters long.
access-list-name	(Optional) Enter the standard IPv4 access list name (a string up to 16 characters long).

Defaults If no authentication or privacy option is configured, then the messages are exchanged (attempted anyway) without any authentication or encryption.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Added support for the AES128-CFB encryption algorithm on the MXL 10/40GbE Switch IO Module platform.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information No default values exist for authentication or privacy algorithms and no default password exists. If you forget a password, you cannot recover it; the user must be reconfigured. You can specify either a plain-text password or an encrypted cypher-text password. In either case, the password is stored in the configuration in an encrypted form and displayed as encrypted in the `show running-config` command.

If you have an encrypted password, you can specify the encrypted string instead of the plain-text password. The following command is an Example of how to specify the command with an encrypted string.

 **NOTE: The number of configurable users is limited to 16.**

Example

```
Dell# snmp-server user privuser v3group v3 encrypted auth md5
9fc53d9d908118b2804fe80e3ba8763d priv des56 d0452401a8c3ce42804fe80e3ba8763d
```

Usage Information

The following command is an example of how to enter a plain-text password as the string `authpasswd` for user `authuser` of group `v3group`.

Example	<pre>Dell#conf Dell (conf)# snmp-server user authuser v3group v3 auth md5 authpasswd</pre>
Usage Information	The following command configures a remote user named <i>n3user</i> with a <i>v3</i> security model and a security level of <i>authNOPriv</i> .
Example	<pre>Dell#conf Dell (conf)# snmp-server user n3user ngroup remote 172.31.1.3 udp-port 5009 3 auth md5 authpasswd</pre>
Related Commands	show snmp user — displays the information configured on each SNMP user name.

snmp-server user (for AES128-CFB Encryption)

Specify that AES128-CFB encryption algorithm needs to be used for transmission of SNMP information. The Advanced Encryption Standard (AES) Cipher Feedback (CFB) 128-bit encryption algorithm is in compliance with RFC 3826. RFCs for SNMPv3 define two authentication hash algorithms, namely, HMAC-MD5-96 and HMAC-SHA1-96. These are the full forms or editions of the truncated versions, namely, HMAC-MD5 and HMAC-SHA1 authentication algorithms.

Syntax	<pre>snmp-server user name {group_name remote ip-address udp-port port-number} [1 2c 3] [encrypted] [auth {md5 sha} auth-password] [priv {des56 aes128-cfb} priv-password] [access access-list-name ipv6 access-list-name access-list-name ipv6 access-list-name]</pre> <p>To remove a user from the SNMP group, use the <code>no snmp-server user name {group_name remote ip-address udp-port port-number} [1 2c 3] [encrypted] [auth {md5 sha} auth-password] [priv {des56 aes128-cfb} priv-password] [access access-list-name ipv6 access-list-name access-list-name ipv6 access-list-name]</code> command.</p>
---------------	--

Parameters	<p><i>auth-password</i> (OPTIONAL) Enter a text string (up to 20 characters long) password that enables the agent to receive packets from the host and to send packets to the host. Minimum: eight characters long.</p> <p><i>aes128</i> (OPTIONAL) Enter the keyword <code>aes128</code> to initiate the AES128-CFB encryption algorithm for transmission of SNMP packets.</p> <p><i>priv-password</i> (OPTIONAL) Enter a text string (up to 20 characters long) password that enables the host to encrypt the contents of the message it sends to the agent and to decrypt the contents of the message it receives from the agent. Minimum: eight characters long.</p>
-------------------	---

Defaults If no authentication or privacy option is configured, then the messages are exchanged (attempted anyway) without any authentication or encryption.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.3(0.0)</td> <td>Added support for the AES128-CFB encryption algorithm on the MXL 10/40GbE Switch IO Module platform</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.3(0.0)	Added support for the AES128-CFB encryption algorithm on the MXL 10/40GbE Switch IO Module platform	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description								
9.9(0.0)	Introduced on the FN IOM.								
9.3(0.0)	Added support for the AES128-CFB encryption algorithm on the MXL 10/40GbE Switch IO Module platform								
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.								

Usage Information To enable robust, effective protection and security for SNMP packets transferred between the server and the client, you can use the `snmp-server user username group groupname 3 auth authentication-type auth-password priv aes128 priv-password` to specify that AES128-CFB encryption algorithm needs to be used.

You cannot modify the FIPS mode if SNMPv3 users are already configured and present in the system. An error message is displayed if you attempt to change the FIPS mode by using the `fips mode enable` command in Global Configuration mode. You can enable or disable FIPS mode only if SNMPv3 users are not previously set up. Otherwise, you must remove the previously configured users before you change the FIPS mode.

Example

```
Dell# snmp-server user privuser v3group v3 encrypted auth md5
9fc53d9d908118b2804fe80e3ba8763d priv aes128 d0452401a8c3ce42804fe80e3ba8763d
```

Related Commands [show snmp user](#) — Displays the information configured on each SNMP user name.

snmp-server view

Configure an SNMPv3 view.

Syntax `snmp-server view view-name oid-tree {included | excluded}`
To remove an SNMPv3 view, use the `no snmp-server view view-name oid-tree {included | excluded}` command.

Parameters

- view-name** Enter the name of the view (not to exceed 20 characters).
- oid-tree** Enter the OID sub tree for the view (not to exceed 20 characters).
- included** (OPTIONAL) Enter the keyword `included` to include the MIB family in the view.
- excluded** (OPTIONAL) Enter the keyword `excluded` to exclude the MIB family in the view.

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `oid-tree` variable is a full sub-tree starting from 1.3.6 and cannot specify the name of a sub-tree or a MIB. The following Example configures a view named `rview` that allows access to all objects under 1.3.6.1.

Example

```
Dell#(conf) snmp-server view rview 1.3.6.1 included
```

Related Commands [show running-config](#) — displays the SNMP running configuration.

snmp trap link-status

Enable the interface to send SNMP link traps, which indicate whether the interface is up or down.

Syntax `snmp trap link-status`
To disable sending link trap messages, use the `no snmp trap link-status` command.

Defaults Enabled.

Command Modes INTERFACE

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If the interface is expected to flap during normal usage, you could disable this command.

Syslog Commands

The following commands allow you to configure logging functions on all Dell Networking switches.

clear logging

Clear the messages in the logging buffer.

Syntax `clear logging`

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show logging](#) — displays logging settings and system messages in the internal buffer.

default logging buffered

Return to the default setting for messages logged to the internal buffer.

Syntax `default logging buffered`

Defaults **size = 40960; level = 7 or debugging**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [default logging buffered](#) — sets the logging buffered parameters.

default logging console

Return the default settings for messages logged to the console.

Syntax `default logging console`

Defaults **level = 7 or debugging**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging console](#) — sets the logging console parameters.

logging extended

Logs security and audit events to a system log server.

Syntax `logging extended`

Defaults none

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced on the MXL.

Usage Information

This command is available with or without RBAC enabled. When RBAC is enabled you can restrict access to audit and security logs based on the CLI sessions' user roles. If extended logging is disabled, you can only view system events, regardless of RBAC user role.

When you enabled RBAC and extended logging:

- Only the system administrator role can execute this command.
- The system administrator and system security administrator roles can view security events and system events.
- The system administrator role can view audit, security, and system events.
- The network administrator and network operator roles can view system events.

Examples

```
Dell (conf) #logging extended
```

Related Commands [show logging auditlog](#) — displays audit log, [clear logging auditlog](#) — clears audit log

default logging monitor

Return to the default settings for messages logged to the terminal.

Syntax `default logging monitor`

Defaults **level = 7 or debugging**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging monitor](#) — sets the logging monitor parameters.

[terminal monitor](#) — sends system messages to the terminal/monitor.

default logging trap

Return to the default settings for logging messages to the Syslog servers.

Syntax `default logging trap`

Defaults **level = 6 or informational**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging trap](#) — limit messages logged to the Syslog servers based on severity.

logging

Configure an IP address or host name of a Syslog server where logging messages are sent. You can configure multiple logging servers of both IPv4 and/or IPv6.

Syntax `logging {ip-address | ipv6-address | hostname} {{udp {port}} | {tcp {port}}}`
To disable logging, use the `no logging` command.

Parameters

ip-address Enter the IPv4 address in dotted decimal format.

ipv6-address Enter the IPv6 address in the x:x:x::X format.

NOTE: The `::` notation specifies successive hexadecimal fields of zeros.

hostname Enter the name of a host already configured and recognized by the switch.

udp Enter the keyword `udp` to enable transmission of log message over UDP followed by port number. The default port is 514

tcp Enter the keyword `tcp` to enable transmission of log message over TCP followed by port number.

Defaults Disabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced udp and tcp keywords on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging on](#) — enables the logging asynchronously to logging buffer, console, Syslog server, and terminal lines.

[logging trap](#) — enables logging to the Syslog server based on severity.

logging buffered

Enable logging and specify which messages are logged to an internal buffer. By default, all messages are logged to the internal buffer.

Syntax `logging buffered [level] [size]`
To return to the default values, use the `default logging buffered` command.

To disable logging stored to an internal buffer, use the `no logging buffered` command.

Parameters

level (OPTIONAL) Indicate a value from 0 to 7 or enter one of the following equivalent words: `emergencies`, `alerts`, `critical`, `errors`, `warnings`, `notifications`, `informational`, or `debugging`. The default is **7** or **debugging**.

size (OPTIONAL) Indicate the size, in bytes, of the logging buffer. The number of messages buffered depends on the size of each message. The range is from 40960 to 524288. The default is **40960 bytes**.

Defaults level = **7**; size = **40960 bytes**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you decrease the buffer size, all messages stored in the buffer are lost. Increasing the buffer size does not affect messages stored in the buffer.

Related Commands [clear logging](#) — clears the logging buffer.

[default logging buffered](#) — returns the logging buffered parameters to the default setting.

[show logging](#) — displays the logging setting and system messages in the internal buffer.

logging console

Specify which messages are logged to the console.

Syntax `logging console [level]`

To return to the default values, use the `default logging console` command.

To disable logging to the console, use the `no logging console` command.

Parameters

level (OPTIONAL) Indicate a value from 0 to 7 or enter one of the following parameters: `emergencies`, `alerts`, `critical`, `errors`, `warnings`, `notifications`, `informational`, or `debugging`. The default is **7** or **debugging**.

Defaults level = **7**; size = **debugging**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [clear logging](#) — clears the logging buffer.

[default logging console](#) — returns the logging console parameters to the default setting.

[show logging](#) — displays the logging setting and system messages in the internal buffer.

logging facility

Configure the Syslog facility used for error messages sent to Syslog servers.

Syntax `logging facility [facility-type]`
To return to the default values, use the `no logging facility` command.

Parameters *facility-type* (OPTIONAL) Enter one of the following parameters:

- `auth` (authorization system)
- `cron` (Cron/at facility)
- `daemon` (system daemons)
- `kern` (kernel)
- `local0` (local use)
- `local1` (local use)
- `local2` (local use)
- `local3` (local use)
- `local4` (local use)
- `local5` (local use)
- `local6` (local use)
- `local7` (local use)
- `lpr` (line printer system)
- `mail` (mail system)
- `news` (USENET news)
- `sys9` (system use)
- `sys10` (system use)
- `sys11` (system use)
- `sys12` (system use)
- `sys13` (system use)
- `sys14` (system use)
- `syslog` (Syslog process)
- `user` (user process)
- `uucp` (Unix to Unix copy process)

The default is **local7**.

Defaults **local7**
Command Modes CONFIGURATION
Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging](#) — enables logging to a Syslog server.

[logging on](#) — enables logging.

logging history

Specify which messages are logged to the history table of the switch and the SNMP network management station (if configured).

Syntax `logging history level`
To return to the default values, use the `no logging history` command.

Parameters

level Indicate a value from 0 to 7 or enter one of the following equivalent words: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. The default is **4** or **warnings**.

Defaults **warnings or 4**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you configure the `snmp-server trap-source` command, the system messages logged to the history table are also sent to the SNMP network management station.

Related Commands [show logging](#) — displays information logged to the history buffer.

logging history size

Specify the number of messages stored in the system logging history table.

Syntax `logging history size size`
To return to the default values, use the `no logging history size` command.

Parameters

size Indicate a value as the number of messages to be stored. The range is from 0 to 500. The default is **1 message**.

Defaults **1 message**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When the number of messages reach the limit you set with the `logging history size` command, older messages are deleted as newer ones are added to the table.

Related Commands [show logging](#) — displays information logged to the history buffer.

logging monitor

Specify which messages are logged to Telnet applications.

Syntax `logging monitor [level]`
To disable logging to terminal connections, use the `no logging monitor` command.

Parameters *level* Indicate a value from 0 to 7 or enter one of the following parameters: `emergencies`, `alerts`, `critical`, `errors`, `warnings`, `notifications`, `informational`, or `debugging`. The default is **7** or **debugging**.

Defaults **7** or **debugging**

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [default logging monitor](#) — returns the logging monitor parameters to the default setting.

logging on

Specify that debug or error messages are asynchronously logged to multiple destinations, such as the logging buffer, Syslog server, or terminal lines.

Syntax `logging on`
To disable logging to logging buffer, Syslog server and terminal lines, use the `no logging on` command.

Defaults Enabled.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you use the `no logging on` command, messages are logged only to the console.

- Related Commands**
- `logging` — enables logging to the Syslog server.
 - `logging buffered` — sets the logging buffered parameters.
 - `logging console` — sets the logging console parameters.
 - `logging monitor` — sets the logging parameters for the terminal connections.

logging source-interface

Specify that the IP address of an interface is the source IP address of Syslog packets sent to the Syslog server.

Syntax `logging source-interface interface`
 To disable this command and return to the default setting, use the `no logging source-interface` command.

Parameters

interface Enter the following keywords and slot/port or number information:

- For Loopback interfaces, enter the keyword `loopback` then a number from zero (0) to 16383.
- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a ten-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For VLAN interface, enter the keyword `vlan` then a number from 1 to 4094.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Syslog messages contain the IP address of the interface used to egress the router. By configuring the `logging source-interface` command, the Syslog packets contain the IP address of the interface configured.

Related Commands `logging` — enables logging to the Syslog server.

logging synchronous

Synchronize unsolicited messages and output.

Syntax `logging synchronous [level level | all] [limit number-of-buffers]`
To disable message synchronization, use the `no logging synchronous [level level | all] [limit number-of-buffers]` command.

Parameters

all	Enter the keyword <code>all</code> to ensure that all levels are printed asynchronously.
level <i>level</i>	Enter the keyword <code>level</code> then a number as the severity level. A high number indicates a low severity level and vice versa. The range is from 0 to 7. The default is 2 .
all	Enter the keyword <code>all</code> to turn off all.
limit <i>number-of-buffers</i>	Enter the keyword <code>limit</code> then the number of buffers to be queued for the terminal after which new messages are dropped. The range is from 20 to 300. The default is 20 .

Defaults Disabled. If enabled without the `level` or `number-of-buffers` options specified, `level = 2` and `number-of-buffers = 20` are the defaults.

Command Modes LINE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable `logging synchronous`, unsolicited messages appear between software prompts and outputs. Only the messages with a severity at or below the set level are sent to the console.

If the message queue limit is reached on a terminal line and messages are discarded, a system message appears on that terminal line. Messages may continue to appear on other terminal lines.

Related Commands [logging on](#) — enables logging.

logging trap

Specify which messages are logged to the Syslog server based the message severity.

Syntax `logging trap [level]`
To return to the default values, use the `default logging trap` command.
To disable logging, use the `no logging trap` command.

Parameters	<i>level</i>	Indicate a value from 0 to 7 or enter one of the following parameters: emergencies, alerts, critical, errors, warnings, notifications, informational, or debugging. The default is 6 or informational .						
Defaults	6 or informational							
Command Modes	CONFIGURATION							
Supported Modes	Full-Switch Mode							
Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.	
Version	Description							
9.9(0.0)	Introduced on the FN IOM.							
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.							
Related Commands	<p>logging — enables the logging to another device.</p> <p>logging on — enables logging.</p>							

logging version

Displays syslog messages in a RFC 3164 or RFC 5424 format.

Syntax	<code>logging version {0 1}</code>
Defaults	0
Command Modes	CONFIGURATION
Supported Modes	Full-Switch Mode
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced on the MXL.

Usage Information To display syslog messages in a RFC 3164 or RFC 5424 format, use the **log version** command in configuration mode. By default, the system log version is set to **0**.

The following describes the two supported log messages formats:

- 0 – Displays syslog messages format as described in RFC 3164, The BSD syslog Protocol
- 1 – Displays SYSLOG message format as described in RFC 5424, The Syslog Protocol

Example

```
Dell(conf)#logging version ?
<0-1> Select syslog version (default = 0)
Dell(conf)#logging version 1
```

show logging

Display the logging settings and system messages logged to the internal buffer of the switch.

Syntax `show logging [number | history [reverse][number] | reverse [number] | summary]`

Parameters	number	(OPTIONAL) Enter the number of messages displayed in the output. The range is from 1 to 65535.
	history	(OPTIONAL) Enter the keyword <code>history</code> to view only information in the Syslog history table.
	reverse	(OPTIONAL) Enter the keyword <code>reverse</code> to view the Syslog messages in FIFO (first in, first out) order.
	summary	(OPTIONAL) Enter the keyword <code>summary</code> to view a table showing the number of messages per type and per slot. Slots *7* and *8* represent RPMs.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example (Partial)

```
Dell#show logging
Syslog logging: enabled
  Console logging: level debugging
  Monitor logging: level debugging
  Buffer logging: level debugging, 311 Messages Logged, Size (40960 bytes)
  Trap logging: level informational
    Logging to 172.16.1.162
    Logging to 10.10.10.4
    Logging to 10.1.2.4
    Logging to 172.31.1.4
    Logging to 133.33.33.4
May 22 10:21:10: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 22 10:16:35: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 22 09:39:12: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 22 09:03:56: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 22 09:01:51: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 22 08:53:09: %STKUNIT0-M:CP %SEC-3-AUTHENTICATION_ENABLE_SUCCESS: Enable
password authentication suc
cess on vty0 ( 10.11.68.22 )
May 22 08:53:04: %STKUNIT0-M:CP %SEC-5-LOGIN_SUCCESS: Login successful for
user admin on vty0
(10.11.68.22)
May 19 16:58:32: %STKUNIT0-M:CP %SEC-5-LOGOUT: Exec session is terminated for
user admin on line vty2
(10.11.68.22)
May 19 14:22:48: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty2
```

```
( 10.11.68.22 )by admin
May 19 12:05:43: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty2
( 10.11.68.22 )by admin
May 19 10:23:59: %STKUNIT0-M:CP %SYS-5-CONFIG_I: Configured from vty0
( 10.11.68.22 )by admin
May 19 10:23:58: %STKUNIT0-M:CP %SEC-5-LOGOUT: Exec
--More--
```

Example (History)

```
Dell#show logging history
Syslog History Table: 1 maximum table entries,
saving level warnings or higher
SNMP notifications not Enabled
May 22 08:53:09: %STKUNIT0-M:CP %SEC-3-AUTHENTICATION_ENABLE_SUCCESS: Enable
password authentication success on vty0 ( 10.11.68.22 )
Dell#
```

show logging driverlog stack-unit

Display the driver log for the specified stack member.

Syntax `show logging driverlog stack-unit unit#`

Parameters

stack-unit <i>unit#</i>	Enter the keywords <code>stack-unit</code> then the stack member ID of the switch for which you want to display the driver log. The range is from 0 to 1.
--------------------------------	---

defaults none

Command Modes

- EXEC
- EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module..

Usage Information This command displays internal software driver information, which may be useful during troubleshooting switch initialization errors, such as a downed Port-Pipe.

show logging auditlog

Displays an audit log.

Syntax `show logging auditlog`

Defaults none

Command Modes EXEC

Supported Modes Full-Switch

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced on the MXL.

Example `Dell(config)#show logging audit`

Related Commands [clear logging auditlog](#) — clears audit log.

terminal monitor

Configure the system to display messages on the monitor/terminal.

Syntax `terminal monitor`
To return to default settings, use the `terminal no monitor` command.

defaults Disabled.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [logging monitor](#) — sets the logging parameters on the monitor/terminal.

Stacking Commands

Stacking is supported on the FN410S and FN410T cards with ports 9 and 10 as the stack ports. Stacking is limited to six Aggregators in the same or different chassis in a single stack.

Stacking provides a single point of management and NIC teaming for high availability and higher throughput. To configure an Aggregator stack, you must use the CLI.

The stacking commands are always available and operational. You can use the commands to pre-configure an Aggregator, so that the configuration settings are invoked when the Aggregator is attached to other Aggregator blades.

For more information about using the Aggregator stacking feature, see the *Stacking Aggregators* chapter in the Dell Networking OS Configuration Guide for the FN IOM.

You can use the following commands to manage a stack of Aggregator I/O modules:

- `power-cycle stack-unit`
- `reset stack-unit`
- `show system stack-ports`
- `show system stack-unit stack-group`
- `stack-unit iom-mode`

NOTE: The terms `stack-unit-id`, `unit-id`, `stack-unit-number`, `stack-number`, and `unit-number` mentioned in this chapter refers to the `stack-unit-number`.

Topics:

- `power-cycle stack-unit`
- `redundancy disable-auto-reboot`
- `redundancy force-failover stack-unit`
- `reset stack-unit`
- `show redundancy`
- `show system stack-ports`
- `show system stack-unit iom-mode`
- `show system stack-unit stack-group`
- `stack-unit iom-mode`
- `stack-unit priority`
- `stack-unit provision`
- `stack-unit renumber`

power-cycle stack-unit

To hard reset any stack unit including master unit.

Syntax `power-cycle stack-unit unit-number`

Parameter **Unit number** The unit number ranges from 0 to 5.

Defaults None

Command Modes EXEC Privilege

Supported Modes All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.6.(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command is supported on the M I/O, FN410S, and FN410T Aggregators.

This command is used to reset the stack-unit. The master unit can also be power cycled using this command.

redundancy disable-auto-reboot

Prevent the switch stack management unit from rebooting if it fail.

Syntax `redundancy disable-auto-reboot stack-unit [0-5 | members]`
To return to the default, use the `no redundancy disable-auto-reboot stack-unit [0-5 | members]` command.

Defaults Disabled (the failed switch is automatically rebooted).

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When the command is given as `redundancy disable-auto-reboot stack-unit`, it prevents the switch stack management unit and standby unit from rebooting if they fail.

When a particular unit number in the range from 0 to 5 is issued as part of the CLI, it prevents that particular unit from rebooting after failure.

When members are issued as part of the CLI, all the units part of the stack are prevented from rebooting after failure.

The unit does not reboot until it is manually rebooted.

Related Commands [show redundancy](#) — displays the current redundancy status.

redundancy force-failover stack-unit

Force the standby unit in the stack to become the management unit.

Syntax	<code>redundancy force-failover stack-unit</code>	
Defaults	Not enabled.	
Command Modes	EXEC Privilege	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

reset stack-unit

Reset any designated stack member except the management unit (master unit).

Syntax	<code>reset stack-unit 0-5 hard</code>	
Parameters	0-5	Enter the stack member unit identifier of the stack member to reset.
	hard	Reset the stack unit if the unit is in a problem state.
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.6.(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information This command is supported on the M I/O, FN410S, and FN410T Aggregators

Resetting the management unit is not allowed and an error message displays if you try to do so. Resetting is a soft reboot, including flushing the forwarding tables.

You can run this command directly on the stack standby unit (Standby Master) to reset the standby. You cannot reset any other unit from the standby unit

Example

```
Dell#show system brief
Stack MAC : 00:1e:c9:f1:00:9b
-- Stack Info --
Unit  UnitType      Status      ReqTyp      CurTyp      Version      Ports
-----
0      Management      online     I/O-Aggregator I/O-Aggregator  8-3-17-46  56
1      Standby         online     I/O-Aggregator I/O-Aggregator  8-3-17-46  56
2      Member          not present
3      Member          not present
```

```

4      Member      not present
5      Member      not present
Dell#
Dell#reset stack-unit 0 >>>Resetting master not allowed
% Error: Reset of master unit is not allowed.
Dell#
Dell#reset stack-unit 1
Dell#01:02:00: %STKUNIT0-M:CP %CHMGR-5-STACKUNIT_RESET: Stack unit 1 being reset
01:02:00: %STKUNIT0-M:CP %IFMGR-1-DEL_PORT: Removed port: Te 1/1-32,41-56
01:02:00: %STKUNIT0-M:CP %CHMGR-2-STACKUNIT_DOWN: Stack unit 1 down - reset
01:02:00: %STKUNIT1-S:CP %IFMGR-1-DEL_PORT: Removed port: Te 1/1-32,41-56
01:02:05: %I/O-Aggregator:0 %IFAGT-5-STACK_PORT_LINK_DOWN: Changed stack port
state to down: 0/10
01:02:11: %STKUNIT0-M:CP %POLLMGR-2-ALT_STACK_UNIT_STATE: Alternate Stack-unit is
not present
Dell#01:02:12: %STKUNIT0-M:CP %CHMGR-2-STACKUNIT_DOWN: Stack unit 1 down - card
removed

```

Related Commands `reload`— reboots the system.

show redundancy

Display the current redundancy configuration (status of automatic reboot configuration on stack management unit).

Syntax `show redundancy`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

Dell#show redundancy
-- Stack-unit Status --
-----
Mgmt ID:                0
Stack-unit ID:          0
Stack-unit Redundancy Role: Primary
Stack-unit State:       Active
Stack-unit SW Version:  E8-3-16-160
Link to Peer:           Down
Peer Stack-unit:        not present

-- Stack-unit Redundancy Configuration --
-----
Primary Stack-unit:      mgmt-id 0
Auto Data Sync:          Full
Failover Type:           Hot Failover
Auto reboot Stack-unit: Enabled
Auto failover limit:     3 times in 60 minutes

-- Stack-unit Failover Record --
-----
Failover Count:         0
Last failover timestamp: None
Last failover Reason:   None
Last failover type:     None

-- Last Data Block Sync Record: --
-----

```

```

Stack Unit Config: no block sync done
Start-up Config: no block sync done
Runtime Event Log: no block sync done
Running Config: no block sync done
    ACL Mgr: no block sync done
    LACP: no block sync done
    STP: no block sync done
    SPAN: no block sync done
Dell#

```

Related Commands [redundancy disable-auto-reboot](#) — prevents the system from auto-rebooting if it fails.

show system stack-ports

Display information about the stacking ports on all switches in the FN I/O Aggregator switch stack..

Syntax `show system stack-ports [status | topology]`

Parameters

status (OPTIONAL) Enter the keyword `status` to display the command output without the Connection field.

topology (OPTIONAL) Enter the keyword `topology` to limit the table to just the Interface and Connection fields.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN I/O Aggregator.

Usage Information

This command is supported on the M I/O, FN410S, and FN410T Aggregators.

The following describes the `show interfaces` command shown in the following example.

Field	Description
Topology	Lists the topology of stack ports connected: Ring, Daisy chain, or Standalone.
Interface	The unit/port ID of the connected stack port on this unit.
Link Speed	Link Speed of the stack port (10) in Gb/s.
Admin Status	The only currently listed status is Up.
Connection	The stack port ID to which this unit's stack port is connected.

Example

```

Dell# show system stack-ports
Topology: Ring

Interface Connection Link Speed      Admin Link Trunk
              (Gb/s)      Status Status Group
0/9          10          up    down

```

```

0/10          1/10    10          up      up
1/9          10          up      down
1/10        0/10    10          up      up
Dell#

```

Example (Status)

```

Dell# show system stack-ports status
Topology: Daisy chain
Interface Link Speed   Admin   Link   Trunk
          (Gb/s)      Status Status Group
0/9      10           up    down
0/10     10           up     up
1/9      10           up    down
1/10     10           up     up

```

Example (Topology)

```

Dell# show system stack-ports topology
Topology: Daisy chain

Interface Connection Trunk
                   Group

0/9
0/9      1/10
1/10
1/10     0/10
Dell     #

```

Related Commands

[power-cycle stack-unit](#)—resets the designated stack member.

[show diag](#)— displays the data plane or management plane input and output statistics of the designated component of the designated stack member.

[show system](#)—displays the current status of all stack members or a specific member.

show system stack-unit iom-mode

Displays the current iom-mode (stack/standalone) and the mode configured after next reboot.

Syntax `show system stack-unit unit-number iom-mode`

Parameters `unit number <0–5>` Enter the number of the member stack unit. The range is from 0 to 5.

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage information This command is supported on the M I/O, FN410S, and FN410T Aggregators

Example

```

Dell#show system stack-unit all iom-mode ?
|           Pipe through a command
<cr>
Dell#show system stack-unit all iom-mode

```

Unit	Boot-Mode	Next-Boot
0	stack	stack
1	stack	stack
2	stack	stack
3	stack	stack
4	Not Present	
5	Not Present	

Dell#

show system stack-unit stack-group

Displays the stack-groups present/configured for a FN I/O Aggregator stack unit.

Syntax `show system stack-unit unit-number stack-group [configured]`

Parameters `unit number <0-5>` Enter the number of the member stack unit. The range is from 0 to 5.

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator.

Usage Information This command is supported on the M I/O, FN410S, and FN410T Aggregators.

Example

```
Dell#show system stack-unit 0 stack-group ?
configured          Configured stack groups
|                  Pipe through a command
<cr>
Dell#show system stack-unit 0 stack-group configured
Configured stack groups in stack-unit 0
Dell#show system stack-unit 0 stack-group
Stack group Ports
-----
0                   0/9
1                   0/10
2                   0/11
3                   0/12
Dell#
```

Related Commands [reload](#)— reboots the system.

[show system](#)— displays the current status of all stack members or a specific member.

stack-unit iom-mode

Toggle the operating mode between programmable multiplex, standalone, stack, full-switch, and VLT modes.

Syntax `stack-unit <unit-number> iom-mode [programmable-mux | stack | standalone | vlt | full-switch]`

Parameters

unit number <0-5>	Enter the number of the member stack unit. The range is from 0 to 5.
<i>programmable-mux</i>	Enable programmable multiplex mode.
<i>stack</i>	Enable stack mode.
<i>standalone</i>	Enable stand-alone mode.
<i>vt</i>	Enable virtual link trunking mode.
<i>full-switch</i>	Enable full-switch mode.

Defaults

standalone

Command Modes

· CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information

This command is supported on the M I/O, FN410S, and FN410T Aggregators.

Example

```
Dell(conf)#stack-unit 0 iom-mode stack
% You are about to stack your IOA module, please reload the IOA
and then plug in the stacking cable for the changes to take effect.
Dell(conf)#
Dell#
```

Related Commands

[reload](#)— Reboots the operating system.

[show system](#)— displays the current status of all stack members or a specific member.

stack-unit priority

Configure the ability of a switch to become the management unit of a stack.

Syntax

```
stack-unit stack-number priority 1-14
```

Parameters

<i>stack-number</i>	Enter the stack member unit identifier.
1-14	This preference parameter allows you to specify the management priority of one backup switch over another, with 0 the lowest priority and 14 the highest. The switch with the highest priority value is chosen to become the management unit if the active management unit fails or on the next reload.

Defaults

0

Command Modes

CONFIGURATION

Supported Modes

All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information This command is supported on the M I/O, FN410S, and FN410T Aggregators.

Related Commands

- [reload](#) – reboots Dell Networking Operating System (OS).
- [show system](#) – displays the status of all stack members or a specific member.

stack-unit provision

Preconfigure a logical stacking ID of a switch that joins the stack. This is an optional command that is executed on the management unit.

Syntax `stack-unit 0-5] provision {MXL-10/40GbE}`

Parameters

0-5	Enter a stack member identifier, from 0 to 5, of the switch that you want to add to the stack.
MXL-10/40GbE	Enter the model identifier of the switch to be added as a stack member. This identifier is also referred to as the <i>provision type</i> .

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands

- [reload](#) — reboots the system.
- [show system](#) — displays the status of all stack members or a specific member.

stack-unit renumber

Change the stack member ID of any stack member or a stand-alone unit.

Syntax `stack-unit 0-5 renumber 0-5`

Parameters

0-5	The first instance of this value is the stack member unit identifier, from 0 to 5, of the switch that you want add to the stack. The range is from 0 to 5. The second instance of this value is the desired new unit identifier number.
------------	---

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6.(0.0)	Supported on the FN I/O Aggregator.
9.3(0.0)	Supported on the M I/O Aggregator.

Usage Information

This command is supported on the FN410S and the FN410T Aggregators.

You can renumber any switch, including the management unit or a stand-alone unit.

You cannot renumber a unit to a number of an active member in the stack.

When executing this command on the master, the stack reloads. When the members are renumbered, only that specific unit is reset and comes up with the new unit number.

Example

```
Dell#stack-unit 5 renumber 4

Renumbering will reset the unit.
Warning: Interface configuration for current unit will be lost!
Proceed to renumber [confirm yes/no]:
```

Related Commands

- [reload](#) – reboots Dell Networking Operating System (OS).
- [reset stack-unit](#) – resets the designated stack member.
- [show system](#) – displays the current status of all stack members or a specific member.

Storm Control

The Dell Networking operating software storm control feature allows you to limit or suppress traffic during a traffic storm.

Important Points to Remember

- Interface commands can only be applied on physical interfaces (virtual local area networks [VLANs] and link aggregation group [LAG] interfaces are not supported).
- An INTERFACE-level command only supports storm control configuration on ingress.
- An INTERFACE-level command overrides any CONFIGURATION-level ingress command for that physical interface, if both are configured.
- You can apply the CONFIGURATION-level storm control commands at ingress or egress and are supported on all physical interfaces.
- When storm control is applied on an interface, the percentage of storm control applied is calculated based on the advertised rate of the line card. It is not based on the speed setting for the line card.
- Do not apply per-VLAN quality of service (QoS) on an interface that has storm control enabled (either on an interface or globally).
- When you enable broadcast storm control on an interface or globally on ingress, and DSCP marking for a DSCP value 1 is configured for the data traffic, the traffic goes to queue 1 instead of queue 0.
- Similarly, if you enable unicast storm control on an interface or globally on ingress, and DSCP marking for a DSCP value 2 is configured for the data traffic, the traffic goes to queue 2 instead of queue 0.

NOTE: Bi-directional traffic (unknown unicast and broadcast) along with egress storm control causes the configured traffic rates split between the involved ports. The percentage of traffic that each port receives after the split is not predictable. These ports can be in the same/different port pipes or the same/different line cards.

NOTE: The policy discard drop counters are common across storm-control drops, ACL drops and QoS drops. Therefore, if your configuration includes ACL and QoS, those drops are also computed and displayed in the policy discard drops counter field along with storm-control drops. The packets dropped by the storm control feature can be monitored by viewing the value of the Policy Discard Drops field of the output of the `show hardware stack-unit 0 drops` command.

Topics:

- [io-aggregator broadcast storm-control](#)
- [show io-aggregator broadcast storm-control status](#)
- [show storm-control unknown-unicast](#)
- [show storm-control broadcast](#)
- [show storm-control multicast](#)
- [storm-control multicast \(Interface\)](#)
- [storm-control broadcast \(Configuration\)](#)
- [storm-control broadcast \(Interface\)](#)
- [storm-control multicast \(Configuration\)](#)
- [storm-control PFC/LLFC](#)
- [storm-control unknown-unicast \(Configuration\)](#)
- [storm-control unknown-unicast \(Interface\)](#)

io-aggregator broadcast storm-control

Rate-limit the traffic storm to 1 Gbps.

Syntax `io-aggregator broadcast storm-control`
To disable storm control, use the `no io-aggregator broadcast storm-control` command.

Defaults Enabled

Command Modes
· CONFIGURATION

Supported Modes Standalone-Mux (SMUX)
Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

Usage Information This command is not available in PMUX mode.

show io-aggregator broadcast storm-control status

Shows if storm control is enabled or disabled. If enabled, displays information on the rate limit value.

Syntax `show io-aggregator broadcast storm-control status`

Command Modes
· EXEC Privilege

Supported Modes Standalone-Mux (SMUX)
Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show io-aggregator broadcast storm-control status
Storm-Control Enabled
Broadcast Traffic limited to 1000 Mbps
Dell#
```

show storm-control unknown-unicast

Display the storm control unknown-unicast configuration.

Syntax	<code>show storm-control unknown-unicast [<i>interface</i>]</code>	
Parameters	<i>interface</i>	(OPTIONAL) Enter the following interface to display the interface specific storm control configuration: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
Defaults	none	
Command Modes	<ul style="list-style-type: none">EXECEXEC Privilege	
Supported Modes	Programmable-Mux (PMUX) Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

show storm-control broadcast

Display the storm control broadcast configuration.

Syntax	<code>show storm-control broadcast [<i>interface</i>]</code>	
Parameters	<i>interface</i>	(OPTIONAL) Enter one of the following interfaces to display the interface-specific storm control configuration: <ul style="list-style-type: none">For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
Defaults	none	
Command Modes	<ul style="list-style-type: none">EXECEXEC Privilege	
Supported Modes	Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.

8.3.16.1 Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show storm-control broadcast tengigabitethernet 3/8  
  
Broadcast storm control configuration  
  
Interface      Direction  Packets/Second  
-----  
TenGig 3/8    Ingress   1000  
Dell#
```

show storm-control multicast

Display the storm control multicast configuration.

Syntax `show storm-control multicast [interface]`

Parameters

interface (OPTIONAL) Enter one of the following interfaces to display the interface specific storm control configuration:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show storm-control multicast gigabitethernet 1/1  
  
Multicast storm control configuration  
  
Interface  Direction  Packets/Second  
-----  
Te 2/2     Ingress    5  
Dell#
```

storm-control multicast (Interface)

Configure the percentage of multicast traffic allowed on the interface.

Syntax `storm-control multicast packets_per_second in`

To disable multicast storm control on the interface, use the `no storm-control multicast packets_per_second` in command.

Parameters	<code>packets_per_second</code>	Enter the packets per second of broadcast traffic allowed into the network. The range is from 0 to 33554368.
Command Modes	INTERFACE (conf-if-interface-slot/port)	
Supported Modes	Programmable-Mux (PMUX) Full-Switch Mode	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

storm-control broadcast (Configuration)

Configure the percentage of broadcast traffic allowed in the network.

Syntax `storm-control broadcast [packets_per_second in]`
To disable broadcast rate-limiting, use the `no storm-control broadcast [packets_per_second in]` command.

Parameters

<code>packets_per_second</code>	Enter the packets per second of broadcast traffic allowed into the network. The range is from 0 to 33554368.
--	--

Defaults none

Command Modes CONFIGURATION (conf)

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Broadcast storm control is valid on Layer 2/Layer 3 interfaces only. Layer 2 broadcast traffic is treated as unknown-unicast traffic.

storm-control broadcast (Interface)

Configure the percentage of broadcast traffic allowed on an interface.

Syntax `storm-control broadcast [packets_per_second in]`

To disable broadcast storm control on the interface, use the `no storm-control broadcast [packets_per_second in]` command.

Parameters	<i>packets_per_second</i>	Enter the packets per second of broadcast traffic allowed into the network. The range is from 0 to 33554368.
Defaults	none	
Command Modes	INTERFACE (conf-if-interface-slot/port)	
Supported Modes	Full-Switch Mode	
Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

storm-control multicast (Configuration)

Configure the packets per second (pps) of multicast traffic.

Syntax `storm-control multicast packets_per_second in`
To disable storm-control for multicast traffic into the network, use the `no storm-control multicast packets_per_second in` command.

Parameters	<i>packets_per_second</i>	Enter the packets per second of multicast traffic allowed into the network. The range is from 0 to 33554368.
-------------------	----------------------------------	--

Defaults none

Command Modes CONFIGURATION (conf)

Supported Modes Full-Switch Mode

Command History		
	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Broadcast traffic (all 0xFs) should be counted against the broadcast storm control meter, not against the multicast storm control meter. It is possible, however, that some multicast control traffic may get dropped when storm control thresholds are exceeded.

storm-control PFC/LLFC

Shut down the port if it receives the PFC/LLFC frames more than the configured rate.

Syntax `storm-control pfc-llfc [pps] in shutdown`

Parameters	<p><code>pfc-llfc in</code> Enter the keyword <code>pfc-llfc</code> to get the flow control traffic. The range is from 0 to 33554368 packets per second.</p> <p><code>shutdown</code> Enter the keyword <code>shutdown</code> to shut down the port when the rate exceeds.</p>				
Defaults	none				
Command Modes	INTERFACE (<i>conf-if-interface-slot/port</i>)				
Command History	<p>This guide is platform-specific. For command information about other platforms, see the relevant <i>Dell Networking OS Command Line Reference Guide</i>.</p> <p>The following is a list of the Dell Networking OS version history for this command.</p> <table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Supported on the FN IOM, FN I/O Aggregator, and M I/O Aggregator</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Supported on the FN IOM, FN I/O Aggregator, and M I/O Aggregator
Version	Description				
9.9(0.0)	Supported on the FN IOM, FN I/O Aggregator, and M I/O Aggregator				
Usage Information	<p> NOTE: PFC/LLFC storm control enabled interfaces disable the interfaces if it receives continuous PFC/LLFC packets. It can be a result of a faulty NIC/Switch that sends spurious PFC/LLFC packets.</p>				

storm-control unknown-unicast (Configuration)

Configure the percentage of unknown-unicast traffic allowed on the switch (ingress rate only).

Syntax	<pre>storm-control unknown-unicast [<i>packets_per_second in</i>]</pre> <p>To disable storm control for unknown-unicast traffic, use the <code>no storm-control unknown-unicast [<i>packets_per_second in</i>]</code> command.</p>
---------------	--

Parameters	<p><code>packets_per_second</code> Enter the packets per second of broadcast traffic allowed into the network. The range is from 0 to 33554368.</p>
-------------------	--

Defaults	none
Command Modes	CONFIGURATION
Supported Modes	Full-Switch Mode

Command History	<table border="0"> <thead> <tr> <th style="text-align: left;">Version</th> <th style="text-align: left;">Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information Unknown Unicast Storm-Control is valid for Layer 2 and Layer 2/Layer 3 interfaces.

storm-control unknown-unicast (Interface)

Configure percentage of unknown-unicast traffic allowed on the interface.

Syntax	<pre>storm-control unknown-unicast [<i>packets_per_second in</i>]</pre>
---------------	---

To disable unknown-unicast storm control on the interface, use the `no storm-control unknown-unicast [packets_per_second in]` command.

Parameters

packets_per_second Enter the packets per second of broadcast traffic allowed into the network. The range is from 0 to 33554431.

Command Modes INTERFACE (conf-if-*interface-slot/port*)

Supported Modes Programmable-Mux (PMUX)
Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Introduced on the M I/O Aggregator.

SupportAssist

SupportAssist sends troubleshooting data securely to Dell. SupportAssist in this Dell EMC Networking OS release does not support automated email notification at the time of hardware fault alert, automatic case creation, automatic part dispatch, or reports. SupportAssist requires Dell EMC Networking OS 9.9(0.0) and SmartScripts 9.7 or later to be installed on the Dell EMC Networking device. For more information on SmartScripts, see *Dell EMC Networking Open Automation guide*.

NOTE: SupportAssist is enabled by default on the system. To disable SupportAssist, enter the `eula-consent support-assist reject` command in Global Configuration mode and save the configuration.

Topics:

- [eula-consent](#)
- [support-assist](#)
- [support-assist activate](#)
- [support-assist activity](#)
- [SupportAssist Commands](#)
- [SupportAssist Activity Commands](#)
- [SupportAssist Company Commands](#)
- [SupportAssist Person Commands](#)
- [SupportAssist Server Commands](#)
- [show eula-consent](#)
- [show running-config](#)
- [show support-assist status](#)

eula-consent

Accept or reject the end user license agreement (EULA).

Syntax `eula-consent {support-assist} {accept | reject}`

Parameters	support-assist	Enter the keywords <code>support-assist</code> to either accept or reject the EULA for the specified service.
	accept	Enter the keyword <code>accept</code> to accept the EULA for the specified service.
	reject	Enter the keyword <code>reject</code> to reject the EULA for the specified service.

Defaults None

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information

- When you run the command, the system displays a message with the information directing to the URL for further information.
- Even before you accept or reject the EULA, the configuration data is sent to the default centrally deployed SupportAssist Server. If you reject the EULA, the configuration data is not transmitted to the SupportAssist server.
- If there is an existing SupportAssist configuration, the configuration is not removed and the feature is disabled.

Example

Accept the EULA:

```
DellEMC(conf)# eula-consent support-assist accept
I accept the terms of the license agreement. You can reject
the license agreement by configuring this command
'eula-consent support-assist reject'.
```

By installing SupportAssist, you allow Dell to save your contact information (e.g. name, phone number and/or email address) which would be used to provide technical support for your Dell products and services. Dell may use the information for providing recommendations to improve your IT infrastructure.

Dell SupportAssist also collects and stores machine diagnostic information, which may include but is not limited to configuration information, user supplied contact information, names of data volumes, IP addresses, access control lists, diagnostics & performance information, network configuration information, host/server configuration & performance information and related data ("Collected Data") and transmits this information to Dell. By downloading SupportAssist and agreeing to be bound by these terms and the Dell end user license agreement, available at: www.dell.com/aeula, you agree to allow Dell to provide remote monitoring services of your IT environment and you give Dell the right to collect the Collected Data in accordance with Dells Privacy Policy, available at: www.dell.com/privacypolicycountryspecific, in order to enable the performance of all of the various functions of SupportAssist during your entitlement to receive related repair services from Dell,. You further agree to allow Dell to transmit and store the Collected Data from SupportAssist in accordance with these terms. You agree that the provision of SupportAssist may involve international transfers of data from you to Dell and/or to Dells affiliates, subcontractors or business partners. When making such transfers, Dell shall ensure appropriate protection is in place to safeguard the Collected Data being transferred in connection with SupportAssist. If you are downloading SupportAssist on behalf of a company or other legal entity, you are further certifying to Dell that you have appropriate authority to provide this consent on behalf of that entity. If you do not consent to the collection,

```
transmission and/or use of the Collected Data, you may not download, install or otherwise use SupportAssist.
```

Reject the EULA:

```
DellEMC(conf)#eula-consent support-assist reject
Aug 24 22:35:38: %STKUNIT1-M:CP %SUPPORT_ASSIST-6-SUPASSIST_EVT: Event monitor
service stopped
I do not accept the terms of the license agreement. The SupportAssist feature
has
been deactivated and can no longer be used.
To enable SupportAssist configurations, accept the terms of the license
agreement
by configuring this command 'eula-consent support-assist accept'.
DellEMC(conf)#
DellEMC(conf)#
Aug 24 22:35:49: %STKUNIT1-M:CP %SUPPORT_ASSIST-6-SUPASSIST_PKG_UNINSTALLED:
SupportAssist package uninstalled
DellEMC(conf)#
```

Related Commands

- [support-assist](#) — moves to the SupportAssist Configuration mode.

support-assist

Move to the SupportAssist configuration mode.

Syntax `support-assist`
To remove all the configuration of the SupportAssist service, use the `no support-assist` command.

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information If you reject the EULA, the data is not transmitted to the SupportAssist server.

Related Commands

- [eula-consent](#) — accept or reject the EULA.

support-assist activate

Launch the configuration wizard that enables SupportAssist service and guides through a series of commands to configure SupportAssist.

Syntax `support-assist activate`

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information You are guided through a series of queries to configure SupportAssist. The generated commands are added to the running configuration, including the DNS resolve commands, if configured.

This command starts the configuration wizard for the SupportAssist. At any time, you can exit by entering Ctrl-C. If necessary, you can skip some data entry.

Once you exit the wizard, the Dell EMC Networking OS starts a full transfer.

support-assist activity

Trigger an activity event immediately.

Syntax `support-assist activity {full-transfer | core-transfer} start now`

Parameters

full-transfer	Enter the keyword <code>full-transfer</code> to specify transfer of configuration, inventory, logs, and other information.
core-transfer	Enter the keyword <code>core-transfer</code> to specify transfer of core files.

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information Use the command to trigger the activity that enables transfer of information. You can choose a full transfer that includes all the details or core transfer that includes only the core files.

NOTE: The full transfer includes the core files as well in the information sent. The core transfer does not send core files that are older than 30 days.

SupportAssist Commands

Dell EMC Networking OS supports the following SupportAssist mode commands.

activity

Move to the SupportAssist Activity mode for an activity. Allow the user to configure customized details for a specific activity.

Syntax `activity {activity-name}`
To remove all customized detail for a specific activity, use the `no activity {activity-name}` command.

Parameters

activity-name	Enter one of the following keywords:
	<ul style="list-style-type: none">Enter the keyword <code>full-transfer</code> to enable or disable full transfer. You can create a custom file to transfer the outputs from a set of show commands. By default, the full transfer runs once in every 30 days.Enter the keyword <code>core-transfer</code> to enable or disable core transfer.Enter the keyword <code>event-transfer</code> to enable or disable event transfer. You can create a custom file to monitor a set of events.

Command Modes SUPPORTASSIST

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM. Introduced the <code>core-transfer</code> and <code>event-transfer</code> parameters.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information By default, each activity follows a set of default actions using a default schedule. Using this command, you can customize the set of actions and disable a certain activity.

contact-company

Configure the contact information for the company.

Syntax `contact-company name {company-name} [company-next-name] ... [company-next-name]`
To remove the contact company information, use the `no contact-company` command.

Parameters

<i>company-name</i>	Enter the name for the company. If there are multiple words in the name, use optional additional fields.
<i>company-next-name</i>	(OPTIONAL) Enter the next components of the company name, up to 5 components are allowed.

Command Modes SUPPORTASSIST

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information You can configure only one contact-company.

It is not possible to remove the components of the company name. The no form of the command removes the entire contact-company entry.

This command is optional for SupportAssist service configuration.

contact-person

Configure the contact name for an individual.

Syntax `contact-person [first <first-name>] last <last-name>`
To remove the contact person and all their details, use the `no contact-person [first <first-name>] last <last-name>` command.

Parameters

<i>first-name</i>	(Optional) Enter the first name for the contact person. This is optional provided each contact person name is unique. To include a space, enter a space within double quotes.
<i>last-name</i>	Enter the last name for the contact person. To include a space, enter a space within double quotes.

Command Modes SUPPORTASSIST

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information Each contact person must be unique by their name.

You can configure only one contact person.

It is not possible to remove the first name or last name. The no form of the command removes the entire contact-person entry.

This command is optional for SupportAssist service configuration.

enable

Enable all activities and severs for the SupportAssist service.

Syntax `enable all`
To disable the SupportAssist activities temporarily, use the `no enable all` command.

Parameters `all` Enter the keyword `all` to enable all SupportAssist service activities.

Defaults Enabled or All Enabled

Command Modes SUPPORTASSIST

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

server

Configure the name of the remote SupportAssist Server and move to SupportAssist Server mode.

Syntax `server {default | server-name}`
To delete a server, use the `no server server-name` command.

Parameters

default	Enter the keyword <code>default</code> for the default server.
server-name	Enter the name of the custom server to which the logs would be transferred. To include a space, enter a space within double quotes.

Defaults Default server has URL `stor.g3.ph.dell.com`

Command Modes SUPPORTASSIST

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The `server-name` is used as a reference only and is not required to be used as part of a URL definition.

There is a reserved name of `default` for the default server at `stor.g3.ph.dell.com`. You can customize the defaults for this server by entering the `server default` command and use the custom commands.

You can configure one additional server.

SupportAssist Activity Commands

Dell EMC Networking OS supports the following SupportAssist Activity mode commands.

action-manifest get

Copy an action-manifest file for an activity to the system.

Syntax `action-manifest get tftp | ftp | flash <file-specification> <local-file-name>`

Parameters

file-specification Enter the full file specification for the action-manifest file. For example:

- `tftp://hostip/filepath`
- `ftp://userid:password@hostip/filepath`
- `scp://userid:password@hostip/filepath`

local-file-name Enter the name of the local action-manifest file, up to 32 characters long. Allowable characters are: a to z, A to Z, 0 to 9, -, _, and space.

Command Modes

SUPPORTASSIST ACTIVITY FULL-TRANSFER

SUPPORTASSIST ACTIVITY EVENT-TRANSFER

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information

The remote file specification for full transfer includes the protocol that is used to copy the file from the remote system.

The default Manifest-file for full transfer includes records like alarms, logs, operational, and configuration data.

Related Commands

- [action-manifest install](#) — configure the action-manifest to use for a specific activity.
- [action-manifest show](#) — view the list of action-manifest for a specific activity.
- [action-manifest remove](#) — remove the action-manifest file for an activity.

action-manifest install

Configure action-manifest to transfer a set of customized records for full transfer and to monitor a set of specified events for event transfer.

Syntax

```
action-manifest install {default | <local-file-name>}
```

To revert to the default action-manifest file, use the `action-manifest install default` command.

Parameters

default Enter the keyword `default` to revert back to the default set of actions for an activity.

local-file-name Enter the name of the local action-manifest file. Allowable characters are: a to z, A to Z, 0 to 9, -, _, and space.

Defaults	Default
Command Modes	SUPPORTASSIST ACTIVITY FULL-TRANSFER SUPPORTASSIST ACTIVITY EVENT-TRANSFER

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information To replace the default action-manifest with a customized one, copy the action-manifest file to the system using the `action-manifest get` command and then use the `action-manifest install` command. To revert to the default action-manifest file, use the `action-manifest install default` command.

- Related Commands**
- [action-manifest get](#) — copy an action-manifest file for an activity to the system.
 - [action-manifest show](#) — view the list of action-manifest for a specific activity.
 - [action-manifest remove](#) — remove the action-manifest file for an activity.

action-manifest remove

Remove the action-manifest file from Dell EMC Networking OS.

Syntax `action-manifest remove <local-file-name>`

Parameters

local-file-name	Enter the name of the local action-manifest file. Allowable characters are: a to z, A to Z, 0 to 9, -, _, and space.
------------------------	--

Command Modes	SUPPORTASSIST ACTIVITY FULL-TRANSFER SUPPORTASSIST ACTIVITY EVENT-TRANSFER
----------------------	---

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.

Version	Description
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information To revert to the default action-manifest file, use the `action-manifest install` command. If necessary, you can then remove the custom action-manifest file.

Related Commands

- [action-manifest get](#) — copy an action-manifest file for an activity to the system.
- [action-manifest install](#) — configure the action-manifest to use for a specific activity.
- [action-manifest show](#) — view the list of action-manifest for a specific activity.

action-manifest show

View the list of action-manifest for a specific activity.

Syntax `action-manifest show {all}`

Parameters **all** Enter the keyword `all` to view the entire list of action-manifests that are available for an activity.

Command Modes SUPPORTASSIST ACTIVITY FULL-TRANSFER
SUPPORTASSIST ACTIVITY EVENT-TRANSFER

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Related Commands

- [action-manifest get](#) — copy an action-manifest file for an activity to the system.
- [action-manifest install](#) — configure the action-manifest to use for a specific activity.
- [action-manifest remove](#) — remove the action-manifest file for an activity.

enable

Enable a specific SupportAssist activity.

Syntax `enable`

To disable a particular SupportAssist activity, use the `no enable` command.

Defaults Enabled

Command Modes SUPPORTASSIST ACTIVITY FULL-TRANSFER
SUPPORTASSIST ACTIVITY CORE-TRANSFER
SUPPORTASSIST ACTIVITY EVENT-TRANSFER

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information Enter the specific SupportAssist activity mode and then enable it.

 **NOTE:** By default, the full transfer includes the core files. When you disable the core transfer activity, the full transfer excludes the core files.

Related Commands · `activity` — move user to the SupportAssist Activity mode for that activity.

SupportAssist Company Commands

Dell EMC Networking OS supports the following SupportAssist Company mode commands.

address

Configure the address information for the company.

Syntax `address [city company-city] [{province | region | state} name] [country company-country] [{postalcode | zipcode} company-code]`

To remove a portion of the company address information, use the `no address [city | province | region | state | country | postalcode | zipcode]` command. For example, to remove the city alone, use the `no address city` command.

To remove the complete company contact information, use the `no address` command.

Parameters `city company-city` (OPTIONAL) Enter the keyword `city` then the city or town for the company site. To include a space, enter a space within double quotes.

province region state name	(OPTIONAL) Enter the keyword <code>province</code> , <code>region</code> or <code>state</code> then the name of province, region or state for the company site. To include a space, enter a space within double quotes.
country company-country	(OPTIONAL) Enter the keyword <code>country</code> then the country for the company site. To include a space, enter a space within double quotes.
postalcode zipcode company-code	(OPTIONAL) Enter the keyword <code>postalcode</code> or <code>zipcode</code> then the postal code or zip code for the company site, as one string with no spaces.

Command Modes SUPPORTASSIST COMPANY

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The optional parameters must be provided in the following order: `city state country postalcode`. If specified in a different order, the command returns an error as follows:

```
DellEMC(conf-supportassist-cmpy-test)# address city Minneapolis postalcode
55344 country USA state Minnesota
                                ^
% Error: Invalid input at "^" marker.
```

This command is optional for SupportAssist service configuration.

Example DellEMC(conf-supportassist-cmpy-test)# address city Minneapolis state Minnesota
country USA postalcode 55344

street-address

Configure the street address information for the company.

Syntax `street-address {address1} [address2]...[address8]`
To remove the street address, use the `no street-address` command.

Parameters

address1 Enter the street address for the company.

address2..address8 (OPTIONAL) Enter the street address of the company site. Up to 8 fields are allowed.

Command Modes SUPPORTASSIST COMPANY

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information This command is optional for SupportAssist service configuration.

territory

Configure the territory and set the coverage for the company site.

Syntax `territory company-territory`
To remove the company territory information, use the `no territory` command.

Parameters `company-territory` Enter the territory name for the company. To include a space, enter a space within double quotes. Use three-letter country codes like USA, IND, FRA, GER and so on.

Command Modes SUPPORTASSIST COMPANY

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information This command is optional for SupportAssist service configuration.

SupportAssist Person Commands

Dell EMC Networking OS supports the following SupportAssist Person mode commands.

email-address

Configure the email addresses to reach the contact person.

Syntax `email-address primary email-address [alternate email-address]`
To remove an email address, use the `no email-address` command. To remove the primary and the alternate email addresses, use the `no email-address primary` and `no email-address alternate` commands respectively.

Parameters

primary email-address	Enter the keyword <code>primary</code> then the primary email address for the person.
alternate email-address	Enter the keyword <code>alternate</code> then the alternate email address for the person.

Command Modes SUPPORTASSIST PERSON

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The email addresses must have the standard form of <username>@<email system> to be considered valid.
This command is optional for SupportAssist service configuration.

Related Commands

- [preferred-method](#) — configure the preferred method for contacting the person.

phone

Configure phone numbers to reach the contact person.

Syntax `phone primary phone [alternate phone]`
To remove a phone number, use the `no phone` command. To remove the primary and alternate phone numbers, use the `no phone primary` and `no phone alternate` commands respectively.

Parameters

primary phone	Enter the keyword <code>primary</code> then the primary phone number for the person.
----------------------	--

alternate phone Enter the keyword `alternate` then the alternate phone number for the person.

Command Modes SUPPORTASSIST PERSON

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The phone numbers may contain country codes, area codes and extensions, if necessary. Allowable characters are 0 to 9, x, (,), - and +.

This command is optional for SupportAssist service configuration.

Related Commands

- [preferred-method](#) — configure the preferred method for contacting the person.

preferred-method

Configure the preferred method for contacting the person.

Syntax `preferred-method {email | no-contact | phone}`

Parameters

email	Enter the keyword <code>email</code> to specify email as preferred method.
no-contact	Enter the keywords <code>no-contact</code> to specify that there is no preferred method.
phone	Enter the keyword <code>phone</code> to specify phone as preferred method.

Defaults `no-contact`

Command Modes SUPPORTASSIST PERSON

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.

Version	Description
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Related Commands

- [email-address](#) — configure email addresses to reach the contact person.
- [phone](#) — configure phone numbers to reach the contact person.

time-zone

Configure the time zone for contacting the person.

Syntax `time-zone zone +-HH:MM[start-time HH:MM] [end-time HH:MM]`
 To remove the time zone, use the `no time-zone [zone | start-time | end-time]` command.

Parameters

zone +-HH:MM	Enter the keyword <code>zone</code> then a time difference from GMT expressed as HH:MM. This number may be preceded by either a + or – sign.
start-time HH:MM	Enter the keywords <code>start-time</code> then a starting time expressed as HH:MM. Use the 24-hour clock format.
stop-time HH:MM	Enter the keywords <code>stop-time</code> then a stopping time expressed as HH:MM. Use the 24-hour clock format.

Command Modes SUPPORTASSIST PERSON

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information This command is optional for SupportAssist service configuration.

SupportAssist Server Commands

Dell EMC Networking OS supports the following SupportAssist Server mode commands.

proxy-ip-address

Configure a proxy for reaching the SupportAssist remote server.

Syntax `proxy-ip-address {ipv4-address | ipv6-address} port port-number [username userid password [encryption-type] password]`
To remove the proxy, use the `no proxy-ip-address` command.

Parameters

<code>ipv4-address</code>	Enter the IP address of the proxy server in a dotted decimal format (A.B.C.D).
<code>ipv6-address</code>	Enter the IPv6 address of the proxy server in the x:x:x:x format. NOTE: The <code>::</code> notation specifies successive hexadecimal fields of zeros. NOTE: To use the IPv6 address, the Open Automation package should also support IPv6 communications. For this purpose, SupportAssist requires Dell EMC Networking Open Automation 9.10(0.0) package or later.
<code>port port-number</code>	Enter the keyword <code>port</code> then the TCP/IP port number. The port number range is from 1024 to 65534.
<code>username userid</code>	(OPTIONAL) Enter the keyword <code>username</code> then the user ID used for the proxy server.
<code>password</code>	Enter the keyword <code>password</code> then the encryption-type or the user password.
<code>encryption-type</code>	(OPTIONAL) Enter an encryption type for the <code>password</code> you enter. <ul style="list-style-type: none">0 directs the system to interpret the password as clear text.7 indicates that the password is encrypted using a DES hashing algorithm.
<code>password</code>	Enter a string up to 32 characters long.

Defaults encryption-type for the password is 0.

Command Modes SUPPORTASSIST SERVER

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The passwords are stored encrypted in the running configuration.

enable

Enable communication with the SupportAssist server.

Syntax	<code>enable</code> To disable communication to a specific SupportAssist server, use the <code>no enable</code> command.
Defaults	Enabled
Command Modes	SUPPORTASSIST SERVER
Command History	This guide is platform-specific. For command information about other platforms, see the relevant <i>Dell EMC Networking OS Command Line Reference Guide</i> .
Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Related Commands

- `server` — configure the name of the remote SupportAssist server.

url

Configure the URL to reach the SupportAssist remote server.

Syntax

```
url uniform-resource-locator
```

To delete the URL for the server, use the `no url` command.

Parameters

uniform-resource-locator Enter a text string for the URL using one of the following formats:

- `http://[username:password@]<hostip>:<portNum>/<filepath>`
- `https://[username:password@]<hostip>:<portNum>/<filepath>`

NOTE: The host IP for the server may be specified as an IPv4 address, an IPv6 address or as a DNS hostname. If using the DNS hostname, the DNS resolver will need to be configured and enabled.

Command Modes SUPPORTASSIST SERVER

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Usage Information The URL should be formatted to follow the ISO format.

show eula-consent

Display the EULA for the feature.

Syntax `show eula-consent {support-assist | other feature}`

Parameters

support-assist other feature	Enter the keywords <code>support-assist</code> or the text corresponding to other feature.
---------------------------------------	--

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Example

```
DellEMC# show eula-consent support-assist
SupportAssist EULA has been: Accepted
Additional information about the SupportAssist EULA is as follows:
By installing SupportAssist, you allow Dell to save your contact information
(e.g. name, phone number and/or email address) which would be used to provide
technical support for your Dell products and services. Dell may use the
information
for providing recommendations to improve your IT infrastructure.
Dell SupportAssist also collects and stores machine diagnostic information,
which
may include but is not limited to configuration information, user supplied
contact
information, names of data volumes, IP addresses, access control lists,
diagnostics &
performance information, network configuration information, host/server
configuration
```

```

& performance information and related data (Collected Data) and transmits this
information to Dell. By downloading SupportAssist and agreeing to be bound by
these
terms and the Dell end user license agreement, available at: www.dell.com/
aeula,
you agree to allow Dell to provide remote monitoring services of your IT
environment
and you give Dell the right to collect the Collected Data in accordance with
Dells
Privacy Policy, available at: www.dell.com/privacypolicycountryspecific, in
order to
enable the performance of all of the various functions of SupportAssist during
your
entitlement to receive related repair services from Dell,. You further agree
to
allow Dell to transmit and store the Collected Data from SupportAssist in
accordance
with these terms. You agree that the provision of SupportAssist may involve
international transfers of data from you to Dell and/or to Dells affiliates,
subcontractors or business partners. When making such transfers, Dell shall
ensure
appropriate protection is in place to safeguard the Collected Data being
transferred
in connection with SupportAssist. If you are downloading SupportAssist on
behalf
of a company or other legal entity, you are further certifying to Dell that you
have appropriate authority to provide this consent on behalf of that entity.
If you
do not consent to the collection, transmission and/or use of the Collected
Data,
you may not download, install or otherwise use SupportAssist.
DellEMC#

```

show running-config

Display the current configuration and changes from the default values.

Syntax	<code>show running-config support-assist</code>	
Parameters	support-assist	Enter the keyword <code>support-assist</code> to view the detailed configuration for the feature.
Command Modes	EXEC Privilege	
Command History	This guide is platform-specific. For command information about other platforms, see the relevant <i>Dell EMC Networking OS Command Line Reference Guide</i> .	

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Example

```

DellEMC# show running-config support-assist
!
support-assist

```

```

enable all
!
activity event-transfer
  enable
  action-manifest install default
!
activity core-transfer
  enable
!
contact-company name Dell
  street-address F lane , Sector 30
  address city Brussels state HeadState country Belgium postalcode S328J3
!
contact-person first Fred last Nash
  email-address primary des@sed.com alternate sed@dol.com
  phone primary 123422 alternate 8395729
  preferred-method email
  time-zone zone +05:30 start-time 12:23 end-time 15:23
!
server Dell
  enable
  url http://1.1.1.1:1332
DellEMC#

```

show support-assist status

Display information on SupportAssist feature status including any activities, status of communication, last time communication sent, and so on.

Syntax `show support-assist status`

Command Modes EXEC Privilege

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.11(0.0)	Introduced on the M I/O Aggregator and FN IOM.
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the C9010, Z9100-ON, S6100-ON, and S3100 series.
9.9(0.0)	Introduced on the S4810, S4820T, S3048-ON, S4048-ON, S5000, S6000, S6000-ON, Z9500, MXL.

Example

```

DellEMC#show support-assist status
SupportAssist Service: Installed
EULA: Accepted
Server: default
  Enabled: Yes
  URL: https://stor.g3.ph.dell.com
Server: Dell
  Enabled: Yes
  URL: http://1.1.1.1:1332
Service status: Enabled

Activity          State    Last Start                Last Success
-----
core-transfer    Success Feb 15 2016 09:43:41 IST   Feb 15 2016

```

```
09:43:56 IST
event-transfer          Success Feb 15 2016 09:47:43 IST Feb 15 2016
09:48:21 IST
full-transfer          Success Feb 15 2016 09:36:12 IST Feb 15 2016
09:38:27 IST
DellEMC#
```

Spanning Tree Protocol (STP)

The commands in this chapter configure and monitor the IEEE 802.1d spanning tree protocol (STP).

Topics:

- [bridge-priority](#)
- [debug spanning-tree](#)
- [description](#)
- [disable](#)
- [forward-delay](#)
- [hello-time](#)
- [max-age](#)
- [portfast bpdupfilter default](#)
- [protocol spanning-tree](#)
- [show config](#)
- [show spanning-tree 0](#)
- [spanning-tree 0](#)

bridge-priority

Set the bridge priority of the switch in an IEEE 802.1D spanning tree.

Syntax `bridge-priority {priority-value | primary | secondary}`
To return to the default value, use the `no bridge-priority` command.

Parameters

<i>priority-value</i>	Enter a number as the bridge priority value. The range is from 0 to 65535. The default is 32768 .
primary	Enter the keyword <code>primary</code> to designate the bridge as the root bridge.
secondary	Enter the keyword <code>secondary</code> to designate the bridge as a secondary root bridge.

Defaults `priority-value = 32768`

Command Modes SPANNING TREE (The prompt is “config-stp”.)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

debug spanning-tree

Enable debugging of the spanning tree protocol and view information on the protocol.

Syntax `debug spanning-tree {stp-id [all | bpdu | events | exceptions] | protocol}`
To disable debugging, use the `no debug spanning-tree` command.

Parameters

stp-id	Enter zero (0). The switch supports one spanning tree group with a group ID of 0.
protocol	Enter the keyword for the type of STP to debug, either <code>mstp</code> , <code>pvst</code> , or <code>rstp</code> .
all	(OPTIONAL) Enter the keyword <code>all</code> to debug all spanning tree operations.
bpdu	(OPTIONAL) Enter the keyword <code>bpdu</code> to debug bridge protocol data units.
events	(OPTIONAL) Enter the keyword <code>events</code> to debug STP events.

Command Modes EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When you enable `debug spanning-tree bpdu` for multiple interfaces, the software only sends information on BPDUs for the last interface specified.

Related Commands [portfast bpdufilter default](#) — enters SPANNING TREE mode on the switch.

description

Enter a description of the spanning tree.

Syntax `description {description}`
To remove the description from the spanning tree, use the `no description {description}` command.

Parameters

description	Enter a description to identify the spanning tree (80 characters maximum).
--------------------	--

Defaults none

Command Modes SPANNING TREE (The prompt is “config-stp”.)

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [portfast bpdufilter default](#) — enters SPANNING TREE mode on the switch.

disable

Disable the spanning tree protocol globally on the switch.

Syntax `disable`
To enable Spanning Tree Protocol, use the `no disable` command.

Defaults Enabled (that is, the spanning tree protocol is disabled.)

Command Modes SPANNING TREE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [portfast bpdupfilter default](#) — enters SPANNING TREE mode.

forward-delay

The amount of time the interface waits in the Listening state and the Learning state before transitioning to the Forwarding state.

Syntax `forward-delay seconds`
To return to the default setting, use the `no forward-delay` command.

Parameters

seconds	Enter the number of seconds that the system waits before transitioning STP to the Forwarding state. The range is from 4 to 30. The default is 15 seconds .
----------------	---

Defaults **15 seconds**

Command Modes SPANNING TREE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [max-age](#) — changes the wait time before STP refreshes protocol configuration information.

[hello-time](#) — changes the time interval between BPDUs.

hello-time

Set the time interval between generation of the spanning tree bridge protocol data units (BPDUs).

Syntax `hello-time seconds`

To return to the default value, use the `no hello-time` command.

Parameters `seconds` Enter a number as the time interval between transmission of BPDUs. The range is from 1 to 10. The default is **2 seconds**.

Defaults **2 seconds**

Command Modes SPANNING TREE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [forward-delay](#) — changes the wait time before STP transitions to the Forwarding state.

[max-age](#) — changes the wait time before STP refreshes protocol configuration information.

max-age

To maintain configuration information before refreshing that information, set the time interval for the spanning tree bridge.

Syntax `max-age seconds`

To return to the default values, use the `no max-age` command.

Parameters `seconds` Enter a number of seconds the system waits before refreshing configuration information. The range is from 6 to 40. The default is **20 seconds**.

Defaults **20 seconds**

Command Modes SPANNING TREE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [forward-delay](#) — changes the wait time before STP transitions to the Forwarding state.

[hello-time](#) — changes the time interval between BPDUs.

portfast bpdufilter default

Enable BPDU Filter globally to filter transmission of BPDU on port fast enabled interfaces.

Syntax `portfast bpdufilter default`
To disable global bpdu filter default, use the `no edge-port bpdufilter default` command.

Defaults Disabled

Command Modes SPANNING TREE

Command History

Version	Description
9.9(0.0)	Introduced on the FN MXL.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

protocol spanning-tree

To enable and configure the spanning tree group, enter SPANNING TREE mode.

Syntax `protocol spanning-tree stp-id`
To disable the Spanning Tree group, use the `no protocol spanning-tree stp-id` command.

Parameters `stp-id` Enter zero (0). The system supports one spanning tree group, group 0.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information STP is not enabled when you enter SPANNING TREE mode. To enable STP globally on the switch, use the `no disable` command from SPANNING TREE mode.

Example

```
Dell(conf)#protocol spanning-tree 0
Dell(config-stp)#
```

Related Commands [disable](#) — disables spanning tree group 0. To enable spanning tree group 0, use the `no disable` command.

show config

Display the current configuration for the mode. Only non-default values display.

Syntax `show config`

Command Modes SPANNING TREE

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(config-stp)#show config
protocol spanning-tree 0
no disable
Dell(config-stp)#
```

show spanning-tree 0

Display the spanning tree group configuration and status of interfaces in the spanning tree group.

Syntax `show spanning-tree 0 [active | brief | guard | interface interface | root | summary]`

Parameters

0	Enter 0 (zero) to display information about that specific spanning tree group.
active	(OPTIONAL) Enter the keyword <code>active</code> to display only active interfaces in spanning tree group 0.
brief	(OPTIONAL) Enter the keyword <code>brief</code> to display a synopsis of the spanning tree group configuration information.
guard	(OPTIONAL) Enter the keyword <code>guard</code> to display the type of guard enabled on an STP interface and the current port state.
interface <i>interface</i>	(OPTIONAL) Enter the keyword <code>interface</code> and the type slot/port of the interface you want displayed. Type slot/port options are the following: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
root	(OPTIONAL) Enter the keyword <code>root</code> to display configuration information on the spanning tree group root.
summary	(OPTIONAL) Enter the keyword <code>summary</code> to only the number of ports in the spanning tree group and their state.

Command Modes EXEC Privilege

Supported Modes Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Enable spanning tree group 0 prior to using this command.

The following describes the `show spanning-tree 0` command shown in the example.

Field	Description
“Bridge Identifier...”	Lists the bridge priority and the MAC address for this STP bridge.
“Configured hello...”	Displays the settings for hello time, max age, and forward delay.
“We are...”	States whether this bridge is the root bridge for the STG.
“Current root...”	Lists the bridge priority and MAC address for the root bridge.
“Topology flag...”	States whether the topology flag and the detected flag were set.
“Number of...”	Displays the number of topology changes, the time of the last topology change, and on what interface the topology change occurred.
“Timers”	Lists the values for the following bridge timers: hold time, topology change, hello time, max age, and forward delay.
“Times”	List the number of seconds since the last: <ul style="list-style-type: none">· hello time· topology change· notification· aging
“Port 1...”	Displays the Interface type slot/port information and the status of the interface (Disabled or Enabled).
“Port path...”	Displays the path cost, priority, and identifier for the interface.
“Designated root...”	Displays the priority and MAC address of the root bridge of the STG that the interface belongs.
“Designated port...”	Displays the designated port ID.

Example

```
Dell#show spann 0

Executing IEEE compatible Spanning Tree Protocol
Bridge Identifier has priority 32768, Address 0001.e800.0a56
Configured hello time 2, max age 20, forward delay 15
We are the root of the spanning tree
Current root has priority 32768 address 0001.e800.0a56
Topology change flag set, detected flag set
Number of topology changes 1 last change occurred 0:00:05 ago
  from TenGigabitEthernet 1/3
Timers:hold 1, topology change 35
      hello 2, max age 20, forward_delay 15
Times:hello 1, topology change 1, notification 0, aging 2

Port 2 (TenGigabitEthernet 1/1) is Forwarding
Port path cost 4, Port priority 8, Port Identifier 8.26
Designated root has priority 32768, address 0001.e800.0a56
Designated bridge has priority 32768, address 0001.e800.0a56
Designated port id is 8.26, designated path cost 0
```

```

Timers: message age 0, forward_delay 0, hold 0
Number of transitions to forwarding state 1
BPDU: sent:18, received 0
The port is not in the portfast mode

Port 3 (TenGigabitEthernet 1/2) is Forwarding
Port path cost 4, Port priority 8, Port Identifier 8.27
Designated root has priority 32768, address 0001.e800.0a56
Designated bridge has priority 32768, address 0001.e800.0a56
Designated port id is 8.27, designated path cost 0
Timers: message age 0, forward_delay 0, hold 0
Number of transitions to forwarding state 1
BPDU: sent:18, received 0
The port is not in the portfast mode

Port 4 (TenGigabitEthernet 1/3) is Forwarding
Port path cost 4, Port priority 8, Port Identifier 8.28
Designated root has priority 32768, address 0001.e800.0a56
Designated bridge has priority 32768, address 0001.e800.0a56
Designated port id is 8.28, designated path cost 0
Timers: message age 0, forward_delay 0, hold 0
Number of transitions to forwarding state 1
BPDU: sent:31, received 0
The port is not in the portfast mode

Dell#

```

Example (Brief)

Usage Information

The following describes the `show spanning-tree 0 guard` command shown in the example.

Field	Description
Interface Name	STP interface.
Instance	STP 0 instance.
Sts	Port state: root-inconsistent (INCON Root), forwarding (FWD), listening (LIS), blocking (BLK), or shut down (EDS Shut).
Guard Type	Type of STP guard configured (Root, Loop, or BPDU guard).
Bpdu Filter	BPDU Filter enabled - Yes, BPDU Filter disabled - No

Example (Guard)

```

Dell#show spanning-tree 0 guard
Interface
Name      Instance Sts          Guard type
-----
Te 0/1 0      INCON(Root) Rootguard
Te 0/2 0      LIS         Loopguard
Te 0/3 0      EDS (Shut)  Bpduguard

```

spanning-tree 0

Assigns a Layer 2 interface to STP instance 0 and configures a port cost or port priority, or enables loop guard, root guard, or the Portfast feature on the interface.

Syntax

```

spanning-tree stp-id {cost cost | {rootguard} | portfast [bpduguard [shutdown-
on-violation]] | bpdufilter] | priority priority}

```

To disable Spanning Tree group on an interface, use the `no spanning-tree stp-id {cost cost | {rootguard} | portfast [bpduguard [shutdown-on-violation] | bpdufilter] | priority priority}` command.

Parameters

stp-id	Enter the STP instance ID. The range is 0.
cost cost	Enter the keyword <code>cost</code> then a number as the cost. The range is 1 to 65535. The defaults are: <ul style="list-style-type: none"> 10-Gigabit Ethernet interface = 2. Port Channel interface with 10-Gigabit Ethernet = 1.
rootguard	Enter the keyword <code>rootguard</code> to enable STP root guard on a port or port-channel interface.
portfast [bpduguard [shutdown-on-violation] bpdufilter]	Enter the keyword <code>portfast</code> to enable Portfast to move the interface into Forwarding mode immediately after the root fails. <p>Enter the optional keyword <code>bpduguard</code> to disable the port when it receives a BPDU.</p> <p>Enter the optional keywords <code>shutdown-on-violation</code> to hardware disable an interface when a BPDU is received and the port is disabled.</p> <p>Enter the keyword <code>bpdufilter</code> to enable on an interface; it should stop sending and receiving BPDUs on the port fast enabled ports.</p>
priority priority	Enter keyword <code>priority</code> then a number as the priority. The range is zero (0) to 15. The default is 8 .

Defaults

cost = depends on the interface type; priority = **8**

Command Modes

INTERFACE

Supported Modes

Full-Switch Mode

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module..

Usage Information

If you enable `portfast bpduguard` on an interface and the interface receives a BPDU, the software disables the interface and sends a message stating that fact. The port is in `ERR_DISABLE` mode, yet appears in the `show interface` commands as enabled. If you do not enable `shutdown-on-violation`, BPDUs still are sent to the RPM CPU.

STP root guard is supported on a port or port-channel enabled in any Spanning Tree mode: Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), Multiple Spanning Tree Protocol (MSTP), and Per-VLAN Spanning Tree Plus (PVST+).

Root guard is supported on any STP-enabled port or port-channel except when used as a stacking port. When enabled on a port, root guard applies to all VLANs configured on the port.

System Time

The commands in this chapter configure time values on the system, either using the Dell Networking OS, the hardware, or using the network time protocol (NTP). With NTP, the switch can act only as a client to an NTP clock host.

For more information, refer to the **Network Time Protocol** section of the *Management* chapter in the *Dell Networking OS Configuration Guide*.

The NTP commands are:

- [show clock](#)
- [clock set](#)
- [clock summer-time date](#)
- [clock summer-time recurring](#)

Topics:

- [clock set](#)
- [clock summer-time date](#)
- [clock summer-time recurring](#)
- [debug ntp](#)
- [ntp offset-threshold](#)
- [ntp server](#)
- [ntp authenticate](#)
- [ntp authentication-key](#)
- [ntp master <stratum>](#)
- [ntp server](#)
- [ntp source](#)
- [ntp trusted-key](#)
- [show clock](#)
- [show ntp associations](#)
- [show ntp vrf associations](#)
- [show ntp status](#)

clock set

Set the software clock in the switch.

Syntax `clock set time month day year`

Parameters

- | | |
|---------------------|---|
| <i>time</i> | Enter the time in hours:minutes:seconds. For the hour variable, use the 24-hour format; example, 17:15:00 is 5:15 pm. |
| <i>month</i> | Enter the name of one of the 12 months, in English. You can enter the number of a day and change the order of the display to <i>time day month year</i> . |

	day	Enter the number of the day. The range is from 1 to 31. You can enter the name of a month to change the order of the display to <i>time month day year</i> .
	year	Enter a four-digit number as the year. The range is from 1993 to 2035.
Defaults	Not configured.	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.
Usage Information	<p>You can change the order of the <code>month</code> and <code>day</code> parameters to enter the time and date as <i>time day month year</i> . You cannot delete the software clock.</p> <p>The software clock runs only when the software is up. The clock restarts, based on the hardware clock, when the switch reboots.</p> <p>Dell Networking recommends using an outside time source, such as NTP, to ensure accurate time on the switch.</p>	
Example	<pre>Dell#clock set 12:11:00 21 may 2012 Dell#</pre>	

clock summer-time date

Set a date (and time zone) on which to convert the switch to daylight saving time on a one-time basis.

Syntax `clock summer-time time-zone date start-month start-day start-year start-time end-month end-day end-year end-time [offset]`

To delete a daylight saving time zone configuration, use the `no clock summer-time` command.

Parameters	time-zone	Enter the three-letter name for the time zone. This name is displayed in the show clock output.
	start-month	Enter the name of one of the 12 months in English. You can enter the name of a day to change the order of the display to <i>time day month year</i> .
	start-day	Enter the number of the day. The range is from 1 to 31. You can enter the name of a month to change the order of the display to <i>time day month year</i> .
	start-year	Enter a four-digit number as the year. The range is from 1993 to 2035.
	start-time	Enter the time in hours:minutes. For the hour variable, use the 24-hour format; example, 17:15 is 5:15 pm.
	end-day	Enter the number of the day. The range is from 1 to 31. You can enter the name of a month to change the order of the display to <i>time day month year</i> .
	end-month	Enter the name of one of the 12 months in English. You can enter the name of a day to change the order of the display to <i>time day month year</i> .

<i>end-time</i>	Enter the time in hours:minutes. For the hour variable, use the 24-hour format; example, 17:15 is 5:15 pm.
<i>end-year</i>	Enter a four-digit number as the year. The range is from 1993 to 2035.
<i>offset</i>	(OPTIONAL) Enter the number of minutes to add during the summer-time period. The range is from 1 to 1440. The default is 60 minutes .

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [clock summer-time recurring](#) — sets a date (and time zone) on which to convert the switch to daylight saving time each year.

[show clock](#) — displays the current clock settings.

clock summer-time recurring

Set the software clock to convert to daylight saving time on a specific day each year.

Syntax `clock summer-time time-zone recurring [start-week start-day start-month start-time end-week end-day end-month end-time [offset]]`

To delete a daylight saving time zone configuration, use the `no clock summer-time` command.

Parameters

<i>time-zone</i>	Enter the three-letter name for the time zone. This name is displayed in the <code>show clock</code> output. You can enter up to eight characters.
<i>start-week</i>	(OPTIONAL) Enter one of the following as the week that daylight saving begins and then enter values for start-day through end-time: <ul style="list-style-type: none"> <code>week-number</code>: Enter a number from 1 to 4 as the number of the week in the month to start daylight saving time. <code>first</code>: Enter this keyword to start daylight saving time in the first week of the month. <code>last</code>: Enter this keyword to start daylight saving time in the last week of the month.
<i>start-day</i>	Enter the name of the day that you want daylight saving time to begin. Use English three letter abbreviations; for example, Sun, Sat, Mon, and so on. The range is from Sun to Sat.
<i>start-month</i>	Enter the name of one of the 12 months in English.
<i>start-time</i>	Enter the time in hours:minutes. For the hour variable, use the 24-hour format; example, 17:15 is 5:15 pm.
<i>end-week</i>	Enter the one of the following as the week that daylight saving ends:

- `week-number`: enter a number from 1 to 4 as the number of the week to end daylight saving time.
- `first`: enter the keyword `first` to end daylight saving time in the first week of the month.
- `last`: enter the keyword `last` to end daylight saving time in the last week of the month.

end-day Enter the weekday name that you want daylight saving time to end. Enter the weekdays using the three letter abbreviations; for example Sun, Sat, Mon, and so on. The range is from Sun to Sat.

end-month Enter the name of one of the 12 months in English.

end-time Enter the time in hours:minutes:seconds. For the hour variable, use the 24-hour format; example, 17:15:00 is 5:15 pm.

offset (OPTIONAL) Enter the number of minutes to add during the summer-time period. The range is from 1 to 1440. The default is **60 minutes**.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Related Commands [clock summer-time date](#) — sets a date (and time zone) on which to convert the switch to daylight saving time on a one-time basis.

[show clock](#) — displays the current clock settings.

debug ntp

Display network time protocol (NTP) transactions and protocol messages for troubleshooting.

Syntax `debug ntp {adjust | all | authentication | events | loopfilter | packets | select | sync}`

To disable debugging of NTP transactions, use the `no debug ntp {adjust | all | authentication | events | loopfilter | packets | select | sync}` command.

Parameters

adjust	Enter the keyword <code>adjust</code> to display information on NTP clock adjustments.
all	Enter the keyword <code>all</code> to display information on all NTP transactions.
authentication	Enter the keyword <code>authentication</code> to display information on NTP authentication transactions.
events	Enter the keyword <code>events</code> to display information on NTP events.
loopfilter	Enter the keyword <code>loopfilter</code> to display information on NTP local clock frequency.

packets	Enter the keyword <code>packets</code> to display information on NTP packets.
select	Enter the keyword <code>select</code> to display information on the NTP clock selection.
sync	Enter the keyword <code>sync</code> to display information on the NTP clock synchronization.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ntp offset-threshold

Configure the threshold time interval before which the system generates an NTP audit log message if the time difference from the NTP server is greater than a threshold value (`offset-threshold`).

Syntax `ntp offset-threshold threshold-value`
To disable the threshold value, use the `no ntp offset-threshold` command.

Parameters

offset-threshold threshold-value	(Optional) Enter the keyword <code>offset-threshold</code> and then the threshold value. The range is from 0 to 999.
---	--

Defaults Not enabled.

Command Modes CONFIGURATION

Command History This guide is platform-specific. For command information about other platforms, see the relevant *Dell EMC Networking OS Command Line Reference Guide*.

Version	Description
9.10(0.1)	Introduced on the S6010-ON and S4048T-ON.
9.10(0.0)	Introduced on the S3148.
9.10(0.0)	Introduced on the S3038-ON, S4048-ON, S3100 Series, S4810P, S4820T, S5000, S6000, S6000-ON, S6100-ON, Z9500, and Z9100-ON.

Usage Information The `ntp offset-threshold` command does not time synchronization.

Example

```
DellEMC(config)# ntp offset-threshold 4
```

ntp server

Configure an NTP time-serving host.

Syntax `ntp server {ipv4-address}`

Parameters	<i>ipv4-address</i>	Enter an IPv4 address (A.B.C.D).
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
Usage Information	<p>You can configure multiple time-serving hosts (up to 250). From these time-serving hosts, the operating system chooses one NTP host with which to synchronize.</p> <p>Because many polls to NTP hosts can impact network performance, Dell Networking recommends limiting the number of hosts configured.</p>	

ntp authenticate

Enable authentication of NTP traffic between the switch and the NTP time serving hosts.

Syntax	<code>ntp authenticate</code>	To disable NTP authentication, use the <code>no ntp authentication</code> command.
Defaults	Not enabled.	
Command Modes	CONFIGURATION	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	You also must configure an authentication key for NTP traffic using the <code>ntp authentication-key</code> command.	
Related Commands	<p>ntp authentication-key — configures the authentication key for NTP traffic.</p> <p>ntp trusted-key — configures a key to authenticate.</p>	

ntp authentication-key

Specify a key for authenticating the NTP server.

Syntax	<code>ntp authentication-key <i>number</i> md5 [0 7] <i>key</i></code>	
Parameters	<i>number</i>	Specify a number for the authentication key. The range is from 1 to 4294967295.

This number must be the same as the `number` parameter configured in the `ntp trusted-key` command.

md5	Specify that the authentication key is encrypted using MD5 encryption algorithm.
0	Specify that authentication key is entered in an unencrypted format (default).
7	Specify that the authentication key is entered in DES encrypted format.
key	Enter the authentication key in the previously specified format.

Defaults NTP authentication is not configured by default. If you do not specify the option [0 | 7], **0** is selected by default.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information After configuring the `ntp authentication-key` command, configure the `ntp trusted-key` command to complete NTP authentication.

The Dell Networking OS versions 8.2.1.0 and later use an encryption algorithm to store the authentication key that is different from previous versions; beginning in version 8.2.1.0, the system uses DES encryption to store the key in the startup-config when you enter the `ntp authentication-key` command. Therefore, if your system boots with a startup-configuration from an versions prior to 8.2.1.0 in which you have configured `ntp authentication-key`, the system cannot correctly decrypt the key, and cannot authenticate NTP packets. In this case you must re-enter this command and save the running-config to the startup-config.

Related Commands [ntp authenticate](#) — enables NTP authentication.

[ntp trusted-key](#) — configures a trusted key.

ntp master <stratum>

Configure the switch as NTP Server.

Syntax `ntp master <stratum>`

Parameters

ntp	Enter the keyword <code>stratum</code> number to identify the NTP Server's hierarchy.
master<stratum>	

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Introduced on the MXL.

ntp server

Configure an NTP time-serving host.

Syntax `ntp server[vrf vrf-name] {hostname | ipv4-address | ipv6-address} [key keyid] [prefer] [version number]`

Parameters		
vrf vrf-name	(Optional) Enter the keyword <code>vrf</code> and then the name of the VRF to configure a NTP time-serving host corresponding to that VRF.	
ipv4-address ipv6-address	Enter an IPv4 address (A.B.C.D) or IPv6 address (X:X:X::X) of NTP server.	
hostname	Enter the hostname of the server.	
key keyid	(OPTIONAL) Enter the keyword <code>key</code> and a number as the NTP peer key. The range is from 1 to 4294967295.	
prefer	(OPTIONAL) Enter the keyword <code>prefer</code> to indicate that this peer has priority over other servers.	
version number	(OPTIONAL) Enter the keyword <code>version</code> and a number to correspond to the NTP version used on the server. The range is from 1 to 4.	

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Added support for VRF.
8.3.11.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You can configure multiple time-serving hosts (up to 250). From these time-serving hosts, the system chooses one NTP host with which to synchronize. To determine which server was selected, use the `show ntp associations` command.

Because many polls to NTP hosts can impact network performance, Dell Networking OS recommends limiting the number of hosts configured.

Related Commands [show ntp associations](#) — displays the NTP servers configured and their status.

ntp source

Specify an interface's IP address to be included in the NTP packets.

Syntax `ntp source interface`
To delete the configuration, use the `no ntp source` command.

Parameters *interface* Enter the following keywords and slot/port or number information:

- For Loopback interfaces, enter the keyword `loopback` then a number from zero (0) to 16383.
- For a Port Channel interface, enter the keyword `lag` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For VLAN interface, enter the keyword `vlan` then a number from 1 to 4094.
- For the Management interface, enter the keyword `ManagementEthernet` then slot/port information. This option is valid only in Full-Switch mode.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

ntp trusted-key

Set a key to authenticate the system to which NTP synchronizes.

Syntax `ntp trusted-key number`
To delete the key, use the `no ntp trusted-key number` command.

Parameters *number* Enter a number as the trusted key ID. The range is from 1 to 4294967295.

Defaults Not configured.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The `number` parameter in the `ntp trusted-key` command must be the same number as the `number` parameter in the `ntp authentication-key` command. If you change the `ntp authentication-key` command, you must also change the `ntp trusted-key` command.

Related Commands [ntp authentication-key](#) — sets an authentication key for NTP.
[ntp authenticate](#) — enables the NTP authentication parameters you set.

show clock

Displays the current clock settings.

Syntax `show clock [detail]`

Parameters **detail** (OPTIONAL) Enter the keyword `detail` to view the source information of the clock.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Example

```
Dell#show clock
12:30:04.402 pacific Tue May 22 2012
Dell#
```

Example (Detail)

```
Dell#show clock detail
12:30:26.892 pacific Tue May 22 2012
Time source is RTC hardware
Summer time starts 00:00:00 UTC Wed Mar 14 2012
Summer time ends 00:00:00 pacific Wed Nov 7 2012
Dell#
```

Related Commands [clock summer-time recurring](#) — sets the software clock to convert to daylight saving time on a specific day each year.

show ntp associations

Display the NTP master and peers.

Syntax `show ntp associations`

Command Modes

- EXEC

- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ntp associations` command shown in the following example.

Field	Description
(none)	One or more of the following symbols could be displayed: <ul style="list-style-type: none"> · * means synchronized to this peer. · # means almost synchronized to this peer. · + means the peer was selected for possible synchronization. · - means the peer is a candidate for selection. · ~ means the peer is statically configured.
remote	Displays the remote IP address of the NTP peer.
ref clock	Displays the IP address of the remote peer's reference clock.
st	Displays the peer's stratum, that is, the number of hops away from the external time source. A 16 in this column means the NTP peer cannot reach the time source.
when	Displays the last time the switch received an NTP packet.
poll	Displays the polling interval (in seconds).
reach	Displays the reachability to the peer (in octal bitstream).
delay	Displays the time interval or delay for a packet to complete a round-trip to the NTP time source (in milliseconds).
offset	Displays the relative time of the NTP peer's clock to the switch clock (in milliseconds).
disp	Displays the dispersion.

Example

```
Dell#show ntp associations
remote      ref clock  st when poll reach delay  offset disp
=====
 10.10.120.5 0.0.0.0    16 -   256   0 0.00 0.000 16000.0
*172.16.1.33 127.127.1.0 11 6   16    377  -0.08 -1499.9 104.16
 172.31.1.33 0.0.0.0    16 -   256   0 0.00 0.000 16000.0
 192.200.0.2 0.0.0.0    16 -   256   0 0.00 0.000 16000.0
* master (syncd), # master (unsyncd), + selected, - candidate
Dell#
```

Related Commands [show ntp status](#) — displays the current NTP status.

show ntp vrf associations

Displays the NTP servers configured for the VRF instance <vrf-name>.

Syntax `show ntp [vrf] <vrf-name> associations.`

Command Modes	EXEC EXEC Privilege
Supported Modes	Full-Switch
Command History	This guide is platform-specific. For command information about other platforms, refer to the relevant <i>Dell Networking OS Command Line Reference Guide</i> .

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Added support for VRF.
9.4.(0.0)	Added support for VRF.

show ntp status

Display the current NTP status.

Syntax `show ntp status`

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ntp status` command shown in the following example.

Field	Description
“Clock is...”	States whether the switch clock is synchronized, which NTP stratum the system is assigned and the IP address of the NTP peer.
“frequency is...”	Displays the frequency (in ppm), stability (in ppm) and precision (in Hertz) of the clock in this system.
“reference time is...”	Displays the reference time stamp.
“clock offset is...”	Displays the system offset to the synchronized peer and the time delay on the path to the NTP root clock.
“root dispersion is...”	Displays the root and path dispersion.
“peer mode is...”	State what NTP mode the switch is. This should be Client mode.

Example

```
Dell#show ntp status
Clock is unsynchronized, stratum 16, no reference clock
frequency is 0.000 ppm, stability is 0.000 ppm, precision is 4294967279
```

```
reference time is 00000000.00000000 (6:28:16.000 UTC Thu Feb 7 2036)
clock offset is 0.000000 msec, root delay is 0.000000 sec
root dispersion is 0.000000 sec, peer dispersion is 0.000 msec
peer mode is unspec
Dell#
```

Related Commands [show ntp associations](#) — displays information on the NTP master and peer configurations.

Tunneling

Tunneling is supported on the Dell Networking OS.

tunnel-mode

Enable a tunnel interface.

Syntax `tunnel mode {ipip | ipv6 | ipv6ip} [decapsulate-any]`
To disable an active tunnel interface, use the **no tunnel** mode command.

Parameters		
<i>ipip</i>	Enable tunnel in RFC 2003 mode and encapsulate IPv4 and/or IPv6 datagrams inside an IPv4 tunnel.	
<i>ipv6</i>	Enable tunnel in RFC 2473 mode and encapsulate IPv4 and/or IPv6 datagrams inside an IPv6 tunnel.	
<i>ipv6ip</i>	Enable tunnel in RFC 4213 mode and encapsulate IPv6 datagrams inside an IPv4 tunnel.	
<i>decapsulate-any</i>	(Optional) Enable tunnel in multipoint receive-only mode.	

Defaults None

Command Modes INTERFACE TUNNEL

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Added the decapsulate-any command.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To enable a tunnel interface, use this command. You must define a tunnel mode for the tunnel to function. If you previously defined the tunnel destination or source address, the tunnel mode must be compatible.

Including the decapsulate-any option causes the command to fail if any of the following tunnel transmit options are configured: tunnel destination, tunnel dscp, tunnel flow-label, tunnel hop-limit, or tunnel keepalive. Conversely, if you configure any tunnel allow-remote entries, the `tunnel-mode` command fails unless the decapsulate-any option is included

Configuration of IPv6 commands over decapsulate-any tunnel causes an error.

tunnel source

Set a source address for the tunnel.

Syntax `tunnel source {ip-address | ipv6-address | interface-type-number}`
To delete the current tunnel source address, use the `no tunnel source` command.

Parameters

<i>ip-address</i>	Enter the source IPv4 address in A.B.C.D format.
<i>ipv6-address</i>	Enter the source IPv6 address in X:X:X::X format.
<i>interface-type-number</i>	<ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number from 1 to 128.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN interface, enter the keyword <code>vlan</code> then a number from 1 to 4094.

Defaults none

Command Modes INTERFACE TUNNEL (conf-if-tu)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you configure a tunnel interface or destination address, the tunnel source must be compatible.

If you configure a tunnel source address as an interface, the tunnel does not function until the compatible address is present on the particular interface.

tunnel keepalive

Configure the tunnel keepalive target, interval and attempts.

Syntax `tunnel keepalive {ip-address | ipv6-address}[interval {seconds}] [attempts {count | unlimited}]`
Use the **no tunnel keepalive** command to disable tunnel keepalive probes.

Parameters

<i>ip-address ipv6 address</i>	Enter the IPv4 or IPv6 address of the peer to which the keepalive probes will be sent.
<i>interval seconds</i>	Enter the keyword interval followed by the interval time, in seconds, after which the restart process to keepalive probe packets. The range is from 5- 255. Default range is 5.

count (OPTIONAL) Enter the keyword **count** to count packets processed by the filter.
The range is from 3-10, Default range is 3.

unlimited Enter the keyword **unlimited** to specify the unlimited number of keepalive probe packets.

Defaults Tunnel keepalive is disabled.

Command Modes INTERFACE TUNNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL.

Usage Information When configured, the system will send ICMP echo probe packets at the configured interval and expect a response within the configured number of attempts, else the tunnel interface will be declared operational down.

tunnel allow-remote

Configure an IPv4 or IPv6 address or prefix whose tunneled packets will be accepted for decapsulation. If no allow-remote entries are configured, tunneled packets from any remote peer address will be accepted.

Syntax **tunnel allow-remote** {*ip-address* | *ipv6-address*} [*mask*]

Use the **no tunnel allow-remote** command to delete a configured allow-remote entry. Any specified address/mask values must match an existing entry for the delete to succeed. If the address and mask are not specified, this command deletes all allow-remote entries.

Parameters

ip-address Enter the source IPv4 address in A.B.C.D format.

ipv6-address Enter the source IPv6 address in X:X:X::X format.

mask (OPTIONAL) Enter a network mask in /prefix format (/x) or A.B.C.D to match a range of remote addresses. The default mask is /32 for IPv4 addresses and /128 for IPv6 addresses, which match only the specified address.

Defaults If no tunnel allow remote is configured, all traffic which is destined to tunnel source address will be decapsulated.

Command Modes INTERFACE TUNNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL.

Usage Information Up to eight allow-remote entries can be configured on any particular multipoint receive-only tunnel.

This command will fail if the address family entered does not match the outer header address family of the tunnel mode, tunnel source, or any other tunnel allow-remote.

If any allow-remote are configured, the tunnel source or tunnel mode commands will fail if the outer header address family does not match that of the configured allow-remote.

tunnel dscp

Configure the method to set the DSCP in the outer tunnel header.

Syntax `tunnel dscp {mapped | <value>}`
To use the default tunnel mapping behavior, use the `no tunnel dscp value` command.

Parameters

mapped	Enter the keyword <code>mapped</code> to map the original packet DSCP (IPv4)/Traffic Class (IPv6) to the tunnel header DSCP (IPv4)/Traffic Class (IPv6) depending on the mode of tunnel.
value	Enter a value to set the DSCP value in the tunnel header. The range is from 0 to 63. The default value of 0 denotes mapping of original packet DSCP (IPv4)/Traffic Class (IPv6) to the tunnel header DSCP (IPv4)/Traffic Class (IPv6) depending on the mode of tunnel.

Defaults 0 (Mapped)

Command Modes INTERFACE TUNNEL (conf-if-tu)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command configures the method used to set the high 6 bits (the differentiated services codepoint) of the IPv4 TOS or the IPv6 traffic class in the outer IP header.

A value of 0 copies original packet DSCP (IPv4)/Traffic Class (IPv6) to the tunnel header DSCP (IPv4)/Traffic Class (IPv6) depending on the mode of tunnel.

tunnel destination

Set a destination endpoint for the tunnel.

Syntax `tunnel destination {ip-address | ipv6-address}`
To delete a tunnel destination address, use the `no tunnel destination {ip-address | ipv6-address}` command.

Parameters

ip-address	Enter the destination IPv4 address for the tunnel.
ipv6-address	Enter the destination IPv6 address for the tunnel.

Defaults none

Command Modes INTERFACE TUNNEL (conf-if-tu)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The tunnel interface is inoperable without a valid tunnel destination address for the configured Tunnel mode.

To establish a logical tunnel to the particular destination address, use the destination address of the outer tunnel header. If you configure a tunnel interface or source address, the tunnel destination must be compatible.

tunnel flow-label

Configure the method to set the IPv6 flow label value in the outer tunnel header.

Syntax

```
tunnel flow-label value
```

To return to the default value of 0, use the `no tunnel flow-label value` command.

Parameters

value Enter a value to set the IPv6 flow label value in the tunnel header. The range is from 0 to 1048575. The default value is **0**.

Defaults

0 (Mapped original packet flow-label value to tunnel header flow-label value)

Command Modes

INTERFACE TUNNEL (conf-if-tu)

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command is only valid for tunnel interfaces with an IPv6 outer header.

tunnel hop-limit

Configure the method to set the IPv4 time-to-live or the IPv6 hop limit value in the outer tunnel header.

Syntax

```
tunnel hop-limit value
```

To restore the default tunnel hop-limit, use the `no tunnel hop-limit` command.

Parameters

value Enter the hop limit (ipv6) or time-to-live (ipv4) value to include in the tunnel header. The range is from 0 to 255. The default is **64**.

Defaults

64 (Time-to-live for IPv4 outer tunnel header or hop limit for IPv6 outer tunnel header)

Command Modes	INTERFACE TUNNEL (conf-if-tu)						
Supported Modes	Full-Switch						
Command History	<table border="0"> <thead> <tr> <th>Version</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.3(0.0)</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.						
Usage Information	A value of 0 copies the inner packet hop limit (ipv6) or time-to-live (ipv4) in the encapsulated packet to the tunnel header hop limit (ipv6) or time-to-live (ipv4) value.						

ip unnumbered

Configure a tunnel interface to operate without a unique explicit IPv4 address and select the interface from which the tunnel will borrow its address.

Syntax	<p>ip unnumbered <i>{interface-type interface-number}</i></p> <p>Use the no ip unnumbered command to set the tunnel back to default logical address. If the tunnel was previously operational, this will make the tunnel interface operationally down, unless the tunnel also has an IPv6 address configured..</p>
---------------	--

Parameters	<table border="0"> <tr> <td><i>interface-type</i></td> <td>Enter the interface type, followed by a slot number.</td> </tr> <tr> <td><i>interface-number</i></td> <td></td> </tr> </table>	<i>interface-type</i>	Enter the interface type, followed by a slot number.	<i>interface-number</i>	
<i>interface-type</i>	Enter the interface type, followed by a slot number.				
<i>interface-number</i>					

Defaults	None						
Command Modes	INTERFACE TUNNEL						
Supported Modes	Full-Switch						
Command History	<table border="0"> <thead> <tr> <th>Version</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>9.4(0.0)</td> <td>Introduced on the MXL.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	9.4(0.0)	Introduced on the MXL.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
9.4(0.0)	Introduced on the MXL.						

Usage Information	<p>The ip unnumbered command will fail in two condition:</p> <ul style="list-style-type: none"> · If the logical ip address is configured. · If the tunnel mode is ipv6ip (where ip address over tunnel interface is not possible). <p>To ping the unnumbered tunnels the logical address route information should be present in both the ends.</p>
--------------------------	---

NOTE: The ip unnumbered command can specify an interface name that does not yet exist, or does not yet have a configured IPv6 address. The tunnel interface is not changed to the operationally up state until logically ip address is identified from the one of the address family.

ipv6 unnumbered

Configure a tunnel interface to operate without a unique explicit IPv6 address and select the interface from which the tunnel will borrow its address.

Syntax **ipv6 unnumbered** *{interface-type interface-number}*

Use the **no ipv6 unnumbered** command to set the tunnel back to default logical address. If the tunnel was previously operational, this will make the tunnel interface operationally down, unless the tunnel also has an IPv4 address configured.

Parameters

interface-type Enter the interface type, followed by the type, slot and port information.
interface-number

Defaults None.

Command Modes INTERFACE TUNNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Introduced on the MXL.

Usage Information The ip unnumbered command will fail in two condition:

- If the logical ip address is configured.
- If the tunnel mode is ipv6ip (where ip address over tunnel interface is not possible).

To ping the unnumbered tunnels the logical address route information should be present in both the ends.

NOTE: The **ipv6 unnumbered** command can specify an interface name that does not yet exist, or does not yet have a configured IPv6 address. But the tunnel interface will not go operationally up until it has determined a logical address to use of at least one address family.

u-Boot

All commands in this chapter are in u-Boot mode. These commands are supported on the Dell Networking Operating System (OS) FN IOM platform.

To access this mode, press any key when the following line appears on the console during a system boot.

```
Hit any key to stop autoboot:
```

Enter u-Boot immediately, as the `BOOT_USER#` prompt.

NOTE: This chapter describes only a few commands available in u-Boot mode.

NOTE: You cannot use the Tab key to complete commands in this mode.

Topics:

- [boot change](#)
- [boot selection](#)
- [boot show net config retries](#)
- [boot write net config retries](#)
- [boot zero](#)
- [default gateway](#)
- [enable](#)
- [help](#)
- [ignore enable password](#)
- [ignore startup config](#)
- [interface management ethernet ip address](#)
- [no default-gateway](#)
- [no interface management ethernet ip address](#)
- [reload](#)
- [show boot blc](#)
- [show boot selection](#)
- [show bootflash](#)
- [show bootvar](#)
- [show default-gateway](#)
- [show interface management Ethernet](#)
- [show interface management port config](#)
- [syntax help](#)

boot change

Change the operating system boot parameters.

Syntax `boot change [primary | secondary | default]`

Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

boot selection

Change the ROM bootstrap bootflash partition.

Syntax	<code>boot selection [a b]</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

boot show net config retries

Show the number of retries for network boot configuration failure.

Syntax	<code>boot show net config retries</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

BOOT_USER# boot show net config retries
Number of Network Boot Config Retries is : 0
BOOT_USER #

```

boot write net config retries

Set the number of retries for network boot configuration failure.

Syntax	<code>boot write net config retries <int></code>
Command Modes	uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # boot write net config retries 2
Updated number of Network Boot Config retries to 2.
BOOT_USER #
```

boot zero

Clears the primary, secondary, or default boot parameters.

Syntax `boot zero [primary | secondary | default]`

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

default gateway

Set the default gateway IP address.

Syntax `default-gateway <ip-address>`

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

enable

Change the access privilege level.

Syntax `enable [user | admin]`

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

help

Display the help menu.

Syntax	help
Command Modes	uBoot
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # help
***** Dell Force10 Boot Interface Help Information *****
Current access level: USER LEVEL
Use "syntax help" for more information on syntax.
Available command list (22 commands total):
  boot change [primary|secondary|default]
    change operating system boot parameters
  boot selection [a|b]
    change the rom bootstrap bootflash partition
  boot show net config retries
    show number of retries for network boot config failure
  boot write net config retries <int>
    write number of retries for network boot config failure
  boot zero [primary|secondary|default]
    zero operating system boot parameters
  default-gateway <ip-address>
    default-gateway - set the default gateway ip address
  enable [user|admin]
    change access privilege level
  help
    display help menu
-(36%)-Use <CR> to continue, q to stop:
BOOT_USER #
```

ignore enable password

Ignore the enabled password.

Syntax	ignore enable-password
Command Modes	uBoot
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.

ignore startup config

Ignore the system startup configuration.

Syntax	<code>ignore startup-config</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

interface management ethernet ip address

Set the management port IP address and mask.

Syntax	<code>interface management ethernet ip address <ip/mask></code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

no default-gateway

Clear the default gateway IP address.

Syntax	<code>no default-gateway</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

no interface management ethernet ip address

Clear the management port IP address and mask.

Syntax	<code>no interface management ethernet ip address</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

reload

Reload the FN IOM switch.

Syntax	<code>reload</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show boot blc

Show the boot loop counter value.

Syntax	<code>show boot blc</code>	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show boot blc ?
Total 1 possible command found.
Possible command list:
  show boot blc
    show the boot loop counter value
BOOT_USER # show boot blc
Boot Loop Counter : 10
```

```
BOOT_USER #
```

show boot selection

Display the ROM bootstrap bootflash partition.

Syntax	show boot selection	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show boot selection
ROM BOOTSTRAP SELECTOR PARMETERS:
=====
Next ROM bootstrap set to occur from Bootflash partition A.
Last ROM bootstrap occurred from Bootflash partition B.
BOOT_USER #
```

show bootflash

Show summary of boot flash information.

Syntax	show bootflash	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show bootflash
GENERAL BOOTFLASH INFO
=====
Bootflash Partition A:
  Dell Force10 Networks System Boot
  Official IOM_LP_IMG_BOOT LOADER, BSP Release 4.0.1.0bt1
  Created Tue May 1 10:56:16 2012 by build on login-sjc-01
Bootflash Partition B:
  Dell Force10 Networks System Boot
  Official IOM_LP_IMG_BOOT LOADER, BSP Release 4.0.1.0bt1
  Created Tue May 1 10:56:16 2012 by build on login-sjc-01
Boot Selector Partition:
```

```
Dell Force10 Networks System Boot
Official IOM_XLOAD_LP_IMG_BOOT_SELECTOR, BSP Release 4.0.0.0bt1
Created Tue May 1 10:56:34 2012 by build on login-sjc-01
```

```
BOOT_USER #
```

show bootvar

Show summary of operating system boot parameters.

Syntax	show bootvar	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show bootvar

PRIMARY OPERATING SYSTEM BOOT PARAMETERS:
=====
boot device           : tftp
file name             : premnath
Management Ethernet IP address : 10.16.130.134/16
Server IP address    : 10.16.127.35
Default Gateway IP address : 15.0.0.1
Management Ethernet MAC address : 00:01:E8:43:DE:DF

SECONDARY OPERATING SYSTEM BOOT PARAMETERS:
=====
No Operating System boot parameters specified!

DEFAULT OPERATING SYSTEM BOOT PARAMETERS:
=====
boot device           : tftp
file name             : FTOS-XL-8-3-16-99.bin
Management Ethernet IP address : 10.16.130.134/16
Server IP address    : 10.16.127.53
Default Gateway IP address : 15.0.0.1
Management Ethernet MAC address : 00:01:E8:43:DE:DF

BOOT_USER #
```

show default-gateway

Display the default gateway IP address.

Syntax	show default-gateway	
Command Modes	uBoot	
Supported Modes	Full-Switch	
Command History	Version	Description

9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show default-gateway
Gateway IP address: 15.0.0.1
BOOT_USER #
```

show interface management Ethernet

Show the management port IP address and mask.

Syntax `show interface management ethernet`

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show interface management ethernet
Management ethernet IP address: 10.16.130.134/16
BOOT_USER #
```

show interface management port config

Show the management port boot characteristics.

Syntax `show interface management port config`

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # show interface management port config
Management ethernet Port Configuration: no Auto Negotiate
Management ethernet Port Configuration: 100M
Management ethernet Port Configuration: full duplex
BOOT_USER #
```

syntax help

Show the syntax information.

Syntax help

Command Modes uBoot

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
BOOT_USER # help
***** Dell Force10 Boot Interface Help Information *****
Current access level: USER LEVEL
Use "syntax help" for more information on syntax.
Available command list (22 commands total):
  boot change [primary|secondary|default]
    change operating system boot parameters
  boot selection [a|b]
    change the rom bootstrap bootflash partition
  boot show net config retries
    show number of retries for network boot config failure
  boot write net config retries <int>
    write number of retries for network boot config failure
  boot zero [primary|secondary|default]
    zero operating system boot parameters
  default-gateway <ip-address>
    default-gateway - set the default gateway ip address
  enable [user|admin]
    change access privilege level
  help
    display help menu
-(36%)-Use <CR> to continue, q to stop:
BOOT_USER #
```

Uplink Failure Detection (UFD)

Uplink failure detection (UFD) provides detection of the loss of upstream connectivity and, if you use this with network interface controller (NIC) teaming, automatic recovery from a failed link.

NOTE: In Standalone, VLT, and Stacking modes, the UFD group number is 1 by default and cannot be changed.

Topics:

- [clear ufd-disable](#)
- [debug uplink-state-group](#)
- [defer-timer](#)
- [description](#)
- [downstream](#)
- [downstream auto-recover](#)
- [downstream disable links](#)
- [enable](#)
- [show running-config uplink-state-group](#)
- [show uplink-state-group](#)
- [uplink-state-group](#)
- [upstream](#)

clear ufd-disable

Re-enable one or more downstream interfaces on the switch/router that are in a UFD-Disabled Error state so that an interface can send and receive traffic.

Syntax `clear ufd-disable {interface interface | uplink-state-group group-id}`

Parameters

interface *interface* Specify one or more downstream interfaces. For *interface*, enter one of the following interface types:

- 10 Gigabit Ethernet: `tengigabitethernet {slot/port | slot/ port-range}`
- Port channel: `port-channel {1-512 | port-channel-range}`

Where `port-range` and `port-channel-range` specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example:

`tengigabitethernet 1/1-2,5,9,11-12 port-channel 1-3,5`. A comma is required to separate each port and port-range entry.

uplink-state-group *group-id* Re-enables all UFD-disabled downstream interfaces in the group. The valid *group-id* values are from 1 to 16.

Defaults

A downstream interface in a UFD-disabled uplink-state group is also disabled and is in a UFD-Disabled Error state.

Command Modes CONFIGURATION
Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

Related Commands

- [downstream](#) — assigns a port or port-channel to the uplink-state group as a downstream interface.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

debug uplink-state-group

Enable debug messages for events related to a specified uplink-state group or all groups.

Syntax `debug uplink-state-group [group-id]`
To turn off debugging event messages, enter the `no debug uplink-state-group [group-id]` command.

Parameters

group-id	Enables debugging on the specified uplink-state group. The valid group-id values are from 1 to 16.
-----------------	--

Defaults none

Command Modes EXEC Privilege

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

Related Commands [clear ufd-disable](#) — re-enables downstream interfaces that are in a UFD-Disabled Error state.

defer-timer

Configure a timer that prevents unwanted flapping of downstream ports when the uplink port channel goes down and comes up.

Syntax `defer-timerseconds`

Defaults 10 (Standalone mode)

Parameters	seconds	Specify the time (in seconds) to wait for the upstream port channel (LAG 128) to come back up before server ports are brought down. The range is from 1 to 120.
Command Modes	UPLINK-STATE-GROUP	
Supported Modes	Standalone, Stacking, VLT Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.
Usage Information	This command is not supported in Programmable-Mux mode.	

description

Enter a text description of an uplink-state group.

Syntax `description text`

Parameters

text Text description of the uplink-state group. The maximum length is 80 alphanumeric characters.

Defaults none

Command Modes UPLINK-STATE-GROUP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell (conf-uplink-state-group-16) # description test
Dell (conf-uplink-state-group-16) #
```

Related Commands [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

downstream

Assign a port or port-channel to the uplink-state group as a downstream interface.

Syntax `downstream interface`

To delete an uplink-state group, enter the `no downstream interface` command.

Parameters

interface

Enter one of the following interface types:

- 10 Gigabit Ethernet: `tengigabitethernet {slot/port | slot/port-range}`
- Port channel: `port-channel {1-512 | port-channel-range}`

Where `port-range` and `port-channel-range` specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example: `tengigabitethernet 1/1-2,5,9,11-12 port-channel 1-3,5`. A comma is required to separate each port and port-range entry.

Defaults

none

Command Modes

UPLINK-STATE-GROUP

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version

Description

9.9(0.0)

Introduced on the FN IOM.

9.4(0.0)

Supported on the FN I/O Aggregator.

Usage Information

You can assign physical port or port-channel interfaces to an uplink-state group.

You can assign an interface to only one uplink-state group. Configure each interface assigned to an uplink-state group as either an upstream or downstream interface, but not both.

You can assign individual member ports of a port channel to the group. An uplink-state group can contain either the member ports of a port channel or the port channel itself, but not both.

Related Commands

- [upstream](#) — assigns a port or port-channel to the uplink-state group as an upstream interface.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

downstream auto-recover

Enable auto-recovery so that UFD-disabled downstream ports in an uplink-state group automatically come up when a disabled upstream port in the group comes back up.

Syntax

`downstream auto-recover`

To disable auto-recovery on downstream links, use the `no downstream auto-recover` command.

Defaults

The auto-recovery of UFD-disabled downstream ports is enabled.

Command Modes

UPLINK-STATE-GROUP

Supported Modes

Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Related Commands

- [downstream](#) — assigns a port or port-channel to the uplink-state group as a downstream interface.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

downstream disable links

Configure the number of downstream links in the uplink-state group that are disabled if one upstream link in an uplink-state group goes down.

Syntax

```
downstream disable links {number | all}
```

To revert to the default setting, use the `no downstream disable links` command.

Parameters

<i>number</i>	Enter the number of downstream links to be brought down by UFD. The range is from 1 to 1024.
all	Brings down all downstream links in the group.

Defaults

No downstream links are disabled when an upstream link in an uplink-state group goes down.

Command Modes

UPLINK-STATE-GROUP

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information

A user-configurable number of downstream interfaces in an uplink-state group are put into a link-down state with an UFD-Disabled error message when one upstream interface in an uplink-state group goes down.

If all upstream interfaces in an uplink-state group go down, all downstream interfaces in the same uplink-state group are put into a link-down state.

Related Commands

- [downstream](#) — assigns a port or port-channel to the uplink-state group as a downstream interface.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

enable

Re-enable upstream-link tracking for an uplink-state group after it has been disabled.

Syntax `enable`
To disable upstream-link tracking without deleting the uplink-state group, use the `no enable` command.

group-id Enables debugging on the specified uplink-state group. Valid *group-id* values are 1 to 16.

Defaults Upstream-link tracking is automatically enabled in an uplink-state group.

Command Modes UPLINK-STATE-GROUP

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

show running-config uplink-state-group

Display the current configuration of one or more uplink-state groups.

Syntax `show running-config uplink-state-group [group-id]`

Parameters *group-id* Displays the current configuration of all uplink-state groups or a specified group. The valid group-id values are from 1 to 16.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show running-config uplink-state-group
!
no enable
uplink state track 1
downstream TengigabitEthernet 0/2,4,6,11
upstream TengigabitEthernet 0/8, 12
```

```
upstream PortChannel 1
!
uplink state track 2
downstream TengigabitEthernet 0/1,3,5
upstream TengigabitEthernet 0/9,10
```

Related Commands

- [show uplink-state-group](#) — displays the status information on a specified uplink-state group or all groups.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

show uplink-state-group

Display status information on a specified uplink-state group or all groups.

Syntax `show uplink-state-group [group-id] [detail]`

Parameters

group-id	Displays status information on a specified uplink-state group or all groups. The valid group-id values are from 1 to 16.
detail	Displays additional status information on the upstream and downstream interfaces in each group

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell#show uplink-state-group detail
(Up): Interface up      (Dwn): Interface down  (Dis): Interface disabled
Uplink State Group      : 1          Status: Enabled, Up
Defer Timer             : 10 sec
Upstream Interfaces     : Po 128 (Up)
Downstream Interfaces   : Te 0/1 (Dwn) Te 0/2 (Dwn) Te 0/3 (Up) Te 0/4 (Dwn) Te
0/5 (Up)
                        Te 0/6 (Dwn) Te 0/7 (Up) Te 0/8 (Up)
Dell#
```

Related Commands

- [show running-config uplink-state-group](#)— displays the current configuration of one or more uplink-state groups.
- [uplink-state-group](#) — create an uplink-state group and enables the tracking of upstream links.

uplink-state-group

Create an uplink-state group and enable the tracking of upstream links on a switch/ router.

Syntax

```
uplink-state-group group-id
```

To delete an uplink-state group, enter the `no uplink-state-group group-id` command.

Parameters

group-id Enter the ID number of an uplink-state group. The range is from 1 to 16.

Defaults

none

Command Modes

CONFIGURATION

Supported Modes

Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information

After you enter the command, to assign upstream and downstream interfaces to the group, enter Uplink-State-Group Configuration mode.

An uplink-state group is considered to be operationally up if at least one upstream interface in the group is in the Link-Up state.

An uplink-state group is considered to be operationally down if no upstream interfaces in the group are in the Link-Up state. No uplink-state tracking is performed when a group is disabled or in an operationally down state.

To disable upstream-link tracking without deleting the uplink-state group, use the `no enable` command in uplink-state-group configuration mode.

Example

```
Dell (conf) #uplink-state-group 16
Dell (conf) #
02:23:17: %RPM0-P:CP %IFMGR-5-ASTATE_UP: Changed uplink state group Admin
state to up: Group 16
```

Related Commands

- [show running-config uplink-state-group](#) — displays the current configuration of one or more uplink-state groups.
- [show uplink-state-group](#) — displays the status information on a specified uplink-state group or all groups.

upstream

Assign a port or port-channel to the uplink-state group as an upstream interface.

Syntax `upstream interface`
To delete an uplink-state group, use the `no upstream interface` command.

Parameters

interface Enter one of the following interface types:

- 10 Gigabit Ethernet: `tengigabitethernet {slot/port | slot/port-range}`
- Port channel: `port-channel {1-512 | port-channel-range}`

Where `port-range` and `port-channel-range` specify a range of ports separated by a dash (-) and/or individual ports/port channels in any order; for example: `tengigabitethernet 0/1-2,5,9,11-12 port-channel 1-3,5`. A comma is required to separate each port and port-range entry.

Defaults none

Command Modes UPLINK-STATE-GROUP

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Usage Information

You can assign physical port or port-channel interfaces to an uplink-state group.

You can assign an interface to only one uplink-state group. Configure each interface assigned to an uplink-state group as either an upstream or downstream interface, but not both.

You can assign individual member ports of a port channel to the group. An uplink-state group can contain either the member ports of a port channel or the port channel itself, but not both.

Example

```
Dell(conf-uplink-state-group-16)# upstream tengigabitethernet 0/1-5
Dell(conf-uplink-state-group-16)#
```

Related Commands

- [downstream](#) — assigns a port or port-channel to the uplink-state group as a downstream interface.
- [uplink-state-group](#) — creates an uplink-state group and enables the tracking of upstream links.

VLAN Stacking

With the virtual local area network (VLAN)-stacking feature (also called stackable VLANs and QinQ), you can “stack” VLANs into one tunnel and switch them through the network transparently.

For more information about basic VLAN commands, refer to the *Virtual LAN (VLAN) Commands* section in the [Layer 2](#) chapter.

Important Points to Remember

- If you do not enable the spanning tree protocol (STP) across the stackable VLAN network, STP bridge protocol data units (BPDUs) from the customer’s networks are tunneled across the stackable VLAN network.
- If you do enable STP across the stackable VLAN network, STP BPDUs from the customer’s networks are consumed and not tunneled across the stackable VLAN network unless you enable protocol tunneling.
- Layer 3 protocols are not supported on a stackable VLAN network.
- Assigning an IP address to a stackable VLAN is supported when all the members are only stackable VLAN trunk ports. IP addresses on a stackable VLAN-enabled VLAN are not supported if the VLAN contains stackable VLAN access ports. This facility is provided for the simple network management protocol (SNMP) management over a stackable VLAN-enabled VLAN containing only stackable VLAN trunk interfaces. Layer 3 routing protocols on such a VLAN are not supported.
- Dell Networking OS recommends that you do not use the same MAC address, on different customer VLANs, on the same stackable VLAN.
- Interfaces configured using stackable VLAN access or stackable VLAN trunk commands do not switch traffic for the default VLAN. These interfaces are switch traffic only when they are added to a non-default VLAN.

Topics:

- [dei enable](#)
- [dei honor](#)
- [dei mark](#)
- [member](#)
- [show interface dei-honor](#)
- [show interface dei-mark](#)
- [vlan-stack access](#)
- [vlan-stack compatible](#)
- [vlan-stack dot1p-mapping](#)
- [vlan-stack protocol-type](#)
- [vlan-stack trunk](#)

dei enable

Make packets eligible for dropping based on their drop eligible indicator (DEI) value.

Syntax `dei enable`

Defaults Packets are colored green; no packets are dropped.

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

dei honor

Honor the incoming DEI value by mapping it to a system drop precedence. Enter the command once for 0 and once for 1.

Syntax `dei honor {0 | 1} {green | red | yellow}`

Parameters

0 1	Enter the bit value you want to map to a color.
green red yellow	Choose a color: <ul style="list-style-type: none">• Green: High priority packets that are the least preferred to be dropped.• Yellow: Lower priority packets that are treated as best-effort.• Red: Lowest priority packets that are always dropped (regardless of congestion status).

Defaults Disabled; Packets with an unmapped DEI value are colored green.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You must first enable DEI for this configuration to take effect.

Related Commands [dei enable](#) — enables DEI.

dei mark

Set the DEI value on egress according to the color currently assigned to the packet.

Syntax `dei mark {green | yellow} {0 | 1}`

Parameters

0 1	Enter the bit value you want to map to a color.
green yellow	Choose a color: <ul style="list-style-type: none">• Green: High priority packets that are the least preferred to be dropped.• Yellow: Lower priority packets that are treated as best-effort.

Defaults All the packets on egress are marked with DEI 0.

Command Modes	INTERFACE	
Supported Modes	Full-Switch	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Usage Information	You must first enable DEI for this configuration to take effect.	
Related Commands	dei enable — enables DEI.	

member

Assign a stackable VLAN access or trunk port to a VLAN. The VLAN must contain the `vlan-stack compatible` command in its configuration.

Syntax `member interface`
 To remove an interface from a Stackable VLAN, use the `no member interface` command.

Parameters

interface	Enter the following keywords and slot/port or number information:
------------------	---

- For a Port Channel interface, enter the keywords `port-channel` then a number. The range is from 1 to 128.
- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.

Defaults Not configured.

Command Modes `conf-if-vl-<vlan-id>-stack`

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information You must enable the stackable VLAN (using the `vlan-stack compatible` command) on the VLAN prior to adding a member to the VLAN.

Related Commands [vlan-stack compatible](#) — enables stackable VLAN on a VLAN.

show interface dei-honor

Display the dei honor configuration.

Syntax `show interface dei-honor [interface slot/port]`

Parameters

interface slot/port	Enter the interface type then the line card slot and port number.
----------------------------	---

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show interface dei-honor

Default Drop precedence: Green
Interface  CFI/DEI          Drop precedence
-----
Te 0/1     0                    Green
Te 0/1     1                    Yellow
Te 1/9     1                    Red
Te 1/12    0                    Yellow

Dell#show interface dei-honor

Default Drop precedence: Green
Interface  CFI/DEI          Drop precedence
-----
Te 0/1     0                    Green
Te 0/1     1                    Yellow
Te 1/2     1                    Red
Te 1/3     0                    Yellow
```

Related Commands [dei honor](#) — honors the incoming DEI value.

show interface dei-mark

Display the dei mark configuration.

Syntax `show interface dei-mark [interface slot/port]`

Parameters *interface slot/port* Enter the interface type then the line card slot and port number.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell#show interface dei-mark

Default CFI/DEI Marking: 0
Interface  Drop precedence  CFI/DEI
-----
Te 0/1     Green           0
Te 0/1     Yellow          1
Te 8/9     Yellow          0
Te 8/12    Yellow          0
```

Related Commands `dei mark` — sets the DEI value on egress.

vlan-stack access

Specify a Layer 2 port or port channel as an access port to the stackable VLAN network.

Syntax `vlan-stack access`
To remove access port designation, use the `no vlan-stack access` command.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Prior to enabling this command, to place the interface in Layer 2 mode, enter the `switchport` command.

To remove the access port designation, remove the port (using the `no member interface` command) from all stackable VLAN enabled VLANs.

vlan-stack compatible

Enable the stackable VLAN feature on a VLAN.

Syntax `vlan-stack compatible`
To disable the Stackable VLAN feature on a VLAN, use the `no vlan-stack compatible` command.

Defaults Not configured.

Command Modes CONF-IF-VLAN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Prior to disabling the stackable VLAN feature, remove the members.

To view the stackable VLANs, use the `show vlan` command in EXEC Privilege mode. Stackable VLANs contain members, designated by the M in the Q column of the command output.

Example

```
Dell#show vlan
Codes: * - Default VLAN, G - GVRP VLANs
```

```

NUM   Status   Q Ports
* 1    Inactive
  2    Active    M Te 1/2
                    M Te 1/0-2
  3    Active    M Po1 (Te 1/3-4)
                    M Te 1/5
                    M Te 1/3
  4    Active    M Po1 (Te 1/3-5)
                    M Te 1/6
                    M Te 1/4
  5    Active    M Po1 (Te 1/5-6)
                    M Te 1/6
                    M Te 1/5
Dell#

```

vlan-stack dot1p-mapping

Map C-Tag dot1p values to an S-Tag dot1p value. You can separate the C-Tag values by commas and dashed ranges are permitted. Dynamic mode CoS overrides any Layer 2 QoS configuration if there is conflicts.

Syntax `vlan-stack dot1p-mapping c-tag-dot1p values sp-tag-dot1p value`

Parameters

c-tag-dot1p value Enter the keyword `c-tag-dot1p` then the customer dot1p value that is mapped to a service provider dot1p value. The range is from 0 to 5.

sp-tag-dot1p value Enter the keyword `sp-tag-dot1p` then the service provider dot1p value. The range is from 0 to 5.

Defaults none

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

vlan-stack protocol-type

Define the stackable VLAN tag protocol identifier (TPID) for the outer VLAN tag (also called the VMAN tag). If you do not configure this command, the system assigns the value 0x9100.

Syntax `vlan-stack protocol-type number`

Parameters

number Enter the hexadecimal number as the stackable VLAN tag. You may specify both bytes of the 2-byte S-Tag TPID. The range is from 0 to FFFF. The default is **9100**.

Defaults 0x9100

Command Modes CONFIGURATION

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

For specific interoperability limitations regarding the S-Tag TPID, refer to the *Dell Networking OS Configuration Guide*.

Related Commands

[portmode hybrid](#) — sets a port (physical ports only) to accept both tagged and untagged frames. A port configured this way is identified as a hybrid port in report displays.

[vlan-stack trunk](#) — specifies a Layer 2 port or port channel as a trunk port to the Stackable VLAN network.

vlan-stack trunk

Specify a Layer 2 port or port channel as a trunk port to the Stackable VLAN network.

Syntax

```
vlan-stack trunk
```

To remove a trunk port designation from the selected interface, use the `no vlan-stack trunk` command.

Defaults

Not configured.

Command Modes

INTERFACE

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

Prior to using this command, to place the interface in Layer 2 mode, execute the `switchport` command.

To remove the trunk port designation, first remove the port (using the `no member interface` command) from all stackable VLAN-enabled VLANs.

Starting with the Dell Networking OS version 7.8.1.0, a VLAN-Stack trunk port is also allowed to be configured as a tagged port and as an untagged port for single-tagged VLANs. When the VLAN-Stack trunk port is also a member of an untagged VLAN, the port must be in Hybrid mode. Refer to [portmode hybrid](#).

In the first example, a VLAN-Stack trunk port is configured and then also made part of a single-tagged VLAN.

In the second example, the tag protocol identifier (TPID) is set to 8848. The “Gi 3/10” Te 3/8 port is configured to act as a VLAN-Stack access port, while the “TenGi 8/0” port acts as a VLAN-Stack trunk port, switching stackable VLAN traffic for VLAN 10, while also switching untagged traffic for VLAN 30 and tagged traffic for VLAN 40. (To allow VLAN 30 traffic, the native VLAN feature is required, by executing the `portmode hybrid` command. Refer to [portmode hybrid](#) in the [Interfaces](#) chapter.

Example

```
Dell (conf-if-Te-0/12) #switchport
Dell (conf-if-Te-0/12) #vlan-stack trunk
Dell (conf-if-Te-0/12) #show config
!
```

```

interface TenGigabitEthernet 0/42
  no ip address
  switchport
  vlan-stack trunk
  no shutdown
Dell(conf-if-Te-0/42)#interface vlan 100
Dell(conf-if-vl-100)#vlan-stack compatible
Dell(conf-if-vl-100-stack)#member TenGigabitEthernet 0/12
Dell(conf-if-vl-100-stack)#show config
!
interface Vlan 100
  no ip address
  vlan-stack compatible
  member TenGigabitEthernet 0/42
  shutdown
Dell(conf-if-vl-100-stack)#interface vlan 20
Dell(conf-if-vl-20)#tagged TengigabitEthernet 0/12
Dell(conf-if-vl-20)#show config
!
interface Vlan 20
  no ip address
  tagged TenGigabitEthernet 0/12
  shutdown
Dell(conf-if-vl-20)#do show vlan
Codes: * - Default VLAN, G - GVRP VLANs
Q: U - Untagged, T - Tagged
   x - Dot1x untagged, X - Dot1x tagged
   G - GVRP tagged, M - Vlan-stack

  NUM  Status Description      Q Ports
*  1   Inactive
   20  Active                  T Te 0/12
   100 Active                  M Te 0/12
Dell(conf-if-vl-20)#

```

Example

```

Dell(config)#vlan-stack protocol-type 88A8
Dell(config)#interface TenGigabitEthernet 3/8
Dell(conf-if-te-3/8)#no shutdown
Dell(conf-if-te-3/8)#switchport
Dell(conf-if-te-3/8)#vlan-stack access
Dell(conf-if-te-3/8)#exit

Dell(config)#interface TenGigabitEthernet 8/0
Dell(conf-if-te-10/0)#no shutdown
Dell(conf-if-te-10/0)#portmode hybrid
Dell(conf-if-te-10/0)#switchport
Dell(conf-if-te-10/0)#vlan-stack trunk
Dell(conf-if-te-10/0)#exit

Dell(config)#interface vlan 20
Dell(conf-if-vlan)#vlan-stack compatible
Dell(conf-if-vlan)#member Te 7/0, te 3/8, TenGi 8/0
Dell(conf-if-vlan)#exit

Dell(config)#interface vlan 20
Dell(conf-if-vlan)#untagged TenGi 8/0
Dell(conf-if-vlan)#exit
Dell(config)#

Dell(config)#interface vlan 40
Dell(conf-if-vlan)#tagged TenGi 8/0
Dell(conf-if-vlan)#exit
Dell(config)#

```

Virtual Link Trunking (VLT)

VLT allows physical links between two chassis to appear as a single virtual link to the network core. VLT eliminates the requirement for Spanning Tree protocols by allowing link aggregation group (LAG) terminations on two separate distribution or core switches, and by supporting a loop-free topology. VLT provides Layer 2 multipathing, creating redundancy through increased bandwidth and enabling multiple parallel paths between nodes and load-balancing traffic where alternative paths exist.

NOTE: When you launch the VLT link, the VLT peer-ship is not established if any of the following is TRUE:

- The VLT System-MAC configured on both the VLT peers do not match.
- The VLT Unit-Id configured on both the VLT peers are identical.
- The VLT System-MAC or Unit-Id is configured only on one of the VLT peers.
- The VLT domain ID is not the same on both peers.

If the VLT peer-ship is already established, changing the System-MAC or Unit-Id does not cause VLT peer-ship to go down.

Also, if the VLT peer-ship is already established and the VLT Unit-Id or System-MAC are configured on both peers, then changing the CLI configurations on the VLT Unit-Id or System-MAC is rejected if any of the following become **TRUE**:

- After making the CLI configuration change, the VLT Unit-Id becomes identical on both peers.
- After making the CLI configuration change, the VLT System-MAC do not match on both peers.

When the VLT peer-ship is already established, you can remove the VLT Unit-Id or System-MAC configuration from either or both peers. However, removing configuration settings can cause the VLT ports to go down if you configure the Unit-Id or System-MAC on only one of the VLT peers.

Topics:

- [back-up destination](#)
- [clear ip mroute](#)
- [clear ip pim tib](#)
- [clear vlt statistics](#)
- [delay-restore abort-threshold](#)
- [lacp ungroup member-independent](#)
- [multicast peer-routing timeout](#)
- [peer-link port-channel](#)
- [peer-routing](#)
- [peer-routing-timeout](#)
- [primary-priority](#)
- [show ip mroute](#)
- [show vlt backup-link](#)
- [show vlt brief](#)
- [show vlt detail](#)
- [show vlt inconsistency](#)
- [show vlt mismatch](#)

- [show vlt role](#)
- [show vlt statistics](#)
- [stack-unit iom-mode](#)
- [system-mac](#)
- [unit-id](#)
- [vlt domain](#)
- [vlt-peer-lag port-channel](#)
- [show vlt private-vlan](#)

back-up destination

Configure the IPv4 or IPv6 address of the management interface on the remote VLT peer to be used as the endpoint of the VLT backup link for sending out-of-band hello messages.

Syntax `back-up destination {[ipv4-address] | [ipv6 ipv6-address] [interval seconds]}`

Parameters	ipv4-address	Enter the IPv4 address of the backup destination.
	ipv6	Enter the keyword <code>ipv6</code> then an IPv6 address in the X:X:X:X format.
	interval seconds	Enter the keyword <code>interval</code> to specify the time interval to send hello messages. The range is from 1 to 5 seconds. The default is 1 second.

Defaults **1 second**

Command Modes VLT DOMAIN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

clear ip mroute

Clear learned multicast routes on the multicast forwarding table. To clear the protocol-independent multicast (PIM) tree information base, use the `clear ip pim tib` command.

Syntax `clear ip mroute {group-address [source-address] | * | snooping}`

Parameters	group-address [source-address]	Enter the multicast group address and source address (if desired), in dotted decimal format, to clear information on a specific group.
	*	Enter <code>*</code> to clear all multicast routes.
	snooping	Enter the keyword <code>snooping</code> to delete multicast snooping route table entries.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

clear ip pim tib

Clear PIM tree information from the PIM database.

Syntax `clear ip pim tib [group]`

Parameters **group** (OPTIONAL) Enter the multicast group address in dotted decimal format (A.B.C.D).

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

If you use this command on a local VLT node, all multicast routes from the local PIM TIB, the entire multicast route table, and all the entries in the data plane are deleted. The entries in Peer PIM TIB (Sync) are not deleted but are marked for re-download. Both local and synced routes are removed from the multicast route table. The peer VLT node clears synced routes from the node.

If you use this command on a peer VLT node, only the synced routes are deleted from the multicast route table.

clear vlt statistics

Clear the statistics on VLT operations.

Syntax `clear vlt statistics [arp | domain | igmp-snoop | mac | multicast | ndp]`

Parameters

domain	Clear the VLT statistics for the domain.
multicast	Clear the VLT statistics for multicast.
mac	Clear the VLT statistics for the MAC address.
arp	Clear the VLT statistics for ARP.
igmp-snoop	Clear the VLT statistics for IGMP snooping.
ndp	Clear the VLT statistics for NDP.

Command Modes EXEC

Supported Modes Programmable-Mux (PMUX)

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
VLT ARP Statistics
-----
ARP Tunnel Pkts sent:0
ARP Tunnel Pkts Rcvd:0
ARP-sync Pkts Sent:0
ARP-sync Pkts Rcvd:0
ARP Reg Request sent:19
ARP Reg Request rcvd:10
```

delay-restore abort-threshold

Increase the Boot Up timer to some value (>60 seconds).

Syntax `delay-restore abort-threshold <interval>`
To remove use the `no delay-restore abort-threshold` command.

Defaults 60 seconds

Command Modes VLT DOMAIN

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on Supported on the MXL 10/40GbE Switch IO Module.

Parameter Enter the value (in seconds) to specify the time interval for delay restore timer to abort. This timer is applicable only during reload/boot-up and not in other scenarios (example, ICL flap).

The range is from 1 to 1800 seconds.

Usage Information To abort VLT delay restore timer as the maximum threshold, the maximum time interval is applied to hold down ICL peer-up in the start-up configurations during the reload.

lACP ungroup member-independent

Prevent possible loop during the bootup of a VLT peer switch or a device that accesses the VLT domain.

Syntax	<code>lACP ungroup member-independent {vlt port-channel}</code>	
Parameters	port-channel	Force all LACP port-channel members to become switchports.
	vlt	Force all VLT LACP members to become switchports.
Defaults	Not configured.	
Command Modes	CONFIGURATION	
Supported Modes	Programmable-Mux (PMUX)	
	Full-Switch	

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information LACP on the VLT ports (on a VLT switch or access device), which are members of the virtual link trunk, is not brought up until the VLT domain is recognized on the access device.

To ungroup the VLT and port-channel configurations, use the **no lACP ungroup member independent** command on a VLT port channel, depending on whether the port channel is VLT or non-VLT.

Example

```
Dell(conf)#lACP ungroup member-independent ?
port-channel          LACP port-channel members become switchports
vlt                   All VLT LACP members become switchports
```

multicast peer-routing timeout

Configure the time for a VLT node to retain synced multicast routes or synced multicast outgoing interface (OIF) after a VLT peer node failure.

Syntax	<code>multicast peer-routing timeout value</code> To restore the default value, use the <code>no multicast peer-routing timeout</code> command.	
Parameters	value	Enter the timeout value in seconds. The range is from 1 to 1200. The default is 150.
Default	Not configured.	
Command Modes	VLT DOMAIN (conf-vlt-domain)	
Supported Modes	Full-Switch	
Command History	Version	Description

9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

peer-link port-channel

Configure the specified port channel as the chassis interconnect trunk between VLT peers in the domain.

Syntax `peer-link port-channel port-channel-number {peer-down-vlan vlan id}`

Parameters

port-channel-number	Enter the port-channel number that acts as the interconnect trunk.
peer-down-vlan vlan id	Enter the keyword <code>peer-down-vlan</code> then a VLAN ID to configure the VLAN that the VLT peer link uses when the VLT peer is down.

Defaults Not configured.

Command Modes VLT DOMAIN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information To configure the VLAN from where the VLT peer forwards packets received over the VLTi from an adjacent VLT peer that is down, use the **peer-down-vlan** parameter. To ensure that the DHCP discover packets are forwarded to the VLAN that has the DHCP server, use this configuration.

peer-routing

Enable L3 VLT peer-routing. This command is applicable for both IPV6/ IPV4.

Syntax `peer-routing`
To disable L3 VLT peer-routing, use the `no peer-routing` command.

Defaults Disabled.

Command Modes VLT DOMAIN (conf-vlt-domain)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the IPV6/IPV4 support on the MXL.

9.2(0.0)

Introduced on the MXL 10/40GbE Switch IO Module.

peer-routing-timeout

Configure the timeout for the software to wait before connecting to a VLT peer with a Down status. This command is applicable for both IPV6/ IPV4.

Syntax `peer-routing-timeout value`

To restore the default value, use the `no peer-routing-timeout` command.

Parameters

value Enter the timeout value in seconds. The range is from 1 to 65535. The default value is 0 (no timeout).

Command Modes VLT DOMAIN (conf-vlt-domain)

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Added the IPV6/IPV4 support on the MXL.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information When the timer expires, the software checks to see if the VLT peer is now available. If the VLT peer is not available, peer-routing is disabled on that peer.

primary-priority

Reconfigure the primary role of VLT peer switches.

Syntax `primary-priority value`

Parameters

value To configure the primary role on a VLT peer, enter a lower value than the priority value of the remote peer. The range is from 1 to 65535.

Default **32768**

Command Modes VLT DOMAIN

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information After you configure the VLT domain on each peer switch on both sides of the interconnect trunk, by default, the software elects a primary and secondary VLT peer device. To reconfigure the primary role of VLT peer switches, use the `priority` command.

show ip mroute

View the multicast routing table.

Syntax `show ip mroute [static | group-address [source-address] | count | snooping [vlan vlan-id] [group-address [source-address]] | summary | vlt [group-address | count]`

Parameters	Static	(OPTIONAL) Enter the keyword <code>static</code> to view static multicast routes.
	group-address [source-address]	(OPTIONAL) Enter the multicast group-address to view only routes associated with that group. Enter the source-address to view routes with that group-address and source-address.
	count	(OPTIONAL) Enter the keyword <code>count</code> to view the number of multicast routes and packets.
	snooping [vlan vlan-id] [group-address [source-address]]	(OPTIONAL) Enter the keyword <code>snooping</code> to display information on the multicast routes PIM-SM snooping discovers. Enter a VLAN ID to limit the information displayed to the multicast routes PIM-SM snooping discovers on a specified VLAN. The VLAN ID range is from 1 to 4094. Enter a multicast group address and, optionally, a source multicast address in dotted decimal format (A.B.C.D) to limit the information displayed to the multicast routes PIM-SM snooping discovers for a specified multicast group and source.
	summary	(OPTIONAL) Enter the keyword <code>summary</code> to view routes in a tabular format.
	vlt	(OPTIONAL) Enter the keyword <code>vlt</code> to view multicast routes with a spanned incoming interface. Enter a multicast group address in dotted decimal format (A.B.C.D) to limit the information displayed to the multicast routes for a specified multicast group.
	count	Enter the keyword <code>count</code> to display VLT route and packet data.

- Command Modes**
- EXEC
 - EXEC Privilege

Supported Modes Full-Switch

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show ip mroute` command shown in the examples.

Field	Description
(S, G)	Displays the forwarding entry in the multicast route table.
uptime	Displays the amount of time the entry has been in the multicast forwarding table.

Field	Description
Incoming interface	Displays the reverse path forwarding (RPF) information towards the source for (S,G) entries and the RP for (*,G) entries.
Outgoing interface list:	Lists the interfaces that meet one of the following: <ul style="list-style-type: none"> · a directly connected member of the Group · statically configured member of the Group · received a (*,G) or (S,G) Join message

Example (static)

```
Dell#show ip mroute static
Mroute: 23.23.23.0/24, interface: Lo 2
Protocol: static, distance: 0, route-map: none, last change:
00:00:23
```

Example (snooping)

```
Dell#show ip mroute snooping
IPv4 Multicast Snooping Table (*, 224.0.0.0), uptime 17:46:23
Incoming vlan: Vlan 2
Outgoing interface list:
TenGigabitEthernet 4/1

(*, 225.1.2.1), uptime 00:04:16
Incoming vlan: Vlan 2
Outgoing interface list:
TenGigabitEthernet 4/2
TenGigabitEthernet 4/3

(165.87.1.7, 225.1.2.1), uptime 00:03:17
Incoming vlan: Vlan 2
Outgoing interface list:
TenGigabitEthernet 4/1
TenGigabitEthernet 4/2
TenGigabitEthernet 4/3
TenGigabitEthernet 4/4
TenGigabitEthernet 4/5
```

Example (detail)

```
Dell#show ip mroute
IP Multicast Routing Table

(*, 224.10.10.1), uptime 00:05:12
Incoming interface: TenGigabitEthernet 3/1
Outgoing interface list:
GigabitEthernet 3/2

(1.13.1.100, 224.10.10.1), uptime 00:04:03
Incoming interface: TenGigabitEthernet 3/4
Outgoing interface list:
TenGigabitEthernet 3/4
TenGigabitEthernet 3/5

(*, 224.20.20.1), uptime 00:05:12
Incoming interface: TenGigabitEthernet 3/2
Outgoing interface list:
TenGigabitEthernet 3/4
Outgoing interface 1
TenGigabitEthernet 3/3
```

show vlt backup-link

Displays information on the backup link operation.

Syntax show vlt backup-link

Default Not configured.

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell# show vlt backup-link
VLT Backup Link
-----
Destination:                169.254.31.23
Peer HeartBeat status:      Up
HeartBeat Timer Interval:   1
HeartBeat Timeout:          3
UDP Port:                   34998
HeartBeat Messages Sent:    24
HeartBeat Messages Received: 25
```

show vlt brief

Display brief status information about VLT domains currently configured on the switch.

Syntax show vlt brief

Default Not configured.

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example (Brief)

```
Dell#show vlt br
VLT Domain Brief
-----
Domain ID                : 1
Role                     : Secondary
Role Priority              : 32768
ICL Link Status           : Up
HeartBeat Status          : Up
VLT Peer Status           : Up
```

```

Version : 6(3)
Local System MAC address : 00:01:e8:8a:e9:91
Remote System MAC address : 00:01:e8:8a:e9:76
Remote system version : 6(3)
Delay-Restore timer : 90 seconds

Delay-Restore Abort Threshold : 60 seconds
Peer-Routing : Disabled
Peer-Routing-Timeout timer : 0 seconds
Multicast peer-routing timeout : 150 seconds
Dell#

```

show vlt detail

Displays detailed status information about VLT domains currently configured on the switch.

Syntax `show vlt detail`

Default Not configured.

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```

Dell# show vlt detail
Local LAG Id Peer LAG Id Local Status Peer Status Active VLANs
-----
128          128          UP          UP          1000
Dell#

```

show vlt inconsistency

Display deviations in VLT multicast traffic.

Syntax `show vlt inconsistency ip mroute`

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.2(0.0)	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```

Dell#show vlt inconsistency ip mroute
Spanned Multicast Routing IIF Inconsistency

Multicast Route          LocalIIF          PeerIIF
-----
(22.22.22.200, 225.1.1.2)  VLAN 5           VLAN 6

```

```
(* , 225.1.1.2) VLAN 15 te 0/5
Dell#
```

show vlt mismatch

Display mismatches in VLT parameters.

Syntax `show vlt mismatch`

Command Modes EXEC

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show vlt mismatch
Domain
-----
Parameters          Local          Peer
-----
Unit-ID             0              15

Vlan-config
-----
Vlan-ID             Local Mode     Peer Mode
-----
100                  --             L3

Vlan IPV4 Multicast Status
-----
Vlan-ID             Local Status   Peer Status
-----
4094                 Active         Inactive

Dell#
```

show vlt role

Display the VLT peer status, role of the local VLT switch, VLT system MAC address and system priority, and the MAC address and priority of the locally-attached VLT device.

Syntax `show vlt role`

Default Not configured.

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show vlt role
VLT Role
-----
VLT Role: Primary
System MAC address: 00:01:05:08:02:05
Primary Role Priority: 32768
Local System MAC address: 00:01:e8:00:ab:03
Local System Role Priority: 32768
Local Unit Id: 0
Dell#
```

show vlt statistics

Displays statistics on VLT operations.

Syntax show vlt statistics

Default Not configured.

Command Modes EXEC

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Example

```
Dell#show vlt statistics
VLT Domain Statistics
-----
HeartBeat Messages Sent: 449
HeartBeat Messages Received: 448
ICL Hello's Sent: 154
ICL Hello's Received: 154
Domain Mismatch Errors: 0
Version Mismatch Errors: 0
Config Mismatch Errors: 0

VLT MAC Statistics
-----
L2 Info Pkts sent:16, L2 Mac-sync Pkts Sent:25
L2 Info Pkts Rcvd:15, L2 Mac-sync Pkts Rcvd:24
L2 Reg Request sent:2
L2 Reg Request rcvd:1
L2 Reg Response sent:1
L2 Reg Response rcvd:1

VLT Igmp-Snooping Statistics
-----
IGMP Info Pkts sent: 9
IGMP Info Pkts Rcvd: 10
```

```

IGMP Reg Request sent:      2
IGMP Reg Request rcvd:     2
IGMP Reg Response sent:    2
IGMP Reg Response rcvd:    1
IGMP PDU Tunnel Pkt sent:  0
IGMP PDU Tunnel Pkt rcvd:  0
IGMP Tunnel PDUs sent:     0
IGMP Tunnel PDUs rcvd:     0

VLT ARP Statistics
-----
ARP Tunnel Pkts sent:0
ARP Tunnel Pkts Rcvd:0
ARP Tunnel Pkts sent Non Vlt:0
ARP Tunnel Pkts Rcvd Non Vlt:0
ARP-sync Pkts Sent:0
ARP-sync Pkts Rcvd:0
ARP Reg Request sent:2
ARP Reg Request rcvd:1
VLT IOA Statistics
-----
IOA Info Pkts sent:      5
IOA Info Pkts Rcvd:     7
IOA Reg Request sent:   2
IOA Reg Request rcvd:   2
IOA Reg Response sent:  2
IOA Reg Response rcvd:  1
VLT NDP Statistics
-----
NDP NA VLT Tunnel Pkts sent:0
NDP NA VLT Tunnel Pkts Rcvd:0
NDP NA Non-VLT Tunnel Pkts sent:0
NDP NA Non-VLT Tunnel Pkts Rcvd:0
Ndp-sync Pkts Sent:0
Ndp-sync Pkts Rcvd:0
Ndp Reg Request sent:2
Ndp Reg Request rcvd:1
VLT multicast not enabled

```

stack-unit iom-mode

Set the switch operating mode to VLT mode.

Syntax `stack-unit <unit-number> iom-mode vlt`

Parameters

- unit number <0-5>** Enter the number of the member stack unit. The range is from 0 to 5. The default is 0.
- vlt** Enable virtual link trunking mode.

Command Modes CONFIGURATION

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information This command resets the operating mode to VLT. You must reboot the switch after using this command.

system-mac

Reconfigure the default MAC address for the domain.

Syntax `system-mac mac-address`

Parameters **mac-address** Enter the system MAC address for the VLT domain.

Defaults Not configured.

Command Modes VLT DOMAIN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information

When you create a VLT domain on a switch, Dell Networking OS automatically creates a VLT-system MAC address used for internal system operations.

To reconfigure the default MAC address for the domain by entering a new MAC address in the format nn:nn:nn:nn:nn:nn, use the `system-mac` command.

You must also reconfigure the same MAC address on the VLT peer switch.

unit-id

Explicitly configure the default unit ID of a VLT peer switch.

Syntax `unit-id [0 | 1]`

Parameters **0 | 1** Configure the default unit ID of a VLT peer switch. Enter 0 for the first peer or enter 1 for the second peer.

Defaults Automatically assigned based on the MAC address of each VLT peer. The peer with the lower MAC address is assigned unit 0; the peer with the higher MAC address is assigned unit 1.

Command Modes VLT DOMAIN

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information

When you create a VLT domain on a switch, Dell Networking OS automatically assigns a unique unit ID (0 or 1) to each peer switch. The unit IDs are used for internal system operations. Use the `unit-id` command to explicitly configure the unit ID of a VLT peer. Configure a different unit ID (0 or 1) on each peer switch.

To minimize the time required for the VLT system to determine the unit ID assigned to each peer switch when one peer reboots, use this command.

vlt domain

Enable VLT on a switch, configure a VLT domain, and enter VLT-domain configuration mode.

Syntax `vlt domain domain-id`

Parameters

<i>domain-id</i>	Enter the Domain ID number. Configure the same domain ID on the peer switch. The range of domain IDs is from 1 to 1000.
------------------	---

Command Modes CONFIGURATION

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

Usage Information The VLT domain ID must be the same between the two VLT devices. If the domain ID is not the same, a syslog message is generated and VLT does not launch.

vlt-peer-lag port-channel

Associate the port channel to the corresponding port channel in the VLT peer for the VLT connection to an attached device.

Syntax `vlt-peer-lag port-channel id-number`

Parameters

<i>id-number</i>	Enter the respective vlt port-channel number of the peer device.
------------------	--

Defaults Not configured.

Command Modes INTERFACE PORT-CHANNEL

Supported Modes Programmable-Mux (PMUX)
Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
9.2(0.0)	Supported on the M I/O Aggregator.

show vlt private-vlan

Display the association of private VLAN (PVLAN) with the VLT LAG. You can configure VLT peer nodes in a PVLAN on the switch.

Syntax `show vlt private-vlan`

Command Modes EXEC

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the MXL 10/40GbE Switch IO Module platform.

Usage Information

If you add an ICL or VLTi link as a member of a primary VLAN, the ICL becomes a part of the primary VLAN and its associated secondary VLANs, similar to the behavior for normal trunk ports. VLAN symmetry is not validated if you associate an ICL to a PVLAN. Similarly, if you dissociate an ICL from a PVLAN, although the PVLAN symmetry exists, ICL is removed from that PVLAN in such a case. The **ICL Status** field denotes the type of the VLAN port of the VLTi link configured in a PVLAN.

Example

```
Dell#Show vlt private-vlan vlan-id
Codes: C- Community, I - Isolated, V - Internally tagged, T - tagged, * - VLT
Pvlan
Primary   Secondary   ICL Status
10                V (*)
           20 (C)     V
           30 (I)     V
40                T
           50 (C)     T
           60 (I)     T
Dell#
```

Virtual Router Redundancy Protocol (VRRP)

Virtual router redundancy protocol (VRRP) is supported by the Dell Networking Operating System (OS) for IPv4 and IPv6.

The following commands apply to both VRRP IPv4 and IPv6:

- advertise-interval
- description
- disable
- hold-time
- preempt
- priority
- show config
- track
- virtual-address

VRRP ipv6 are in the [VRRP for IPv6 Commands](#) section.

Topics:

- [advertise-interval](#)
- [authentication-type](#)
- [clear counters vrrp](#)
- [debug vrrp](#)
- [description](#)
- [disable](#)
- [hold-time](#)
- [preempt](#)
- [priority](#)
- [show config](#)
- [show vrrp](#)
- [track](#)
- [virtual-address](#)
- [vrrp delay minimum](#)
- [vrrp delay reload](#)
- [vrrp-group](#)
- [VRRP for IPv6 Commands](#)
- [clear counters vrrp ipv6](#)
- [debug vrrp ipv6](#)
- [show vrrp ipv6](#)
- [vrrp-ipv6-group](#)
- [version](#)

advertise-interval

Set the time interval between VRRP advertisements.

Syntax `advertise-interval {seconds | centiseconds centiseconds}`
To return to the default settings, use the `no advertise-interval` command.

Parameters

seconds	Enter a number of seconds. The range is from 1 to 255. The default is 1 second .
centiseconds centiseconds	Enter the keyword <code>centiseconds</code> followed by the number of centiseconds in multiple of 25 centiseconds. The range is 25 to 4075 centiseconds in multiples of 25 centiseconds.

Defaults **1 second or 100 centiseconds**

Command Modes INTERFACE-VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the support for centiseconds on the MXL 10/40GbE Switch .
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information Dell Networking OS recommends keeping the default setting for this command. If you do change the time interval between VRRP advertisements on one router, change it on all routers.

authentication-type

Enable authentication of VRRP data exchanges.

Syntax `authentication-type simple [encryption-type] password`
To delete an authentication type and password, use the `no authentication-type` command.

Parameters

simple	Enter the keyword <code>simple</code> to specify simple authentication.
encryption-type	(OPTIONAL) Enter one of the following numbers: <ul style="list-style-type: none">• 0 (zero) specifies an un-encrypted authentication data follows.• 7 (seven) specifies a hidden authentication data follows.
password	Enter a character string up to eight characters long as a password. If you do not enter an encryption-type, the password is stored as clear text.

Defaults Not configured.

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The given password is encrypted by the system and the `show config` displays an encrypted text string for any of the encrypted typed used.

clear counters vrrp

Clear the counters maintained on VRRP operations.

Syntax `clear counters vrrp [vrrp-id]`

Parameters *vrrp-id* (OPTIONAL) Enter the number of the VRRP group ID. The range is from 1 to 255.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

NOTE: This command also enables you to clear the port configurations corresponding to a range of ports.

- You can specify multiple ports as slot/port-range. For example, if you want to clear the port configurations corresponding to all ports between 1 and 4, specify the port range as `clear counters interfaces interface-type 1/1 - 4`.

debug vrrp

Allows you to enable debugging of VRRP.

Syntax `debug vrrp interface [vrrp-id] {all | packets | state | timer}`

To disable debugging, use the `no debug vrrp interface [vrrp-id] {all | packets | state | timer}` command.

Parameters

<i>interface</i>	Enter the following keywords and slot/port or number information <ul style="list-style-type: none"> For Port Channel interface types, enter the keywords <code>port-channel</code> then the number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN interface, enter the keyword <code>vlan</code> then the VLAN ID. The VLAN ID range is from 1 to 4094.
<i>vrrp-id</i>	(OPTIONAL) Enter a number from 1 to 255 as the VRRP group ID.
<i>all</i>	Enter the keyword <code>all</code> to enable debugging of all VRRP groups.

packets	Enter the keyword <code>packets</code> to enable debugging of VRRP control packets.
state	Enter the keyword <code>state</code> to enable debugging of VRRP state changes.
timer	Enter the keyword <code>timer</code> to enable debugging of the VRRP timer.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If you do not specify options, debug is active on all interfaces and all VRRP groups.

description

Configure a short text string describing the VRRP group.

Syntax `description text`
 To delete a VRRP group description, use the `no description` command.

Parameters

text	Enter a text string up to 80 characters long.
-------------	---

Defaults Not enabled.

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

disable

Disable a VRRP group.

Syntax `disable`
 To re-enable a disabled VRRP group, use the `no disable` command.

Defaults Enabled.

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information To enable VRRP traffic, assign an IP address to the VRRP group using the `virtual-address` command and enter `no disable`.

Related Commands [virtual-address](#) — specifies the IP address of the virtual router.

hold-time

Specify a delay (in seconds) before a switch becomes the MASTER virtual router. By delaying the initialization of the VRRP MASTER, the new switch can stabilize its routing tables.

Syntax `hold-time {seconds | centiseconds centiseconds}`
To return to the default value, use the `no hold-time` command.

Parameters

<code>seconds</code>	Enter a number of seconds. The range is from 0 to 65535. The default is zero (0) seconds .
<code>centiseconds centiseconds</code>	Enter the keyword <code>centiseconds</code> then the number of centiseconds in units of 25 centiseconds. The range is from 0 to 65525 in units of 25 centiseconds.

Defaults **zero (0) seconds**

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.5(0.0)	Introduced the support for centiseconds on the MXL 10/40GbE Switch.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If a switch is a MASTER and you change the hold timer, disable and re-enable VRRP for the new hold timer value to take effect.

Related Commands [disable](#) — disables a VRRP group.

preempt

To preempt or become the MASTER router, permit a BACKUP router with a higher priority value.

Syntax `preempt`
To prohibit preemption, use the `no preempt` command.

Defaults Enabled (that is, a BACKUP router can preempt the MASTER router).

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

priority

Specify a VRRP priority value for the VRRP group. The VRRP protocol uses this value during the MASTER election process.

Syntax

`priority priority`

To return to the default value, use the `no priority` command.

Parameters

priority	Enter a number as the priority. Enter 255 only if the router's virtual address is the same as the interface's primary IP address (that is, the router is the OWNER). The range is from 1 to 255. The default is 100 .
-----------------	--

Defaults

100

Command Modes

VRRP

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

To guarantee that a VRRP group becomes MASTER, configure the VRRP group's virtual address with same IP address as the interface's primary IP address and change the priority of the VRRP group to 255.

If you set the `priority` command to 255 and the `virtual-address` is not equal to the interface's primary IP address, an error message appears.



NOTE: Configuring VRRP priority 255 on an interface on which DHCP Client is enabled is not supported.

show config

View the non-default VRRP configuration.

Syntax

`show config [verbose]`

Parameters

verbose	(OPTIONAL) Enter the keyword <code>verbose</code> to view all VRRP group configuration information, including defaults.
----------------	---

Command Modes

VRRP

Supported Modes

Full-Switch

Command History

Version	Description
---------	-------------

9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Example

```
Dell(conf-if-vrid-4)#show con
 vrrp-group 4
  virtual-address 119.192.182.124
!
```

show vrrp

View the VRRP groups that are active. If no VRRP groups are active, the system returns `No Active VRRP group`.

Syntax `show vrrp [vrrp-id] [interface] [brief]`

Parameters

vrrp-id	(OPTIONAL) Enter the Virtual Router Identifier for the VRRP group to view only that group. The range is from 1 to 255.
interface	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For Port Channel interface types, enter the keywords <code>port-channel</code> then the number. The range is from 1 to 128. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN interface, enter the keyword <code>vlan</code> then the VLAN ID. The VLAN ID range is from 1 to 4094.
brief	(OPTIONAL) Enter the keyword <code>brief</code> to view a table of information on the VRRP groups.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The following describes the `show vrrp brief` command shown in the following example.

Item	Description
Interface	Lists the interface type, slot and port on which the VRRP group is configured.
Grp	Displays the VRRP group ID.
Pri	Displays the priority value assigned to the interface. If the <code>track</code> command is configured to track that interface and the interface is disabled, the cost is subtracted from the priority value assigned to the interface.
Pre	States whether preempt is enabled on the interface. <ul style="list-style-type: none"> Y = Preempt is enabled.

Item	Description
	<ul style="list-style-type: none"> · N = Preempt is not enabled.
State	Displays the operational state of the interface by using one of the following: <ul style="list-style-type: none"> · NA/IF (the interface is not available). · MASTER (the interface associated with the MASTER router). · BACKUP (the interface associated with the BACKUP router).
Master addr	Displays the IP address of the MASTER router.
Virtual addr(s)	Displays the virtual IP addresses of the VRRP routers associated with the interface.

Example (Brief)

```
Dell>Interface Grp Pri Pre State Master addr Virtual addr(s)
Description-----
TenGig 1/9 1 100 Y Master 200.200.200.200 200.200.200.201
TenGig 1/9 2 100 Y Master 200.200.200.200 200.200.200.202 200.200.200.203
Description
TenGig1/9 3 100 Y Master 1.1.1.1 1.1.1.2
TenGig1/9 4 100 Y Master 200.200.200.200 200.200.200.206 200.200.200.207 ...
short
desc
Dell>
```

Usage Information

The following describes the `show vrrp` command shown in the following example.

Item	Description
State: master...	Displays the interface's state: <ul style="list-style-type: none"> · Na/If (not available) · master (MASTER virtual router) · backup (BACKUP virtual router) <p>the interface's priority and the IP address of the MASTER.</p>
Hold Down:...	This line displays additional VRRP configuration information: <ul style="list-style-type: none"> · Hold Down displays the hold down timer interval in seconds. · Preempt displays TRUE if preempt is configured and FALSE if preempt is not configured. · AdvInt displays the Advertise Interval in seconds.
Adv rcvd:...	This line displays counters for the following: <ul style="list-style-type: none"> · Adv rcvd displays the number of VRRP advertisements received on the interface. · Adv sent displays the number of VRRP advertisements sent on the interface. · Gratuitous ARP sent displays the number of gratuitous ARPs sent.
Virtual MAC address	Displays the virtual MAC address of the VRRP group.
Virtual IP address	Displays the virtual IP address of the VRRP router to which the interface is connected.
Authentication:...	States whether authentication is configured for the VRRP group. If it is, the authentication type and the password are listed.

Item	Description
Tracking states..	This line is displayed if the <code>track</code> command is configured on an interface. Below this line, the following information on the tracked interface is displayed: <ul style="list-style-type: none"> • Dn or Up states whether the interface is down or up. • the interface type slot/port information.

Example

```
Dell>show vrrp
-----
TenGigabitEthernet 1/3, VRID: 1, Net: 10.1.1.253
VRF: 0 default
State: Master, Priority: 105, Master: 10.1.1.253 (local)
Hold Down: 0 sec, Preempt: TRUE, AdvInt: 1 sec
Adv rcvd: 0, Adv sent: 1862, Gratuitous ARP sent: 0
Virtual MAC address:
  00:00:5e:00:01:01
Virtual IP address:
  10.1.1.252
Authentication: (none)
Tracking states for 1 interfaces:
  Up TenGigabitEthernet 1/13 priority-cost 10
-----
TenGigabitEthernet 1/4, VRID: 2, Net: 10.1.2.253
VRF: 0 default
State: Master, Priority: 110, Master: 10.1.2.253 (local)
Hold Down: 10 sec, Preempt: TRUE, AdvInt: 1 sec
Adv rcvd: 0, Adv sent: 1862, Gratuitous ARP sent: 0
Virtual MAC address:
  00:00:5e:00:01:02
Virtual IP address:
  10.1.2.252
Authentication: (none)
Tracking states for 2 interfaces:
  Up TenGigabitEthernet 2/1 priority-cost 10
  Up TenGigabitEthernet 3/8 priority-cost 10
Dell>
```

track

Monitor an interface and lower the priority value of the VRRP group on that interface if it is disabled.

Syntax `track interface [priority-cost cost]`

To disable monitoring, use the `no track interface` command.

Parameters

interface	(OPTIONAL) Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> • For a Loopback interface, enter the keyword <code>loopback</code> then a number from 0 to 16383. • For Port Channel interface types, enter the keywords <code>port-channel</code> then the number. The range is from 1 to 128. • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a VLAN interface, enter the keyword <code>vlan</code> then the VLAN ID. The VLAN ID range is from 1 to 4094.
------------------	--

cost (OPTIONAL) Enter a number as the amount to be subtracted from the priority value. The range is 1 to 254. The default is **10**.

Defaults cost = **10**

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If the interface is disabled, the cost value is subtracted from the priority value and forces a new MASTER election if the priority value is lower than the priority value in the BACKUP virtual routers.

virtual-address

Configure up to 12 IP addresses of virtual routers in the VRRP group. To start sending VRRP packets, set at least one virtual address for the VRRP group.

Syntax

```
virtual-address ip-address1 [... ip-address12]
```

To delete one or more virtual IP addresses, use the `no virtual-address ip-address1 [... ip-address12]` command.

Parameters

ip-address1 Enter an IP address of the virtual router in dotted decimal format. The IP address must be on the same subnet as the interface's primary IP address.

... ip-address12 (OPTIONAL) Enter up to 11 additional IP addresses of virtual routers in dotted decimal format. Separate the IP addresses with a space. The IP addresses must be on the same subnet as the interface's primary IP address.

Defaults Not configured.

Command Modes VRRP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

The VRRP group only becomes active and sends VRRP packets when a virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

A system message appears after you enter or delete the `virtual-address` command.

To guarantee that a VRRP group becomes MASTER, configure the VRRP group's virtual address with the same IP address as the interface's primary IP address and change the priority of the VRRP group to 255.

You can ping the virtual addresses configured in all VRRP groups.

vrrp delay minimum

Set the delay time for VRRP initialization after an interface comes up.

Syntax `vrrp delay minimum seconds`

Parameters ***seconds*** Enter the number of seconds for the delay for VRRP initialization after an interface becomes operational. The range is from 0 to 900 (0 indicates no delay).

Defaults 0

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information This command applies to a single interface. When used with the `vrrp delay reload` CLI, the later timer rules the VRRP enabling. For example, if `vrrp delay reload` is 600 and the `vrrp delay minimum` is 300:

- When the system reloads, VRRP waits 600 seconds (10 minutes) to bring up VRRP on all interfaces that are up and configured for VRRP.
- When an interface comes up, whether as part of a system reload or an interface reload, the system waits 300 seconds (5 minutes) to bring up VRRP on that interface.

Related Command [vrrp delay reload](#) — sets the delay time for VRRP initialization after a system reboot.

vrrp delay reload

Set the delay time for VRRP initialization after a system reboot.

Syntax `vrrp delay reload seconds`

Parameters ***seconds*** Enter the number of seconds for the delay. The range is from 0 to 900 (0 indicates no delay).

Defaults 0

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

This command applies to all the VRRP configured interfaces on a system. When used with the `vrrp delay minimum` CLI, the later timer rules the VRRP enabling. For example, if `vrrp delay reload` is 600 and the `vrrp delay minimum` is 300:

- When the system reloads, VRRP waits 600 seconds (10 minutes) to bring up VRRP on all interfaces that are up and configured for VRRP.
- When an interface comes up, whether as part of a system reload or an interface reload, the system waits 300 seconds (5 minutes) to bring up VRRP on that interface.

Save the configuration and reload the system for the delay timers to take effect.

Related Command `vrrp delay minimum` — sets the delay time for VRRP initialization after a line card reboot.

vrrp-group

Assign a VRRP ID to an interface. You can configure up to 12 VRRP groups per interface.

Syntax `vrrp-group vrrp-id`

Parameters `vrrp-id` Enter a number as the group ID. The range is from 1 to 255.

Defaults Not configured.

Command Modes INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The VRRP group only becomes active and sends VRRP packets when a virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

Related Command `virtual-address` — assigns up to 12 virtual IP addresses per VRRP group.

VRRP for IPv6 Commands

The following commands apply to IPv6.

clear counters vrrp ipv6

Clear the counters recorded for IPv6 VRRP groups.

Syntax `clear counters vrrp ipv6 [vrid | vrf instance]`

Parameters

- `vrid` (OPTIONAL) Enter the number of an IPv6 VRRP group. The range is from 1 to 255.
- `vrf instance` (OPTIONAL) Enter the name of a VRF instance (32 characters maximum) to clear the counters of all IPv6 VRRP groups in the specified VRF.

Defaults	Not configured
Command Modes	INTERFACE
Supported Modes	Full-Switch
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information

NOTE: This command also enables you to clear the port configurations corresponding to a range of ports.

- You can specify multiple ports as slot/port-range. For example, if you want to clear the port configurations corresponding to all ports between 1 and 4, specify the port range as `clear counters interfaces interface-type 1/1 - 4`.

debug vrrp ipv6

Allows you to enable debugging of VRRP.

Syntax `debug vrrp ipv6 interface [vrid] {all | packets | state | timer}`

Parameters

interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. For a VLAN interface, enter the keyword <code>vlan</code> then the VLAN ID. The VLAN ID range is from 1 to 4094.
vrid	(OPTIONAL) Enter a number from 1 to 255 as the VRRP group ID.
all	Enter the keyword <code>all</code> to enable debugging of all VRRP groups.
packets	Enter the keyword <code>packets</code> to enable debugging of VRRP control packets.
state	Enter the keyword <code>state</code> to enable debugging of VRRP state changes.
timer	Enter the keyword <code>timer</code> to enable debugging of the VRRP timer.

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information If no options are specified, debug is active on all interfaces and all VRRP groups.

show vrrp ipv6

View the IPv6 VRRP groups that are active. If no VRRP groups are active, the system returns `No Active VRRP group`.

Syntax `show vrrp ipv6 [vrid] [interface] [brief]`

Parameters	vrid	(OPTIONAL) Enter the virtual router identifier for the VRRP group to view only that group. The range is from 1 to 255.
	interface	Enter the following keywords and slot/port or number information: <ul style="list-style-type: none">For a Port Channel interface, enter the keywords <code>port-channel</code> then a number. The range is from 1 to 128.For SONET interfaces, enter the keyword <code>sonet</code> then the slot/port information.For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.For a VLAN interface, enter the keyword <code>vlan</code> then the VLAN ID. The VLAN ID range is from 1 to 4094.
	brief	(OPTIONAL) Enter the keyword <code>brief</code> to view a table of information on the VRRP groups.

- Command Modes**
- EXEC
 - EXEC Privilege

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Usage Information The following describes the `show vrrp ipv6` command shown in the following example.

Line Beginning with	Description
GigabitEthernet...	Displays the Interface, the VRRP group ID, and the network address. If the interface is not sending VRRP packets, 0.0.0.0 appears as the network address.
State: master...	Displays the interface's state: <ul style="list-style-type: none">Na/If (not available).master (MASTER virtual router).backup (BACKUP virtual router). the interface's priority and the IP address of the MASTER.
Hold Down:...	This line displays additional VRRP configuration information: <ul style="list-style-type: none">Hold Down displays the hold down timer interval in seconds.Preempt displays TRUE if preempt is configured and FALSE if preempt is not configured.AdvInt displays the Advertise Interval in seconds.

Line Beginning with	Description
Adv rcvd:...	This line displays counters for the following: <ul style="list-style-type: none"> Adv rcvd displays the number of VRRP advertisements received on the interface. Adv sent displays the number of VRRP advertisements sent on the interface. Bad pkts rcvd displays the number of invalid packets received on the interface.
Virtual MAC address	Displays the virtual MAC address of the VRRP group.
Virtual IP address	Displays the virtual IP address of the VRRP router to which the interface is connected.
Tracking states...	Displays information on the tracked interfaces or objects configured for a VRRP group (<code>track</code> command), including: <ul style="list-style-type: none"> UP or DOWN state of the tracked interface or object (Up or Dn). Interface type and slot/port or object number, description, and time since the last change in the state of the tracked object. Cost to be subtracted from the VRRP group priority if the state of the tracked interface/object goes DOWN.

Example

```
Dell#show vrrp ipv6
-----
GigabitEthernet 5/6, IPv6 VRID: 255, Version: 3, Net:
fe80::201:e8ff:fe7a:6bb9
State: Master, Priority: 101, Master: fe80::201:e8ff:fe7a:6bb9 (local)
Hold Down: 0 centisec, Preempt: TRUE, AdvInt: 100 centisec
Accept Mode: FALSE, Master AdvInt: 100 centisec
Adv rcvd: 0, Bad pkts rcvd: 0, Adv sent: 64
Virtual MAC address:
  00:00:5e:00:02:ff
Virtual IP address:
  1::255 fe80::255
```

vrrp-ipv6-group

Assign an interface to a VRRP group.

Syntax	<code>vrrp-ipv6-group vrid</code>						
Parameters	<p>vrid Enter the virtual-router ID number of the VRRP group. The VRID range is from 1 to 255.</p>						
Defaults	Not configured.						
Command Modes	INTERFACE						
Supported Modes	Full-Switch						
Command History	<table border="1"> <thead> <tr> <th>Version</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>9.9(0.0)</td> <td>Introduced on the FN IOM.</td> </tr> <tr> <td>8.3.16.1</td> <td>Introduced on the MXL 10/40GbE Switch IO Module.</td> </tr> </tbody> </table>	Version	Description	9.9(0.0)	Introduced on the FN IOM.	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.
Version	Description						
9.9(0.0)	Introduced on the FN IOM.						
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.						

Usage Information

The VRRP group only becomes active and sends VRRP packets when a link-local virtual IP address is configured. When you delete the virtual address, the VRRP group stops sending VRRP packets.

- When VRF microcode is not loaded in CAM, the VRID for a VRRP group is the same as the VRID number configured with the `vrrp-group` or `vrrp-ipv6-group` command.
- When VRF microcode is loaded in CAM, the VRID for a VRRP group is equal to 16 times the `vrrp-group` or `vrrp-ipv6-group vrid` number plus the `ip vrf vrf-id` number. For example, if VRF microcode is loaded and VRRP group 10 is configured in VRF 2, the VRID used for the VRRP group is $(16 \times 10) + 2$, or 162. This VRID value is used in the lowest byte of the virtual MAC address of the VRRP group and is also used for VRF routing.

NOTE: Configure the same VRID on neighboring routers (Dell Networking OS or non-Dell Networking OS) in the same VRRP group in order for all routers to interoperate.

version

Set the VRRP protocol version for the IPv4 group.

Syntax

```
version {2 | 3 | both}
```

To return to the default setting, use the `no version` command.

Parameters

- | | |
|-------------|--|
| 2 | Enter the keyword <code>2</code> to specify VRRP version 2 as defined by RFC 3768, <i>Virtual Router Redundancy Protocol</i> . |
| 3 | Enter the keyword <code>3</code> to specify VRRP version 3 as defined by RFC 5798, <i>Virtual Router Redundancy Protocol</i> . |
| both | Enter the keyword <code>both</code> for in-service migration from VRRP version 2 to VRRP version 3. |

Defaults

2

Command Modes

VRRP

Supported Modes

Full-Switch

Command History

This guide is platform-specific. For command information about other platforms, see the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.7(0.0)	Introduced on the S6000-ON..
9.5(0.0)	Introduced on the Z9000, S6000, S4820T, S4810, and MXL.

Usage Information

You can use the `both` command to migrate from VRRPv2 to VRRPv3. When you set the VRRP protocol version to `both`, the switch sends only VRRPv3 advertisements but can receive either VRRPv2 or VRRPv3 packets. To migrate an IPv4 VRRP group from VRRPv2 to VRRPv3:

- 1 Set the switches with the lowest priority to `both`.
- 2 Set the switch with the highest priority to version 3.
- 3 Set all the switches from `both` to version 3.

 **NOTE:** Do not run VRRP version 2 and version 3 in the same group for an extended period of time.

Example

```
Dell(conf-if-te-1/1-vrid-100)#version ?  
2      VRRPv2  
3      VRRPv3  
both   Interoperable, send VRRPv3 receive both  
  
Dell(conf-if-te-1/1-vrid-100)#version 3
```

SNMP Traps

This chapter lists the traps sent by the Dell Networking Operating System (OS). Each trap is listed by the fields Message ID, Trap Type, and Trap Option.

Table 6. SNMP Traps and Error Messages

Message ID	Trap Type	Trap Option
COLD_START %SNMP-5-SNMP_COLD_START: SNMP COLD_START trap sent.	SNMP	COLDSTART
WARM_START	SNMP	WARMSTART
COPY_CONFIG_COMPLETE SNMP Copy Config Command Completed	SNMP	NONE
LINK_DOWN %IFA-1-PORT_LINKDN: changed interface state to down:%d	SNMP	LINKDOWN
LINK_UP %IFA-1-PORT_LINKUP: changed interface state to up:%d	SNMP	LINKUP
AUTHENTICATION_FAIL %SNMP-3-SNMP_AUTH_FAIL: SNMP Authentication failed.Request with invalid community string.	SNMP	AUTH
EGP_NEIGHBOR_LOSS	SNMP	NONE
OSTATE_DOWN %IFM-1-OSTATE_DN: changed interface state to down:%s %IFM-5-CSTATE_DN:Changed interface Physical state to down: %s	SNMP	LINKDOWN
OSTATE_UP %IFM-1-OSTATE_UP: changed interface state to up:%s %IFM-5-CSTATE_UP: Changed interface Physical state to up: %s	SNMP	LINKUP
RMON_RISING_THRESHOLD %RPM0-P:CP %SNMP-4-RMON_RISING_THRESHOLD: RMON rising threshold alarm from SNMP OID <oid>	SNMP	NONE
RMON_FALLING_THRESHOLD %RPM0-P:CP %SNMP-4-RMON_FALLING_THRESHOLD: RMON falling threshold alarm from SNMP OID <oid>	SNMP	NONE
RMON_HC_RISHING_THRESHOLD %RPM0-P:CP %SNMP-4-RMON_HC_RISING_THRESHOLD: RMON high-capacity rising threshold alarm from SNMP OID <oid>	SNMP	NONE
RMON_HC_FALLING_THRESHOLD	SNMP	NONE

Message ID	Trap Type	Trap Option
RESV N/A	NONE	NONE
CHM_MIN_ALRM_TEMP %CHMGR-2-MINOR_TEMP: Minor alarm: chassis temperature	ENVMON	TEMP
CHM_MIN_ALRM_TEMP_CLR %CHMRG-5-MINOR_TEMP_CLR: Minor alarm cleared: chassis temperature normal (%s %d temperature is within threshold of %dC)	ENVMON	TEMP
CHM_MAJ_ALRM_TEMP %CHMGR-2-MAJOR_TEMP: Major alarm: chassis temperature high (%s temperature reaches or exceeds threshold of %dC)	ENVMON	TEMP
CHM_MAJ_ALRM_TEMP_CLR %CHMGR-2-MAJOR_TEMP_CLR: Major alarm cleared: chassis temperature lower (%s %d temperature is within threshold of %dC)	ENVMON	TEMP
TME_TASK_SUSPEND %TME-2-TASK SUSPENDED: SUSPENDED - svce:%d - inst:%d - task:%s	ENVMON	NONE
TME_TASK_TERM %TME-2-ABNORMAL_TASK_TERMINATION: CRASH - task:%s %s	ENVMON	NONE
CHM_CPU_THRESHOLD %CHMGR-5-CPU_THRESHOLD: Cpu %s usage above threshold. Cpu5SecUsage (%d)	ENVMON	NONE
CHM_CPU_THRESHOLD_CLR %CHMGR-5-CPU_THRESHOLD_CLR: Cpu %s usage drops below threshold. Cpu5SecUsage (%d)	ENVMON	NONE
CHM_MEM_THRESHOLD %CHMGR-5-MEM_THRESHOLD: Memory %s usage above threshold. MemUsage (%d)	ENVMON	NONE
CHM_MEM_THRESHOLD_CLR %CHMGR-5-MEM_THRESHOLD_CLR: Memory %s usage drops below threshold. MemUsage (%d)	ENVMON	NONE
MACMGR_STN_MOVE %MACMGR-5-DETECT_STN_MOVE: Station Move threshold exceeded for Mac %s in vlan %d	ENVMON	NONE
VRRP_BDAUTH %RPM1-P:RP2 %VRRP-3-VRRP_BAD_AUTH: vrid-1 on Gi 11/12 rcvd pkt with authentication type mismatch. %RPM1-P:RP2 %VRRP-3-VRRP_BAD_AUTH: vrid-1 on Gi 11/12 rcvd pkt with authentication failure	PROTO	NONE
VRRP_GO_MASTER	PROTO	NONE

Message ID	Trap Type	Trap Option
VRRP_PROTOCOL_ERROR %VRRP-6-VRRP_MASTER: vrid-%d on %s entering MASTER VRRP_PROTOERR: VRRP protocol error on %S	PROTO	NONE
BGP4_ESTABLISHED %TRAP-5-PEER_ESTABLISHED: Neighbor %a, state %s	PROTO	NONE
BGP4_BACKW_XSITION %TRAP-5-BACKWARD_STATE_TRANS: Neighbor %a, state %s	PROTO	NONE
ETS_TRAP_TYPE_MODULE_STATUS_CHANGE %DIFFSERV-5-ETS_TRAP_TYPE_MODULE_STATUS_CHANGE: ETS Module status changed to enabled %DIFFSERV-5-ETS_TRAP_TYPE_MODULE_STATUS_CHANGE: ETS Module status changed to disabled	ETS	NONE
ETS_TRAP_TYPE_ADMIN_MODE_CHANGE %DIFFSERV-5-ETS_TRAP_TYPE_ADMIN_MODE_CHANGE : ETS Admin mode changed to on for port %s %DIFFSERV-5-ETS_TRAP_TYPE_ADMIN_MODE_CHANGE : ETS Admin mode changed to off for port %s	ETS	NONE
ETS_TRAP_TYPE_OPER_STATE_CHANGE %DIFFSERV-5-ETS_TRAP_TYPE_OPER_STATE_CHANGE: ETS Oper state changed to init for port %s %DIFFSERV-5-ETS_TRAP_TYPE_OPER_STATE_CHANGE: ETS Oper state changed to off for port %s %DIFFSERV-5-ETS_TRAP_TYPE_OPER_STATE_CHANGE: ETS Oper state changed to recommended for port %s %DIFFSERV-5-ETS_TRAP_TYPE_OPER_STATE_CHANGE: ETS Oper state changed to rxConfigSrc for port %s	ETS	NONE
ETS_TRAP_TYPE_PEER_STATE_CHANGE %DIFFSERV-5-ETS_TRAP_TYPE_PEER_STATE_CHANGE : ETS Peer state changed to enabled for port %s %DIFFSERV-5-ETS_TRAP_TYPE_PEER_STATE_CHANGE : ETS Peer state changed to disabled for port %s	ETS	NONE
PFC_TRAP_TYPE_MODULE_STATUS_CHANGE %DIFFSERV-5-PFC_TRAP_TYPE_MODULE_STATUS_CHANGE: PFC Module status changed to enabled %DIFFSERV-5-PFC_TRAP_TYPE_MODULE_STATUS_CHANGE: PFC Module status changed to disabled	PFC	NONE
PFC_TRAP_TYPE_ADMIN_MODE_CHANGE %DIFFSERV-5-PFC_TRAP_TYPE_ADMIN_MODE_CHANGE : PFC Admin mode changed to on for port %s	PFC	NONE

Message ID	Trap Type	Trap Option
PFC_TRAP_TYPE_ADMIN_MODE_CHANGE %DIFFSERV-5-PFC_TRAP_TYPE_ADMIN_MODE_CHANGE : PFC Admin mode changed to off for port %s		
PFC_TRAP_TYPE_OPER_STATE_CHANGE %DIFFSERV-5-PFC_TRAP_TYPE_OPER_STATE_CHANGE: PFC Oper state changed to init for port %s %DIFFSERV-5-PFC_TRAP_TYPE_OPER_STATE_CHANGE: PFC Oper state changed to off for port %s %DIFFSERV-5-PFC_TRAP_TYPE_OPER_STATE_CHANGE: PFC Oper state changed to recommended for port %s %DIFFSERV-5-PFC_TRAP_TYPE_OPER_STATE_CHANGE: PFC Oper state changed to rxConfigSrc for port %s	PFC	NONE
PFC_TRAP_TYPE_PEER_STATE_CHANGE %DIFFSERV-5-PFC_TRAP_TYPE_PEER_STATE_CHANGE: PFC Peer state changed to enabled for port %s %DIFFSERV-5-PFC_TRAP_TYPE_PEER_STATE_CHANGE: PFC Peer state changed to disabled for port %s	PFC	NONE
FIPS_MAX_FCF_LIMIT_RCH %FCOE-5-MAX_FCF_LIMIT_RCH: Number of FCFs reached maximum allowed limit in VLAN %d	FIPS	NONE
FIPS_MAX_ENODE_LIMIT_RCH %FCOE-5-MAX_ENODE_LIMIT_RCH: Number of ENodes reached maximum allowed limit in the system	FIPS	NONE
FIPS_MAX_SESSION_LIMIT_RCH %FCOE-5-MAX_SESSION_LIMIT_RCH: Number of sessions reached maximum allowed limit in the system	FIPS	NONE
FIPS_FCF_DROP %FCOE-5-FCF_DROP: New FCF(%d,%s) discovered in Vlan %d is dropped as max-FCF-limit per VLAN is reached	FIPS	NONE
FIPS_ENODE_DROP %FCOE-5-ENODE_DROP: New ENode(%d,%s) discovered in interface %s dropped as max-ENode-limit in system reached	FIPS	NONE
FIPS_SESSION_DROP %FCOE-5-SESSION_DROP: New session(%d,%s) request in interface %s dropped as max-session-limit in system reached	FIPS	NONE
FIPS_ACL_INSTALL_FAIL %FCOE-5-ACL_INSTALL_FAIL: problem in installing ACL entries due to no space or hardware failure	FIPS	NONE
CHMGR_ENT_LAST_CHANGE_TIME No error messages. Time, at which there is a change in a physical entity, is logged.	ENTITY	NONE

FC Flex IO Modules

This part provides a generic, broad-level description of the operations, capabilities, and configuration commands of the Fiber Channel (FC) Flex IO module.

FC Flex IO Module mentioned in this guide refers to FCF Port Combo Card.

Topics:

- [FC Flex IO Modules](#)
- [Data Center Bridging \(DCB\) for FC Flex IO Modules](#)
- [NPIV Proxy Gateway for FC Flex IO Modules](#)

FC Flex IO Modules

This part provides a generic, broad-level description of the operations, capabilities, and configuration commands of the Fiber Channel (FC) Flex IO module.

Data Center Bridging (DCB) for FC Flex IO Modules

Data center bridging (DCB) refers to a set of IEEE Ethernet enhancements that provide data centers with a single, converged network to support multiple traffic types, including local area network (LAN), server, and storage traffic.

The Fibre Channel (FC) Flex IO module is supported on switch. The switch installed with the FC Flex IO module functions as a top-of-rack edge switch that supports converged enhanced ethernet (CEE) traffic — Fibre Channel over Ethernet (FCoE) for storage, inter-process communication (IPC) for servers, and Ethernet local area network (LAN) (IP cloud) for data — and FC links to one or more storage area network (SAN) fabrics.

The `dcb-input` and `dcb-output` configuration commands are deprecated, starting with Dell Networking OS Release 9.3(0.0) on the Dell switches. Use the `dcp-map` command to create a DCB map to configure priority flow control (PFC) and enhanced transmission selection (ETS) on Ethernet ports that support converged Ethernet traffic.

The Dell Networking Operating System (OS) commands for the DCB features include 802.1Qbb priority-based flow control (PFC), 802.1Qaz enhanced transmission selection (ETS), and the data center bridging exchange (DCBX) protocol.

NPIV Proxy Gateway for FC Flex IO Modules

The N-port identifier virtualization (NPIV) Proxy Gateway (NPG) feature provides FCoE-FC bridging capability on the system with the FC Flex IO module switch, allowing server CNAs to communicate with SAN fabrics over the FN IOM with the FC Flex IO module.

To configure the FN IOM with the FC Flex IO module to operate as an NPIV proxy gateway, use the following commands:

description (for FCoE maps)

In an FCoE map, add a text description of the FCoE and FC parameters used to transmit storage traffic over a Switch with the FC Flex IO module NPIV proxy gateway in a converged fabric.

Syntax `description text`

Parameters `text` Enter a maximum of 32 characters.

Defaults None

Command Modes FCOE MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information The text description is displayed in `show fcoe-map` command output.

Related Commands [fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fabric

Apply an FCoE map on a fabric-facing Fibre Channel (FC) port.

Syntax `fabric map-name`

Parameters `map-name` Maximum: 32 alphanumeric characters.

Defaults None

Command Modes INTERFACE FIBRE_CHANNEL

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information An FCoE map is a template used to map FCoE and FC parameters in a converged fabric. An FCoE map is used to virtualize upstream FC ports on a switch with the FC Flex IO module NPIV proxy gateway so that they appear to

downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network by providing FCoE-enabled servers and switches with the necessary parameters to log in to a SAN fabric. Use the `fcoe-map` command to create an FCoE map.

On a switch with the FC Flex IO module NPIV proxy gateway, you cannot apply an FCoE map on fabric-facing FC ports and server-facing Ethernet ports.

After you apply an FCoE map on an FC interface, when the port is enabled (`no shutdown`), the NPIV proxy gateway starts sending FIP multicast advertisements on behalf of the FC port to downstream servers in order to advertise the availability of a new FCF port on the FCoE VLAN.

To remove an FCoE map from an FC interface, enter the `no fabric map-name` command in Interface configuration mode.

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fabric-id vlan

In an FCoE map, configure the association between the dedicated VLAN used to carry FCoE traffic between servers and a SAN, and the fabric where the desired storage arrays are installed.

Syntax `fabric-id fabric-num vlan vlan-id`

Parameters

fabric-id fabric-num	Enter a fabric ID number that is the same as the ID number of the dedicated VLAN used to carry FCoE storage traffic to the fabric specified in the FCoE map. You can enter a fabric ID in the range 1–4094.
vlan vlan-id	Enter the ID number of the dedicated VLAN used to carry FCoE storage traffic between servers and a SAN fabric and specified with the <code>vlan</code> command in the FCoE map.

Defaults None

Command Modes FCOE MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information In the `fabric-id vlan` command, the fabric and VLAN ID numbers must be the same.

In each FCoE map, the fabric ID, FC-MAP value, and FCoE VLAN parameters must be unique.

To remove a fabric-VLAN association from an FCoE map, enter the `no fabric-id vlan` command.

You must first create a VLAN and then specify the configured VLAN ID in the `fabric-id vlan` command. Otherwise, the following error message is displayed.

```
FTOS(conf-fcoe-f)#fabric-id 10 vlan 10 % Error: Vlan 10 does not exist
```

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fcf-priority

In an FCoE map, configure the priority used by a server CNA to select an upstream FCoE forwarder (FCF).

Syntax `fcf-priority priority`

Parameters `priority` Enter the priority assigned to the switch with the FC Flex IO module NPV proxy gateway, which appears to a downstream server CNA as an FCF. The range of FCF priority values is from 1 to 255.

Defaults 128

Command Modes FCOE MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information The FCF priority you assign to the Switch with the FC Flex IO module is used by server CNAs to select an upstream FCF to use for a fabric login (FLOGI).

To remove a configured FCF priority from an FCoE map, enter the `no fcf-priority` command.

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fc-map

In an FCoE map, configure the FCoE mapped address prefix (FC-MAP) value which is used to identify FCoE traffic transmitted on the FCoE VLAN for the specified fabric.

Syntax `fc-map fc-map-value`

Parameters `fc-map-value` Enter the unique MAC address prefix used by a SAN fabric.

The range of FC-MAP values is from 0EFC00 to 0EFCFF.

Defaults None

Command Modes FCoE MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.6(0.0)	Supported on the FN 2210S Aggregator.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

The FC-MAP value you enter must match the FC-MAP value used by an FC switch or FCoE forwarder (FCF) in the fabric. An FCF switch accepts only FCoE traffic that uses the correct FC-MAP value.

The FC-MAP value is used to generate the fabric-provided MAC address (FP-MAC). The FPMA is used by servers to transmit FCoE traffic to the fabric. An FC-MAP can be associated with only one FCoE VLAN and vice versa.

In an FCoE map, the FC-MAP value, fabric ID, and FCoE VLAN parameters must be unique.

To remove a configured FC-MAP value from an FCoE map, enter the `no fcoe-map` command.

Related Commands

[fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fcoe-map

Create an FCoE map which contains the parameters used to configure the links between server CNAs and a SAN fabric. Apply the FCoE map on a server-facing Ethernet port.

Syntax `fcoe-map map-name`

Parameters `map-name` Maximum: 32 alphanumeric characters.

Defaults None

On the I/O Aggregator with FC Flex IO modules, the following parameters are applied on all the FC Flex IO module interfaces:

- Description: SAN_FABRIC
- Fabric-id: 1002
- Fcoe-vlan: 1002
- Fc-map: 0x0efc00
- Fcf-priority: 128
- Fka-adv-period: 8000mSec

- Keepalive: enable
- Vlan priority: 3

Command Modes CONFIGURATION
INTERFACE

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

An FCoE map is a template used to map FCoE and FC parameters in a converged fabric. An FCoE map is used to virtualize upstream FC ports on the switch with the FC Flex IO module NPIV proxy gateway so that they appear to downstream server CNA ports as FCoE forwarder (FCF) ports on an FCoE network. When applied to FC and Ethernet ports on an NPIV proxy gateway, an FCoE map allows the switch to operate as an FCoE-FC bridge between an FC SAN and an FCoE network by providing FCoE-enabled servers and switches with the necessary parameters to log in to a SAN fabric.

On a switch with the FC Flex IO module NPIV proxy gateway, you cannot apply an FCoE map is applied on fabric-facing FC ports and server-facing 10-Gigabit Ethernet ports.

An FCoE map consists of the following parameters: the dedicated FCoE VLAN used for storage traffic, the destination SAN fabric (FC-MAP value), FCF priority used by a server, and the FIP keepalive (FKA) advertisement timeout.

In each FCoE map, the fabric ID, FC-MAP value, and FCoE VLAN parameters must be unique. Use one FCoE map to access one SAN fabric. You cannot use the same FCoE map to access different fabrics.

To remove an FCoE map from an Ethernet interface, enter the `no fcoe-map map-name` command in Interface configuration mode.

Related Commands `show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

fka-adv-period

In an FCoE map, configure the time interval used to transmit FIP keepalive (FKA) advertisements.

Syntax `fka-adv-period seconds`

Parameters **seconds** Enter the time period (in seconds) used to send FIP keepalive messages to peer devices. The range is from 8 to 90 seconds.

Defaults 8 seconds

Command Modes FCOE MAP

Supported Modes Full-Switch

Command History

Version	Version
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

To delete the FIP keepalive time period from an FCoE map, enter the `no fka-adv-erpiod` command.

Related Commands

[fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

[show fcoe-map](#) — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

interface vlan (NPIV proxy gateway)

Create a dedicated VLAN to be used to send and receive Fibre Channel traffic over FCoE links between servers and a fabric over a switch with the FC Flex IO module NPIV proxy gateway.

Syntax

```
interface vlan vlan-id
```

Parameters

vlan-id Enter a number as the VLAN Identifier. The range is 1 to 4094.

Defaults

Not configured.

Command Modes

CONFIGURATION

Supported Modes

Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3.0.0	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module configured as an NPIV proxy gateway.

Usage Information

FCoE storage traffic received from servers on a switch with the FC Flex IO module NPIV proxy gateway is de-capsulated into Fibre Channel packets and forwarded over FC links to SAN switches in a specified fabric. You must configure a separate FCoE VLAN for each fabric to which FCoE traffic is forwarded. Any non-FCoE traffic sent on a dedicated FCoE VLAN will be dropped.

You configure the association between a dedicated VLAN, which carries FCoE traffic from server CNAs over the NPIV proxy gateway to a SAN fabric in which destination storage arrays are installed, in an FCoE map by using the `fabric id vlan` command.

When you apply an FCoE map to a server-facing Ethernet port, the port is automatically configured as a tagged member of the FCoE VLAN.

For more information about VLANs and the commands to configure them, refer to the [Virtual LAN \(VLAN\) Commands](#) section of the [Layer 2](#) chapter.

Example (Single Range)

```
FTOS (conf)#interface vlan 10
FTOS (conf-if-vl-3)#
```

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

keepalive

In an FCoE map, enable the monitoring of FIP keepalive messages (if it is disabled).

Syntax `keepalive`

Parameters None

Defaults FIP keepalive monitoring is enabled on Ethernet and Fibre Channel interfaces.

Command Modes FCOE MAP

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information FIP keepalive (FKA) messaging is used to detect if other FCoE devices are reachable.

To remove FIP keepalive monitoring from an FCoE map, enter the `no keepalive` command.

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

`show fcoe-map` — displays the Fibre Channel and FCoE configuration parameters in FCoE maps.

show fcoe-map

Display the Fibre Channel and FCoE configuration parameters in FCoE maps.

Syntax `show fcoe-map [brief | map-name]`

Parameters

brief	Displays an overview of currently configured FCoE maps.
map-name	Displays the FC and FCoE configuration parameters in a specified FCoE map. The FCoE map is applied on Ethernet (FCoE) and FC ports to transmit FC storage traffic to a specified fabric.

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

Use the `show fcoe-map` command to display the FC and FCoE parameters used to configure server-facing Ethernet (FCoE) and fabric-facing FC ports in all FCoE maps on a switch with the FC Flex IO module NPIV proxy gateway.

In each FCoE map, the values for the fabric ID and FC-MAP that identify the SAN fabric to which FC storage traffic is sent, and the FCoE VLAN to be used must be unique.

An FCoE map is used to identify the SAN fabric to which FCoE storage traffic is sent and to virtualize the switch with the FC Flex IO module FC ports so that they appear to downstream server CNA ports as FCoE Forwarder (FCF) ports on an FCoE network.

The following table describes the `show fcoe-map brief` output shown in the example below.

Field	Description
Fabric-Name	Name of a SAN fabric.
Fabric ID	The ID number of the SAN fabric to which FC traffic is forwarded.
VLAN ID	The dedicated FCoE VLAN used to transport FCoE storage traffic between servers and a fabric over the NPIV proxy gateway. The configured VLAN ID must be the same as the fabric ID.
FC-MAP	FCoE MAC address-prefix value - The unique 24-bit MAC address prefix that identifies a fabric.
FCF Priority	The priority used by a server to select an upstream FCoE forwarder.
Config-State	Indicates whether the configured FCoE and FC parameters in the FCoE map are valid: Active (all mandatory FCoE and FC parameters are correctly configured) or Incomplete (either the FC-MAP value, fabric ID, or VLAN ID are not correctly configured).
Oper-State	Operational status of link to the fabric: Up (link is up and transmitting FC traffic), Down (link is down and not transmitting FC traffic), Link-wait (link is up and waiting for FLOGI to complete on peer FC port), or Removed (port has been shut down).

The following table describes the `show fcoe-map map-name` output shown in the example below.

Field	Description
Fabric-Name	Name of a SAN fabric.
Fabric ID	The ID number of the SAN fabric to which FC traffic is forwarded.
VLAN ID	The dedicated FCoE VLAN used to transport FCoE storage traffic between servers and a fabric over the NPIV proxy gateway. The configured VLAN ID must be the same as the fabric ID.
VLAN priority	FCoE traffic uses VLAN priority 3. (This setting is not user-configurable.)
FC-MAP	FCoE MAC address-prefix value - The unique 24-bit MAC address prefix that identifies a fabric.

Field	Description
FKA-ADV-period	Time interval (in seconds) used to transmit FIP keepalive advertisements.
FCF Priority	The priority used by a server to select an upstream FCoE forwarder.
Config-State	Indicates whether the configured FCoE and FC parameters in the FCoE map are valid: Active (all mandatory FCoE and FC parameters are correctly configured) or Incomplete (either the FC-MAP value, fabric ID, or VLAN ID are not correctly configured).
Oper-State	Operational status of link to the fabric: Up (link is up and transmitting FC traffic), Down (link is down and not transmitting FC traffic), Link-wait (link is up and waiting for FLOGI to complete on peer FC port), or Removed (port has been shut down).
Members	The switches with the FC Flex IO module Ethernet and FC ports that are members of the dedicated FCoE VLAN that carries storage traffic to the specified fabric.

Example

```
FTOS#show fcoe-map brief
Fabric-Name Fabric-Id Vlan-Id FC-MAP FCF-Priority Config-State Oper-State
test        16          16      0efc02  128      ACTIVE      UP
cnatest     1003        1003    0efc03  128      ACTIVE      UP
sitest     1004        1004    0efc04  128      ACTIVE      DOWN
```

```
FTOS#show fcoe-map si
Fabric Name      si
Fabric Id       1004
Vlan Id         1004
Vlan priority    3
FC-MAP          0efc04
FKA-ADV-Period  8
Fcf Priority     128
Config-State    ACTIVE
Oper-State      DOWN
Members
```

Related Commands [fcoe-map](#) — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

show npiv devices

Display the FCoE and FC devices currently logged in to a Switch with the FC Flex IO module NPIV proxy gateway.

Syntax `show npiv devices [brief]`

Parameters

brief	Displays an overview of current server CNA-fabric connections over a switch with the FC Flex IO module NPIV proxy gateway.
--------------	--

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.3(0.0)	Introduced on the M I/O Aggregator and MXL 10/40GbE Switch with the FC Flex IO module.

Usage Information

Use the `show npiv devices` command to display information on the server CNA, server-facing Ethernet and fabric-facing FC ports, and the SAN fabric in each server-fabric connection over a switch with the FC Flex IO module NPIV proxy gateway.

The following table describes the `show npiv devices brief` output shown in the example below.

Field	Description
ENode-Intf	A switch with the FC Flex IO module Ethernet interface (<i>slot/port</i>) to which a server CNA is connected.
ENode-WWPN	Worldwide port name (WWPN) of a server CNA port.
FCoE-Vlan	VLAN ID of the dedicated VLAN used to transmit FCoE traffic to and from the fabric.
Fabric-Intf	Fabric-facing Fibre Channel port (<i>slot/port</i>) on which FC traffic is transmitted to the specified fabric.
Fabric-Map	Name of the FCoE map containing the FCoE/FC configuration parameters for the server CNA-fabric connection.
LoginMethod	Method used by the server CNA to log in to the fabric; for example: FLOGI - ENode logged in using a fabric login (FLOGI). FDISC - ENode logged in using a fabric discovery (FDISC).
Status	Operational status of the link between a server CNA port and a SAN fabric: Logged In - Server has logged in to the fabric and is able to transmit FCoE traffic.

Example

```
Dell# show npiv devices brief
Total NPIV Devices = 2
-----
ENode-Intf  ENode-WWPN          FCoE-Vlan  Fabric-Intf  Fabric-Map  LoginMethod  Status
-----
Te 0/12     20:01:00:10:18:f1:94:20  1003       Fc 0/5       fid_1003    FLOGI        LOGGED_IN
Te 0/13     10:00:00:00:c9:d9:9c:cb  1003       Fc 0/0       fid_1003    FDISC        LOGGED_IN
```

Usage Information

The following table describes the `show npiv devices` output shown in the example below.

Field	Description
ENode [number]	A server CNA that has successfully logged in to a fabric over a switch with the FC Flex IO module Ethernet port in ENode mode.
ENode MAC	MAC address of a server CNA port.
ENode Intf	Port number of a server-facing Ethernet port operating in ENode mode.
FCF MAC	Fibre Channel forwarder MAC: MAC address of the switch with the FC Flex IO module FCF interface.
Fabric Intf	Fabric-facing Fibre Channel port (<i>slot/port</i>) on which FCoE traffic is transmitted to the specified fabric.

Field	Description
FCoE VLAN	ID of the dedicated VLAN used to transmit FCoE traffic from a server CNA to a fabric and configured on both the server-facing the switch with the FC Flex IO module port and server CNA port.
Fabric Map	Name of the FCoE map containing the FCoE/FC configuration parameters for the server CNA-fabric connection.
ENode WWPN	Worldwide port name of the server CNA port.
ENode WWNN	Worldwide node name of the server CNA.
FCoE MAC	Fabric-provided MAC address (FPMA). The FPMA consists of the FC-MAP value in the FCoE map and the FC-ID provided by the fabric after a successful FLOGI. In the FPMA, the most significant bytes are the FC-MAP; the least significant bytes are the FC-ID.
FC-ID	FC port ID provided by the fabric.
LoginMethod	Method used by the server CNA to log in to the fabric; for example, FLOGI or FDISC.
Secs	Number of seconds that the fabric connection is up.
State	Status of the fabric connection: logged in.

Example

```

ENode[0]:
ENode MAC      :      00:10:18:f1:94:21
ENode Intf     :      Te 0/12
FCF MAC       :      5c:f9:dd:ef:10:c8
Fabric Intf    :      Fc 0/5
FCoE Vlan     :      1003
Fabric Map     :      fid_1003
ENode WWPN    :      20:01:00:10:18:f1:94:20
ENode WWNN    :      20:00:00:10:18:f1:94:21
FCoE MAC      :      0e:fc:03:01:02:01
FC-ID         :      01:02:01
LoginMethod    :      FLOGI
Secs          :      5593
Status        :      LOGGED_IN

ENode[1]:
ENode MAC      :      00:10:18:f1:94:22
ENode Intf     :      Te 0/13
FCF MAC       :      5c:f9:dd:ef:10:c9
Fabric Intf    :      Fc 0/0
FCoE Vlan     :      1003
Fabric Map     :      fid_1003
ENode WWPN    :      10:00:00:00:c9:d9:9c:cb
ENode WWNN    :      10:00:00:00:c9:d9:9c:cd
FCoE MAC      :      0e:fc:03:01:02:02
FC-ID         :      01:02:01
LoginMethod    :      FDISC
Secs          :      5593
Status        :      LOGGED_IN

```

Related Commands `fcoe-map` — creates an FCoE map which contains the parameters used in the communication between servers and a SAN fabric.

Debugging and Diagnostics

This chapter contains the following sections:

- [Offline Diagnostic Commands](#)
- [Hardware Commands](#)

Topics:

- [Offline Diagnostic Commands](#)
- [Hardware Commands](#)
- [clear hardware stack-unit](#)
- [clear hardware system-flow](#)
- [show hardware layer2 acl](#)
- [show hardware layer3](#)
- [diag stack-unit](#)
- [hardware watchdog](#)
- [online stack-unit](#)
- [offline stack-unit](#)
- [show diag](#)
- [show hardware stack-unit](#)
- [show hardware system-flow](#)
- [show hardware buffer interface](#)
- [show hardware counters interface interface](#)
- [show hardware drops](#)

Offline Diagnostic Commands

The offline diagnostics test suite is useful for isolating faults and debugging hardware. While tests are running, the Dell Networking OS results are saved as a text file (TestReport-SU-X.txt) in the flash directory. The `show file` command is available only on Master and Standby.

Important Points to Remember

- Offline diagnostics can only be run when the unit is offline.
- Offline diagnostics cannot be run in Stacking mode.
- You can only run offline diagnostics on a unit to which you are connected via the console. In other words, you cannot run diagnostics on a unit to which you are connected via a stacking link.
- Diagnostic results are stored in a file (TestReport-SU-X.txt) in the flash directory. To review the results, use the `show file` command, which prints the results to the screen.
- Diagnostics only test connectivity, not the entire data path.

The offline diagnostics commands are:

- [diag stack-unit](#)

- [offline stack-unit](#)
- [show diag](#)

Hardware Commands

These commands display information from a hardware sub-component or ASIC.

The hardware commands are:

- [clear hardware stack-unit](#)
- [show diag](#)
- [show hardware stack-unit](#)
- [show hardware system-flow](#)

clear hardware stack-unit

Clear statistics from selected hardware components.

Syntax `clear hardware stack-unit 0-5 {counters | unit 0-1 counters | cpu data-plane statistics | stack-port 9-12}`

Parameters

- stack-unit 0-5** Enter the keywords `stack-unit` then 0 to 5 to select a particular stack member and then enter one of the following command options to clear a specific collection of data.
- counters** Enter the keyword `counters` to clear the counters on the selected stack member.
- unit 0-0 counters** Enter the keyword `unit` along with a port-pipe number, from 0 to 1, then the keyword `counters` to clear the counters on the selected port-pipe.
- cpu data-plane statistics** Enter the keywords `cpu data-plane statistics` to clear the data plane statistics.
- stack-port 9-12** Enter the keywords `stack-port` then the port number of the stacking port to clear the statistics of the particular stacking port. The range is from 9 to 12.

NOTE: You can identify stack port numbers by physical inspection of the rear modules. The numbering is the same as for the 10G ports. You can also inspect the output of the `show system stack-ports` command.

- Defaults** none
- Command Modes** EXEC Privilege
- Supported Modes** All Modes

Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.

Related Commands [show diag](#) — displays the data plane or management plane input and output statistics of the designated component of the designated stack member.

clear hardware system-flow

Clear system-flow statistics from selected hardware components.

Syntax `clear hardware system-flow layer2 stack-unit 0-5 port-set 0-0 counters`

Parameters

stack-unit 0-5	Enter the keywords <code>stack-unit</code> then 0 to 5 to select a particular stack member and then enter one of the following command options to clear a specific collection of data.
port-set 0-0	Enter the keywords <code>port-set</code> along with a port-pipe number, then the keyword <code>counters</code> to clear the system-flow counters on the selected port-pipe.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

Related Commands [show hardware stack-unit](#) — displays the data plane or management plane input and output statistics of the designated component of the designated stack member.

show hardware layer2 acl

Display Layer 2 ACL or eg data for the selected stack member and stack member port-pipe.

Syntax `show hardware layer2 acl stack-unit 0-5 port-set 0-0`

Parameters

stack-unit 0-5	Enter the keyword <code>stack-unit</code> then 0 to 5 to select a stack ID.
port-set 0-0	Enter the keywords <code>port-set</code> with a port-pipe number.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

show hardware layer3

Display Layer 3 ACL or QoS data for the selected stack member and stack member port-pipe.

Syntax `show hardware layer3 {acl | qos} stack-unit 0-5 port-set 0-0`

Parameters

acl qos	Enter either the keyword <code>acl</code> or the keyword <code>qos</code> to select between ACL or QoS data.
stack-unit 0-5	Enter the keywords <code>stack-unit</code> then a numeral from 0 to 5 to select a stack ID.
port-set 0-0	Enter the keyword <code>port-set</code> with a port-pipe number.

Defaults none

Command Modes EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

diag stack-unit

Run offline diagnostics on a stack unit.

Syntax `diag stack-unit number {alllevels | level0 | level1 | level2 [verbose no-reboot]} [terminate| interactive test <id>]`

Parameters

number	Enter the stack-unit number. The range is from 0 to 5.
alllevels	Enter the keyword <code>alllevels</code> to run the complete set of offline diagnostic tests.
level0	Enter the keyword <code>level0</code> to run Level 0 diagnostics. Level 0 diagnostics check for the presence of various components and perform essential path verifications. In addition, they verify the identification registers of the components on the board.
level1	Enter the keyword <code>level1</code> to run Level 1 diagnostics. Level 1 diagnostics is a smaller set of diagnostic tests with support for automatic partitioning. They perform status/self test for all the components on the board and test their registers for appropriate values. In addition, they perform extensive tests on memory devices (for example, SDRAM, flash, NVRAM, EEPROM, and CPLD) wherever possible. There are no tests on 10G links. At this level, stack ports are shut down automatically.
level2	Enter the keyword <code>level2</code> to run Level 2 diagnostics. Level 2 diagnostics are a full set of diagnostic tests with no support for automatic partitioning. Level 2 diagnostics are used primarily for on-board loopback tests and more extensive component diagnostics. Various components on the board are put into Loopback mode and test packets are transmitted through those components. These diagnostics also perform snake tests using VLAN configurations. To test 10G links, physically remove the unit from the stack.
verbose	Enter the keyword <code>verbose</code> to run the diagnostic in Verbose mode. Verbose mode gives more information in the output than Standard mode.

no-reboot	Enter the keyword <code>no-reboot</code> to avoid automatic rebooting of the chassis after completion of diagnostic execution. Generally, this option is never used because if you run the diagnostic once again without rebooting the chassis, it may cause an issue with the diagnostic results..
terminate	Enter the keyword <code>terminate</code> to stop the execution of the level diag that is already started using the <code>diag stack-unit</code> command. Once this CLI is issued, syslogs indicating the termination of the diag test is displayed. The diag results for the executed tests are stored in the flash directory (<code>TestReport-SU-X.txt</code>).
interactive	Enter the keyword <code>interactive</code> to run some individual diag tests such as <code>POWERLEDTTEST</code> , <code>STATUSLEDTTEST</code> and so on. The help option under the interactive command displays the list of tests that can be run.

Defaults	none
Command Modes	EXEC Privilege
Supported Modes	All Modes
Command History	

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

hardware watchdog

Set the watchdog timer to trigger a reboot and restart the system.

Syntax	<code>hardware watchdog</code>
Defaults	Enabled
Command Modes	. CONFIGURATION

Supported Modes	All Modes
------------------------	-----------

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.
8.3.17.0	Supported on the M I/O Aggregator.

Usage Information	This command enables a hardware watchdog mechanism that automatically reboots an Dell Networking OS switch/router with a single unresponsive unit. This is a last resort mechanism intended to prevent a manual power cycle.
--------------------------	--

online stack-unit

Place a stack unit in the online state.

Syntax	<code>online stack-unit <i>number</i></code>	
Parameters	<i>number</i>	Enter the stack-unit number. The range is from 0 to 5.
Defaults	none	
Command Modes	EXEC Privilege	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	8.3.16.1	Introduced on the MXL 10/40GbE Switch IO Module.

offline stack-unit

Place a stack unit in the offline state.

Syntax	<code>offline stack-unit <i>number</i></code>	
Parameters	<i>number</i>	Enter the stack-unit number. The range is from 0 to 5.
Defaults	none	
Command Modes	EXEC Privilege	
Supported Modes	All Modes	
Command History	Version	Description
	9.9(0.0)	Introduced on the FN IOM.
	9.4(0.0)	Supported on the FN I/O Aggregator.
	8.3.17.0	Supported on the M I/O Aggregator.

Usage Information While executing the offline stack unit CLI, the following warning message is displayed:

```
Dell#offline stack-unit 0
Warning - offline of unit will bring down all the protocols and
the unit will be operationally down, except for running Diagnostics.
Please make sure that stacking/fanout not configured for Diagnostics execution.
Also reboot/online command is necessary for normal operation after the offline
command is issued.
Proceed with Offline [confirm yes/no]:no
Dell#
```

Make sure that stacking is not configured for Diagnostics execution. Also, reboot/online command is necessary for normal operation after the offline command is issued.

show diag

View diagnostics information.

Syntax `show diag {information | stack-unit unit-id [detail | summary] | testcase}`

Parameters	information	Enter the keyword <code>information</code> to view current diagnostics information in the system.
	stack-unit <i>unit-id</i>	Enter the keyword <code>stack-unit</code> followed by the <code>unit-id</code> to display information on a specific stack member. The range is from 0 to 5.
	detail	(OPTIONAL) Enter the keyword <code>detail</code> to view detailed diagnostics information.
	summary	(OPTIONAL) Enter the keyword <code>summary</code> to view a summary of the diagnostics information. By default, the summary is displayed.
	testcase	Enter the keyword <code>testcase</code> to view the list of all the diag tests available.

Defaults Summary

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example 1 (show diag information Command)

```
Dell#show diag information
Diag information:
Diag software image version:
9-4(0-180)
-----
Stack-unit Member 0: No Unit diags executed yet
(Stackunit not Offline).
Stack-unit Member 1: Not present.
Stack-unit Member 2: Not present.
Stack-unit Member 3: Not present.
Stack-unit Member 4: Not present.
Stack-unit Member 5: Not present.
-----
Dell#
```

Example 2 (show diag stack-unit Command)

```
Dell#show diag stackunit 0
Diag status of Stackunit member 0:
-----
Stackunit is currently offline.
Stackunit level0 diag issued at Tue May 15, 2012 11:11:47 AM.
Current diag status: Unit diags are terminated.
Total number of diags: 17
Number of diags performed: 1
Number of diags passed: 1
Number of diags failed: 0
Number of diags pending: 16
Last Test executed: POWERRAILSTATUSTEST
Last notification received at: Tue May 15, 2012 11:12:24 AM
-----
```

Example 3 (show diag testcase stack-unit Command)

```
Dell#show diag testcase stack-unit 0
***** Blade IOM Diagnostics Test *****

Test ID Test Description          Test Level
-----
1        POWERRAILSTATUSTEST         Level0
3        TSENSORACCESSTEST           Level0
4        RTCPRESENCETEST           Level0
5        CPUSDRAMPRESENCETEST     Level0
6        CPUSDRAMSIZETEST         Level0
7        USBAACCESSTEST           Level0
8        USBHOSTCONTROLLERACCESSTEST Level0
9        SDFLASHACCESSTEST       Level0
11       CPLDPRESENCETEST        Level0
12       FLASHACCESSTEST        Level0
13       BOARDREVTEST           Level0
14       MGMTPHYPRESENCETEST     Level0
16       SFPPLUSPRESENCETEST     Level0
17       CPUTYPEDETECTTEST       Level0
101     RTCFUNCTIONTEST          Level1
102     RTCROLLOVERTEST         Level1
103     GPIOACCESSTEST          Level1
104     PSOCACCESSTEST          Level1
105     PCIEBCM56344ACCESSTEST   Level1
106     CPUSDRAMACCESSTEST       Level1
107     CPUSDRAMDATA LINETEST     Level1
108     CPUSDRAMADDRESSLINETEST   Level1
109     USBFILECOPYTEST          Level1
110     FLASHRWTEST             Level1
111     I2CSTRESSTEST           Level1
113     SERVERPORTPHYACCESSTEST   Level1
114     SERVERPORTPHYRWTEST      Level1
117     SFPPLUSPHYEXTLINKTEST     Level1
123     MGMTPHYACCESSTEST        Level1
124     SDFLASHFILECOPYSTRESSTEST Level1
201     SFPPLUSPHYLNKSPEEDTEST    Level2
203     MGMTPHYLOOPBACKTEST      Level2
204     MGMTMACLOOPBACKTEST      Level2
205     CPUSNAKESERVERPORTPHYLPBKTEST Level2
206     CPUSNAKESERVERPORTMACLPBKTEST Level2
207     CPUSNAKESFPPHYLPBKTEST   Level2
208     CPUSNAKESFPPMACLPBKTEST   Level2

tal Diagnostic Testcases in All Levels: 37

***** END *****

Dell#
```

Example 4 (show diag testcase stack-unit interactive Command)

```
Dell#show diag testcase stack-unit 0 interactive
***** Blade IOM Diagnostics Test *****

Test ID Test Description          Test Level
-----
401     POWERLEDTEST             Interactive
402     DEBUGLEDTEST             Interactive
403     STATUSLEDTEST            nteractive
406     RTCBATTERYTEST           Interactive
407     CPLDRESETTEST            Interactive
408     I2CDEVICESCANTEST        Interactive
409     SERVERPORTPHYEXTLINKTEST   Interactive
410     CPUSNAKESFPPEXTLPBKTEST   Interactive

Total Diagnostic Testcases in Interactive: 8

***** END *****
```

show hardware stack-unit

Display the data plane or management plane input and output statistics of the designated component of the designated stack member.

Syntax

```
show hardware stack-unit 0 {buffer [ unit 0 ] total buffer | buffer unit 0
interface all queue [(0-14) | all] buffer-info} {cpu {data-plane statistics |
management statistics | private-mgmt statistics} | drops [unit 0-0 | fpga
registers | fru dump | stack-port 9-12 | unit 0-0 {counters | details | ipmc-
replication | port-stats [detail] | register | table-dump WORD}}
```

Parameters

stack-unit 0 {command-option}	Enter the keywords <code>stack-unit</code> then 0 to select the stack member and then enter one of the following command options to display a collection of data based on the option entered.
buffer	Enter the keyword <code>buffer</code> . To display buffer statistics for a all interface, enter the keyword <code>interface</code> followed by the keyword <code>all</code> . To display the forwarding plane statistics containing the packet buffer usage per port per stack unit, enter the keyword <code>unit</code> then 0 for port-pipe 0, then <code>port</code> and the port number (42-53, and then <code>buffer-info</code> .
cpu {data-plane statistics management statistics private-mgmt statistics}	Enter the keyword <code>cpu</code> then one of the keywords to display the CPU statistics: <code>data-plane statistics</code> , <code>management statistics</code> , or <code>private-mgmt statistics</code> .
drops interface interface	Enter the keyword <code>drops</code> to display internal drops on the selected stack member.
fpga registers	Enter the keywords <code>fpga registers</code> to display fpga details.
fru dump	Enter the keywords <code>fru dump</code> to display fru details.
stack-port 9-12	Enter the keywords <code>stack-port</code> and a stacking port number to select a stacking port for which to display statistics. Identify the stack port number as you would to identify a 10G port that was in the same place in one of the rear modules.
	<p>NOTE: You can identify stack port numbers by physical inspection of the rear modules. The numbering is the same as for the 10G ports. You can also inspect the output of the <code>show system stack-ports</code> command.</p>
unit 0-0 {counters details ipmc-replication port-stats [detail] register table-dump WORD}}	Enter the keyword <code>unit</code> then 0 for port-pipe 0, and then enter one of the following keywords to troubleshoot errors on the selected port-pipe and to give status on why a port is not coming up to register level: <code>counters</code> , <code>details</code> , <code>ipmc-replication</code> , <code>port-stats [detail]</code> , <code>register</code> , or <code>table-dump WORD</code> .

Defaults

none

Command Modes

· EXEC

- EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Replaced the keyword port with interface.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example (data-plane)

```
Dell#show hardware stack-unit 0 cpu data-plane statistics
bc pci driver statistics for device:
rxHandle          :9798
noMhdr            :0
noMbuf            :0
noClus            :0
recvd             :9798
dropped           :0
rcvToNet          :9778
rxError           :0
rxDatapathErr    :0
rxPkt (COS0)     :0
rxPkt (COS1)     :0
rxPkt (COS2)     :25
rxPkt (COS3)     :0
rxPkt (COS4)     :0
rxPkt (COS5)     :0
rxPkt (COS6)     :0
rxPkt (COS7)     :226
rxPkt (COS8)     :9527
rxPkt (COS9)     :0
rxPkt (COS10)    :0
rxPkt (COS11)    :20
rxPkt (UNIT0)    :9798
transmitted       :4353
txRequested       :4353
noTxDesc          :0
txError           :0
txReqTooLarge    :0
txInternalError  :0
txDatapathErr    :0
txPkt (COS0)     :0
txPkt (COS1)     :0
txPkt (COS2)     :0
txPkt (COS3)     :0
txPkt (COS4)     :0
txPkt (COS5)     :0
txPkt (COS6)     :0
txPkt (COS7)     :0
txPkt (COS8)     :0
txPkt (COS9)     :0
txPkt (COS10)    :0
txPkt (COS11)    :0
txPkt (UNIT0)    :0
Dell#
```

Example

```
Dell#show hardware stack-unit 1 cpu party-bus statistics
Input Statistics:
8189 packets, 8076608 bytes
0 dropped, 0 errors
Output Statistics:
366 packets, 133100 bytes
```

```
0 errors
Dell#
```

Example (drop counters)

```
Dell#show hardware stack-unit 1 unit 0 counters
unit: 0 port: 1 (interface Te 1/1)
Description                                     Value
RX - IPV4 L3 Unicast Frame Counter              0
RX - IPV4 L3 Routed Multicast Packets           0
RX - IPV6 L3 Unicast Frame Counter              0
RX - IPV6 L3 Routed Multicast Packets           0
RX - Unicast Packet Counter                     0
RX - 64 Byte Frame Counter                       336186
RX - 65 to 127 Byte Frame Counter                0
RX - 128 to 255 Byte Frame Counter               0
RX - 256 to 511 Byte Frame Counter               0
RX - 512 to 1023 Byte Frame Counter              0
RX - 1024 to 1518 Byte Frame Counter             0
RX - 1519 to 1522 Byte Good VLAN Frame Counter  0
RX - 1519 to 2047 Byte Frame Counter            0
RX - 2048 to 4095 Byte Frame Counter            0
RX - 4096 to 9216 Byte Frame Counter            0
RX - Good Packet Counter                        336186
RX - Packet/Frame Counter                       336186
RX - Unicast Frame Counter                      0
RX - Multicast Frame Counter                    336186
RX - Broadcast Frame Counter                    0
RX - Byte Counter                               21515904
RX - Control Frame Counter                      0
RX - Pause Control Frame Counter                0
RX - Oversized Frame Counter                    0
RX - Jabber Frame Counter                       0
RX - VLAN Tag Frame Counter                     0
RX - Double VLAN Tag Frame Counter              0
RX - RUNT Frame Counter                         0
RX - Fragment Counter                           0
RX - VLAN Tagged Packets                        0
RX - Ingress Dropped Packet                     0
RX - MTU Check Error Frame Counter              0
RX - PFC Frame Priority 0                       0
RX - PFC Frame Priority 1                       0
RX - PFC Frame Priority 2                       0
RX - PFC Frame Priority 3                       0
RX - PFC Frame Priority 4                       0
RX - PFC Frame Priority 5                       0
RX - PFC Frame Priority 6                       0
RX - PFC Frame Priority 7                       0
RX - Debug Counter 0                            336186
RX - Debug Counter 1                            336186
RX - Debug Counter 2                            0
RX - Debug Counter 3                            0
RX - Debug Counter 4                            0
RX - Debug Counter 5                            336186
RX - Debug Counter 6                            0
RX - Debug Counter 7                            0
RX - Debug Counter 8                            0
TX - 64 Byte Frame Counter                       166
TX - 65 to 127 Byte Frame Counter                112
TX - 128 to 255 Byte Frame Counter               0
TX - 256 to 511 Byte Frame Counter               0
TX - 512 to 1023 Byte Frame Counter              0
TX - 1024 to 1518 Byte Frame Counter             0
TX - 1519 to 1522 Byte Good VLAN Frame Counter  0
TX - 1519 to 2047 Byte Frame Counter            0
TX - 2048 to 4095 Byte Frame Counter            0
TX - 4096 to 9216 Byte Frame Counter            0
TX - Good Packet Counter                        278
TX - Packet/Frame Counter                       278
```

```

TX - Unicast Frame Counter          0
TX - Multicast Frame Counter        278
TX - Broadcast Frame Counter        0
TX - Byte Counter                   18688
TX - Control Frame Counter          0
TX - Pause Control Frame Counter    0
TX - Oversized Frame Counter        0
TX - Jabber Counter                 0
TX - VLAN Tag Frame Counter         0
TX - Double VLAN Tag Frame Counter  0
TX - RUNT Frame Counter             0
TX - Fragment Counter              0
TX - PFC Frame Priority 0           0
TX - PFC Frame Priority 1           0
TX - PFC Frame Priority 2           0
TX - PFC Frame Priority 3           0
TX - PFC Frame Priority 4           0
TX - PFC Frame Priority 5           0
TX - PFC Frame Priority 6           0
TX - PFC Frame Priority 7           0
TX - Debug Counter 0                0
TX - Debug Counter 1                0
TX - Debug Counter 2                0
TX - Debug Counter 3                0
TX - Debug Counter 4                0
TX - Debug Counter 5                0
TX - Debug Counter 6                0
TX - Debug Counter 7                0
TX - Debug Counter 8                0
TX - Debug Counter 9                0
TX - Debug Counter 10               0
TX - Debug Counter 11               0

```

```

-----
-----
-----
-----
-----

```

unit: 0 port: 61 (interface Fo 1/60)

Description	Value
RX - IPV4 L3 Unicast Frame Counter	0
RX - IPV4 L3 Routed Multicast Packets	0
RX - IPV6 L3 Unicast Frame Counter	0
RX - IPV6 L3 Routed Multicast Packets	0
RX - Unicast Packet Counter	0
RX - 64 Byte Frame Counter	0
RX - 65 to 127 Byte Frame Counter	0
RX - 128 to 255 Byte Frame Counter	0
RX - 256 to 511 Byte Frame Counter	0
RX - 512 to 1023 Byte Frame Counter	0
RX - 1024 to 1518 Byte Frame Counter	0
RX - 1519 to 1522 Byte Good VLAN Frame Counter	0
RX - 1519 to 2047 Byte Frame Counter	0
RX - 2048 to 4095 Byte Frame Counter	0
RX - 4096 to 9216 Byte Frame Counter	0
RX - Good Packet Counter	0
RX - Packet/Frame Counter	0
RX - Unicast Frame Counter	0
RX - Multicast Frame Counter	0
RX - Broadcast Frame Counter	0
RX - Byte Counter	0
RX - Control Frame Counter	0
RX - Pause Control Frame Counter	0
RX - Oversized Frame Counter	0
RX - Jabber Frame Counter	0
RX - VLAN Tag Frame Counter	0
RX - Double VLAN Tag Frame Counter	0
RX - RUNT Frame Counter	0

```

RX - Fragment Counter 0
RX - VLAN Tagged Packets 0
RX - Ingress Dropped Packet 0
RX - MTU Check Error Frame Counter 0
RX - PFC Frame Priority 0 0
RX - PFC Frame Priority 1 0
RX - PFC Frame Priority 2 0
RX - PFC Frame Priority 3 0
RX - PFC Frame Priority 4 0
RX - PFC Frame Priority 5 0
RX - PFC Frame Priority 6 0
RX - PFC Frame Priority 7 0
RX - Debug Counter 0 0
RX - Debug Counter 1 0
RX - Debug Counter 2 0
RX - Debug Counter 3 0
RX - Debug Counter 4 0
RX - Debug Counter 5 0
RX - Debug Counter 6 0
RX - Debug Counter 7 0
RX - Debug Counter 8 0
TX - 64 Byte Frame Counter 0
TX - 65 to 127 Byte Frame Counter 0
TX - 128 to 255 Byte Frame Counter 0
TX - 256 to 511 Byte Frame Counter 0
TX - 512 to 1023 Byte Frame Counter 0
TX - 1024 to 1518 Byte Frame Counter 0
TX - 1519 to 1522 Byte Good VLAN Frame Counter 0
TX - 1519 to 2047 Byte Frame Counter 0
TX - 2048 to 4095 Byte Frame Counter 0
TX - 4096 to 9216 Byte Frame Counter 0
TX - Good Packet Counter 0
TX - Packet/Frame Counter 0
TX - Unicast Frame Counter 0
TX - Multicast Frame Counter 0
TX - Broadcast Frame Counter 0
TX - Byte Counter 0
TX - Control Frame Counter 0
TX - Pause Control Frame Counter 0
TX - Oversized Frame Counter 0
TX - Jabber Counter 0
TX - VLAN Tag Frame Counter 0
TX - Double VLAN Tag Frame Counter 0
TX - RUNT Frame Counter 0
TX - Fragment Counter 0
TX - PFC Frame Priority 0 0
TX - PFC Frame Priority 1 0
TX - PFC Frame Priority 2 0
TX - PFC Frame Priority 3 0
TX - PFC Frame Priority 4 0
TX - PFC Frame Priority 5 0
TX - PFC Frame Priority 6 0
TX - PFC Frame Priority 7 0
TX - Debug Counter 0 0
TX - Debug Counter 1 0
TX - Debug Counter 2 0
TX - Debug Counter 3 0
TX - Debug Counter 4 0
TX - Debug Counter 5 0
TX - Debug Counter 6 0
TX - Debug Counter 7 0
TX - Debug Counter 8 0
TX - Debug Counter 9 0
TX - Debug Counter 10 0
TX - Debug Counter 11 0

```

**Example (port-
statistics)**

```

Dell#show hardware stack-unit 0 unit 0 port-stats
ena/ speed/ link auto STP lrn inter max

```

```

loop
port link duplex scan neg? state pause discred ops face frame
back
  xe0 up 10G FD SW Yes Forward None FA KR 11996
  xe1 up 10G FD SW Yes Forward None FA KR 11996
  xe2 up 10G FD SW Yes Forward None FA KR 11996
  xe3 down 1G FD SW Yes Block RX None FA GMII 11996
  xe4 up 10G FD SW Yes Forward None FA KR 11996
  xe5 down 1G FD SW Yes Block RX None FA GMII 11996
  xe6 up 10G FD SW Yes Forward None FA KR 11996
  xe7 down 1G FD SW Yes Block RX None FA GMII 11996
  xe8 down 10G FD SW No Block RX None FA SFI 11996
  xe9 down 10G FD SW No Block RX None FA SFI 11996
  xe10 up 10G FD SW No Forward None FA SFI 11996
  xe11 up 10G FD SW No Forward None FA SFI 11996
Dell#

```

Example (register)

```

Dell#show hardware stack-unit 0 unit 0 register
0x0f180d34 ALTERNATE_EMIRROR_BITMAP_PARITY_CONTROL.ipipe0 = 0x00000001
0x0f180d35 ALTERNATE_EMIRROR_BITMAP_PARITY_STATUS_INTR.ipipe0 = 0x00000000
0x0f180d36 ALTERNATE_EMIRROR_BITMAP_PARITY_STATUS_NACK.ipipe0 = 0x00000000
0x0018070c ARB_EOP_DEBUG.ipipe0 = 0x00000000
0x00180312 ARB_RAM_DBGCTRL.ipipe0 = 0x00000000
0x03330000 ASF_PORT_SPEED.cpu0 = 0x00000000
0x03322000 ASF_PORT_SPEED.xe0 = 0x00000000
0x03326000 ASF_PORT_SPEED.xe1 = 0x00000000
0x0332a000 ASF_PORT_SPEED.xe2 = 0x00000007
0x0332e000 ASF_PORT_SPEED.xe3 = 0x00000000
0x03323000 ASF_PORT_SPEED.xe4 = 0x00000000
0x03327000 ASF_PORT_SPEED.xe5 = 0x00000000
0x0332b000 ASF_PORT_SPEED.xe6 = 0x00000000
0x0332f000 ASF_PORT_SPEED.xe7 = 0x00000000
0x03324000 ASF_PORT_SPEED.xe8 = 0x00000000
0x03328000 ASF_PORT_SPEED.xe9 = 0x00000000
0x0332c000 ASF_PORT_SPEED.xe10 = 0x00000000
0x03330000 ASF_PORT_SPEED.xe11 = 0x00000000
0x03325000 ASF_PORT_SPEED.xe12 = 0x00000000
0x03329000 ASF_PORT_SPEED.xe13 = 0x00000000
0x0332d000 ASF_PORT_SPEED.xe14 = 0x00000000
0x03331000 ASF_PORT_SPEED.xe15 = 0x00000000
0x03332000 ASF_PORT_SPEED.xe16 = 0x00000000
0x03336000 ASF_PORT_SPEED.xe17 = 0x00000000
0x0333a000 ASF_PORT_SPEED.xe18 = 0x00000000
0x0333e000 ASF_PORT_SPEED.xe19 = 0x00000000
0x03333000 ASF_PORT_SPEED.xe20 = 0x00000000
0x03337000 ASF_PORT_SPEED.xe21 = 0x00000000
0x0333b000 ASF_PORT_SPEED.xe22 = 0x00000000
0x0333f000 ASF_PORT_SPEED.xe23 = 0x00000000
0x03334000 ASF_PORT_SPEED.xe24 = 0x00000000
0x03338000 ASF_PORT_SPEED.xe25 = 0x00000000
0x0333c000 ASF_PORT_SPEED.xe26 = 0x00000000
0x03340000 ASF_PORT_SPEED.xe27 = 0x00000000
0x03335000 ASF_PORT_SPEED.xe28 = 0x00000000
0x03339000 ASF_PORT_SPEED.xe29 = 0x00000000
!----- output truncated -----!

```

Example (unit details)

```

Dell#show hardware stack-unit 0 unit 0 details
*****

The total no of FP & CSF Devices in the Card is 1
The total no of FP Devices in the Card is 1
The total no of CSF Devices in the Card is 0
The number of ports in device 0 is - 12
The number of Hg ports in devices 0 is - 1
The CPU Port of the device is 0
The starting unit no the SWF in the device is 0
*****

```

```

bcmLinkMonStatusShow: The Current Link Status Is

Front End Link Status          0xea300000000000000000000000000000
Front End Port Present Status  0x00000000000000000000000000000000
Back Plane Link Status         0x00000000

*****

Link Status of all the ports in the Device - 0

The linkStatus of Front End Port 42 is TRUE
The linkStatus of Front End Port 43 is TRUE
The linkStatus of Front End Port 44 is TRUE
The linkStatus of Front End Port 45 is FALSE
The linkStatus of Front End Port 46 is TRUE
The linkStatus of Front End Port 47 is FALSE
The linkStatus of Front End Port 48 is TRUE
The linkStatus of Front End Port 49 is FALSE
The linkStatus of Front End Port 50 is FALSE
The linkStatus of Front End Port 51 is FALSE
The linkStatus of Front End Port 52 is TRUE
The linkStatus of Front End Port 53 is TRUE
*****

*****

ModPort Table for Device - 0
For Destination Mod Id 0 Destination Port is 0
*****
Dell#

```

Example (Buffer-Info)

```

Dell# show hardware stack-unit 1 buffer unit 0 port 1 priority-group 0 buffer-info

----- Buffer Accounting Stats for Unit 0 Port 1 priority-group 0 -----
Maximum Shared Limit: 0
Default Packet Buffer allocate for the priority-group: 61440
Accounted Packet Buffer: 0

```

Example (buffer)

```

Dell#show hardware stack-unit 0 buffer total-buffer
----- Buffer Details for Stack-Unit 0 -----
Total Buffers allocated per Stack-Unit 19456
Dell#

```

Example (Queue2/Buffer-Info)

```

Dell#show hardware stack-unit 1 buffer unit 0 interface all queue 6 buffer-info
      Buffer Stats for Front End Ports
      =====
----- Buffer Stats for Interface Te 1/1 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/2 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/3 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/4 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/5 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8

```

```
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/6 Queue 6 -----
Maximum Shared Limit: 7667
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
<output truncated for brevity>
```

- Related Commands**
- `show interfaces stack-unit` — displays information on all interfaces on a specific stack member.
 - `show processes cpu` — displays CPU usage information based on running processes.
 - `show system` — displays the current status of all stack members or a specific member.

show hardware system-flow

Display Layer 2 ACL or QoS data for the selected stack member and stack member port-pipe.

Syntax `show hardware system-flow layer2 stack-unit 0-5 port-set 0-0 [counters]`

- Parameters**
- acl | qos** For the selected stack member and stack member port-pipe, display which system flow entry the packet hits and what queue the packet takes as it dumps the raw system flow tables.
 - stack-unit 0-5** Enter the keywords `stack-unit` then 0 to 5 to select a stack member ID.
 - port-set 0-0 [counters]** Enter the keywords `port-set` with a port-pipe number—0.
(OPTIONAL) Enter the keyword `counters` to display hit counters for the selected ACL or QoS option.

Defaults none

Command Modes EXEC Privilege

Supported Modes All Modes

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.4(0.0)	Supported on the FN I/O Aggregator.

Example

```
Dell#show hardware system-flow layer2 stack-unit 0 port-set 0 counters
```

EntryId	Description	#HITS
767	LLDP BPDU Redirects	2611
765	LACP traffic Redirects	250
763	ARP Reply Redirects	0
762	Slow Protocol Drops	1155
758	OSPFv3 Multicast [33:33:00:00:00:06]	0
759	OSPFv3 Multicast [33:33:00:00:00:05]	0
756	GRAT ARP	0
711	VLT ARP Replies for Peer	0
710	ICL Hellos	0
709	ICL MAC SYNC Frames	0
708	VLT STP BPDUs Tunneled	0
707	VLT IGMP Sync Frames	0
706	VLT ARP Replies Tunneled	0

```

705          VLT L2PM Sync Frames          0
704          VLT ARP Sync Frames          0
703          VLT IPM Sync Frames          0
701          VLT NDPM Sync Frames          0
699          VLT TTL1 Packets Tunneled    0
698          VLT Dyn Client pkts          0
697          VLT PIM Sync Frames          0
696          VLT MRTM Sync Frames          0
695          VLT SMUX Sync Frames          0
693          DROP Cases                    0
509          BGP_SPORT PACKETS            0
508          BGP_DPORT PACKETS            0
507          MSDP_SPORT PACKETS            0
506          MSDP_DPORT PACKETS            0
510          IGMP PACKETS WITH IP OPTIONS  26
505          FP Entry for OSPF IPv4 Unicast 0
504          FP Entry for RIP IPv4 Unicast 0
503          FP Entry for OSPF IPv6 Unicast 0
502          FP Entry for NA IPv6          0
501          FP Entry for RA IPv6          0
500          FP Entry for NS IPv6          4
499          FP Entry for RS IPv6          8
498          FP Entry for MLD IPv6         0
497          L3 CPU Bound Traffic
          ClassId 2 to Q5                  0
496          FP Entry for ICMP CPU Terminated IPv6 0
495          FP Entry for ICMP IPv6        0
494          L3 Term Traffic
          ClassID 1 to Q6                  0
493          Unknown MCAST Packets         0
492          224.0.0.x                     24
491          224.0.1.1                     0
490          SIMPLEMUX - VLAN Flood
          Restrict Entry                   0
249          IGMP Packets                  26
147          MULTICAST KNOWN TTL1          0
145          L2_DST_HIT+BC MAC+VLAN 4095  0
144          L2_DST_HIT+BC MAC             0
773          Known & Unknown L3UC Packets  0
772          Unknown L2MC Packets          26
771          Known and Unknown L3MC Packets 0
770          L2UCAST + L2DLF Packets       0
769          L2BCASTPackets                0
Dell#

```

Example (non-counters)

```

Dell#show hardware system-flow layer2 stack-unit 0 port-set 0

##### FP Entry for redirecting STP BPDU to CPU Port #####
EID 2048: gid=1,
  slice=15, slice_idx=0x00, prio=0x800, flags=0x82, Installed
  tcam: color_indep=0, higig=0, higig_mask=0,
  KEY=0x00000000 00000000 00000000 0180c200 00000000 00000000 00000000
, FPF4=0x00
  MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000
,
  0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
  meter=NULL,
  counter={idx=0, mode=0x01, entries=1}

##### FP Entry for redirecting LLDP BPDU to RSM #####
EID 2047: gid=1,
  slice=15, slice_idx=0x01, prio=0x7ff, flags=0x82, Installed
  tcam: color_indep=0, higig=0, higig_mask=0,
  KEY=0x00000000 00000000 00000000 0180c200 000e0000 00000000 00000000
, FPF4=0x00
  MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000
,
  0x00
  action={act=Drop, param0=0(0x00), param1=0(0x00)},
  action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
  action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
  action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
  meter=NULL,
  counter={idx=1, mode=0x01, entries=1}

```

```

##### FP Entry for redirecting LACP traffic to CPU Port #####
EID 2045: gid=1,
        slice=15, slice_idx=0x02, prio=0x7fd, flags=0x82, Installed
        tcam: color_indep=0, higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 00020000 00000000 00000000
, FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000
,
        0x00
        action={act=Drop, param0=0(0x00), param1=0(0x00)},
        action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
        action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
        action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
        meter=NULL,
        counter={idx=2, mode=0x01, entries=1}

##### FP Entry for redirecting GVRP traffic to RSM #####
EID 2044: gid=1,
        slice=15, slice_idx=0x03, prio=0x7fc, flags=0x82, Installed
        tcam: color_indep=0, higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 0180c200 00210000 00000000 00000000
, FPF4=0x00
        MASK=0x00000000 00000000 00000000 ffffffff ffff0000 00000000 00000000
,
        0x00
        action={act=Drop, param0=0(0x00), param1=0(0x00)},
        action={act=CosQCpuNew, param0=7(0x07), param1=0(0x00)},
        action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
        action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
        meter=NULL,
        counter={idx=3, mode=0x01, entries=1}

##### FP Entry for redirecting ARP Replies to RSM #####
EID 2043: gid=1,
        slice=15, slice_idx=0x04, prio=0x7fb, flags=0x82, Installed
        tcam: color_indep=0, higig=0, higig_mask=0,
        KEY=0x00000000 00000000 00000000 00000000 00000000 00000806 00001600
, FPF4=0x00
        MASK=0x00000000 00000000 00000000 00000000 00000000 0000ffff 00001600
,
        0x00
        action={act=Drop, param0=0(0x00), param1=0(0x00)},
        action={act=CosQCpuNew, param0=6(0x06), param1=0(0x00)},
        action={act=CopyToCpu, param0=0(0x00), param1=0(0x00)},
        action={act=UpdateCounter, param0=1(0x01), param1=0(0x00)},
!----- output truncated -----!

```

show hardware buffer interface

Display buffer statistics for a specific interface.

Syntax `show hardware buffer interface interface{priority-group { id | all } | queue { id | all }] buffer-info`

Parameters

interface <i>interface</i>	Enter any of the following keywords and slot/port or number information: <ul style="list-style-type: none"> For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information.
priority-group	Identifier of the priority group in the range of 0 to 7.
queue	Enter the keyword <code>queue</code> followed by <i>id</i> for specific queue or keyword <code>all</code> .
buffer-info	To display total buffer information for the interface, enter the keywords <code>buffer-info</code> .

Command Modes EXEC

EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the M I/O Aggregator and FN I/O Aggregator.

Example displaying total-buffer information for the interface

```
Dell# show hardware buffer interface tengigabitethernet 1/1 buffer-info
----- Buffer Stats for Interface Te 1/1 -----
Maximum Shared Limit for the Interface: 38336
Default Packet Buffer allocate for the Interface: 120
Used Packet Buffer for the Interface: 0
```

Example displaying priority-group range

```
Dell#show hardware buffer interface tengigabitethernet 1/1 priority-group 0 buffer-info
----- Buffer stats for unit: 0 port: 1 (interface Te 1/1) -----
-----
PG# PRIORITIES                ALLOTED (CELLS)                COUNTER (CELLS)
      MIN      SHARED      MODE      HDRM      MIN      SHARED      HDRM
-----
0 -                61440  0          STATIC  174      0         0         0
-----
Dell#
```

Example displaying queue range

```
Dell#show hardware buffer interface tengigabitethernet 1/1 queue all buffer-info
----- Buffer Stats for Interface Te 1/1 Queue 0 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 1 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 2 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 3 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 4 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 5 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 6 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 7 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 8 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 9 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 10 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
```

```

Used Packet Buffer: 0
----- Buffer Stats for Interface Te 1/1 Queue 11 -----
Maximum Shared Limit: 29514
Default Packet Buffer allocate for the Queue: 8
<output truncated for brevity>

```

show hardware counters interface *interface*

Display the counter information for a specific interface.

Syntax `show hardware counters interface interface`

Parameters

counters Enter the keywords `counters` to display counter value for the specified stack-member the port-pipe.

interface *interface* Enter any of the following keywords and slot/port or number information:

- For a 10-Gigabit Ethernet interface, enter the keyword `TenGigabitEthernet` then the slot/port information.
- For a 40-Gigabit Ethernet interface, enter the keyword `fortyGigE` then the slot/port information.

Defaults none

Command Modes

- EXEC
- EXEC Privilege

Supported Modes Full-Switch

Command History This guide is platform-specific. For command information about other platforms, refer to the relevant *Dell Networking OS Command Line Reference Guide*.

The following is a list of the Dell Networking OS version history for this command.

Version	Description
9.9(0.0)	Introduced on the FN IOM.
9.8(0.0)	Introduced on the FN I/O Aggregator.

Example

```

Dell#show hardware counters interfac tengigabitethernet 5/1
unit: 0 port: 2 (interface Te 5/1)
Description                                     Value
RX - IPV4 L3 Unicast Frame Counter              0
RX - IPV4 L3 Routed Multicast Packets           0
RX - IPV6 L3 Unicast Frame Counter              0
RX - IPV6 L3 Routed Multicast Packets           0
RX - Unicast Packet Counter                     0
RX - 64 Byte Frame Counter                      0
RX - 65 to 127 Byte Frame Counter               0
RX - 128 to 255 Byte Frame Counter              0
RX - 256 to 511 Byte Frame Counter              0
RX - 512 to 1023 Byte Frame Counter             0
RX - 1024 to 1518 Byte Frame Counter            0
RX - 1519 to 1522 Byte Good VLAN Frame Counter 0
RX - 1519 to 2047 Byte Frame Counter           0
RX - 2048 to 4095 Byte Frame Counter            0

```

```

RX - 4096 to 9216 Byte Frame Counter      0
RX - Good Packet Counter                  0
RX - Packet/Frame Counter                 0
RX - Unicast Frame Counter                0
RX - Multicast Frame Counter              0
RX - Broadcast Frame Counter              0
RX - Byte Counter                         0
RX - Control Frame Counter                0
RX - Pause Control Frame Counter          0
RX - Oversized Frame Counter              0
RX - Jabber Frame Counter                 0
RX - VLAN Tag Frame Counter               0
RX - Double VLAN Tag Frame Counter        0
RX - RUNT Frame Counter                   0
RX - Fragment Counter                     0
RX - VLAN Tagged Packets                  0
RX - Ingress Dropped Packet               0
RX - MTU Check Error Frame Counter        0
RX - PFC Frame Priority 0                 0
RX - PFC Frame Priority 1                 0
RX - PFC Frame Priority 2                 0
RX - PFC Frame Priority 3                 0
RX - PFC Frame Priority 4                 0
RX - PFC Frame Priority 5                 0
RX - PFC Frame Priority 6                 0
RX - PFC Frame Priority 7                 0
RX - Debug Counter 0                     0
RX - Debug Counter 1                     0
RX - Debug Counter 2                     0
<output truncated for brevity>

```

show hardware drops

Displays internal drops on the specified interface or for a range of interface.

Syntax `show hardware drops interface interface`

Parameters

interface	Enter any of the following keywords and slot/port or slot/port-range or number information:
	<ul style="list-style-type: none"> • For a 10-Gigabit Ethernet interface, enter the keyword <code>TenGigabitEthernet</code> then the slot/port information. • For a 40-Gigabit Ethernet interface, enter the keyword <code>fortyGigE</code> then the slot/port information.
drops	Enter the keyword <code>drops</code> to display internal drops.

Command Modes

EXEC

EXEC Privilege

Supported Modes Full-Switch

Command History

Version	Description
9.9(0.0)	Introduced on the FN IOM.

Version	Description
9.8(0.0)	Introduced on the M I/O Aggregator and the FN I/O Aggregator.

Example displaying internal drops for the specific interface

```
Dell#show hardware drops interface tengigabitethernet 2/1
Drops in Interface Te 2/1:
  --- Ingress Drops      ---
Ingress Drops           : 0
IBP CBP Full Drops     : 0
PortSTPnotFwd Drops    : 0
IPv4 L3 Discards       : 0
Policy Discards        : 0
Packets dropped by FP   : 0
(L2+L3) Drops          : 0
Port bitmap zero Drops : 0
Rx VLAN Drops          : 0
  --- Ingress MAC counters---
Ingress FCSDrops       : 0
Ingress MTUExceeds    : 0
  --- MMU Drops          ---
Ingress MMU Drops     : 0
HOL DROPS (TOTAL)     : 0
HOL DROPS on COS0     : 0
HOL DROPS on COS1     : 0
HOL DROPS on COS2     : 0
HOL DROPS on COS3     : 0
HOL DROPS on COS4     : 0
HOL DROPS on COS5     : 0
HOL DROPS on COS6     : 0
HOL DROPS on COS7     : 0
HOL DROPS on COS8     : 0
HOL DROPS on COS9     : 0
HOL DROPS on COS10    : 0
HOL DROPS on COS11    : 0
HOL DROPS on COS12    : 0
HOL DROPS on COS13    : 0
HOL DROPS on COS14    : 0
HOL DROPS on COS15    : 0
HOL DROPS on COS16    : 0
HOL DROPS on COS17    : 0
TxPurge CellErr       : 0
Aged Drops             : 0
  --- Egress MAC counters---
Egress FCS Drops       : 0
  --- Egress FORWARD PROCESSOR Drops ---
IPv4 L3UC Aged & Drops : 0
TTL Threshold Drops    : 0
INVALID VLAN CNTR Drops : 0
L2MC Drops             : 0
PKT Drops of ANY Conditions : 0
Hg MacUnderflow        : 0
TX Err PKT Counter     : 0
  --- Error counters---
Internal Mac Transmit Errors : 0
Unknown Opcodes        : 0
Internal Mac Receive Errors : 0
```

Example displaying internal drops for FC port

```
Dell(conf)#do show hardware drops interface fibreChannel 0/49
Drops in Interface Fc 0/49:
  --- Ingress Drops      ---
Ingress Drops           : 10
IBP CBP Full Drops     : 0
PortSTPnotFwd Drops    : 0
IPv4 L3 Discards       : 0
Policy Discards        : 0
```

```

Packets dropped by FP      : 10
(L2+L3) Drops             : 0
Port bitmap zero Drops    : 1
Rx VLAN Drops             : 1
  --- Ingress MAC counters---
Ingress FCS Drops         : 0
Ingress MTUExceeds       : 0
  --- MMU Drops           ---
Ingress MMU Drops        : 0
Ingress Drops Bytes      : 0
HOL DROPS (TOTAL)        : 0
HOL DROPS on COS0        : 0
HOL DROPS on COS1        : 0
HOL DROPS on COS2        : 0
HOL DROPS on COS3        : 0
HOL DROPS on COS4        : 0
HOL DROPS on COS5        : 0
HOL DROPS on COS6        : 0
HOL DROPS on COS7        : 0
HOL DROPS on COS8        : 0
HOL DROPS on COS9        : 0
HOL DROPS on COS10       : 0
HOL DROPS on COS11       : 0
HOL DROPS on COS12       : 0
HOL DROPS on COS13       : 0
HOL DROPS on COS14       : 0
TxPurge CellErr          : 0
Aged Drops               : 0
  --- Egress MAC counters---
Egress FCS Drops         : 0
  --- Egress FORWARD PROCESSOR Drops ---
IPv4 L3UC Aged & Drops   : 0
TTL Threshold Drops      : 0
INVALID VLAN CNTR Drops  : 0
L2MC Drops               : 0
PKT Drops of ANY Conditions : 0
Hg MacUnderflow          : 0
TX Err PKT Counter       : 0
  --- Error counters---
Internal Mac Transmit Errors : 0
Unknown Opcodes          : 0
Internal Mac Receive Errors : 0
Dell(conf)#

```

Internet Control Message Protocol (ICMP) Message Types

This chapter lists and describes the possible ICMP message type resulting from a ping. The first three columns list the possible symbol or type/code. For example, you would receive a ! or 03 as an echo reply from your ping.

Table 7. ICMP messages and their definitions

Symbol	Type	Code	Description	Query	Error
.			Timeout (no reply)		
!	0	3	echo reply	.	
U	3		destination unreachable:		
		0	network unreachable		.
		1	host unreachable		.
		2	protocol unreachable		.
		3	port unreachable		.
		4	fragmentation needed but don't fragment bit set		.
		5	source route failed		.
		6	destination network unknown		.
		7	destination host unknown		.
		8	source host isolated (obsolete)		.
		9	destination network administratively prohibited		.
		10	destination host administratively prohibited		.
		11	network unreachable for TOS		.
		12	host unreachable for TOS		.
		13	communication administratively prohibited by filtering		.
		14	host precedence violation		.
		15	precedence cutoff in effect		.
C	4	0	source quench		.
	5		redirect		.
		0	redirect for network		.
		1	redirect for host		.
		2	redirect for type-of-service and network		.
		3	redirect for type-of-service and host		.
	8	0	echo request	.	
	9	0	router advertisement	.	

Symbol	Type	Code	Description	Query	Error
	10	0	router solicitation	.	
&	11		time exceeded:		
		0	time-to-live equals 0 during transit		.
		1	time-to-live equals 0 during reassembly		.
	12		parameter problem:		
		1	IP header bad (catchall error)		.
		2	required option missing		.
	13	0	timestamp request	.	
	14	0	timestamp reply	.	
	15	0	information request (obsolete)	.	
	16	0	information reply (obsolete)	.	
	17	0	address mask request	.	
	18	0	address mask reply	.	